

# FCC Test Report

**FCC ID: QISVTR-L29**

**Project No.** : 1611C132  
**Equipment** : Smart Phone  
**Model Name** : VTR-L29  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Nov. 21, 2016  
**Date of Test** : Nov. 21, 2016 ~ Dec. 13, 2016  
**Issued Date** : Dec. 14, 2016  
**Tested by** : BTL Inc.

Testing Engineer : Kevin Li  
(Kevin Li)

Technical Manager :   
(Bill Zhang)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000      FAX: +86-769-8319-6000



### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>4</b>    |
| <b>1 . CERIFICATION</b>                                      | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 EUT OPERATING CONDITIONS                                 | 11          |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11          |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 12          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>13</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 13          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 13          |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST                           | 13          |
| 4.1.3 TEST PROCEDURE                                         | 14          |
| 4.1.4 DEVIATION FROM TEST STANDARD                           | 14          |
| 4.1.5 TEST SETUP                                             | 14          |
| 4.1.6 TEST RESULTS                                           | 15          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 40          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 40          |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST                           | 41          |
| 4.2.3 TEST PROCEDURE                                         | 42          |
| 4.2.4 DEVIATION FROM TEST STANDARD                           | 42          |
| 4.2.5 TEST SETUP                                             | 43          |
| 4.2.6 TEST RESULTS-BELOW 1GHZ                                | 44          |
| 4.2.7 TEST RESULTS-ABOVE 1GHZ                                | 69          |

### REPORT ISSUED HISTORY

| Issued No.          | Description     | Issued Date   |
|---------------------|-----------------|---------------|
| BTL-FCCE-1-1611C132 | Original Issue. | Dec. 14, 2016 |

## 1. CERIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : VTR-L29  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Factory : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Nov. 21, 2016 ~ Dec. 13, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1611C132) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission                              |                                  |         |          |         |
|-------------------------------------------|----------------------------------|---------|----------|---------|
| Standard(s)                               | Test Item                        | Limit   | Judgment | Remark  |
| FCC Part 15, Subpart B<br>ANSI C63.4-2014 | Conducted Emission               | Class B | PASS     |         |
|                                           | Radiated emission<br>Below 1 GHz | Class B | PASS     |         |
|                                           | Radiated emission<br>Above 1 GHz | Class B | PASS     | NOTE(2) |

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150 kHz ~ 30MHz             | 2.32    |

### B. Radiated Measurement :

| Test Site    | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|--------------|--------|-----------------------------|------------|---------|
| DG-CB03 (3m) | CISPR  | 9KHz ~ 30MHz                | V          | 3.79    |
|              |        | 9KHz ~ 30MHz                | H          | 3.57    |
|              |        | 30MHz ~ 200MHz              | V          | 3.82    |
|              |        | 30MHz ~ 200MHz              | H          | 3.78    |
|              |        | 200MHz ~ 1,000MHz           | V          | 4.10    |
|              |        | 200MHz ~ 1,000MHz           | H          | 4.06    |

| Test Site    | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|--------------|--------|-----------------------------|------------|---------|
| DG-CB03 (3m) | CISPR  | 1GHz ~ 18GHz                | V          | 3.12    |
|              |        | 1GHz ~ 18GHz                | H          | 3.68    |
|              |        | 1GHz ~ 18GHz                | V          | 3.12    |
|              |        | 1GHz ~ 18GHz                | H          | 3.68    |

| Test Site    | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|--------------|--------|-----------------------------|------------|---------|
| DG-CB03 (1m) | CISPR  | 18GHz ~ 40GHz               | V          | 4.15    |
|              |        | 18GHz ~ 40GHz               | H          | 4.14    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |                                                                                                                                                                                                                                                            |              |                    |                   |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|-------------------|
| Equipment        | Smart Phone                                                                                                                                                                                                                                                |              |                    |                   |
| Brand Name       | HUAWEI                                                                                                                                                                                                                                                     |              |                    |                   |
| Model Name       | VTR-L29                                                                                                                                                                                                                                                    |              |                    |                   |
| Model Difference | N/A                                                                                                                                                                                                                                                        |              |                    |                   |
| Frequency        | Mode                                                                                                                                                                                                                                                       |              | Work Frequency     |                   |
|                  |                                                                                                                                                                                                                                                            |              | Transmit Frequency | Receive Frequency |
|                  | GSM(SIM1)                                                                                                                                                                                                                                                  | GSM850       | 824 - 849          | 869 - 894         |
|                  |                                                                                                                                                                                                                                                            | PCS1900      | 1850-1910          | 1930-1990         |
|                  | GSM(SIM2)                                                                                                                                                                                                                                                  | GSM850       | 824 - 849          | 869 - 894         |
|                  |                                                                                                                                                                                                                                                            | PCS1900      | 1850-1910          | 1930-1990         |
|                  | UMTS(SIM1)                                                                                                                                                                                                                                                 | Band II      | 1850-1910          | 1930-1990         |
|                  |                                                                                                                                                                                                                                                            | Band IV      | 1710-1755          | 2110-2155         |
|                  |                                                                                                                                                                                                                                                            | Band V       | 824 - 849          | 869 - 894         |
|                  | UMTS(SIM2)                                                                                                                                                                                                                                                 | Band II      | 1850-1910          | 1930-1990         |
|                  |                                                                                                                                                                                                                                                            | Band IV      | 1710-1755          | 2110-2155         |
|                  |                                                                                                                                                                                                                                                            | Band V       | 824 - 849          | 869 - 894         |
|                  | LTE(SIM1)                                                                                                                                                                                                                                                  | Band II      | 1850-1910          | 1930-1990         |
|                  |                                                                                                                                                                                                                                                            | Band IV      | 1710-1755          | 2110-2155         |
|                  |                                                                                                                                                                                                                                                            | Band V       | 824 - 849          | 869 - 894         |
|                  |                                                                                                                                                                                                                                                            | Band VII     | 2500-2570          | 2620-2690         |
|                  |                                                                                                                                                                                                                                                            | Band XII     | 699-716            | 729-746           |
|                  |                                                                                                                                                                                                                                                            | Band XVII    | 704-716            | 734-746           |
|                  |                                                                                                                                                                                                                                                            | Band XXVI    | 814-849            | 859-894           |
|                  |                                                                                                                                                                                                                                                            | Band XXIX    | N/A                | 717-728           |
|                  |                                                                                                                                                                                                                                                            | Band XXXVIII | 2570-2620          | 2570-2620         |
|                  |                                                                                                                                                                                                                                                            | Band XLI     | 2555-2655          | 2555-2655         |
|                  | Bluetooth                                                                                                                                                                                                                                                  |              | 2400-2483.5        | 2400-2483.5       |
|                  | Wi-Fi 2.4G                                                                                                                                                                                                                                                 |              | 2400-2483.5        | 2400-2483.5       |
|                  | Wi-Fi 5G                                                                                                                                                                                                                                                   |              | 5150-5350          | 5150-5350         |
|                  |                                                                                                                                                                                                                                                            |              | 5470-5850          | 5470-5850         |
|                  | NFC                                                                                                                                                                                                                                                        |              | 13.56              | 13.56             |
|                  | GPS                                                                                                                                                                                                                                                        |              | -                  | 1575.42           |
| Power Source     | #1 DC Voltage supplied from AC/DC adapter.<br>#2 Battery Supplied.                                                                                                                                                                                         |              |                    |                   |
| Power Rating     | #1 Input: 100-240V -5V 0.75A,<br>Output:5V  2A/4.5A, 4.5V  5A<br>#2 DC 3.82V 3100mAh |              |                    |                   |
| HW Version       | HL1AVTRM                                                                                                                                                                                                                                                   |              |                    |                   |
| SW Version       | D188-L29C432B083                                                                                                                                                                                                                                           |              |                    |                   |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. The EUT contains following accessory devices

| Item      | Mfr/Brand                                        | Model.                               |
|-----------|--------------------------------------------------|--------------------------------------|
| Battery   | Sunwoda Electronic Co., LTD                      | HB386280ECW                          |
|           | SCUD (FUJIAN) Electronics Co., Ltd               | HB386280ECW                          |
|           | Desay Battery Co., Ltd.                          | HB386280ECW                          |
| USB Cable | LUXSHARE-ICT Co., Ltd.                           | L99UC018-CS-H                        |
|           | Chang Shu Honglin Technology Co.,Ltd.            | 130-27309                            |
| Earphone  | JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD | MEMD1632B580C00                      |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD       | 1311-3291-3.5mm-229                  |
|           | Goer Tek Inc                                     | NA12                                 |
|           | MERRY ELECTRONICS (SHENZHEN) CO., LTD.           | EMC309-001                           |
| Adapter   | DONGGUAN PHITEK ELECTRONICS CO.,LTD.             | HW-050450B00(UK)                     |
|           | SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.             | HW-050450E00(EU)                     |
|           | Salcomp (Shenzhen)Co.,Ltd                        | HW-050450U00(US)<br>HW-050450A00(AU) |

## 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                      |
|--------------|--------------------------------------------------|
| Mode 1       | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2       | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3       | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4       | Adapter+Idle+Playing+Speaker                     |
| Mode 5       | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6       | Adapter+Traffic (WCDMA)                          |
| Mode 7       | Adapter+Traffic (LTE)                            |

| For Conducted Test |                                                  |
|--------------------|--------------------------------------------------|
| Final Test Mode    | Description                                      |
| Mode 1             | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2             | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3             | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4             | Adapter+Idle+Playing+Speaker                     |
| Mode 5             | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6             | Adapter+Traffic (WCDMA)                          |
| Mode 7             | Adapter+Traffic (LTE)                            |


| For Radiated Test |                                                  |
|-------------------|--------------------------------------------------|
| Final Test Mode   | Description                                      |
| Mode 1            | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2            | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3            | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4            | Adapter+Idle+Playing+Speaker                     |
| Mode 5            | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6            | Adapter+Traffic (WCDMA)                          |
| Mode 7            | Adapter+Traffic (LTE)                            |

### 3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1

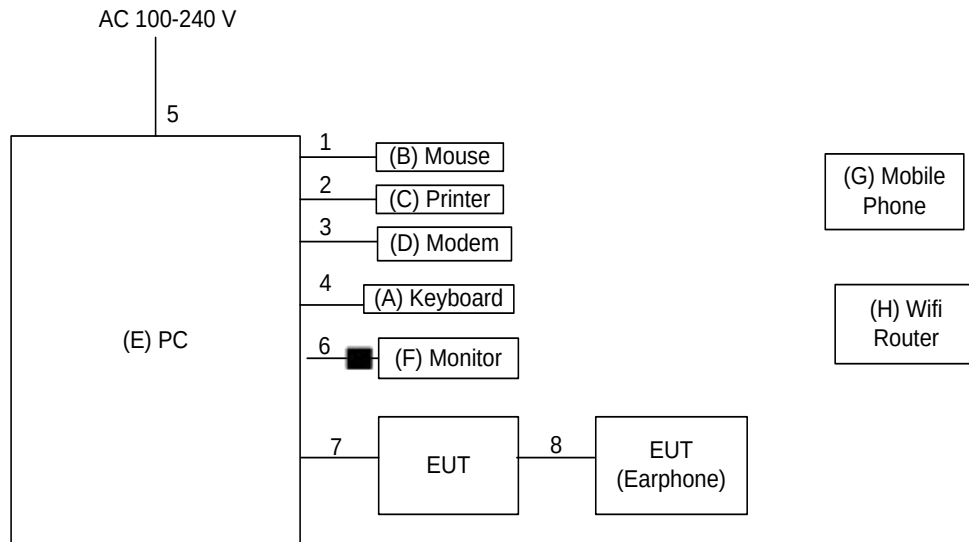


Ground plane

Remote System

■ Ferrite core

#### Mode 2-7

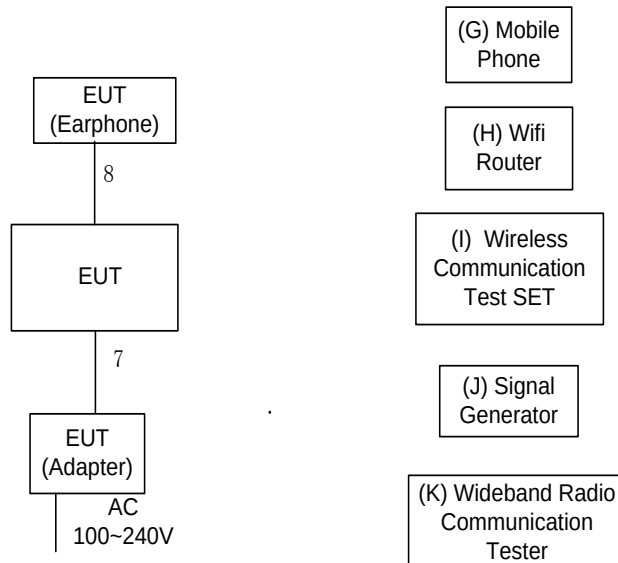

Ground plane

Remote System

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                           | Mfr/Brand | Model/Type No.       | FCC ID      | Series No.              |
|------|-------------------------------------|-----------|----------------------|-------------|-------------------------|
| A    | USB Keyboard                        | Dell      | L100                 | DOC         | CNORH6596589071T08NE    |
| B    | USB Mouse                           | Dell      | MO56UOA              | DOC         | FQJ000BS                |
| C    | Printer                             | SII       | DPU-414              | DOC         | 3018507 B               |
| D    | Modem                               | ACEEX     | DM-1414V             | IFAXDM1414  | 0603002131              |
| E    | PC                                  | Dell      | DCSM 745             | DOC         | G7K832X                 |
| F    | LCD monitor                         | Dell      | E177FPc              | DOC         | CNOFJ179-64180-6AG-1WNS |
| G    | Mobile phone                        | Samsung   | SGH-1747             | A3LSGH1747  | R31C208VLDB             |
| H    | Wireless Router                     | ASUS      | RT-AC66U             | MSQ-RTAC66U | E8ICGG000138            |
| I    | Wireless Communication Test SET     | Agilent   | (8960 Series) E5515C | N/A         | MY48364183              |
| J    | Signal Generator                    | Agilent   | E4438C               | N/A         | MY49071316              |
| K    | Wideband Radio Communication Tester | RS        | CMW500               | N/A         | 122125                  |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC power Cable |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.2m   | Earphone Cable |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer | Type No.               | Serial No. | Calibrated until |
|------|----------------------|--------------|------------------------|------------|------------------|
| 1    | LISN                 | EMCO         | 3816/2                 | 0052765    | Mar. 27, 2017    |
| 2    | LISN                 | R&S          | ENV216                 | 101447     | Mar. 27, 2017    |
| 3    | Test Cable           | emci         | RG223(9K Hz-30MHz)     | C_17       | Mar. 10, 2017    |
| 4    | EMI Test Receiver    | R&S          | ESCI                   | 100382     | Mar. 27, 2017    |
| 5    | 50Ω Terminator       | SHX          | TF2-3G-A               | 08122901   | Mar. 27, 2017    |
| 6    | Measurement Software | Farad        | EZ-EMC Ver.NB-03A 1-01 | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB,otherwise,QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

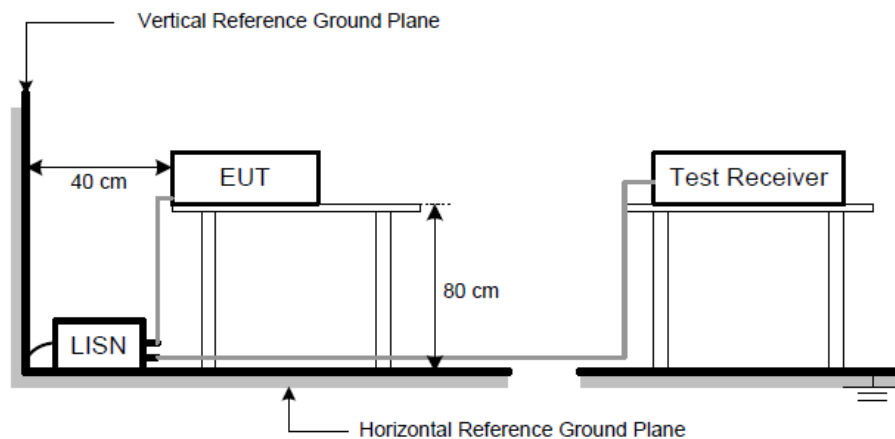


#### 4.1.6 TEST RESULTS

##### Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW=10KHz, Swp. Time = 0.3 sec./MHz.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

|               |                                                     |                   |         |
|---------------|-----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                        | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |         |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                            |                   |         |


80 dBuV

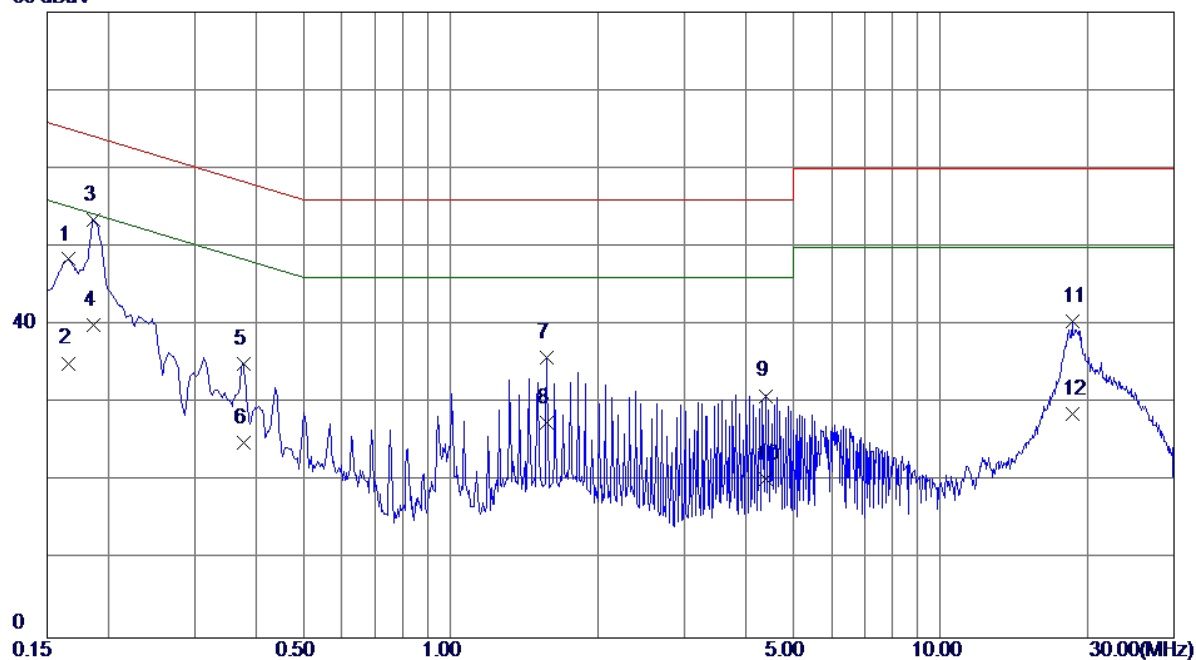

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 38.88                    | 9.52                    | 48.40                   | 65.16         | -16.76       | QP       |
| 2   | 0.1660       | 25.60                    | 9.52                    | 35.12                   | 55.16         | -20.04       | AVG      |
| 3 * | 0.1860       | 43.85                    | 9.53                    | 53.38                   | 64.21         | -10.83       | QP       |
| 4   | 0.1860       | 30.50                    | 9.53                    | 40.03                   | 54.21         | -14.18       | AVG      |
| 5   | 0.3780       | 25.55                    | 9.54                    | 35.09                   | 58.32         | -23.23       | QP       |
| 6   | 0.3780       | 15.40                    | 9.54                    | 24.94                   | 48.32         | -23.38       | AVG      |
| 7   | 1.5700       | 26.02                    | 9.88                    | 35.90                   | 56.00         | -20.10       | QP       |
| 8   | 1.5700       | 17.60                    | 9.88                    | 27.48                   | 46.00         | -18.52       | AVG      |
| 9   | 4.3940       | 20.85                    | 10.11                   | 30.96                   | 56.00         | -25.04       | QP       |
| 10  | 4.3940       | 10.20                    | 10.11                   | 20.31                   | 46.00         | -25.69       | AVG      |
| 11  | 18.5860      | 30.16                    | 10.39                   | 40.55                   | 60.00         | -19.45       | QP       |
| 12  | 18.5860      | 18.20                    | 10.39                   | 28.59                   | 50.00         | -21.41       | AVG      |

|               |                                                     |                   |         |
|---------------|-----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                        | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |         |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                            |                   |         |


80 dBuV

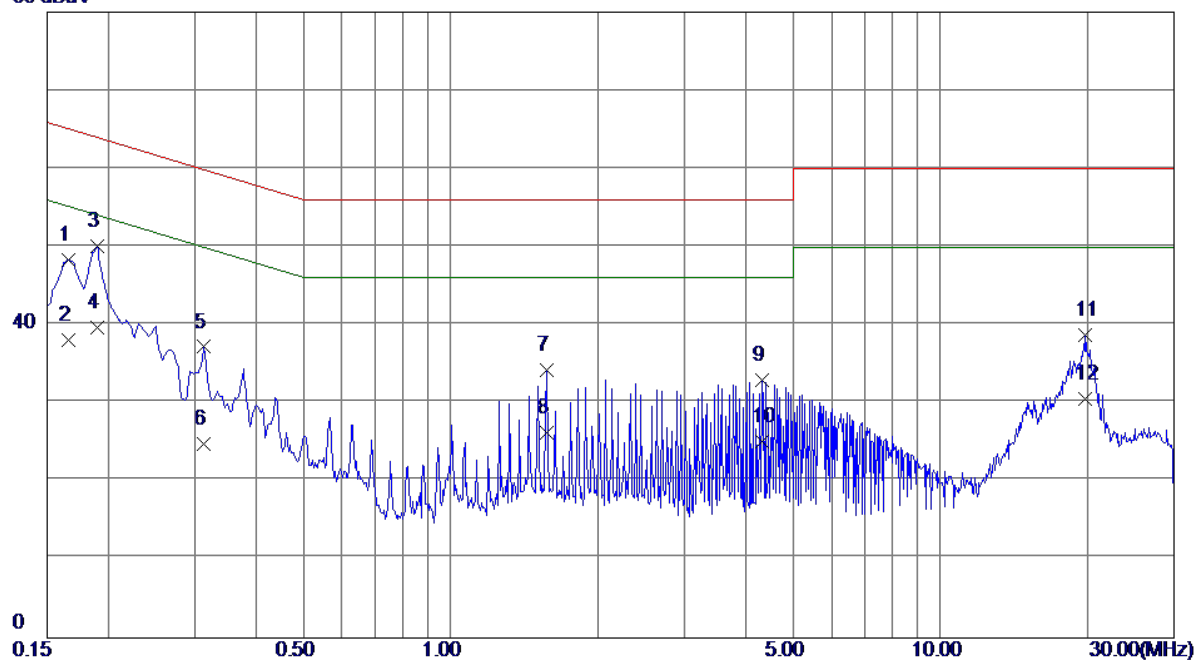

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 38.93                    | 9.44                    | 48.37                   | 65.16         | -16.79       | QP       |
| 2   | 0.1660       | 28.60                    | 9.44                    | 38.04                   | 55.16         | -17.12       | AVG      |
| 3 * | 0.1900       | 40.53                    | 9.49                    | 50.02                   | 64.04         | -14.02       | QP       |
| 4   | 0.1900       | 30.21                    | 9.49                    | 39.70                   | 54.04         | -14.34       | AVG      |
| 5   | 0.3140       | 27.67                    | 9.53                    | 37.20                   | 59.86         | -22.66       | QP       |
| 6   | 0.3140       | 15.20                    | 9.53                    | 24.73                   | 49.86         | -25.13       | AVG      |
| 7   | 1.5700       | 24.58                    | 9.68                    | 34.26                   | 56.00         | -21.74       | QP       |
| 8   | 1.5700       | 16.50                    | 9.68                    | 26.18                   | 46.00         | -19.82       | AVG      |
| 9   | 4.3340       | 23.01                    | 9.92                    | 32.93                   | 56.00         | -23.07       | QP       |
| 10  | 4.3340       | 15.20                    | 9.92                    | 25.12                   | 46.00         | -20.88       | AVG      |
| 11  | 19.7860      | 28.23                    | 10.49                   | 38.72                   | 60.00         | -21.28       | QP       |
| 12  | 19.7860      | 20.11                    | 10.49                   | 30.60                   | 50.00         | -19.40       | AVG      |

|               |                                                       |                   |         |
|---------------|-------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                  | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                          | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |         |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |         |
| Test Engineer | Kevin Li                                              |                   |         |


80 dBuV

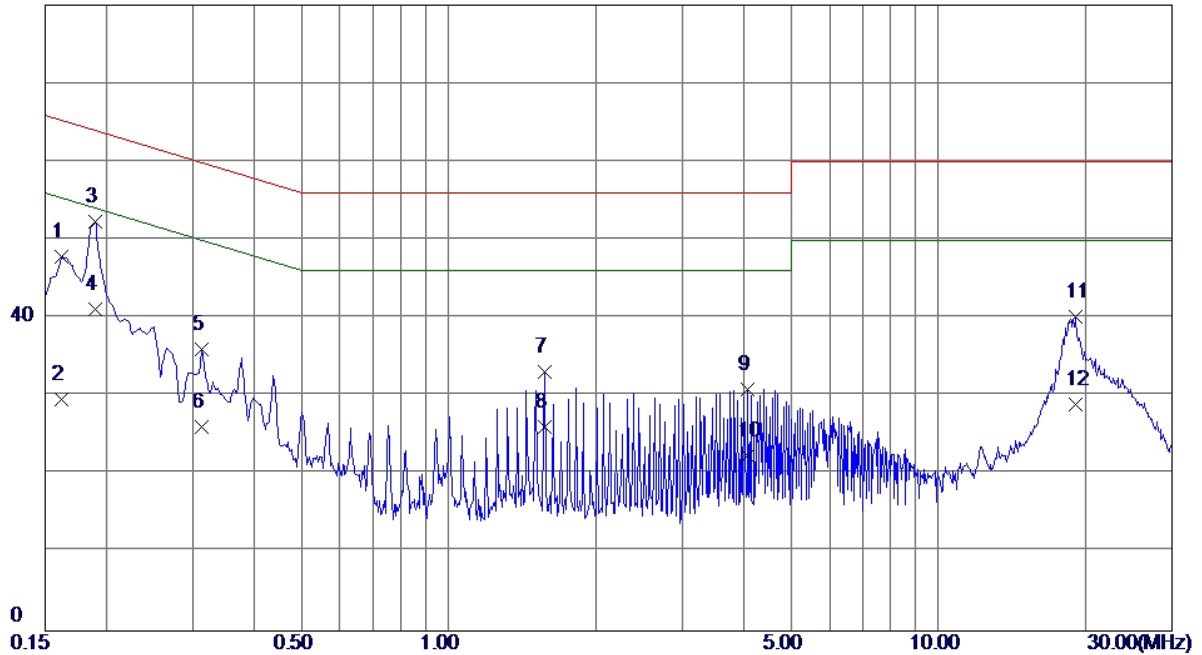

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1620       | 38.30                    | 9.52                    | 47.82                   | 65.36         | -17.54       | QP       |
| 2   | 0.1620       | 20.10                    | 9.52                    | 29.62                   | 55.36         | -25.74       | AVG      |
| 3 * | 0.1900       | 42.86                    | 9.53                    | 52.39                   | 64.04         | -11.65       | QP       |
| 4   | 0.1900       | 31.60                    | 9.53                    | 41.13                   | 54.04         | -12.91       | AVG      |
| 5   | 0.3140       | 26.50                    | 9.53                    | 36.03                   | 59.86         | -23.83       | QP       |
| 6   | 0.3140       | 16.50                    | 9.53                    | 26.03                   | 49.86         | -23.83       | AVG      |
| 7   | 1.5700       | 23.31                    | 9.88                    | 33.19                   | 56.00         | -22.81       | QP       |
| 8   | 1.5700       | 16.20                    | 9.88                    | 26.08                   | 46.00         | -19.92       | AVG      |
| 9   | 4.0820       | 20.72                    | 10.17                   | 30.89                   | 56.00         | -25.11       | QP       |
| 10  | 4.0820       | 12.20                    | 10.17                   | 22.37                   | 46.00         | -23.63       | AVG      |
| 11  | 19.0220      | 29.80                    | 10.39                   | 40.19                   | 60.00         | -19.81       | QP       |
| 12  | 19.0220      | 18.60                    | 10.39                   | 28.99                   | 50.00         | -21.01       | AVG      |

|               |                                                       |                   |         |
|---------------|-------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                  | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                          | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |         |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |         |
| Test Engineer | Kevin Li                                              |                   |         |


80 dBuV

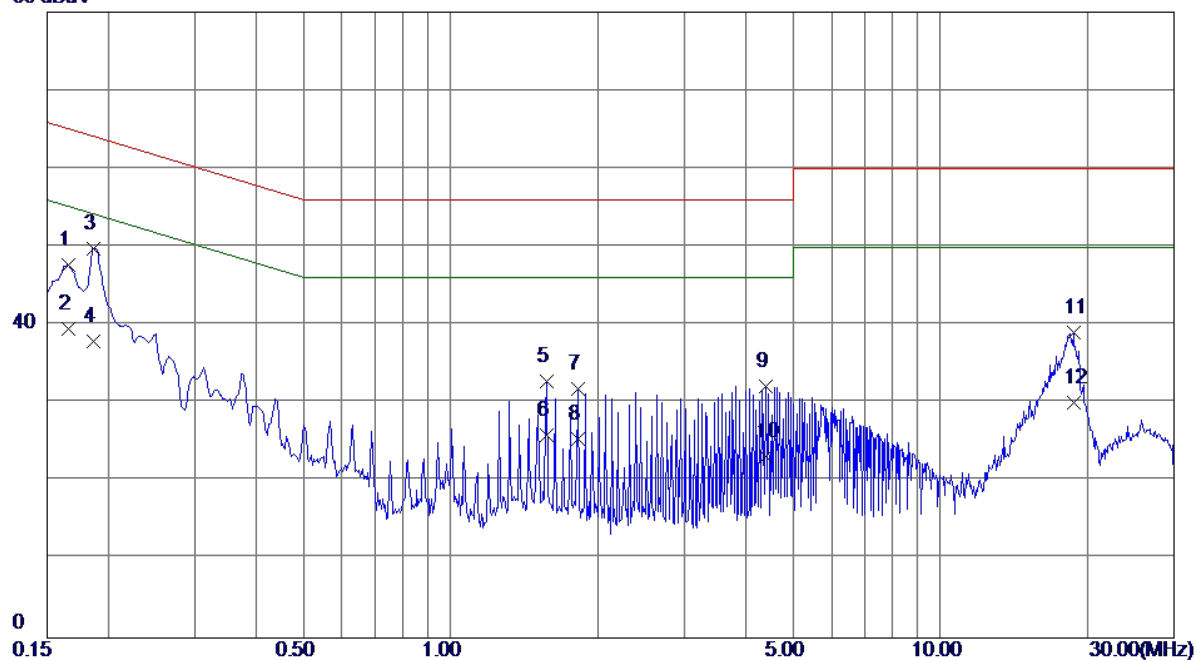

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 38.23                    | 9.44                    | 47.67                   | 65.16         | -17.49       | QP       |
| 2   | 0.1660       | 30.10                    | 9.44                    | 39.54                   | 55.16         | -15.62       | AVG      |
| 3 * | 0.1860       | 40.24                    | 9.48                    | 49.72                   | 64.21         | -14.49       | QP       |
| 4   | 0.1860       | 28.40                    | 9.48                    | 37.88                   | 54.21         | -16.33       | AVG      |
| 5   | 1.5700       | 23.08                    | 9.68                    | 32.76                   | 56.00         | -23.24       | QP       |
| 6   | 1.5700       | 16.20                    | 9.68                    | 25.88                   | 46.00         | -20.12       | AVG      |
| 7   | 1.8220       | 22.14                    | 9.68                    | 31.82                   | 56.00         | -24.18       | QP       |
| 8   | 1.8220       | 15.80                    | 9.68                    | 25.48                   | 46.00         | -20.52       | AVG      |
| 9   | 4.3940       | 22.27                    | 9.93                    | 32.20                   | 56.00         | -23.80       | QP       |
| 10  | 4.3940       | 13.20                    | 9.93                    | 23.13                   | 46.00         | -22.87       | AVG      |
| 11  | 18.7099      | 28.63                    | 10.46                   | 39.09                   | 60.00         | -20.91       | QP       |
| 12  | 18.7099      | 19.60                    | 10.46                   | 30.06                   | 50.00         | -19.94       | AVG      |

|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29 |
| Temperature   | 25°C                                           | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |         |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |         |
| Test Engineer | Kevin Li                                       |                   |         |


80 dBuV

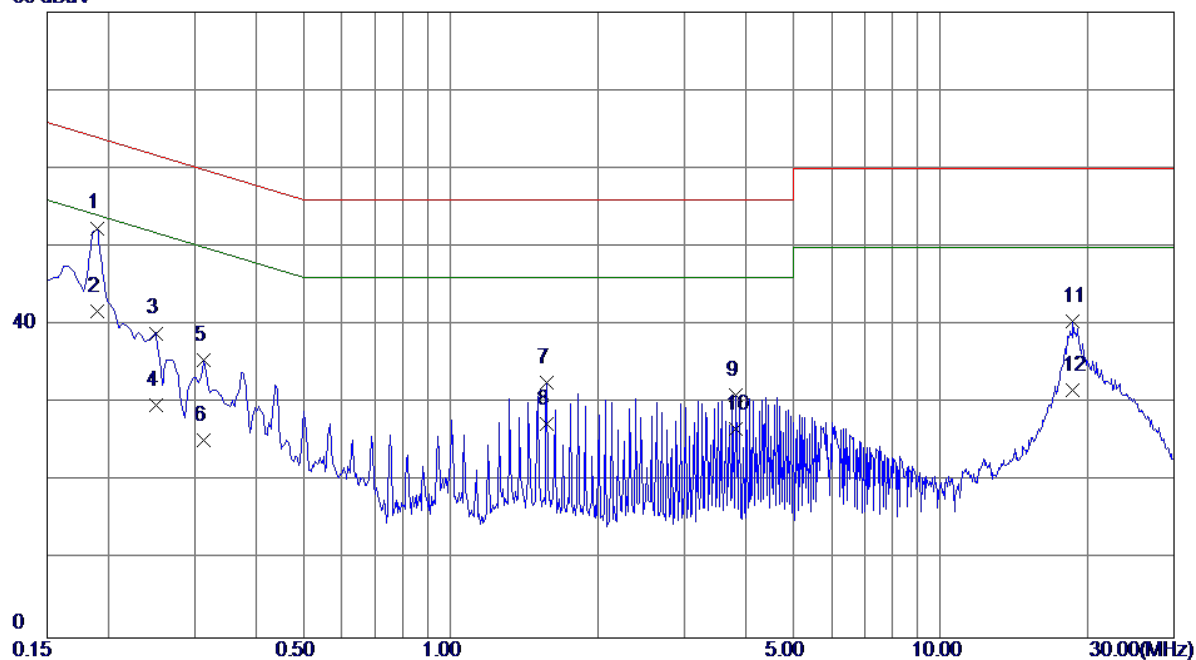

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1900       | 42.87                    | 9.53                    | 52.40                   | 64.04         | -11.64       | QP       |
| 2   | 0.1900       | 32.20                    | 9.53                    | 41.73                   | 54.04         | -12.31       | AVG      |
| 3   | 0.2500       | 29.43                    | 9.53                    | 38.96                   | 61.76         | -22.80       | QP       |
| 4   | 0.2500       | 20.30                    | 9.53                    | 29.83                   | 51.76         | -21.93       | AVG      |
| 5   | 0.3140       | 25.95                    | 9.53                    | 35.48                   | 59.86         | -24.38       | QP       |
| 6   | 0.3140       | 15.80                    | 9.53                    | 25.33                   | 49.86         | -24.53       | AVG      |
| 7   | 1.5700       | 22.70                    | 9.88                    | 32.58                   | 56.00         | -23.42       | QP       |
| 8   | 1.5700       | 17.50                    | 9.88                    | 27.38                   | 46.00         | -18.62       | AVG      |
| 9   | 3.8300       | 20.82                    | 10.17                   | 30.99                   | 56.00         | -25.01       | QP       |
| 10  | 3.8300       | 16.50                    | 10.17                   | 26.67                   | 46.00         | -19.33       | AVG      |
| 11  | 18.6460      | 30.13                    | 10.39                   | 40.52                   | 60.00         | -19.48       | QP       |
| 12  | 18.6460      | 21.30                    | 10.39                   | 31.69                   | 50.00         | -18.31       | AVG      |

|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29 |
| Temperature   | 25°C                                           | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |         |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |         |
| Test Engineer | Kevin Li                                       |                   |         |


80 dBuV

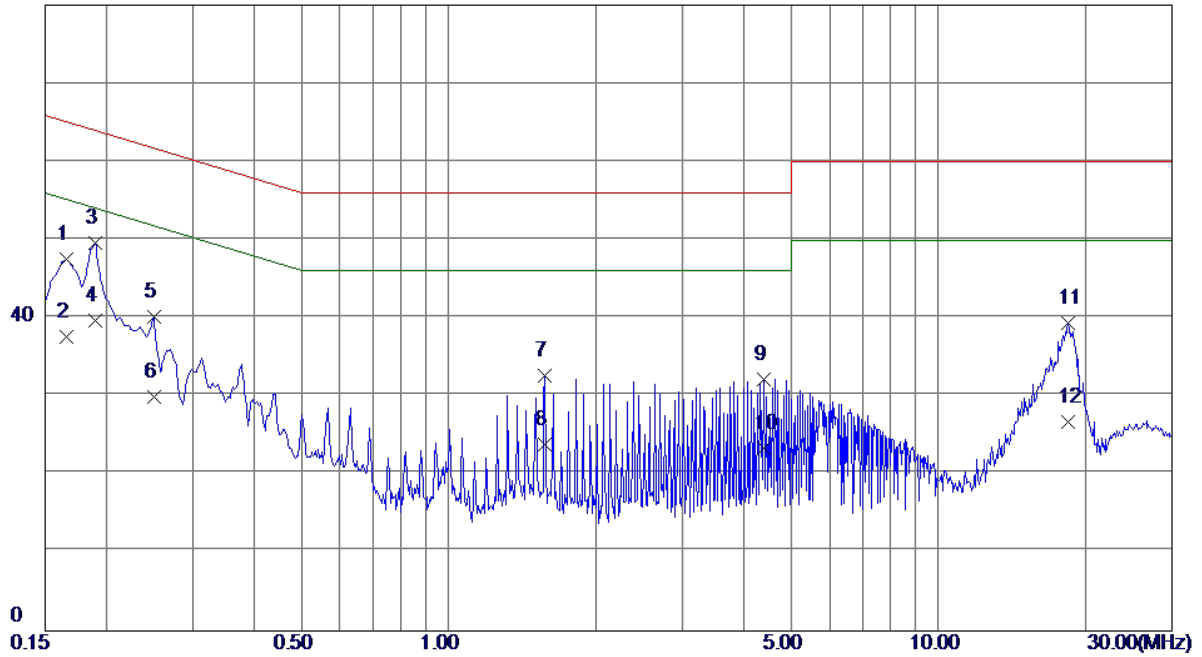

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 38.01                    | 9.44                    | 47.45                   | 65.16         | -17.71       | QP       |
| 2   | 0.1660       | 28.20                    | 9.44                    | 37.64                   | 55.16         | -17.52       | AVG      |
| 3   | 0.1900       | 40.08                    | 9.49                    | 49.57                   | 64.04         | -14.47       | QP       |
| 4 * | 0.1900       | 30.21                    | 9.49                    | 39.70                   | 54.04         | -14.34       | AVG      |
| 5   | 0.2500       | 30.58                    | 9.53                    | 40.11                   | 61.76         | -21.65       | QP       |
| 6   | 0.2500       | 20.40                    | 9.53                    | 29.93                   | 51.76         | -21.83       | AVG      |
| 7   | 1.5700       | 22.94                    | 9.68                    | 32.62                   | 56.00         | -23.38       | QP       |
| 8   | 1.5700       | 14.20                    | 9.68                    | 23.88                   | 46.00         | -22.12       | AVG      |
| 9   | 4.3940       | 22.24                    | 9.93                    | 32.17                   | 56.00         | -23.83       | QP       |
| 10  | 4.3940       | 13.50                    | 9.93                    | 23.43                   | 46.00         | -22.57       | AVG      |
| 11  | 18.4580      | 28.95                    | 10.46                   | 39.41                   | 60.00         | -20.59       | QP       |
| 12  | 18.4580      | 16.20                    | 10.46                   | 26.66                   | 50.00         | -23.34       | AVG      |

|               |                                                 |                   |         |
|---------------|-------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29 |
| Temperature   | 25°C                                            | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                    | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |         |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |         |
| Test Engineer | Kevin Li                                        |                   |         |


80 dBuV

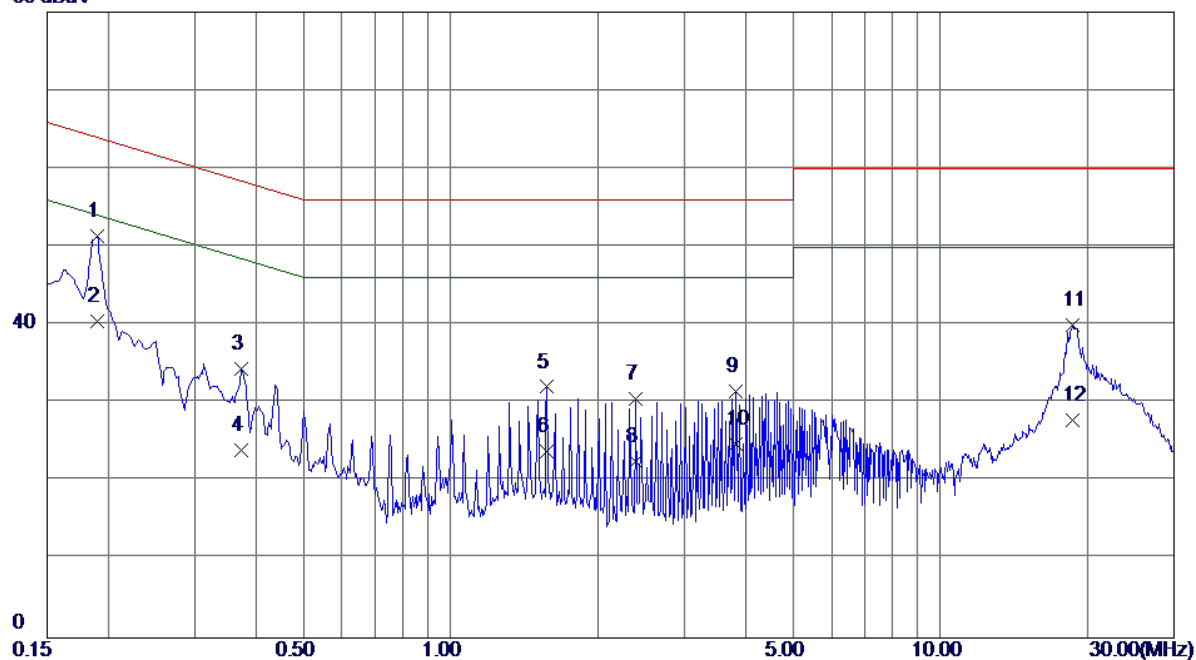

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1900       | 41.87                    | 9.53                    | 51.40                   | 64.04         | -12.64       | QP       |
| 2   | 0.1900       | 31.00                    | 9.53                    | 40.53                   | 54.04         | -13.51       | AVG      |
| 3   | 0.3740       | 24.87                    | 9.54                    | 34.41                   | 58.41         | -24.00       | QP       |
| 4   | 0.3740       | 14.50                    | 9.54                    | 24.04                   | 48.41         | -24.37       | AVG      |
| 5   | 1.5700       | 22.20                    | 9.88                    | 32.08                   | 56.00         | -23.92       | QP       |
| 6   | 1.5700       | 14.00                    | 9.88                    | 23.88                   | 46.00         | -22.12       | AVG      |
| 7   | 2.3860       | 20.59                    | 10.04                   | 30.63                   | 56.00         | -25.37       | QP       |
| 8   | 2.3860       | 12.50                    | 10.04                   | 22.54                   | 46.00         | -23.46       | AVG      |
| 9   | 3.8300       | 21.32                    | 10.17                   | 31.49                   | 56.00         | -24.51       | QP       |
| 10  | 3.8300       | 14.60                    | 10.17                   | 24.77                   | 46.00         | -21.23       | AVG      |
| 11  | 18.6460      | 29.63                    | 10.39                   | 40.02                   | 60.00         | -19.98       | QP       |
| 12  | 18.6460      | 17.40                    | 10.39                   | 27.79                   | 50.00         | -22.21       | AVG      |


|               |                                                 |                   |         |
|---------------|-------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29 |
| Temperature   | 25°C                                            | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                    | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |         |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |         |
| Test Engineer | Kevin Li                                        |                   |         |

80 dBuV

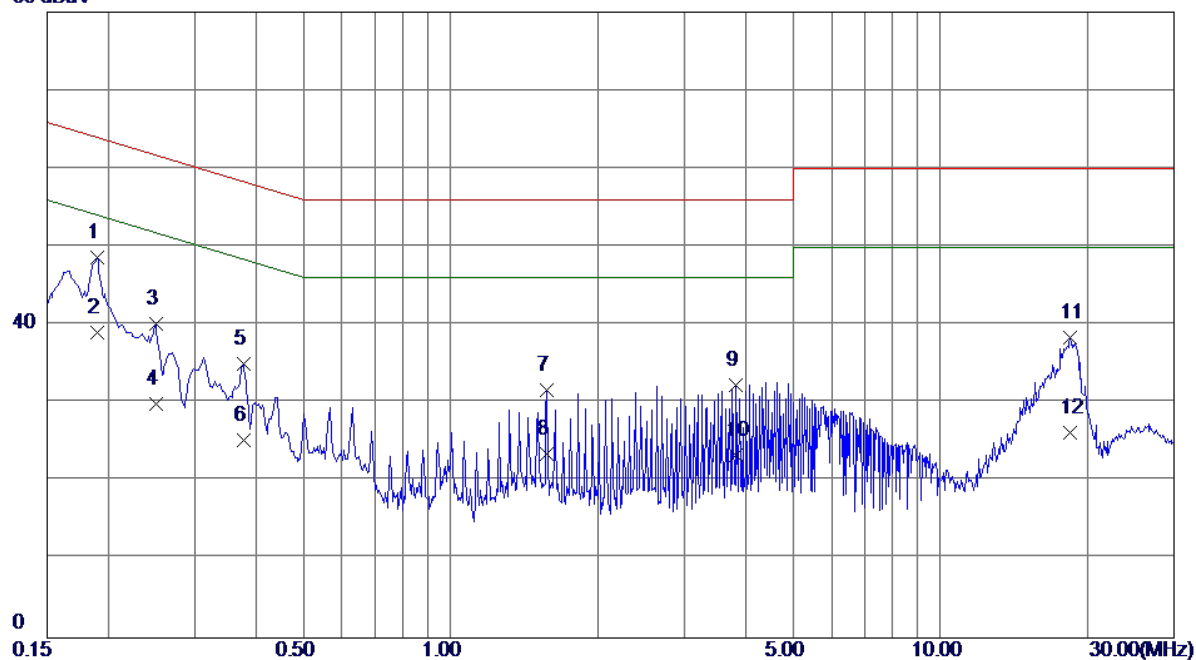


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1900       | 39.08                    | 9.49                    | 48.57                   | 64.04         | -15.47       | QP       |
| 2 * | 0.1900       | 29.61                    | 9.49                    | 39.10                   | 54.04         | -14.94       | AVG      |
| 3   | 0.2500       | 30.58                    | 9.53                    | 40.11                   | 61.76         | -21.65       | QP       |
| 4   | 0.2500       | 20.40                    | 9.53                    | 29.93                   | 51.76         | -21.83       | AVG      |
| 5   | 0.3780       | 25.56                    | 9.48                    | 35.04                   | 58.32         | -23.28       | QP       |
| 6   | 0.3780       | 15.80                    | 9.48                    | 25.28                   | 48.32         | -23.04       | AVG      |
| 7   | 1.5700       | 21.94                    | 9.68                    | 31.62                   | 56.00         | -24.38       | QP       |
| 8   | 1.5700       | 13.80                    | 9.68                    | 23.48                   | 46.00         | -22.52       | AVG      |
| 9   | 3.8300       | 22.47                    | 9.87                    | 32.34                   | 56.00         | -23.66       | QP       |
| 10  | 3.8300       | 13.50                    | 9.87                    | 23.37                   | 46.00         | -22.63       | AVG      |
| 11  | 18.4580      | 27.95                    | 10.46                   | 38.41                   | 60.00         | -21.59       | QP       |
| 12  | 18.4580      | 15.80                    | 10.46                   | 26.26                   | 50.00         | -23.74       | AVG      |

|               |                                                                          |                   |         |
|---------------|--------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                              | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                     | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                             | Phase             | Line    |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                         |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+ Earphone: Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                                 |                   |         |

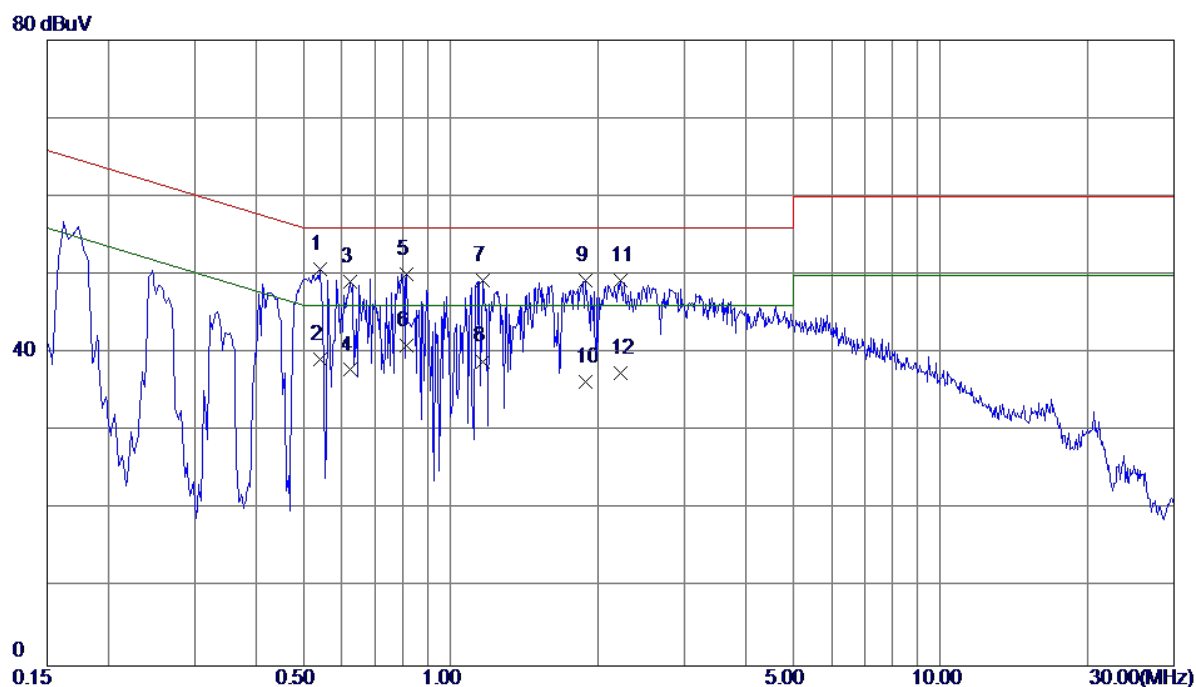


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.5420       | 41.13                    | 9.64                    | 50.77                   | 56.00         | -5.23        | QP       |
| 2   | 0.5420       | 29.50                    | 9.64                    | 39.14                   | 46.00         | -6.86        | AVG      |
| 3   | 0.6220       | 39.55                    | 9.64                    | 49.19                   | 56.00         | -6.81        | QP       |
| 4   | 0.6220       | 28.20                    | 9.64                    | 37.84                   | 46.00         | -8.16        | AVG      |
| 5   | 0.8139       | 40.27                    | 9.75                    | 50.02                   | 56.00         | -5.98        | QP       |
| 6 * | 0.8139       | 31.20                    | 9.75                    | 40.95                   | 46.00         | -5.05        | AVG      |
| 7   | 1.1660       | 39.44                    | 9.76                    | 49.20                   | 56.00         | -6.80        | QP       |
| 8   | 1.1660       | 29.20                    | 9.76                    | 38.96                   | 46.00         | -7.04        | AVG      |
| 9   | 1.8820       | 39.42                    | 9.89                    | 49.31                   | 56.00         | -6.69        | QP       |
| 10  | 1.8820       | 26.50                    | 9.89                    | 36.39                   | 46.00         | -9.61        | AVG      |
| 11  | 2.2260       | 39.23                    | 9.98                    | 49.21                   | 56.00         | -6.79        | QP       |
| 12  | 2.2260       | 27.40                    | 9.98                    | 37.38                   | 46.00         | -8.62        | AVG      |

|               |                                                                        |                   |         |
|---------------|------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                           | Phase             | Neutral |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                               |                   |         |

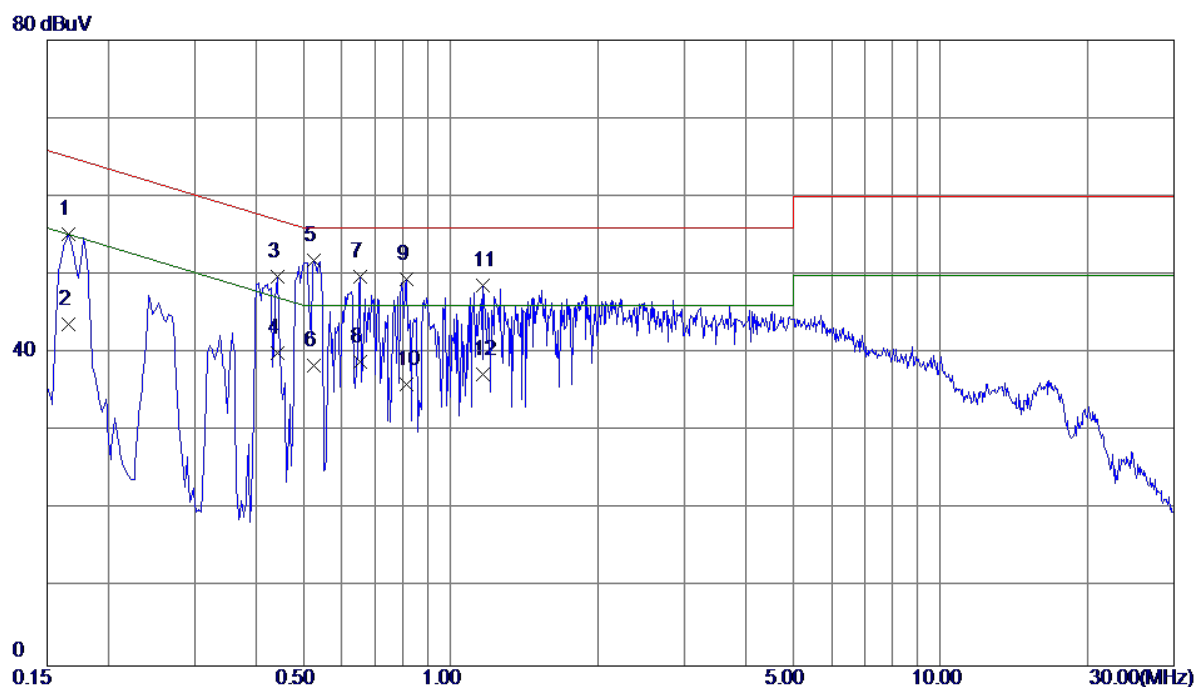


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 45.69                    | 9.44                    | 55.13                   | 65.16         | -10.03       | QP       |
| 2   | 0.1660       | 34.20                    | 9.44                    | 43.64                   | 55.16         | -11.52       | AVG      |
| 3   | 0.4420       | 40.25                    | 9.44                    | 49.69                   | 57.02         | -7.33        | QP       |
| 4   | 0.4420       | 30.60                    | 9.44                    | 40.04                   | 47.02         | -6.98        | AVG      |
| 5 * | 0.5260       | 42.47                    | 9.44                    | 51.91                   | 56.00         | -4.09        | QP       |
| 6   | 0.5260       | 28.90                    | 9.44                    | 38.34                   | 46.00         | -7.66        | AVG      |
| 7   | 0.6540       | 40.36                    | 9.45                    | 49.81                   | 56.00         | -6.19        | QP       |
| 8   | 0.6540       | 29.40                    | 9.45                    | 38.85                   | 46.00         | -7.15        | AVG      |
| 9   | 0.8139       | 39.95                    | 9.56                    | 49.51                   | 56.00         | -6.49        | QP       |
| 10  | 0.8139       | 26.50                    | 9.56                    | 36.06                   | 46.00         | -9.94        | AVG      |
| 11  | 1.1660       | 38.91                    | 9.66                    | 48.57                   | 56.00         | -7.43        | QP       |
| 12  | 1.1660       | 27.60                    | 9.66                    | 37.26                   | 46.00         | -8.74        | AVG      |

|               |                                                                        |                   |         |
|---------------|------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                           | Phase             | Line    |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                               |                   |         |

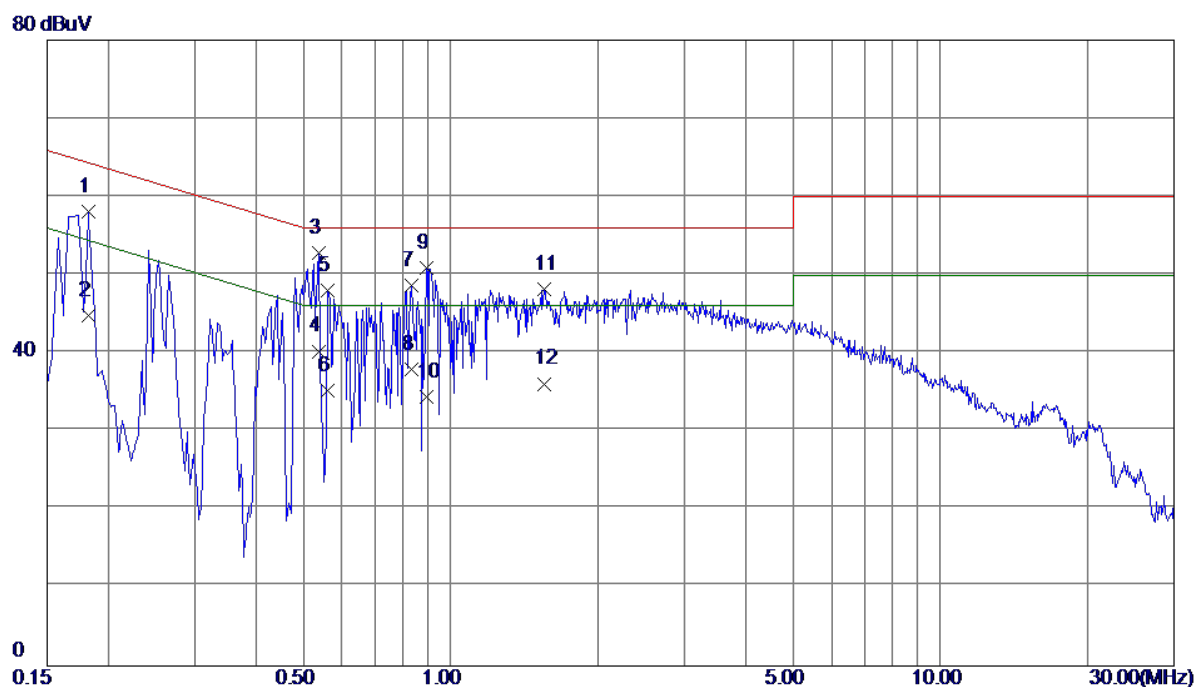


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1819       | 48.56                    | 9.53                    | 58.09                   | 64.40         | -6.31        | QP       |
| 2   | 0.1819       | 35.20                    | 9.53                    | 44.73                   | 54.40         | -9.67        | AVG      |
| 3 * | 0.5380       | 43.18                    | 9.64                    | 52.82                   | 56.00         | -3.18        | QP       |
| 4   | 0.5380       | 30.60                    | 9.64                    | 40.24                   | 46.00         | -5.76        | AVG      |
| 5   | 0.5620       | 38.36                    | 9.64                    | 48.00                   | 56.00         | -8.00        | QP       |
| 6   | 0.5620       | 25.60                    | 9.64                    | 35.24                   | 46.00         | -10.76       | AVG      |
| 7   | 0.8340       | 38.88                    | 9.75                    | 48.63                   | 56.00         | -7.37        | QP       |
| 8   | 0.8340       | 28.10                    | 9.75                    | 37.85                   | 46.00         | -8.15        | AVG      |
| 9   | 0.8940       | 41.16                    | 9.75                    | 50.91                   | 56.00         | -5.09        | QP       |
| 10  | 0.8940       | 24.60                    | 9.75                    | 34.35                   | 46.00         | -11.65       | AVG      |
| 11  | 1.5500       | 38.30                    | 9.88                    | 48.18                   | 56.00         | -7.82        | QP       |
| 12  | 1.5500       | 26.20                    | 9.88                    | 36.08                   | 46.00         | -9.92        | AVG      |

|               |                                                                        |                   |         |
|---------------|------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                           | Phase             | Neutral |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                               |                   |         |

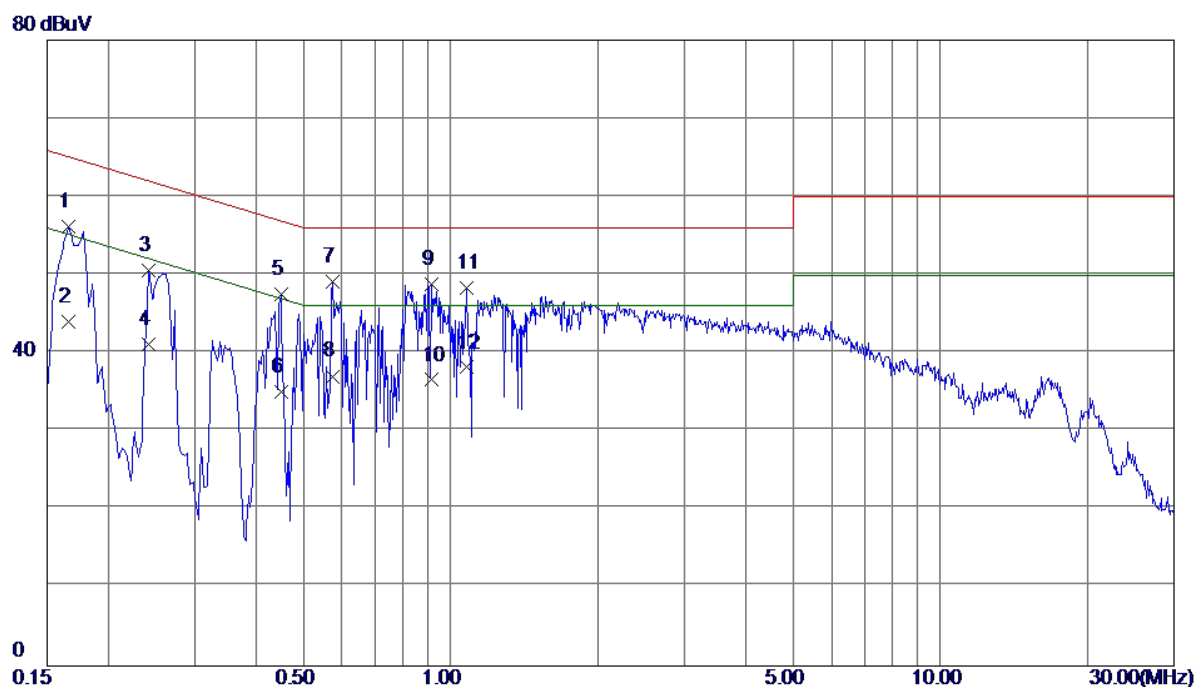


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 46.76                    | 9.44                    | 56.20                   | 65.16         | -8.96        | QP       |
| 2   | 0.1660       | 34.50                    | 9.44                    | 43.94                   | 55.16         | -11.22       | AVG      |
| 3   | 0.2420       | 41.02                    | 9.53                    | 50.55                   | 62.03         | -11.48       | QP       |
| 4   | 0.2420       | 31.60                    | 9.53                    | 41.13                   | 52.03         | -10.90       | AVG      |
| 5   | 0.4500       | 38.07                    | 9.44                    | 47.51                   | 56.88         | -9.37        | QP       |
| 6   | 0.4500       | 25.60                    | 9.44                    | 35.04                   | 46.88         | -11.84       | AVG      |
| 7 * | 0.5740       | 39.62                    | 9.44                    | 49.06                   | 56.00         | -6.94        | QP       |
| 8   | 0.5740       | 27.60                    | 9.44                    | 37.04                   | 46.00         | -8.96        | AVG      |
| 9   | 0.9140       | 39.07                    | 9.66                    | 48.73                   | 56.00         | -7.27        | QP       |
| 10  | 0.9140       | 26.90                    | 9.66                    | 36.56                   | 46.00         | -9.44        | AVG      |
| 11  | 1.0780       | 38.72                    | 9.66                    | 48.38                   | 56.00         | -7.62        | QP       |
| 12  | 1.0780       | 28.50                    | 9.66                    | 38.16                   | 46.00         | -7.84        | AVG      |

|               |                                                                         |                   |         |
|---------------|-------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                    | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                            | Phase             | Line    |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |         |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                                |                   |         |

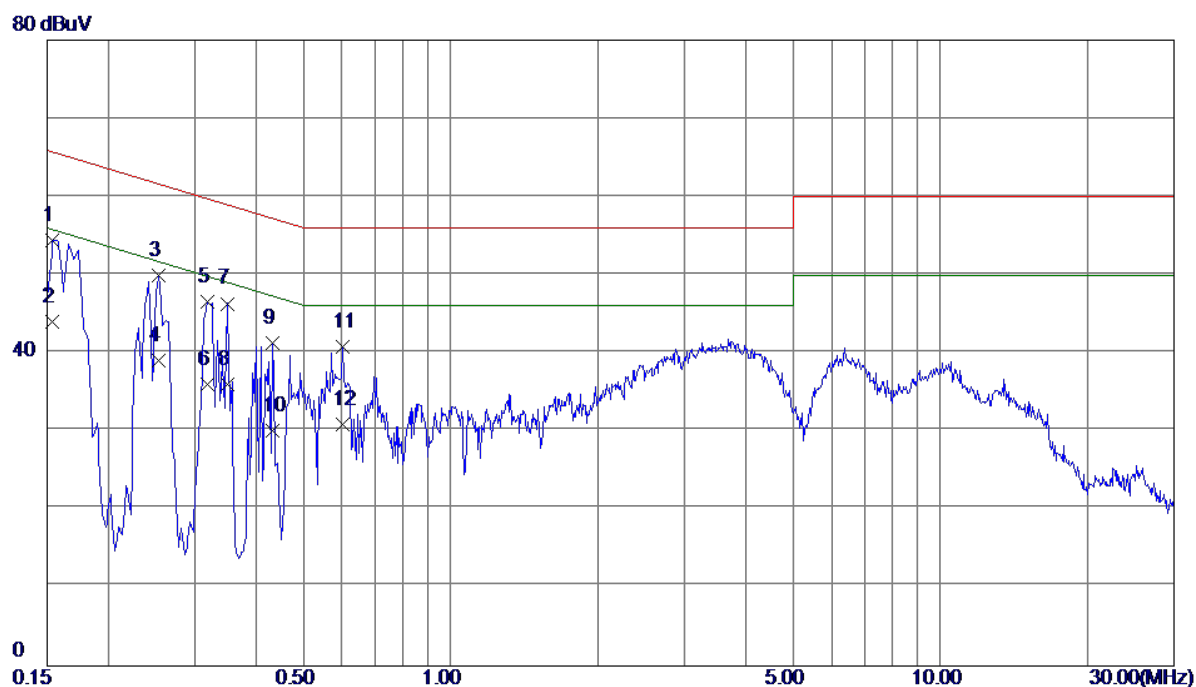


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1539       | 44.85                    | 9.52                    | 54.37                   | 65.79         | -11.42       | QP       |
| 2   | 0.1539       | 34.50                    | 9.52                    | 44.02                   | 55.79         | -11.77       | AVG      |
| 3   | 0.2540       | 40.45                    | 9.53                    | 49.98                   | 61.63         | -11.65       | QP       |
| 4   | 0.2540       | 29.50                    | 9.53                    | 39.03                   | 51.63         | -12.60       | AVG      |
| 5   | 0.3180       | 36.99                    | 9.53                    | 46.52                   | 59.76         | -13.24       | QP       |
| 6   | 0.3180       | 26.40                    | 9.53                    | 35.93                   | 49.76         | -13.83       | AVG      |
| 7   | 0.3500       | 36.79                    | 9.53                    | 46.32                   | 58.96         | -12.64       | QP       |
| 8   | 0.3500       | 26.50                    | 9.53                    | 36.03                   | 48.96         | -12.93       | AVG      |
| 9   | 0.4340       | 31.68                    | 9.57                    | 41.25                   | 57.18         | -15.93       | QP       |
| 10  | 0.4340       | 20.50                    | 9.57                    | 30.07                   | 47.18         | -17.11       | AVG      |
| 11  | 0.6020       | 31.16                    | 9.64                    | 40.80                   | 56.00         | -15.20       | QP       |
| 12  | 0.6020       | 21.30                    | 9.64                    | 30.94                   | 46.00         | -15.06       | AVG      |

|               |                                                                         |                   |         |
|---------------|-------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                    | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                            | Phase             | Neutral |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |         |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                                |                   |         |

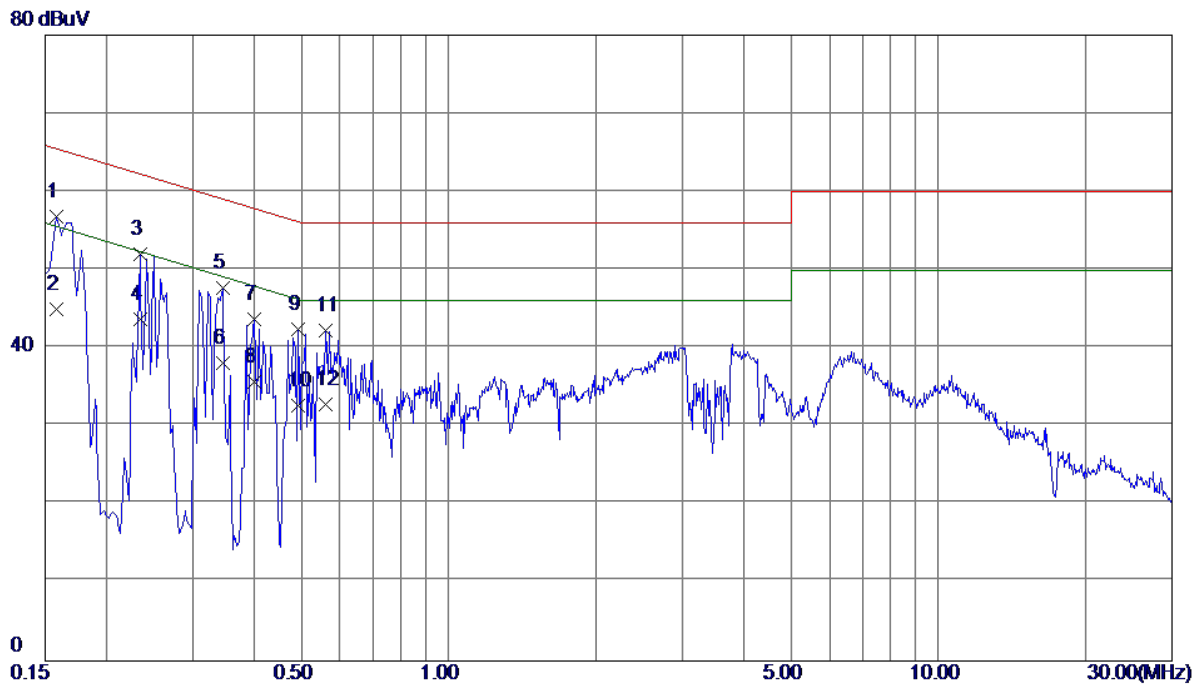


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1580       | 47.33                    | 9.48                    | 56.81                   | 65.57         | -8.76        | QP       |
| 2   | 0.1580       | 35.50                    | 9.48                    | 44.98                   | 55.57         | -10.59       | AVG      |
| 3   | 0.2340       | 42.47                    | 9.53                    | 52.00                   | 62.31         | -10.31       | QP       |
| 4 * | 0.2340       | 34.21                    | 9.53                    | 43.74                   | 52.31         | -8.57        | AVG      |
| 5   | 0.3460       | 38.23                    | 9.53                    | 47.76                   | 59.06         | -11.30       | QP       |
| 6   | 0.3460       | 28.60                    | 9.53                    | 38.13                   | 49.06         | -10.93       | AVG      |
| 7   | 0.4020       | 34.30                    | 9.44                    | 43.74                   | 57.81         | -14.07       | QP       |
| 8   | 0.4020       | 26.20                    | 9.44                    | 35.64                   | 47.81         | -12.17       | AVG      |
| 9   | 0.4940       | 32.97                    | 9.44                    | 42.41                   | 56.10         | -13.69       | QP       |
| 10  | 0.4940       | 23.20                    | 9.44                    | 32.64                   | 46.10         | -13.46       | AVG      |
| 11  | 0.5620       | 32.83                    | 9.44                    | 42.27                   | 56.00         | -13.73       | QP       |
| 12  | 0.5620       | 23.40                    | 9.44                    | 32.84                   | 46.00         | -13.16       | AVG      |

|               |                                                                             |                   |         |
|---------------|-----------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                                 | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                        | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                                | Phase             | Line    |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                              |                   |         |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:<br>Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                                    |                   |         |

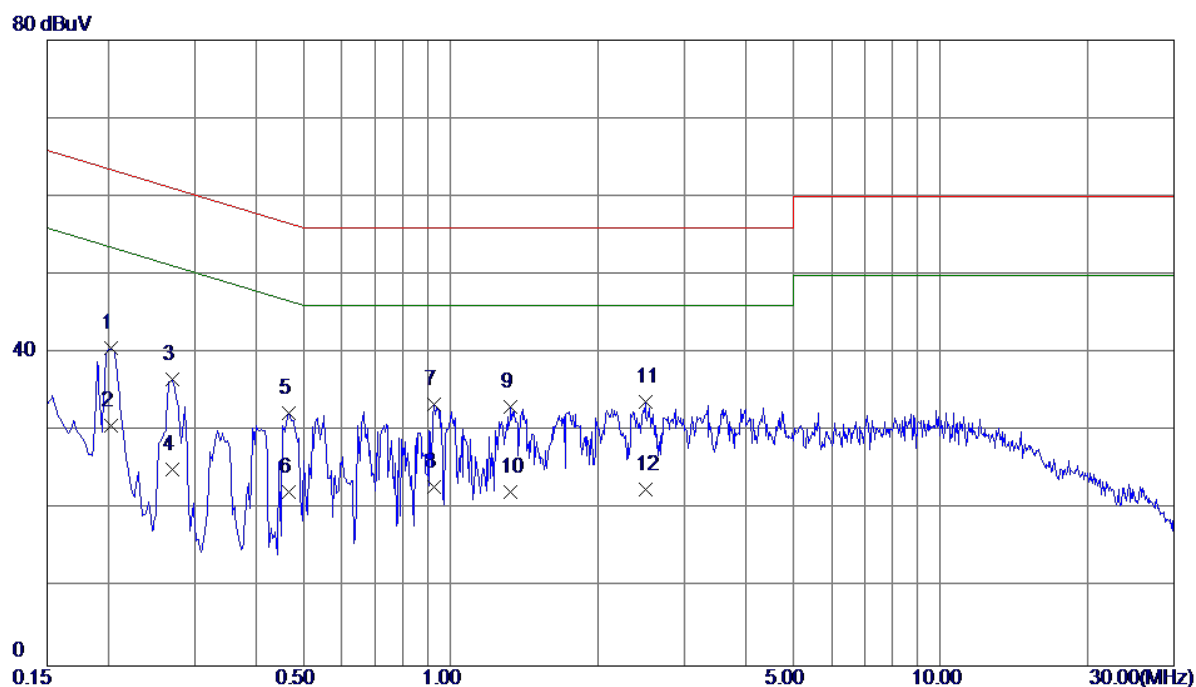

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.2020       | 31.13                    | 9.53                    | 40.66                   | 63.53         | -22.87       | QP       |
| 2    | 0.2020       | 21.20                    | 9.53                    | 30.73                   | 53.53         | -22.80       | AVG      |
| 3    | 0.2700       | 27.05                    | 9.53                    | 36.58                   | 61.12         | -24.54       | QP       |
| 4    | 0.2700       | 15.60                    | 9.53                    | 25.13                   | 51.12         | -25.99       | AVG      |
| 5    | 0.4660       | 22.75                    | 9.60                    | 32.35                   | 56.58         | -24.23       | QP       |
| 6    | 0.4660       | 12.61                    | 9.60                    | 22.21                   | 46.58         | -24.37       | AVG      |
| 7    | 0.9260       | 23.66                    | 9.76                    | 33.42                   | 56.00         | -22.58       | QP       |
| 8    | 0.9260       | 13.20                    | 9.76                    | 22.96                   | 46.00         | -23.04       | AVG      |
| 9    | 1.3260       | 23.31                    | 9.81                    | 33.12                   | 56.00         | -22.88       | QP       |
| 10   | 1.3260       | 12.50                    | 9.81                    | 22.31                   | 46.00         | -23.69       | AVG      |
| 11 * | 2.4980       | 23.61                    | 10.09                   | 33.70                   | 56.00         | -22.30       | QP       |
| 12   | 2.4980       | 12.40                    | 10.09                   | 22.49                   | 46.00         | -23.51       | AVG      |


|               |                                                                             |                   |         |
|---------------|-----------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                                 | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                        | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                                | Phase             | Neutral |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                              |                   |         |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:<br>Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                                    |                   |         |

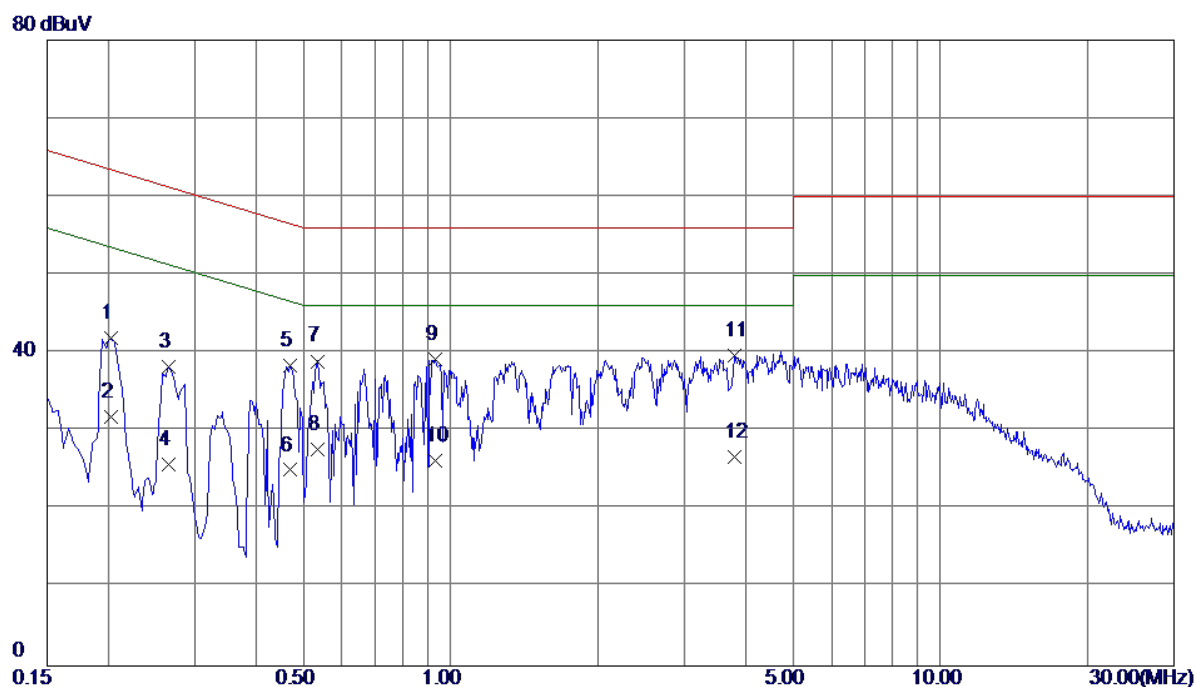

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.2020       | 32.43                    | 9.53                    | 41.96                   | 63.53         | -21.57       | QP       |
| 2    | 0.2020       | 22.30                    | 9.53                    | 31.83                   | 53.53         | -21.70       | AVG      |
| 3    | 0.2660       | 28.78                    | 9.53                    | 38.31                   | 61.24         | -22.93       | QP       |
| 4    | 0.2660       | 16.20                    | 9.53                    | 25.73                   | 51.24         | -25.51       | AVG      |
| 5    | 0.4700       | 28.98                    | 9.44                    | 38.42                   | 56.51         | -18.09       | QP       |
| 6    | 0.4700       | 15.60                    | 9.44                    | 25.04                   | 46.51         | -21.47       | AVG      |
| 7    | 0.5340       | 29.52                    | 9.44                    | 38.96                   | 56.00         | -17.04       | QP       |
| 8    | 0.5340       | 18.30                    | 9.44                    | 27.74                   | 46.00         | -18.26       | AVG      |
| 9    | 0.9300       | 29.47                    | 9.66                    | 39.13                   | 56.00         | -16.87       | QP       |
| 10   | 0.9300       | 16.60                    | 9.66                    | 26.26                   | 46.00         | -19.74       | AVG      |
| 11 * | 3.8020       | 29.83                    | 9.87                    | 39.70                   | 56.00         | -16.30       | QP       |
| 12   | 3.8020       | 16.90                    | 9.87                    | 26.77                   | 46.00         | -19.23       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+Idle+Playing+Speaker                       |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |


80 dBuV

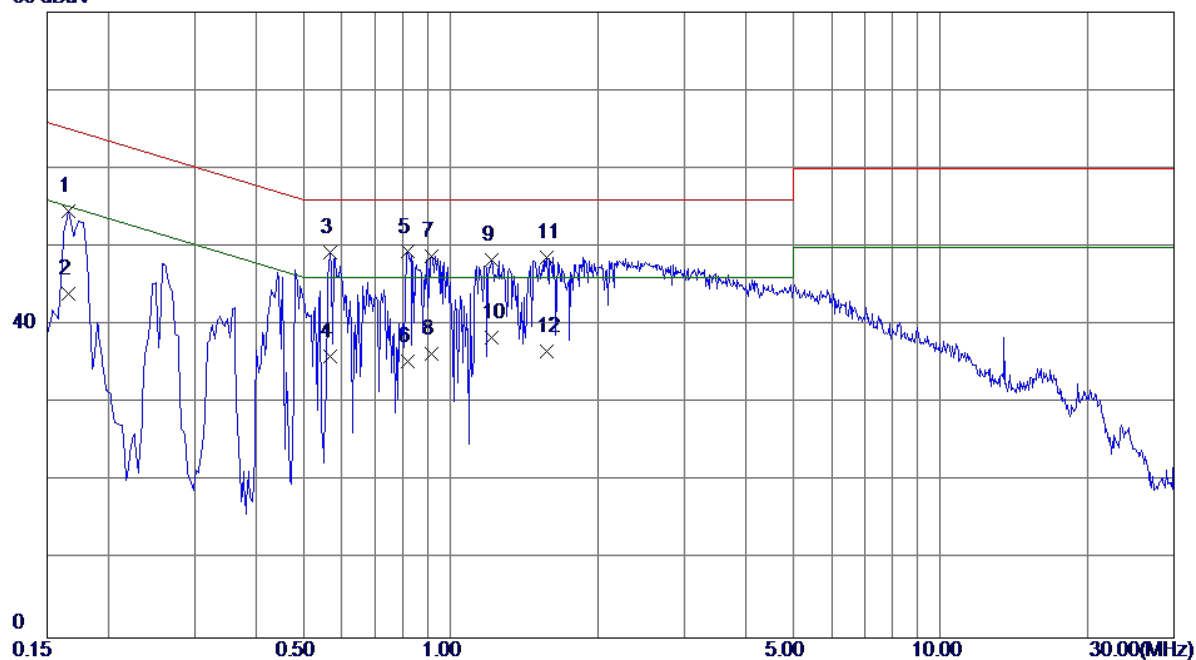

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 45.00                    | 9.52                    | 54.52                   | 65.16         | -10.64       | QP       |
| 2   | 0.1660       | 34.50                    | 9.52                    | 44.02                   | 55.16         | -11.14       | AVG      |
| 3   | 0.5660       | 39.65                    | 9.64                    | 49.29                   | 56.00         | -6.71        | QP       |
| 4   | 0.5660       | 26.30                    | 9.64                    | 35.94                   | 46.00         | -10.06       | AVG      |
| 5 * | 0.8180       | 39.61                    | 9.75                    | 49.36                   | 56.00         | -6.64        | QP       |
| 6   | 0.8180       | 25.60                    | 9.75                    | 35.35                   | 46.00         | -10.65       | AVG      |
| 7   | 0.9140       | 39.11                    | 9.76                    | 48.87                   | 56.00         | -7.13        | QP       |
| 8   | 0.9140       | 26.50                    | 9.76                    | 36.26                   | 46.00         | -9.74        | AVG      |
| 9   | 1.2100       | 38.49                    | 9.77                    | 48.26                   | 56.00         | -7.74        | QP       |
| 10  | 1.2100       | 28.60                    | 9.77                    | 38.37                   | 46.00         | -7.63        | AVG      |
| 11  | 1.5700       | 38.81                    | 9.88                    | 48.69                   | 56.00         | -7.31        | QP       |
| 12  | 1.5700       | 26.80                    | 9.88                    | 36.68                   | 46.00         | -9.32        | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Idle+Playing+Speaker                       |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |

80 dBuV

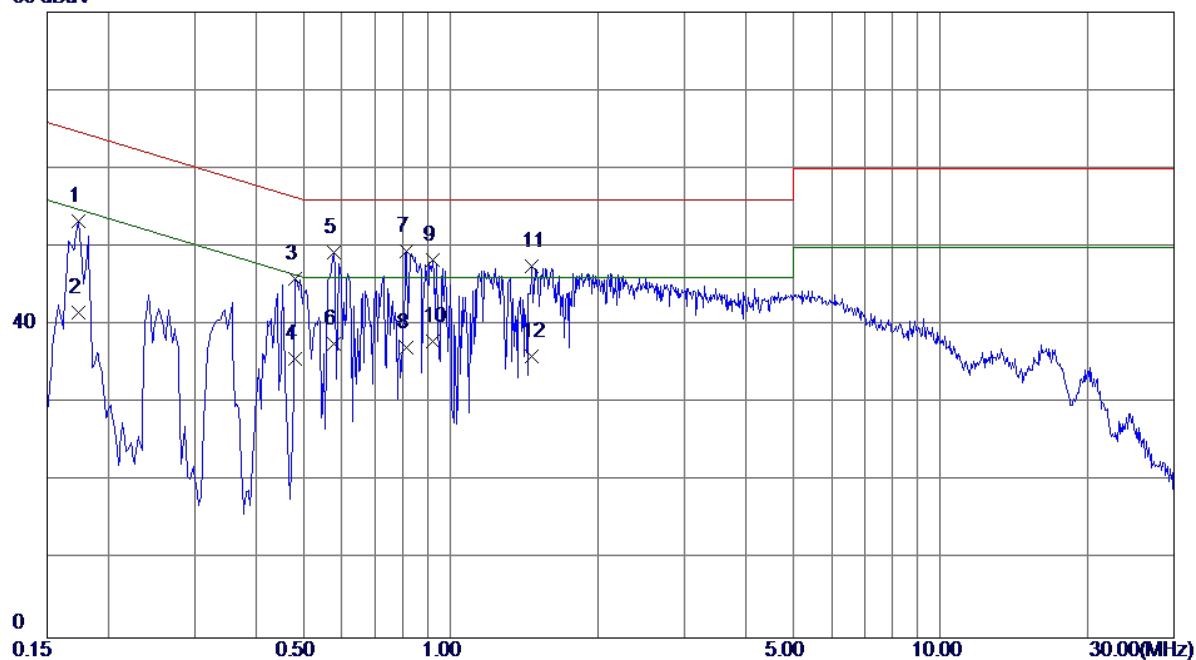


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1740       | 43.90                    | 9.44                    | 53.34                   | 64.77         | -11.43       | QP       |
| 2   | 0.1740       | 32.19                    | 9.44                    | 41.63                   | 54.77         | -13.14       | AVG      |
| 3   | 0.4820       | 36.45                    | 9.44                    | 45.89                   | 56.30         | -10.41       | QP       |
| 4   | 0.4820       | 26.20                    | 9.44                    | 35.64                   | 46.30         | -10.66       | AVG      |
| 5   | 0.5780       | 39.83                    | 9.44                    | 49.27                   | 56.00         | -6.73        | QP       |
| 6   | 0.5780       | 28.20                    | 9.44                    | 37.64                   | 46.00         | -8.36        | AVG      |
| 7 * | 0.8139       | 39.87                    | 9.56                    | 49.43                   | 56.00         | -6.57        | QP       |
| 8   | 0.8139       | 27.60                    | 9.56                    | 37.16                   | 46.00         | -8.84        | AVG      |
| 9   | 0.9220       | 38.63                    | 9.66                    | 48.29                   | 56.00         | -7.71        | QP       |
| 10  | 0.9220       | 28.20                    | 9.66                    | 37.86                   | 46.00         | -8.14        | AVG      |
| 11  | 1.4660       | 37.81                    | 9.67                    | 47.48                   | 56.00         | -8.52        | QP       |
| 12  | 1.4660       | 26.40                    | 9.67                    | 36.07                   | 46.00         | -9.93        | AVG      |

|               |                                                                        |                   |         |
|---------------|------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                           | Phase             | Line    |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                        |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                               |                   |         |

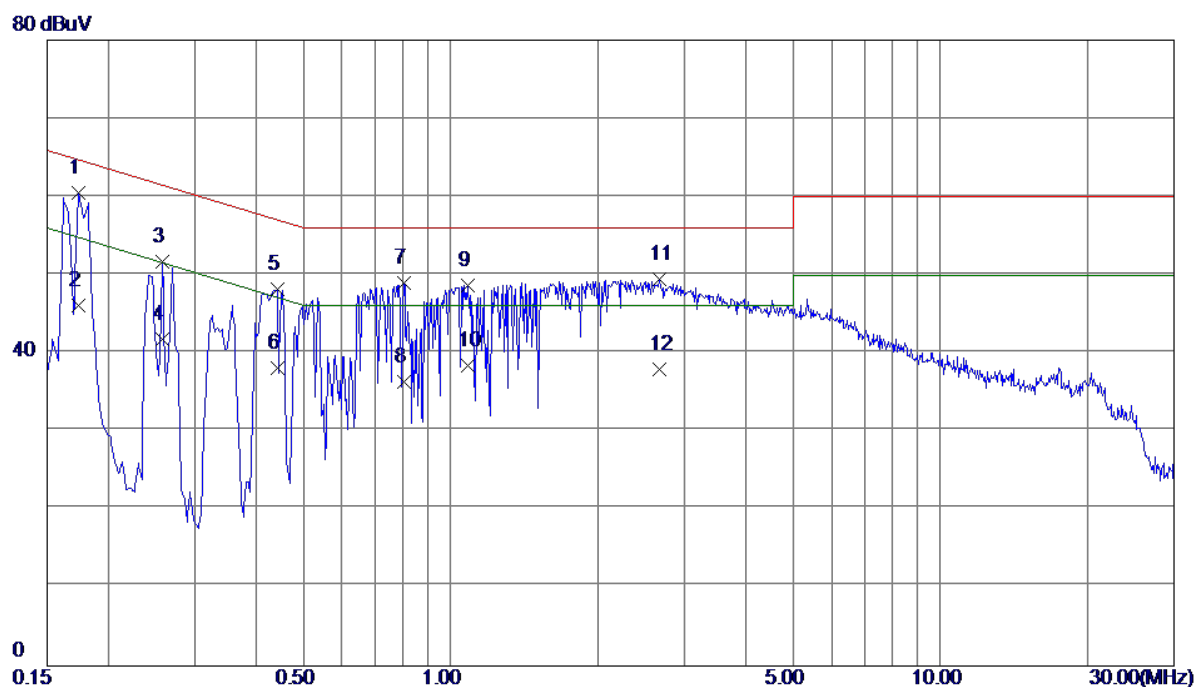

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1740       | 50.90                    | 9.52                    | 60.42                   | 64.77         | -4.35        | QP       |
| 2   | 0.1740       | 36.60                    | 9.52                    | 46.12                   | 54.77         | -8.65        | AVG      |
| 3   | 0.2580       | 42.22                    | 9.53                    | 51.75                   | 61.50         | -9.75        | QP       |
| 4   | 0.2580       | 32.20                    | 9.53                    | 41.73                   | 51.50         | -9.77        | AVG      |
| 5   | 0.4420       | 38.54                    | 9.58                    | 48.12                   | 57.02         | -8.90        | QP       |
| 6   | 0.4420       | 28.50                    | 9.58                    | 38.08                   | 47.02         | -8.94        | AVG      |
| 7   | 0.8020       | 39.18                    | 9.75                    | 48.93                   | 56.00         | -7.07        | QP       |
| 8   | 0.8020       | 26.60                    | 9.75                    | 36.35                   | 46.00         | -9.65        | AVG      |
| 9   | 1.0859       | 38.93                    | 9.76                    | 48.69                   | 56.00         | -7.31        | QP       |
| 10  | 1.0859       | 28.60                    | 9.76                    | 38.36                   | 46.00         | -7.64        | AVG      |
| 11  | 2.6740       | 39.30                    | 10.09                   | 49.39                   | 56.00         | -6.61        | QP       |
| 12  | 2.6740       | 27.80                    | 10.09                   | 37.89                   | 46.00         | -8.11        | AVG      |


|               |                                                                        |                   |         |
|---------------|------------------------------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29 |
| Temperature   | 25°C                                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                                           | Phase             | Neutral |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                        |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |         |
| Test Engineer | Kevin Li                                                               |                   |         |

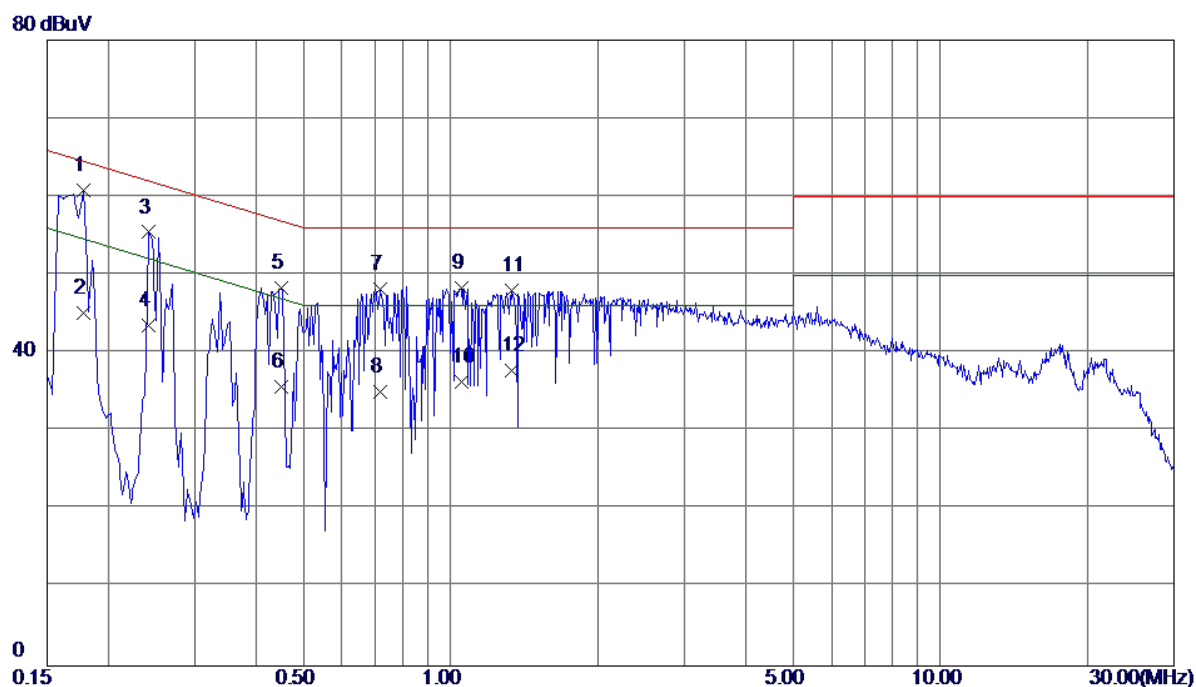

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1780       | 51.28                    | 9.45                    | 60.73                   | 64.58         | -3.85        | QP       |
| 2   | 0.1780       | 35.61                    | 9.45                    | 45.06                   | 54.58         | -9.52        | AVG      |
| 3   | 0.2420       | 45.91                    | 9.53                    | 55.44                   | 62.03         | -6.59        | QP       |
| 4   | 0.2420       | 34.00                    | 9.53                    | 43.53                   | 52.03         | -8.50        | AVG      |
| 5   | 0.4500       | 38.87                    | 9.44                    | 48.31                   | 56.88         | -8.57        | QP       |
| 6   | 0.4500       | 26.20                    | 9.44                    | 35.64                   | 46.88         | -11.24       | AVG      |
| 7   | 0.7180       | 38.76                    | 9.47                    | 48.23                   | 56.00         | -7.77        | QP       |
| 8   | 0.7180       | 25.60                    | 9.47                    | 35.07                   | 46.00         | -10.93       | AVG      |
| 9   | 1.0500       | 38.70                    | 9.66                    | 48.36                   | 56.00         | -7.64        | QP       |
| 10  | 1.0500       | 26.60                    | 9.66                    | 36.26                   | 46.00         | -9.74        | AVG      |
| 11  | 1.3340       | 38.27                    | 9.67                    | 47.94                   | 56.00         | -8.06        | QP       |
| 12  | 1.3340       | 28.10                    | 9.67                    | 37.77                   | 46.00         | -8.23        | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+Traffic (WCDMA)                            |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |


80 dBuV

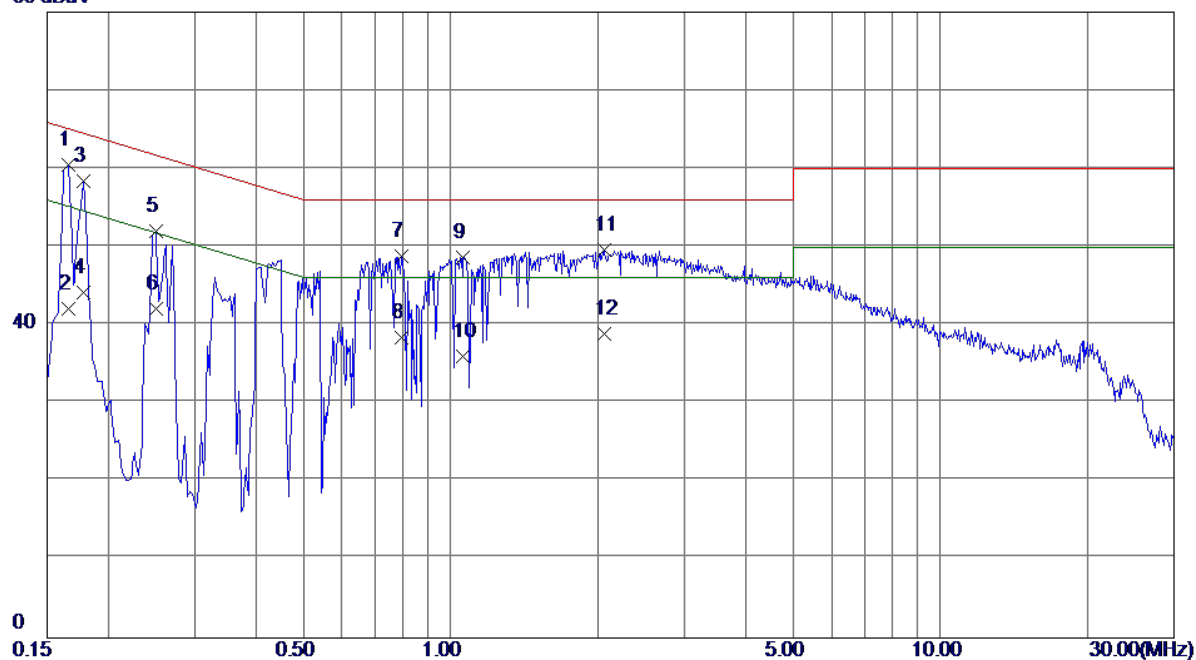

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1660       | 50.94                    | 9.52                    | 60.46                   | 65.16         | -4.70        | QP       |
| 2   | 0.1660       | 32.50                    | 9.52                    | 42.02                   | 55.16         | -13.14       | AVG      |
| 3   | 0.1780       | 48.80                    | 9.53                    | 58.33                   | 64.58         | -6.25        | QP       |
| 4   | 0.1780       | 34.60                    | 9.53                    | 44.13                   | 54.58         | -10.45       | AVG      |
| 5   | 0.2500       | 42.52                    | 9.53                    | 52.05                   | 61.76         | -9.71        | QP       |
| 6   | 0.2500       | 32.60                    | 9.53                    | 42.13                   | 51.76         | -9.63        | AVG      |
| 7   | 0.7940       | 39.08                    | 9.74                    | 48.82                   | 56.00         | -7.18        | QP       |
| 8   | 0.7940       | 28.60                    | 9.74                    | 38.34                   | 46.00         | -7.66        | AVG      |
| 9   | 1.0620       | 38.90                    | 9.76                    | 48.66                   | 56.00         | -7.34        | QP       |
| 10  | 1.0620       | 26.30                    | 9.76                    | 36.06                   | 46.00         | -9.94        | AVG      |
| 11  | 2.0540       | 39.62                    | 9.91                    | 49.53                   | 56.00         | -6.47        | QP       |
| 12  | 2.0540       | 28.90                    | 9.91                    | 38.81                   | 46.00         | -7.19        | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic (WCDMA)                            |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |


80 dBuV

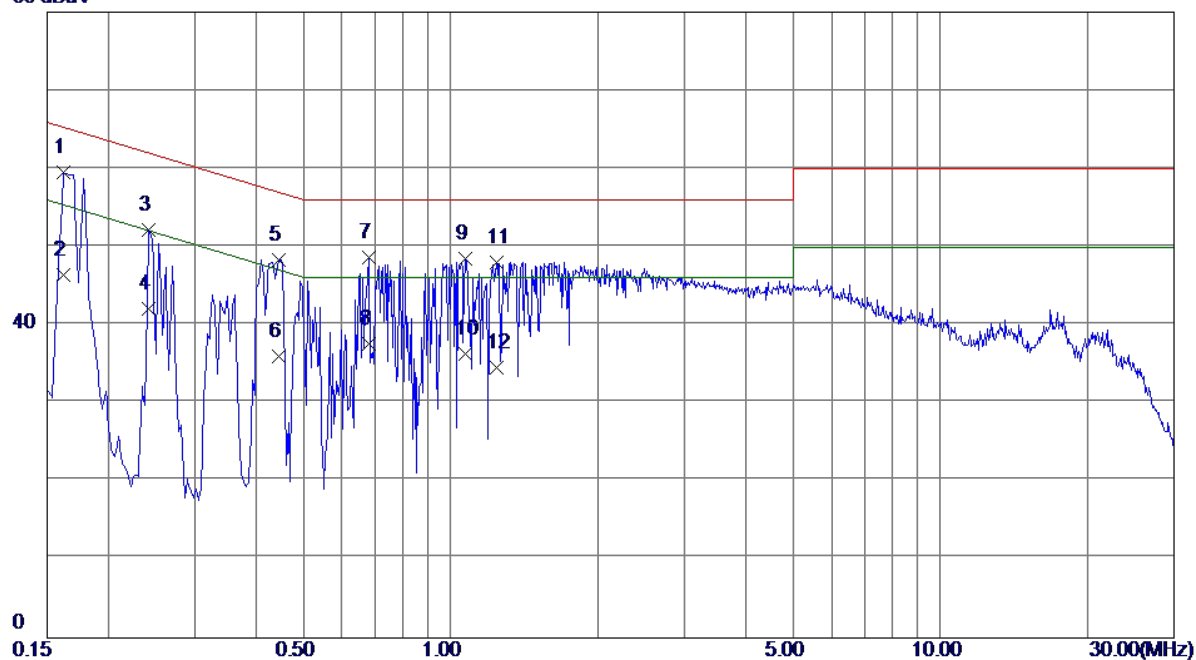

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1620       | 50.02                    | 9.46                    | 59.48                   | 65.36         | -5.88        | QP       |
| 2   | 0.1620       | 37.00                    | 9.46                    | 46.46                   | 55.36         | -8.90        | AVG      |
| 3   | 0.2420       | 42.56                    | 9.53                    | 52.09                   | 62.03         | -9.94        | QP       |
| 4   | 0.2420       | 32.50                    | 9.53                    | 42.03                   | 52.03         | -10.00       | AVG      |
| 5   | 0.4460       | 38.95                    | 9.44                    | 48.39                   | 56.95         | -8.56        | QP       |
| 6   | 0.4460       | 26.50                    | 9.44                    | 35.94                   | 46.95         | -11.01       | AVG      |
| 7   | 0.6820       | 39.16                    | 9.45                    | 48.61                   | 56.00         | -7.39        | QP       |
| 8   | 0.6820       | 28.20                    | 9.45                    | 37.65                   | 46.00         | -8.35        | AVG      |
| 9   | 1.0740       | 38.79                    | 9.66                    | 48.45                   | 56.00         | -7.55        | QP       |
| 10  | 1.0740       | 26.70                    | 9.66                    | 36.36                   | 46.00         | -9.64        | AVG      |
| 11  | 1.2380       | 38.34                    | 9.67                    | 48.01                   | 56.00         | -7.99        | QP       |
| 12  | 1.2380       | 24.90                    | 9.67                    | 34.57                   | 46.00         | -11.43       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+Traffic (LTE)                              |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |


80 dBuV

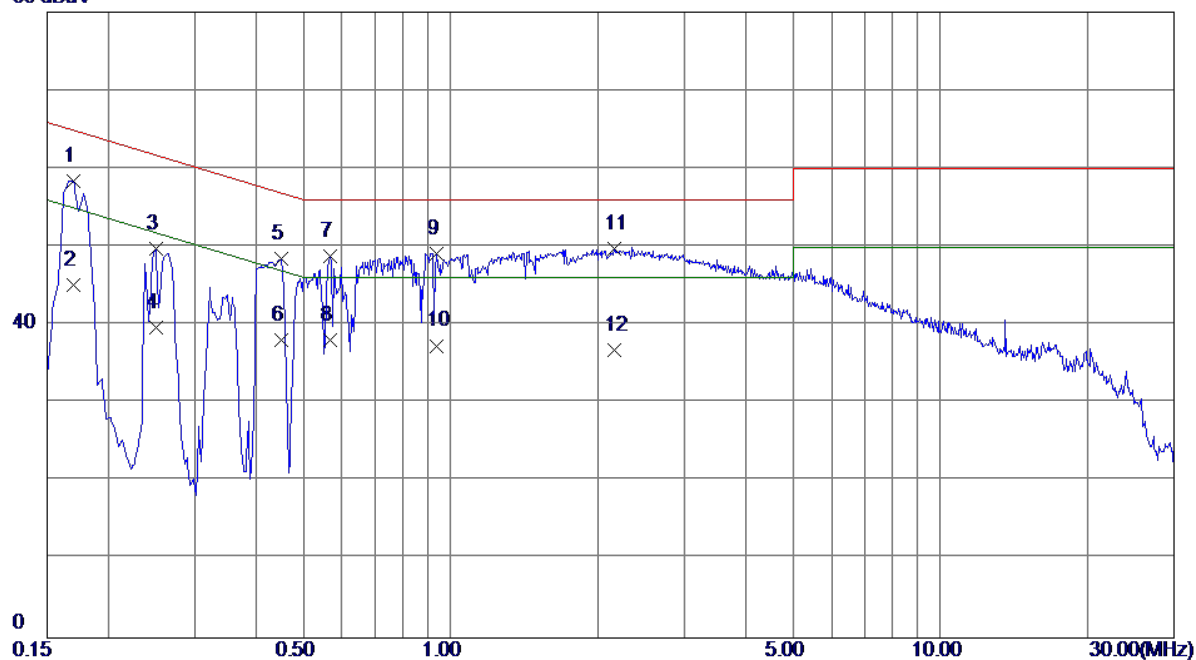

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1700       | 48.91                    | 9.52                    | 58.43                   | 64.96         | -6.53        | QP       |
| 2    | 0.1700       | 35.60                    | 9.52                    | 45.12                   | 54.96         | -9.84        | AVG      |
| 3    | 0.2500       | 40.24                    | 9.53                    | 49.77                   | 61.76         | -11.99       | QP       |
| 4    | 0.2500       | 30.10                    | 9.53                    | 39.63                   | 51.76         | -12.13       | AVG      |
| 5    | 0.4500       | 38.94                    | 9.59                    | 48.53                   | 56.88         | -8.35        | QP       |
| 6    | 0.4500       | 28.50                    | 9.59                    | 38.09                   | 46.88         | -8.79        | AVG      |
| 7    | 0.5660       | 39.10                    | 9.64                    | 48.74                   | 56.00         | -7.26        | QP       |
| 8    | 0.5660       | 28.40                    | 9.64                    | 38.04                   | 46.00         | -7.96        | AVG      |
| 9    | 0.9380       | 39.39                    | 9.76                    | 49.15                   | 56.00         | -6.85        | QP       |
| 10   | 0.9380       | 27.60                    | 9.76                    | 37.36                   | 46.00         | -8.64        | AVG      |
| 11 * | 2.1580       | 39.74                    | 9.95                    | 49.69                   | 56.00         | -6.31        | QP       |
| 12   | 2.1580       | 26.90                    | 9.95                    | 36.85                   | 46.00         | -9.15        | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                        | Model Name        | VTR-L29 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic (LTE)                              |                   |         |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY |                   |         |
| Test Engineer | Kevin Li                                           |                   |         |

80 dBuV

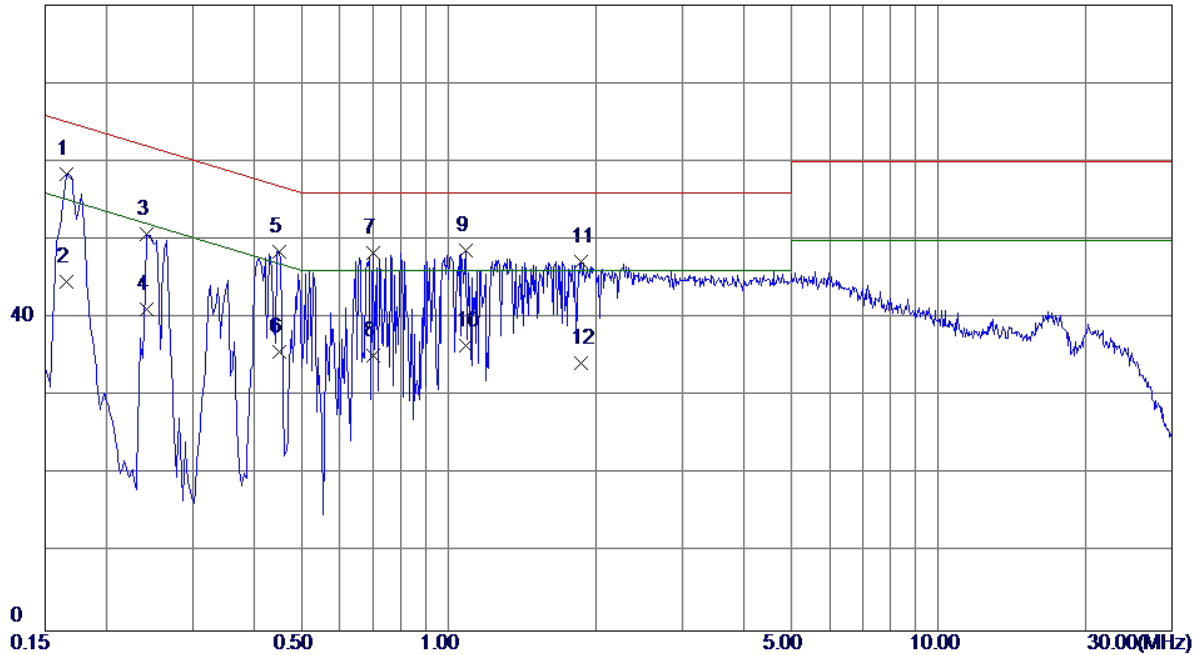

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1660       | 49.03                    | 9.44                    | 58.47                   | 65.16         | -6.69        | QP       |
| 2   | 0.1660       | 35.20                    | 9.44                    | 44.64                   | 55.16         | -10.52       | AVG      |
| 3   | 0.2420       | 41.12                    | 9.53                    | 50.65                   | 62.03         | -11.38       | QP       |
| 4   | 0.2420       | 31.60                    | 9.53                    | 41.13                   | 52.03         | -10.90       | AVG      |
| 5   | 0.4500       | 39.04                    | 9.44                    | 48.48                   | 56.88         | -8.40        | QP       |
| 6   | 0.4500       | 26.20                    | 9.44                    | 35.64                   | 46.88         | -11.24       | AVG      |
| 7   | 0.7019       | 38.83                    | 9.45                    | 48.28                   | 56.00         | -7.72        | QP       |
| 8   | 0.7019       | 25.80                    | 9.45                    | 35.25                   | 46.00         | -10.75       | AVG      |
| 9   | 1.0820       | 38.93                    | 9.66                    | 48.59                   | 56.00         | -7.41        | QP       |
| 10  | 1.0820       | 26.80                    | 9.66                    | 36.46                   | 46.00         | -9.54        | AVG      |
| 11  | 1.8620       | 37.55                    | 9.69                    | 47.24                   | 56.00         | -8.76        | QP       |
| 12  | 1.8620       | 24.60                    | 9.69                    | 34.29                   | 46.00         | -11.71       | AVG      |

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                 | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88         | 90                       | 39                         | 100                      | 40                         |
| 88 - 216        | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960       | 210                      | 46.4                       | 200                      | 46                         |
| Above 960       | 300                      | 49.5                       | 500                      | 54                         |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A          |         |                   |         | Class B          |         |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
|                 | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                 | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000      | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 - 108                                                                                                                     | 1000                                                                            |
| 108 - 500                                                                                                                       | 2000                                                                            |
| 500 - 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment       | Manufacturer | Type No.                                      | Serial No.      | Calibrated until |
|------|-------------------------|--------------|-----------------------------------------------|-----------------|------------------|
| 1    | Antenna                 | Schwarbeck   | VULB9160                                      | 9160-3232       | Mar. 27, 2017    |
| 2    | Amplifier               | HP           | 8447D                                         | 2944A09673      | Nov. 08, 2017    |
| 3    | Receiver                | AGILENT      | N9038A                                        | MY5213003<br>9  | Oct. 10, 2017    |
| 4    | Test Cable              | emci         | LMR-400(30<br>MHz-1GHz)                       | C-01            | Jun. 27, 2017    |
| 5    | Control                 | CT           | SC100                                         | N/A             | N/A              |
| 6    | Position Control        | MF           | MF-7802                                       | MF7802084<br>16 | N/A              |
| 7    | Measurement<br>Software | Farad        | EZ-EMC<br>Ver.NB-03A1-<br>01                  | N/A             | N/A              |
| 8    | Amplifier               | Agilent      | 8449B                                         | 3008A02274      | Oct. 31, 2017    |
| 9    | Receiver                | AGILENT      | N9038A                                        | MY5213003<br>9  | Oct. 10, 2017    |
| 10   | Test Cable              | emci         | EMC104-SM-<br>SM-10000(1<br>GHz –<br>26.5GHz) | C-68            | Jun. 27, 2017    |
| 11   | Measurement<br>Software | Farad        | EZ-EMC<br>Ver.NB-03A1-<br>01                  | N/A             | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 or 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

The limits above 6GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor =  $20 \log (3\text{m}/1\text{m})$  dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

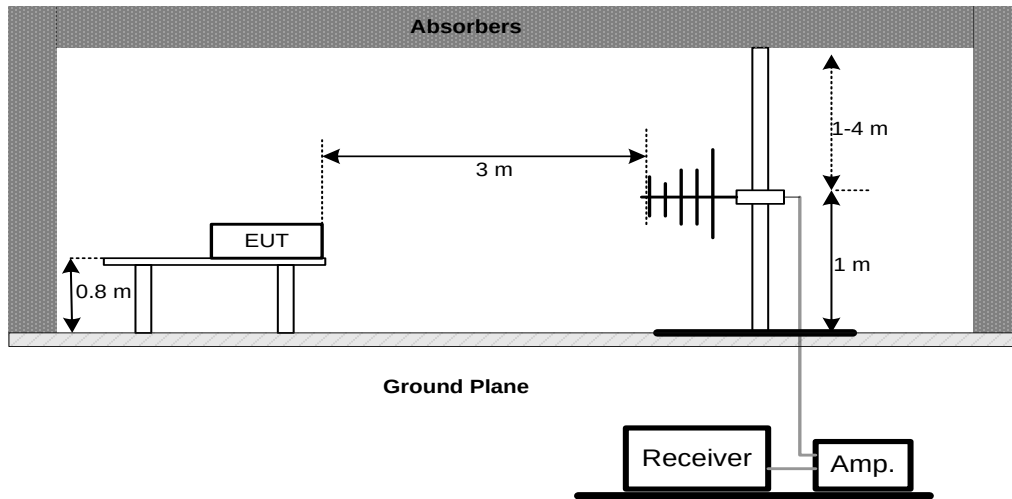

##### (B) Radiated Emission Test Set-Up Frequency Above 1G (1-6GHz)

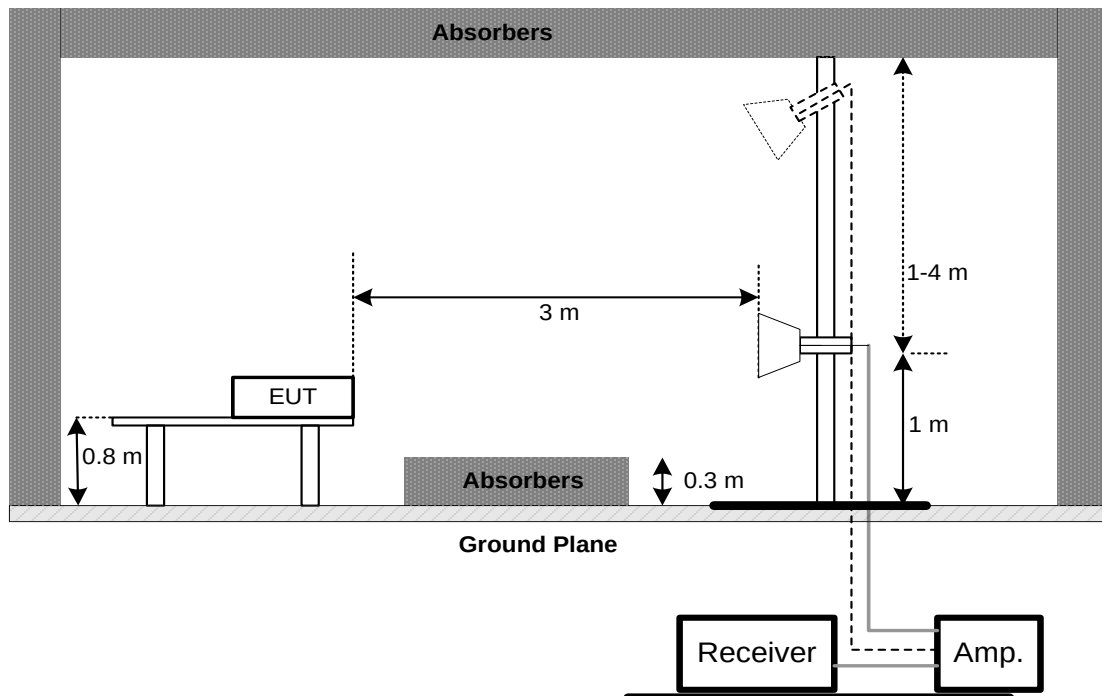

(B) Radiated Emission Test Set-Up Frequency Above 1G (6-26.5GHz)

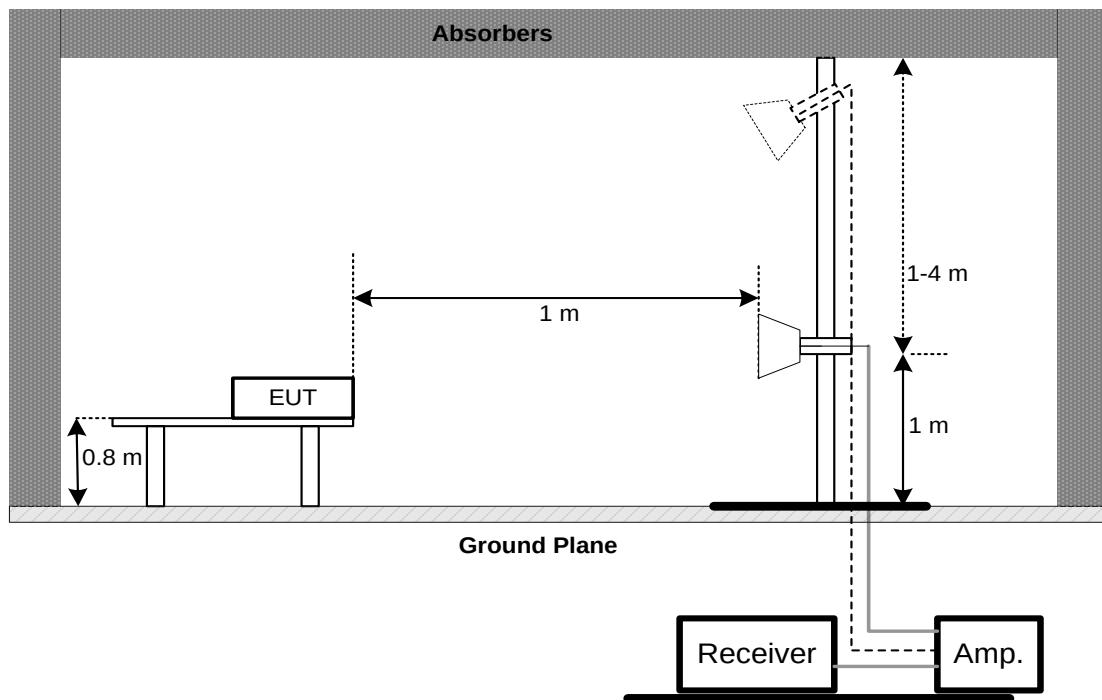


**4.2.6 TEST RESULTS-BELOW 1GHZ**

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |          |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

80 dBuV/m

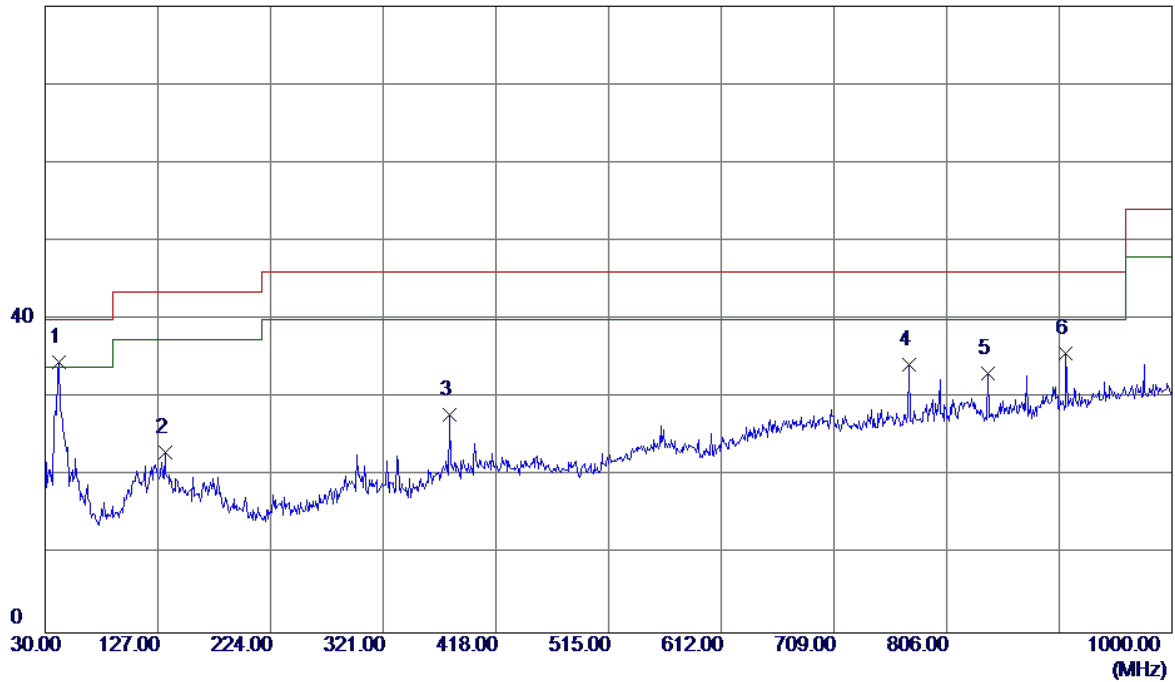


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 42.1250      | 46.68                      | -12.07                  | 34.61                     | 40.00           | -5.39        | QP       |
| 2   | 133.3049     | 34.45                      | -11.38                  | 23.07                     | 43.50           | -20.43       | QP       |
| 3   | 378.2300     | 36.56                      | -8.75                   | 27.81                     | 46.00           | -18.19       | QP       |
| 4   | 773.9900     | 34.38                      | -0.16                   | 34.22                     | 46.00           | -11.78       | QP       |
| 5   | 841.4050     | 32.55                      | 0.60                    | 33.15                     | 46.00           | -12.85       | QP       |
| 6   | 908.8200     | 33.79                      | 1.95                    | 35.74                     | 46.00           | -10.26       | QP       |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |            |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

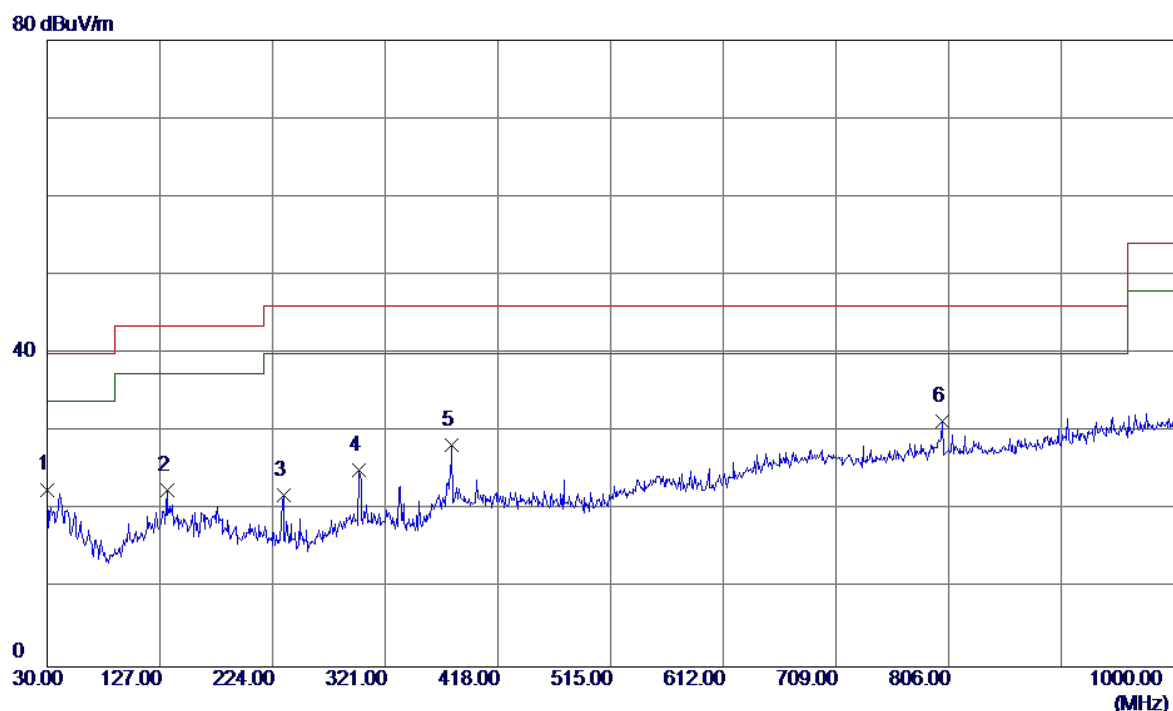


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 30.0000      | 35.44                      | -12.80                  | 22.64                     | 40.00           | -17.36       | QP       |
| 2   | 133.3049     | 33.96                      | -11.38                  | 22.58                     | 43.50           | -20.92       | QP       |
| 3   | 233.2150     | 34.96                      | -13.07                  | 21.89                     | 46.00           | -24.11       | QP       |
| 4   | 298.6900     | 35.05                      | -9.95                   | 25.10                     | 46.00           | -20.90       | QP       |
| 5   | 378.2300     | 37.06                      | -8.75                   | 28.31                     | 46.00           | -17.69       | QP       |
| 6 * | 800.1800     | 30.78                      | 0.61                    | 31.39                     | 46.00           | -14.61       | QP       |

|               |                                                       |                   |          |
|---------------|-------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                  | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |          |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                              |                   |          |

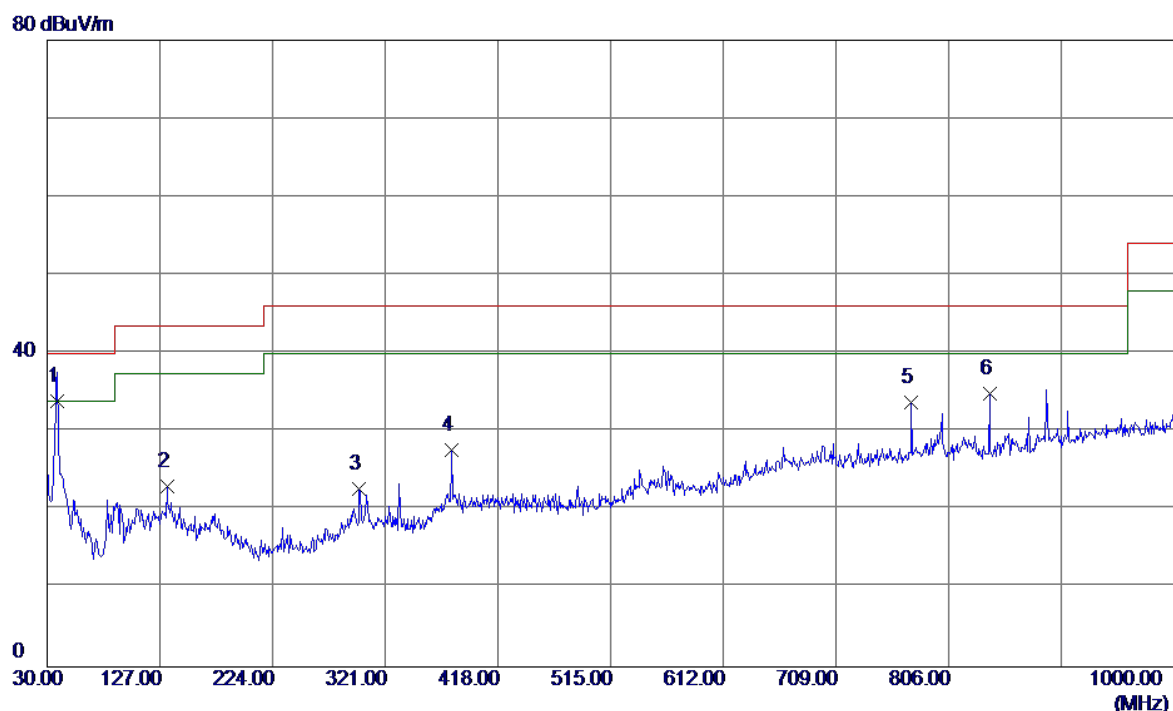

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.4443      | 46.75                      | -12.76                  | 33.99                     | 40.00           | -6.01        | QP       |
| 2   | 133.3049     | 34.45                      | -11.38                  | 23.07                     | 43.50           | -20.43       | QP       |
| 3   | 298.6900     | 32.74                      | -9.95                   | 22.79                     | 46.00           | -23.21       | QP       |
| 4   | 378.2300     | 36.48                      | -8.75                   | 27.73                     | 46.00           | -18.27       | QP       |
| 5   | 773.9900     | 33.94                      | -0.16                   | 33.78                     | 46.00           | -12.22       | QP       |
| 6   | 841.4050     | 34.21                      | 0.60                    | 34.81                     | 46.00           | -11.19       | QP       |


|               |                                                       |                   |            |
|---------------|-------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                  | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |            |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |            |
| Test Engineer | Kevin Li                                              |                   |            |

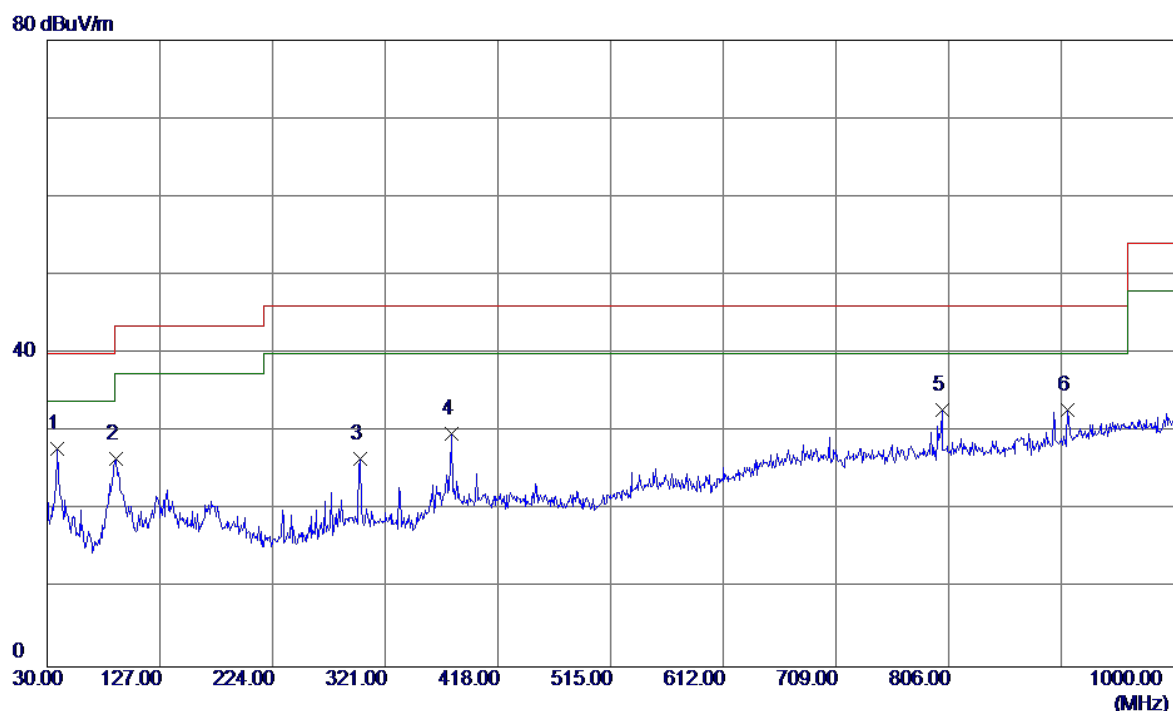

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.7300      | 40.49                      | -12.72                  | 27.77                     | 40.00           | -12.23       | QP       |
| 2   | 89.6550      | 42.90                      | -16.39                  | 26.51                     | 43.50           | -16.99       | QP       |
| 3   | 299.6600     | 36.46                      | -9.94                   | 26.52                     | 46.00           | -19.48       | QP       |
| 4   | 378.2300     | 38.53                      | -8.75                   | 29.78                     | 46.00           | -16.22       | QP       |
| 5   | 800.1800     | 32.13                      | 0.61                    | 32.74                     | 46.00           | -13.26       | QP       |
| 6   | 908.8200     | 30.80                      | 1.95                    | 32.75                     | 46.00           | -13.25       | QP       |

|               |                                                |                   |          |
|---------------|------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29  |
| Temperature   | 25°C                                           | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                   | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |          |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |          |
| Test Engineer | Kevin Li                                       |                   |          |


80 dBuV/m

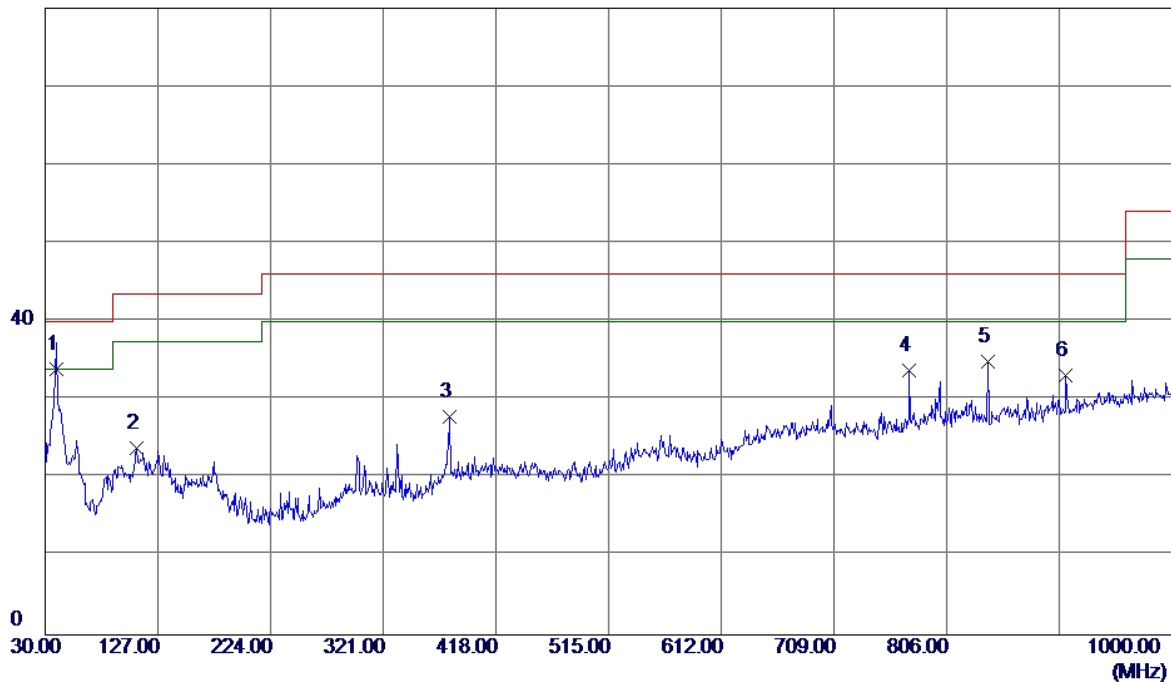

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 39.2150      | 46.51                      | -12.64                  | 33.87                     | 40.00           | -6.13        | QP       |
| 2   | 108.5700     | 37.85                      | -13.96                  | 23.89                     | 43.50           | -19.61       | QP       |
| 3   | 378.2300     | 36.57                      | -8.75                   | 27.82                     | 46.00           | -18.18       | QP       |
| 4   | 773.9900     | 33.97                      | -0.16                   | 33.81                     | 46.00           | -12.19       | QP       |
| 5   | 841.4050     | 34.33                      | 0.60                    | 34.93                     | 46.00           | -11.07       | QP       |
| 6   | 908.8200     | 31.16                      | 1.95                    | 33.11                     | 46.00           | -12.89       | QP       |


|               |                                                |                   |            |
|---------------|------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29    |
| Temperature   | 25°C                                           | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                   | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |            |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |            |
| Test Engineer | Kevin Li                                       |                   |            |

80 dBuV/m

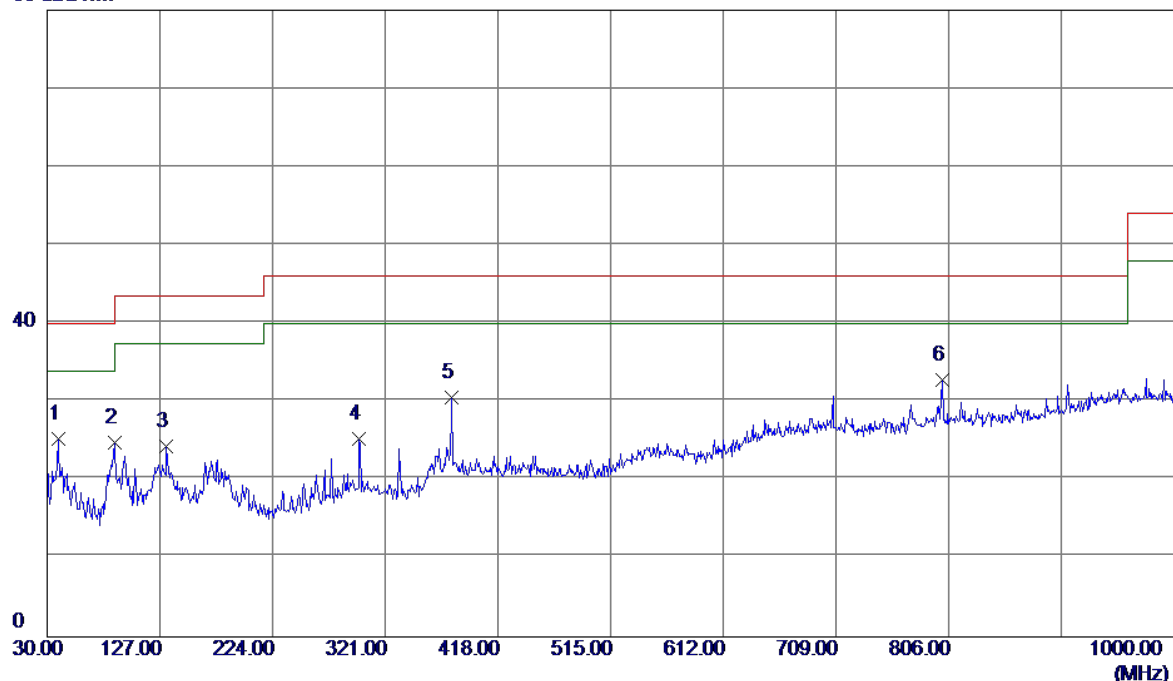


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 39.2150      | 37.99                      | -12.64                  | 25.35                     | 40.00           | -14.65       | QP       |
| 2   | 87.7149      | 41.14                      | -16.32                  | 24.82                     | 40.00           | -15.18       | QP       |
| 3   | 132.8200     | 35.70                      | -11.35                  | 24.35                     | 43.50           | -19.15       | QP       |
| 4   | 298.6900     | 35.25                      | -9.95                   | 25.30                     | 46.00           | -20.70       | QP       |
| 5   | 378.2300     | 39.35                      | -8.75                   | 30.60                     | 46.00           | -15.40       | QP       |
| 6 * | 800.1800     | 32.22                      | 0.61                    | 32.83                     | 46.00           | -13.17       | QP       |

|               |                                                 |                   |          |
|---------------|-------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29  |
| Temperature   | 25°C                                            | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                    | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |          |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |          |
| Test Engineer | Kevin Li                                        |                   |          |

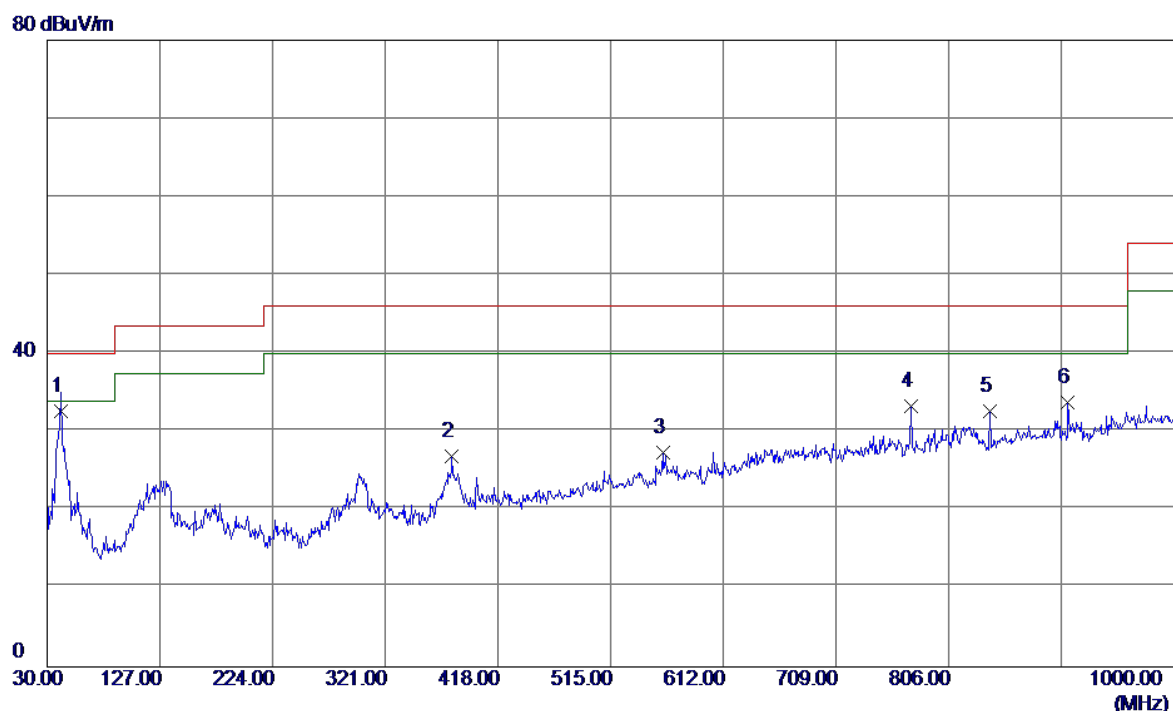


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 42.1250      | 44.68                      | -12.07                  | 32.61                     | 40.00           | -7.39        | QP       |
| 2   | 378.2300     | 35.56                      | -8.75                   | 26.81                     | 46.00           | -19.19       | QP       |
| 3   | 560.1050     | 31.91                      | -4.52                   | 27.39                     | 46.00           | -18.61       | QP       |
| 4   | 773.9900     | 33.38                      | -0.16                   | 33.22                     | 46.00           | -12.78       | QP       |
| 5   | 841.4050     | 32.05                      | 0.60                    | 32.65                     | 46.00           | -13.35       | QP       |
| 6   | 908.8200     | 31.79                      | 1.95                    | 33.74                     | 46.00           | -12.26       | QP       |

|               |                                                 |                   |            |
|---------------|-------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29    |
| Temperature   | 25°C                                            | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                    | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |            |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |            |
| Test Engineer | Kevin Li                                        |                   |            |

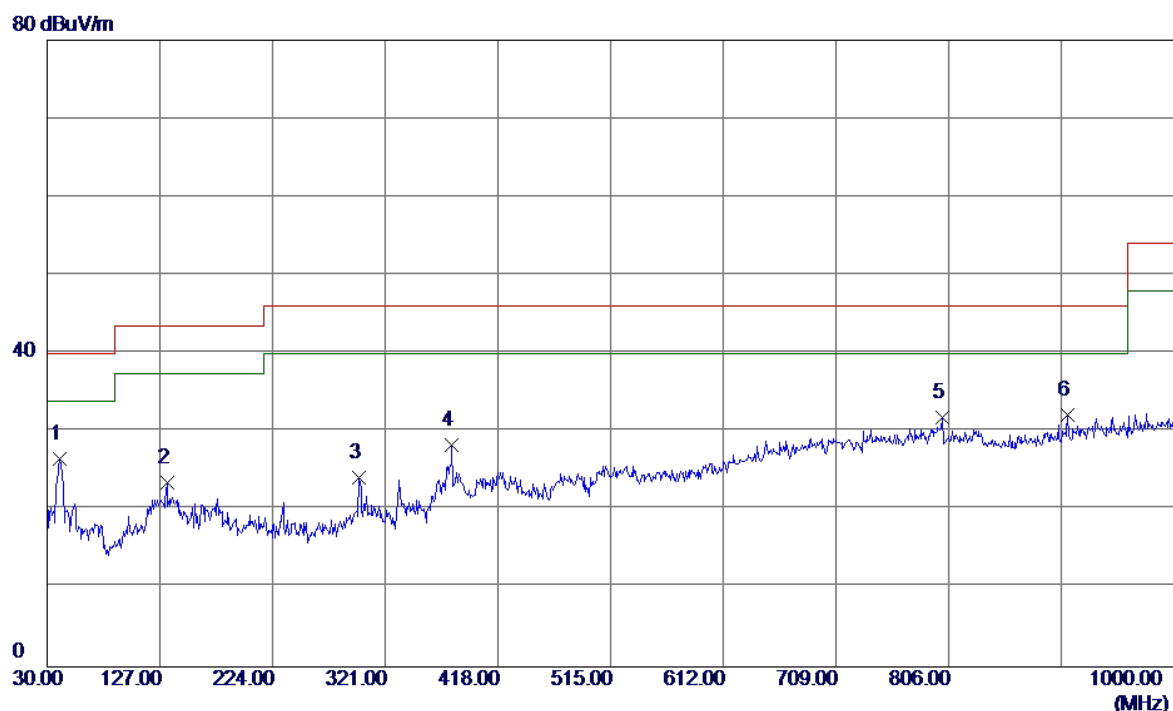


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 41.1550      | 38.82                      | -12.28                  | 26.54                     | 40.00           | -13.46       | QP       |
| 2   | 133.3049     | 34.96                      | -11.38                  | 23.58                     | 43.50           | -19.92       | QP       |
| 3   | 298.6900     | 34.05                      | -9.95                   | 24.10                     | 46.00           | -21.90       | QP       |
| 4   | 378.2300     | 37.06                      | -8.75                   | 28.31                     | 46.00           | -17.69       | QP       |
| 5   | 800.1800     | 31.28                      | 0.61                    | 31.89                     | 46.00           | -14.11       | QP       |
| 6   | 908.8200     | 30.27                      | 1.95                    | 32.22                     | 46.00           | -13.78       | QP       |

|               |                                                                        |                   |          |
|---------------|------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |          |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                               |                   |          |

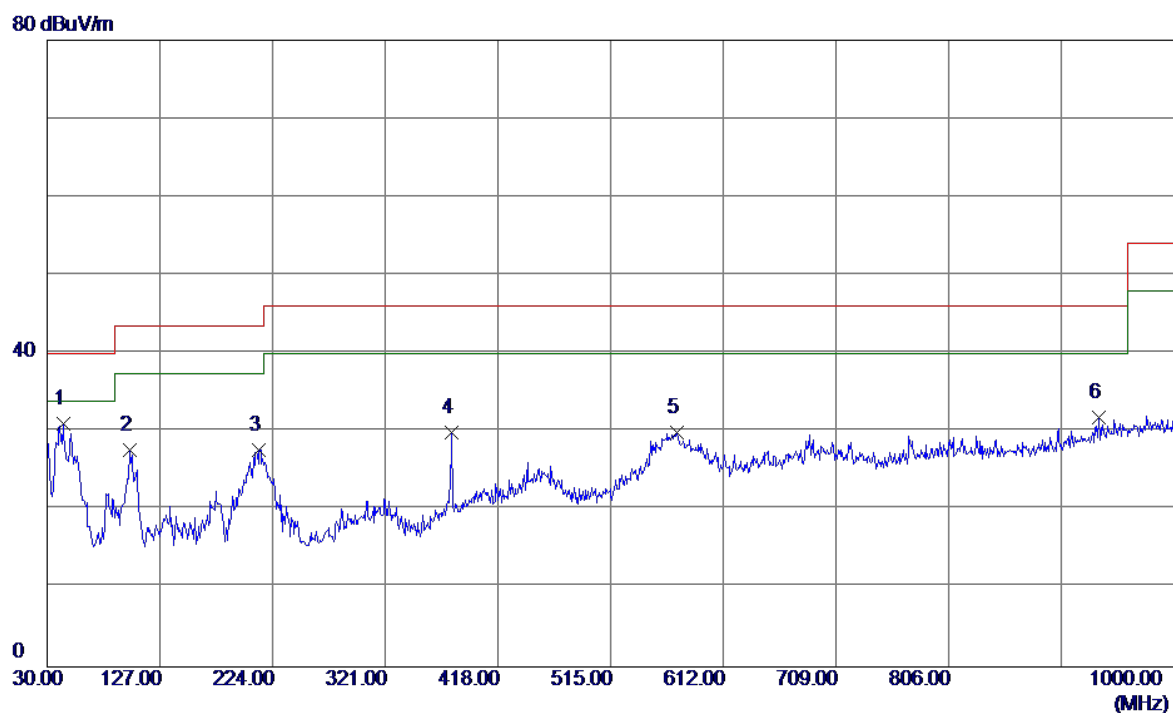

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 44.0650      | 42.74                      | -11.70                  | 31.04                     | 40.00           | -8.96        | QP       |
| 2   | 101.2950     | 42.15                      | -14.44                  | 27.71                     | 43.50           | -15.79       | QP       |
| 3   | 212.3600     | 41.72                      | -14.07                  | 27.65                     | 43.50           | -15.85       | QP       |
| 4   | 378.2300     | 38.72                      | -8.75                   | 29.97                     | 46.00           | -16.03       | QP       |
| 5   | 572.2300     | 34.55                      | -4.61                   | 29.94                     | 46.00           | -16.06       | QP       |
| 6   | 935.4950     | 29.04                      | 2.76                    | 31.80                     | 46.00           | -14.20       | QP       |


|               |                                                                        |                   |            |
|---------------|------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |            |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                               |                   |            |

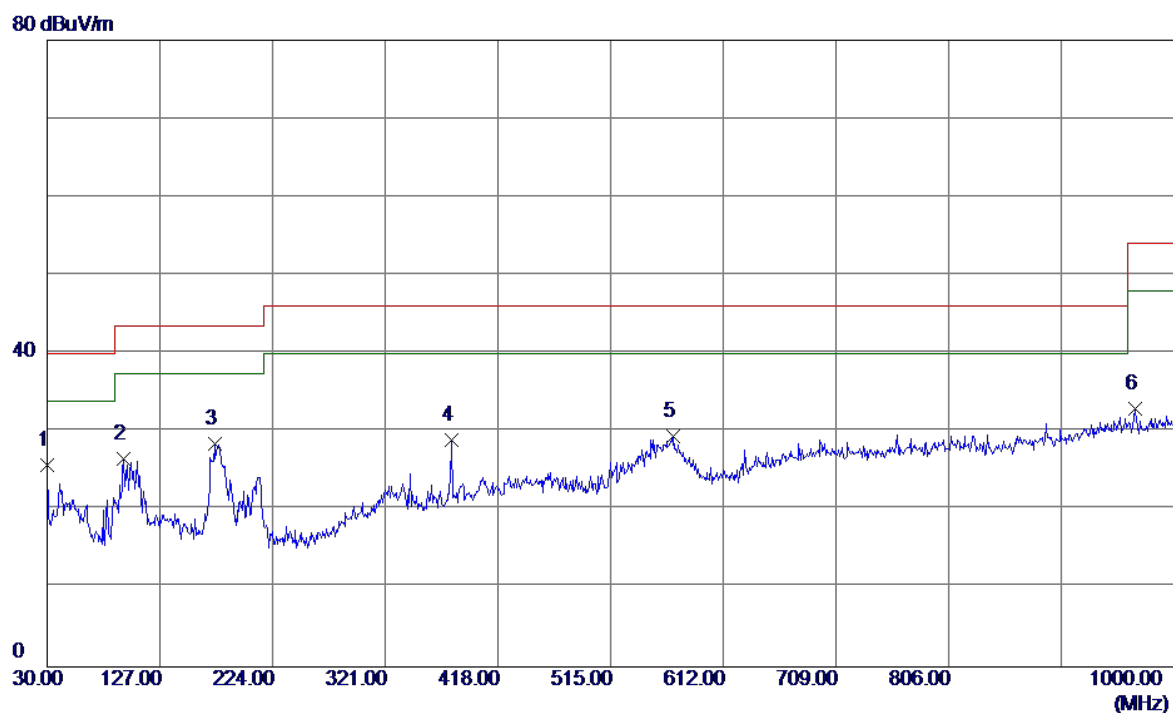

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 38.58                      | -12.80                  | 25.78                     | 40.00           | -14.22       | QP       |
| 2   | 95.9600      | 42.49                      | -15.93                  | 26.56                     | 43.50           | -16.94       | QP       |
| 3   | 174.0450     | 39.77                      | -11.29                  | 28.48                     | 43.50           | -15.02       | QP       |
| 4   | 378.2300     | 37.72                      | -8.75                   | 28.97                     | 46.00           | -17.03       | QP       |
| 5   | 569.3200     | 33.97                      | -4.59                   | 29.38                     | 46.00           | -16.62       | QP       |
| 6   | 966.5350     | 29.48                      | 3.44                    | 32.92                     | 54.00           | -21.08       | QP       |


|               |                                                                        |                   |          |
|---------------|------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |          |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                               |                   |          |

80 dBuV/m

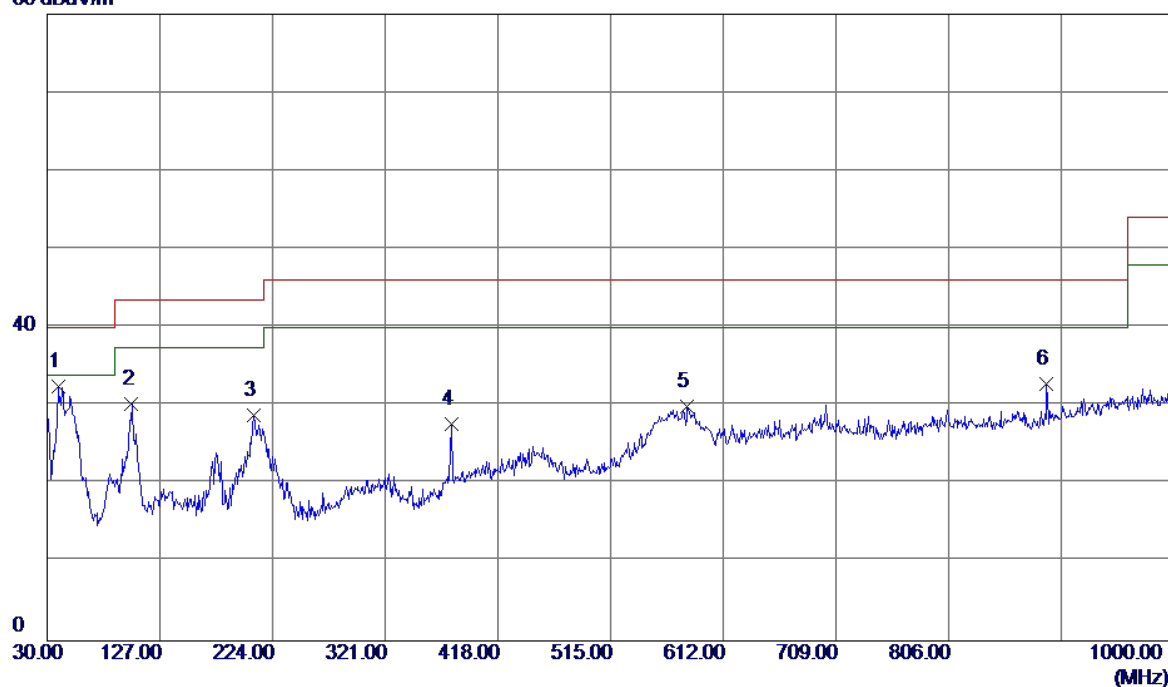

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 39.2150      | 45.11                      | -12.64                  | 32.47                     | 40.00           | -7.53        | QP       |
| 2   | 102.7500     | 44.58                      | -14.35                  | 30.23                     | 43.50           | -13.27       | QP       |
| 3   | 207.5100     | 42.75                      | -13.99                  | 28.76                     | 43.50           | -14.74       | QP       |
| 4   | 377.7450     | 36.53                      | -8.79                   | 27.74                     | 46.00           | -18.26       | QP       |
| 5   | 580.9600     | 34.56                      | -4.68                   | 29.88                     | 46.00           | -16.12       | QP       |
| 6   | 890.3900     | 31.26                      | 1.47                    | 32.73                     | 46.00           | -13.27       | QP       |


|               |                                                                        |                   |            |
|---------------|------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |            |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                               |                   |            |

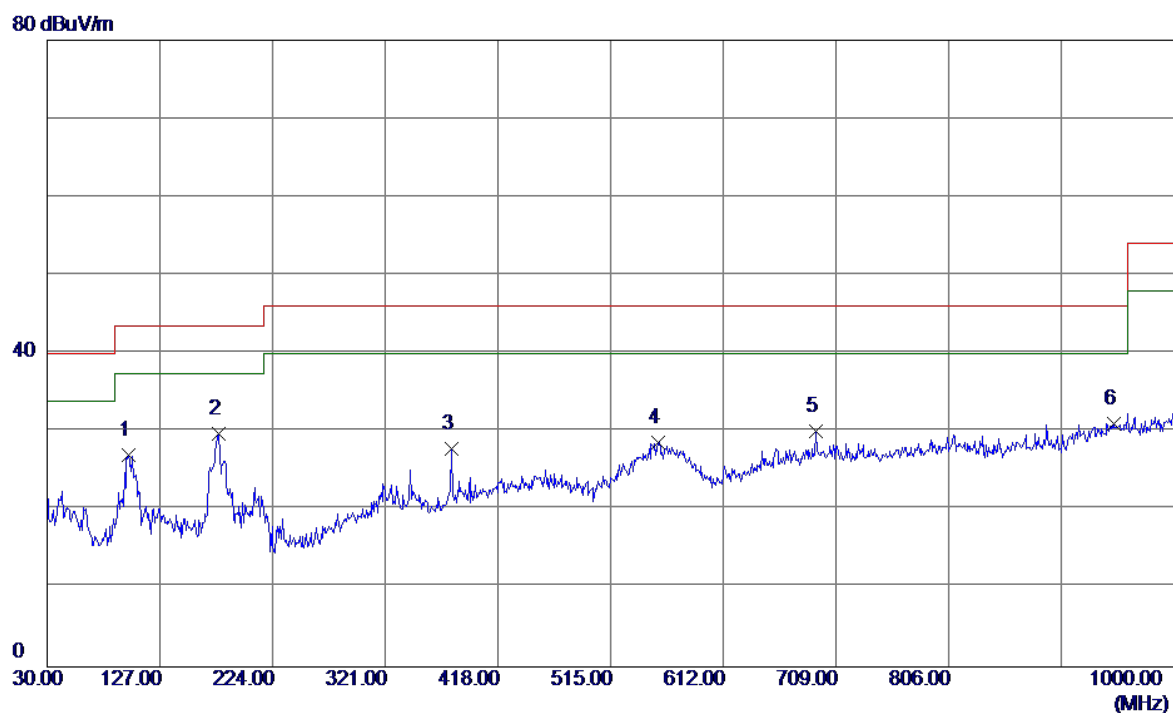

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 99.8399      | 41.70                      | -14.59                  | 27.11                     | 43.50           | -16.39       | QP       |
| 2 * | 177.4400     | 41.59                      | -11.78                  | 29.81                     | 43.50           | -13.69       | QP       |
| 3   | 377.7450     | 36.64                      | -8.79                   | 27.85                     | 46.00           | -18.15       | QP       |
| 4   | 556.2250     | 33.20                      | -4.49                   | 28.71                     | 46.00           | -17.29       | QP       |
| 5   | 692.0250     | 30.88                      | -0.82                   | 30.06                     | 46.00           | -15.94       | QP       |
| 6   | 948.1050     | 27.93                      | 3.15                    | 31.08                     | 46.00           | -14.92       | QP       |


|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |

80 dBuV/m

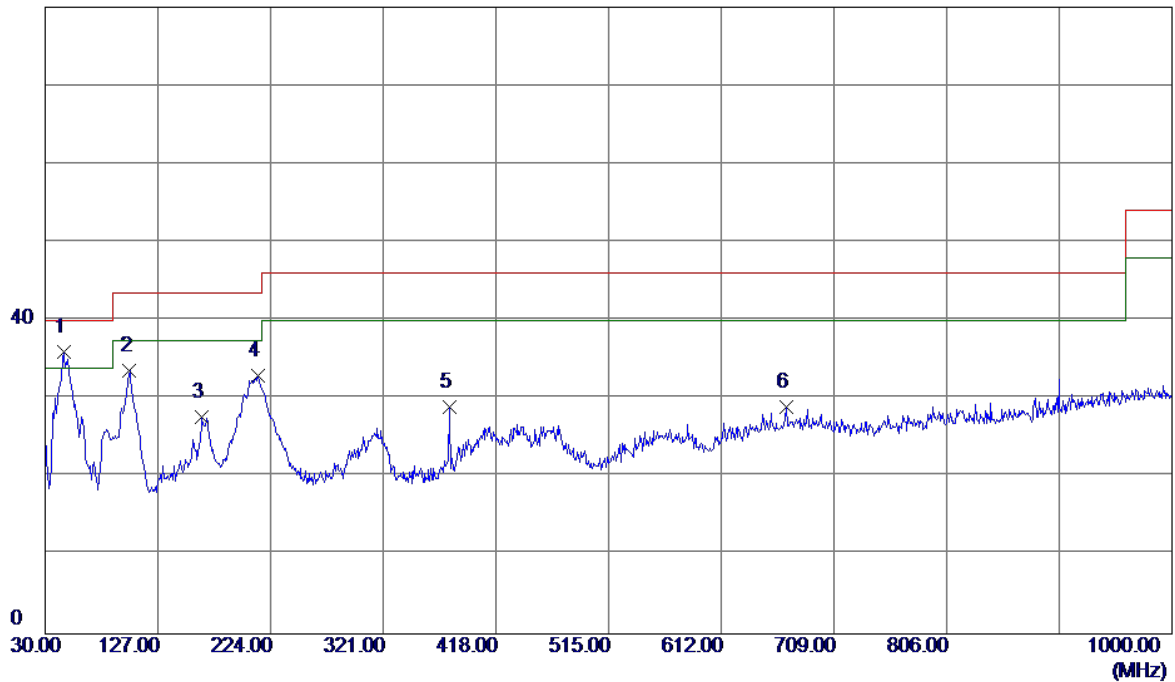

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 46.0050      | 48.13                      | -12.07                  | 36.06                     | 40.00           | -3.94        | QP       |
| 2   | 102.7500     | 47.88                      | -14.35                  | 33.53                     | 43.50           | -9.97        | QP       |
| 3   | 164.8300     | 39.28                      | -11.66                  | 27.62                     | 43.50           | -15.88       | QP       |
| 4   | 213.3300     | 46.98                      | -14.05                  | 32.93                     | 43.50           | -10.57       | QP       |
| 5   | 377.7450     | 37.81                      | -8.79                   | 29.02                     | 46.00           | -16.98       | QP       |
| 6   | 667.7750     | 30.25                      | -1.32                   | 28.93                     | 46.00           | -17.07       | QP       |


|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |

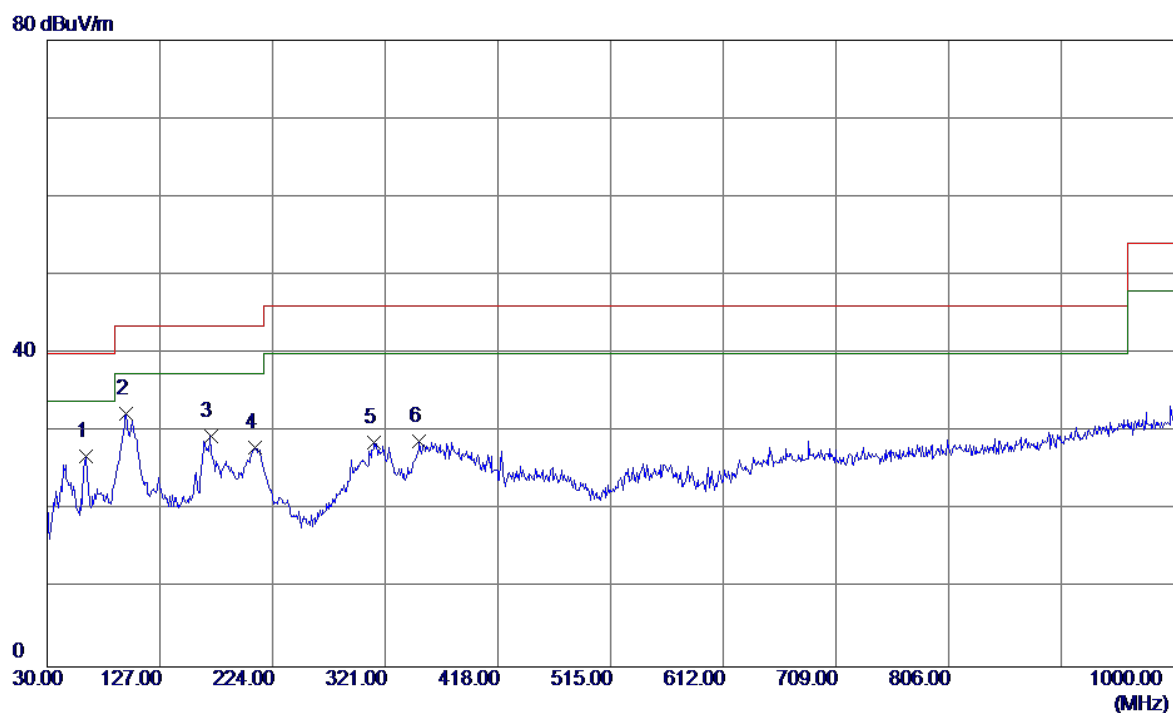

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.9800      | 40.89                      | -13.95                  | 26.94                     | 40.00           | -13.06       | QP       |
| 2 * | 97.9000      | 47.61                      | -15.26                  | 32.35                     | 43.50           | -11.15       | QP       |
| 3   | 170.6500     | 40.18                      | -10.80                  | 29.38                     | 43.50           | -14.12       | QP       |
| 4   | 208.9650     | 42.04                      | -14.05                  | 27.99                     | 43.50           | -15.51       | QP       |
| 5   | 311.7850     | 38.79                      | -10.14                  | 28.65                     | 46.00           | -17.35       | QP       |
| 6   | 350.1000     | 39.49                      | -10.76                  | 28.73                     | 46.00           | -17.27       | QP       |


|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |

80 dBuV/m

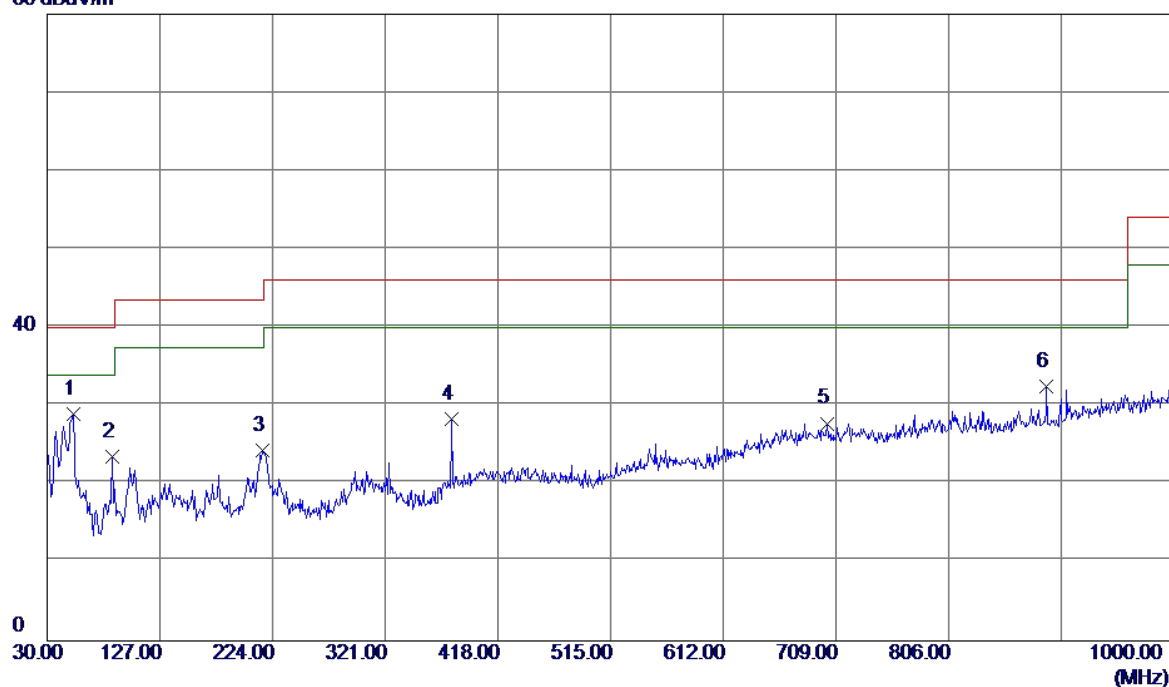


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 52.7950      | 41.38                      | -12.39                  | 28.99                     | 40.00           | -11.01       | QP       |
| 2   | 86.2600      | 39.78                      | -16.28                  | 23.50                     | 40.00           | -16.50       | QP       |
| 3   | 215.7550     | 38.36                      | -14.02                  | 24.34                     | 43.50           | -19.16       | QP       |
| 4   | 378.2300     | 37.13                      | -8.75                   | 28.38                     | 46.00           | -17.62       | QP       |
| 5   | 701.2400     | 28.42                      | -0.66                   | 27.76                     | 46.00           | -18.24       | QP       |
| 6   | 890.3900     | 31.01                      | 1.47                    | 32.48                     | 46.00           | -13.52       | QP       |

|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |

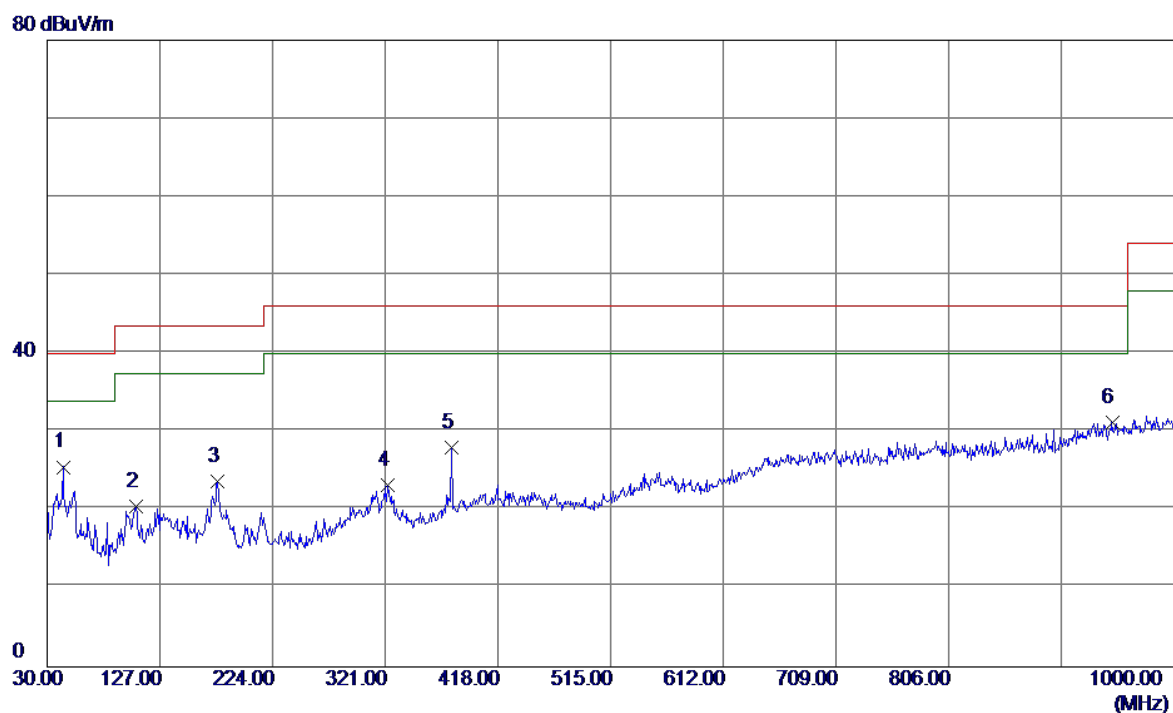


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 43.5800      | 37.29                      | -11.77                  | 25.52                     | 40.00           | -14.48       | QP       |
| 2   | 106.1450     | 34.53                      | -14.12                  | 20.41                     | 43.50           | -23.09       | QP       |
| 3   | 176.9550     | 35.44                      | -11.71                  | 23.73                     | 43.50           | -19.77       | QP       |
| 4   | 323.4250     | 33.53                      | -10.33                  | 23.20                     | 46.00           | -22.80       | QP       |
| 5   | 378.2300     | 36.76                      | -8.75                   | 28.01                     | 46.00           | -17.99       | QP       |
| 6   | 946.6500     | 28.04                      | 3.10                    | 31.14                     | 46.00           | -14.86       | QP       |

|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+Playing+Speaker                        |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

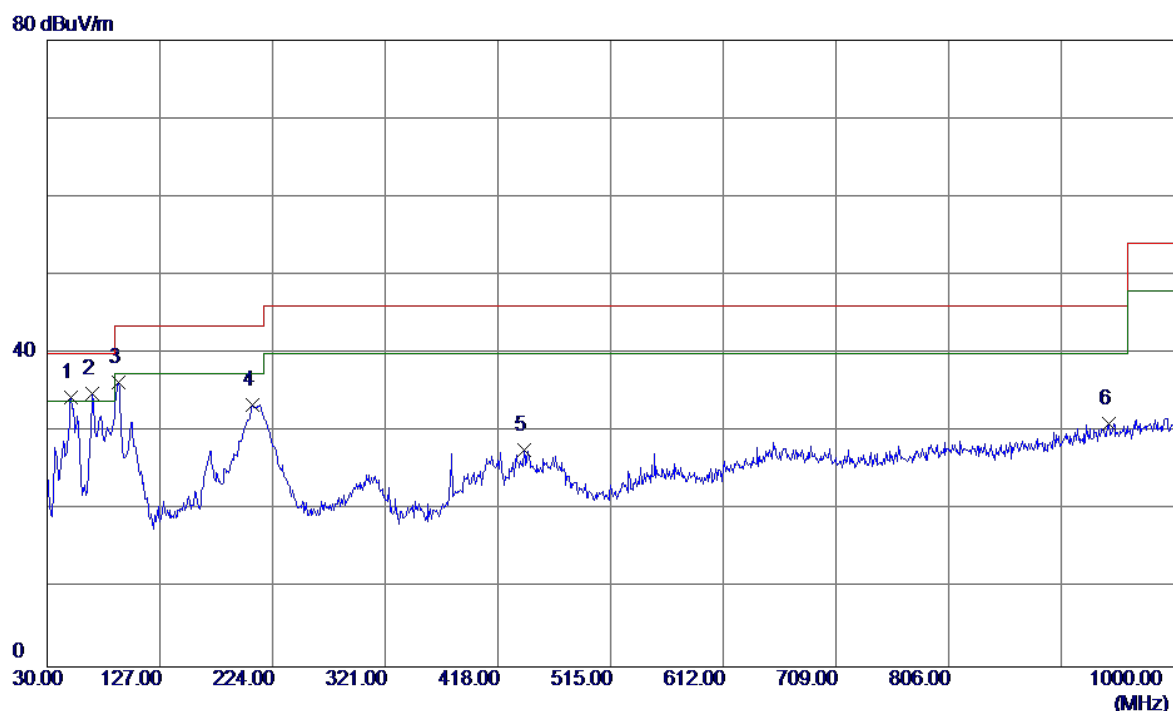


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 50.3700      | 46.56                      | -12.12                  | 34.44                     | 40.00           | -5.56        | QP       |
| 2 * | 69.2850      | 49.84                      | -15.01                  | 34.83                     | 40.00           | -5.17        | QP       |
| 3   | 91.1100      | 52.73                      | -16.37                  | 36.36                     | 43.50           | -7.14        | QP       |
| 4   | 207.0250     | 47.42                      | -13.96                  | 33.46                     | 43.50           | -10.04       | QP       |
| 5   | 440.3100     | 34.84                      | -7.10                   | 27.74                     | 46.00           | -18.26       | QP       |
| 6   | 944.2250     | 28.03                      | 3.03                    | 31.06                     | 46.00           | -14.94       | QP       |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+Playing+Speaker                        |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

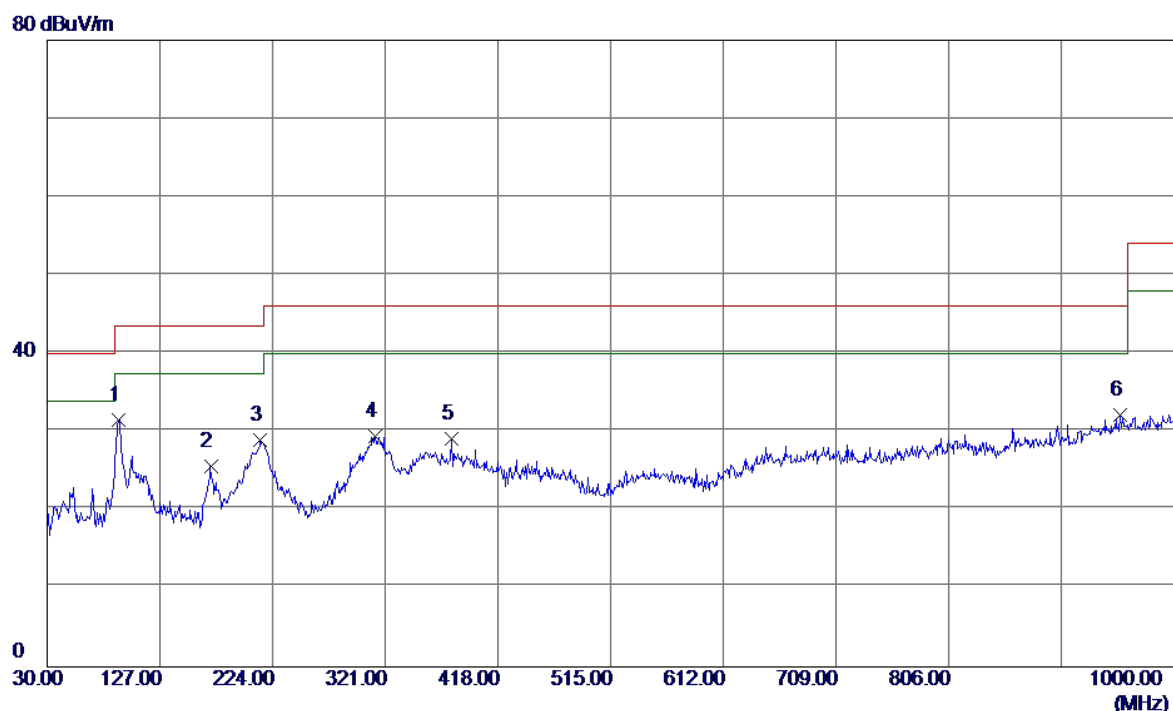


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 91.5950      | 47.93                      | -16.36                  | 31.57                     | 43.50           | -11.93       | QP       |
| 2   | 170.6500     | 36.39                      | -10.80                  | 25.59                     | 43.50           | -17.91       | QP       |
| 3   | 213.3300     | 43.02                      | -14.05                  | 28.97                     | 43.50           | -14.53       | QP       |
| 4   | 312.2700     | 39.60                      | -10.14                  | 29.46                     | 46.00           | -16.54       | QP       |
| 5   | 377.7450     | 37.92                      | -8.79                   | 29.13                     | 46.00           | -16.87       | QP       |
| 6   | 953.9250     | 28.85                      | 3.26                    | 32.11                     | 46.00           | -13.89       | QP       |

|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                         |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |

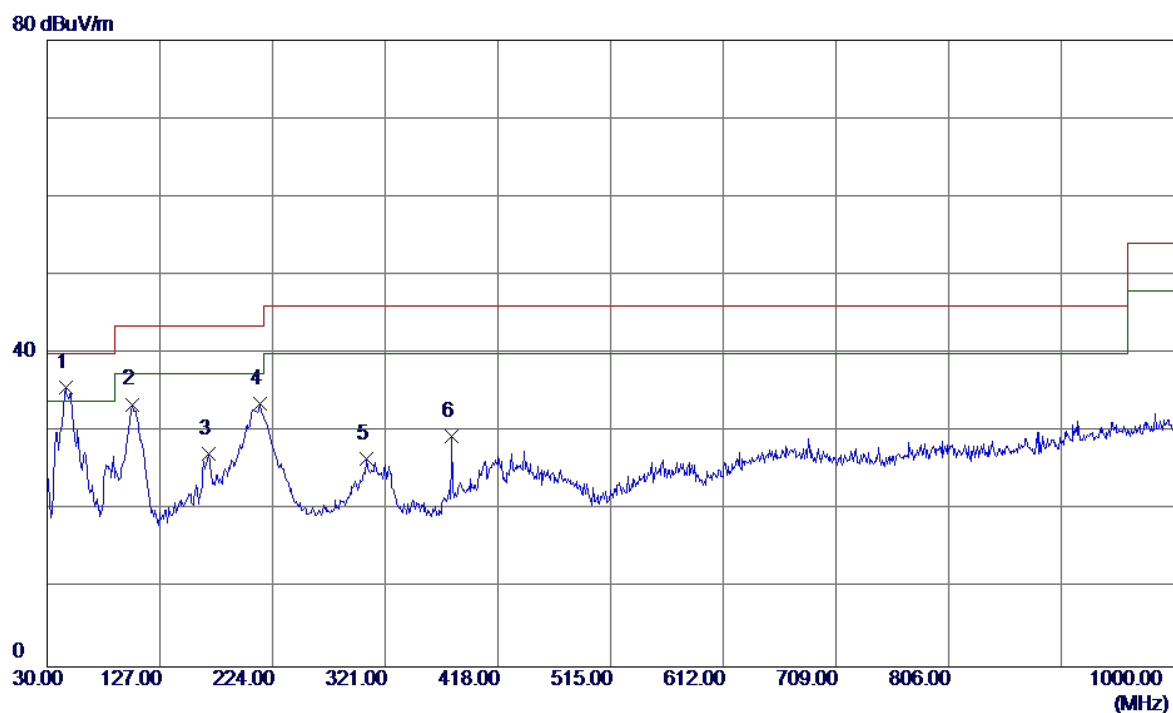


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 46.0050      | 47.72                      | -12.07                  | 35.65                     | 40.00           | -4.35        | QP       |
| 2   | 103.2350     | 47.84                      | -14.32                  | 33.52                     | 43.50           | -9.98        | QP       |
| 3   | 169.1950     | 37.99                      | -10.85                  | 27.14                     | 43.50           | -16.36       | QP       |
| 4   | 213.3300     | 47.58                      | -14.05                  | 33.53                     | 43.50           | -9.97        | QP       |
| 5   | 304.9950     | 36.56                      | -10.02                  | 26.54                     | 46.00           | -19.46       | QP       |
| 6   | 378.2300     | 38.26                      | -8.75                   | 29.51                     | 46.00           | -16.49       | QP       |

|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                         |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |

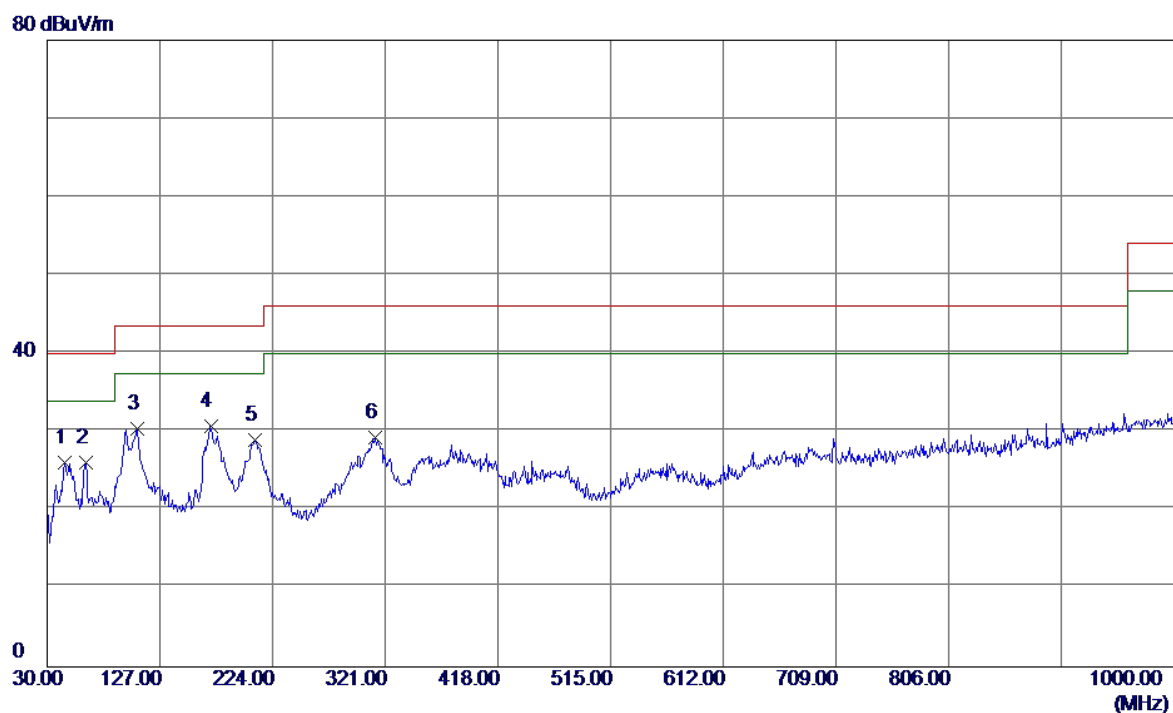

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 45.5200      | 38.09                      | -11.98                  | 26.11                     | 40.00           | -13.89       | QP       |
| 2   | 62.9800      | 40.08                      | -13.95                  | 26.13                     | 40.00           | -13.87       | QP       |
| 3   | 107.1150     | 44.51                      | -14.06                  | 30.45                     | 43.50           | -13.05       | QP       |
| 4 * | 170.6500     | 41.55                      | -10.80                  | 30.75                     | 43.50           | -12.75       | QP       |
| 5   | 208.4800     | 42.97                      | -14.03                  | 28.94                     | 43.50           | -14.56       | QP       |
| 6   | 312.2700     | 39.47                      | -10.14                  | 29.33                     | 46.00           | -16.67       | QP       |


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

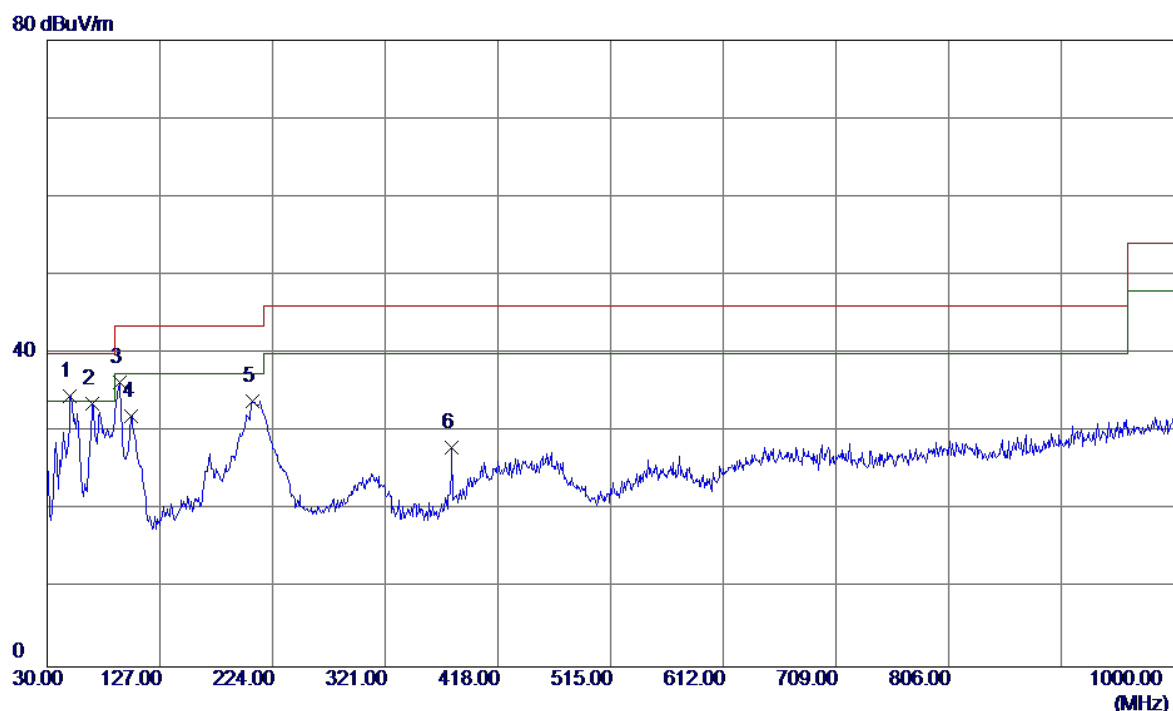

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 49.8849      | 46.66                      | -12.05                  | 34.61                     | 40.00           | -5.39        | QP       |
| 2   | 68.8000      | 48.52                      | -14.86                  | 33.66                     | 40.00           | -6.34        | QP       |
| 3   | 92.5650      | 52.58                      | -16.33                  | 36.25                     | 43.50           | -7.25        | QP       |
| 4   | 102.7500     | 46.29                      | -14.35                  | 31.94                     | 43.50           | -11.56       | QP       |
| 5   | 207.0250     | 47.84                      | -13.96                  | 33.88                     | 43.50           | -9.62        | QP       |
| 6   | 378.2300     | 36.70                      | -8.75                   | 27.95                     | 46.00           | -18.05       | QP       |


|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

80 dBuV/m

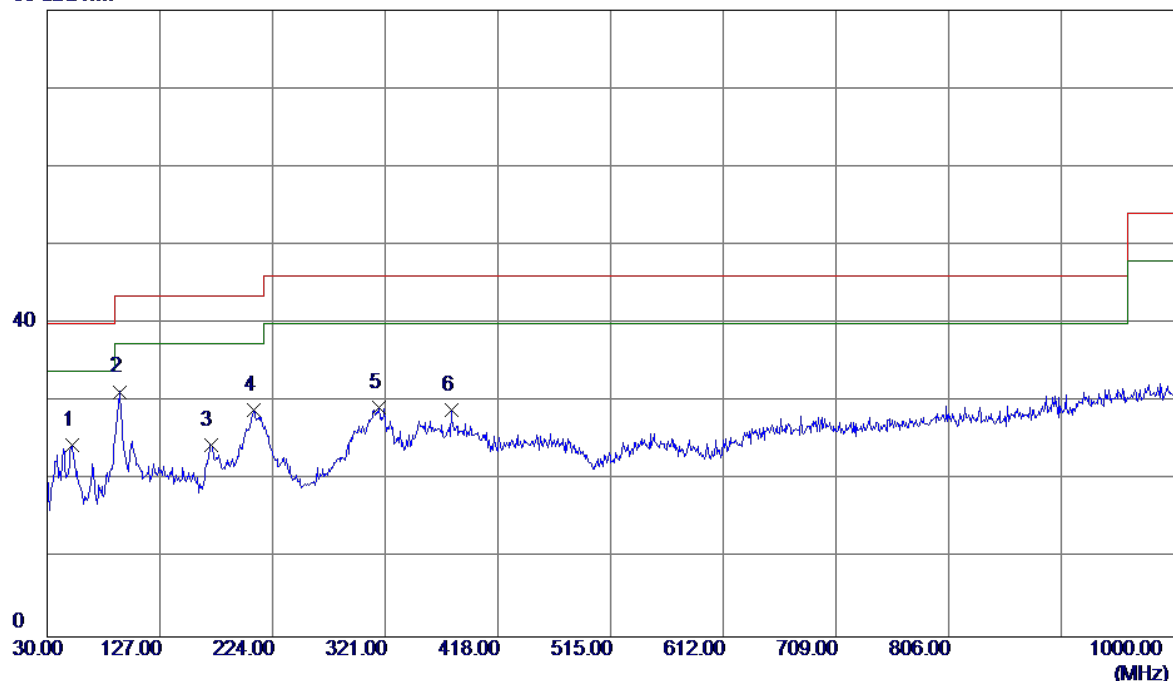

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 51.8250      | 36.97                      | -12.48                  | 24.49                     | 40.00           | -15.51       | QP       |
| 2 * | 92.5650      | 47.61                      | -16.33                  | 31.28                     | 43.50           | -12.22       | QP       |
| 3   | 170.6500     | 35.22                      | -10.80                  | 24.42                     | 43.50           | -19.08       | QP       |
| 4   | 207.5100     | 42.99                      | -13.99                  | 29.00                     | 43.50           | -14.50       | QP       |
| 5   | 315.1800     | 39.46                      | -10.19                  | 29.27                     | 46.00           | -16.73       | QP       |
| 6   | 377.7450     | 37.77                      | -8.79                   | 28.98                     | 46.00           | -17.02       | QP       |


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (LTE)                               |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

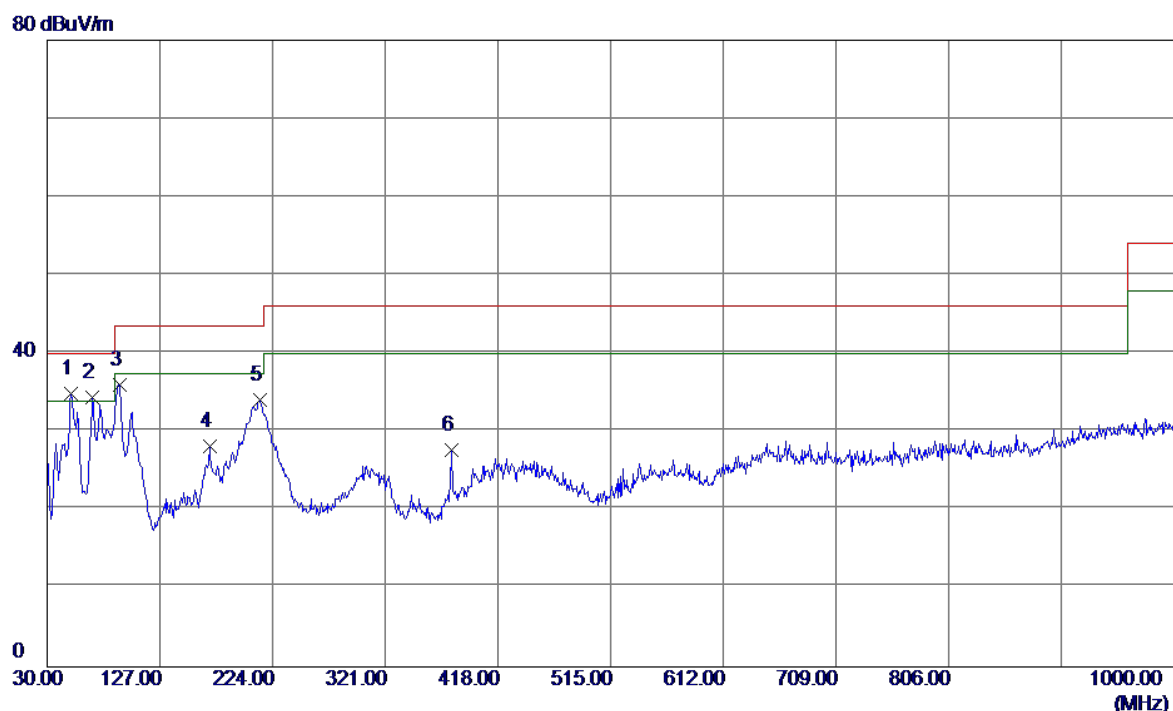

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 50.8550      | 47.05                      | -12.24                  | 34.81                     | 40.00           | -5.19        | QP       |
| 2   | 69.2850      | 49.37                      | -15.01                  | 34.36                     | 40.00           | -5.64        | QP       |
| 3   | 92.5650      | 52.36                      | -16.33                  | 36.03                     | 43.50           | -7.47        | QP       |
| 4   | 170.1649     | 38.88                      | -10.73                  | 28.15                     | 43.50           | -15.35       | QP       |
| 5   | 212.8450     | 48.07                      | -14.06                  | 34.01                     | 43.50           | -9.49        | QP       |
| 6   | 378.2300     | 36.43                      | -8.75                   | 27.68                     | 46.00           | -18.32       | QP       |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (LTE)                               |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

80 dBuV/m

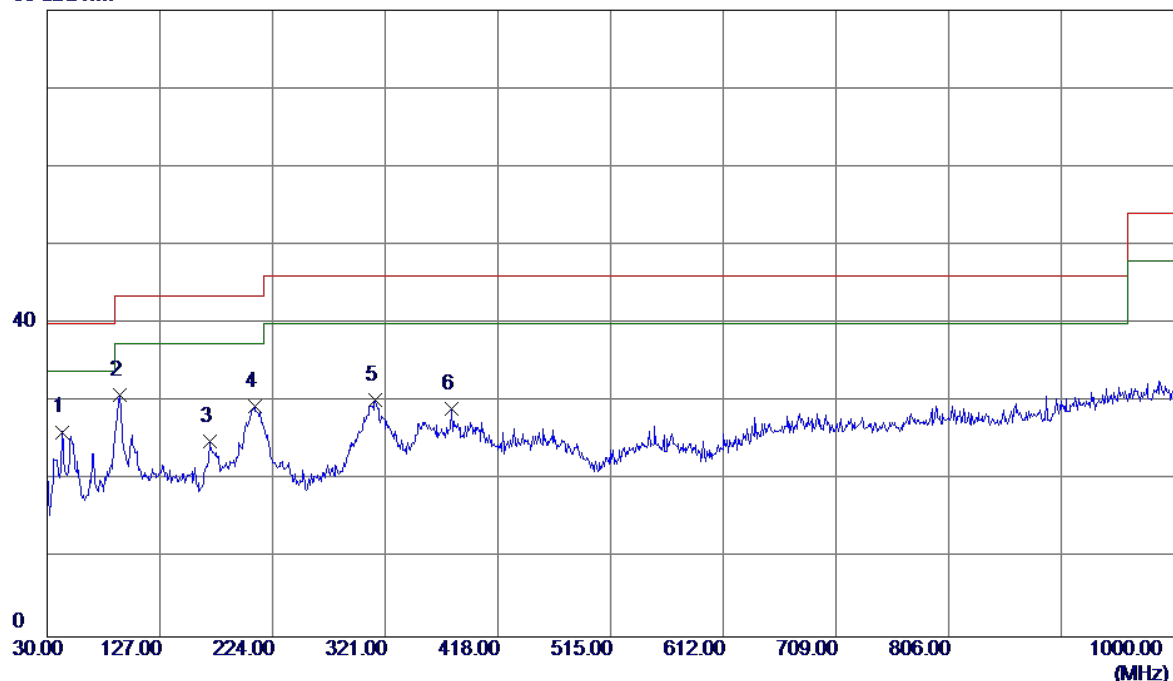


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 43.0950      | 38.03                      | -11.87                  | 26.16                     | 40.00           | -13.84       | QP       |
| 2 * | 92.5650      | 47.28                      | -16.33                  | 30.95                     | 43.50           | -12.55       | QP       |
| 3   | 169.6799     | 35.68                      | -10.76                  | 24.92                     | 43.50           | -18.58       | QP       |
| 4   | 208.4800     | 43.44                      | -14.03                  | 29.41                     | 43.50           | -14.09       | QP       |
| 5   | 312.2700     | 40.37                      | -10.14                  | 30.23                     | 46.00           | -15.77       | QP       |
| 6   | 377.7450     | 37.94                      | -8.79                   | 29.15                     | 46.00           | -16.85       | QP       |

#### 4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of『 Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |          |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

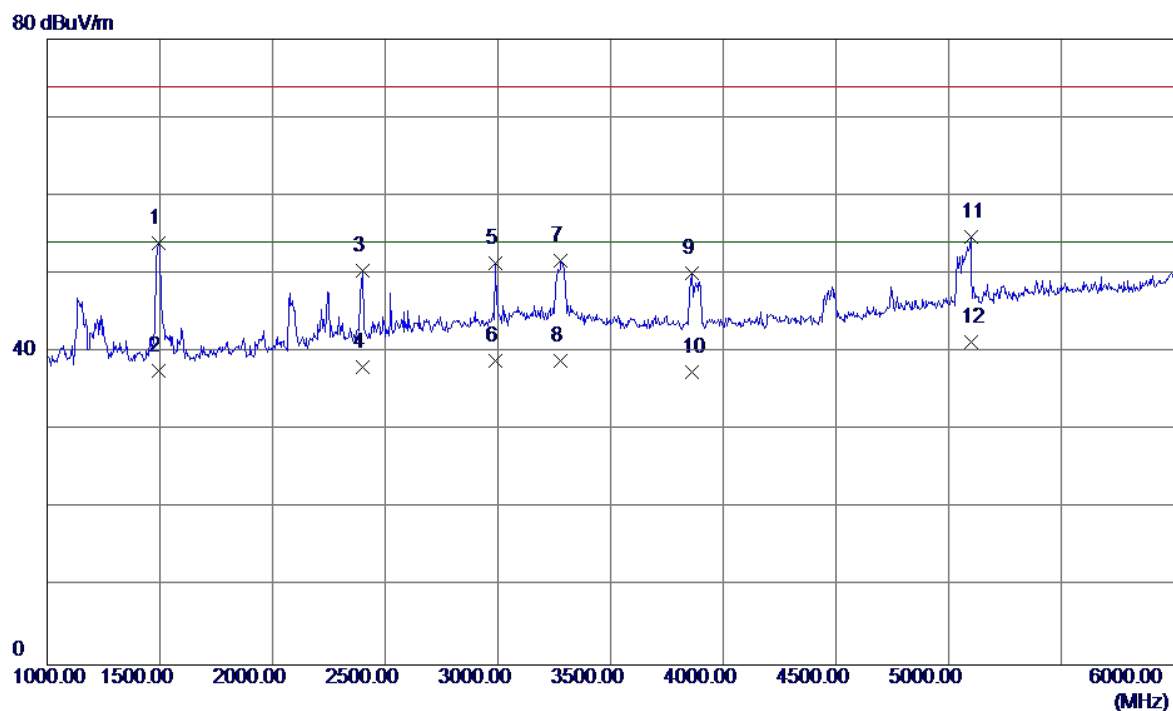


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1495.0000    | 58.88                      | -4.97                   | 53.91                     | 74.00           | -20.09       | Peak     |
| 2    | 1495.0000    | 42.62                      | -4.97                   | 37.65                     | 54.00           | -16.35       | AVG      |
| 3    | 2400.0000    | 50.71                      | -0.38                   | 50.33                     | 74.00           | -23.67       | Peak     |
| 4    | 2400.0000    | 38.46                      | -0.38                   | 38.08                     | 54.00           | -15.92       | AVG      |
| 5    | 2987.5000    | 49.07                      | 2.34                    | 51.41                     | 74.00           | -22.59       | Peak     |
| 6    | 2987.5000    | 36.59                      | 2.34                    | 38.93                     | 54.00           | -15.07       | AVG      |
| 7    | 3280.0000    | 49.44                      | 2.32                    | 51.76                     | 74.00           | -22.24       | Peak     |
| 8    | 3280.0000    | 36.57                      | 2.32                    | 38.89                     | 54.00           | -15.11       | AVG      |
| 9    | 3862.5000    | 47.54                      | 2.59                    | 50.13                     | 74.00           | -23.87       | Peak     |
| 10   | 3862.5000    | 34.87                      | 2.59                    | 37.46                     | 54.00           | -16.54       | AVG      |
| 11   | 5097.5000    | 48.16                      | 6.64                    | 54.80                     | 74.00           | -19.20       | Peak     |
| 12 * | 5097.5000    | 34.69                      | 6.64                    | 41.33                     | 54.00           | -12.67       | AVG      |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                |                   |            |
| Note          | USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

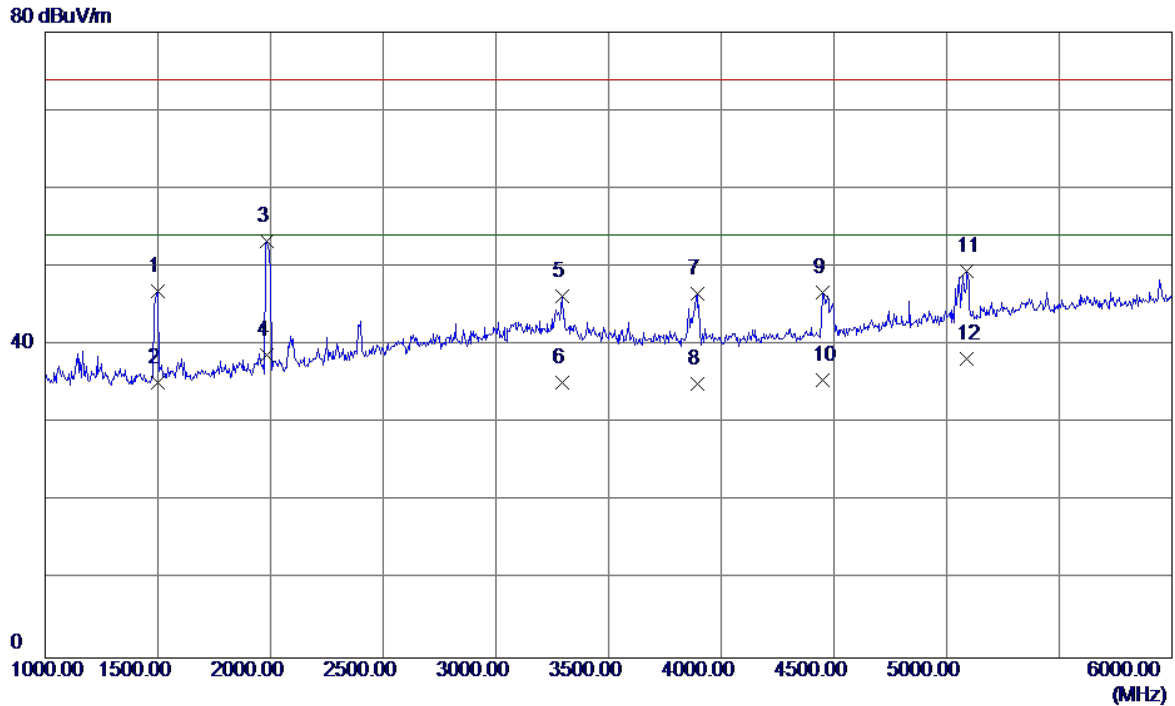


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1500.0000    | 51.89                      | -4.95                   | 46.94                     | 74.00           | -27.06       | Peak     |
| 2   | 1500.0000    | 40.13                      | -4.95                   | 35.18                     | 54.00           | -18.82       | AVG      |
| 3   | 1985.0000    | 55.90                      | -2.64                   | 53.26                     | 74.00           | -20.74       | Peak     |
| 4 * | 1985.0000    | 41.37                      | -2.64                   | 38.73                     | 54.00           | -15.27       | AVG      |
| 5   | 3292.5000    | 43.98                      | 2.32                    | 46.30                     | 74.00           | -27.70       | Peak     |
| 6   | 3292.5000    | 32.82                      | 2.32                    | 35.14                     | 54.00           | -18.86       | AVG      |
| 7   | 3892.5000    | 43.89                      | 2.62                    | 46.51                     | 74.00           | -27.49       | Peak     |
| 8   | 3892.5000    | 32.46                      | 2.62                    | 35.08                     | 54.00           | -18.92       | AVG      |
| 9   | 4447.5000    | 42.96                      | 3.76                    | 46.72                     | 74.00           | -27.28       | Peak     |
| 10  | 4447.5000    | 31.81                      | 3.76                    | 35.57                     | 54.00           | -18.43       | AVG      |
| 11  | 5090.0000    | 42.87                      | 6.62                    | 49.49                     | 74.00           | -24.51       | Peak     |
| 12  | 5090.0000    | 31.68                      | 6.62                    | 38.30                     | 54.00           | -15.70       | AVG      |

|               |                                                       |                   |          |
|---------------|-------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                  | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |          |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                              |                   |          |

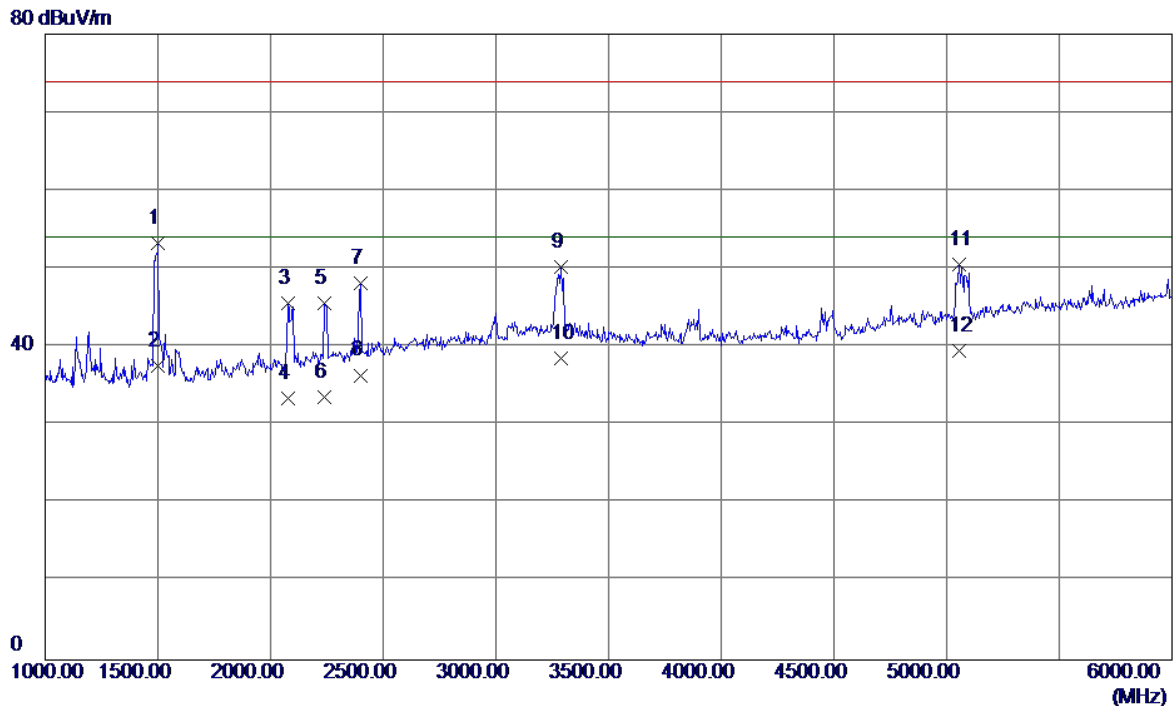


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1500.0000    | 58.21                      | -4.95                   | 53.26                     | 74.00           | -20.74       | Peak     |
| 2    | 1500.0000    | 42.62                      | -4.95                   | 37.67                     | 54.00           | -16.33       | AVG      |
| 3    | 2077.5000    | 47.70                      | -2.15                   | 45.55                     | 74.00           | -28.45       | Peak     |
| 4    | 2077.5000    | 35.59                      | -2.15                   | 33.44                     | 54.00           | -20.56       | AVG      |
| 5    | 2240.0000    | 46.78                      | -1.25                   | 45.53                     | 74.00           | -28.47       | Peak     |
| 6    | 2240.0000    | 34.91                      | -1.25                   | 33.66                     | 54.00           | -20.34       | AVG      |
| 7    | 2400.0000    | 48.48                      | -0.38                   | 48.10                     | 74.00           | -25.90       | Peak     |
| 8    | 2400.0000    | 36.78                      | -0.38                   | 36.40                     | 54.00           | -17.60       | AVG      |
| 9    | 3287.5000    | 47.85                      | 2.32                    | 50.17                     | 74.00           | -23.83       | Peak     |
| 10   | 3287.5000    | 36.24                      | 2.32                    | 38.56                     | 54.00           | -15.44       | AVG      |
| 11   | 5057.5000    | 44.09                      | 6.51                    | 50.60                     | 74.00           | -23.40       | Peak     |
| 12 * | 5057.5000    | 32.98                      | 6.51                    | 39.49                     | 54.00           | -14.51       | AVG      |

|               |                                                       |                   |            |
|---------------|-------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                           | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                  | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                  |                   |            |
| Note          | USB Cable:Luxshare+Battery:Sunwoda+Earphone:QUANCHENG |                   |            |
| Test Engineer | Kevin Li                                              |                   |            |

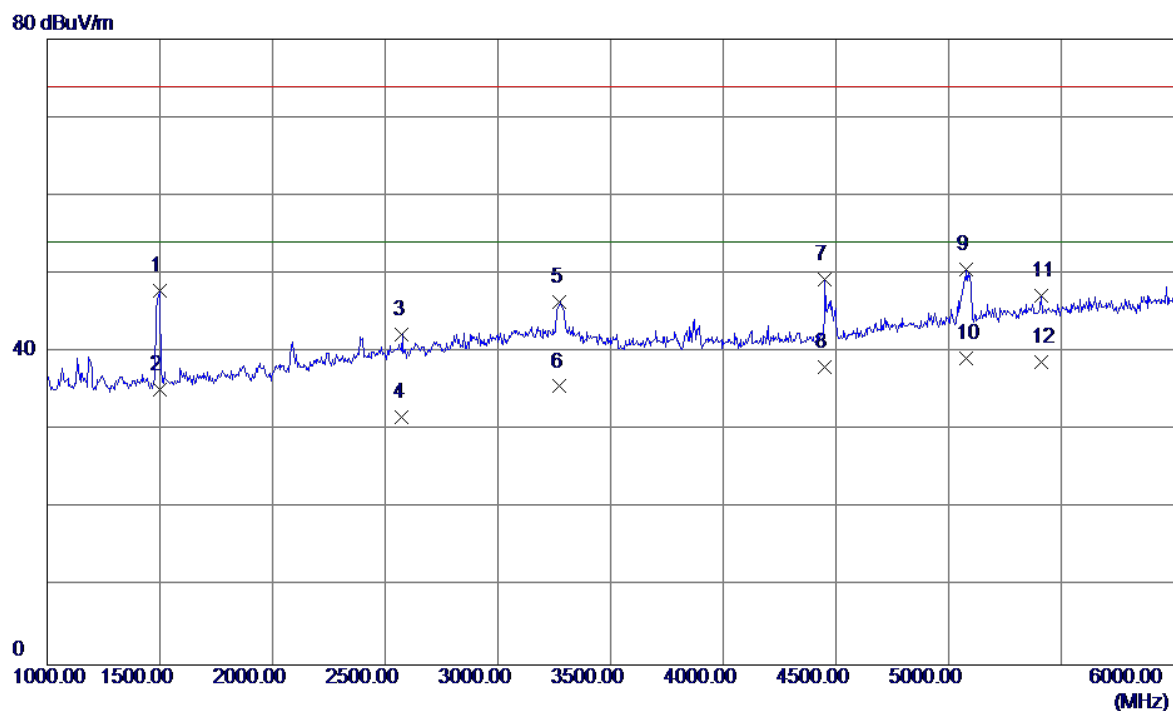


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1497.5000    | 52.74                      | -4.96                   | 47.78                     | 74.00           | -26.22       | Peak     |
| 2    | 1497.5000    | 40.12                      | -4.96                   | 35.16                     | 54.00           | -18.84       | AVG      |
| 3    | 2575.0000    | 41.72                      | 0.50                    | 42.22                     | 74.00           | -31.78       | Peak     |
| 4    | 2575.0000    | 31.25                      | 0.50                    | 31.75                     | 54.00           | -22.25       | AVG      |
| 5    | 3275.0000    | 44.02                      | 2.32                    | 46.34                     | 74.00           | -27.66       | Peak     |
| 6    | 3275.0000    | 33.28                      | 2.32                    | 35.60                     | 54.00           | -18.40       | AVG      |
| 7    | 4450.0000    | 45.47                      | 3.76                    | 49.23                     | 74.00           | -24.77       | Peak     |
| 8    | 4450.0000    | 34.37                      | 3.76                    | 38.13                     | 54.00           | -15.87       | AVG      |
| 9    | 5080.0000    | 43.99                      | 6.58                    | 50.57                     | 74.00           | -23.43       | Peak     |
| 10 * | 5080.0000    | 32.68                      | 6.58                    | 39.26                     | 54.00           | -14.74       | AVG      |
| 11   | 5412.5000    | 39.45                      | 7.71                    | 47.16                     | 74.00           | -26.84       | Peak     |
| 12   | 5412.5000    | 30.98                      | 7.71                    | 38.69                     | 54.00           | -15.31       | AVG      |

|               |                                                |                   |          |
|---------------|------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29  |
| Temperature   | 25°C                                           | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                   | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |          |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |          |
| Test Engineer | Kevin Li                                       |                   |          |

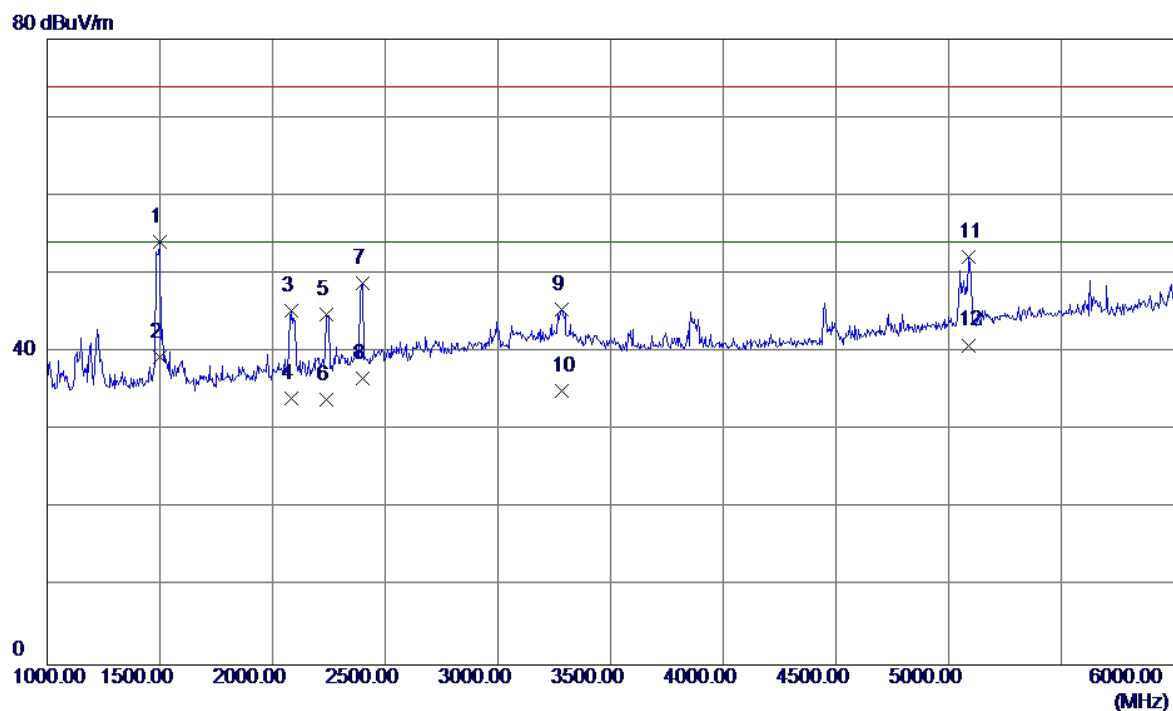


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1497.5000    | 59.02                      | -4.96                   | 54.06                     | 74.00           | -19.94       | Peak     |
| 2    | 1497.5000    | 44.27                      | -4.96                   | 39.31                     | 54.00           | -14.69       | AVG      |
| 3    | 2085.0000    | 47.38                      | -2.10                   | 45.28                     | 74.00           | -28.72       | Peak     |
| 4    | 2085.0000    | 36.24                      | -2.10                   | 34.14                     | 54.00           | -19.86       | AVG      |
| 5    | 2240.0000    | 46.06                      | -1.25                   | 44.81                     | 74.00           | -29.19       | Peak     |
| 6    | 2240.0000    | 35.11                      | -1.25                   | 33.86                     | 54.00           | -20.14       | AVG      |
| 7    | 2400.0000    | 49.18                      | -0.38                   | 48.80                     | 74.00           | -25.20       | Peak     |
| 8    | 2400.0000    | 36.98                      | -0.38                   | 36.60                     | 54.00           | -17.40       | AVG      |
| 9    | 3282.5000    | 43.17                      | 2.32                    | 45.49                     | 74.00           | -28.51       | Peak     |
| 10   | 3282.5000    | 32.78                      | 2.32                    | 35.10                     | 54.00           | -18.90       | AVG      |
| 11   | 5090.0000    | 45.51                      | 6.62                    | 52.13                     | 74.00           | -21.87       | Peak     |
| 12 * | 5090.0000    | 34.26                      | 6.62                    | 40.88                     | 54.00           | -13.12       | AVG      |

|               |                                                |                   |            |
|---------------|------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                    | Model Name        | VTR-L29    |
| Temperature   | 25°C                                           | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                   | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone           |                   |            |
| Note          | USB Cable:Luxshare+Battery:SCUD+Earphone:MERRY |                   |            |
| Test Engineer | Kevin Li                                       |                   |            |

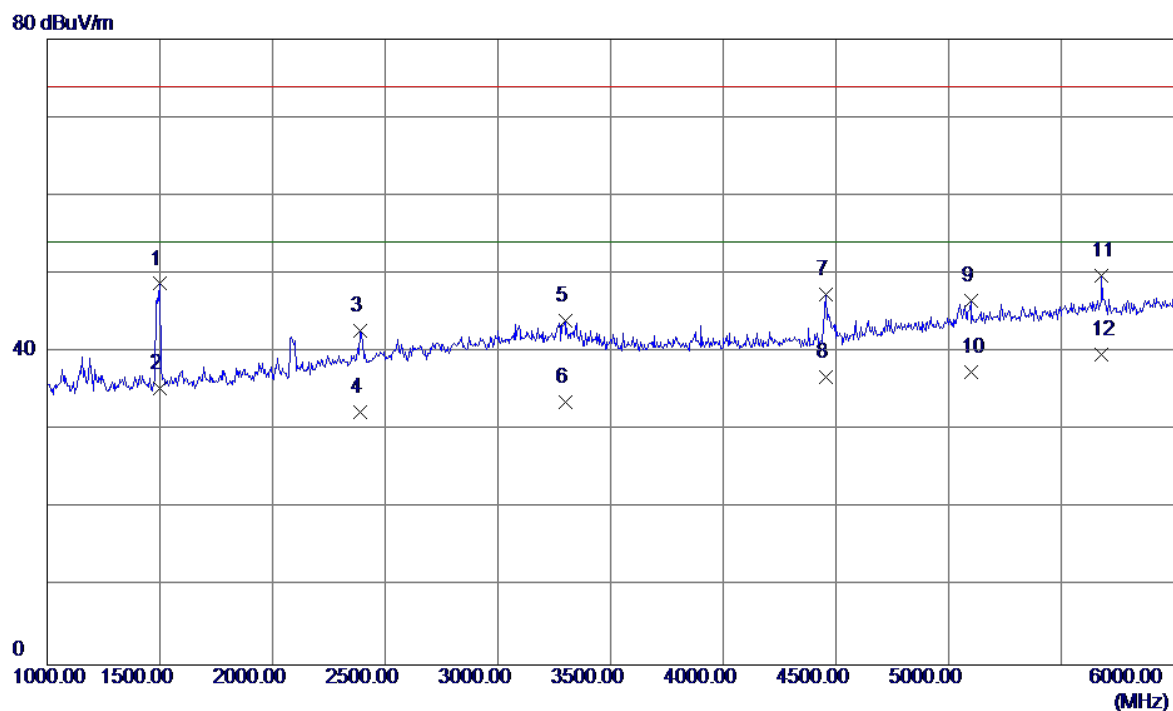


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1500.0000    | 53.67                      | -4.95                   | 48.72                     | 74.00           | -25.28       | Peak     |
| 2    | 1500.0000    | 40.26                      | -4.95                   | 35.31                     | 54.00           | -18.69       | AVG      |
| 3    | 2390.0000    | 43.17                      | -0.43                   | 42.74                     | 74.00           | -31.26       | Peak     |
| 4    | 2390.0000    | 32.77                      | -0.43                   | 32.34                     | 54.00           | -21.66       | AVG      |
| 5    | 3297.5000    | 41.68                      | 2.31                    | 43.99                     | 74.00           | -30.01       | Peak     |
| 6    | 3297.5000    | 31.24                      | 2.31                    | 33.55                     | 54.00           | -20.45       | AVG      |
| 7    | 4457.5000    | 43.65                      | 3.78                    | 47.43                     | 74.00           | -26.57       | Peak     |
| 8    | 4457.5000    | 32.98                      | 3.78                    | 36.76                     | 54.00           | -17.24       | AVG      |
| 9    | 5097.5000    | 39.98                      | 6.64                    | 46.62                     | 74.00           | -27.38       | Peak     |
| 10   | 5097.5000    | 30.81                      | 6.64                    | 37.45                     | 54.00           | -16.55       | AVG      |
| 11   | 5680.0000    | 41.62                      | 8.17                    | 49.79                     | 74.00           | -24.21       | Peak     |
| 12 * | 5680.0000    | 31.52                      | 8.17                    | 39.69                     | 54.00           | -14.31       | AVG      |

|               |                                                 |                   |          |
|---------------|-------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29  |
| Temperature   | 25°C                                            | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                    | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |          |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |          |
| Test Engineer | Kevin Li                                        |                   |          |

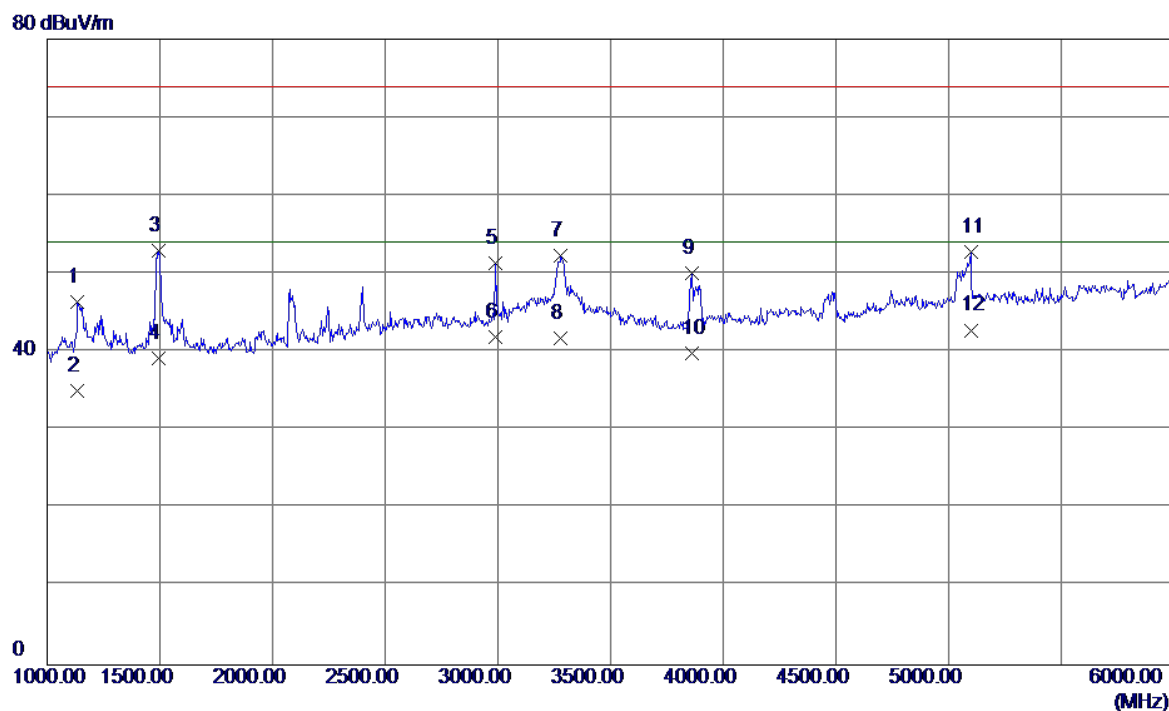


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1135.0000    | 52.59                      | -6.25                   | 46.34                     | 74.00           | -27.66       | Peak     |
| 2    | 1135.0000    | 41.26                      | -6.25                   | 35.01                     | 54.00           | -18.99       | AVG      |
| 3    | 1495.0000    | 57.88                      | -4.97                   | 52.91                     | 74.00           | -21.09       | Peak     |
| 4    | 1495.0000    | 44.20                      | -4.97                   | 39.23                     | 54.00           | -14.77       | AVG      |
| 5    | 2987.5000    | 49.07                      | 2.34                    | 51.41                     | 74.00           | -22.59       | Peak     |
| 6    | 2987.5000    | 39.60                      | 2.34                    | 41.94                     | 54.00           | -12.06       | AVG      |
| 7    | 3280.0000    | 49.94                      | 2.32                    | 52.26                     | 74.00           | -21.74       | Peak     |
| 8    | 3280.0000    | 39.46                      | 2.32                    | 41.78                     | 54.00           | -12.22       | AVG      |
| 9    | 3862.5000    | 47.54                      | 2.59                    | 50.13                     | 74.00           | -23.87       | Peak     |
| 10   | 3862.5000    | 37.18                      | 2.59                    | 39.77                     | 54.00           | -14.23       | AVG      |
| 11   | 5097.5000    | 46.16                      | 6.64                    | 52.80                     | 74.00           | -21.20       | Peak     |
| 12 * | 5097.5000    | 36.16                      | 6.64                    | 42.80                     | 54.00           | -11.20       | AVG      |

|               |                                                 |                   |            |
|---------------|-------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                     | Model Name        | VTR-L29    |
| Temperature   | 25°C                                            | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                    | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone            |                   |            |
| Note          | USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek |                   |            |
| Test Engineer | Kevin Li                                        |                   |            |

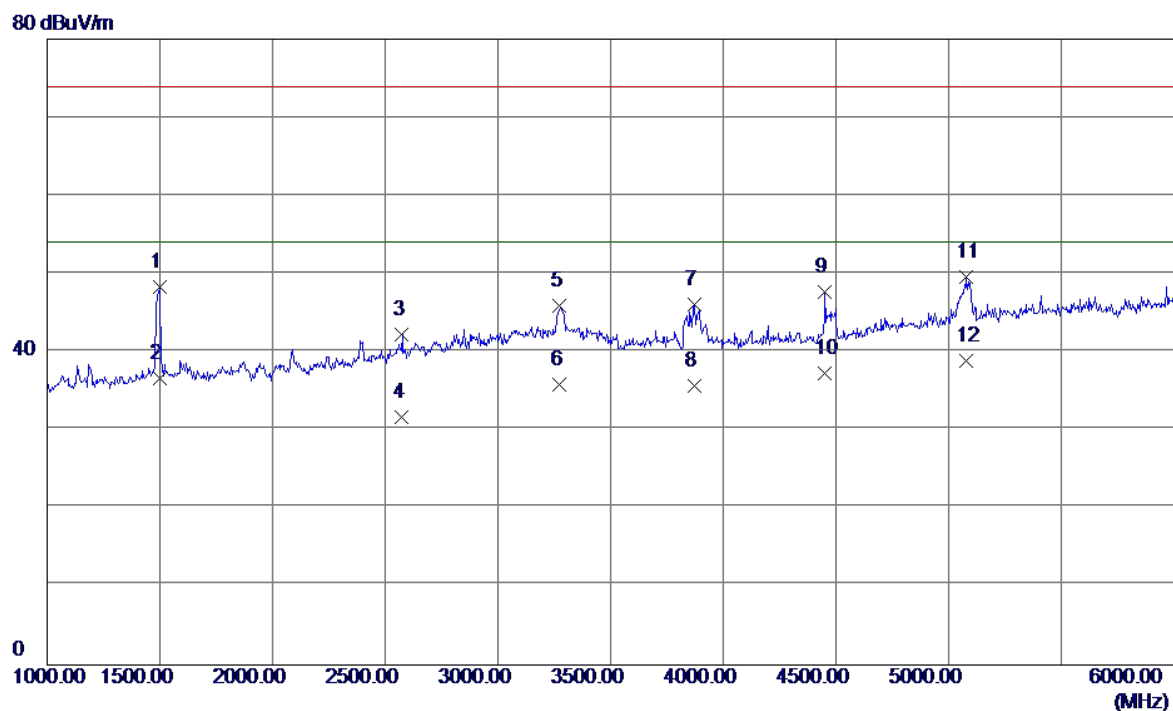


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1497.5000    | 53.24                      | -4.96                   | 48.28                     | 74.00           | -25.72       | Peak     |
| 2    | 1497.5000    | 41.54                      | -4.96                   | 36.58                     | 54.00           | -17.42       | AVG      |
| 3    | 2575.0000    | 41.72                      | 0.50                    | 42.22                     | 74.00           | -31.78       | Peak     |
| 4    | 2575.0000    | 31.19                      | 0.50                    | 31.69                     | 54.00           | -22.31       | AVG      |
| 5    | 3275.0000    | 43.52                      | 2.32                    | 45.84                     | 74.00           | -28.16       | Peak     |
| 6    | 3275.0000    | 33.47                      | 2.32                    | 35.79                     | 54.00           | -18.21       | AVG      |
| 7    | 3870.0000    | 43.55                      | 2.60                    | 46.15                     | 74.00           | -27.85       | Peak     |
| 8    | 3870.0000    | 33.15                      | 2.60                    | 35.75                     | 54.00           | -18.25       | AVG      |
| 9    | 4450.0000    | 43.97                      | 3.76                    | 47.73                     | 74.00           | -26.27       | Peak     |
| 10   | 4450.0000    | 33.46                      | 3.76                    | 37.22                     | 54.00           | -16.78       | AVG      |
| 11   | 5080.0000    | 42.99                      | 6.58                    | 49.57                     | 74.00           | -24.43       | Peak     |
| 12 * | 5080.0000    | 32.26                      | 6.58                    | 38.84                     | 54.00           | -15.16       | AVG      |

|               |                                                                        |                   |          |
|---------------|------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |          |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                               |                   |          |

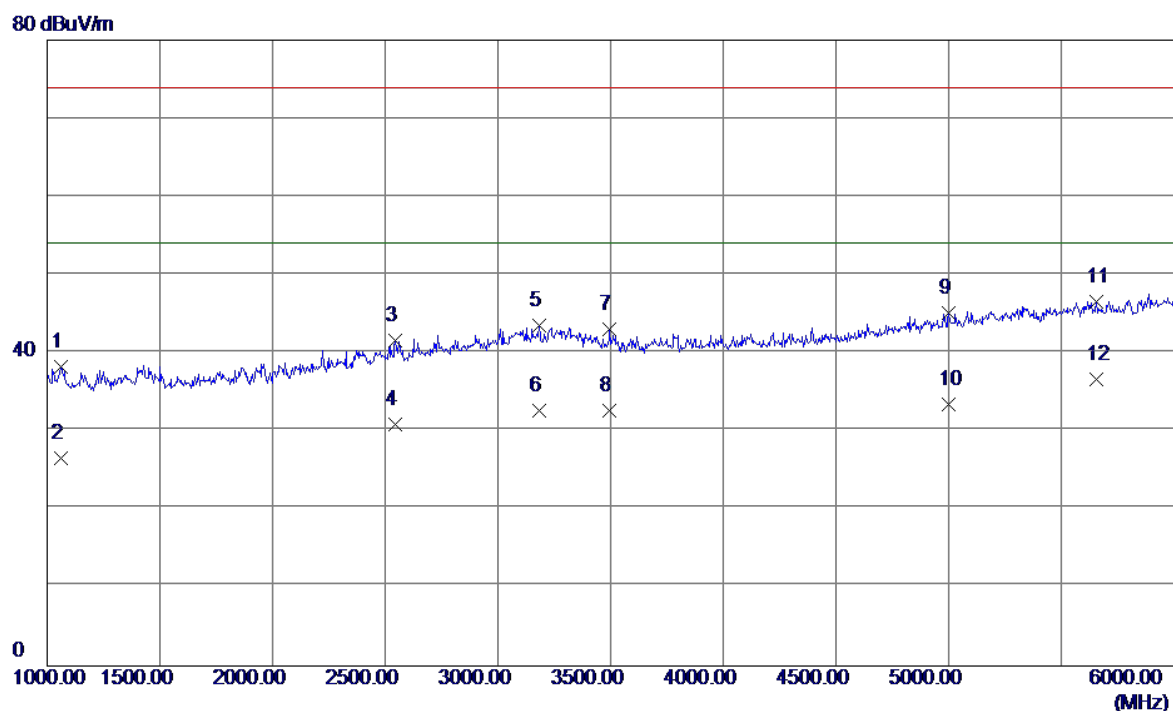

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1060.0000    | 44.77                      | -6.52                   | 38.25                     | 74.00           | -35.75       | Peak     |
| 2    | 1060.0000    | 33.15                      | -6.52                   | 26.63                     | 54.00           | -27.37       | AVG      |
| 3    | 2545.0000    | 41.19                      | 0.37                    | 41.56                     | 74.00           | -32.44       | Peak     |
| 4    | 2545.0000    | 30.57                      | 0.37                    | 30.94                     | 54.00           | -23.06       | AVG      |
| 5    | 3182.5000    | 41.10                      | 2.35                    | 43.45                     | 74.00           | -30.55       | Peak     |
| 6    | 3182.5000    | 30.22                      | 2.35                    | 32.57                     | 54.00           | -21.43       | AVG      |
| 7    | 3495.0000    | 40.76                      | 2.26                    | 43.02                     | 74.00           | -30.98       | Peak     |
| 8    | 3495.0000    | 30.43                      | 2.26                    | 32.69                     | 54.00           | -21.31       | AVG      |
| 9    | 5000.0000    | 38.86                      | 6.31                    | 45.17                     | 74.00           | -28.83       | Peak     |
| 10   | 5000.0000    | 27.18                      | 6.31                    | 33.49                     | 54.00           | -20.51       | AVG      |
| 11   | 5655.0000    | 38.46                      | 8.15                    | 46.61                     | 74.00           | -27.39       | Peak     |
| 12 * | 5655.0000    | 28.43                      | 8.15                    | 36.58                     | 54.00           | -17.42       | AVG      |


|               |                                                                        |                   |            |
|---------------|------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |            |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                               |                   |            |

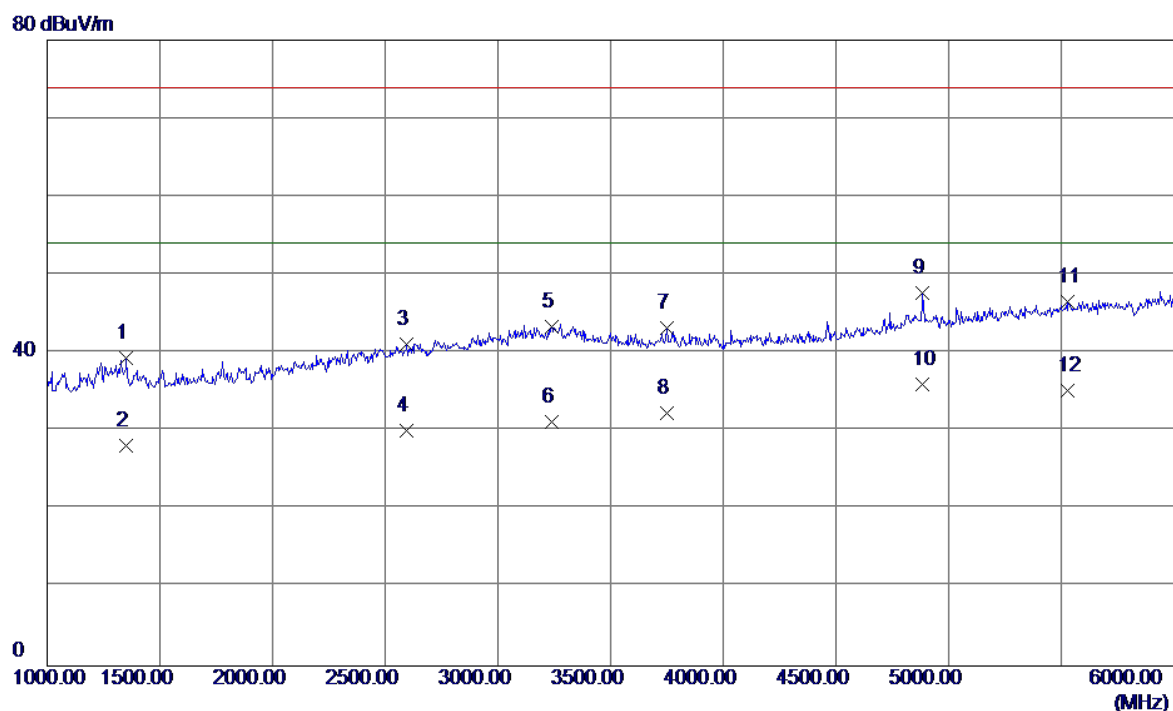

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1350.0000    | 44.77                      | -5.48                   | 39.29                     | 74.00           | -34.71       | Peak     |
| 2    | 1350.0000    | 33.70                      | -5.48                   | 28.22                     | 54.00           | -25.78       | AVG      |
| 3    | 2595.0000    | 40.56                      | 0.59                    | 41.15                     | 74.00           | -32.85       | Peak     |
| 4    | 2595.0000    | 29.49                      | 0.59                    | 30.08                     | 54.00           | -23.92       | AVG      |
| 5    | 3237.5000    | 40.97                      | 2.33                    | 43.30                     | 74.00           | -30.70       | Peak     |
| 6    | 3237.5000    | 28.94                      | 2.33                    | 31.27                     | 54.00           | -22.73       | AVG      |
| 7    | 3752.5000    | 40.64                      | 2.49                    | 43.13                     | 74.00           | -30.87       | Peak     |
| 8    | 3752.5000    | 29.87                      | 2.49                    | 32.36                     | 54.00           | -21.64       | AVG      |
| 9    | 4885.0000    | 41.90                      | 5.75                    | 47.65                     | 74.00           | -26.35       | Peak     |
| 10 * | 4885.0000    | 30.28                      | 5.75                    | 36.03                     | 54.00           | -17.97       | AVG      |
| 11   | 5530.0000    | 38.52                      | 8.04                    | 46.56                     | 74.00           | -27.44       | Peak     |
| 12   | 5530.0000    | 27.16                      | 8.04                    | 35.20                     | 54.00           | -18.80       | AVG      |

|               |                                                                        |                   |          |
|---------------|------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |          |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                               |                   |          |


100 dBuV/m

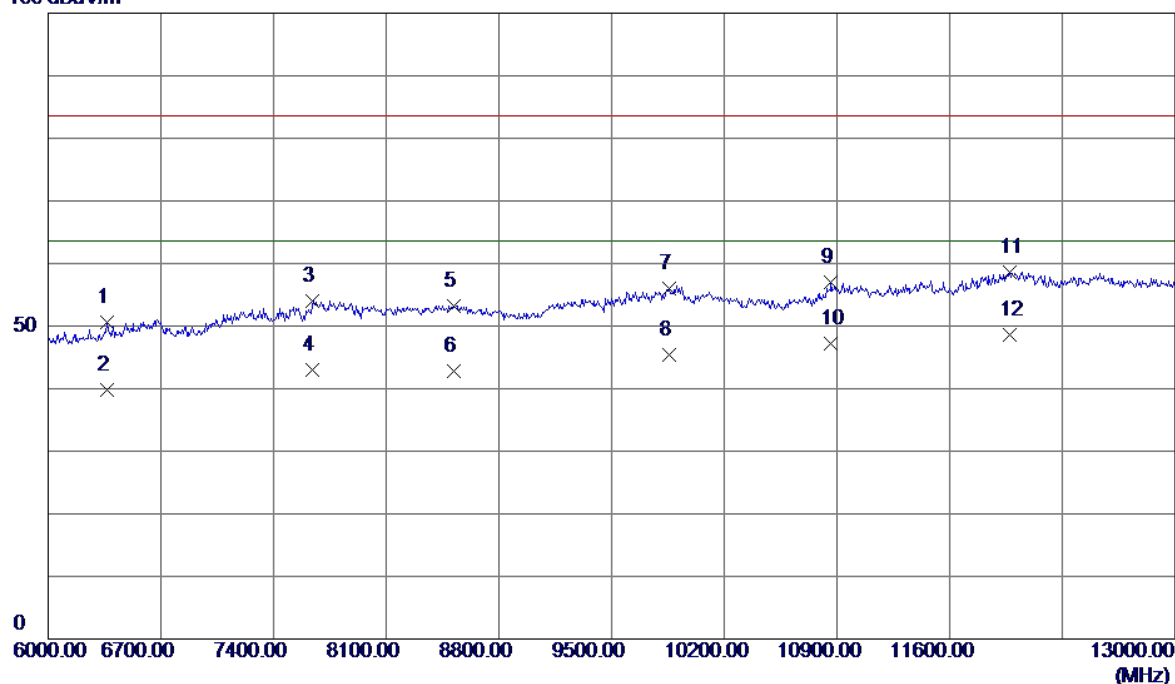

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 6364.0000    | 40.68                      | 9.92                    | 50.60                     | 83.50           | -32.90       | Peak     |
| 2    | 6364.0000    | 29.84                      | 9.92                    | 39.76                     | 63.50           | -23.74       | AVG      |
| 3    | 7645.0000    | 42.93                      | 11.04                   | 53.97                     | 83.50           | -29.53       | Peak     |
| 4    | 7645.0000    | 32.00                      | 11.04                   | 43.04                     | 63.50           | -20.46       | AVG      |
| 5    | 8520.0000    | 41.27                      | 11.98                   | 53.25                     | 83.50           | -30.25       | Peak     |
| 6    | 8520.0000    | 30.81                      | 11.98                   | 42.79                     | 63.50           | -20.71       | AVG      |
| 7    | 9857.0000    | 42.66                      | 13.27                   | 55.93                     | 83.50           | -27.57       | Peak     |
| 8    | 9857.0000    | 32.05                      | 13.27                   | 45.32                     | 63.50           | -18.18       | AVG      |
| 9    | 10865.0000   | 42.28                      | 14.68                   | 56.96                     | 83.50           | -26.54       | Peak     |
| 10   | 10865.0000   | 32.47                      | 14.68                   | 47.15                     | 63.50           | -16.35       | AVG      |
| 11   | 11971.0000   | 44.22                      | 14.42                   | 58.64                     | 83.50           | -24.86       | Peak     |
| 12 * | 11971.0000   | 34.27                      | 14.42                   | 48.69                     | 63.50           | -14.81       | AVG      |


|               |                                                                        |                   |            |
|---------------|------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                       |                   |            |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                               |                   |            |

100 dBuV/m

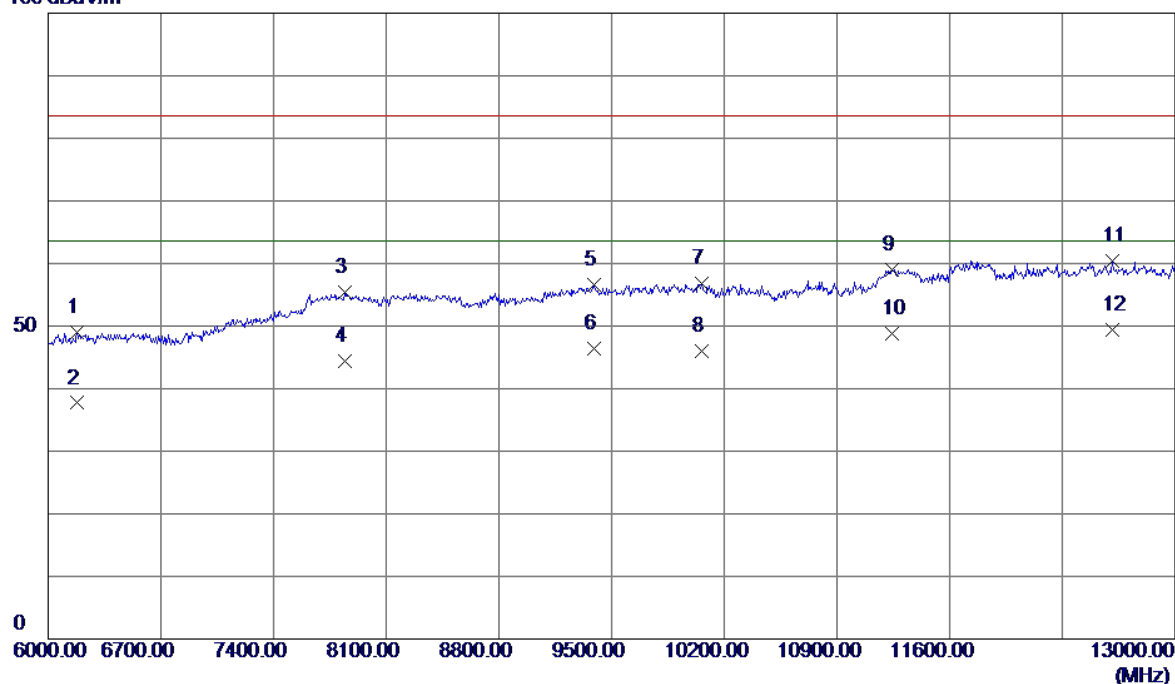


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 6182.0000    | 39.87                      | 9.21                    | 49.08                     | 83.50           | -34.42       | Peak     |
| 2    | 6182.0000    | 28.49                      | 9.21                    | 37.70                     | 63.50           | -25.80       | AVG      |
| 3    | 7841.0000    | 44.32                      | 10.99                   | 55.31                     | 83.50           | -28.19       | Peak     |
| 4    | 7841.0000    | 33.45                      | 10.99                   | 44.44                     | 63.50           | -19.06       | AVG      |
| 5    | 9388.0000    | 44.01                      | 12.55                   | 56.56                     | 83.50           | -26.94       | Peak     |
| 6    | 9388.0000    | 33.91                      | 12.55                   | 46.46                     | 63.50           | -17.04       | AVG      |
| 7    | 10060.0000   | 43.12                      | 13.59                   | 56.71                     | 83.50           | -26.79       | Peak     |
| 8    | 10060.0000   | 32.47                      | 13.59                   | 46.06                     | 63.50           | -17.44       | AVG      |
| 9    | 11243.0000   | 44.38                      | 14.67                   | 59.05                     | 83.50           | -24.45       | Peak     |
| 10   | 11243.0000   | 34.16                      | 14.67                   | 48.83                     | 63.50           | -14.67       | AVG      |
| 11   | 12608.0000   | 44.99                      | 15.43                   | 60.42                     | 83.50           | -23.08       | Peak     |
| 12 * | 12608.0000   | 34.05                      | 15.43                   | 49.48                     | 63.50           | -14.02       | AVG      |

|               |                                                                        |                   |          |
|---------------|------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |          |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                               |                   |          |

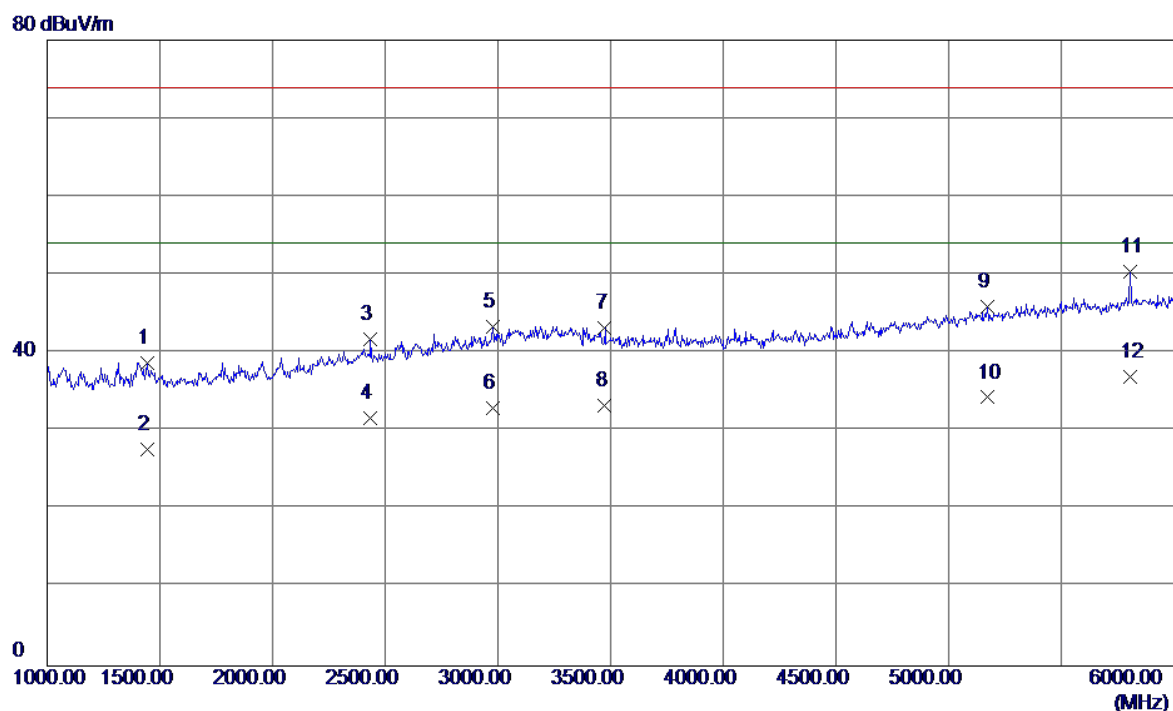


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1442.5000    | 43.90                      | -5.15                   | 38.75                     | 74.00           | -35.25       | Peak     |
| 2    | 1442.5000    | 32.88                      | -5.15                   | 27.73                     | 54.00           | -26.27       | AVG      |
| 3    | 2435.0000    | 41.97                      | -0.19                   | 41.78                     | 74.00           | -32.22       | Peak     |
| 4    | 2435.0000    | 31.82                      | -0.19                   | 31.63                     | 54.00           | -22.37       | AVG      |
| 5    | 2977.5000    | 41.09                      | 2.30                    | 43.39                     | 74.00           | -30.61       | Peak     |
| 6    | 2977.5000    | 30.59                      | 2.30                    | 32.89                     | 54.00           | -21.11       | AVG      |
| 7    | 3475.0000    | 41.00                      | 2.26                    | 43.26                     | 74.00           | -30.74       | Peak     |
| 8    | 3475.0000    | 31.06                      | 2.26                    | 33.32                     | 54.00           | -20.68       | AVG      |
| 9    | 5170.0000    | 38.97                      | 6.89                    | 45.86                     | 74.00           | -28.14       | Peak     |
| 10   | 5170.0000    | 27.43                      | 6.89                    | 34.32                     | 54.00           | -19.68       | AVG      |
| 11   | 5807.5000    | 42.07                      | 8.29                    | 50.36                     | 74.00           | -23.64       | Peak     |
| 12 * | 5807.5000    | 28.74                      | 8.29                    | 37.03                     | 54.00           | -16.97       | AVG      |

|               |                                                                        |                   |            |
|---------------|------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                            | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                         |                   |            |
| Note          | Adapter:Phitek(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                               |                   |            |

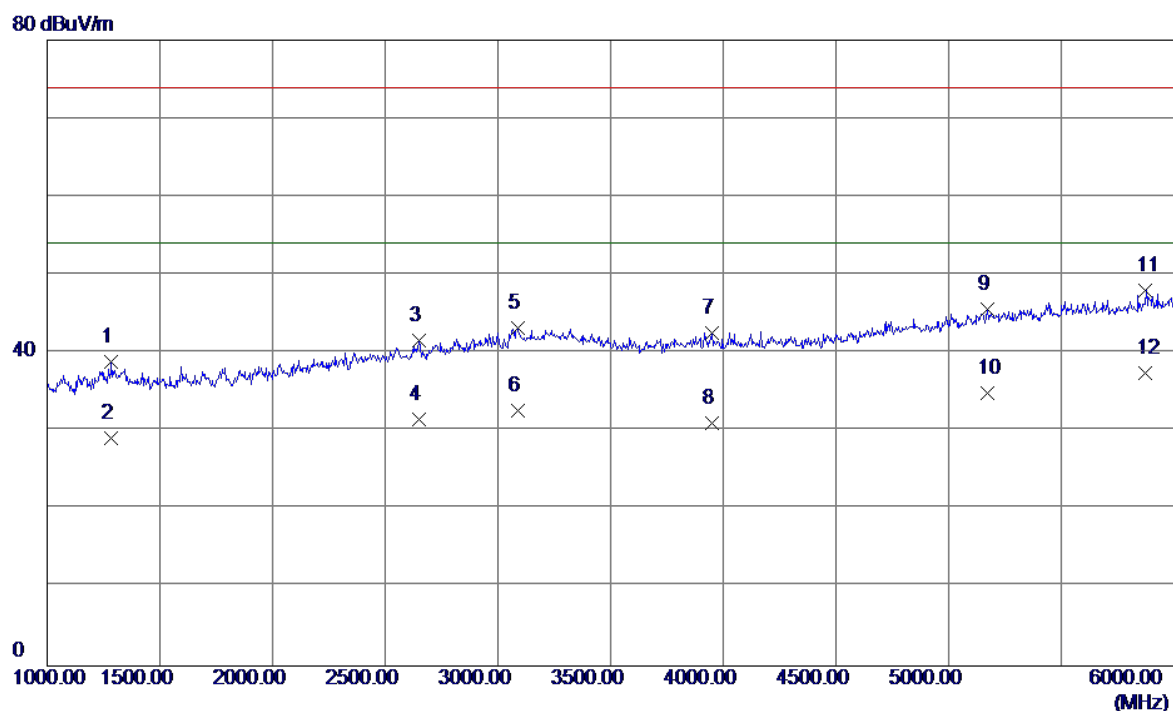

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1285.0000    | 44.67                      | -5.72                   | 38.95                     | 74.00           | -35.05       | Peak     |
| 2    | 1285.0000    | 34.83                      | -5.72                   | 29.11                     | 54.00           | -24.89       | AVG      |
| 3    | 2652.5000    | 40.68                      | 0.85                    | 41.53                     | 74.00           | -32.47       | Peak     |
| 4    | 2652.5000    | 30.66                      | 0.85                    | 31.51                     | 54.00           | -22.49       | AVG      |
| 5    | 3087.5000    | 40.87                      | 2.37                    | 43.24                     | 74.00           | -30.76       | Peak     |
| 6    | 3087.5000    | 30.29                      | 2.37                    | 32.66                     | 54.00           | -21.34       | AVG      |
| 7    | 3950.0000    | 39.92                      | 2.67                    | 42.59                     | 74.00           | -31.41       | Peak     |
| 8    | 3950.0000    | 28.38                      | 2.67                    | 31.05                     | 54.00           | -22.95       | AVG      |
| 9    | 5170.0000    | 38.63                      | 6.89                    | 45.52                     | 74.00           | -28.48       | Peak     |
| 10   | 5170.0000    | 27.94                      | 6.89                    | 34.83                     | 54.00           | -19.17       | AVG      |
| 11   | 5875.0000    | 39.63                      | 8.35                    | 47.98                     | 74.00           | -26.02       | Peak     |
| 12 * | 5875.0000    | 29.14                      | 8.35                    | 37.49                     | 54.00           | -16.51       | AVG      |


|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |

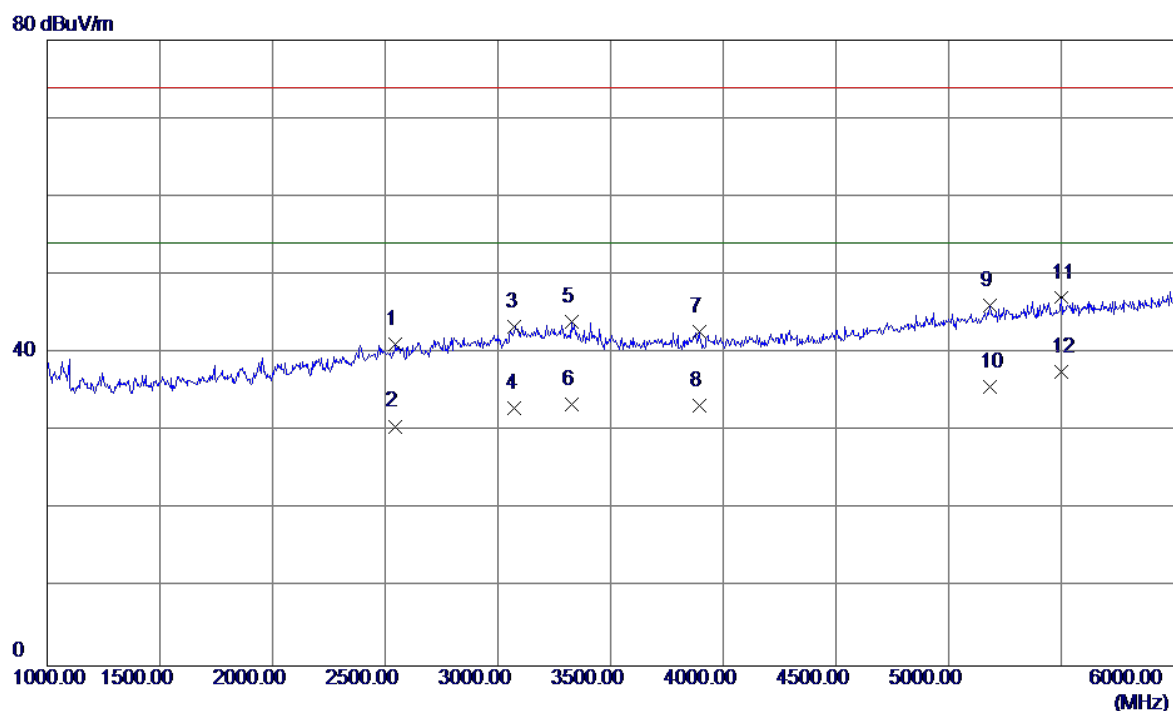

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 2545.0000    | 40.80                      | 0.37                    | 41.17                     | 74.00           | -32.83       | Peak     |
| 2    | 2545.0000    | 30.27                      | 0.37                    | 30.64                     | 54.00           | -23.36       | AVG      |
| 3    | 3075.0000    | 41.05                      | 2.38                    | 43.43                     | 74.00           | -30.57       | Peak     |
| 4    | 3075.0000    | 30.65                      | 2.38                    | 33.03                     | 54.00           | -20.97       | AVG      |
| 5    | 3327.5000    | 41.72                      | 2.30                    | 44.02                     | 74.00           | -29.98       | Peak     |
| 6    | 3327.5000    | 31.08                      | 2.30                    | 33.38                     | 54.00           | -20.62       | AVG      |
| 7    | 3892.5000    | 40.04                      | 2.62                    | 42.66                     | 74.00           | -31.34       | Peak     |
| 8    | 3892.5000    | 30.68                      | 2.62                    | 33.30                     | 54.00           | -20.70       | AVG      |
| 9    | 5182.5000    | 39.12                      | 6.93                    | 46.05                     | 74.00           | -27.95       | Peak     |
| 10   | 5182.5000    | 28.71                      | 6.93                    | 35.64                     | 54.00           | -18.36       | AVG      |
| 11   | 5502.5000    | 39.11                      | 8.01                    | 47.12                     | 74.00           | -26.88       | Peak     |
| 12 * | 5502.5000    | 29.63                      | 8.01                    | 37.64                     | 54.00           | -16.36       | AVG      |


|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |

80 dBuV/m

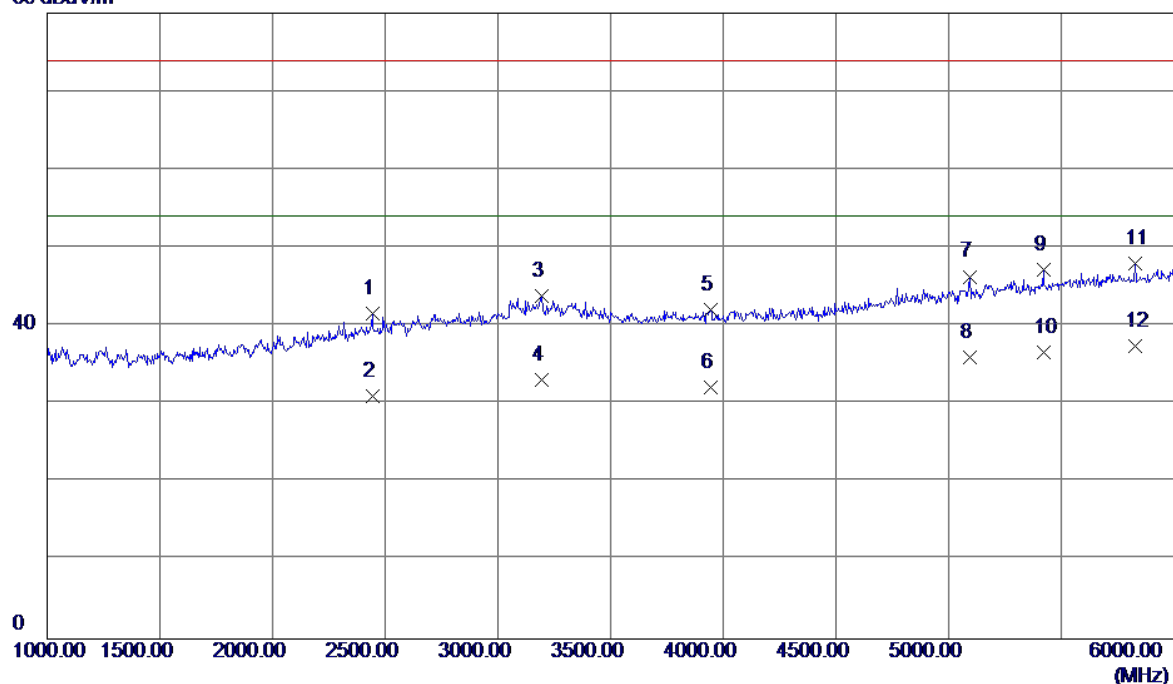


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 2442.5000    | 41.69                      | -0.15                   | 41.54                     | 74.00           | -32.46       | Peak     |
| 2    | 2442.5000    | 31.23                      | -0.15                   | 31.08                     | 54.00           | -22.92       | AVG      |
| 3    | 3192.5000    | 41.47                      | 2.34                    | 43.81                     | 74.00           | -30.19       | Peak     |
| 4    | 3192.5000    | 30.83                      | 2.34                    | 33.17                     | 54.00           | -20.83       | AVG      |
| 5    | 3942.5000    | 39.42                      | 2.67                    | 42.09                     | 74.00           | -31.91       | Peak     |
| 6    | 3942.5000    | 29.54                      | 2.67                    | 32.21                     | 54.00           | -21.79       | AVG      |
| 7    | 5092.5000    | 39.70                      | 6.62                    | 46.32                     | 74.00           | -27.68       | Peak     |
| 8    | 5092.5000    | 29.37                      | 6.62                    | 35.99                     | 54.00           | -18.01       | AVG      |
| 9    | 5422.5000    | 39.42                      | 7.75                    | 47.17                     | 74.00           | -26.83       | Peak     |
| 10   | 5422.5000    | 28.93                      | 7.75                    | 36.68                     | 54.00           | -17.32       | AVG      |
| 11   | 5830.0000    | 39.74                      | 8.31                    | 48.05                     | 74.00           | -25.95       | Peak     |
| 12 * | 5830.0000    | 29.06                      | 8.31                    | 37.37                     | 54.00           | -16.63       | AVG      |

|               |                                                                             |                   |          |
|---------------|-----------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                                 | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                                | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                              |                   |          |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:<br>Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                    |                   |          |

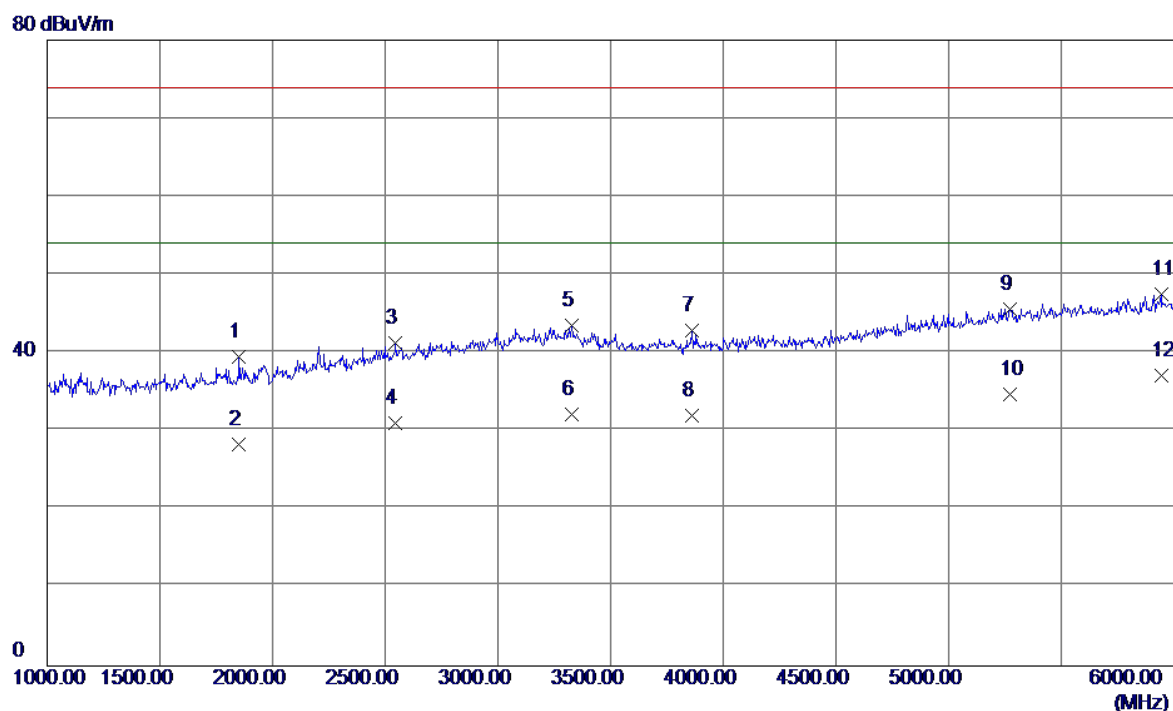

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1852.5000    | 42.79                      | -3.27                   | 39.52                     | 74.00           | -34.48       | Peak     |
| 2    | 1852.5000    | 31.55                      | -3.27                   | 28.28                     | 54.00           | -25.72       | AVG      |
| 3    | 2545.0000    | 40.89                      | 0.37                    | 41.26                     | 74.00           | -32.74       | Peak     |
| 4    | 2545.0000    | 30.67                      | 0.37                    | 31.04                     | 54.00           | -22.96       | AVG      |
| 5    | 3327.5000    | 41.15                      | 2.30                    | 43.45                     | 74.00           | -30.55       | Peak     |
| 6    | 3327.5000    | 29.87                      | 2.30                    | 32.17                     | 54.00           | -21.83       | AVG      |
| 7    | 3862.5000    | 40.31                      | 2.59                    | 42.90                     | 74.00           | -31.10       | Peak     |
| 8    | 3862.5000    | 29.34                      | 2.59                    | 31.93                     | 54.00           | -22.07       | AVG      |
| 9    | 5270.0000    | 38.37                      | 7.23                    | 45.60                     | 74.00           | -28.40       | Peak     |
| 10   | 5270.0000    | 27.54                      | 7.23                    | 34.77                     | 54.00           | -19.23       | AVG      |
| 11   | 5942.5000    | 39.07                      | 8.41                    | 47.48                     | 74.00           | -26.52       | Peak     |
| 12 * | 5942.5000    | 28.78                      | 8.41                    | 37.19                     | 54.00           | -16.81       | AVG      |


|               |                                                                             |                   |            |
|---------------|-----------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                                 | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                              |                   |            |
| Note          | Adapter:Huntkey(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:<br>Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                    |                   |            |

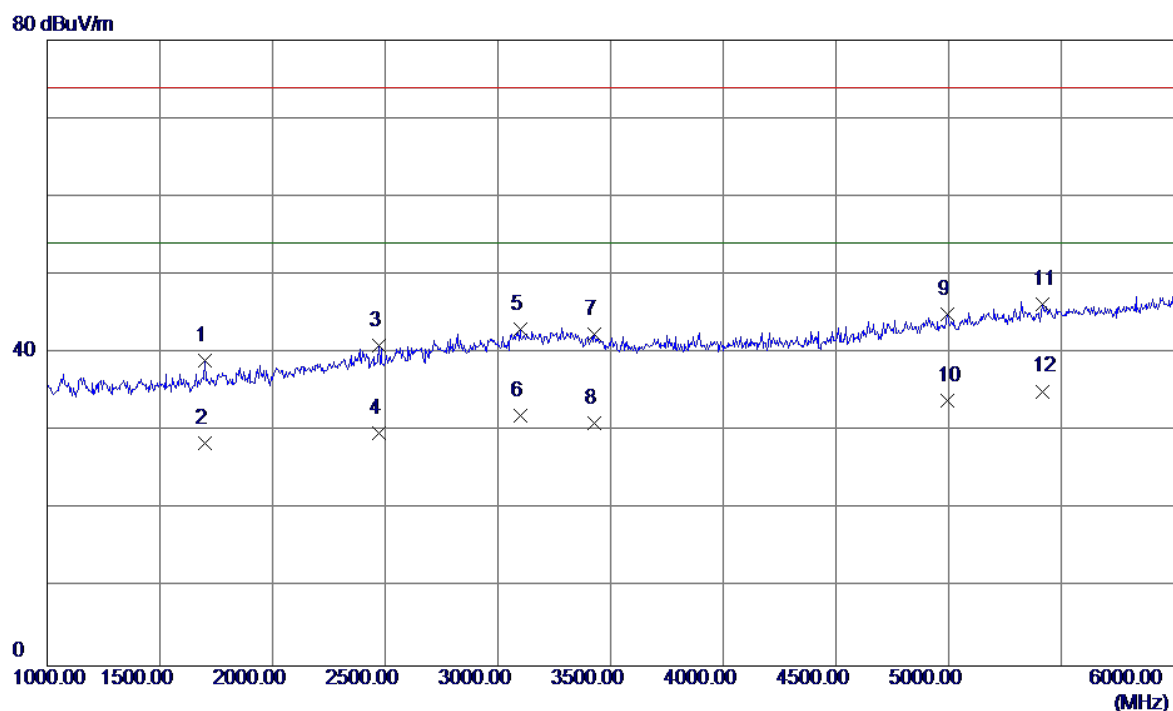

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1702.5000    | 43.08                      | -3.99                   | 39.09                     | 74.00           | -34.91       | Peak     |
| 2    | 1702.5000    | 32.52                      | -3.99                   | 28.53                     | 54.00           | -25.47       | AVG      |
| 3    | 2472.5000    | 40.94                      | 0.02                    | 40.96                     | 74.00           | -33.04       | Peak     |
| 4    | 2472.5000    | 29.77                      | 0.02                    | 29.79                     | 54.00           | -24.21       | AVG      |
| 5    | 3097.5000    | 40.72                      | 2.37                    | 43.09                     | 74.00           | -30.91       | Peak     |
| 6    | 3097.5000    | 29.69                      | 2.37                    | 32.06                     | 54.00           | -21.94       | AVG      |
| 7    | 3430.0000    | 40.18                      | 2.28                    | 42.46                     | 74.00           | -31.54       | Peak     |
| 8    | 3430.0000    | 28.77                      | 2.28                    | 31.05                     | 54.00           | -22.95       | AVG      |
| 9    | 4992.5000    | 38.66                      | 6.27                    | 44.93                     | 74.00           | -29.07       | Peak     |
| 10   | 4992.5000    | 27.65                      | 6.27                    | 33.92                     | 54.00           | -20.08       | AVG      |
| 11   | 5417.5000    | 38.54                      | 7.73                    | 46.27                     | 74.00           | -27.73       | Peak     |
| 12 * | 5417.5000    | 27.39                      | 7.73                    | 35.12                     | 54.00           | -18.88       | AVG      |

|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |


90 dBuV/m

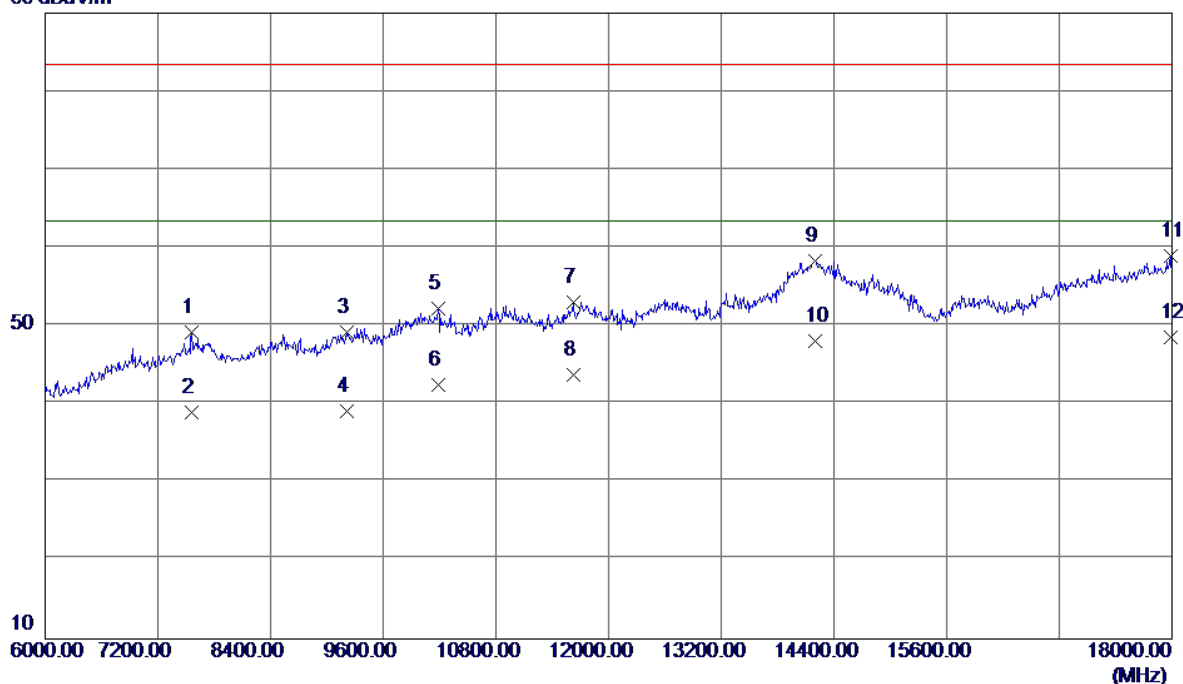

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7560.0000    | 36.60                      | 12.63                   | 49.23                     | 83.50           | -34.27       | Peak     |
| 2    | 7560.0000    | 26.35                      | 12.63                   | 38.98                     | 63.50           | -24.52       | AVG      |
| 3    | 9216.0000    | 34.64                      | 14.53                   | 49.17                     | 83.50           | -34.33       | Peak     |
| 4    | 9216.0000    | 24.59                      | 14.53                   | 39.12                     | 63.50           | -24.38       | AVG      |
| 5    | 10182.0000   | 36.35                      | 15.96                   | 52.31                     | 83.50           | -31.19       | Peak     |
| 6    | 10182.0000   | 26.47                      | 15.96                   | 42.43                     | 63.50           | -21.07       | AVG      |
| 7    | 11622.0000   | 35.23                      | 17.81                   | 53.04                     | 83.50           | -30.46       | Peak     |
| 8    | 11622.0000   | 25.93                      | 17.81                   | 43.74                     | 63.50           | -19.76       | AVG      |
| 9    | 14202.0000   | 35.60                      | 22.65                   | 58.25                     | 83.50           | -25.25       | Peak     |
| 10   | 14202.0000   | 25.48                      | 22.65                   | 48.13                     | 63.50           | -15.37       | AVG      |
| 11   | 17982.0000   | 33.88                      | 25.07                   | 58.95                     | 83.50           | -24.55       | Peak     |
| 12 * | 17982.0000   | 23.47                      | 25.07                   | 48.54                     | 63.50           | -14.96       | AVG      |

|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |


90 dBuV/m

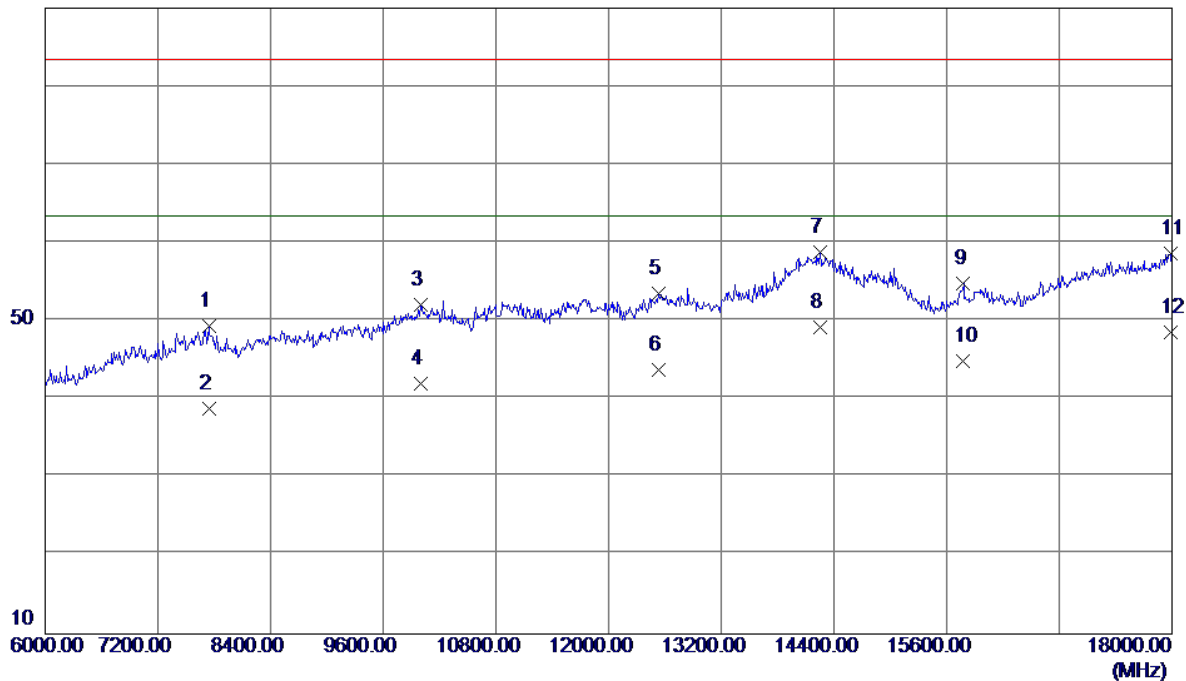

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 7746.0000    | 36.73                      | 12.58                   | 49.31                     | 83.50           | -34.19       | Peak     |
| 2   | 7746.0000    | 26.23                      | 12.58                   | 38.81                     | 63.50           | -24.69       | AVG      |
| 3   | 9996.0000    | 36.47                      | 15.55                   | 52.02                     | 83.50           | -31.48       | Peak     |
| 4   | 9996.0000    | 26.52                      | 15.55                   | 42.07                     | 63.50           | -21.43       | AVG      |
| 5   | 12534.0000   | 35.45                      | 18.14                   | 53.59                     | 83.50           | -29.91       | Peak     |
| 6   | 12534.0000   | 25.65                      | 18.14                   | 43.79                     | 63.50           | -19.71       | AVG      |
| 7   | 14256.0000   | 36.11                      | 22.69                   | 58.80                     | 83.50           | -24.70       | Peak     |
| 8 * | 14256.0000   | 26.55                      | 22.69                   | 49.24                     | 63.50           | -14.26       | AVG      |
| 9   | 15780.0000   | 36.44                      | 18.29                   | 54.73                     | 83.50           | -28.77       | Peak     |
| 10  | 15780.0000   | 26.54                      | 18.29                   | 44.83                     | 63.50           | -18.67       | AVG      |
| 11  | 17982.0000   | 33.62                      | 25.07                   | 58.69                     | 83.50           | -24.81       | Peak     |
| 12  | 17982.0000   | 23.45                      | 25.07                   | 48.52                     | 63.50           | -14.98       | AVG      |

|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |


100 dBuV/m

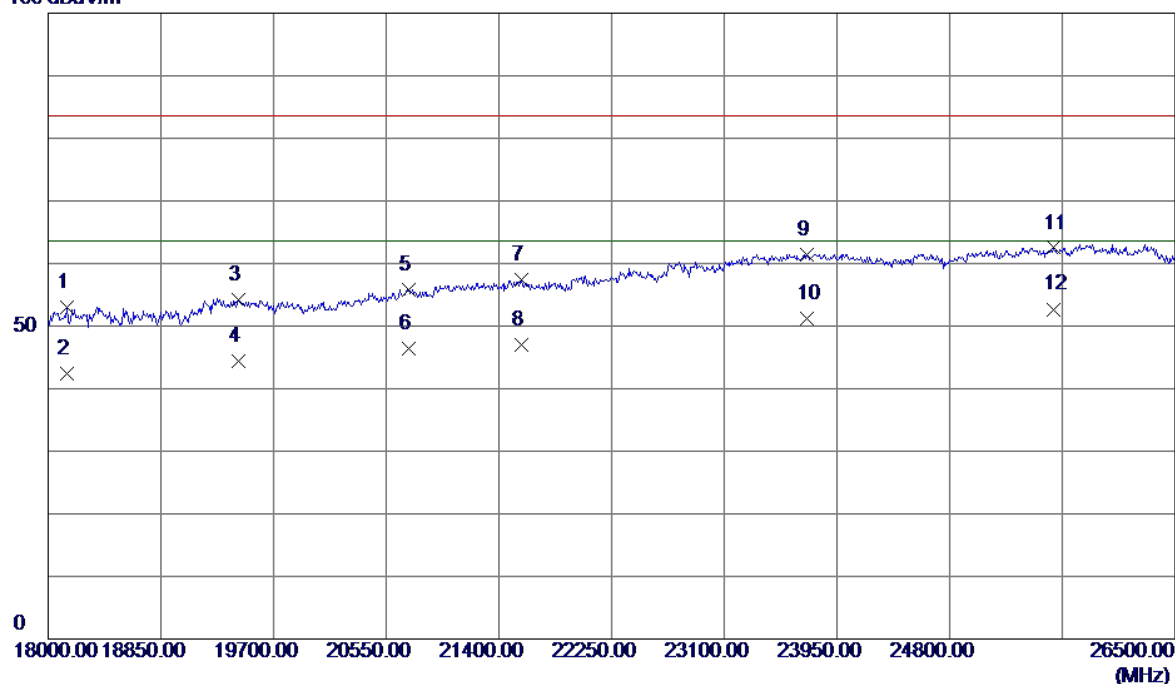

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 18144.5000   | 35.98                      | 17.03                   | 53.01                     | 83.50           | -30.49       | Peak     |
| 2    | 18144.5000   | 25.46                      | 17.03                   | 42.49                     | 63.50           | -21.01       | AVG      |
| 3    | 19436.5000   | 37.16                      | 16.95                   | 54.11                     | 83.50           | -29.39       | Peak     |
| 4    | 19436.5000   | 27.44                      | 16.95                   | 44.39                     | 63.50           | -19.11       | AVG      |
| 5    | 20720.0000   | 39.09                      | 16.69                   | 55.78                     | 83.50           | -27.72       | Peak     |
| 6    | 20720.0000   | 29.66                      | 16.69                   | 46.35                     | 63.50           | -17.15       | AVG      |
| 7    | 21570.0000   | 38.84                      | 18.61                   | 57.45                     | 83.50           | -26.05       | Peak     |
| 8    | 21570.0000   | 28.47                      | 18.61                   | 47.08                     | 63.50           | -16.42       | AVG      |
| 9    | 23720.5000   | 41.86                      | 19.60                   | 61.46                     | 83.50           | -22.04       | Peak     |
| 10   | 23720.5000   | 31.65                      | 19.60                   | 51.25                     | 63.50           | -12.25       | AVG      |
| 11   | 25582.0000   | 41.28                      | 21.22                   | 62.50                     | 83.50           | -21.00       | Peak     |
| 12 * | 25582.0000   | 31.48                      | 21.22                   | 52.70                     | 63.50           | -10.80       | AVG      |

|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |


100 dBuV/m

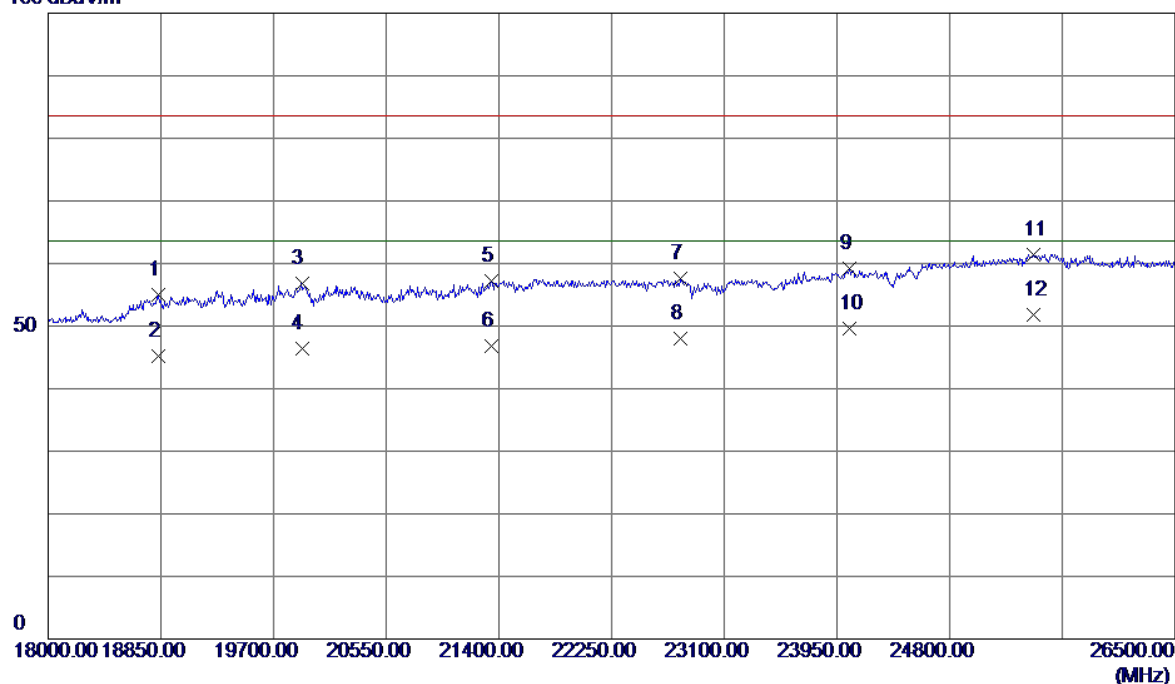

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 18833.0000   | 38.39                      | 16.64                   | 55.03                     | 83.50           | -28.47       | Peak     |
| 2    | 18833.0000   | 28.64                      | 16.64                   | 45.28                     | 63.50           | -18.22       | AVG      |
| 3    | 19912.5000   | 40.72                      | 16.01                   | 56.73                     | 83.50           | -26.77       | Peak     |
| 4    | 19912.5000   | 30.46                      | 16.01                   | 46.47                     | 63.50           | -17.03       | AVG      |
| 5    | 21340.5000   | 38.97                      | 18.21                   | 57.18                     | 83.50           | -26.32       | Peak     |
| 6    | 21340.5000   | 28.67                      | 18.21                   | 46.88                     | 63.50           | -16.62       | AVG      |
| 7    | 22768.5000   | 38.23                      | 19.33                   | 57.56                     | 83.50           | -25.94       | Peak     |
| 8    | 22768.5000   | 28.69                      | 19.33                   | 48.02                     | 63.50           | -15.48       | AVG      |
| 9    | 24043.5000   | 40.06                      | 19.08                   | 59.14                     | 83.50           | -24.36       | Peak     |
| 10   | 24043.5000   | 30.45                      | 19.08                   | 49.53                     | 63.50           | -13.97       | AVG      |
| 11   | 25429.0000   | 40.11                      | 21.38                   | 61.49                     | 83.50           | -22.01       | Peak     |
| 12 * | 25429.0000   | 30.51                      | 21.38                   | 51.89                     | 63.50           | -11.61       | AVG      |

|               |                                                                         |                   |          |
|---------------|-------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                |                   |          |


100 dBuV/m

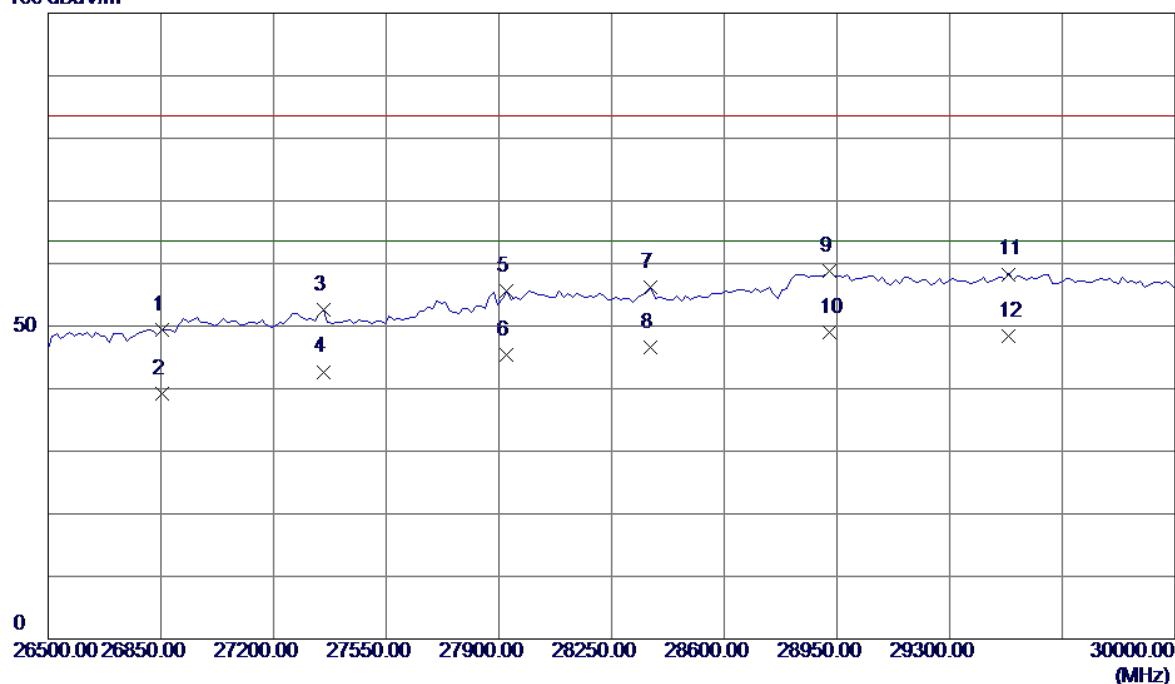

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 26852.7130   | 45.43                      | 4.02                    | 49.45                     | 83.50           | -34.05       | Peak     |
| 2    | 26852.7130   | 35.25                      | 4.02                    | 39.27                     | 63.50           | -24.23       | AVG      |
| 3    | 27354.6510   | 49.52                      | 3.06                    | 52.58                     | 83.50           | -30.92       | Peak     |
| 4    | 27354.6510   | 39.64                      | 3.06                    | 42.70                     | 63.50           | -20.80       | AVG      |
| 5    | 27924.4190   | 51.44                      | 4.14                    | 55.58                     | 83.50           | -27.92       | Peak     |
| 6    | 27924.4190   | 41.25                      | 4.14                    | 45.39                     | 63.50           | -18.11       | AVG      |
| 7    | 28372.0930   | 51.37                      | 4.80                    | 56.17                     | 83.50           | -27.33       | Peak     |
| 8    | 28372.0930   | 41.83                      | 4.80                    | 46.63                     | 63.50           | -16.87       | AVG      |
| 9    | 28928.2950   | 53.28                      | 5.46                    | 58.74                     | 83.50           | -24.76       | Peak     |
| 10 * | 28928.2950   | 43.56                      | 5.46                    | 49.02                     | 63.50           | -14.48       | AVG      |
| 11   | 29484.4960   | 52.35                      | 5.95                    | 58.30                     | 83.50           | -25.20       | Peak     |
| 12   | 29484.4960   | 42.47                      | 5.95                    | 48.42                     | 63.50           | -15.08       | AVG      |

|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                          |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |


100 dBuV/m

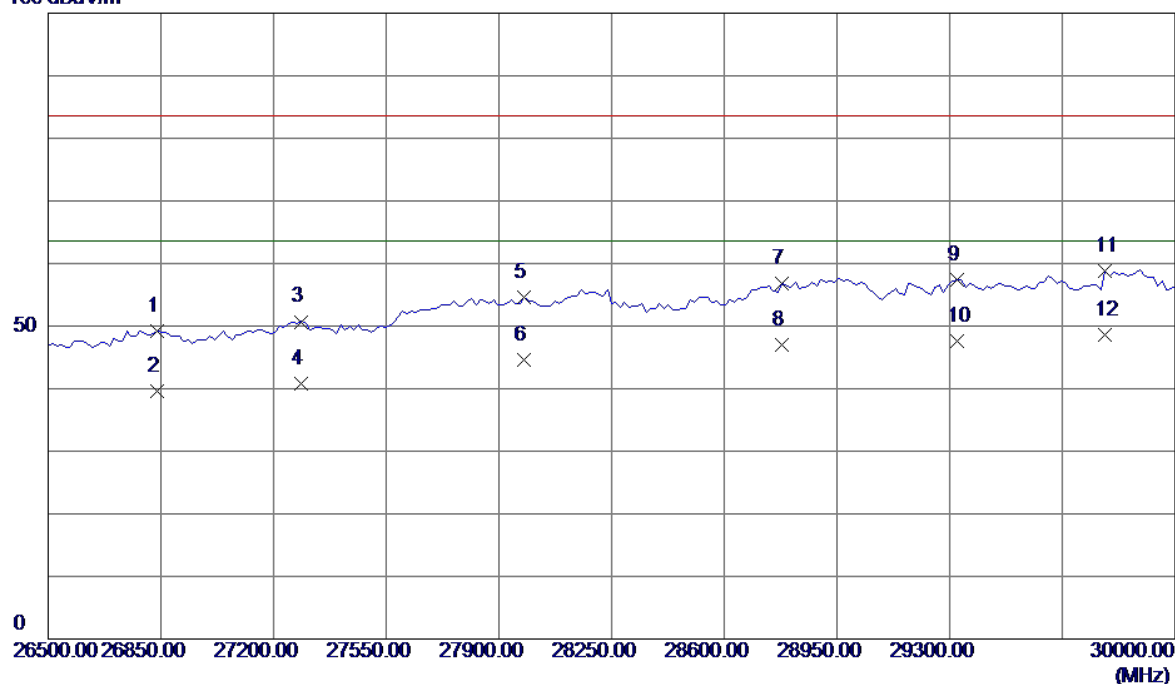

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 26839.1470   | 45.22                      | 4.00                    | 49.22                     | 83.50           | -34.28       | Peak     |
| 2    | 26839.1470   | 35.64                      | 4.00                    | 39.64                     | 63.50           | -23.86       | AVG      |
| 3    | 27286.8220   | 47.44                      | 3.26                    | 50.70                     | 83.50           | -32.80       | Peak     |
| 4    | 27286.8220   | 37.46                      | 3.26                    | 40.72                     | 63.50           | -22.78       | AVG      |
| 5    | 27978.6820   | 50.18                      | 4.33                    | 54.51                     | 83.50           | -28.99       | Peak     |
| 6    | 27978.6820   | 40.26                      | 4.33                    | 44.59                     | 63.50           | -18.91       | AVG      |
| 7    | 28779.0700   | 51.53                      | 5.27                    | 56.80                     | 83.50           | -26.70       | Peak     |
| 8    | 28779.0700   | 41.65                      | 5.27                    | 46.92                     | 63.50           | -16.58       | AVG      |
| 9    | 29321.7050   | 51.61                      | 5.81                    | 57.42                     | 83.50           | -26.08       | Peak     |
| 10   | 29321.7050   | 41.81                      | 5.81                    | 47.62                     | 63.50           | -15.88       | AVG      |
| 11   | 29782.9460   | 51.85                      | 6.88                    | 58.73                     | 83.50           | -24.77       | Peak     |
| 12 * | 29782.9460   | 41.77                      | 6.88                    | 48.65                     | 63.50           | -14.85       | AVG      |


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+Playing+Speaker                        |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

80 dBuV/m

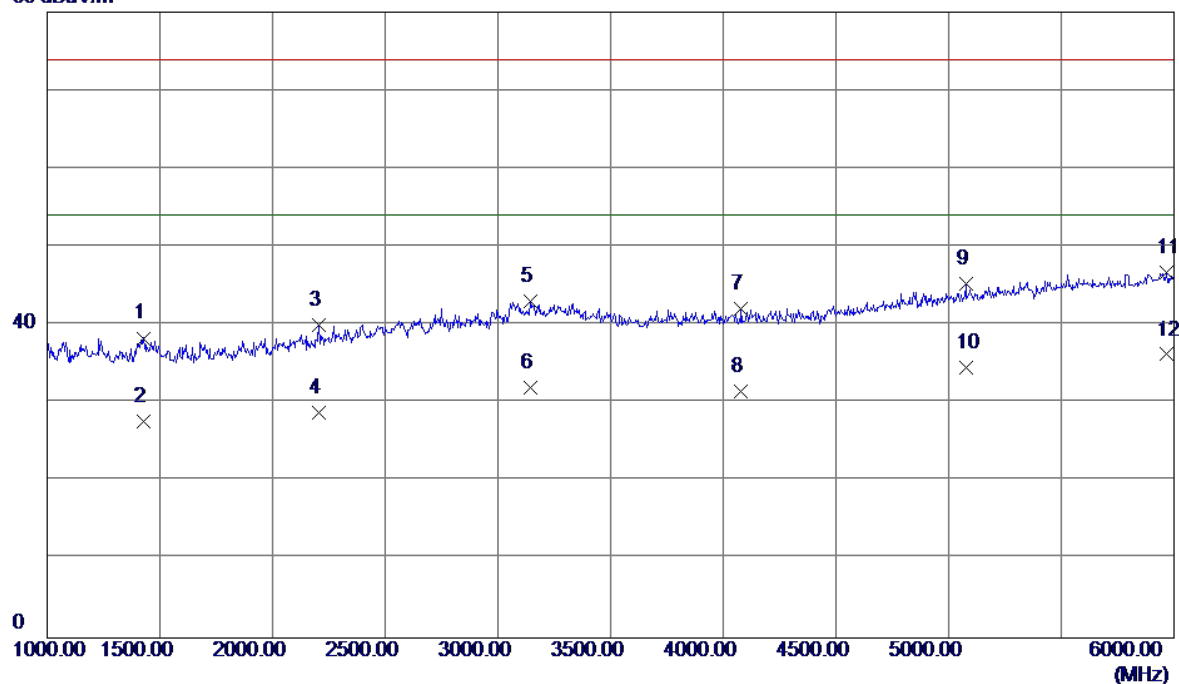

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1427.5000    | 43.53                      | -5.21                   | 38.32                     | 74.00           | -35.68       | Peak     |
| 2    | 1427.5000    | 32.84                      | -5.21                   | 27.63                     | 54.00           | -26.37       | AVG      |
| 3    | 2207.5000    | 41.50                      | -1.43                   | 40.07                     | 74.00           | -33.93       | Peak     |
| 4    | 2207.5000    | 30.27                      | -1.43                   | 28.84                     | 54.00           | -25.16       | AVG      |
| 5    | 3145.0000    | 40.67                      | 2.36                    | 43.03                     | 74.00           | -30.97       | Peak     |
| 6    | 3145.0000    | 29.63                      | 2.36                    | 31.99                     | 54.00           | -22.01       | AVG      |
| 7    | 4080.0000    | 39.13                      | 2.91                    | 42.04                     | 74.00           | -31.96       | Peak     |
| 8    | 4080.0000    | 28.67                      | 2.91                    | 31.58                     | 54.00           | -22.42       | AVG      |
| 9    | 5077.5000    | 38.73                      | 6.57                    | 45.30                     | 74.00           | -28.70       | Peak     |
| 10   | 5077.5000    | 28.03                      | 6.57                    | 34.60                     | 54.00           | -19.40       | AVG      |
| 11   | 5967.5000    | 38.32                      | 8.43                    | 46.75                     | 74.00           | -27.25       | Peak     |
| 12 * | 5967.5000    | 27.81                      | 8.43                    | 36.24                     | 54.00           | -17.76       | AVG      |


|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+Playing+Speaker                        |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

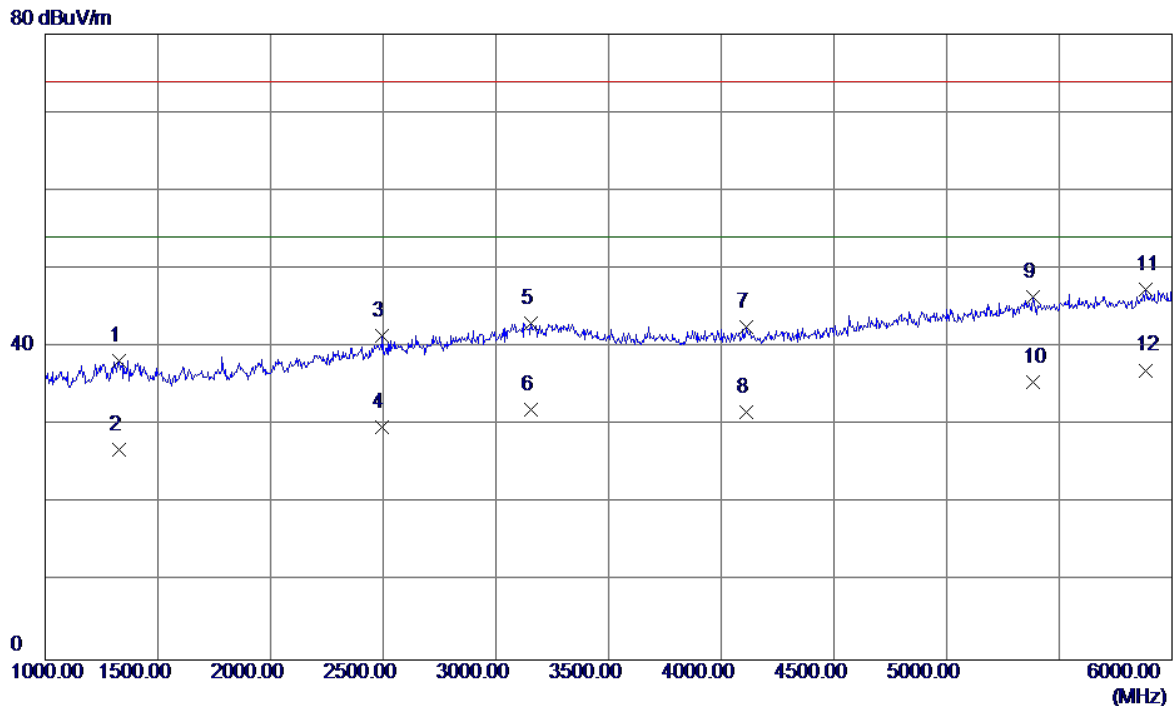

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1327.5000    | 43.82                      | -5.56                   | 38.26                     | 74.00           | -35.74       | Peak     |
| 2    | 1327.5000    | 32.51                      | -5.56                   | 26.95                     | 54.00           | -27.05       | AVG      |
| 3    | 2495.0000    | 41.31                      | 0.14                    | 41.45                     | 74.00           | -32.55       | Peak     |
| 4    | 2495.0000    | 29.68                      | 0.14                    | 29.82                     | 54.00           | -24.18       | AVG      |
| 5    | 3157.5000    | 40.65                      | 2.35                    | 43.00                     | 74.00           | -31.00       | Peak     |
| 6    | 3157.5000    | 29.58                      | 2.35                    | 31.93                     | 54.00           | -22.07       | AVG      |
| 7    | 4112.5000    | 39.51                      | 2.98                    | 42.49                     | 74.00           | -31.51       | Peak     |
| 8    | 4112.5000    | 28.67                      | 2.98                    | 31.65                     | 54.00           | -22.35       | AVG      |
| 9    | 5385.0000    | 38.73                      | 7.62                    | 46.35                     | 74.00           | -27.65       | Peak     |
| 10   | 5385.0000    | 27.94                      | 7.62                    | 35.56                     | 54.00           | -18.44       | AVG      |
| 11   | 5882.5000    | 38.95                      | 8.35                    | 47.30                     | 74.00           | -26.70       | Peak     |
| 12 * | 5882.5000    | 28.69                      | 8.35                    | 37.04                     | 54.00           | -16.96       | AVG      |

|               |                                                                             |                   |          |
|---------------|-----------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                                 | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                                | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                             |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:<br>Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                    |                   |          |


80 dBuV/m

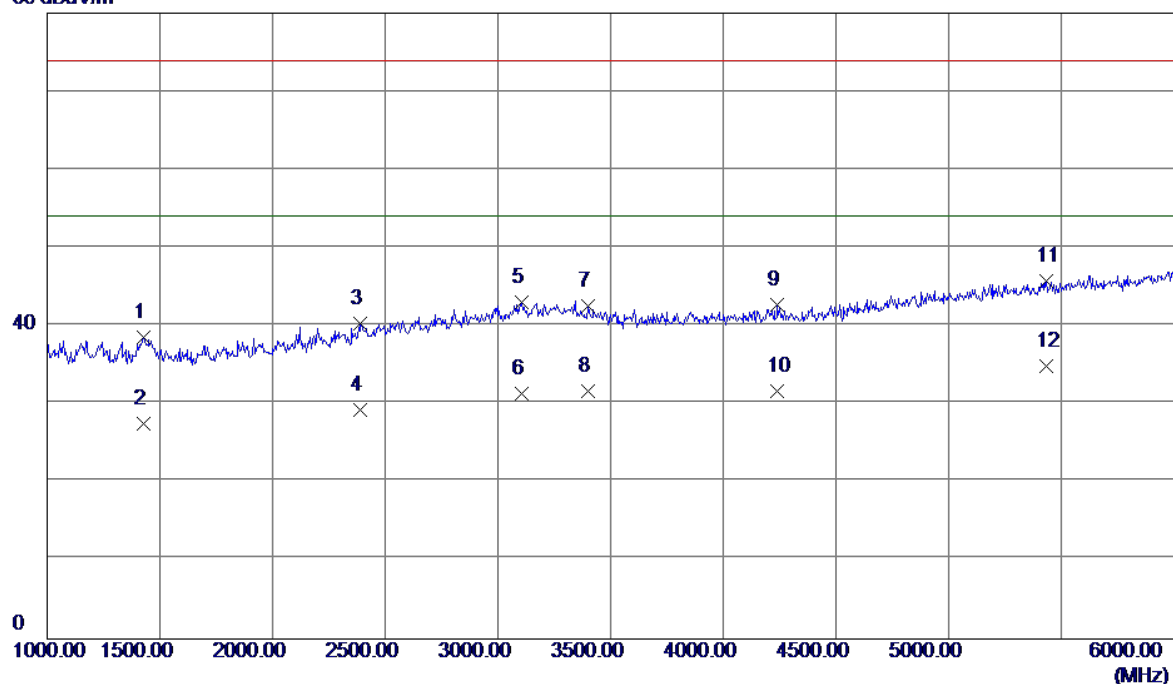

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1430.0000    | 43.80                      | -5.20                   | 38.60                     | 74.00           | -35.40       | Peak     |
| 2    | 1430.0000    | 32.68                      | -5.20                   | 27.48                     | 54.00           | -26.52       | AVG      |
| 3    | 2390.0000    | 40.74                      | -0.43                   | 40.31                     | 74.00           | -33.69       | Peak     |
| 4    | 2390.0000    | 29.66                      | -0.43                   | 29.23                     | 54.00           | -24.77       | AVG      |
| 5    | 3107.5000    | 40.74                      | 2.37                    | 43.11                     | 74.00           | -30.89       | Peak     |
| 6    | 3107.5000    | 28.94                      | 2.37                    | 31.31                     | 54.00           | -22.69       | AVG      |
| 7    | 3402.5000    | 40.34                      | 2.28                    | 42.62                     | 74.00           | -31.38       | Peak     |
| 8    | 3402.5000    | 29.46                      | 2.28                    | 31.74                     | 54.00           | -22.26       | AVG      |
| 9    | 4240.0000    | 39.47                      | 3.28                    | 42.75                     | 74.00           | -31.25       | Peak     |
| 10   | 4240.0000    | 28.36                      | 3.28                    | 31.64                     | 54.00           | -22.36       | AVG      |
| 11   | 5432.5000    | 37.98                      | 7.78                    | 45.76                     | 74.00           | -28.24       | Peak     |
| 12 * | 5432.5000    | 27.15                      | 7.78                    | 34.93                     | 54.00           | -19.07       | AVG      |


|               |                                                                         |                   |            |
|---------------|-------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                             | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                         |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY+Earphone:Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                |                   |            |

80 dBuV/m

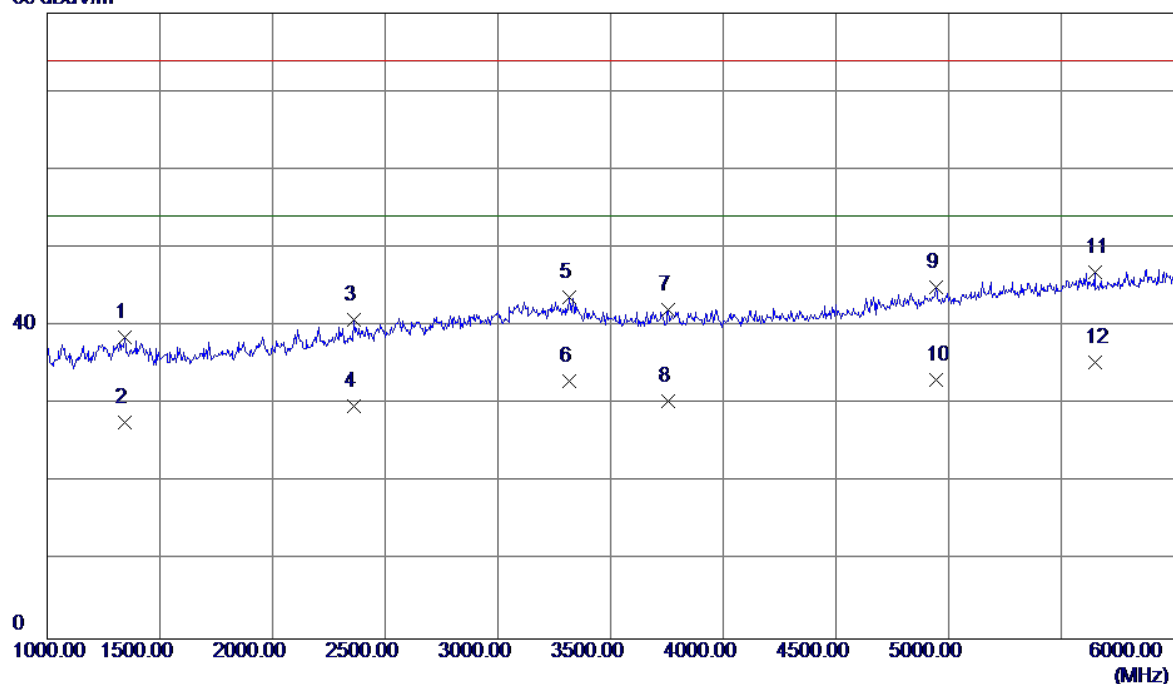

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1342.5000    | 44.07                      | -5.51                   | 38.56                     | 74.00           | -35.44       | Peak     |
| 2    | 1342.5000    | 33.17                      | -5.51                   | 27.66                     | 54.00           | -26.34       | AVG      |
| 3    | 2360.0000    | 41.33                      | -0.60                   | 40.73                     | 74.00           | -33.27       | Peak     |
| 4    | 2360.0000    | 30.29                      | -0.60                   | 29.69                     | 54.00           | -24.31       | AVG      |
| 5    | 3317.5000    | 41.32                      | 2.31                    | 43.63                     | 74.00           | -30.37       | Peak     |
| 6    | 3317.5000    | 30.63                      | 2.31                    | 32.94                     | 54.00           | -21.06       | AVG      |
| 7    | 3757.5000    | 39.66                      | 2.49                    | 42.15                     | 74.00           | -31.85       | Peak     |
| 8    | 3757.5000    | 27.97                      | 2.49                    | 30.46                     | 54.00           | -23.54       | AVG      |
| 9    | 4942.5000    | 38.86                      | 6.03                    | 44.89                     | 74.00           | -29.11       | Peak     |
| 10   | 4942.5000    | 27.09                      | 6.03                    | 33.12                     | 54.00           | -20.88       | AVG      |
| 11   | 5647.5000    | 38.70                      | 8.14                    | 46.84                     | 74.00           | -27.16       | Peak     |
| 12 * | 5647.5000    | 27.16                      | 8.14                    | 35.30                     | 54.00           | -18.70       | AVG      |


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

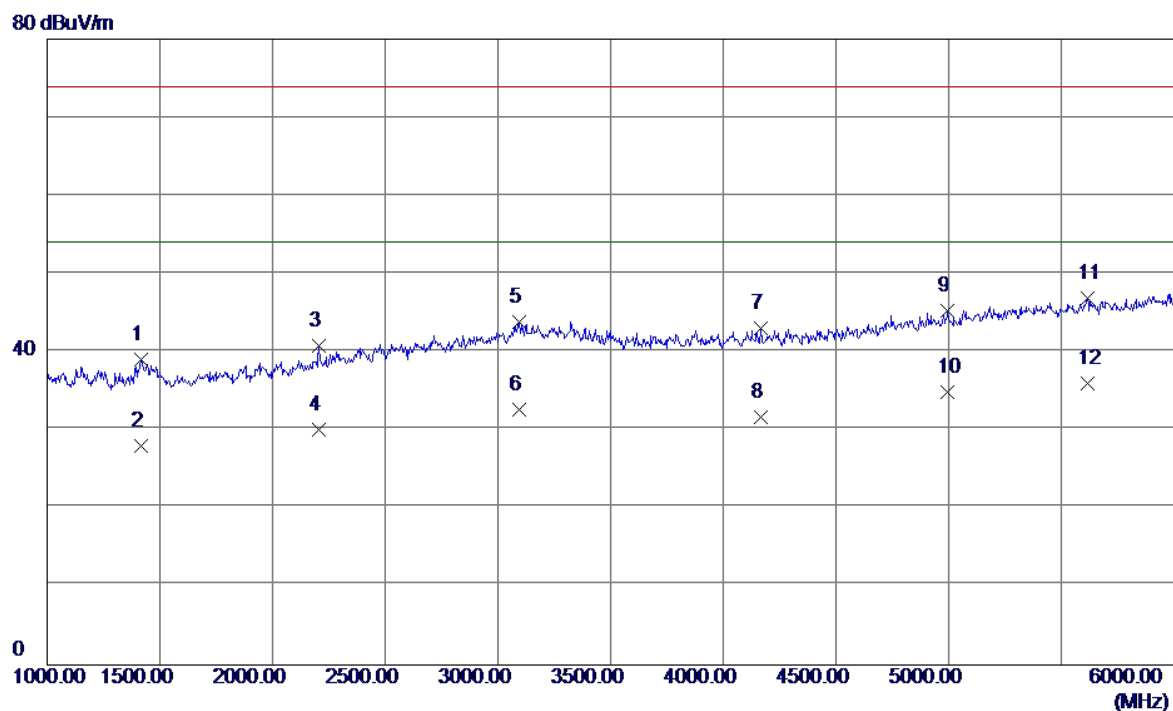

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1417.5000    | 44.24                      | -5.24                   | 39.00                     | 74.00           | -35.00       | Peak     |
| 2    | 1417.5000    | 33.27                      | -5.24                   | 28.03                     | 54.00           | -25.97       | AVG      |
| 3    | 2205.0000    | 42.21                      | -1.45                   | 40.76                     | 74.00           | -33.24       | Peak     |
| 4    | 2205.0000    | 31.59                      | -1.45                   | 30.14                     | 54.00           | -23.86       | AVG      |
| 5    | 3095.0000    | 41.43                      | 2.37                    | 43.80                     | 74.00           | -30.20       | Peak     |
| 6    | 3095.0000    | 30.26                      | 2.37                    | 32.63                     | 54.00           | -21.37       | AVG      |
| 7    | 4165.0000    | 39.91                      | 3.10                    | 43.01                     | 74.00           | -30.99       | Peak     |
| 8    | 4165.0000    | 28.54                      | 3.10                    | 31.64                     | 54.00           | -22.36       | AVG      |
| 9    | 4995.0000    | 39.00                      | 6.29                    | 45.29                     | 74.00           | -28.71       | Peak     |
| 10   | 4995.0000    | 28.55                      | 6.29                    | 34.84                     | 54.00           | -19.16       | AVG      |
| 11   | 5615.0000    | 38.77                      | 8.11                    | 46.88                     | 74.00           | -27.12       | Peak     |
| 12 * | 5615.0000    | 27.94                      | 8.11                    | 36.05                     | 54.00           | -17.95       | AVG      |


|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |          |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |          |
| Test Engineer | Kevin Li                                            |                   |          |

80 dBuV/m

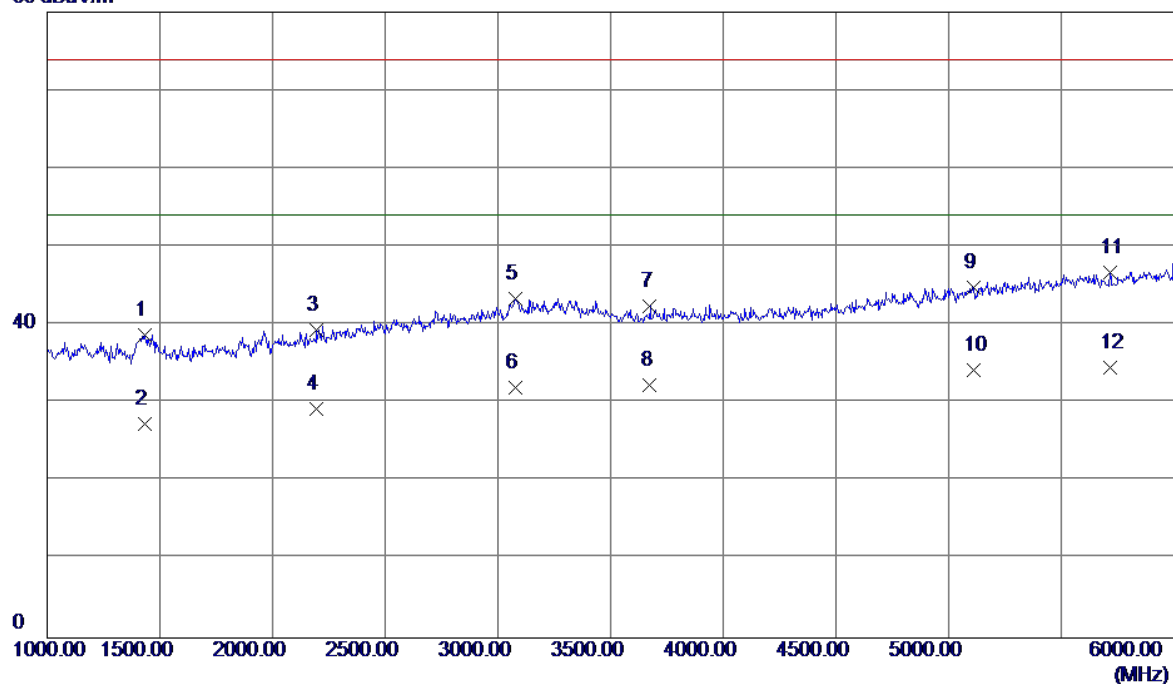


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1432.5000    | 43.97                      | -5.19                   | 38.78                     | 74.00           | -35.22       | Peak     |
| 2    | 1432.5000    | 32.55                      | -5.19                   | 27.36                     | 54.00           | -26.64       | AVG      |
| 3    | 2195.0000    | 40.91                      | -1.50                   | 39.41                     | 74.00           | -34.59       | Peak     |
| 4    | 2195.0000    | 30.72                      | -1.50                   | 29.22                     | 54.00           | -24.78       | AVG      |
| 5    | 3080.0000    | 40.97                      | 2.38                    | 43.35                     | 74.00           | -30.65       | Peak     |
| 6    | 3080.0000    | 29.56                      | 2.38                    | 31.94                     | 54.00           | -22.06       | AVG      |
| 7    | 3675.0000    | 40.00                      | 2.42                    | 42.42                     | 74.00           | -31.58       | Peak     |
| 8    | 3675.0000    | 29.87                      | 2.42                    | 32.29                     | 54.00           | -21.71       | AVG      |
| 9    | 5110.0000    | 38.17                      | 6.68                    | 44.85                     | 74.00           | -29.15       | Peak     |
| 10   | 5110.0000    | 27.57                      | 6.68                    | 34.25                     | 54.00           | -19.75       | AVG      |
| 11   | 5715.0000    | 38.47                      | 8.20                    | 46.67                     | 74.00           | -27.33       | Peak     |
| 12 * | 5715.0000    | 26.38                      | 8.20                    | 34.58                     | 54.00           | -19.42       | AVG      |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

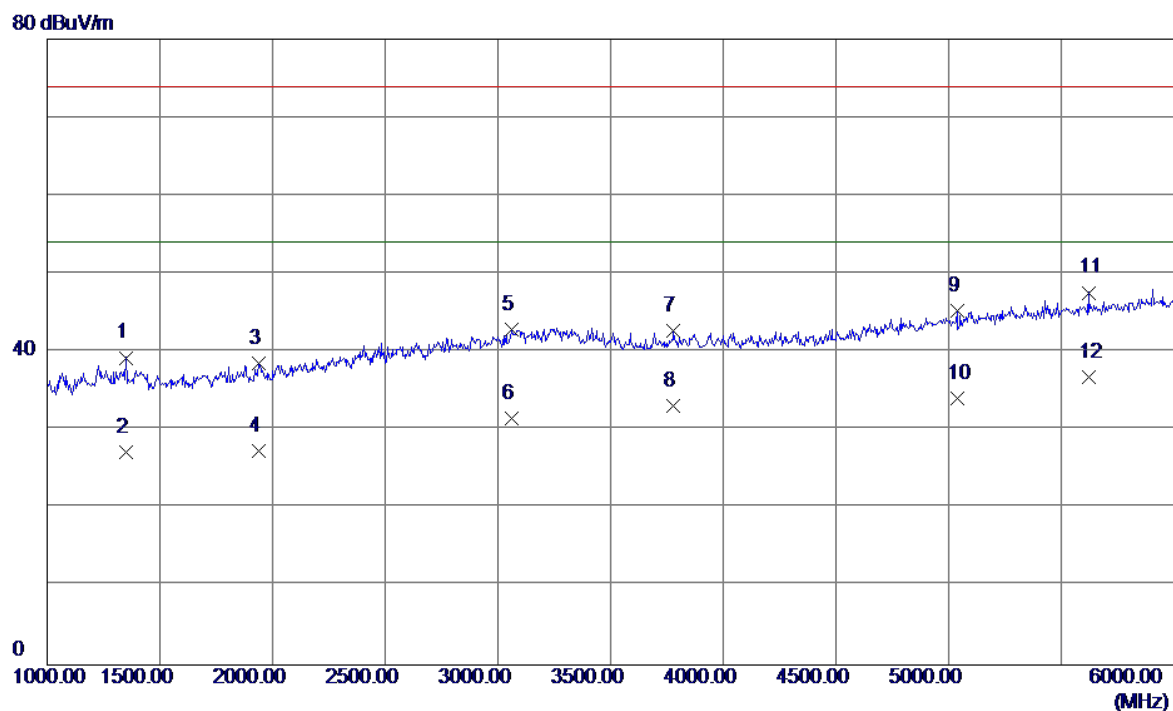

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1350.0000    | 44.76                      | -5.48                   | 39.28                     | 74.00           | -34.72       | Peak     |
| 2    | 1350.0000    | 32.70                      | -5.48                   | 27.22                     | 54.00           | -26.78       | AVG      |
| 3    | 1940.0000    | 41.46                      | -2.86                   | 38.60                     | 74.00           | -35.40       | Peak     |
| 4    | 1940.0000    | 30.22                      | -2.86                   | 27.36                     | 54.00           | -26.64       | AVG      |
| 5    | 3062.5000    | 40.47                      | 2.38                    | 42.85                     | 74.00           | -31.15       | Peak     |
| 6    | 3062.5000    | 29.08                      | 2.38                    | 31.46                     | 54.00           | -22.54       | AVG      |
| 7    | 3780.0000    | 40.13                      | 2.52                    | 42.65                     | 74.00           | -31.35       | Peak     |
| 8    | 3780.0000    | 30.62                      | 2.52                    | 33.14                     | 54.00           | -20.86       | AVG      |
| 9    | 5037.5000    | 38.80                      | 6.44                    | 45.24                     | 74.00           | -28.76       | Peak     |
| 10   | 5037.5000    | 27.69                      | 6.44                    | 34.13                     | 54.00           | -19.87       | AVG      |
| 11   | 5620.0000    | 39.48                      | 8.12                    | 47.60                     | 74.00           | -26.40       | Peak     |
| 12 * | 5620.0000    | 28.63                      | 8.12                    | 36.75                     | 54.00           | -17.25       | AVG      |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                         | Model Name        | VTR-L29    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (WCDMA)                             |                   |            |
| Note          | Adapter:Salcomp(US)+USB Cable:HONGLIN+Battery:DESAY |                   |            |
| Test Engineer | Kevin Li                                            |                   |            |

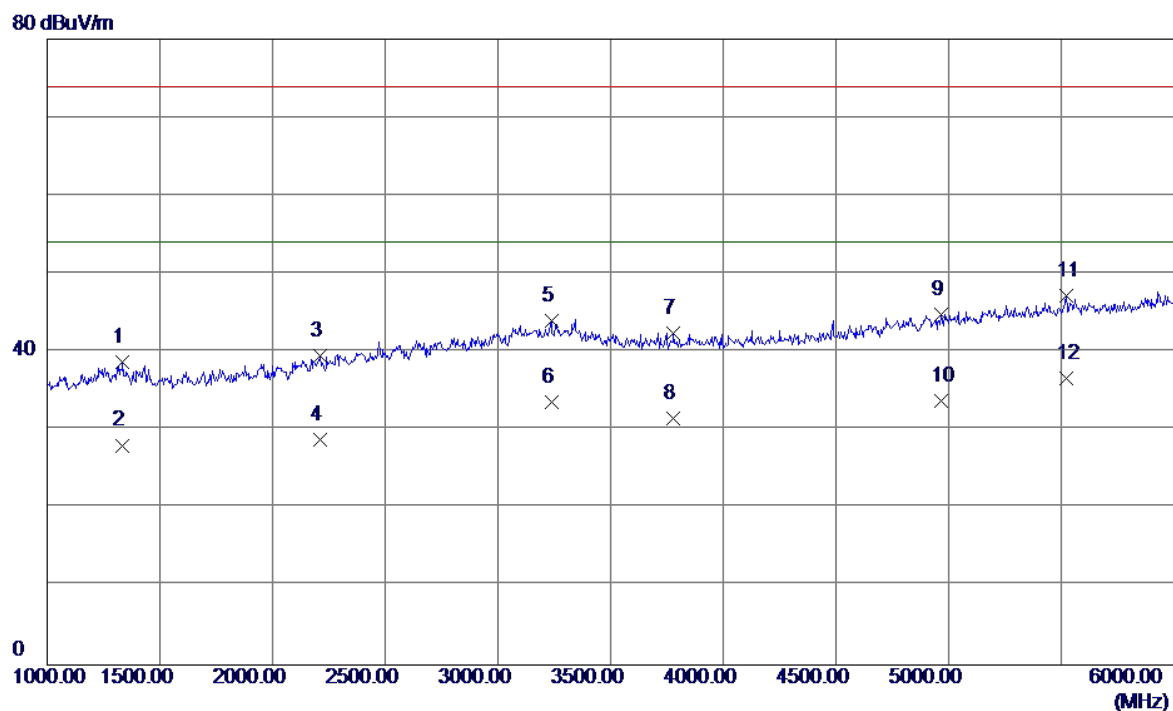

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1335.0000    | 44.24                      | -5.54                   | 38.70                     | 74.00           | -35.30       | Peak     |
| 2    | 1335.0000    | 33.62                      | -5.54                   | 28.08                     | 54.00           | -25.92       | AVG      |
| 3    | 2210.0000    | 40.89                      | -1.42                   | 39.47                     | 74.00           | -34.53       | Peak     |
| 4    | 2210.0000    | 30.16                      | -1.42                   | 28.74                     | 54.00           | -25.26       | AVG      |
| 5    | 3237.5000    | 41.68                      | 2.33                    | 44.01                     | 74.00           | -29.99       | Peak     |
| 6    | 3237.5000    | 31.27                      | 2.33                    | 33.60                     | 54.00           | -20.40       | AVG      |
| 7    | 3780.0000    | 39.95                      | 2.52                    | 42.47                     | 74.00           | -31.53       | Peak     |
| 8    | 3780.0000    | 28.94                      | 2.52                    | 31.46                     | 54.00           | -22.54       | AVG      |
| 9    | 4965.0000    | 38.66                      | 6.14                    | 44.80                     | 74.00           | -29.20       | Peak     |
| 10   | 4965.0000    | 27.55                      | 6.14                    | 33.69                     | 54.00           | -20.31       | AVG      |
| 11   | 5522.5000    | 39.13                      | 8.03                    | 47.16                     | 74.00           | -26.84       | Peak     |
| 12 * | 5522.5000    | 28.54                      | 8.03                    | 36.57                     | 54.00           | -17.43       | AVG      |