

# FCC Test Report

## FCC ID: QISWAS-LX3

**Project No.** : 1612C248A  
**Equipment** : Smart Phone  
**Model Name** : WAS-LX3  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Dec. 23, 2016  
**Date of Test** : Dec. 23, 2016 ~ Dec. 30, 2016  
**Issued Date** : Mar. 14, 2017  
**Tested by** : BTL Inc.

**Testing Engineer** : Treey Chen  
(Treey Chen)

**Technical Manager** : Bill Zhang  
(Bill Zhang)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>4</b>    |
| <b>1 .CERIFICATION</b>                                       | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 EUT OPERATING CONDITIONS                                 | 10          |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 12          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>13</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 13          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 13          |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST                           | 13          |
| 4.1.3 TEST PROCEDURE                                         | 14          |
| 4.1.4 DEVIATIONFROMTESTSTANDARD                              | 14          |
| 4.1.5 TESTSETUP                                              | 14          |
| 4.1.6 TEST RESULTS                                           | 14          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 47          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 47          |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST                           | 48          |
| 4.2.3 TEST PROCEDURE                                         | 49          |
| 4.2.4 DEVIATION FROM TEST STANDARD                           | 49          |
| 4.2.5 TEST SETUP                                             | 50          |
| 4.2.6 TEST RESULTS-BELOW 1GHZ                                | 50          |
| 4.2.7 TEST RESULTS-ABOVE 1GHZ                                | 83          |

### REPORT ISSUED HISTORY

| Issued No.           | Description                                                                                                                                          | Issued Date   |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| BTL-FCCE-1-1612C248  | Original report.                                                                                                                                     | Jan. 03, 2017 |
| BTL-FCCE-1-1612C248A | Compared with the previous report (BTL-FCCE-1-1612C248), added the third source of battery and the related test results, the rest are kept the same. | Mar. 14, 2017 |

## 1.CERIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : WAS-LX3  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer: Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Dec. 23, 2016 ~ Dec. 30, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1612C248A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission                             |                                  |         |          |         |
|------------------------------------------|----------------------------------|---------|----------|---------|
| Standard(s)                              | Test Item                        | Limit   | Judgment | Remark  |
| FCC Part15, Subpart B<br>ANSI C63.4-2014 | Conducted Emission               | Class B | PASS     |         |
|                                          | Radiated emission<br>Below 1 GHz | Class B | PASS     |         |
|                                          | Radiated emission<br>Above 1 GHz | Class B | PASS     | NOTE(2) |

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150 kHz ~ 30MHz             | 2.32    |

### B. Radiated Measurement :

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------------|--------|-----------------------------|---------------|---------|
| DG-CB03<br>(3m) | CISPR  | 9KHz ~ 30MHz                | V             | 3.79    |
|                 |        | 9KHz ~ 30MHz                | H             | 3.57    |
|                 |        | 30MHz ~ 200MHz              | V             | 3.82    |
|                 |        | 30MHz ~ 200MHz              | H             | 3.78    |
|                 |        | 200MHz ~ 1,000MHz           | V             | 4.10    |
|                 |        | 200MHz ~ 1,000MHz           | H             | 4.06    |

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------------|--------|-----------------------------|---------------|---------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 18GHz                | V             | 3.12    |
|                 |        | 1GHz ~ 18GHz                | H             | 3.68    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |                                                                    |
|------------------|--------------------------------------------------------------------|
| Equipment        | Smart Phone                                                        |
| Brand Name       | HUAWEI                                                             |
| Model Name       | WAS-LX3                                                            |
| Model Difference | N/A                                                                |
| Frequency        | GSM850/1900<br>WCDMA B2/4/5<br>LTE B2/4/5/7<br>BT/ Wi-Fi           |
| Power Source     | #1 DC Voltage supplied from AC/DC adapter.<br>#2 Battery Supplied. |
| Power Rating     | #1:AC 100–240V 50/60Hz DC 9V/5V 2A<br>#2:DC 3.82V 2900mAh          |
| HW Version       | HL2WASM                                                            |
| SW Version       | WAS-LX3C900B083                                                    |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

| Item      | Mfr/Brand                                       | Model.              |
|-----------|-------------------------------------------------|---------------------|
| Battery   | DESAY CORPORATION                               | HB366481ECW         |
|           | Sunwoda Electronic Co., LTD                     |                     |
|           | SCUD (FUJIAN) Electronics Co., Ltd              |                     |
| USB Cable | FOXCONN INTERCONNECT TECHNOLOGY LIMITED         | CUBB01M-HC304-DH    |
|           | Shenzhen Luxshare Precision Industry Co.,Ltd.   | L99U2017-CS-H       |
|           | SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD.        | H09-000577          |
|           | CONNREX (SHEN ZHEN) INDUSTRIAL.,LTD.            | CD-U0405-1143       |
| Earphone  | Jiangxi Lianchuang Hongsheng Electronic Co.,LTD | MEMD1632B580C00     |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD       | 1311-3291-3.5mm-229 |
|           | MERRY ELECTRONICS CO., LTD.                     | EMC309-001          |
|           | GoerTek Inc                                     | NA12                |
| Adapter   | HUIZHOU BYD ELECTRONIC CO., LTD.                | HW-059200UHQ        |
|           | Salcomp (Shenzhen)Co.,Ltd                       |                     |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                        |
|--------------|------------------------------------|
| Mode 1       | USB COPY+IDLE                      |
| Mode 2       | Adapter+Idle+WIFI+BT+GPS+Camera on |
| Mode 3       | Adapter+Playing+Speaker            |
| Mode 4       | Adapter+Playing+Earphone           |
| Mode 5       | Adapter+Traffic(GSM)               |
| Mode 6       | Adapter+Traffic(WCDMA)             |
| Mode 7       | Adapter+Traffic(LTE)               |


| For Conducted Test |                                    |
|--------------------|------------------------------------|
| Final Test Mode    | Description                        |
| Mode 1             | USB COPY+IDLE                      |
| Mode 2             | Adapter+Idle+WIFI+BT+GPS+Camera on |
| Mode 3             | Adapter+Playing+Speaker            |
| Mode 4             | Adapter+Playing+Earphone           |
| Mode 5             | Adapter+Traffic(GSM)               |
| Mode 6             | Adapter+Traffic(WCDMA)             |
| Mode 7             | Adapter+Traffic(LTE)               |

| For Radiated Test |                                    |
|-------------------|------------------------------------|
| Final Test Mode   | Description                        |
| Mode 1            | USB COPY+IDLE                      |
| Mode 2            | Adapter+Idle+WIFI+BT+GPS+Camera on |
| Mode 3            | Adapter+Playing+Speaker            |
| Mode 4            | Adapter+Playing+Earphone           |
| Mode 5            | Adapter+Traffic(GSM)               |
| Mode 6            | Adapter+Traffic(WCDMA)             |
| Mode 7            | Adapter+Traffic(LTE)               |


### 3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

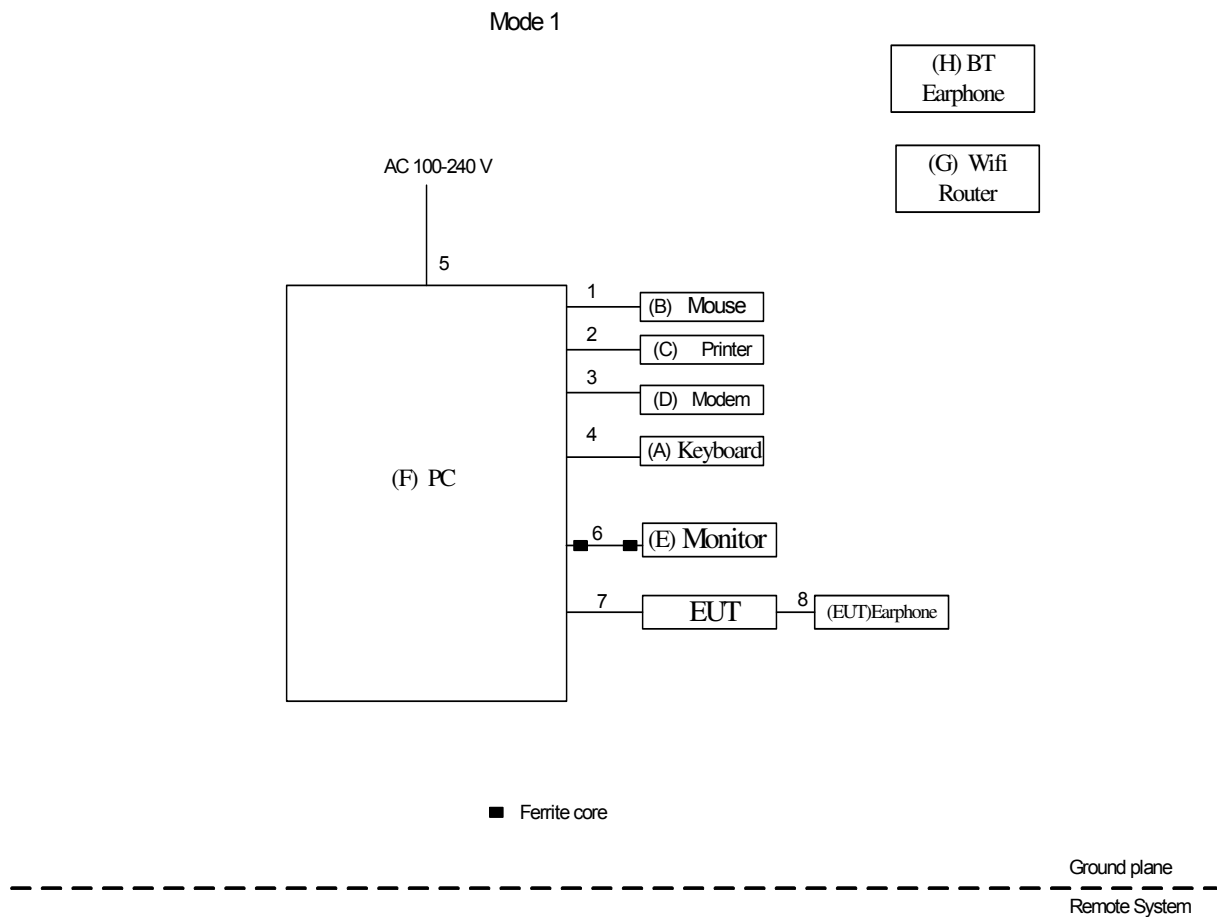

Mode 2-7

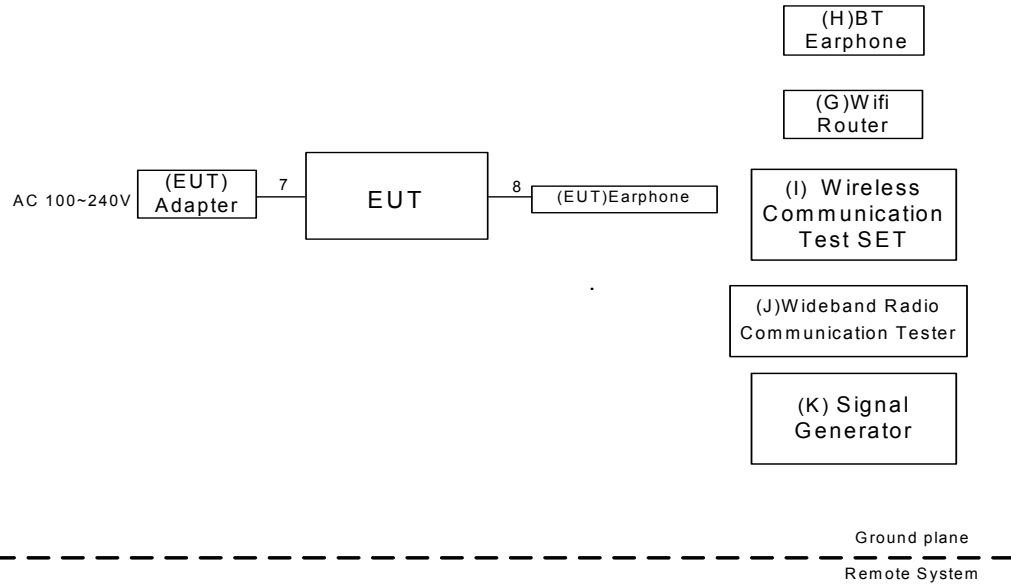

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                           | Mfr/Brand | Model/Type No. | FCC ID      | Series No.              |
|------|-------------------------------------|-----------|----------------|-------------|-------------------------|
| A    | USB Keyboard                        | Dell      | L100           | DOC         | CNORH6596589071T08NE    |
| B    | USB Mouse                           | Dell      | MO56UOA        | DOC         | FQJ000BS                |
| C    | Printer                             | SII       | DPU-414        | DOC         | 3018507 B               |
| D    | Modem                               | ACEEX     | DM-1414V       | IFAXDM1414  | 0603002131              |
| E    | LCD monitor                         | Dell      | E177FPc        | DOC         | CNOFJ179-64180-6AG-1WNS |
| F    | PC                                  | Dell 745  | DCSM           | DOC         | G7K832X                 |
| G    | wireless router                     | ASUS      | RT-AC66U       | MSQ-RTAC66U | E8ICGG000138            |
| H    | BT earphone                         | N/A       | N/A            | N/A         | N/A                     |
| I    | Wireless Communication Test SET     | Agilent   | (8960 Series)  | N/A         | MY48364183              |
| J    | Wideband Radio Communication Tester | RS        | CMW500         | N/A         | 122125                  |
| K    | SignalGenerator                     | Agilent   | E4438C         | N/A         | MY49071316              |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC Cable       |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.1m   | Audio Cable    |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment     | Manufacturer | Type No.                      | Serial No. | Calibrated until |
|------|-----------------------|--------------|-------------------------------|------------|------------------|
| 1    | Measurement Software  | Farad        | EZ-EMC<br>Ver.NB-03A<br>1-01  | N/A        | N/A              |
| 2    | LISN                  | EMCO         | 3816/2                        | 00052765   | Mar. 27, 2017    |
| 3    | 50Ω Terminator        | SHX          | TF2-3G-A                      | 08122901   | Mar. 27, 2017    |
| 4    | TWO-LINE<br>V-NETWORK | R&S          | ENV216                        | 101447     | Mar. 27, 2017    |
| 5    | Cable                 | emci         | RG223(9K<br>Hz-30MHz)<br>(5m) | N/A        | Mar. 10, 2017    |
| 6    | EMI Test Receiver     | R&S          | ESCI                          | 100382     | Mar. 27, 2017    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

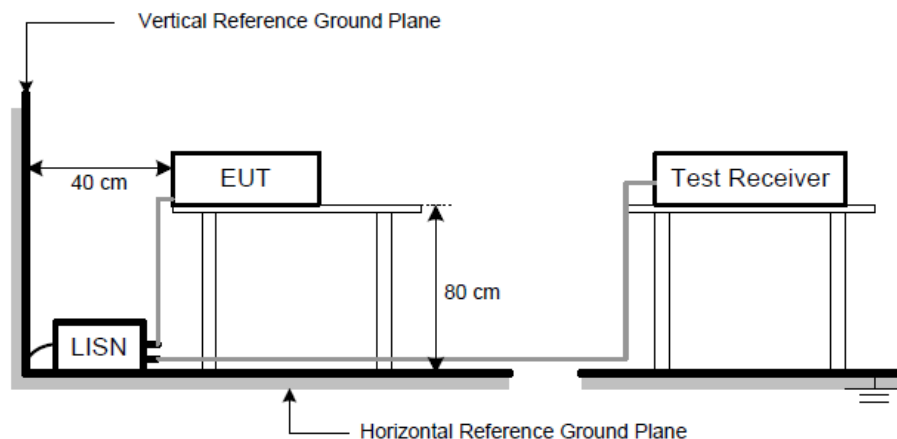


#### 4.1.6 TEST RESULTS

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Line    |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:CR  |                   |         |
| Test Engineer | Treey Chen    |                   |         |


80 dBuV

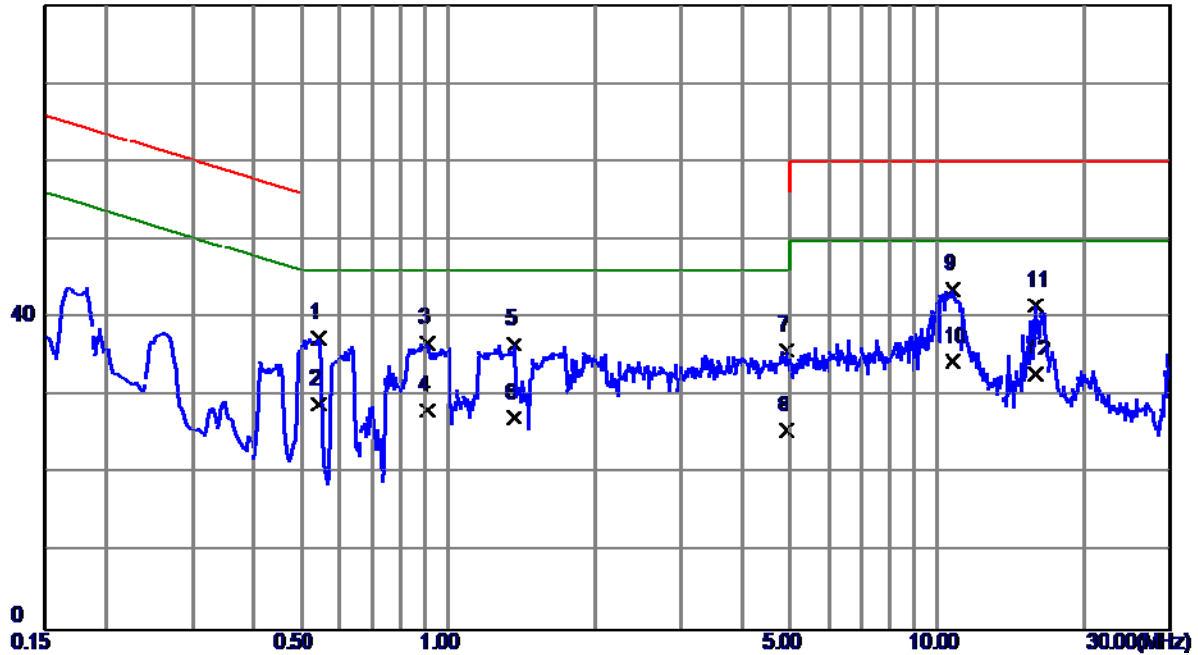

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.5460       | 27.68                    | 9.69                    | 37.37                   | 56.00         | -18.63       | QP       |
| 2    | 0.5460       | 19.30                    | 9.69                    | 28.99                   | 46.00         | -17.01       | AVG      |
| 3    | 0.9100       | 26.91                    | 9.83                    | 36.74                   | 56.00         | -19.26       | QP       |
| 4    | 0.9100       | 18.40                    | 9.83                    | 28.23                   | 46.00         | -17.77       | AVG      |
| 5    | 1.3660       | 26.68                    | 9.92                    | 36.60                   | 56.00         | -19.40       | QP       |
| 6    | 1.3660       | 17.31                    | 9.92                    | 27.23                   | 46.00         | -18.77       | AVG      |
| 7    | 4.9140       | 25.55                    | 10.25                   | 35.80                   | 56.00         | -20.20       | QP       |
| 8    | 4.9140       | 15.41                    | 10.25                   | 25.66                   | 46.00         | -20.34       | AVG      |
| 9    | 10.7980      | 33.10                    | 10.52                   | 43.62                   | 60.00         | -16.38       | QP       |
| 10 * | 10.7980      | 23.91                    | 10.52                   | 34.43                   | 50.00         | -15.57       | AVG      |
| 11   | 15.8580      | 30.86                    | 10.72                   | 41.58                   | 60.00         | -18.42       | QP       |
| 12   | 15.8580      | 22.10                    | 10.72                   | 32.82                   | 50.00         | -17.18       | AVG      |

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Neutral |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:CR  |                   |         |
| Test Engineer | Treyy Chen    |                   |         |


80 dBuV

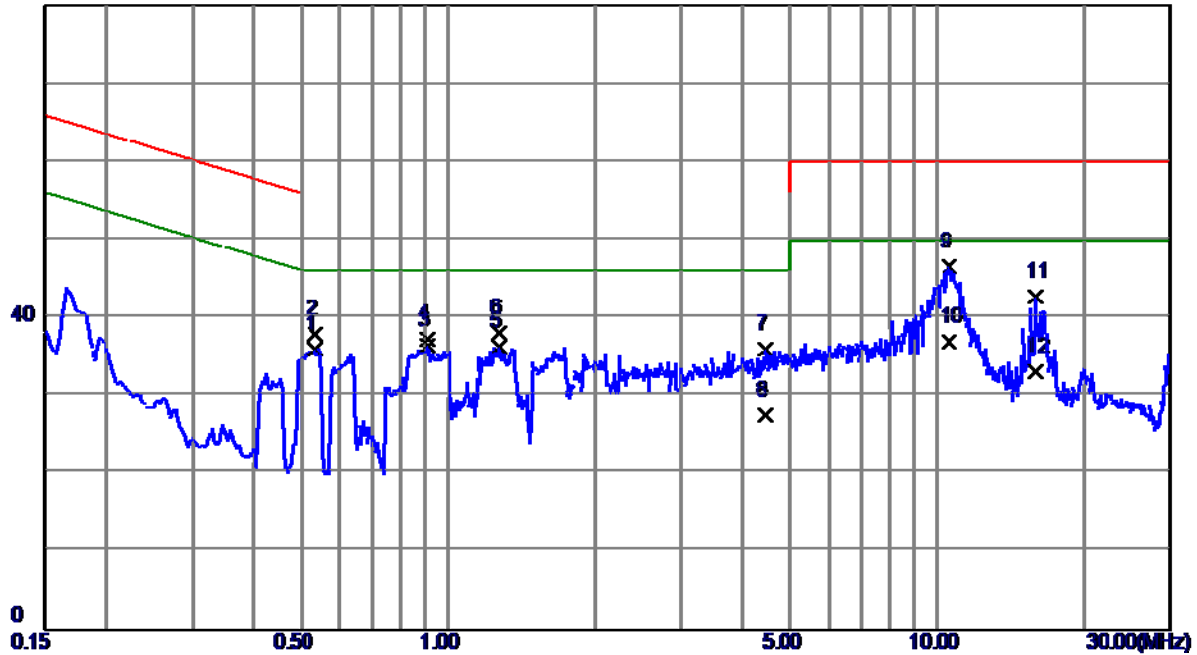

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.5340       | 26.58                    | 9.49                    | 36.07                   | 56.00         | -19.93       | QP       |
| 2   | 0.5340       | 28.40                    | 9.49                    | 37.89                   | 46.00         | -8.11        | AVG      |
| 3   | 0.9100       | 26.69                    | 9.73                    | 36.42                   | 56.00         | -19.58       | QP       |
| 4   | 0.9100       | 27.60                    | 9.73                    | 37.33                   | 46.00         | -8.67        | AVG      |
| 5   | 1.2740       | 26.50                    | 9.76                    | 36.26                   | 56.00         | -19.74       | QP       |
| 6 * | 1.2740       | 28.30                    | 9.76                    | 38.06                   | 46.00         | -7.94        | AVG      |
| 7   | 4.4660       | 25.84                    | 10.16                   | 36.00                   | 56.00         | -20.00       | QP       |
| 8   | 4.4660       | 17.40                    | 10.16                   | 27.56                   | 46.00         | -18.44       | AVG      |
| 9   | 10.6020      | 35.96                    | 10.60                   | 46.56                   | 60.00         | -13.44       | QP       |
| 10  | 10.6020      | 26.30                    | 10.60                   | 36.90                   | 50.00         | -13.10       | AVG      |
| 11  | 15.8660      | 32.02                    | 10.73                   | 42.75                   | 60.00         | -17.25       | QP       |
| 12  | 15.8660      | 22.41                    | 10.73                   | 33.14                   | 50.00         | -16.86       | AVG      |

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Line    |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:FF  |                   |         |
| Test Engineer | Treyy Chen    |                   |         |


80 dBuV

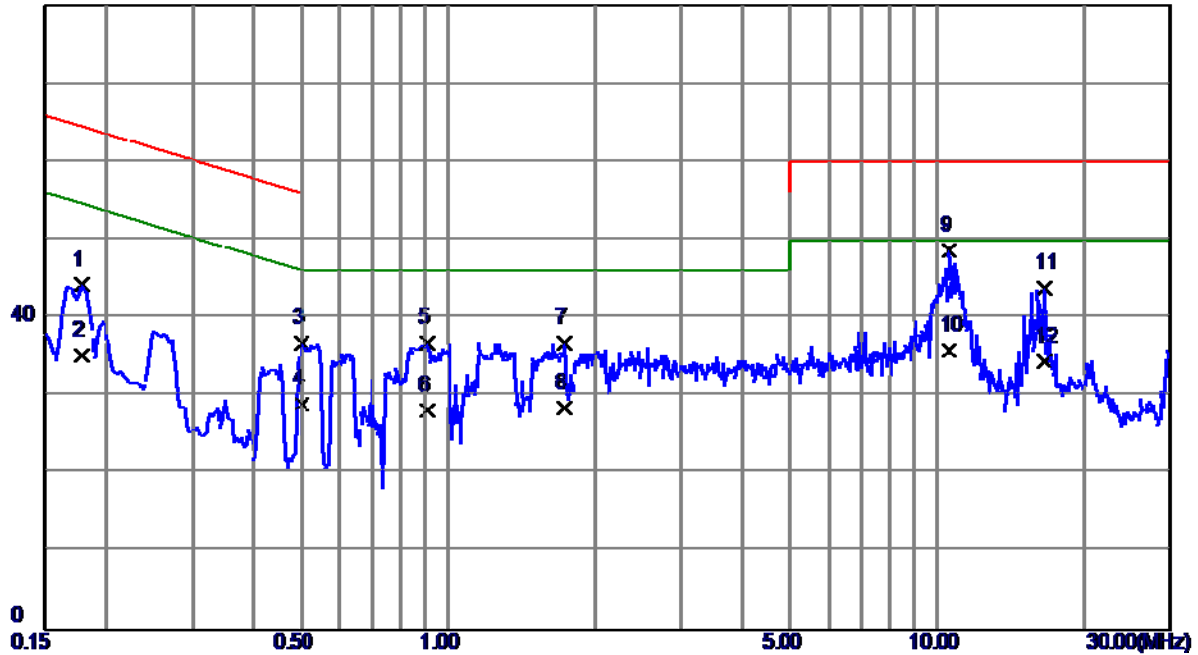

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1780       | 34.67                    | 9.57                    | 44.24                   | 64.58         | -20.34       | QP       |
| 2   | 0.1780       | 25.60                    | 9.57                    | 35.17                   | 54.58         | -19.41       | AVG      |
| 3   | 0.5020       | 27.18                    | 9.69                    | 36.87                   | 56.00         | -19.13       | QP       |
| 4   | 0.5020       | 19.30                    | 9.69                    | 28.99                   | 46.00         | -17.01       | AVG      |
| 5   | 0.9100       | 26.95                    | 9.83                    | 36.78                   | 56.00         | -19.22       | QP       |
| 6   | 0.9100       | 18.40                    | 9.83                    | 28.23                   | 46.00         | -17.77       | AVG      |
| 7   | 1.7300       | 26.80                    | 9.99                    | 36.79                   | 56.00         | -19.21       | QP       |
| 8   | 1.7300       | 18.50                    | 9.99                    | 28.49                   | 46.00         | -17.51       | AVG      |
| 9 * | 10.5780      | 38.08                    | 10.51                   | 48.59                   | 60.00         | -11.41       | QP       |
| 10  | 10.5780      | 25.30                    | 10.51                   | 35.81                   | 50.00         | -14.19       | AVG      |
| 11  | 16.5419      | 33.17                    | 10.73                   | 43.90                   | 60.00         | -16.10       | QP       |
| 12  | 16.5419      | 23.60                    | 10.73                   | 34.33                   | 50.00         | -15.67       | AVG      |


|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Neutral |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:FF  |                   |         |
| Test Engineer | Treedy Chen   |                   |         |

80 dBuV

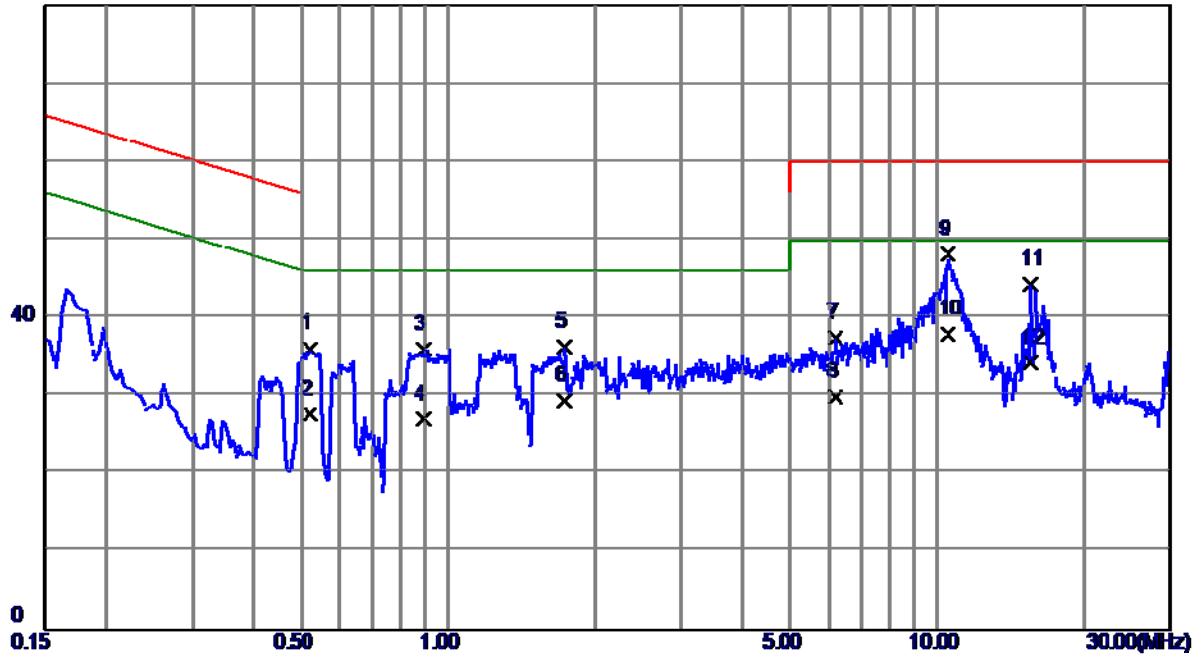

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.5220       | 26.59                    | 9.49                    | 36.08                   | 56.00         | -19.92       | QP       |
| 2   | 0.5220       | 18.20                    | 9.49                    | 27.69                   | 46.00         | -18.31       | AVG      |
| 3   | 0.8940       | 26.26                    | 9.72                    | 35.98                   | 56.00         | -20.02       | QP       |
| 4   | 0.8940       | 17.30                    | 9.72                    | 27.02                   | 46.00         | -18.98       | AVG      |
| 5   | 1.7300       | 26.60                    | 9.79                    | 36.39                   | 56.00         | -19.61       | QP       |
| 6   | 1.7300       | 19.60                    | 9.79                    | 29.39                   | 46.00         | -16.61       | AVG      |
| 7   | 6.2060       | 27.18                    | 10.23                   | 37.41                   | 60.00         | -22.59       | QP       |
| 8   | 6.2060       | 19.70                    | 10.23                   | 29.93                   | 50.00         | -20.07       | AVG      |
| 9 * | 10.5300      | 37.63                    | 10.60                   | 48.23                   | 60.00         | -11.77       | QP       |
| 10  | 10.5300      | 27.30                    | 10.60                   | 37.90                   | 50.00         | -12.10       | AVG      |
| 11  | 15.5380      | 33.54                    | 10.72                   | 44.26                   | 60.00         | -15.74       | QP       |
| 12  | 15.5380      | 23.50                    | 10.72                   | 34.22                   | 50.00         | -15.78       | AVG      |


|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Line    |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:LX  |                   |         |
| Test Engineer | Treey Chen    |                   |         |

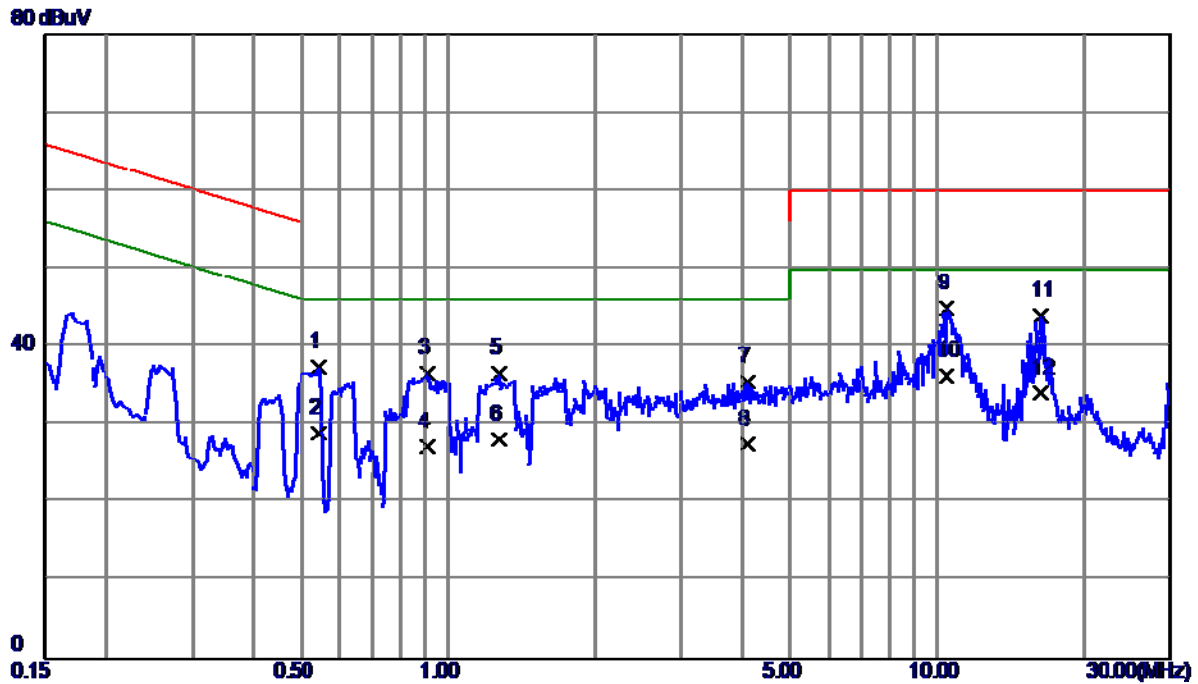

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.5460       | 27.70                    | 9.69                    | 37.39                   | 56.00         | -18.61       | QP       |
| 2    | 0.5460       | 19.30                    | 9.69                    | 28.99                   | 46.00         | -17.01       | AVG      |
| 3    | 0.9100       | 26.86                    | 9.83                    | 36.69                   | 56.00         | -19.31       | QP       |
| 4    | 0.9100       | 17.40                    | 9.83                    | 27.23                   | 46.00         | -18.77       | AVG      |
| 5    | 1.2740       | 26.79                    | 9.88                    | 36.67                   | 56.00         | -19.33       | QP       |
| 6    | 1.2740       | 18.30                    | 9.88                    | 28.18                   | 46.00         | -17.82       | AVG      |
| 7    | 4.0939       | 25.10                    | 10.38                   | 35.48                   | 56.00         | -20.52       | QP       |
| 8    | 4.0939       | 17.19                    | 10.38                   | 27.57                   | 46.00         | -18.43       | AVG      |
| 9    | 10.4700      | 34.48                    | 10.51                   | 44.99                   | 60.00         | -15.01       | QP       |
| 10 * | 10.4700      | 25.80                    | 10.51                   | 36.31                   | 50.00         | -13.69       | AVG      |
| 11   | 16.2580      | 33.26                    | 10.72                   | 43.98                   | 60.00         | -16.02       | QP       |
| 12   | 16.2580      | 23.41                    | 10.72                   | 34.13                   | 50.00         | -15.87       | AVG      |

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Neutral |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:LX  |                   |         |
| Test Engineer | Treey Chen    |                   |         |


80 dBuV

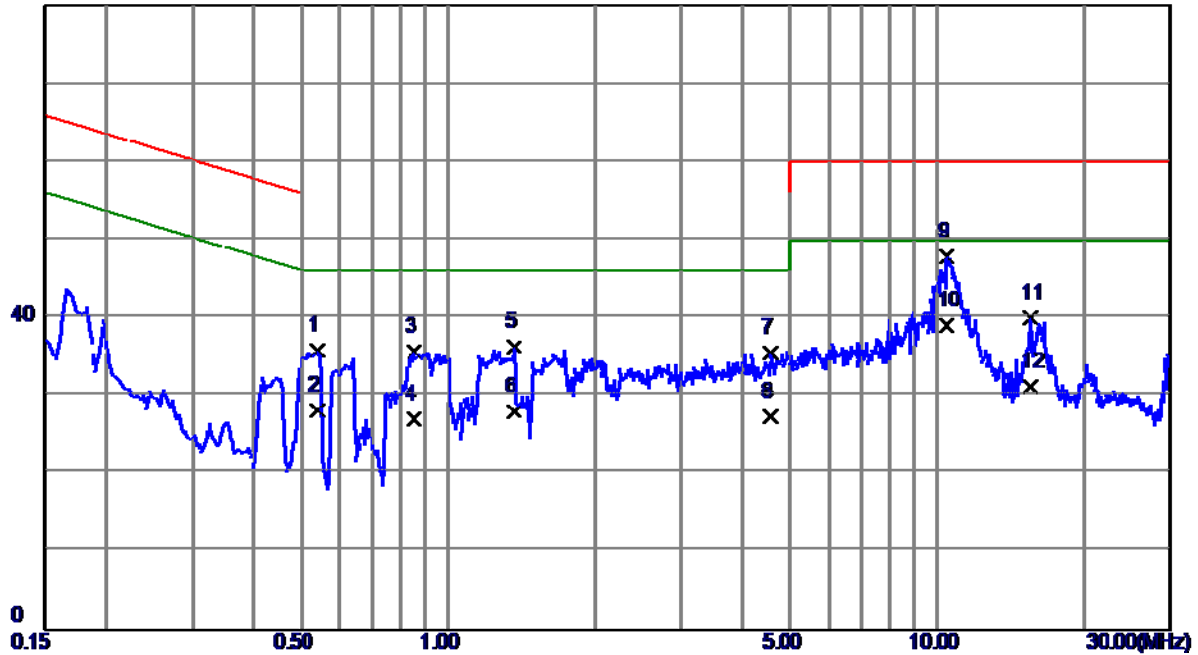

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.5420       | 26.33                    | 9.49                    | 35.82                   | 56.00         | -20.18       | QP       |
| 2    | 0.5420       | 18.60                    | 9.49                    | 28.09                   | 46.00         | -17.91       | AVG      |
| 3    | 0.8500       | 26.02                    | 9.67                    | 35.69                   | 56.00         | -20.31       | QP       |
| 4    | 0.8500       | 17.41                    | 9.67                    | 27.08                   | 46.00         | -18.92       | AVG      |
| 5    | 1.3660       | 26.48                    | 9.77                    | 36.25                   | 56.00         | -19.75       | QP       |
| 6    | 1.3660       | 18.30                    | 9.77                    | 28.07                   | 46.00         | -17.93       | AVG      |
| 7    | 4.5500       | 25.39                    | 10.17                   | 35.56                   | 56.00         | -20.44       | QP       |
| 8    | 4.5500       | 17.21                    | 10.17                   | 27.38                   | 46.00         | -18.62       | AVG      |
| 9    | 10.4700      | 37.21                    | 10.60                   | 47.81                   | 60.00         | -12.19       | QP       |
| 10 * | 10.4700      | 28.40                    | 10.60                   | 39.00                   | 50.00         | -11.00       | AVG      |
| 11   | 15.5420      | 29.23                    | 10.72                   | 39.95                   | 60.00         | -20.05       | QP       |
| 12   | 15.5420      | 20.50                    | 10.72                   | 31.22                   | 50.00         | -18.78       | AVG      |

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Line    |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:PY  |                   |         |
| Test Engineer | Treedy Chen   |                   |         |


80 dBuV

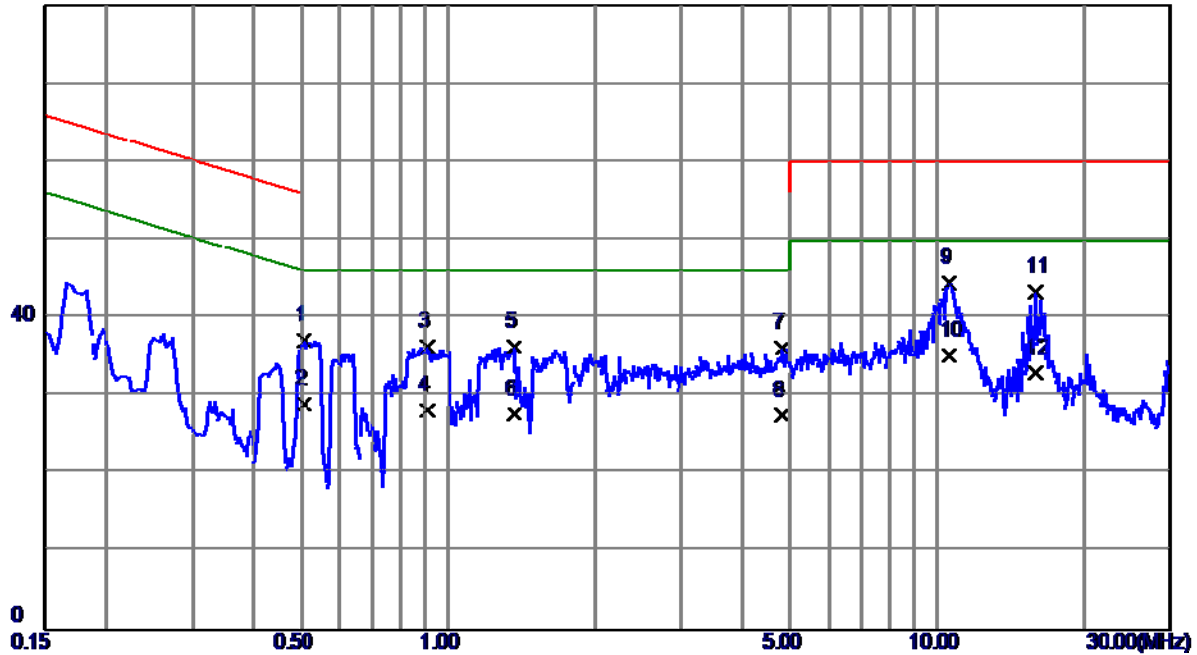

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.5060       | 27.42                    | 9.69                    | 37.11                   | 56.00         | -18.89       | QP       |
| 2    | 0.5060       | 19.30                    | 9.69                    | 28.99                   | 46.00         | -17.01       | AVG      |
| 3    | 0.9100       | 26.55                    | 9.83                    | 36.38                   | 56.00         | -19.62       | QP       |
| 4    | 0.9100       | 18.40                    | 9.83                    | 28.23                   | 46.00         | -17.77       | AVG      |
| 5    | 1.3660       | 26.41                    | 9.92                    | 36.33                   | 56.00         | -19.67       | QP       |
| 6    | 1.3660       | 17.81                    | 9.92                    | 27.73                   | 46.00         | -18.27       | AVG      |
| 7    | 4.8220       | 25.90                    | 10.27                   | 36.17                   | 56.00         | -19.83       | QP       |
| 8    | 4.8220       | 17.30                    | 10.27                   | 27.57                   | 46.00         | -18.43       | AVG      |
| 9    | 10.6020      | 34.01                    | 10.52                   | 44.53                   | 60.00         | -15.47       | QP       |
| 10 * | 10.6020      | 24.69                    | 10.52                   | 35.21                   | 50.00         | -14.79       | AVG      |
| 11   | 15.8820      | 32.59                    | 10.72                   | 43.31                   | 60.00         | -16.69       | QP       |
| 12   | 15.8820      | 22.30                    | 10.72                   | 33.02                   | 50.00         | -16.98       | AVG      |

|               |               |                   |         |
|---------------|---------------|-------------------|---------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3 |
| Temperature   | 23°C          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz  | Phase             | Neutral |
| Test Mode     | USB COPY+IDLE |                   |         |
| Note          | USB CABLE:PY  |                   |         |
| Test Engineer | Treyy Chen    |                   |         |


80 dBuV

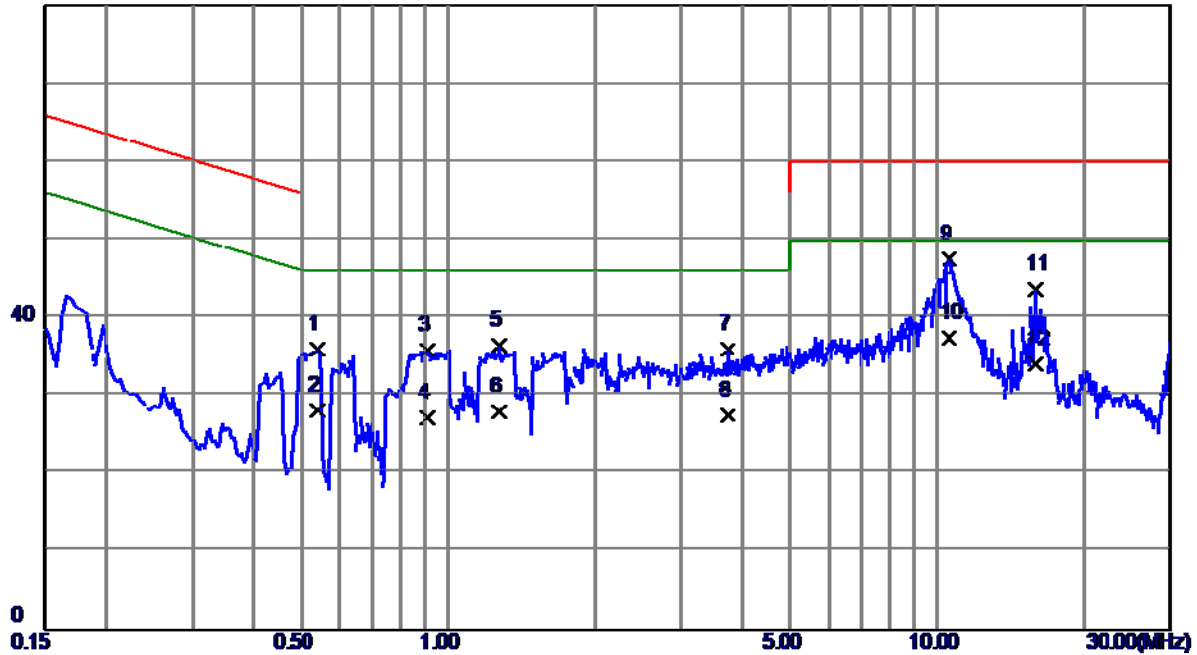

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.5420       | 26.51                    | 9.49                    | 36.00                   | 56.00         | -20.00       | QP       |
| 2   | 0.5420       | 18.60                    | 9.49                    | 28.09                   | 46.00         | -17.91       | AVG      |
| 3   | 0.9100       | 26.16                    | 9.73                    | 35.89                   | 56.00         | -20.11       | QP       |
| 4   | 0.9100       | 17.40                    | 9.73                    | 27.13                   | 46.00         | -18.87       | AVG      |
| 5   | 1.2740       | 26.71                    | 9.76                    | 36.47                   | 56.00         | -19.53       | QP       |
| 6   | 1.2740       | 18.30                    | 9.76                    | 28.06                   | 46.00         | -17.94       | AVG      |
| 7   | 3.7300       | 25.95                    | 10.05                   | 36.00                   | 56.00         | -20.00       | QP       |
| 8   | 3.7300       | 17.40                    | 10.05                   | 27.45                   | 46.00         | -18.55       | AVG      |
| 9 * | 10.6020      | 36.99                    | 10.60                   | 47.59                   | 60.00         | -12.41       | QP       |
| 10  | 10.6020      | 26.80                    | 10.60                   | 37.40                   | 50.00         | -12.60       | AVG      |
| 11  | 15.8740      | 33.02                    | 10.73                   | 43.75                   | 60.00         | -16.25       | QP       |
| 12  | 15.8740      | 23.41                    | 10.73                   | 34.14                   | 50.00         | -15.86       | AVG      |

|               |                                             |                   |         |
|---------------|---------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                        | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                | Phase             | Line    |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on          |                   |         |
| Note          | ADAPTER:BYD+USB CABLE:FF+BATTERY:SCUD(SONY) |                   |         |
| Test Engineer | Treey Chen                                  |                   |         |


80 dBuV

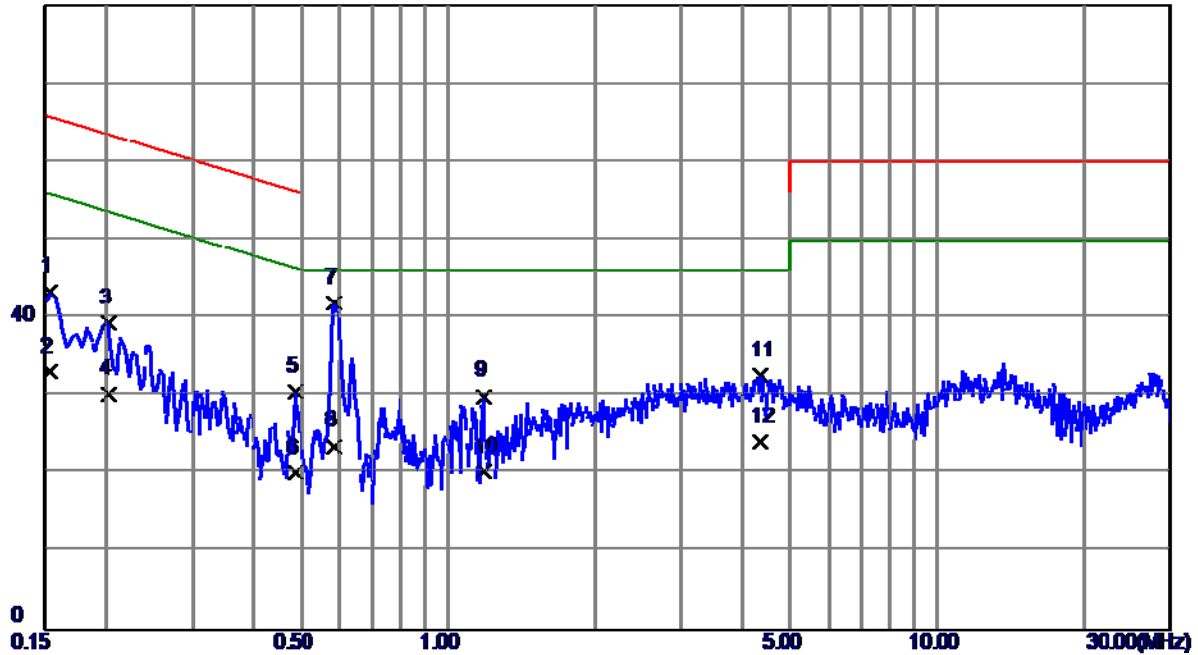

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 33.80                    | 9.57                    | 43.37                   | 65.79         | -22.42       | QP       |
| 2   | 0.1539       | 23.60                    | 9.57                    | 33.17                   | 55.79         | -22.62       | AVG      |
| 3   | 0.2020       | 29.80                    | 9.57                    | 39.37                   | 63.53         | -24.16       | QP       |
| 4   | 0.2020       | 20.70                    | 9.57                    | 30.27                   | 53.53         | -23.26       | AVG      |
| 5   | 0.4860       | 20.84                    | 9.67                    | 30.51                   | 56.24         | -25.73       | QP       |
| 6   | 0.4860       | 10.51                    | 9.67                    | 20.18                   | 46.24         | -26.06       | AVG      |
| 7 * | 0.5860       | 32.20                    | 9.70                    | 41.90                   | 56.00         | -14.10       | QP       |
| 8   | 0.5860       | 13.90                    | 9.70                    | 23.60                   | 46.00         | -22.40       | AVG      |
| 9   | 1.1820       | 20.15                    | 9.85                    | 30.00                   | 56.00         | -26.00       | QP       |
| 10  | 1.1820       | 10.40                    | 9.85                    | 20.25                   | 46.00         | -25.75       | AVG      |
| 11  | 4.3580       | 22.27                    | 10.34                   | 32.61                   | 56.00         | -23.39       | QP       |
| 12  | 4.3580       | 13.80                    | 10.34                   | 24.14                   | 46.00         | -21.86       | AVG      |

|               |                                             |                   |         |
|---------------|---------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                        | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                | Phase             | Neutral |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on          |                   |         |
| Note          | ADAPTER:BYD+USB CABLE:FF+BATTERY:SCUD(SONY) |                   |         |
| Test Engineer | Treey Chen                                  |                   |         |


80 dBuV

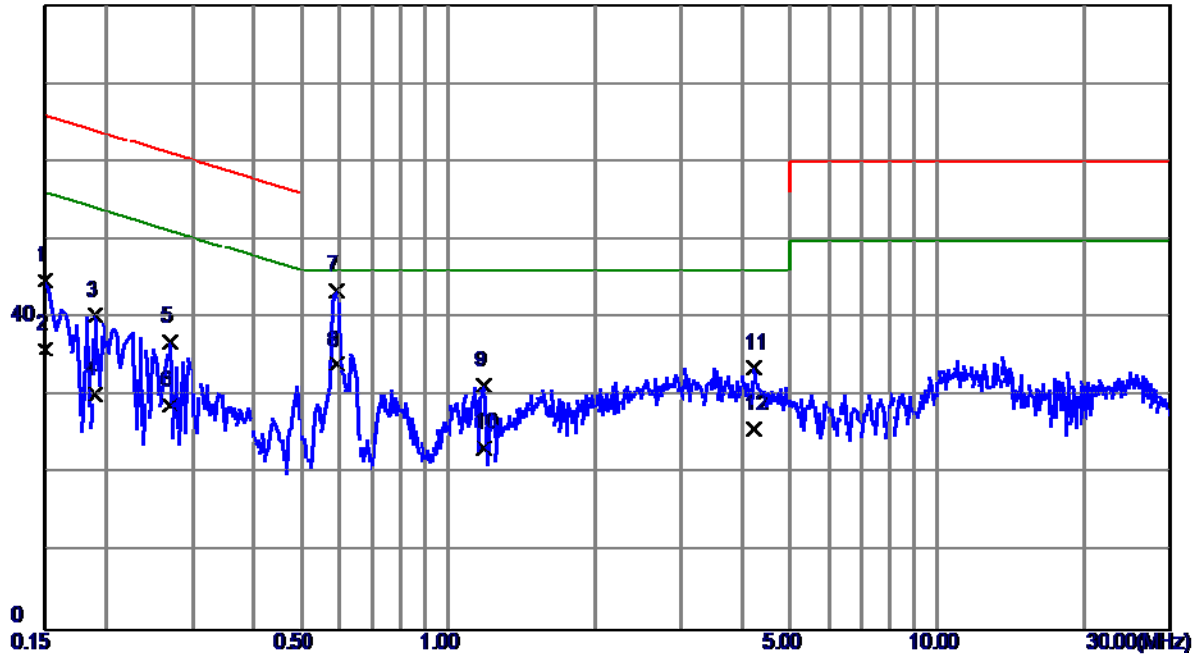

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 35.28                    | 9.57                    | 44.85                   | 66.00         | -21.15       | QP       |
| 2   | 0.1500       | 26.50                    | 9.57                    | 36.07                   | 56.00         | -19.93       | AVG      |
| 3   | 0.1900       | 30.84                    | 9.54                    | 40.38                   | 64.04         | -23.66       | QP       |
| 4   | 0.1900       | 20.70                    | 9.54                    | 30.24                   | 54.04         | -23.80       | AVG      |
| 5   | 0.2700       | 27.32                    | 9.57                    | 36.89                   | 61.12         | -24.23       | QP       |
| 6   | 0.2700       | 19.30                    | 9.57                    | 28.87                   | 51.12         | -22.25       | AVG      |
| 7   | 0.5899       | 34.03                    | 9.50                    | 43.53                   | 56.00         | -12.47       | QP       |
| 8 * | 0.5899       | 24.50                    | 9.50                    | 34.00                   | 46.00         | -12.00       | AVG      |
| 9   | 1.1860       | 21.55                    | 9.75                    | 31.30                   | 56.00         | -24.70       | QP       |
| 10  | 1.1860       | 13.60                    | 9.75                    | 23.35                   | 46.00         | -22.65       | AVG      |
| 11  | 4.2260       | 23.55                    | 10.12                   | 33.67                   | 56.00         | -22.33       | QP       |
| 12  | 4.2260       | 15.70                    | 10.12                   | 25.82                   | 46.00         | -20.18       | AVG      |


|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                           | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Line    |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on             |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:DESAY(LG) |                   |         |
| Test Engineer | Treey Chen                                     |                   |         |

80 dBuV

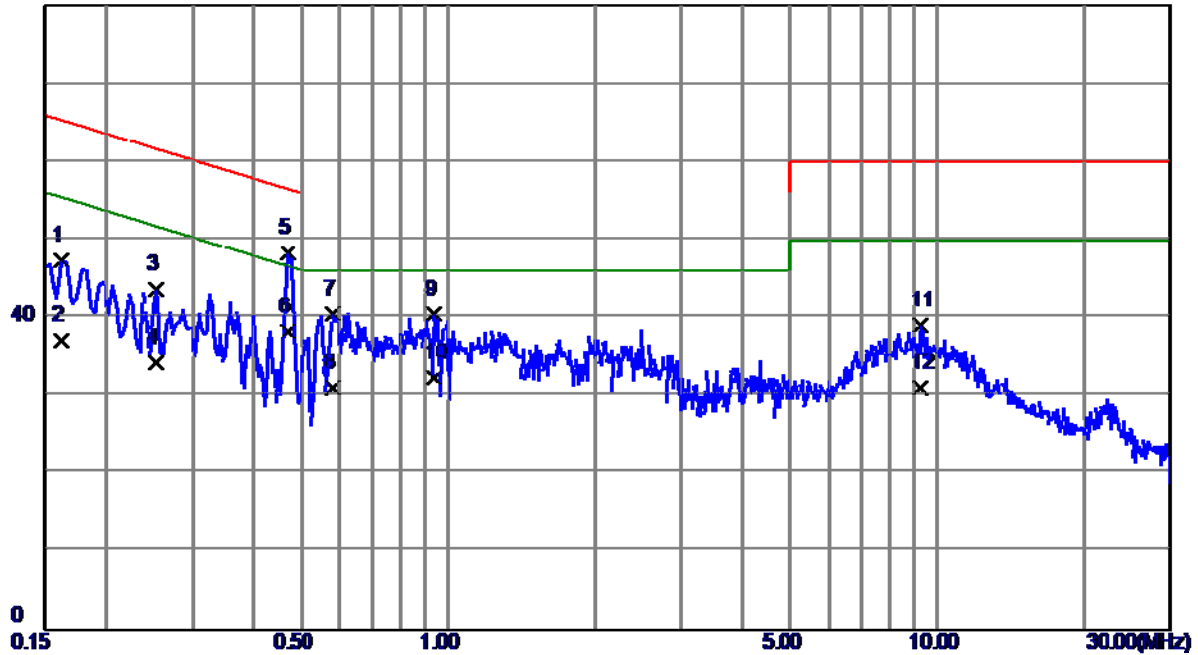


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1620       | 37.76                    | 9.57                    | 47.33                   | 65.36         | -18.03       | QP       |
| 2   | 0.1620       | 27.60                    | 9.57                    | 37.17                   | 55.36         | -18.19       | AVG      |
| 3   | 0.2540       | 34.09                    | 9.57                    | 43.66                   | 61.63         | -17.97       | QP       |
| 4   | 0.2540       | 24.60                    | 9.57                    | 34.17                   | 51.63         | -17.46       | AVG      |
| 5 * | 0.4700       | 38.61                    | 9.66                    | 48.27                   | 56.51         | -8.24        | QP       |
| 6   | 0.4700       | 28.60                    | 9.66                    | 38.26                   | 46.51         | -8.25        | AVG      |
| 7   | 0.5820       | 30.80                    | 9.70                    | 40.50                   | 56.00         | -15.50       | QP       |
| 8   | 0.5820       | 21.40                    | 9.70                    | 31.10                   | 46.00         | -14.90       | AVG      |
| 9   | 0.9380       | 30.58                    | 9.83                    | 40.41                   | 56.00         | -15.59       | QP       |
| 10  | 0.9380       | 22.50                    | 9.83                    | 32.33                   | 46.00         | -13.67       | AVG      |
| 11  | 9.2660       | 28.61                    | 10.47                   | 39.08                   | 60.00         | -20.92       | QP       |
| 12  | 9.2660       | 20.50                    | 10.47                   | 30.97                   | 50.00         | -19.03       | AVG      |

|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                           | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Neutral |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on             |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:DESAY(LG) |                   |         |
| Test Engineer | Treey Chen                                     |                   |         |

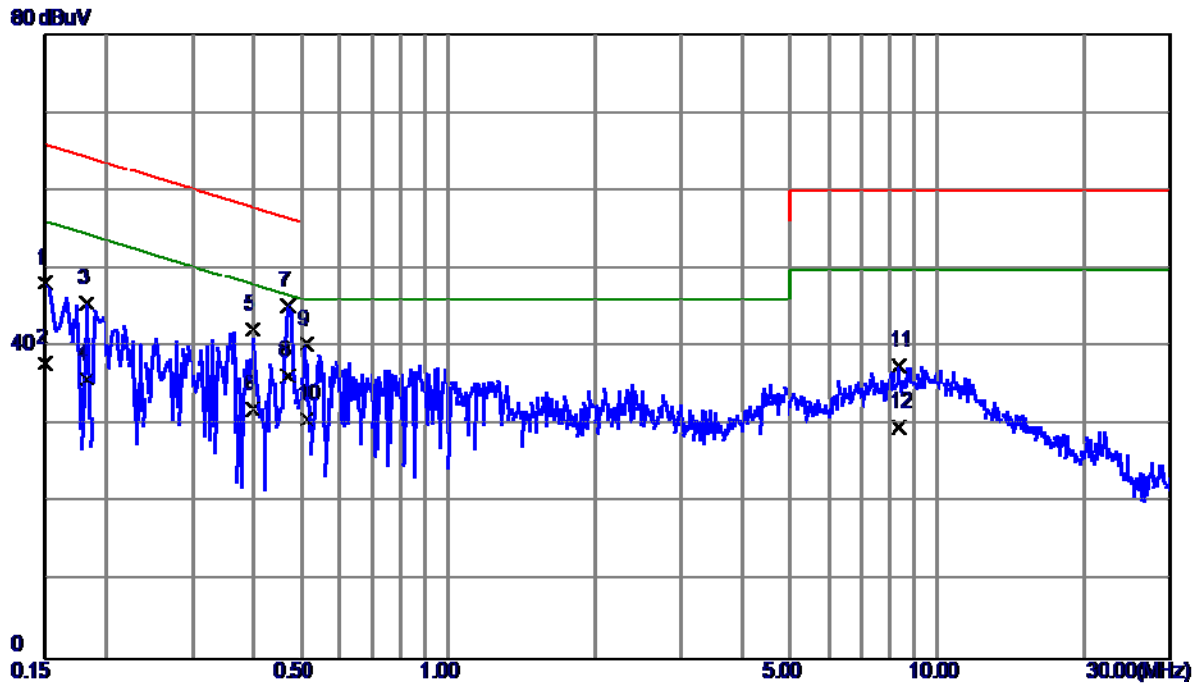


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 38.57                    | 9.57                    | 48.14                   | 66.00         | -17.86       | QP       |
| 2   | 0.1500       | 28.30                    | 9.57                    | 37.87                   | 56.00         | -18.13       | AVG      |
| 3   | 0.1819       | 36.14                    | 9.51                    | 45.65                   | 64.40         | -18.75       | QP       |
| 4   | 0.1819       | 26.40                    | 9.51                    | 35.91                   | 54.40         | -18.49       | AVG      |
| 5   | 0.3980       | 32.80                    | 9.49                    | 42.29                   | 57.90         | -15.61       | QP       |
| 6   | 0.3980       | 22.49                    | 9.49                    | 31.98                   | 47.90         | -15.92       | AVG      |
| 7   | 0.4700       | 35.86                    | 9.49                    | 45.35                   | 56.51         | -11.16       | QP       |
| 8 * | 0.4700       | 26.80                    | 9.49                    | 36.29                   | 46.51         | -10.22       | AVG      |
| 9   | 0.5140       | 30.86                    | 9.49                    | 40.35                   | 56.00         | -15.65       | QP       |
| 10  | 0.5140       | 21.30                    | 9.49                    | 30.79                   | 46.00         | -15.21       | AVG      |
| 11  | 8.3540       | 27.21                    | 10.38                   | 37.59                   | 60.00         | -22.41       | QP       |
| 12  | 8.3540       | 19.40                    | 10.38                   | 29.78                   | 50.00         | -20.22       | AVG      |

|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                           | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Line    |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on             |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SCUD(ATL) |                   |         |
| Test Engineer | Treey Chen                                     |                   |         |

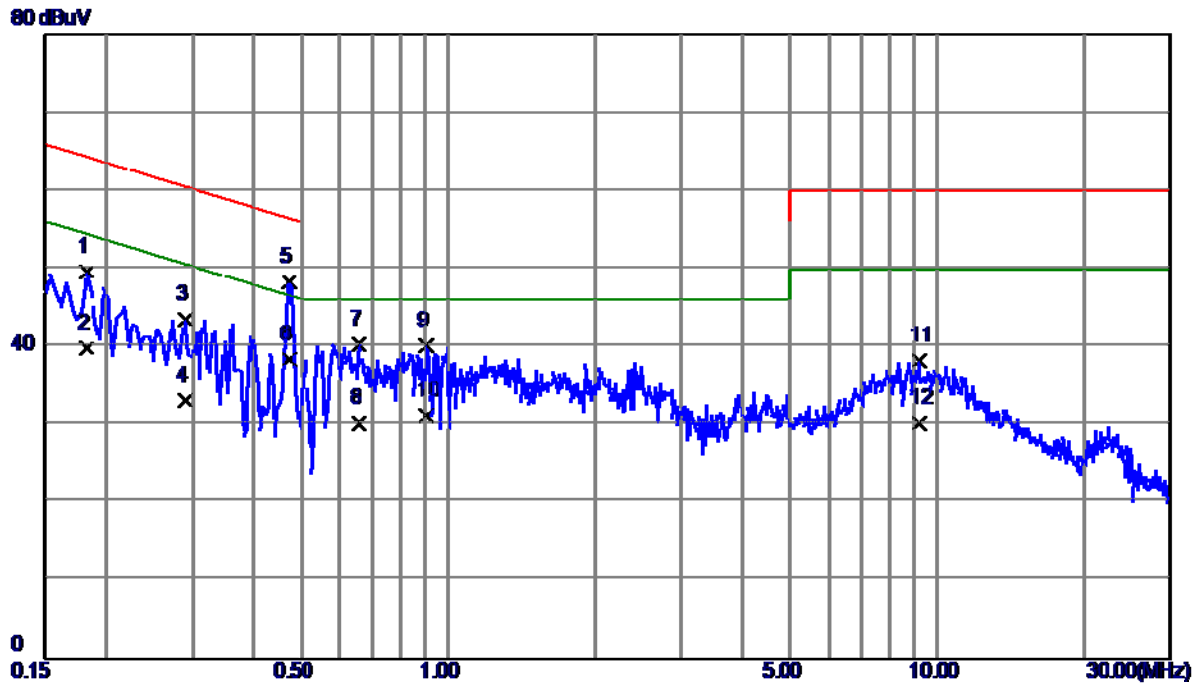


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1819       | 40.02                    | 9.57                    | 49.59                   | 64.40         | -14.81       | QP       |
| 2   | 0.1819       | 30.20                    | 9.57                    | 39.77                   | 54.40         | -14.63       | AVG      |
| 3   | 0.2900       | 33.93                    | 9.58                    | 43.51                   | 60.52         | -17.01       | QP       |
| 4   | 0.2900       | 23.60                    | 9.58                    | 33.18                   | 50.52         | -17.34       | AVG      |
| 5   | 0.4740       | 38.66                    | 9.66                    | 48.32                   | 56.44         | -8.12        | QP       |
| 6 * | 0.4740       | 28.70                    | 9.66                    | 38.36                   | 46.44         | -8.08        | AVG      |
| 7   | 0.6580       | 30.62                    | 9.71                    | 40.33                   | 56.00         | -15.67       | QP       |
| 8   | 0.6580       | 20.60                    | 9.71                    | 30.31                   | 46.00         | -15.69       | AVG      |
| 9   | 0.9060       | 30.33                    | 9.83                    | 40.16                   | 56.00         | -15.84       | QP       |
| 10  | 0.9060       | 21.40                    | 9.83                    | 31.23                   | 46.00         | -14.77       | AVG      |
| 11  | 9.1740       | 27.82                    | 10.47                   | 38.29                   | 60.00         | -21.71       | QP       |
| 12  | 9.1740       | 19.70                    | 10.47                   | 30.17                   | 50.00         | -19.83       | AVG      |

|               |                                                |                   |         |
|---------------|------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                    | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                           | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                   | Phase             | Neutral |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on             |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SCUD(ATL) |                   |         |
| Test Engineer | Treey Chen                                     |                   |         |

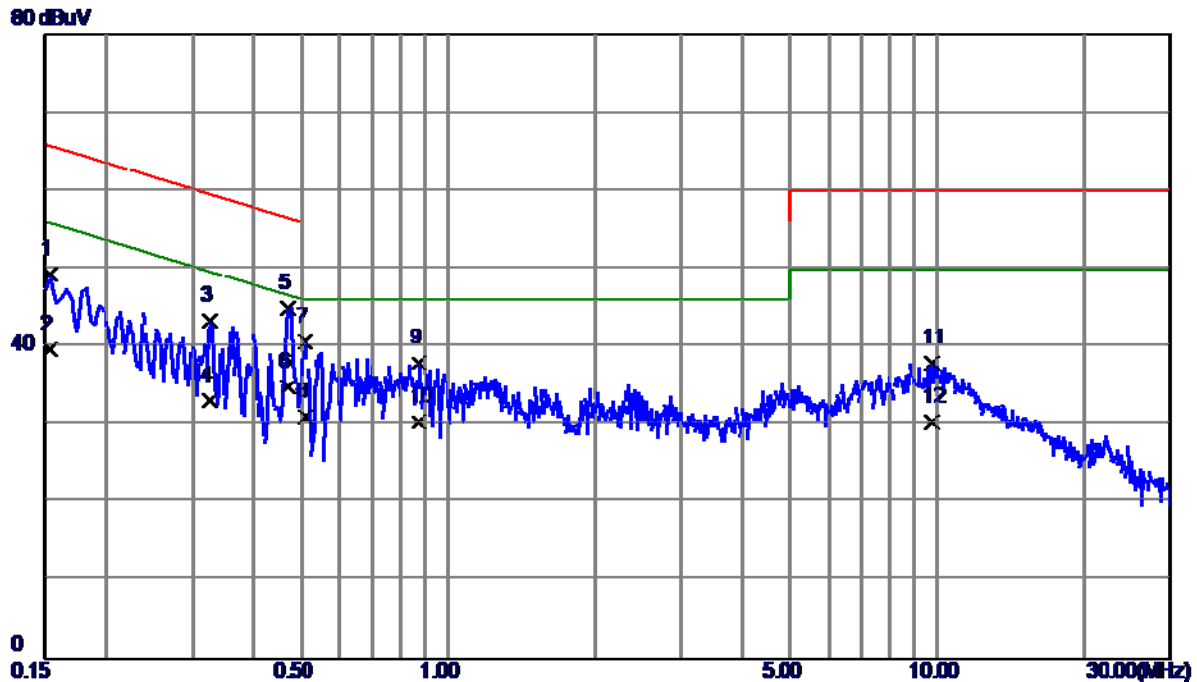


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 39.74                    | 9.55                    | 49.29                   | 65.79         | -16.50       | QP       |
| 2   | 0.1539       | 30.20                    | 9.55                    | 39.75                   | 55.79         | -16.04       | AVG      |
| 3   | 0.3260       | 33.76                    | 9.58                    | 43.34                   | 59.55         | -16.21       | QP       |
| 4   | 0.3260       | 23.50                    | 9.58                    | 33.08                   | 49.55         | -16.47       | AVG      |
| 5 * | 0.4700       | 35.53                    | 9.49                    | 45.02                   | 56.51         | -11.49       | QP       |
| 6   | 0.4700       | 25.40                    | 9.49                    | 34.89                   | 46.51         | -11.62       | AVG      |
| 7   | 0.5100       | 31.17                    | 9.49                    | 40.66                   | 56.00         | -15.34       | QP       |
| 8   | 0.5100       | 21.60                    | 9.49                    | 31.09                   | 46.00         | -14.91       | AVG      |
| 9   | 0.8740       | 28.27                    | 9.70                    | 37.97                   | 56.00         | -18.03       | QP       |
| 10  | 0.8740       | 20.70                    | 9.70                    | 30.40                   | 46.00         | -15.60       | AVG      |
| 11  | 9.7460       | 27.41                    | 10.56                   | 37.97                   | 60.00         | -22.03       | QP       |
| 12  | 9.7460       | 19.79                    | 10.56                   | 30.35                   | 50.00         | -19.65       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on                |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

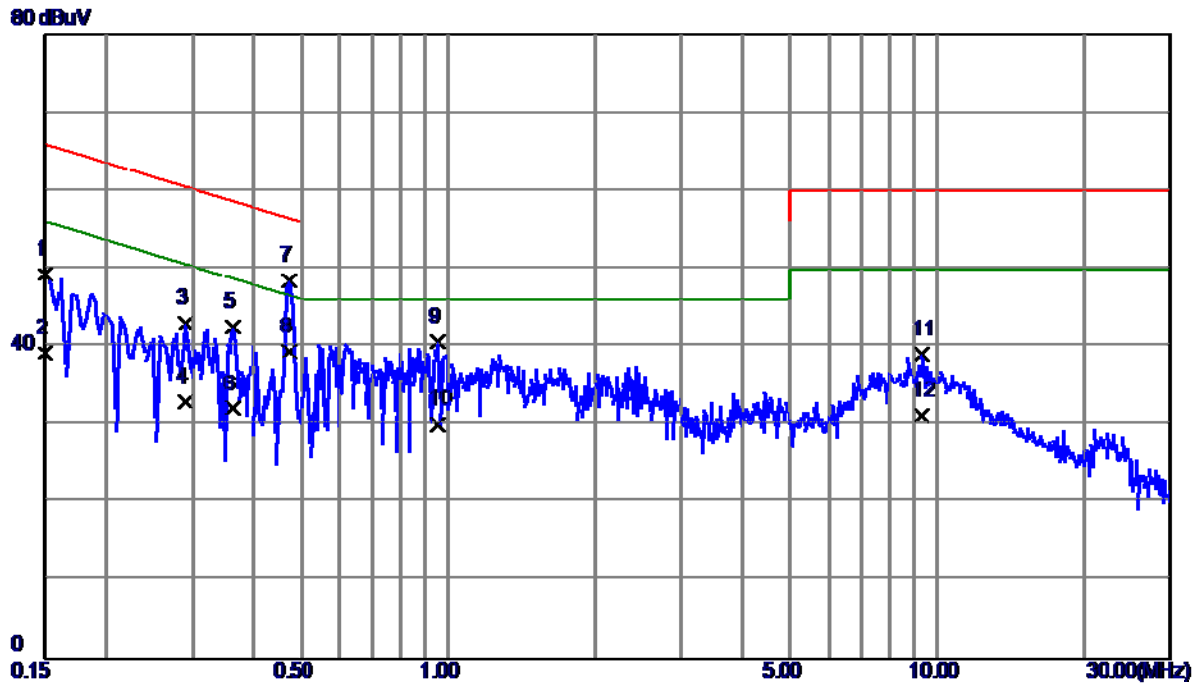


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 39.73                    | 9.57                    | 49.30                   | 66.00         | -16.70       | QP       |
| 2   | 0.1500       | 29.60                    | 9.57                    | 39.17                   | 56.00         | -16.83       | AVG      |
| 3   | 0.2900       | 33.42                    | 9.58                    | 43.00                   | 60.52         | -17.52       | QP       |
| 4   | 0.2900       | 23.40                    | 9.58                    | 32.98                   | 50.52         | -17.54       | AVG      |
| 5   | 0.3620       | 32.97                    | 9.58                    | 42.55                   | 58.68         | -16.13       | QP       |
| 6   | 0.3620       | 22.50                    | 9.58                    | 32.08                   | 48.68         | -16.60       | AVG      |
| 7   | 0.4740       | 38.80                    | 9.66                    | 48.46                   | 56.44         | -7.98        | QP       |
| 8 * | 0.4740       | 29.70                    | 9.66                    | 39.36                   | 46.44         | -7.08        | AVG      |
| 9   | 0.9540       | 30.87                    | 9.84                    | 40.71                   | 56.00         | -15.29       | QP       |
| 10  | 0.9540       | 20.30                    | 9.84                    | 30.14                   | 46.00         | -15.86       | AVG      |
| 11  | 9.3100       | 28.55                    | 10.47                   | 39.02                   | 60.00         | -20.98       | QP       |
| 12  | 9.3100       | 20.70                    | 10.47                   | 31.17                   | 50.00         | -18.83       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on                |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

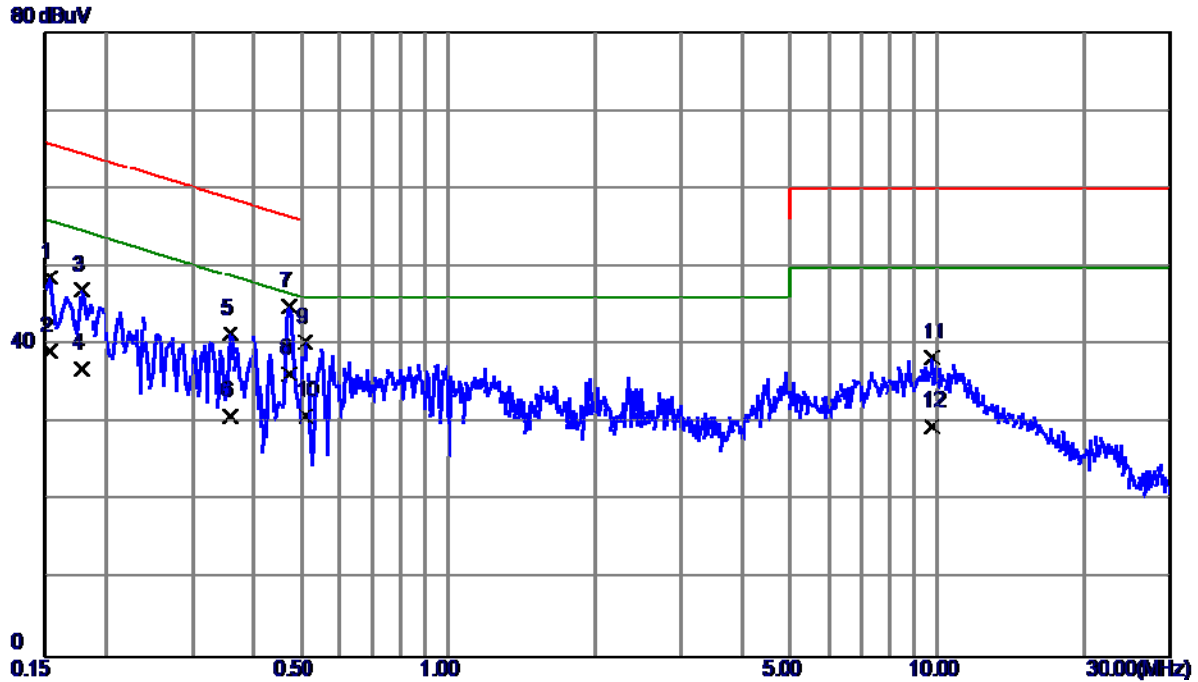


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 39.05                    | 9.55                    | 48.60                   | 65.79         | -17.19       | QP       |
| 2   | 0.1539       | 29.60                    | 9.55                    | 39.15                   | 55.79         | -16.64       | AVG      |
| 3   | 0.1780       | 37.58                    | 9.50                    | 47.08                   | 64.58         | -17.50       | QP       |
| 4   | 0.1780       | 27.40                    | 9.50                    | 36.90                   | 54.58         | -17.68       | AVG      |
| 5   | 0.3580       | 31.89                    | 9.56                    | 41.45                   | 58.77         | -17.32       | QP       |
| 6   | 0.3580       | 21.30                    | 9.56                    | 30.86                   | 48.77         | -17.91       | AVG      |
| 7   | 0.4740       | 35.46                    | 9.49                    | 44.95                   | 56.44         | -11.49       | QP       |
| 8 * | 0.4740       | 26.80                    | 9.49                    | 36.29                   | 46.44         | -10.15       | AVG      |
| 9   | 0.5100       | 30.80                    | 9.49                    | 40.29                   | 56.00         | -15.71       | QP       |
| 10  | 0.5100       | 21.40                    | 9.49                    | 30.89                   | 46.00         | -15.11       | AVG      |
| 11  | 9.7340       | 27.85                    | 10.56                   | 38.41                   | 60.00         | -21.59       | QP       |
| 12  | 9.7340       | 18.99                    | 10.56                   | 29.55                   | 50.00         | -20.45       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Playing+Speaker                           |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

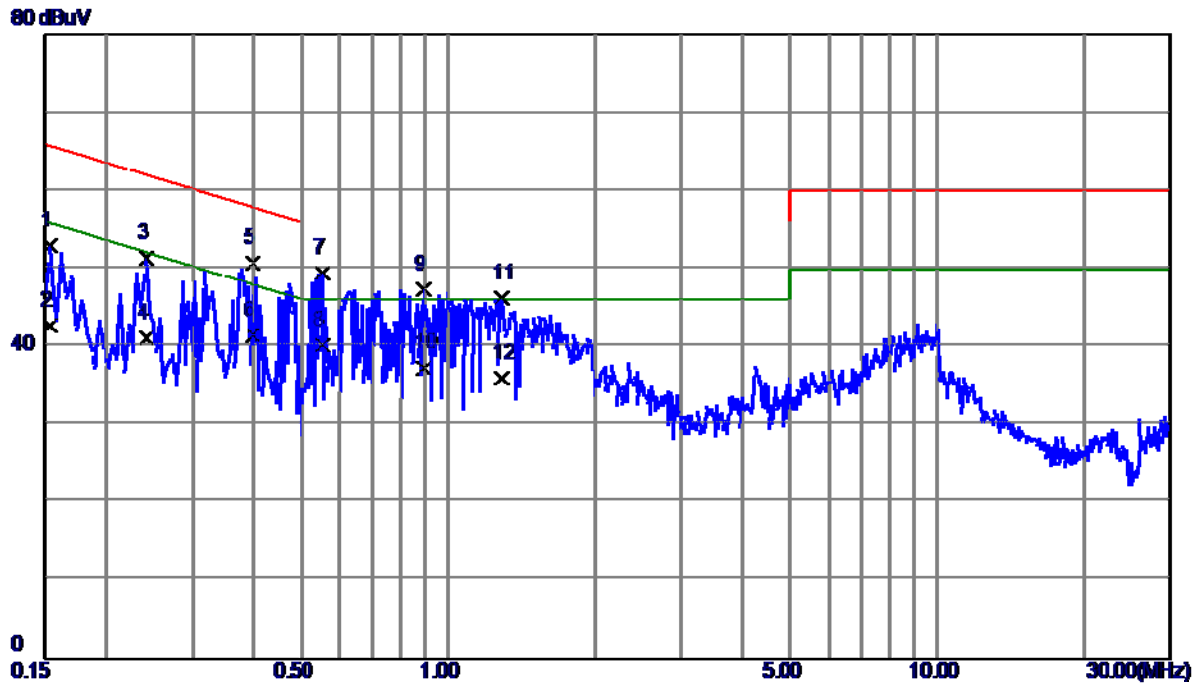


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 43.34                    | 9.57                    | 52.91                   | 65.79         | -12.88       | QP       |
| 2   | 0.1539       | 33.20                    | 9.57                    | 42.77                   | 55.79         | -13.02       | AVG      |
| 3   | 0.2420       | 41.79                    | 9.57                    | 51.36                   | 62.03         | -10.67       | QP       |
| 4   | 0.2420       | 31.50                    | 9.57                    | 41.07                   | 52.03         | -10.96       | AVG      |
| 5   | 0.3980       | 41.11                    | 9.58                    | 50.69                   | 57.90         | -7.21        | QP       |
| 6   | 0.3980       | 31.80                    | 9.58                    | 41.38                   | 47.90         | -6.52        | AVG      |
| 7   | 0.5540       | 39.71                    | 9.70                    | 49.41                   | 56.00         | -6.59        | QP       |
| 8 * | 0.5540       | 30.50                    | 9.70                    | 40.20                   | 46.00         | -5.80        | AVG      |
| 9   | 0.8940       | 37.57                    | 9.83                    | 47.40                   | 56.00         | -8.60        | QP       |
| 10  | 0.8940       | 27.40                    | 9.83                    | 37.23                   | 46.00         | -8.77        | AVG      |
| 11  | 1.2860       | 36.42                    | 9.89                    | 46.31                   | 56.00         | -9.69        | QP       |
| 12  | 1.2860       | 26.10                    | 9.89                    | 35.99                   | 46.00         | -10.01       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Playing+Speaker                           |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treedy Chen                                       |                   |         |

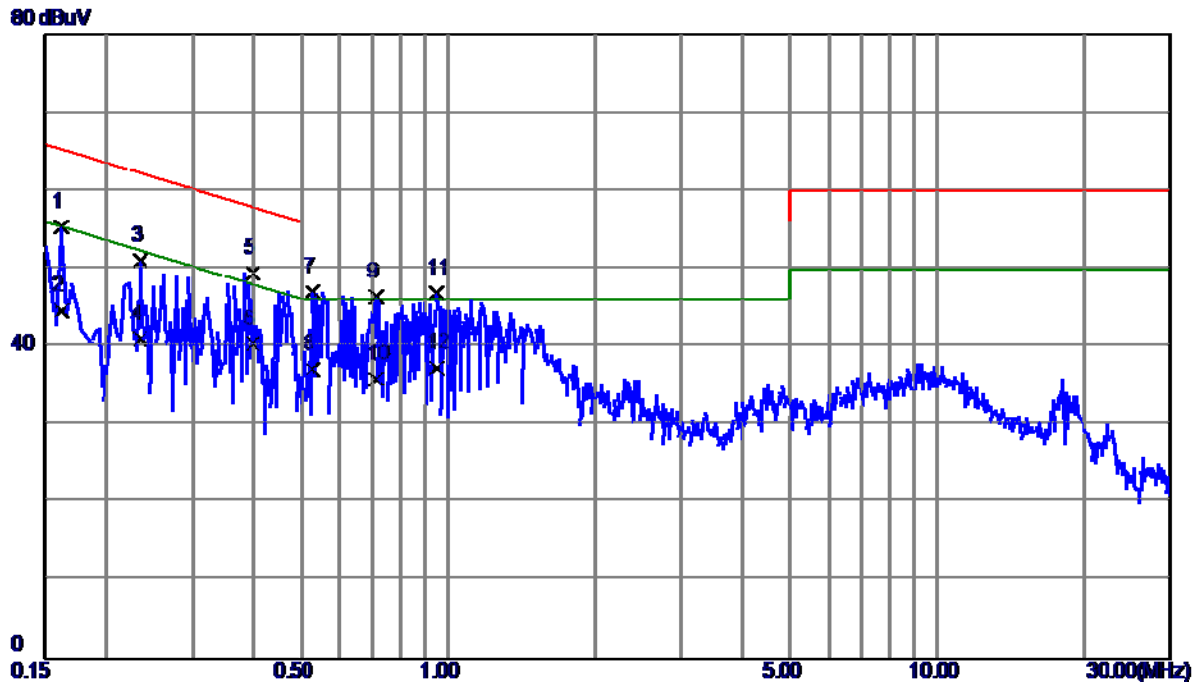


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1620       | 45.81                    | 9.51                    | 55.32                   | 65.36         | -10.04       | QP       |
| 2   | 0.1620       | 35.20                    | 9.51                    | 44.71                   | 55.36         | -10.65       | AVG      |
| 3   | 0.2340       | 41.52                    | 9.57                    | 51.09                   | 62.31         | -11.22       | QP       |
| 4   | 0.2340       | 31.40                    | 9.57                    | 40.97                   | 52.31         | -11.34       | AVG      |
| 5   | 0.3980       | 39.99                    | 9.49                    | 49.48                   | 57.90         | -8.42        | QP       |
| 6 * | 0.3980       | 30.79                    | 9.49                    | 40.28                   | 47.90         | -7.62        | AVG      |
| 7   | 0.5299       | 37.60                    | 9.49                    | 47.09                   | 56.00         | -8.91        | QP       |
| 8   | 0.5299       | 27.60                    | 9.49                    | 37.09                   | 46.00         | -8.91        | AVG      |
| 9   | 0.7140       | 36.91                    | 9.53                    | 46.44                   | 56.00         | -9.56        | QP       |
| 10  | 0.7140       | 26.29                    | 9.53                    | 35.82                   | 46.00         | -10.18       | AVG      |
| 11  | 0.9460       | 37.20                    | 9.73                    | 46.93                   | 56.00         | -9.07        | QP       |
| 12  | 0.9460       | 27.60                    | 9.73                    | 37.33                   | 46.00         | -8.67        | AVG      |

|               |                                               |                   |         |
|---------------|-----------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                  | Phase             | Line    |
| Test Mode     | Adapter+Playing+Earphone                      |                   |         |
| Note          | ADAPTER:SALCOMP+USB                           |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:GOERTEK |                   |         |
| Test Engineer | Treey Chen                                    |                   |         |

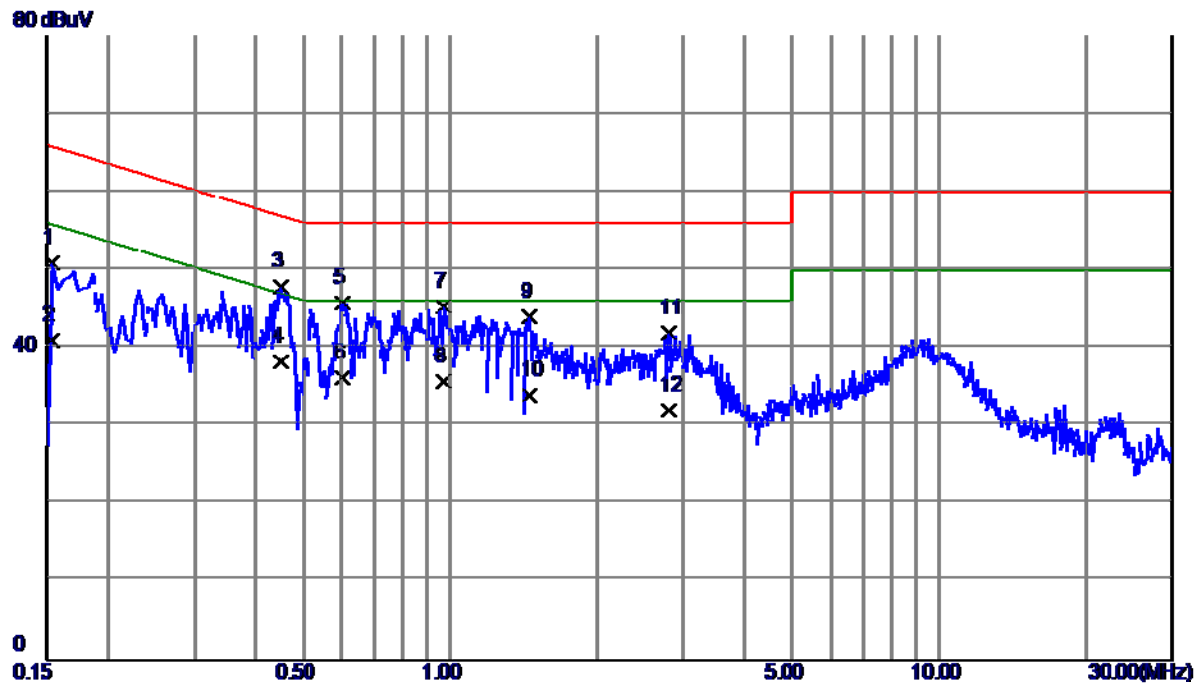


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 41.24                    | 9.57                    | 50.81                   | 65.79         | -14.98       | QP       |
| 2   | 0.1539       | 31.40                    | 9.57                    | 40.97                   | 55.79         | -14.82       | AVG      |
| 3   | 0.4500       | 38.26                    | 9.64                    | 47.90                   | 56.88         | -8.98        | QP       |
| 4 * | 0.4500       | 28.60                    | 9.64                    | 38.24                   | 46.88         | -8.64        | AVG      |
| 5   | 0.6020       | 36.10                    | 9.70                    | 45.80                   | 56.00         | -10.20       | QP       |
| 6   | 0.6020       | 26.40                    | 9.70                    | 36.10                   | 46.00         | -9.90        | AVG      |
| 7   | 0.9700       | 35.41                    | 9.84                    | 45.25                   | 56.00         | -10.75       | QP       |
| 8   | 0.9700       | 25.80                    | 9.84                    | 35.64                   | 46.00         | -10.36       | AVG      |
| 9   | 1.4540       | 34.05                    | 9.96                    | 44.01                   | 56.00         | -11.99       | QP       |
| 10  | 1.4540       | 23.99                    | 9.96                    | 33.95                   | 46.00         | -12.05       | AVG      |
| 11  | 2.7940       | 31.65                    | 10.25                   | 41.90                   | 56.00         | -14.10       | QP       |
| 12  | 2.7940       | 21.80                    | 10.25                   | 32.05                   | 46.00         | -13.95       | AVG      |

|               |                                               |                   |         |
|---------------|-----------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                          | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                  | Phase             | Neutral |
| Test Mode     | Adapter+Playing+Earpone                       |                   |         |
| Note          | ADAPTER:SALCOMP+USB                           |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:GOERTEK |                   |         |
| Test Engineer | Treey Chen                                    |                   |         |

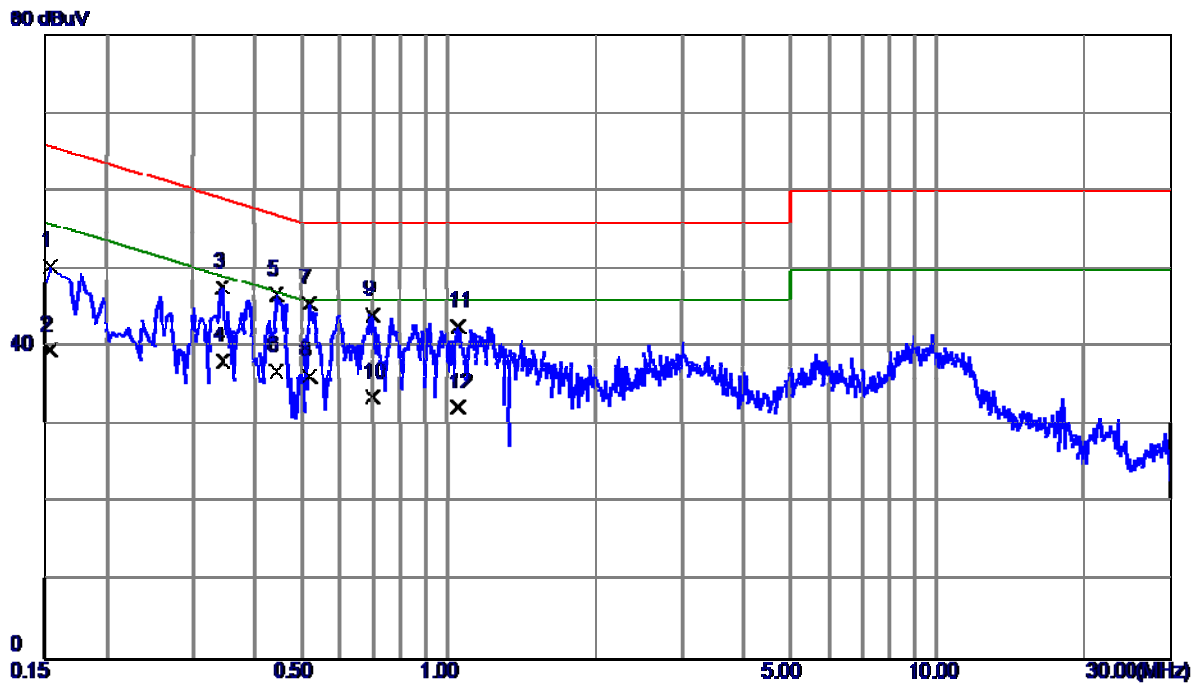


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 40.92                    | 9.55                    | 50.47                   | 65.79         | -15.32       | QP       |
| 2   | 0.1539       | 30.20                    | 9.55                    | 39.75                   | 55.79         | -16.04       | AVG      |
| 3   | 0.3460       | 38.14                    | 9.58                    | 47.72                   | 59.06         | -11.34       | QP       |
| 4   | 0.3460       | 28.60                    | 9.58                    | 38.18                   | 49.06         | -10.88       | AVG      |
| 5   | 0.4460       | 37.23                    | 9.49                    | 46.72                   | 56.95         | -10.23       | QP       |
| 6   | 0.4460       | 27.40                    | 9.49                    | 36.89                   | 46.95         | -10.06       | AVG      |
| 7   | 0.5180       | 36.15                    | 9.49                    | 45.64                   | 56.00         | -10.36       | QP       |
| 8 * | 0.5180       | 26.90                    | 9.49                    | 36.39                   | 46.00         | -9.61        | AVG      |
| 9   | 0.7019       | 34.67                    | 9.51                    | 44.18                   | 56.00         | -11.82       | QP       |
| 10  | 0.7019       | 24.10                    | 9.51                    | 33.61                   | 46.00         | -12.39       | AVG      |
| 11  | 1.0500       | 32.93                    | 9.74                    | 42.67                   | 56.00         | -13.33       | QP       |
| 12  | 1.0500       | 22.60                    | 9.74                    | 32.34                   | 46.00         | -13.66       | AVG      |

|               |                                             |                   |         |
|---------------|---------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                        | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                | Phase             | Line    |
| Test Mode     | Adapter+Playing+Earpone                     |                   |         |
| Note          | ADAPTER:SALCOMP+USB                         |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:MERRY |                   |         |
| Test Engineer | Treey Chen                                  |                   |         |

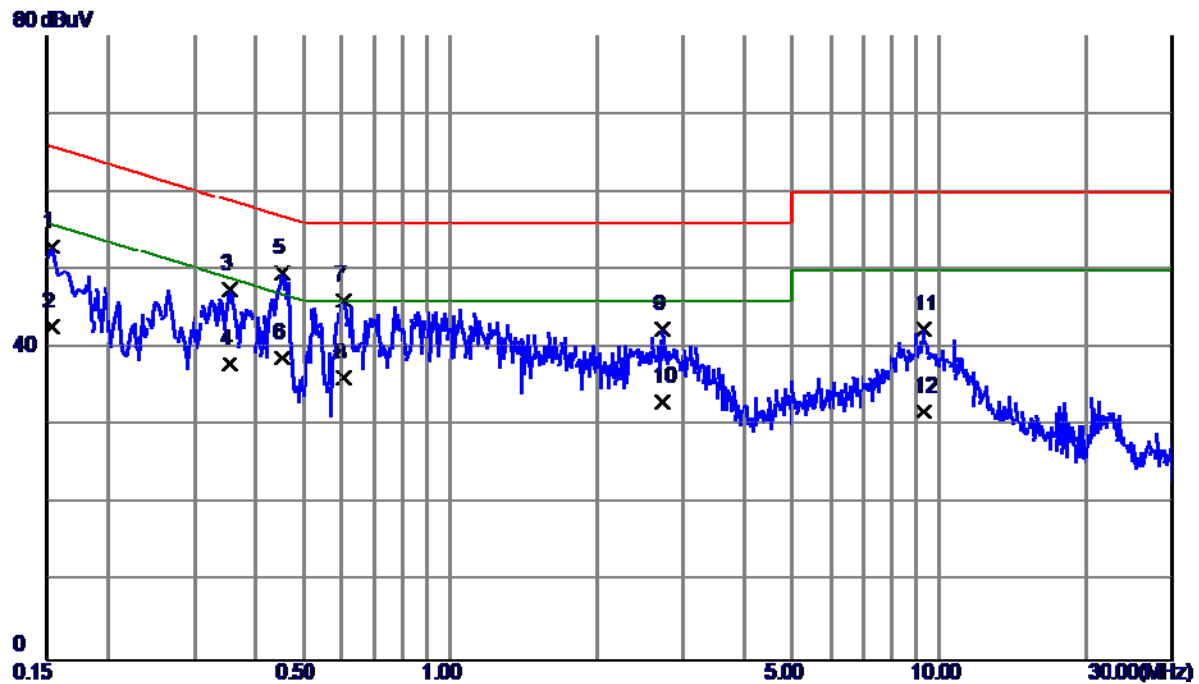


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 43.32                    | 9.57                    | 52.89                   | 65.79         | -12.90       | QP       |
| 2   | 0.1539       | 33.20                    | 9.57                    | 42.77                   | 55.79         | -13.02       | AVG      |
| 3   | 0.3540       | 38.00                    | 9.58                    | 47.58                   | 58.87         | -11.29       | QP       |
| 4   | 0.3540       | 28.40                    | 9.58                    | 37.98                   | 48.87         | -10.89       | AVG      |
| 5 * | 0.4540       | 39.89                    | 9.64                    | 49.53                   | 56.80         | -7.27        | QP       |
| 6   | 0.4540       | 29.10                    | 9.64                    | 38.74                   | 46.80         | -8.06        | AVG      |
| 7   | 0.6060       | 36.32                    | 9.70                    | 46.02                   | 56.00         | -9.98        | QP       |
| 8   | 0.6060       | 26.40                    | 9.70                    | 36.10                   | 46.00         | -9.90        | AVG      |
| 9   | 2.7180       | 32.16                    | 10.25                   | 42.41                   | 56.00         | -13.59       | QP       |
| 10  | 2.7180       | 22.80                    | 10.25                   | 33.05                   | 46.00         | -12.95       | AVG      |
| 11  | 9.2940       | 31.93                    | 10.47                   | 42.40                   | 60.00         | -17.60       | QP       |
| 12  | 9.2940       | 21.40                    | 10.47                   | 31.87                   | 50.00         | -18.13       | AVG      |

|               |                                             |                   |         |
|---------------|---------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                        | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                | Phase             | Neutral |
| Test Mode     | Adapter+Playing+Earpone                     |                   |         |
| Note          | ADAPTER:SALCOMP+USB                         |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:MERRY |                   |         |
| Test Engineer | Treey Chen                                  |                   |         |

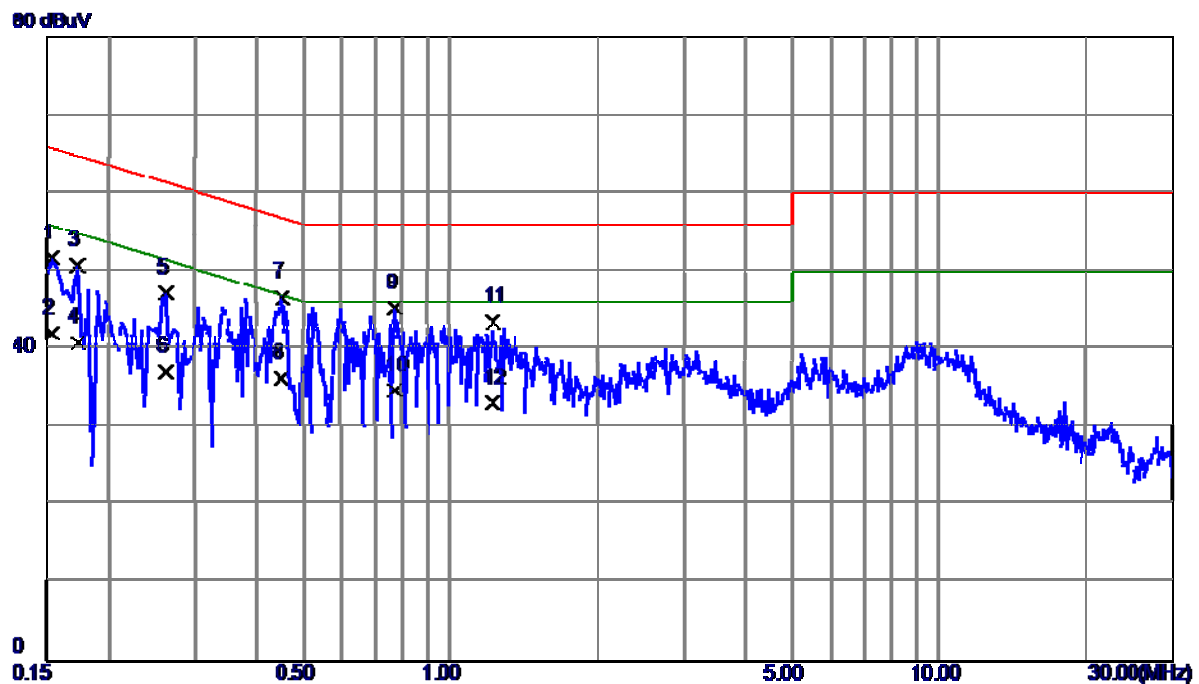


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 42.15                    | 9.55                    | 51.70                   | 65.79         | -14.09       | QP       |
| 2   | 0.1539       | 32.50                    | 9.55                    | 42.05                   | 55.79         | -13.74       | AVG      |
| 3   | 0.1740       | 41.19                    | 9.48                    | 50.67                   | 64.77         | -14.10       | QP       |
| 4   | 0.1740       | 31.40                    | 9.48                    | 40.88                   | 54.77         | -13.89       | AVG      |
| 5   | 0.2620       | 37.56                    | 9.57                    | 47.13                   | 61.37         | -14.24       | QP       |
| 6   | 0.2620       | 27.60                    | 9.57                    | 37.17                   | 51.37         | -14.20       | AVG      |
| 7 * | 0.4540       | 37.15                    | 9.49                    | 46.64                   | 56.80         | -10.16       | QP       |
| 8   | 0.4540       | 26.80                    | 9.49                    | 36.29                   | 46.80         | -10.51       | AVG      |
| 9   | 0.7740       | 35.66                    | 9.59                    | 45.25                   | 56.00         | -10.75       | QP       |
| 10  | 0.7740       | 25.10                    | 9.59                    | 34.69                   | 46.00         | -11.31       | AVG      |
| 11  | 1.2260       | 33.69                    | 9.76                    | 43.45                   | 56.00         | -12.55       | QP       |
| 12  | 1.2260       | 23.40                    | 9.76                    | 33.16                   | 46.00         | -12.84       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Playing+Earpone                           |                   |         |
| Note          | ADAPTER:SALCOMP+USB                               |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:LIAN CHUANG |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

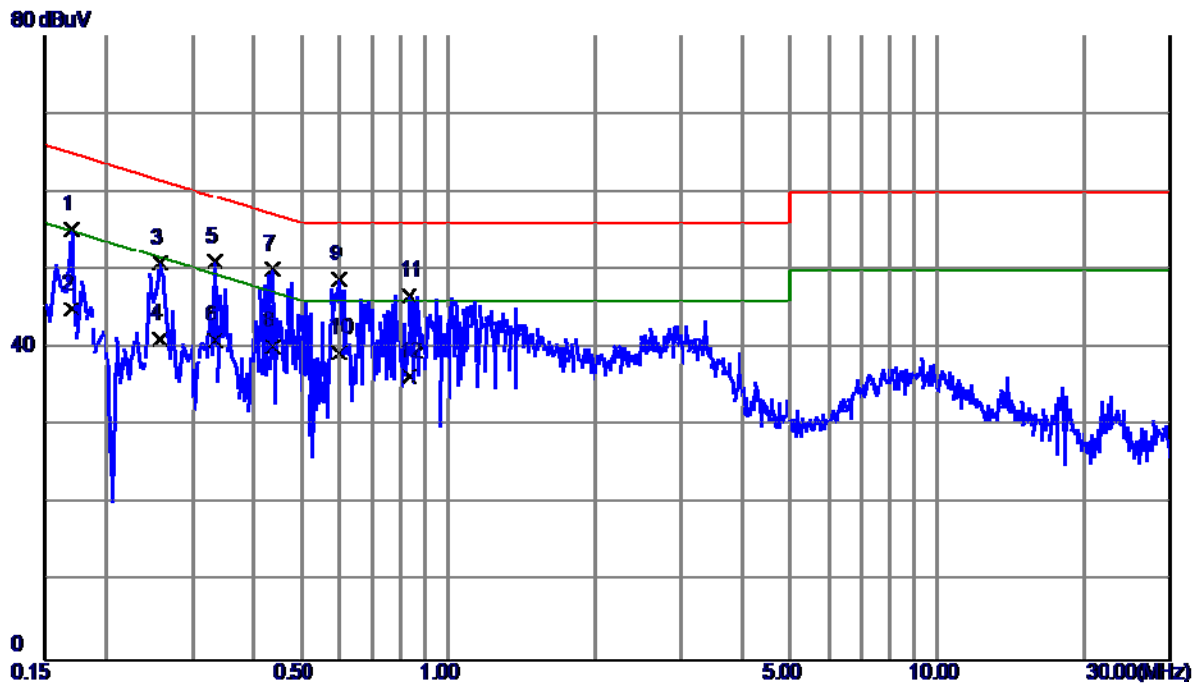


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1700       | 45.65                    | 9.57                    | 55.22                   | 64.96         | -9.74        | QP       |
| 2    | 0.1700       | 35.40                    | 9.57                    | 44.97                   | 54.96         | -9.99        | AVG      |
| 3    | 0.2580       | 41.30                    | 9.57                    | 50.87                   | 61.50         | -10.63       | QP       |
| 4    | 0.2580       | 31.60                    | 9.57                    | 41.17                   | 51.50         | -10.33       | AVG      |
| 5    | 0.3339       | 41.39                    | 9.58                    | 50.97                   | 59.35         | -8.38        | QP       |
| 6    | 0.3339       | 31.40                    | 9.58                    | 40.98                   | 49.35         | -8.37        | AVG      |
| 7    | 0.4380       | 40.50                    | 9.62                    | 50.12                   | 57.10         | -6.98        | QP       |
| 8    | 0.4380       | 30.61                    | 9.62                    | 40.23                   | 47.10         | -6.87        | AVG      |
| 9    | 0.5980       | 39.04                    | 9.70                    | 48.74                   | 56.00         | -7.26        | QP       |
| 10 * | 0.5980       | 29.70                    | 9.70                    | 39.40                   | 46.00         | -6.60        | AVG      |
| 11   | 0.8340       | 36.84                    | 9.82                    | 46.66                   | 56.00         | -9.34        | QP       |
| 12   | 0.8340       | 26.50                    | 9.82                    | 36.32                   | 46.00         | -9.68        | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Playing+Earpone                           |                   |         |
| Note          | ADAPTER:SALCOMP+USB                               |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:LIAN CHUANG |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

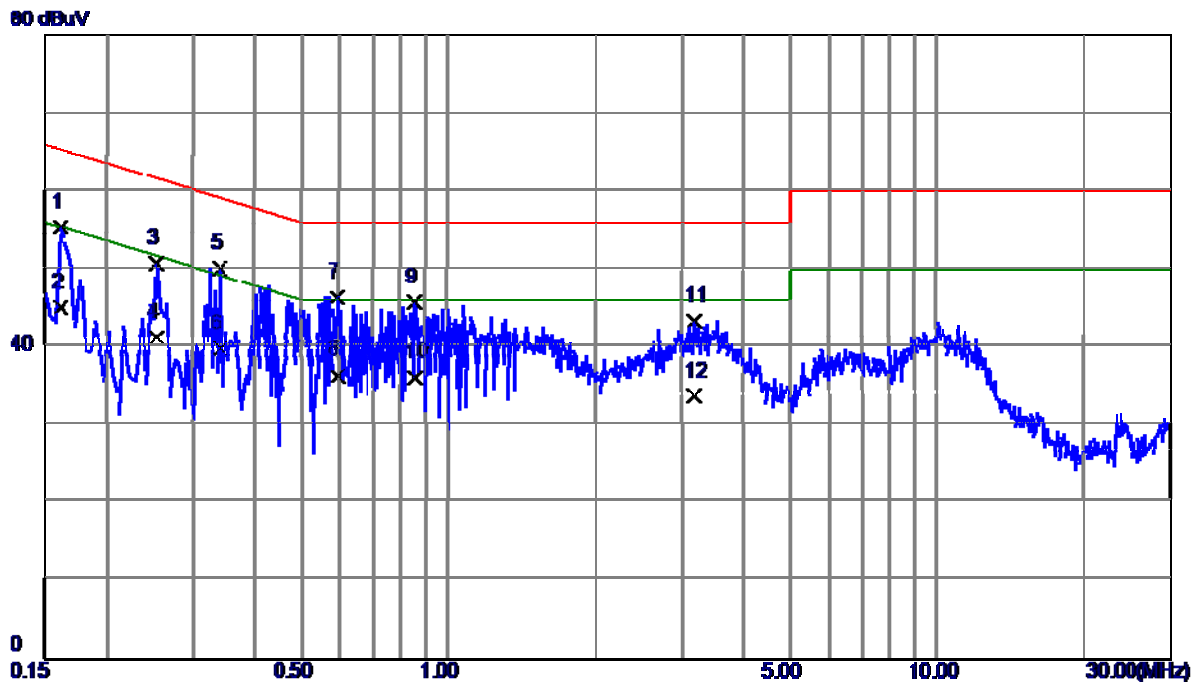


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1620       | 45.81                    | 9.51                    | 55.32                   | 65.36         | -10.04       | QP       |
| 2   | 0.1620       | 35.60                    | 9.51                    | 45.11                   | 55.36         | -10.25       | AVG      |
| 3   | 0.2540       | 41.10                    | 9.57                    | 50.67                   | 61.63         | -10.96       | QP       |
| 4   | 0.2540       | 31.70                    | 9.57                    | 41.27                   | 51.63         | -10.36       | AVG      |
| 5 * | 0.3420       | 40.51                    | 9.58                    | 50.09                   | 59.15         | -9.06        | QP       |
| 6   | 0.3420       | 30.20                    | 9.58                    | 39.78                   | 49.15         | -9.37        | AVG      |
| 7   | 0.5940       | 36.90                    | 9.50                    | 46.40                   | 56.00         | -9.60        | QP       |
| 8   | 0.5940       | 26.90                    | 9.50                    | 36.40                   | 46.00         | -9.60        | AVG      |
| 9   | 0.8580       | 36.15                    | 9.68                    | 45.83                   | 56.00         | -10.17       | QP       |
| 10  | 0.8580       | 26.41                    | 9.68                    | 36.09                   | 46.00         | -9.91        | AVG      |
| 11  | 3.1820       | 33.45                    | 9.98                    | 43.43                   | 56.00         | -12.57       | QP       |
| 12  | 3.1820       | 23.71                    | 9.98                    | 33.69                   | 46.00         | -12.31       | AVG      |

|               |                                                 |                   |         |
|---------------|-------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                     | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                            | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                    | Phase             | Line    |
| Test Mode     | Adapter+Playing+Earphone                        |                   |         |
| Note          | ADAPTER:SALCOMP+USB                             |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:QUANCHENG |                   |         |
| Test Engineer | Treey Chen                                      |                   |         |

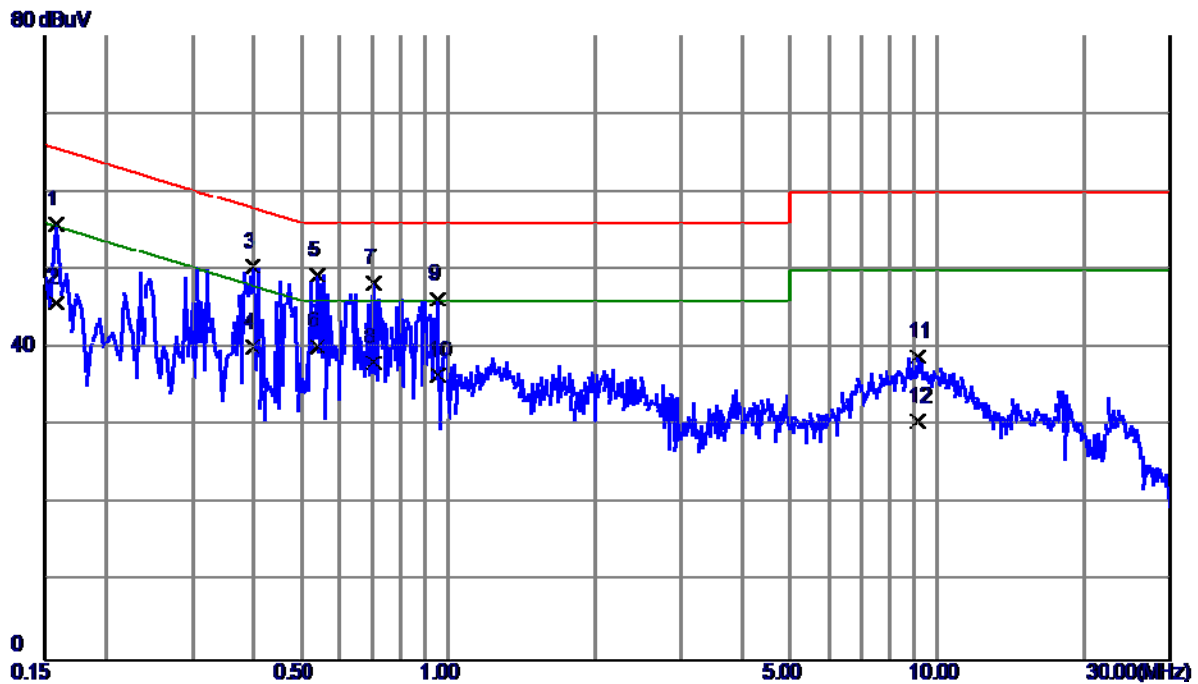


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1580       | 46.34                    | 9.57                    | 55.91                   | 65.57         | -9.66        | QP       |
| 2   | 0.1580       | 36.20                    | 9.57                    | 45.77                   | 55.57         | -9.80        | AVG      |
| 3   | 0.3980       | 40.83                    | 9.58                    | 50.41                   | 57.90         | -7.49        | QP       |
| 4   | 0.3980       | 30.50                    | 9.58                    | 40.08                   | 47.90         | -7.82        | AVG      |
| 5   | 0.5420       | 39.60                    | 9.69                    | 49.29                   | 56.00         | -6.71        | QP       |
| 6 * | 0.5420       | 30.50                    | 9.69                    | 40.19                   | 46.00         | -5.81        | AVG      |
| 7   | 0.7060       | 38.58                    | 9.72                    | 48.30                   | 56.00         | -7.70        | QP       |
| 8   | 0.7060       | 28.40                    | 9.72                    | 38.12                   | 46.00         | -7.88        | AVG      |
| 9   | 0.9500       | 36.44                    | 9.83                    | 46.27                   | 56.00         | -9.73        | QP       |
| 10  | 0.9500       | 26.71                    | 9.83                    | 36.54                   | 46.00         | -9.46        | AVG      |
| 11  | 9.1500       | 28.39                    | 10.46                   | 38.85                   | 60.00         | -21.15       | QP       |
| 12  | 9.1500       | 20.10                    | 10.46                   | 30.56                   | 50.00         | -19.44       | AVG      |

|               |                                                 |                   |         |
|---------------|-------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                     | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                            | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                    | Phase             | Neutral |
| Test Mode     | Adapter+Playing+Earphone                        |                   |         |
| Note          | ADAPTER:SALCOMP+USB                             |                   |         |
|               | CABLE:FF+BATTERY:SUNWODA(ALT)EARPHONE:QUANCHENG |                   |         |
| Test Engineer | Treey Chen                                      |                   |         |

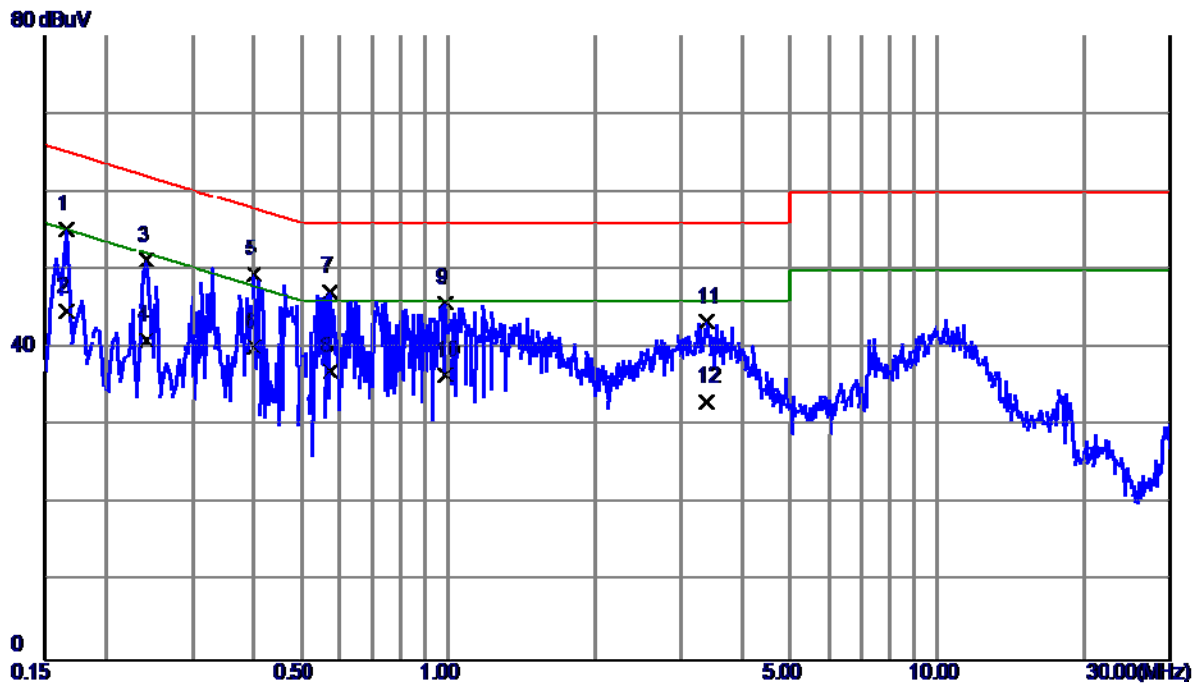


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 45.69                    | 9.49                    | 55.18                   | 65.16         | -9.98        | QP       |
| 2   | 0.1660       | 35.20                    | 9.49                    | 44.69                   | 55.16         | -10.47       | AVG      |
| 3   | 0.2420       | 41.68                    | 9.57                    | 51.25                   | 62.03         | -10.78       | QP       |
| 4   | 0.2420       | 31.40                    | 9.57                    | 40.97                   | 52.03         | -11.06       | AVG      |
| 5   | 0.4020       | 39.98                    | 9.48                    | 49.46                   | 57.81         | -8.35        | QP       |
| 6 * | 0.4020       | 30.60                    | 9.48                    | 40.08                   | 47.81         | -7.73        | AVG      |
| 7   | 0.5740       | 37.73                    | 9.50                    | 47.23                   | 56.00         | -8.77        | QP       |
| 8   | 0.5740       | 27.40                    | 9.50                    | 36.90                   | 46.00         | -9.10        | AVG      |
| 9   | 0.9860       | 36.05                    | 9.74                    | 45.79                   | 56.00         | -10.21       | QP       |
| 10  | 0.9860       | 26.80                    | 9.74                    | 36.54                   | 46.00         | -9.46        | AVG      |
| 11  | 3.3700       | 33.33                    | 10.01                   | 43.34                   | 56.00         | -12.66       | QP       |
| 12  | 3.3700       | 23.10                    | 10.01                   | 33.11                   | 46.00         | -12.89       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Traffic(GSM)                              |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

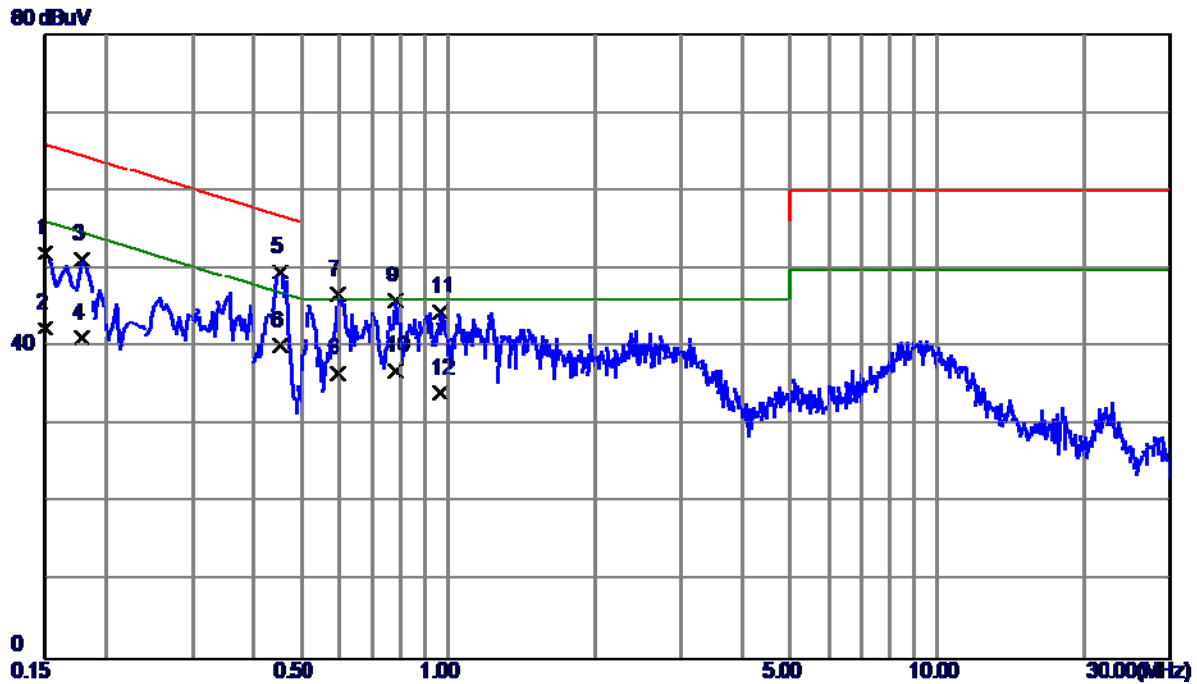


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 42.47                    | 9.57                    | 52.04                   | 66.00         | -13.96       | QP       |
| 2   | 0.1500       | 32.80                    | 9.57                    | 42.37                   | 56.00         | -13.63       | AVG      |
| 3   | 0.1780       | 41.66                    | 9.57                    | 51.23                   | 64.58         | -13.35       | QP       |
| 4   | 0.1780       | 31.60                    | 9.57                    | 41.17                   | 54.58         | -13.41       | AVG      |
| 5   | 0.4540       | 39.99                    | 9.64                    | 49.63                   | 56.80         | -7.17        | QP       |
| 6 * | 0.4540       | 30.50                    | 9.64                    | 40.14                   | 46.80         | -6.66        | AVG      |
| 7   | 0.5940       | 36.98                    | 9.70                    | 46.68                   | 56.00         | -9.32        | QP       |
| 8   | 0.5940       | 26.90                    | 9.70                    | 36.60                   | 46.00         | -9.40        | AVG      |
| 9   | 0.7780       | 36.04                    | 9.80                    | 45.84                   | 56.00         | -10.16       | QP       |
| 10  | 0.7780       | 27.20                    | 9.80                    | 37.00                   | 46.00         | -9.00        | AVG      |
| 11  | 0.9660       | 34.66                    | 9.84                    | 44.50                   | 56.00         | -11.50       | QP       |
| 12  | 0.9660       | 24.30                    | 9.84                    | 34.14                   | 46.00         | -11.86       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(GSM)                              |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

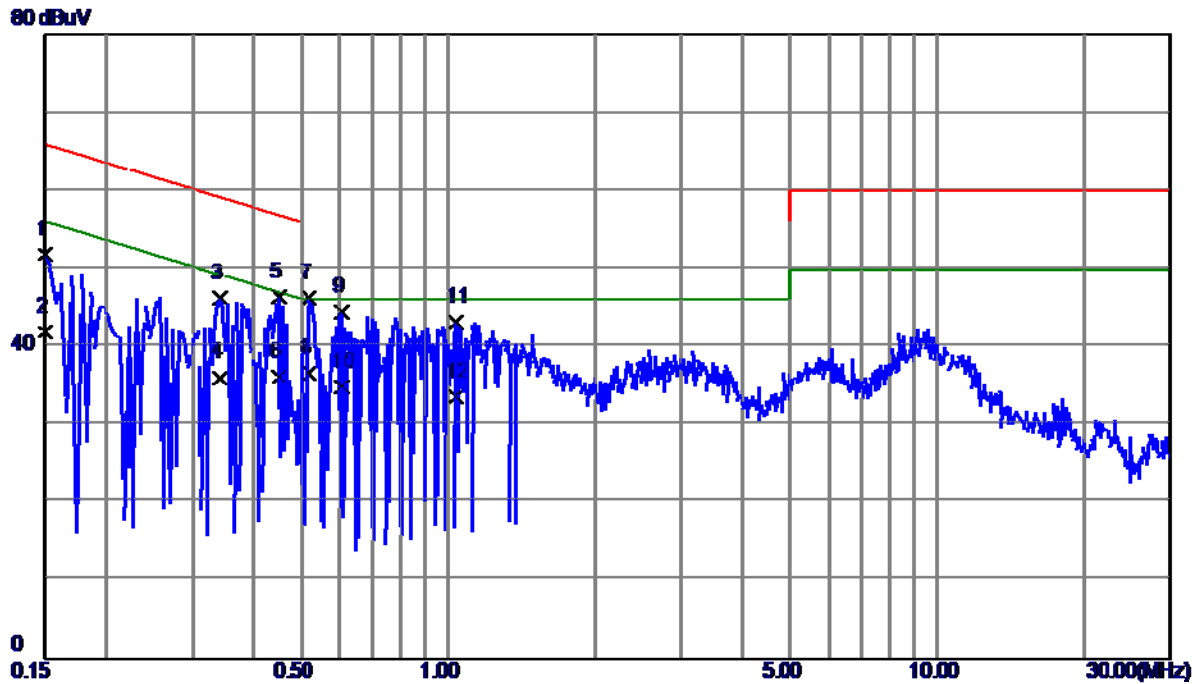


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 42.20                    | 9.57                    | 51.77                   | 66.00         | -14.23       | QP       |
| 2   | 0.1500       | 32.40                    | 9.57                    | 41.97                   | 56.00         | -14.03       | AVG      |
| 3   | 0.3420       | 36.64                    | 9.58                    | 46.22                   | 59.15         | -12.93       | QP       |
| 4   | 0.3420       | 26.50                    | 9.58                    | 36.08                   | 49.15         | -13.07       | AVG      |
| 5   | 0.4500       | 36.89                    | 9.49                    | 46.38                   | 56.88         | -10.50       | QP       |
| 6   | 0.4500       | 26.70                    | 9.49                    | 36.19                   | 46.88         | -10.69       | AVG      |
| 7   | 0.5180       | 36.74                    | 9.49                    | 46.23                   | 56.00         | -9.77        | QP       |
| 8 * | 0.5180       | 27.10                    | 9.49                    | 36.59                   | 46.00         | -9.41        | AVG      |
| 9   | 0.6060       | 35.02                    | 9.50                    | 44.52                   | 56.00         | -11.48       | QP       |
| 10  | 0.6060       | 25.40                    | 9.50                    | 34.90                   | 46.00         | -11.10       | AVG      |
| 11  | 1.0339       | 33.47                    | 9.74                    | 43.21                   | 56.00         | -12.79       | QP       |
| 12  | 1.0339       | 23.90                    | 9.74                    | 33.64                   | 46.00         | -12.36       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Traffic(WCDMA)                            |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treedy Chen                                       |                   |         |

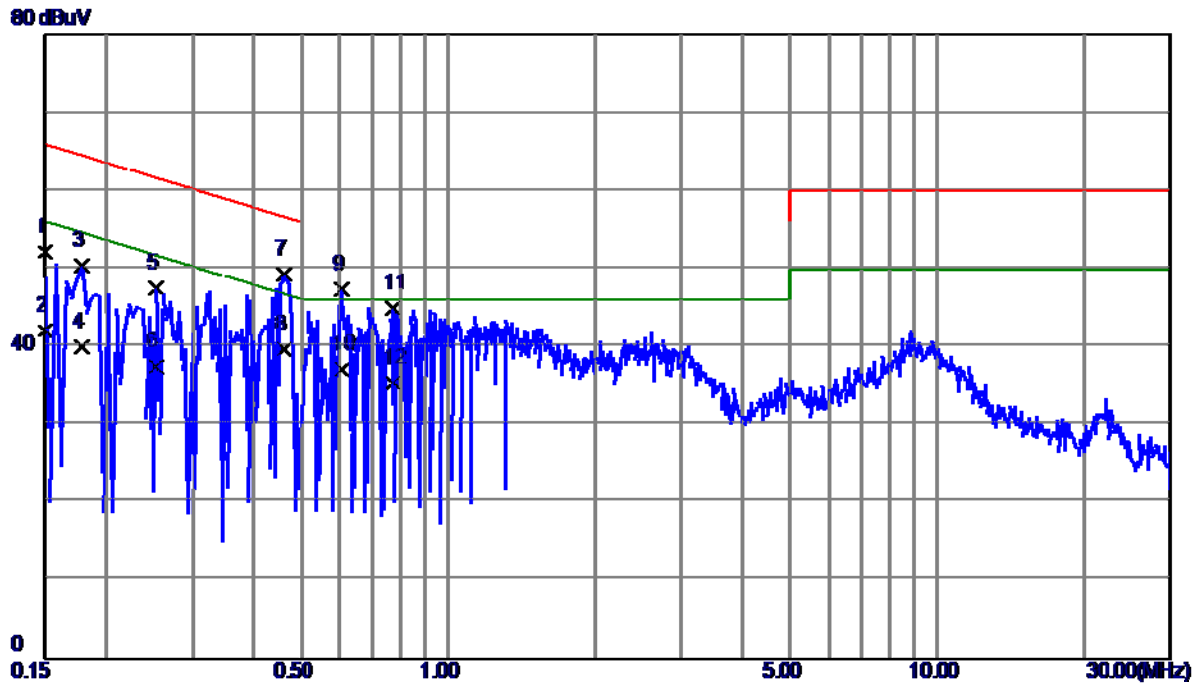


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 42.63                    | 9.57                    | 52.20                   | 66.00         | -13.80       | QP       |
| 2   | 0.1500       | 32.50                    | 9.57                    | 42.07                   | 56.00         | -13.93       | AVG      |
| 3   | 0.1780       | 40.77                    | 9.57                    | 50.34                   | 64.58         | -14.24       | QP       |
| 4   | 0.1780       | 30.40                    | 9.57                    | 39.97                   | 54.58         | -14.61       | AVG      |
| 5   | 0.2540       | 37.94                    | 9.57                    | 47.51                   | 61.63         | -14.12       | QP       |
| 6   | 0.2540       | 27.90                    | 9.57                    | 37.47                   | 51.63         | -14.16       | AVG      |
| 7   | 0.4620       | 39.61                    | 9.65                    | 49.26                   | 56.66         | -7.40        | QP       |
| 8 * | 0.4620       | 30.10                    | 9.65                    | 39.75                   | 46.66         | -6.91        | AVG      |
| 9   | 0.6060       | 37.65                    | 9.70                    | 47.35                   | 56.00         | -8.65        | QP       |
| 10  | 0.6060       | 27.40                    | 9.70                    | 37.10                   | 46.00         | -8.90        | AVG      |
| 11  | 0.7700       | 35.16                    | 9.79                    | 44.95                   | 56.00         | -11.05       | QP       |
| 12  | 0.7700       | 25.60                    | 9.79                    | 35.39                   | 46.00         | -10.61       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(WCDMA)                            |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treedy Chen                                       |                   |         |

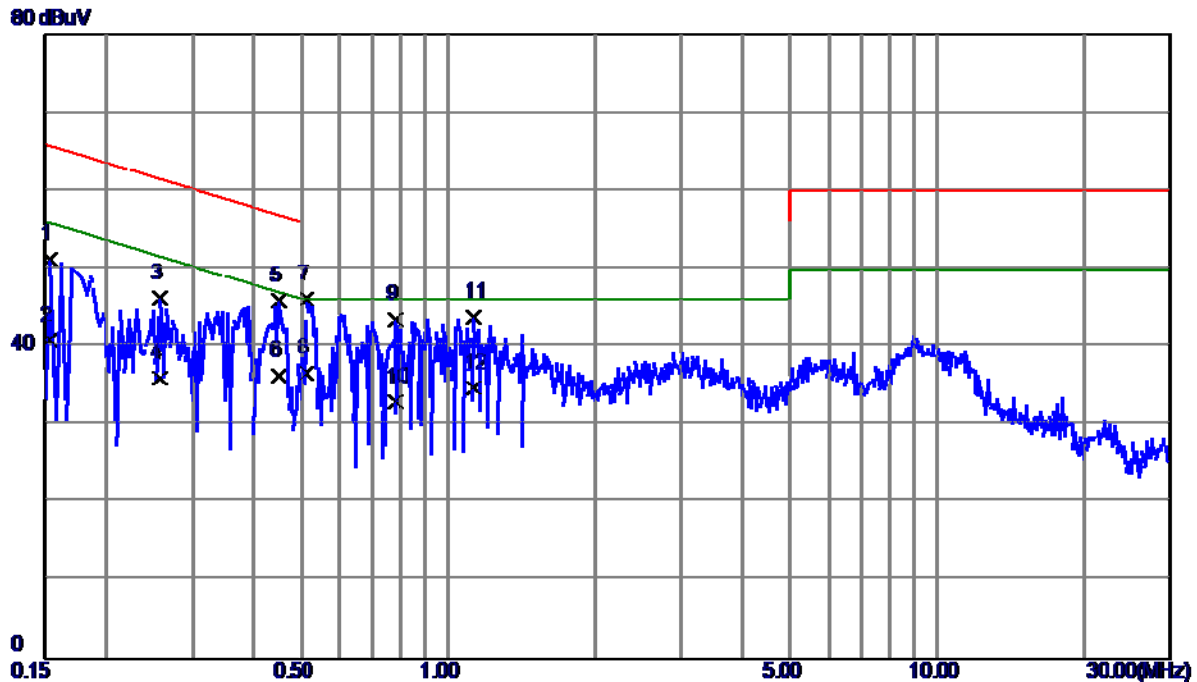


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 41.70                    | 9.55                    | 51.25                   | 65.79         | -14.54       | QP       |
| 2   | 0.1539       | 31.20                    | 9.55                    | 40.75                   | 55.79         | -15.04       | AVG      |
| 3   | 0.2580       | 36.68                    | 9.57                    | 46.25                   | 61.50         | -15.25       | QP       |
| 4   | 0.2580       | 26.40                    | 9.57                    | 35.97                   | 51.50         | -15.53       | AVG      |
| 5   | 0.4500       | 36.42                    | 9.49                    | 45.91                   | 56.88         | -10.97       | QP       |
| 6   | 0.4500       | 26.80                    | 9.49                    | 36.29                   | 46.88         | -10.59       | AVG      |
| 7   | 0.5140       | 36.54                    | 9.49                    | 46.03                   | 56.00         | -9.97        | QP       |
| 8 * | 0.5140       | 27.10                    | 9.49                    | 36.59                   | 46.00         | -9.41        | AVG      |
| 9   | 0.7820       | 33.98                    | 9.60                    | 43.58                   | 56.00         | -12.42       | QP       |
| 10  | 0.7820       | 23.40                    | 9.60                    | 33.00                   | 46.00         | -13.00       | AVG      |
| 11  | 1.1300       | 34.09                    | 9.75                    | 43.84                   | 56.00         | -12.16       | QP       |
| 12  | 1.1300       | 24.90                    | 9.75                    | 34.65                   | 46.00         | -11.35       | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Line    |
| Test Mode     | Adapter+Traffic(LTE)                              |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treey Chen                                        |                   |         |

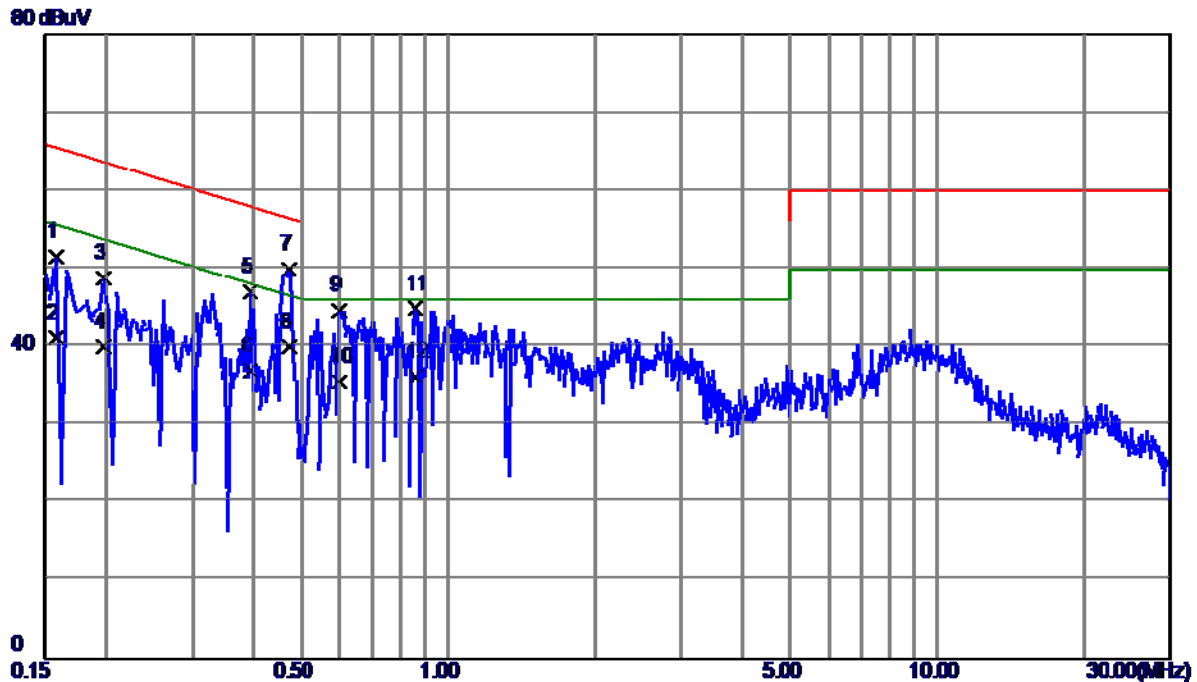

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1580       | 41.98                    | 9.57                    | 51.55                   | 65.57         | -14.02       | QP       |
| 2   | 0.1580       | 31.50                    | 9.57                    | 41.07                   | 55.57         | -14.50       | AVG      |
| 3   | 0.1980       | 39.25                    | 9.57                    | 48.82                   | 63.69         | -14.87       | QP       |
| 4   | 0.1980       | 30.40                    | 9.57                    | 39.97                   | 53.69         | -13.72       | AVG      |
| 5   | 0.3940       | 37.41                    | 9.58                    | 46.99                   | 57.98         | -10.99       | QP       |
| 6   | 0.3940       | 27.30                    | 9.58                    | 36.88                   | 47.98         | -11.10       | AVG      |
| 7   | 0.4740       | 40.19                    | 9.66                    | 49.85                   | 56.44         | -6.59        | QP       |
| 8 * | 0.4740       | 30.40                    | 9.66                    | 40.06                   | 46.44         | -6.38        | AVG      |
| 9   | 0.5980       | 35.00                    | 9.70                    | 44.70                   | 56.00         | -11.30       | QP       |
| 10  | 0.5980       | 25.80                    | 9.70                    | 35.50                   | 46.00         | -10.50       | AVG      |
| 11  | 0.8580       | 35.05                    | 9.83                    | 44.88                   | 56.00         | -11.12       | QP       |
| 12  | 0.8580       | 26.40                    | 9.83                    | 36.23                   | 46.00         | -9.77        | AVG      |

|               |                                                   |                   |         |
|---------------|---------------------------------------------------|-------------------|---------|
| EUT           | Smart Phone                                       | Model Name        | WAS-LX3 |
| Temperature   | 23°C                                              | Relative Humidity | 60%     |
| Test Voltage  | AC 120V/60Hz                                      | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(LTE)                              |                   |         |
| Note          | ADAPTER:SALCOMP+USB CABLE:FF+BATTERY:SUNWODA(ALT) |                   |         |
| Test Engineer | Treedy Chen                                       |                   |         |

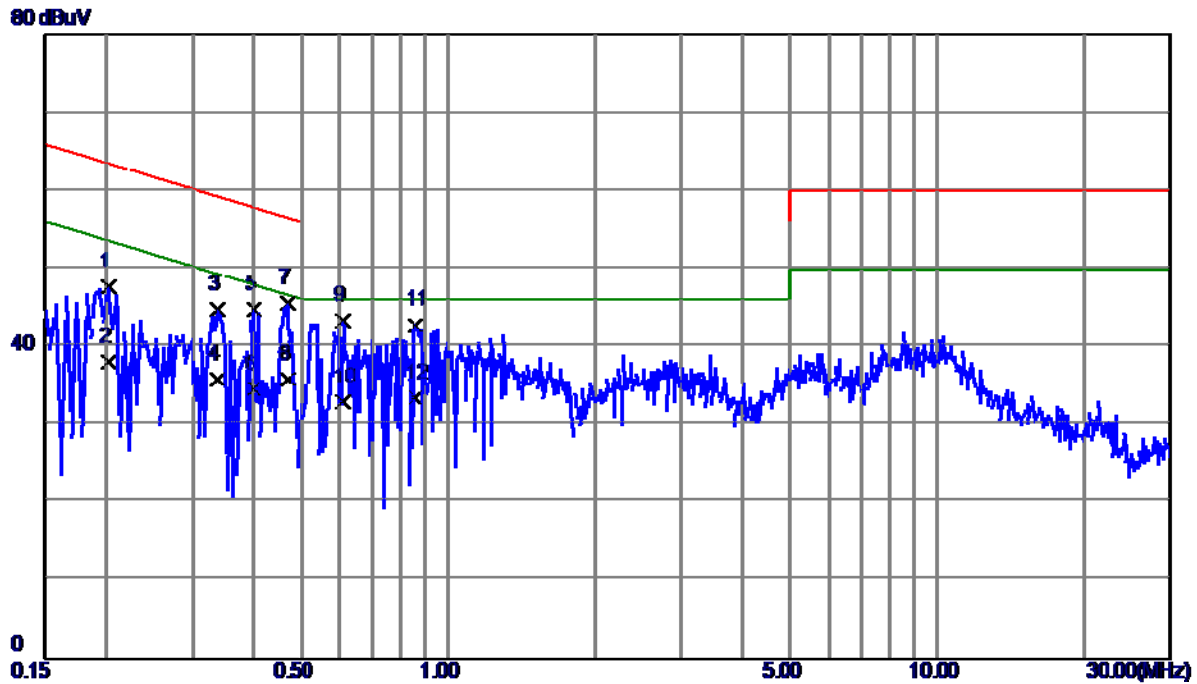

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.2020       | 38.19                    | 9.57                    | 47.76                   | 63.53         | -15.77       | QP       |
| 2   | 0.2020       | 28.50                    | 9.57                    | 38.07                   | 53.53         | -15.46       | AVG      |
| 3   | 0.3379       | 35.29                    | 9.58                    | 44.87                   | 59.25         | -14.38       | QP       |
| 4   | 0.3379       | 26.30                    | 9.58                    | 35.88                   | 49.25         | -13.37       | AVG      |
| 5   | 0.4020       | 35.33                    | 9.48                    | 44.81                   | 57.81         | -13.00       | QP       |
| 6   | 0.4020       | 25.10                    | 9.48                    | 34.58                   | 47.81         | -13.23       | AVG      |
| 7   | 0.4700       | 36.08                    | 9.49                    | 45.57                   | 56.51         | -10.94       | QP       |
| 8 * | 0.4700       | 26.40                    | 9.49                    | 35.89                   | 46.51         | -10.62       | AVG      |
| 9   | 0.6100       | 33.84                    | 9.50                    | 43.34                   | 56.00         | -12.66       | QP       |
| 10  | 0.6100       | 23.50                    | 9.50                    | 33.00                   | 46.00         | -13.00       | AVG      |
| 11  | 0.8580       | 33.12                    | 9.68                    | 42.80                   | 56.00         | -13.20       | QP       |
| 12  | 0.8580       | 23.81                    | 9.68                    | 33.49                   | 46.00         | -12.51       | AVG      |

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                 | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88         | 90                       | 39                         | 100                      | 40                         |
| 88 - 216        | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960       | 210                      | 46.4                       | 200                      | 46                         |
| Above 960       | 300                      | 49.5                       | 500                      | 54                         |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A          |         |                   |         | Class B          |         |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
|                 | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                 | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000      | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 - 108                                                                                                                     | 1000                                                                            |
| 108 - 500                                                                                                                       | 2000                                                                            |
| 500 - 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment                         | Manufacturer      | Type No.                        | Serial No.       | Calibrated until |
|------|-------------------------------------------|-------------------|---------------------------------|------------------|------------------|
| 1    | Measurement Software                      | Farad             | EZ-EMC<br>Ver.NB-03A<br>1-01    | N/A              | N/A              |
| 2    | Amplifier                                 | Agilent           | 8449B                           | 3008A02274       | Mar. 10, 2017    |
| 3    | Receiver                                  | Agilent           | N9038A                          | MY5213003<br>9   | Sep. 04, 2017    |
| 4    | Antenna                                   | EM                | EM-6876-1                       | 230              | Jul. 08, 2017    |
| 5    | Controller                                | CT                | SC100                           | N/A              | N/A              |
| 6    | Controller                                | MF                | MF-7802                         | MF7802084<br>16  | N/A              |
| 7    | Cable                                     | emci              | EMC104-S<br>M-SM-1200<br>0(12m) | N/A              | Jul. 06, 2017    |
| 8    | Double Ridged<br>Guide Antenna            | ETS               | 3115                            | 00075789         | Mar. 27, 2017    |
| 9    | Broad-Band Horn<br>Antenna                | Schwarzbeck       | BBHA 9170                       | 9170319          | Apr. 23, 2017    |
| 10   | Microwave<br>Preamplifier With<br>Adaptor | EMC<br>INSTRUMENT | EMC26540<br>45                  | 980039 &<br>HA01 | Mar. 27, 2017    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

For measurement of frequency 1GHz -6000.000GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 26.5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = 20 log (3m/1m) dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

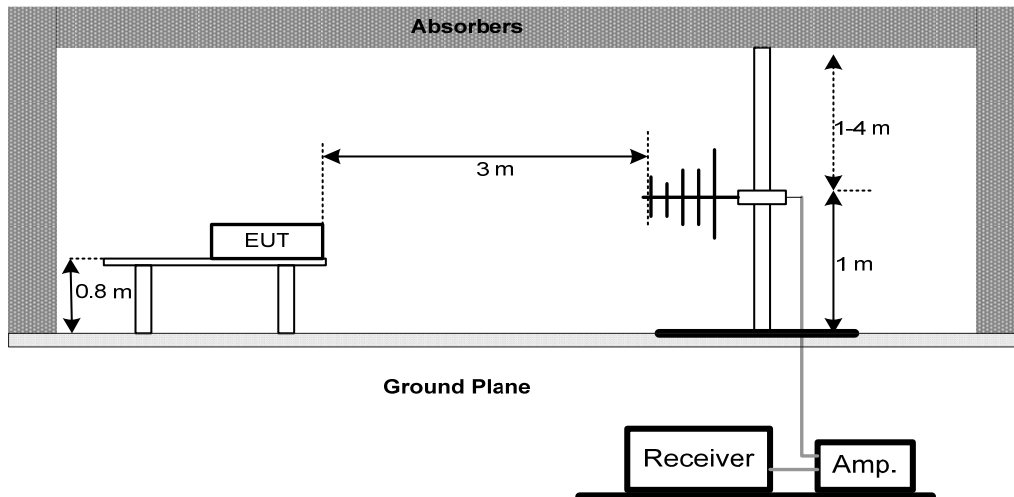

##### (B) Radiated Emission Test Set-Up Frequency 1 GHz

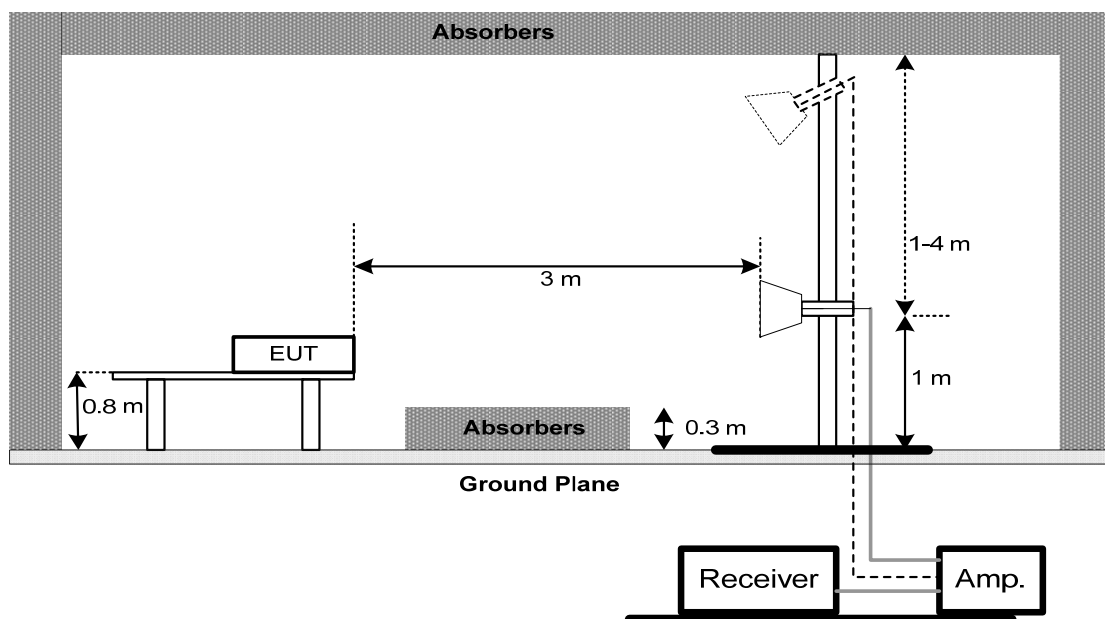


#### 4.2.6 TEST RESULTS-BELOW 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB CABLE:CR  |                   |          |
| Test Engineer | Treey Chen    |                   |          |

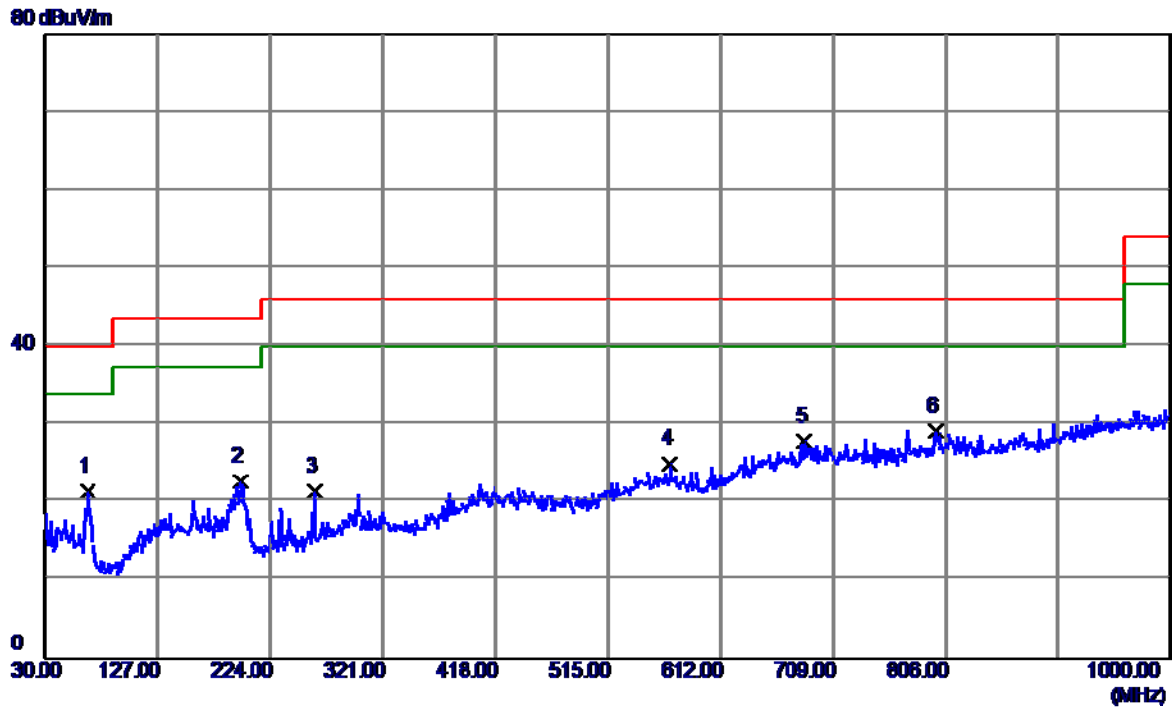


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 66.3750      | 35.53                      | -14.15                  | 21.38                     | 40.00           | -18.62       | QP       |
| 2   | 197.8100     | 36.33                      | -13.54                  | 22.79                     | 43.50           | -20.71       | QP       |
| 3   | 262.3150     | 34.11                      | -12.71                  | 21.40                     | 46.00           | -24.60       | QP       |
| 4   | 568.3500     | 29.53                      | -4.58                   | 24.95                     | 46.00           | -21.05       | QP       |
| 5   | 684.7500     | 28.75                      | -0.97                   | 27.78                     | 46.00           | -18.22       | QP       |
| 6 * | 797.7550     | 28.53                      | 0.54                    | 29.07                     | 46.00           | -16.93       | QP       |

|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB CABLE:CR  |                   |            |
| Test Engineer | Treey Chen    |                   |            |

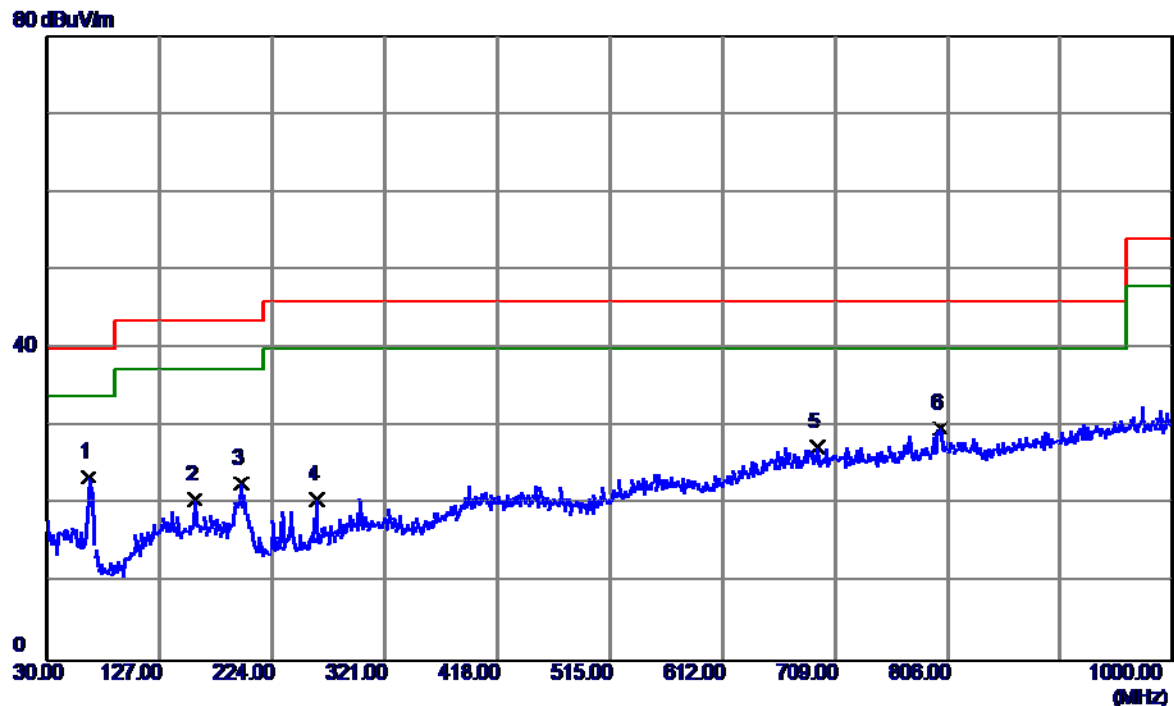


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 65.8900      | 37.54                      | -14.00                  | 23.54                     | 40.00           | -16.46       | QP       |
| 2   | 157.5549     | 33.03                      | -12.40                  | 20.63                     | 43.50           | -22.87       | QP       |
| 3   | 197.3250     | 36.30                      | -13.52                  | 22.78                     | 43.50           | -20.72       | QP       |
| 4   | 262.3150     | 33.34                      | -12.71                  | 20.63                     | 46.00           | -25.37       | QP       |
| 5   | 693.4800     | 28.20                      | -0.79                   | 27.41                     | 46.00           | -18.59       | QP       |
| 6 * | 799.6950     | 29.18                      | 0.60                    | 29.78                     | 46.00           | -16.22       | QP       |

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB CABLE:FF  |                   |          |
| Test Engineer | Treedy Chen   |                   |          |

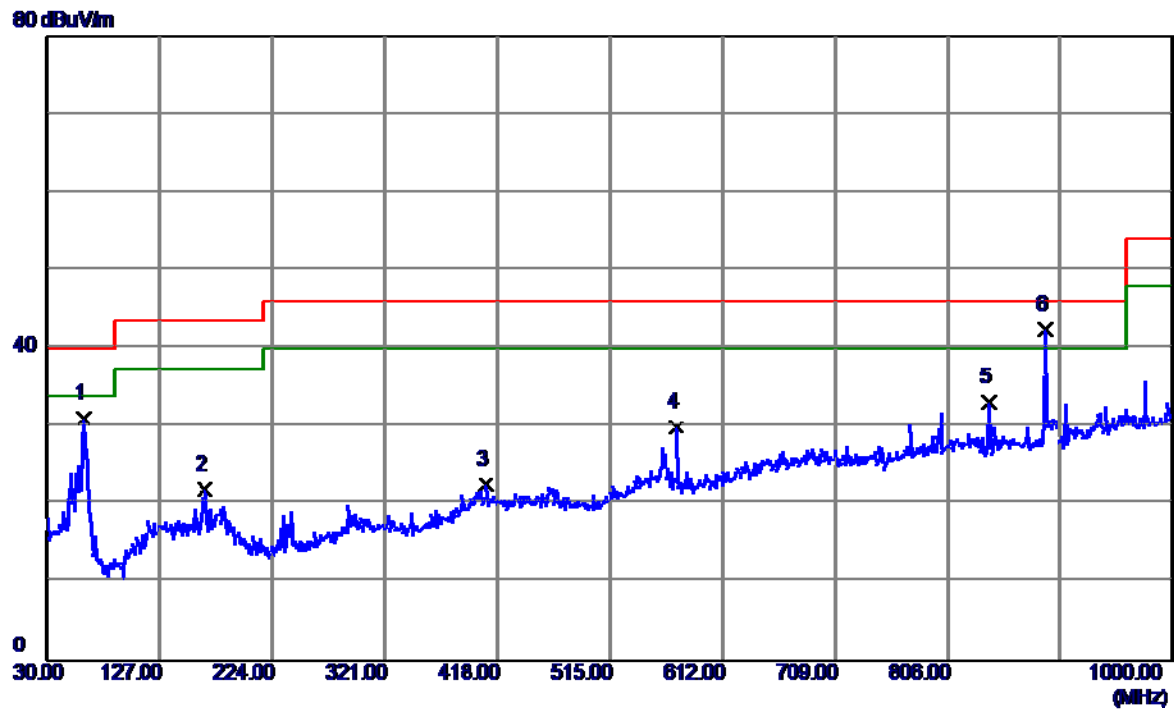

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 61.5250      | 45.08                      | -14.11                  | 30.97                     | 40.00           | -9.03        | QP       |
| 2   | 165.8000     | 33.41                      | -11.48                  | 21.93                     | 43.50           | -21.57       | QP       |
| 3   | 408.7850     | 29.70                      | -7.18                   | 22.52                     | 46.00           | -23.48       | QP       |
| 4   | 572.2300     | 34.58                      | -4.61                   | 29.97                     | 46.00           | -16.03       | QP       |
| 5   | 841.4050     | 32.56                      | 0.60                    | 33.16                     | 46.00           | -12.84       | QP       |
| 6 * | 890.3900     | 41.00                      | 1.47                    | 42.47                     | 46.00           | -3.53        | QP       |


|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB CABLE:FF  |                   |            |
| Test Engineer | Treey Chen    |                   |            |

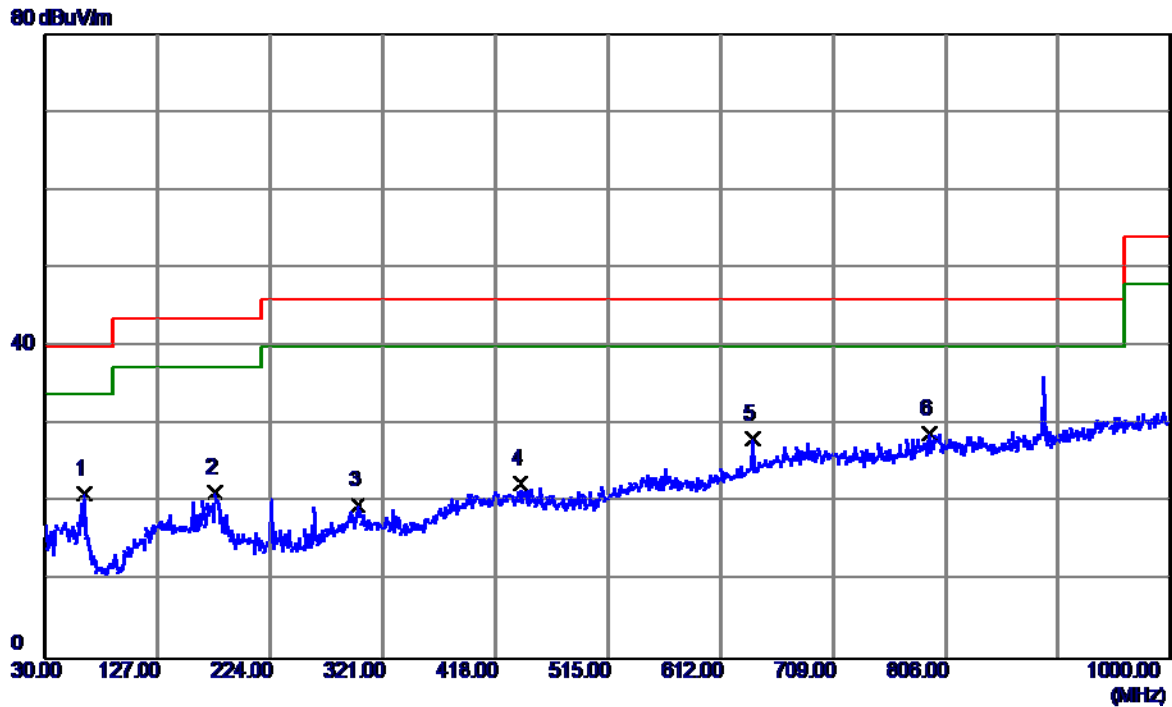

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.9800      | 35.01                      | -13.95                  | 21.06                     | 40.00           | -18.94       | QP       |
| 2   | 176.9550     | 32.97                      | -11.71                  | 21.26                     | 43.50           | -22.24       | QP       |
| 3   | 299.1750     | 29.62                      | -9.94                   | 19.68                     | 46.00           | -26.32       | QP       |
| 4   | 439.8250     | 29.49                      | -7.10                   | 22.39                     | 46.00           | -23.61       | QP       |
| 5   | 639.6450     | 30.52                      | -2.34                   | 28.18                     | 46.00           | -17.82       | QP       |
| 6 * | 791.4500     | 28.40                      | 0.36                    | 28.76                     | 46.00           | -17.24       | QP       |

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB CABLE:LX  |                   |          |
| Test Engineer | Treedy Chen   |                   |          |


80 dBuV/m

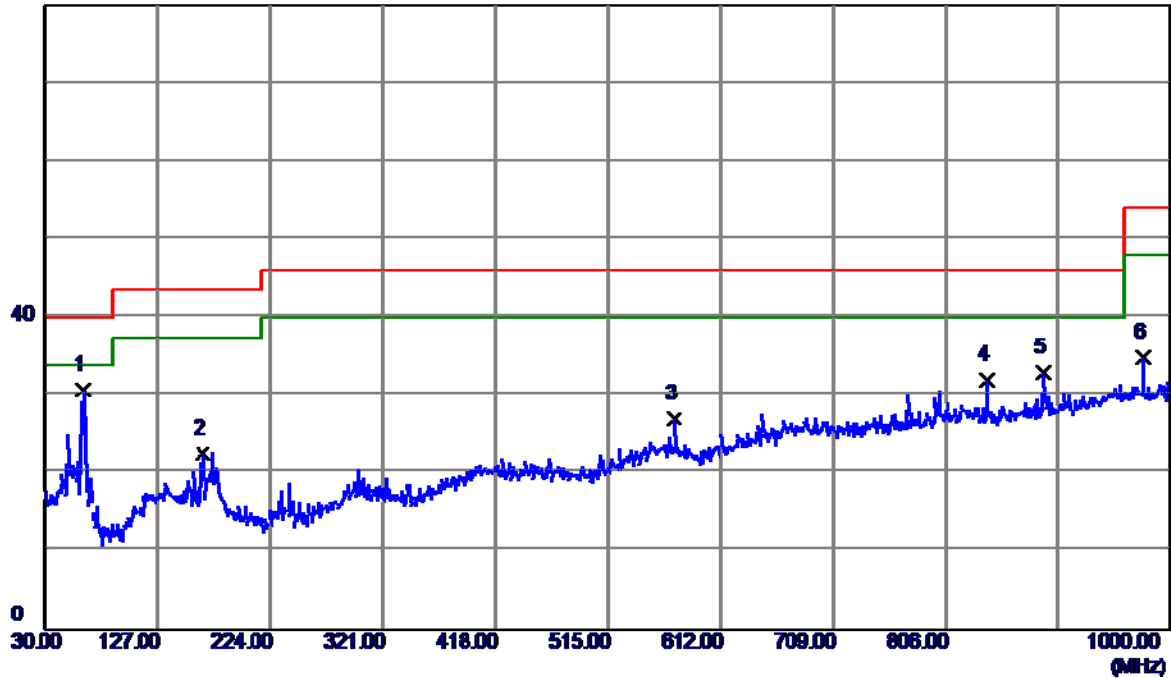

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 62.0100      | 44.78                      | -14.06                  | 30.72                     | 40.00           | -9.28        | QP       |
| 2   | 165.8000     | 34.04                      | -11.48                  | 22.56                     | 43.50           | -20.94       | QP       |
| 3   | 572.2300     | 31.63                      | -4.61                   | 27.02                     | 46.00           | -18.98       | QP       |
| 4   | 841.4050     | 31.43                      | 0.60                    | 32.03                     | 46.00           | -13.97       | QP       |
| 5   | 889.9050     | 31.48                      | 1.46                    | 32.94                     | 46.00           | -13.06       | QP       |
| 6   | 976.2350     | 31.34                      | 3.59                    | 34.93                     | 54.00           | -19.07       | QP       |


|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB CABLE:LX  |                   |            |
| Test Engineer | Treedy Chen   |                   |            |

80 dBuV/m

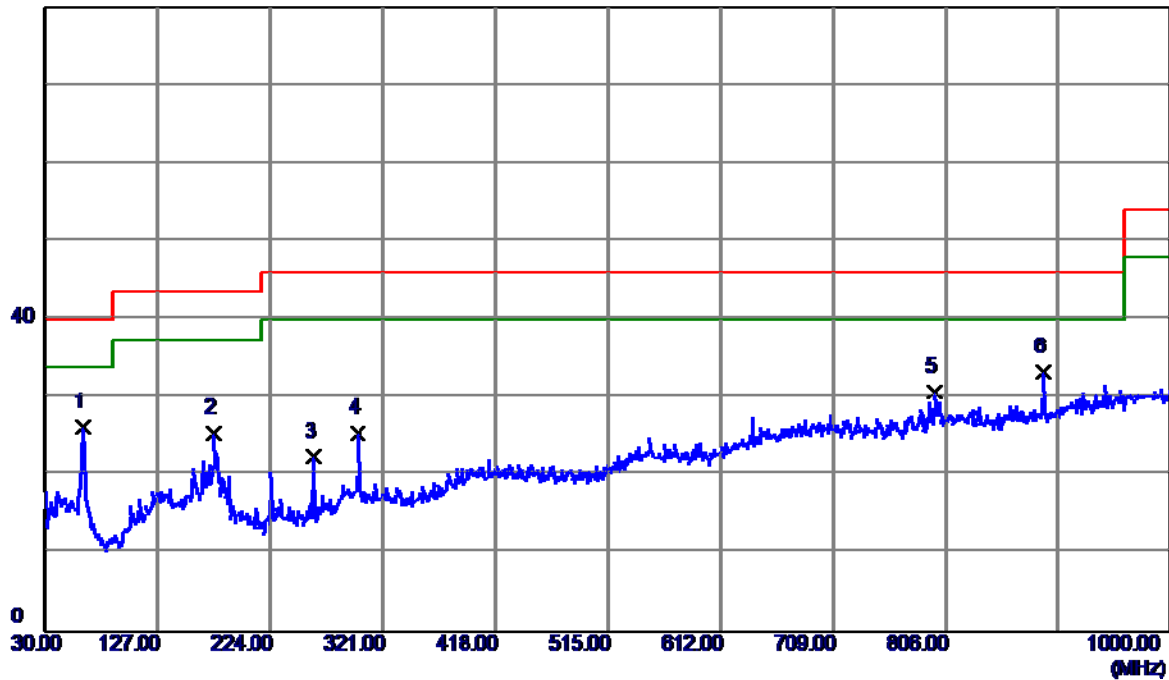


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.0100      | 40.25                      | -14.06                  | 26.19                     | 40.00           | -13.81       | QP       |
| 2   | 175.9850     | 37.01                      | -11.57                  | 25.44                     | 43.50           | -18.06       | QP       |
| 3   | 261.3450     | 35.26                      | -12.79                  | 22.47                     | 46.00           | -23.53       | QP       |
| 4   | 299.6600     | 35.43                      | -9.94                   | 25.49                     | 46.00           | -20.51       | QP       |
| 5   | 796.3000     | 30.28                      | 0.50                    | 30.78                     | 46.00           | -15.22       | QP       |
| 6 * | 890.3900     | 31.76                      | 1.47                    | 33.23                     | 46.00           | -12.77       | QP       |

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB CABLE:PY  |                   |          |
| Test Engineer | Treedy Chen   |                   |          |

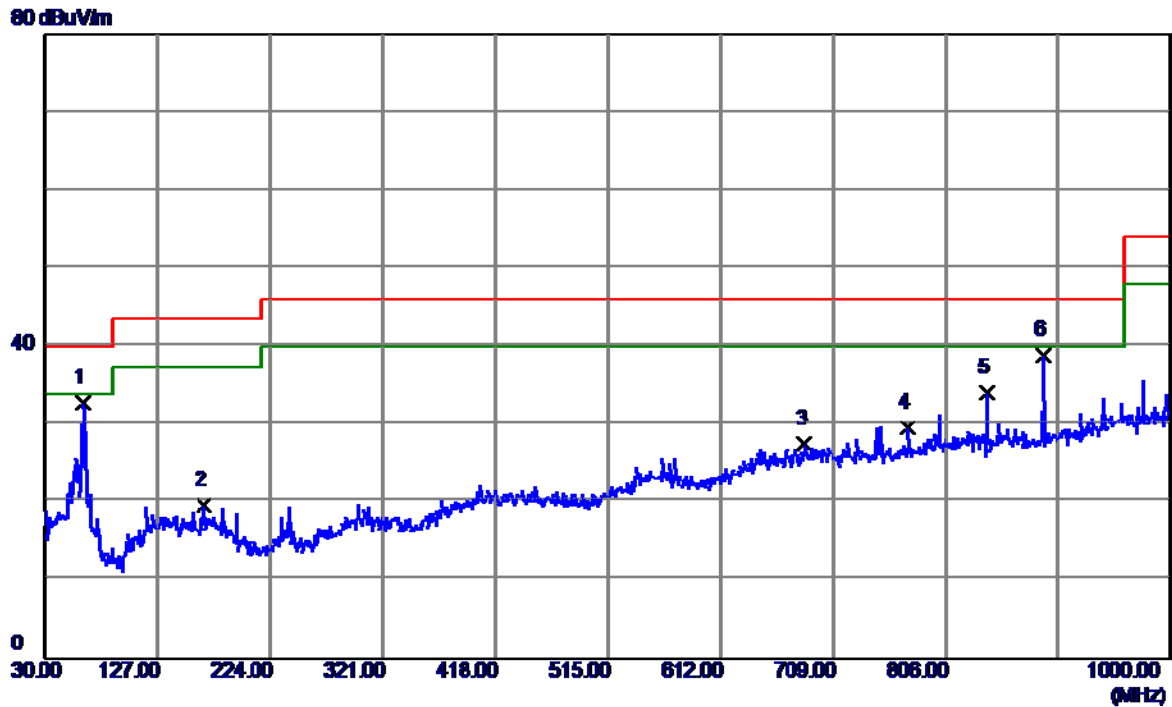


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.4950      | 46.82                      | -14.01                  | 32.81                     | 40.00           | -7.19        | QP       |
| 2   | 166.7700     | 31.03                      | -11.30                  | 19.73                     | 43.50           | -23.77       | QP       |
| 3   | 684.7500     | 28.42                      | -0.97                   | 27.45                     | 46.00           | -18.55       | QP       |
| 4   | 773.9900     | 29.80                      | -0.16                   | 29.64                     | 46.00           | -16.36       | QP       |
| 5   | 841.4050     | 33.41                      | 0.60                    | 34.01                     | 46.00           | -11.99       | QP       |
| 6 * | 890.3900     | 37.40                      | 1.47                    | 38.87                     | 46.00           | -7.13        | QP       |

|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB CABLE:PY  |                   |            |
| Test Engineer | Treey Chen    |                   |            |

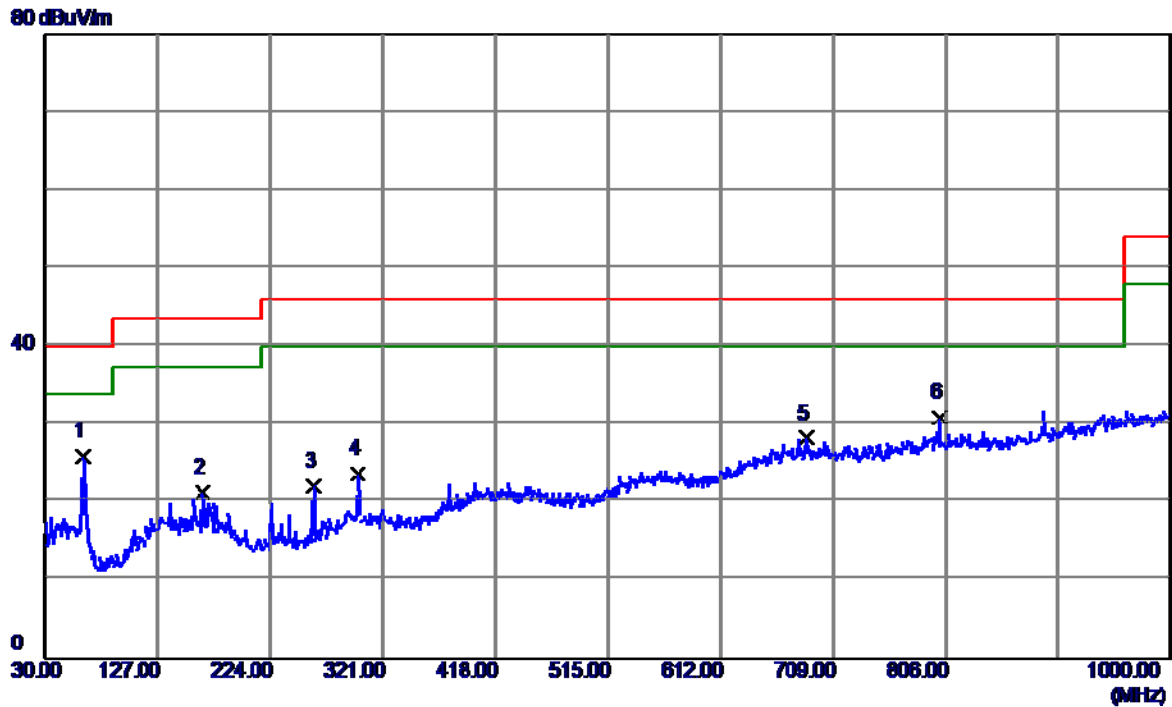


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 62.4950      | 39.95                      | -14.01                  | 25.94                     | 40.00           | -14.06       | QP       |
| 2   | 165.8000     | 32.78                      | -11.48                  | 21.30                     | 43.50           | -22.20       | QP       |
| 3   | 261.3450     | 34.84                      | -12.79                  | 22.05                     | 46.00           | -23.95       | QP       |
| 4   | 299.6600     | 33.68                      | -9.94                   | 23.74                     | 46.00           | -22.26       | QP       |
| 5   | 686.2050     | 29.18                      | -0.94                   | 28.24                     | 46.00           | -17.76       | QP       |
| 6   | 800.1800     | 30.26                      | 0.61                    | 30.87                     | 46.00           | -15.13       | QP       |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

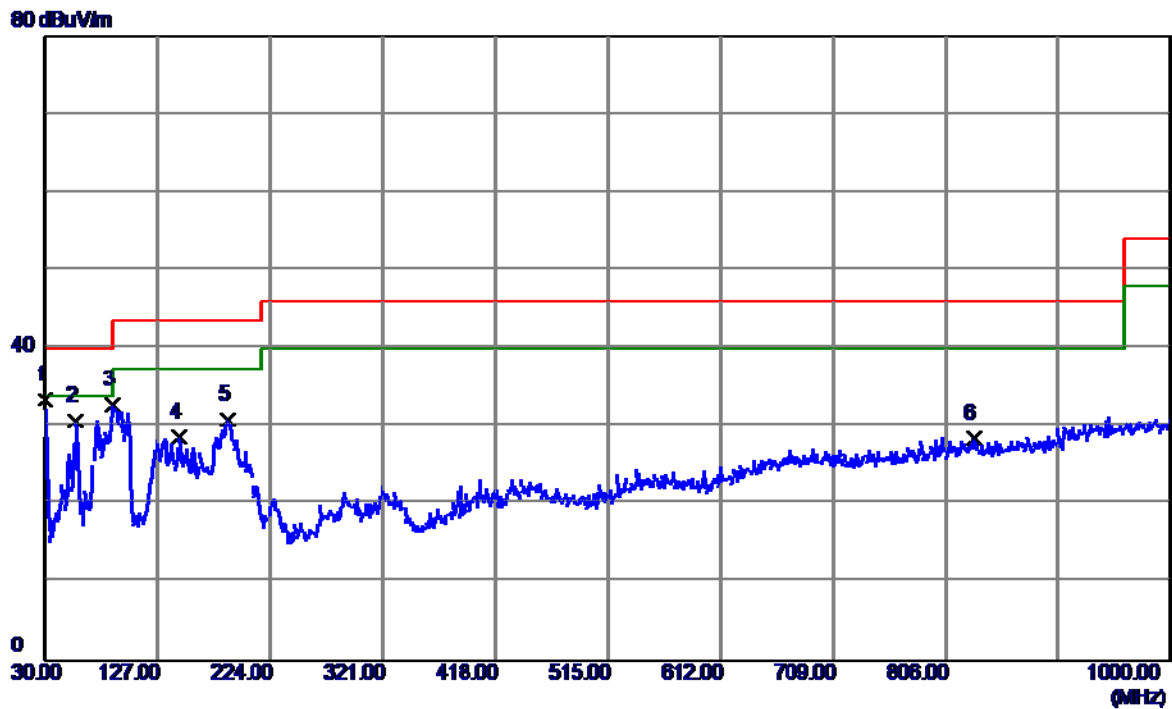


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 46.29                      | -12.80                  | 33.49                     | 40.00           | -6.51        | QP       |
| 2   | 56.1900      | 43.30                      | -12.60                  | 30.70                     | 40.00           | -9.30        | QP       |
| 3   | 88.6850      | 49.20                      | -16.36                  | 32.84                     | 43.50           | -10.66       | QP       |
| 4   | 144.9450     | 40.55                      | -11.90                  | 28.65                     | 43.50           | -14.85       | QP       |
| 5   | 187.6250     | 43.79                      | -12.95                  | 30.84                     | 43.50           | -12.66       | QP       |
| 6   | 830.2500     | 27.95                      | 0.60                    | 28.55                     | 46.00           | -17.45       | QP       |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

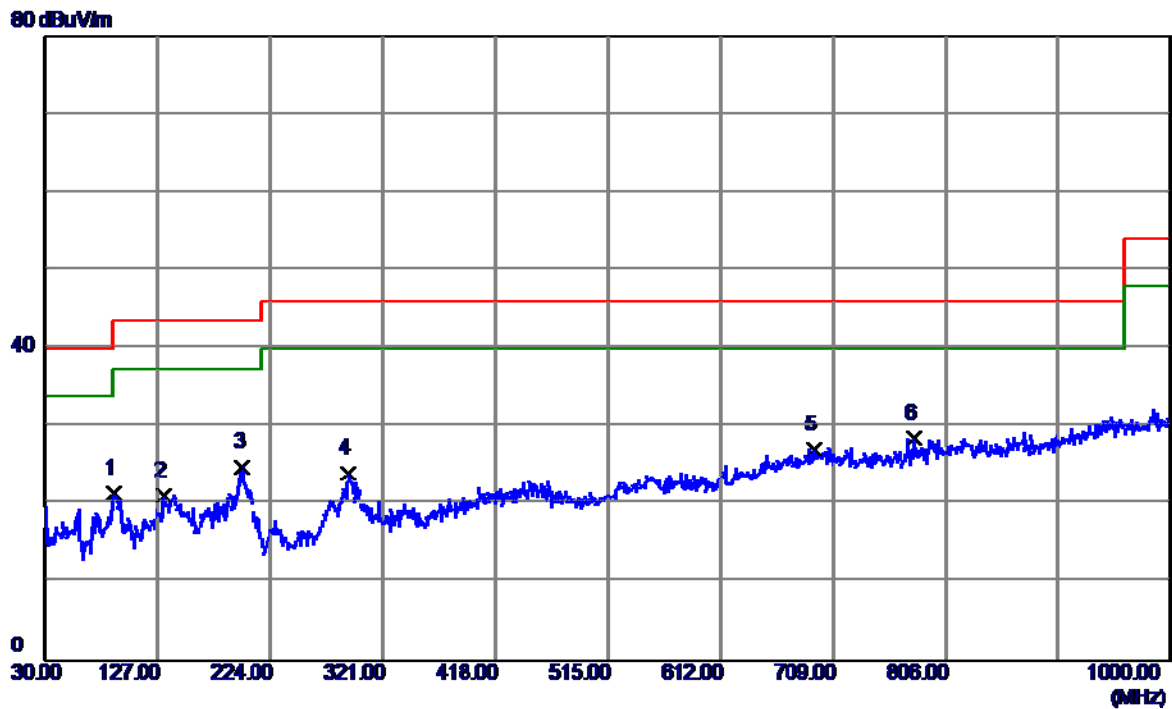

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 89.6550      | 37.87                      | -16.39                  | 21.48                     | 43.50           | -22.02       | QP       |
| 2   | 132.8200     | 32.47                      | -11.35                  | 21.12                     | 43.50           | -22.38       | QP       |
| 3   | 199.7500     | 38.49                      | -13.63                  | 24.86                     | 43.50           | -18.64       | QP       |
| 4   | 290.9300     | 33.92                      | -9.98                   | 23.94                     | 46.00           | -22.06       | QP       |
| 5   | 692.9950     | 27.88                      | -0.80                   | 27.08                     | 46.00           | -18.92       | QP       |
| 6 * | 778.8400     | 28.57                      | -0.02                   | 28.55                     | 46.00           | -17.45       | QP       |


|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                       | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                               | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on         |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SCUD(SONY) |                   |          |
| Test Engineer | Treey Chen                                 |                   |          |

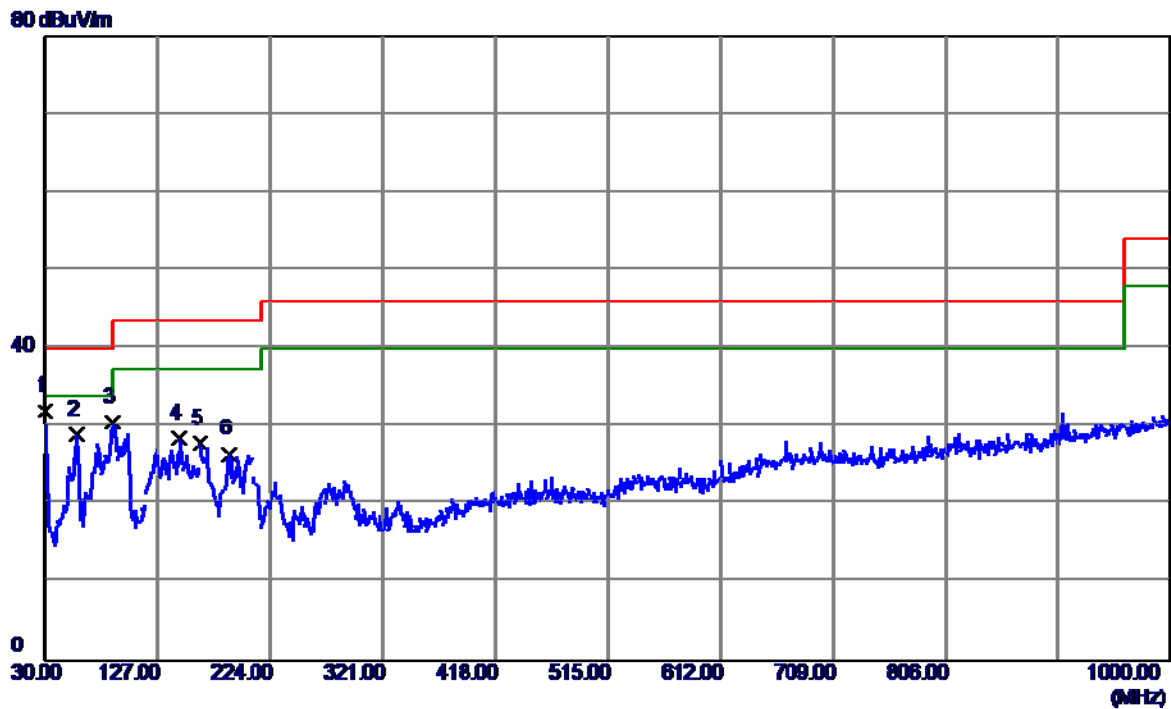

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 44.75                      | -12.80                  | 31.95                     | 40.00           | -8.05        | QP       |
| 2   | 56.6750      | 41.62                      | -12.62                  | 29.00                     | 40.00           | -11.00       | QP       |
| 3   | 88.6850      | 46.94                      | -16.36                  | 30.58                     | 43.50           | -12.92       | QP       |
| 4   | 145.4299     | 40.40                      | -11.90                  | 28.50                     | 43.50           | -15.00       | QP       |
| 5   | 163.8600     | 39.62                      | -11.84                  | 27.78                     | 43.50           | -15.72       | QP       |
| 6   | 188.5950     | 39.53                      | -13.05                  | 26.48                     | 43.50           | -17.02       | QP       |


|               |                                            |                   |            |
|---------------|--------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                       | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                               | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on         |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SCUD(SONY) |                   |            |
| Test Engineer | Treey Chen                                 |                   |            |

80 dBuV/m

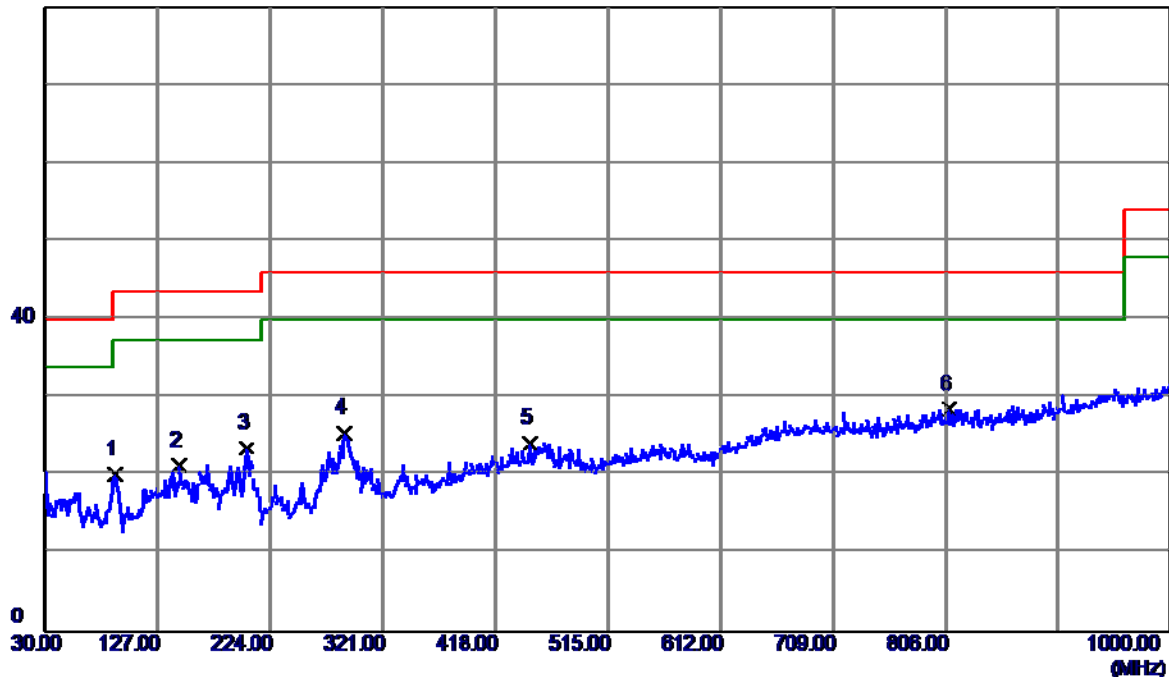


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 90.6250      | 36.47                      | -16.38                  | 20.09                     | 43.50           | -23.41       | QP       |
| 2   | 145.4299     | 33.21                      | -11.90                  | 21.31                     | 43.50           | -22.19       | QP       |
| 3   | 203.1450     | 37.28                      | -13.78                  | 23.50                     | 43.50           | -20.00       | QP       |
| 4   | 288.0200     | 35.72                      | -10.32                  | 25.40                     | 46.00           | -20.60       | QP       |
| 5   | 448.0700     | 31.27                      | -7.08                   | 24.19                     | 46.00           | -21.81       | QP       |
| 6 * | 809.3950     | 27.81                      | 0.61                    | 28.42                     | 46.00           | -17.58       | QP       |

|               |                                              |                   |          |
|---------------|----------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on           |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SUNWODA(ALT) |                   |          |
| Test Engineer | Treey Chen                                   |                   |          |

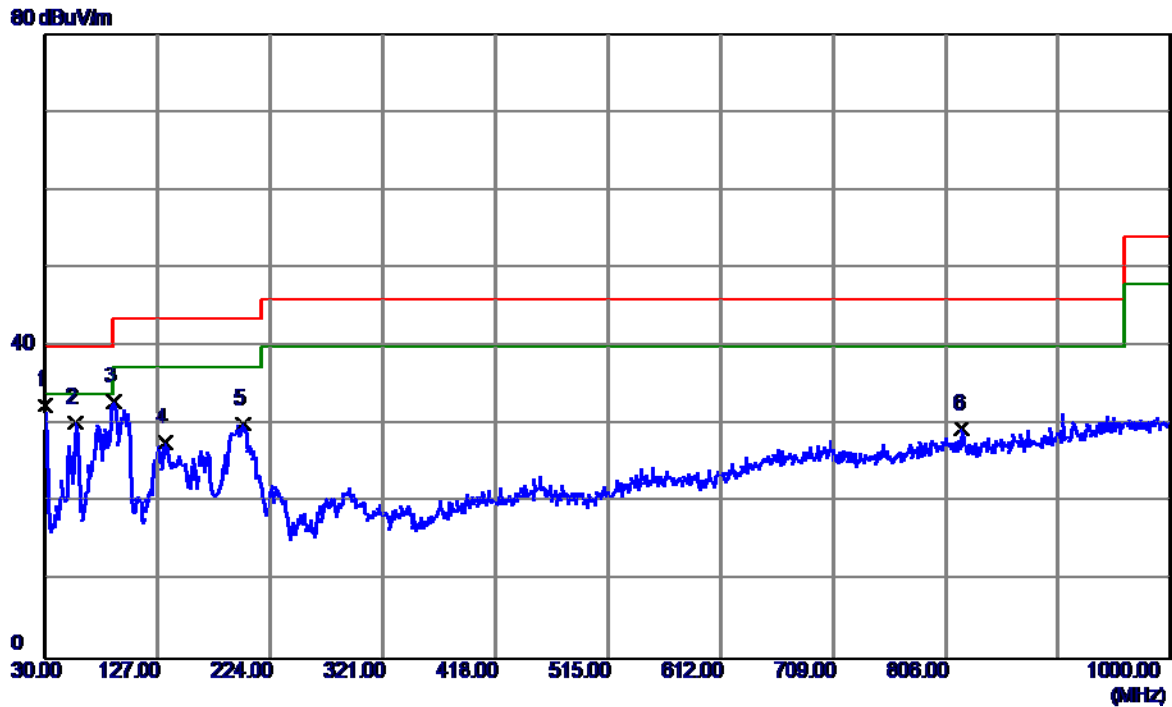


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 45.25                      | -12.80                  | 32.45                     | 40.00           | -7.55        | QP       |
| 2   | 56.1900      | 42.88                      | -12.60                  | 30.28                     | 40.00           | -9.72        | QP       |
| 3   | 89.6550      | 49.34                      | -16.39                  | 32.95                     | 43.50           | -10.55       | QP       |
| 4   | 133.7899     | 39.16                      | -11.42                  | 27.74                     | 43.50           | -15.76       | QP       |
| 5   | 200.7200     | 43.82                      | -13.67                  | 30.15                     | 43.50           | -13.35       | QP       |
| 6   | 820.5500     | 28.85                      | 0.60                    | 29.45                     | 46.00           | -16.55       | QP       |

|               |                                              |                   |            |
|---------------|----------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on           |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SUNWODA(ALT) |                   |            |
| Test Engineer | Treey Chen                                   |                   |            |

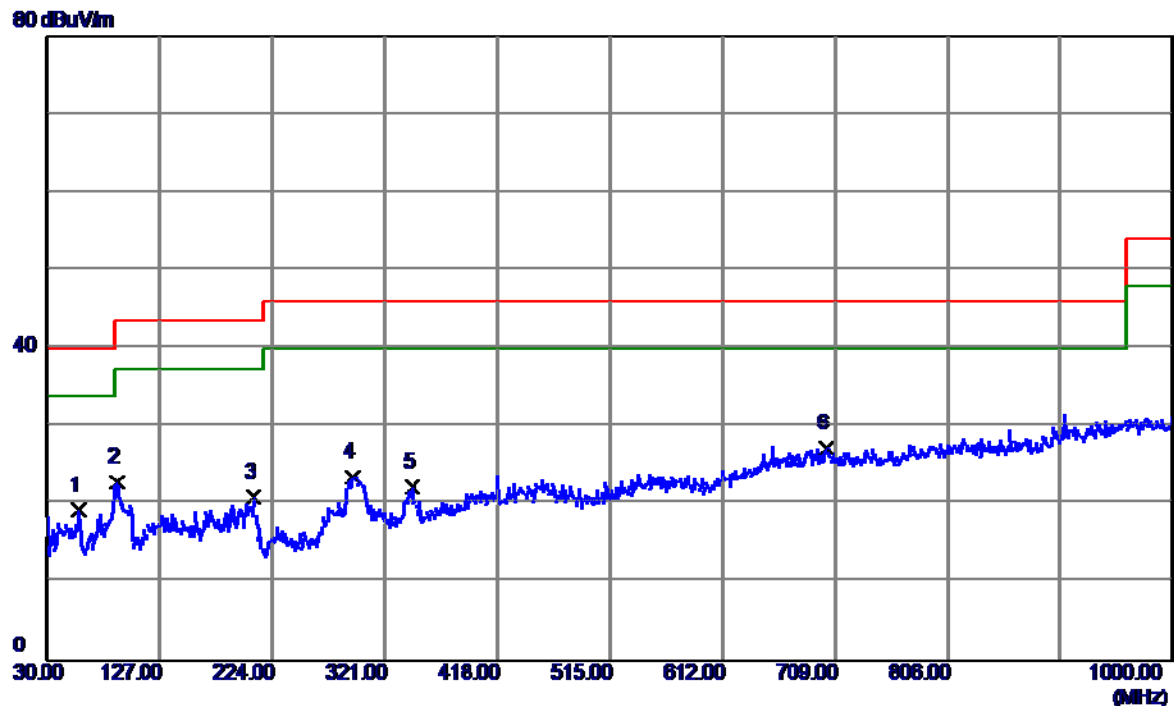


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 56.6750      | 31.90                      | -12.62                  | 19.28                     | 40.00           | -20.72       | QP       |
| 2   | 90.6250      | 39.29                      | -16.38                  | 22.91                     | 43.50           | -20.59       | QP       |
| 3   | 207.5100     | 34.90                      | -13.99                  | 20.91                     | 43.50           | -22.59       | QP       |
| 4   | 293.3550     | 33.48                      | -9.97                   | 23.51                     | 46.00           | -22.49       | QP       |
| 5   | 344.7650     | 32.98                      | -10.68                  | 22.30                     | 46.00           | -23.70       | QP       |
| 6 * | 701.7250     | 27.89                      | -0.66                   | 27.23                     | 46.00           | -18.77       | QP       |

|               |                                               |                   |          |
|---------------|-----------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                  | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on            |                   |          |
| Note          | Adapter:Salcomp+USB COPY:LX+BATTERY:SCUD(ATL) |                   |          |
| Test Engineer | Treey Chen                                    |                   |          |

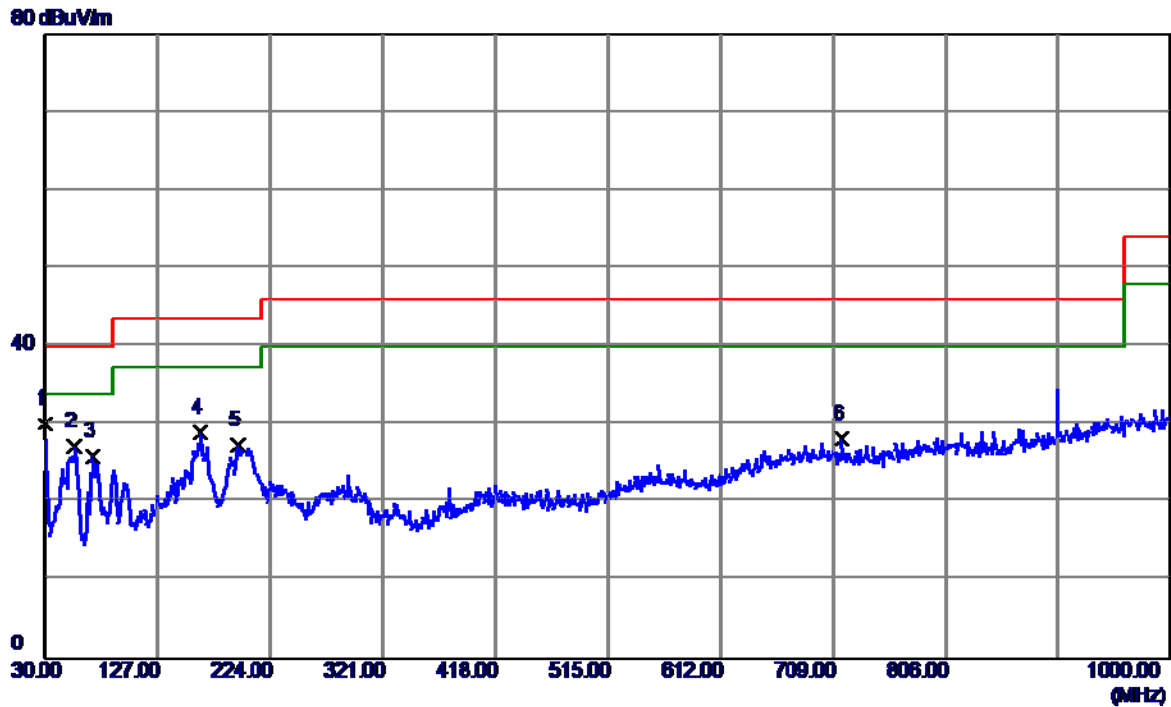


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 42.87                      | -12.80                  | 30.07                     | 40.00           | -9.93        | QP       |
| 2   | 55.2200      | 39.61                      | -12.44                  | 27.17                     | 40.00           | -12.83       | QP       |
| 3   | 71.2250      | 41.33                      | -15.45                  | 25.88                     | 40.00           | -14.12       | QP       |
| 4   | 163.3750     | 40.94                      | -11.93                  | 29.01                     | 43.50           | -14.49       | QP       |
| 5   | 195.8700     | 40.79                      | -13.46                  | 27.33                     | 43.50           | -16.17       | QP       |
| 6   | 716.2750     | 28.92                      | -0.72                   | 28.20                     | 46.00           | -17.80       | QP       |

|               |                                               |                   |            |
|---------------|-----------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                  | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on            |                   |            |
| Note          | Adapter:Salcomp+USB COPY:LX+BATTERY:SCUD(ATL) |                   |            |
| Test Engineer | Treey Chen                                    |                   |            |

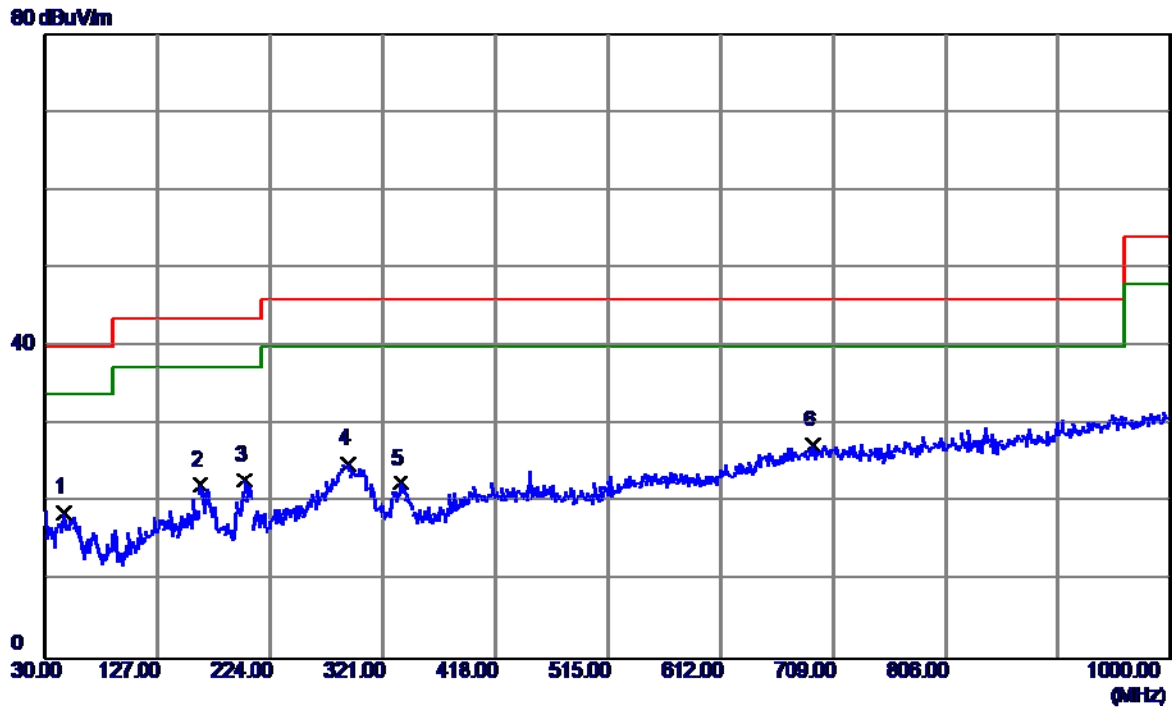


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 46.4900      | 30.90                      | -12.16                  | 18.74                     | 40.00           | -21.26       | QP       |
| 2   | 163.8600     | 34.03                      | -11.84                  | 22.19                     | 43.50           | -21.31       | QP       |
| 3   | 201.6900     | 36.65                      | -13.72                  | 22.93                     | 43.50           | -20.57       | QP       |
| 4   | 290.4450     | 34.92                      | -9.98                   | 24.94                     | 46.00           | -21.06       | QP       |
| 5   | 336.5200     | 33.03                      | -10.55                  | 22.48                     | 46.00           | -23.52       | QP       |
| 6 * | 691.5400     | 28.23                      | -0.83                   | 27.40                     | 46.00           | -18.60       | QP       |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                   |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

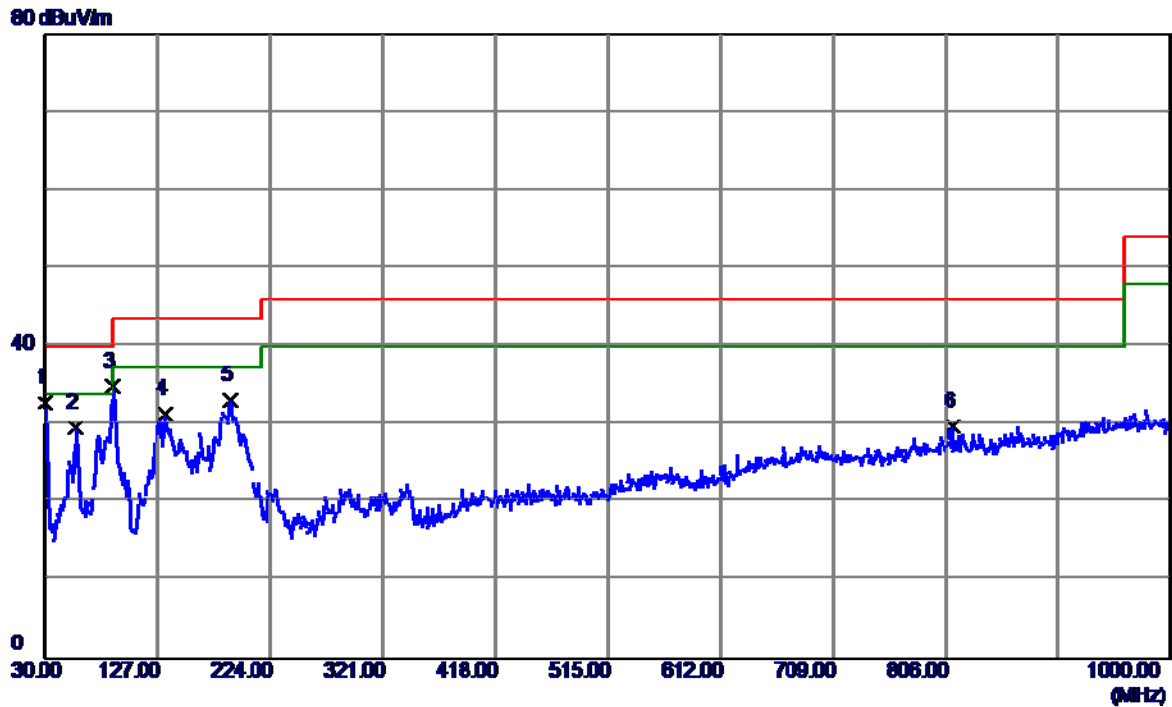


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 45.63                      | -12.80                  | 32.83                     | 40.00           | -7.17        | QP       |
| 2   | 56.1900      | 42.22                      | -12.60                  | 29.62                     | 40.00           | -10.38       | QP       |
| 3   | 88.6850      | 51.30                      | -16.36                  | 34.94                     | 43.50           | -8.56        | QP       |
| 4   | 133.3049     | 42.78                      | -11.38                  | 31.40                     | 43.50           | -12.10       | QP       |
| 5   | 189.0800     | 46.22                      | -13.10                  | 33.12                     | 43.50           | -10.38       | QP       |
| 6   | 812.3050     | 29.10                      | 0.61                    | 29.71                     | 46.00           | -16.29       | QP       |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                   |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

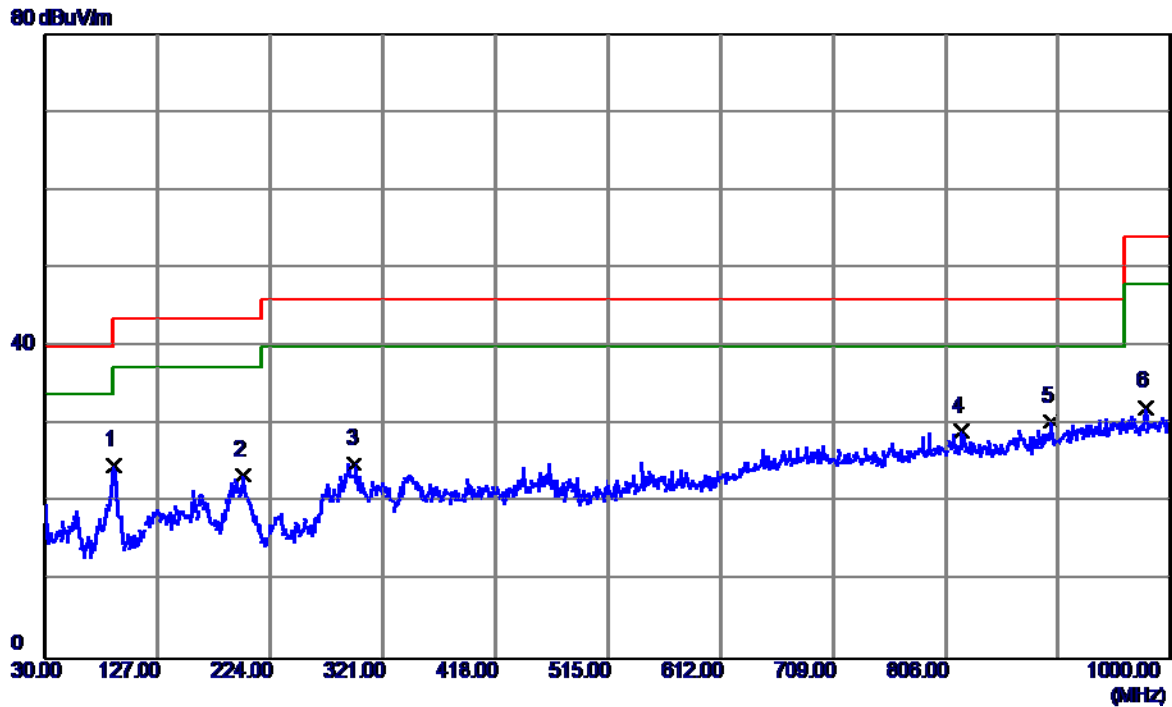


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 89.1700      | 41.19                      | -16.37                  | 24.82                     | 43.50           | -18.68       | QP       |
| 2   | 200.2350     | 37.20                      | -13.65                  | 23.55                     | 43.50           | -19.95       | QP       |
| 3   | 296.7500     | 34.88                      | -9.95                   | 24.93                     | 46.00           | -21.07       | QP       |
| 4   | 820.0650     | 28.54                      | 0.60                    | 29.14                     | 46.00           | -16.86       | QP       |
| 5 * | 896.2100     | 28.77                      | 1.60                    | 30.37                     | 46.00           | -15.63       | QP       |
| 6   | 978.1750     | 28.63                      | 3.61                    | 32.24                     | 54.00           | -21.76       | QP       |

|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Earphone                                  |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:Goertek |                   |          |
| Test Engineer | Treey Chen                                                |                   |          |

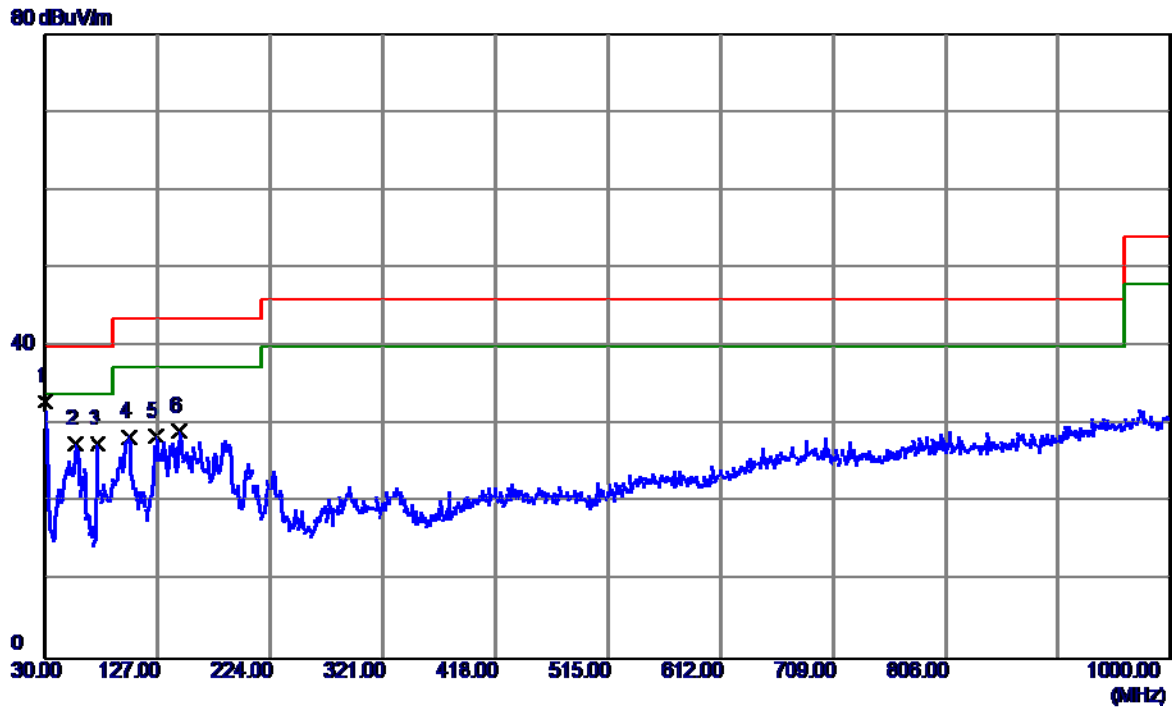


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 45.72                      | -12.80                  | 32.92                     | 40.00           | -7.08        | QP       |
| 2   | 56.1900      | 40.10                      | -12.60                  | 27.50                     | 40.00           | -12.50       | QP       |
| 3   | 75.1050      | 43.70                      | -16.20                  | 27.50                     | 40.00           | -12.50       | QP       |
| 4   | 101.7800     | 42.81                      | -14.41                  | 28.40                     | 43.50           | -15.10       | QP       |
| 5   | 125.5450     | 40.31                      | -11.79                  | 28.52                     | 43.50           | -14.98       | QP       |
| 6   | 144.9450     | 41.06                      | -11.90                  | 29.16                     | 43.50           | -14.34       | QP       |

|               |                                                           |                   |            |
|---------------|-----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Earphone                                  |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:Goertek |                   |            |
| Test Engineer | Treey Chen                                                |                   |            |

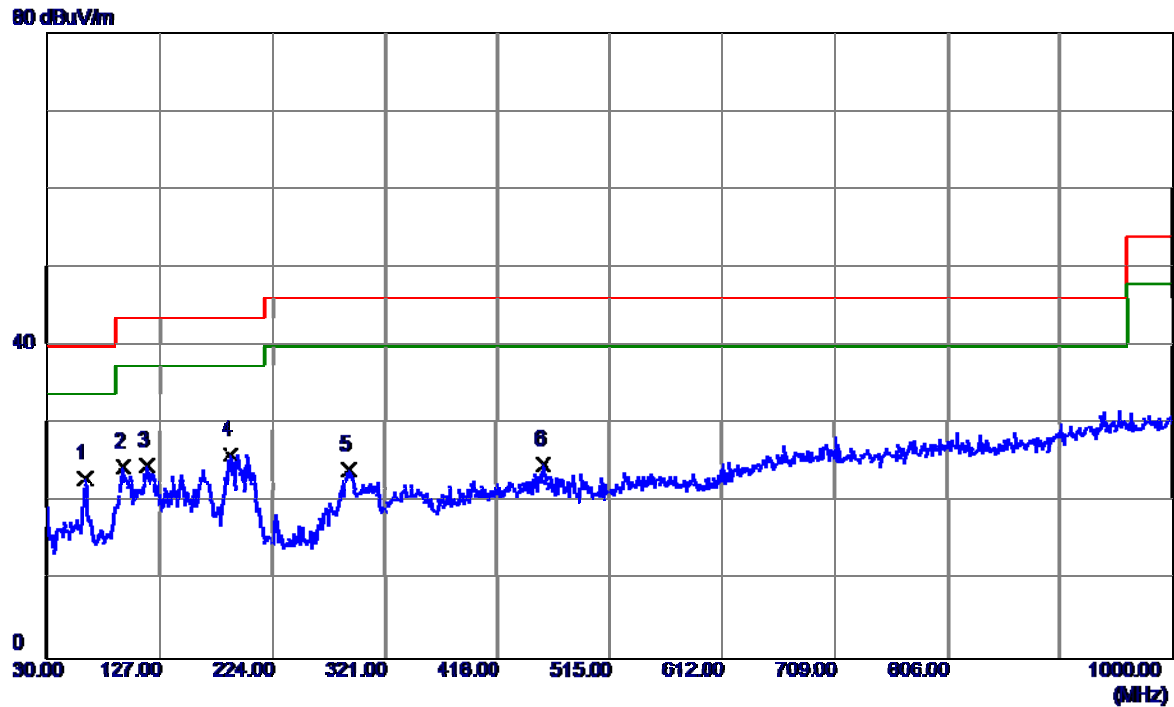


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 63.4650      | 36.91                      | -13.90                  | 23.01                     | 40.00           | -16.99       | QP       |
| 2   | 95.9600      | 40.39                      | -15.93                  | 24.46                     | 43.50           | -19.04       | QP       |
| 3   | 115.8450     | 37.77                      | -13.13                  | 24.64                     | 43.50           | -18.86       | QP       |
| 4   | 188.5950     | 39.17                      | -13.05                  | 26.12                     | 43.50           | -17.38       | QP       |
| 5   | 290.9300     | 34.10                      | -9.98                   | 24.12                     | 46.00           | -21.88       | QP       |
| 6   | 457.7700     | 31.99                      | -7.16                   | 24.83                     | 46.00           | -21.17       | QP       |

|               |                                                         |                   |          |
|---------------|---------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                             | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Earpone                                 |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:MERRY |                   |          |
| Test Engineer | Treey Chen                                              |                   |          |

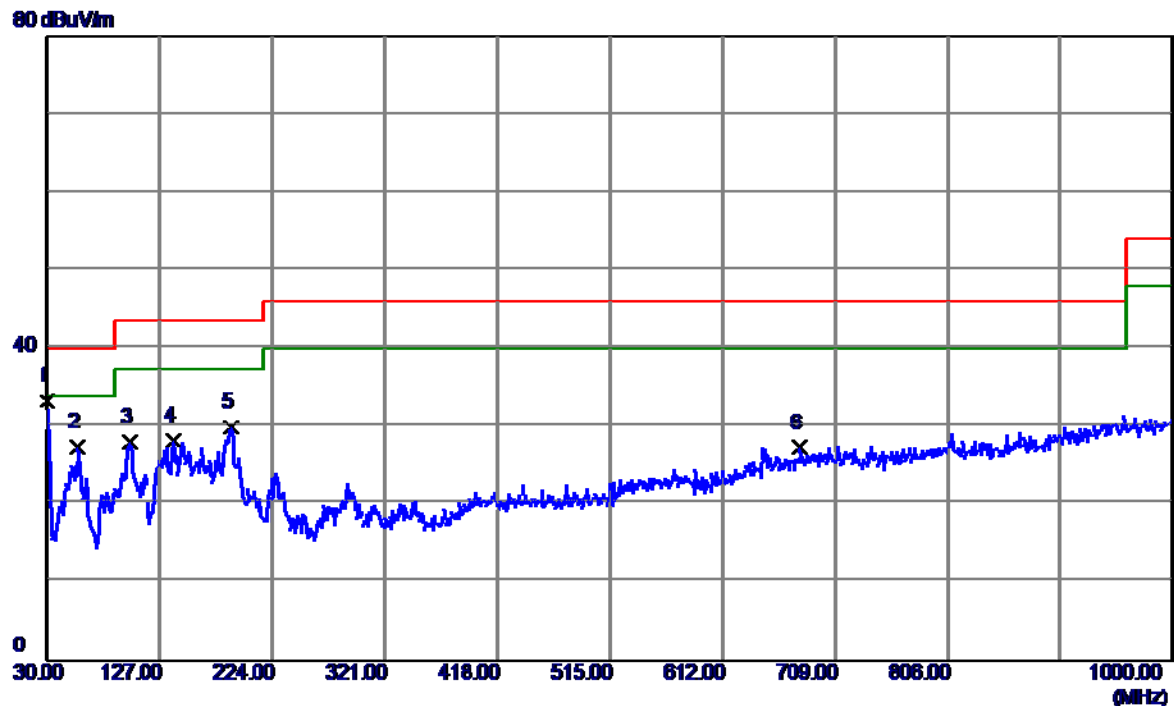


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 46.07                      | -12.80                  | 33.27                     | 40.00           | -6.73        | QP       |
| 2   | 56.1900      | 39.93                      | -12.60                  | 27.33                     | 40.00           | -12.67       | QP       |
| 3   | 101.2950     | 42.41                      | -14.44                  | 27.97                     | 43.50           | -15.53       | QP       |
| 4   | 139.1250     | 40.04                      | -11.81                  | 28.23                     | 43.50           | -15.27       | QP       |
| 5   | 188.1100     | 42.91                      | -13.00                  | 29.91                     | 43.50           | -13.59       | QP       |
| 6   | 678.9300     | 28.37                      | -1.09                   | 27.28                     | 46.00           | -18.72       | QP       |

|               |                                                         |                   |            |
|---------------|---------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                             | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Earpone                                 |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:MERRY |                   |            |
| Test Engineer | Treey Chen                                              |                   |            |

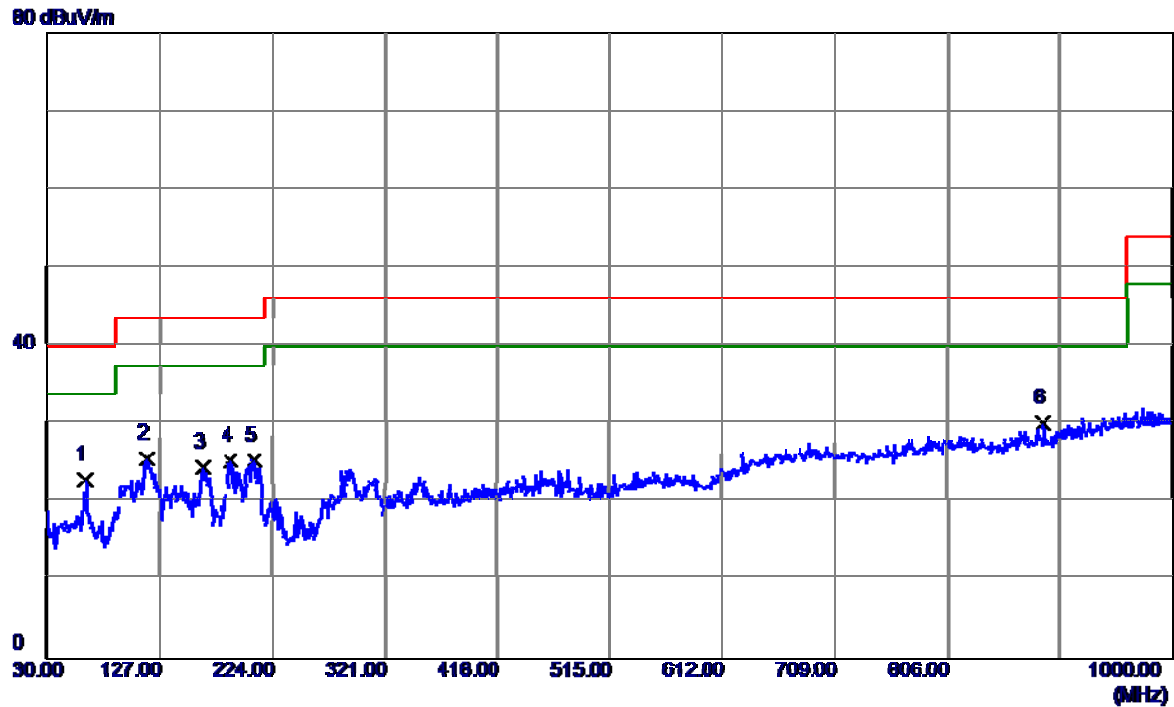


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.9800      | 36.80                      | -13.95                  | 22.85                     | 40.00           | -17.15       | QP       |
| 2   | 115.8450     | 38.75                      | -13.13                  | 25.62                     | 43.50           | -17.88       | QP       |
| 3   | 164.3450     | 36.25                      | -11.75                  | 24.50                     | 43.50           | -19.00       | QP       |
| 4   | 188.1100     | 38.29                      | -13.00                  | 25.29                     | 43.50           | -18.21       | QP       |
| 5   | 208.9650     | 39.30                      | -14.05                  | 25.25                     | 43.50           | -18.25       | QP       |
| 6 * | 889.4200     | 28.57                      | 1.45                    | 30.02                     | 46.00           | -15.98       | QP       |

|               |                                              |                   |          |
|---------------|----------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Earpone                      |                   |          |
| Note          | Adapter:BYD+USB                              |                   |          |
|               | COPY:LX+BATTERY:DESAY(LG)Earphone:LianChuang |                   |          |
| Test Engineer | Treey Chen                                   |                   |          |

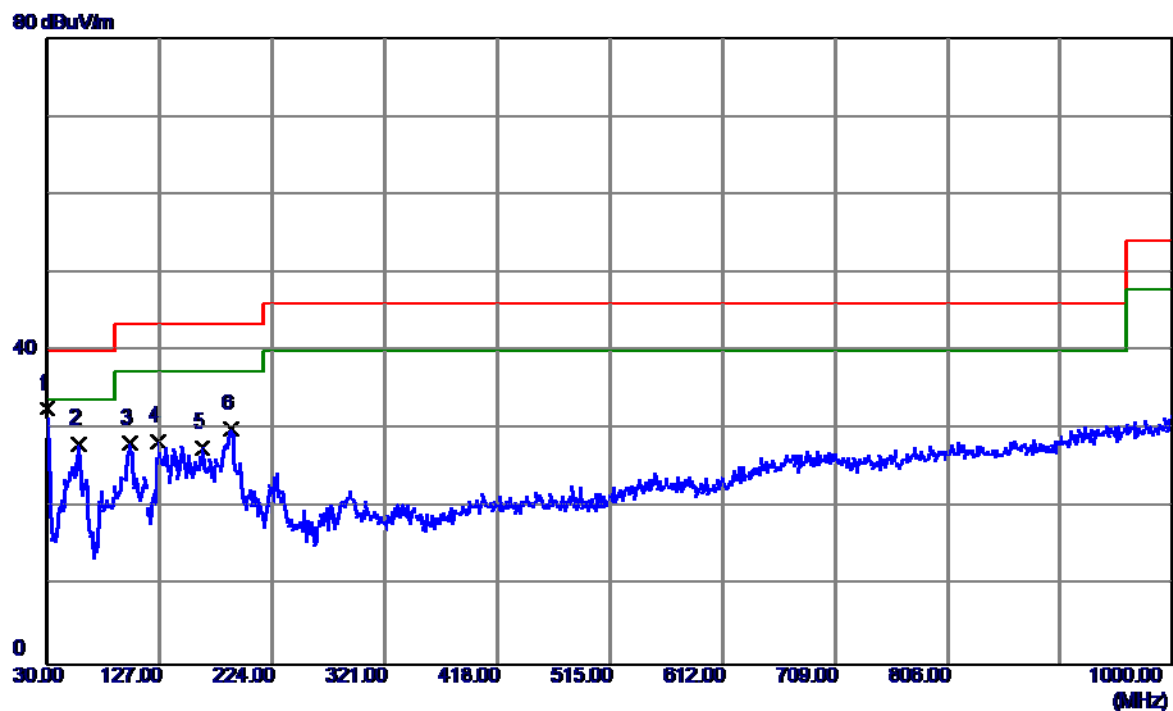


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 45.48                      | -12.80                  | 32.68                     | 40.00           | -7.32        | QP       |
| 2   | 56.6750      | 40.78                      | -12.62                  | 28.16                     | 40.00           | -11.84       | QP       |
| 3   | 100.8100     | 42.72                      | -14.48                  | 28.24                     | 43.50           | -15.26       | QP       |
| 4   | 125.5450     | 40.22                      | -11.79                  | 28.43                     | 43.50           | -15.07       | QP       |
| 5   | 163.3750     | 39.55                      | -11.93                  | 27.62                     | 43.50           | -15.88       | QP       |
| 6   | 188.5950     | 43.15                      | -13.05                  | 30.10                     | 43.50           | -13.40       | QP       |

|               |                                              |                   |            |
|---------------|----------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Earpone                      |                   |            |
| Note          | Adapter:BYD+USB                              |                   |            |
|               | COPY:LX+BATTERY:DESAY(LG)Earphone:LianChuang |                   |            |
| Test Engineer | Treey Chen                                   |                   |            |

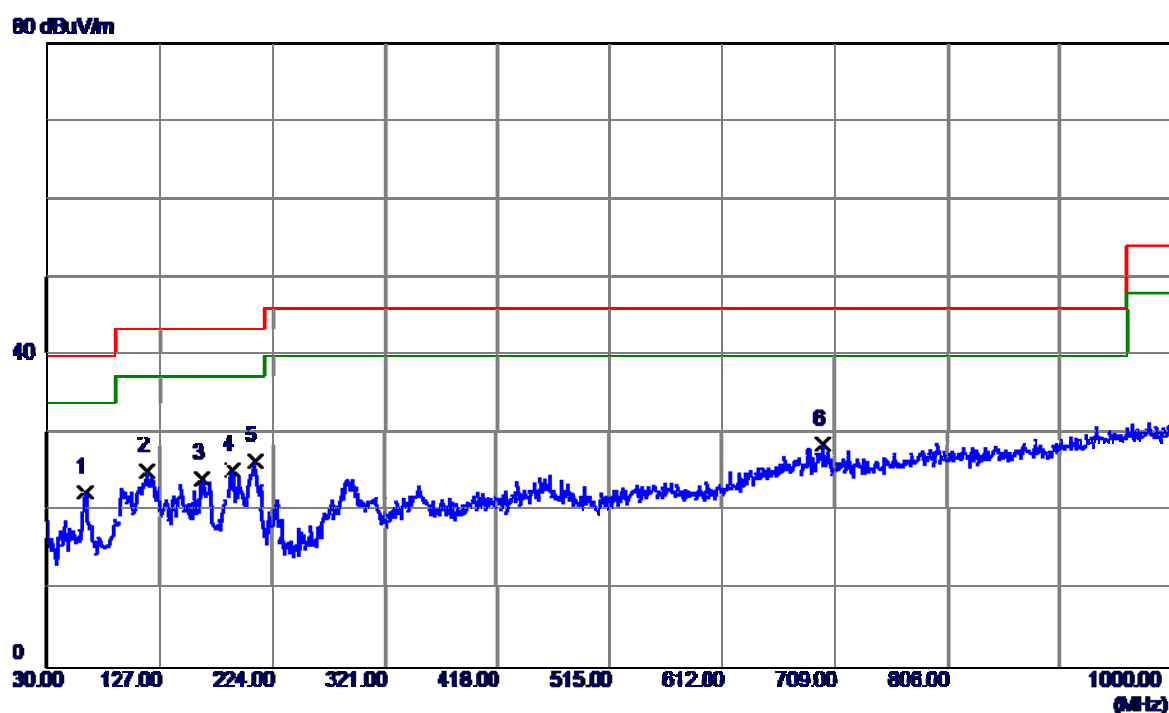


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 63.4650      | 36.39                      | -13.90                  | 22.49                     | 40.00           | -17.51       | QP       |
| 2   | 115.8450     | 38.38                      | -13.13                  | 25.25                     | 43.50           | -18.25       | QP       |
| 3   | 163.3750     | 36.20                      | -11.93                  | 24.27                     | 43.50           | -19.23       | QP       |
| 4   | 189.0800     | 38.53                      | -13.10                  | 25.43                     | 43.50           | -18.07       | QP       |
| 5 * | 208.4800     | 40.64                      | -14.03                  | 26.61                     | 43.50           | -16.89       | QP       |
| 6   | 699.7849     | 29.31                      | -0.65                   | 28.66                     | 46.00           | -17.34       | QP       |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Earpone                     |                   |          |
| Note          | Adapter:BYD+USB                             |                   |          |
|               | COPY:LX+BATTERY:DESAY(LG)Earphone:QuanCheng |                   |          |
| Test Engineer | Treey Chen                                  |                   |          |

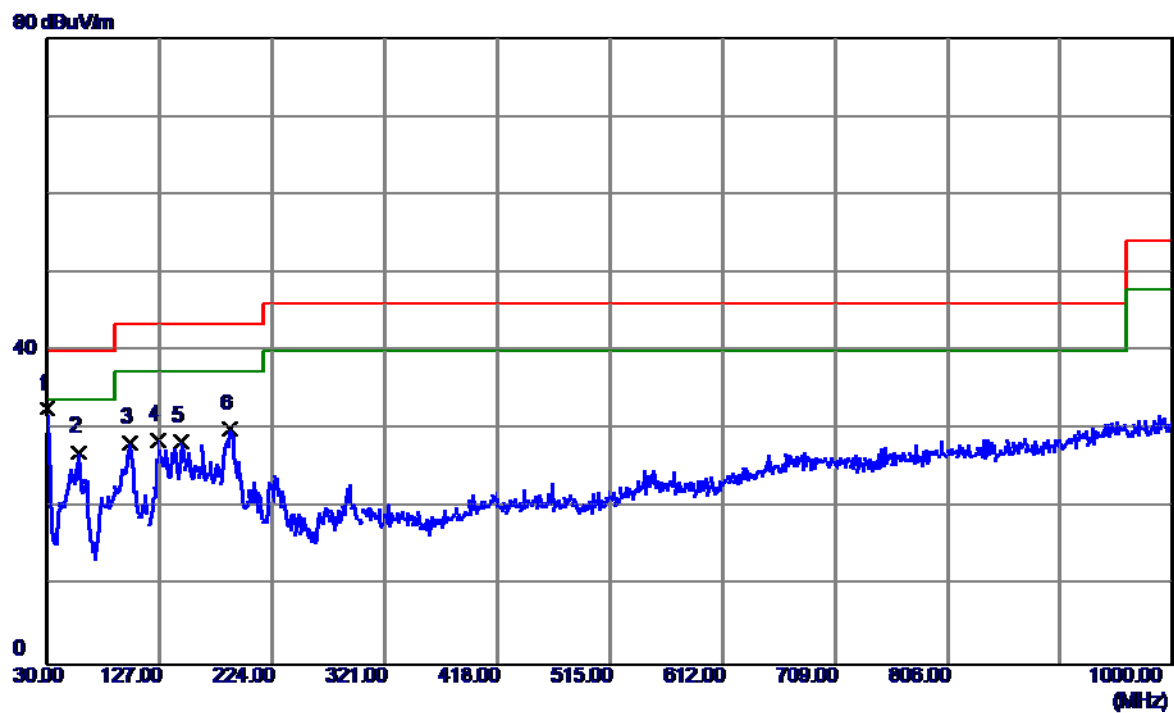


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 45.45                      | -12.80                  | 32.65                     | 40.00           | -7.35        | QP       |
| 2   | 56.6750      | 39.74                      | -12.62                  | 27.12                     | 40.00           | -12.88       | QP       |
| 3   | 100.8100     | 42.80                      | -14.48                  | 28.32                     | 43.50           | -15.18       | QP       |
| 4   | 125.5450     | 40.37                      | -11.79                  | 28.58                     | 43.50           | -14.92       | QP       |
| 5   | 145.4299     | 40.38                      | -11.90                  | 28.48                     | 43.50           | -15.02       | QP       |
| 6   | 187.6250     | 42.97                      | -12.95                  | 30.02                     | 43.50           | -13.48       | QP       |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Earpone                     |                   |            |
| Note          | Adapter:BYD+USB                             |                   |            |
|               | COPY:LX+BATTERY:DESAY(LG)Earphone:QuanCheng |                   |            |
| Test Engineer | Treey Chen                                  |                   |            |

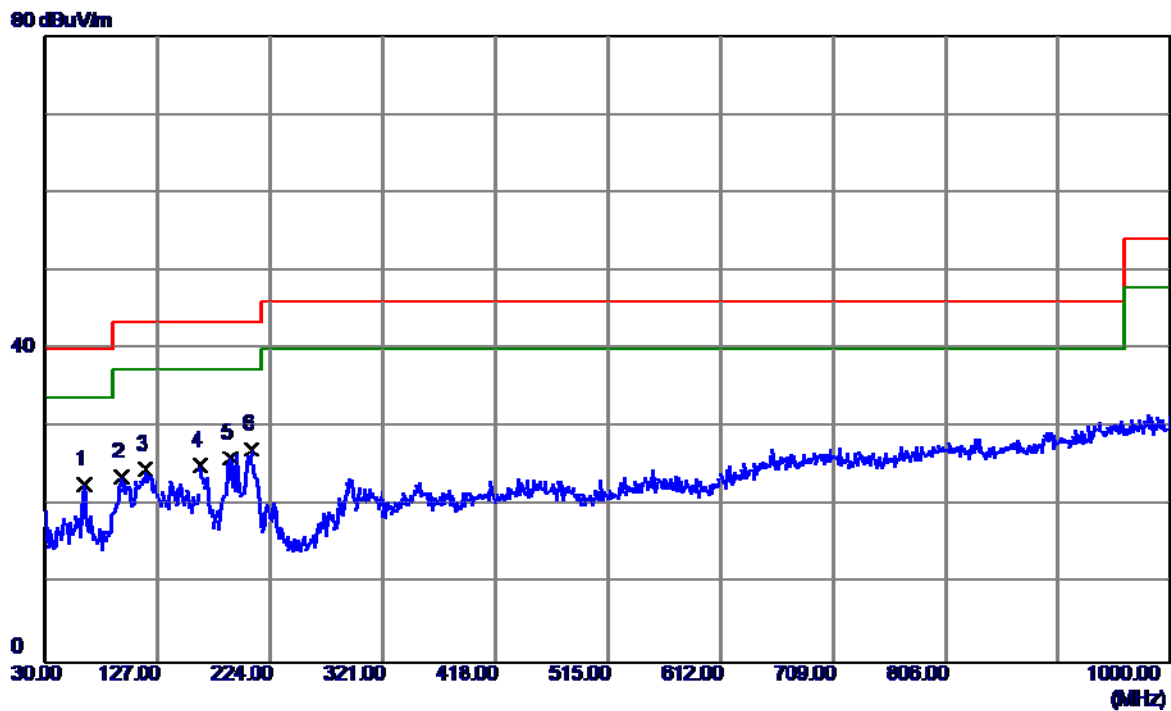


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.9800      | 36.61                      | -13.95                  | 22.66                     | 40.00           | -17.34       | QP       |
| 2   | 95.9600      | 39.61                      | -15.93                  | 23.68                     | 43.50           | -19.82       | QP       |
| 3   | 115.8450     | 37.78                      | -13.13                  | 24.65                     | 43.50           | -18.85       | QP       |
| 4   | 163.3750     | 37.07                      | -11.93                  | 25.14                     | 43.50           | -18.36       | QP       |
| 5   | 189.0800     | 39.25                      | -13.10                  | 26.15                     | 43.50           | -17.35       | QP       |
| 6 * | 207.9950     | 41.26                      | -14.01                  | 27.25                     | 43.50           | -16.25       | QP       |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

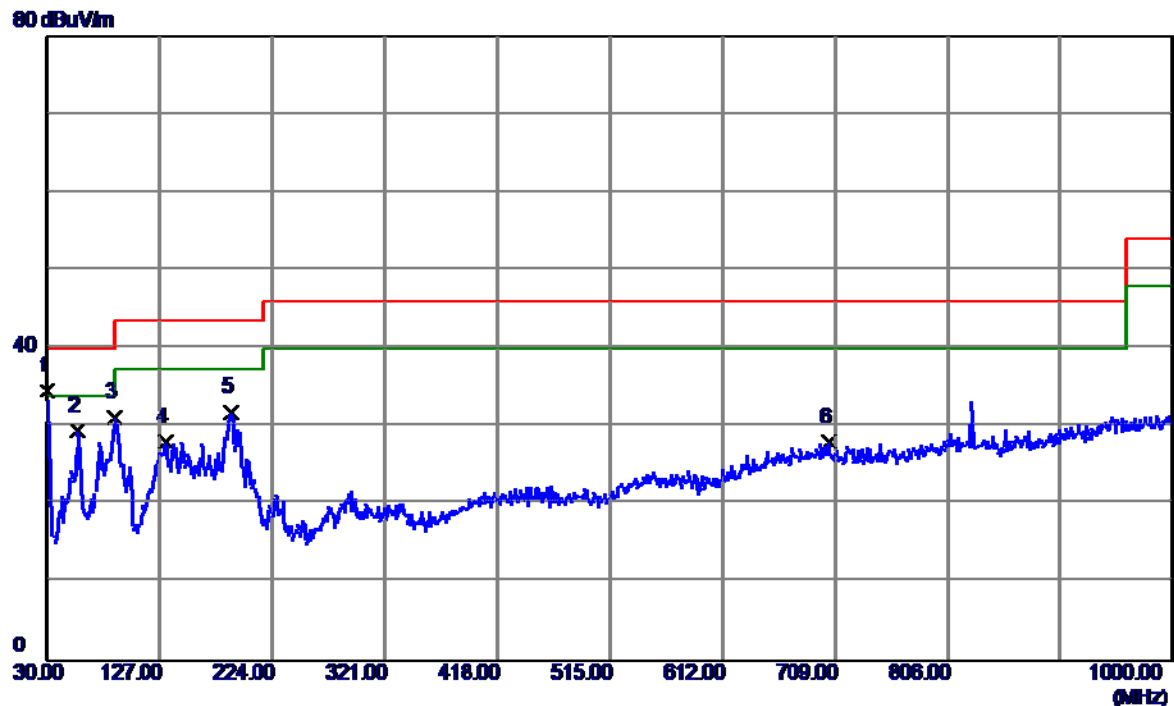


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 47.30                      | -12.80                  | 34.50                     | 40.00           | -5.50        | QP       |
| 2   | 56.1900      | 42.11                      | -12.60                  | 29.51                     | 40.00           | -10.49       | QP       |
| 3   | 88.6850      | 47.49                      | -16.36                  | 31.13                     | 43.50           | -12.37       | QP       |
| 4   | 132.3350     | 39.33                      | -11.31                  | 28.02                     | 43.50           | -15.48       | QP       |
| 5   | 188.1100     | 44.80                      | -13.00                  | 31.80                     | 43.50           | -11.70       | QP       |
| 6   | 703.1800     | 28.61                      | -0.66                   | 27.95                     | 46.00           | -18.05       | QP       |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

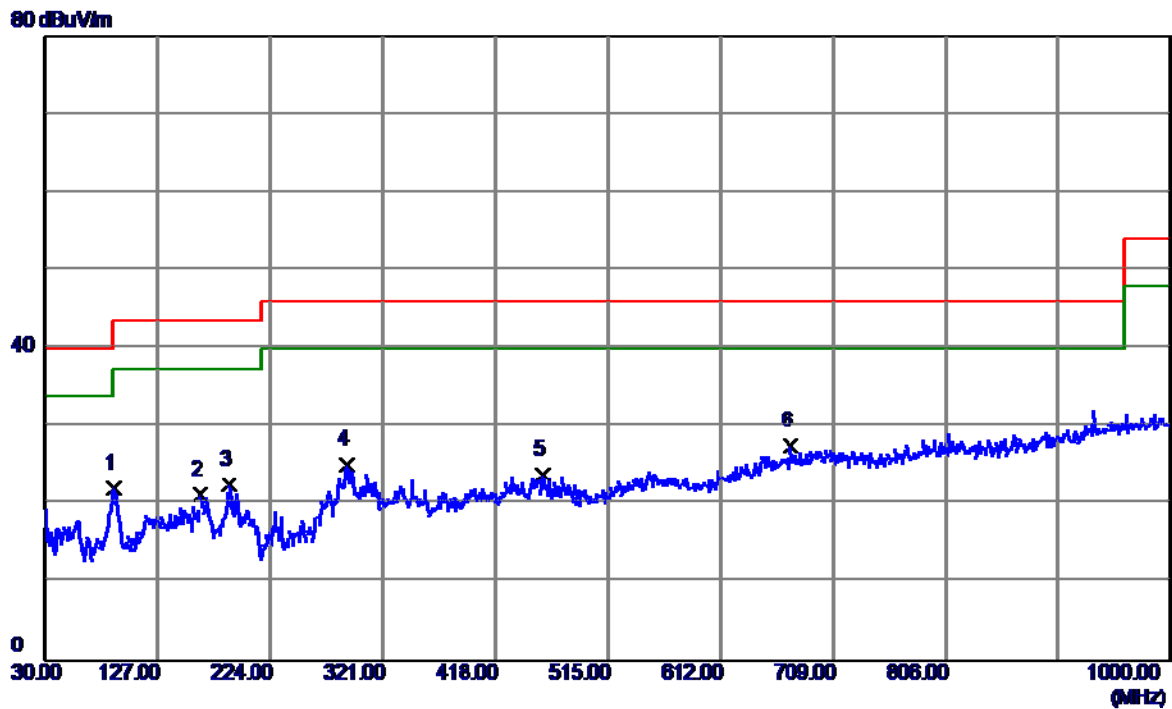


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 89.1700      | 38.52                      | -16.37                  | 22.15                     | 43.50           | -21.35       | QP       |
| 2   | 163.8600     | 33.09                      | -11.84                  | 21.25                     | 43.50           | -22.25       | QP       |
| 3   | 188.5950     | 35.56                      | -13.05                  | 22.51                     | 43.50           | -20.99       | QP       |
| 4   | 289.9600     | 35.08                      | -9.99                   | 25.09                     | 46.00           | -20.91       | QP       |
| 5   | 459.2250     | 30.97                      | -7.18                   | 23.79                     | 46.00           | -22.21       | QP       |
| 6 * | 672.1400     | 28.72                      | -1.23                   | 27.49                     | 46.00           | -18.51       | QP       |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

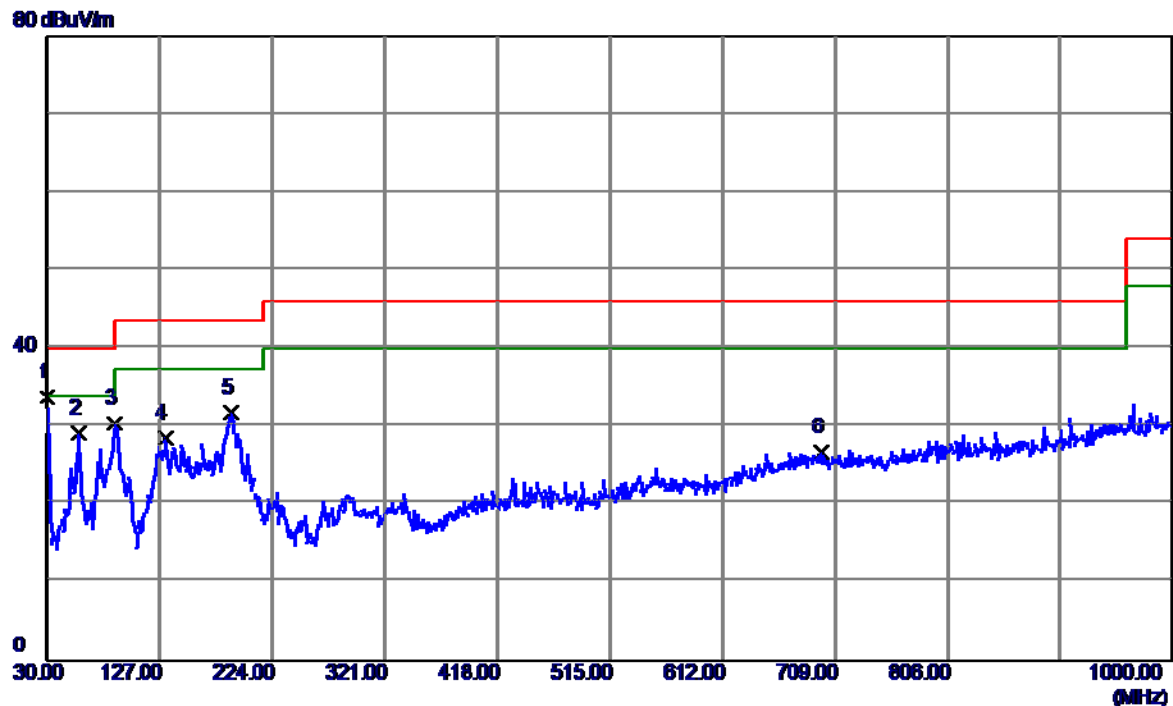


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 46.55                      | -12.80                  | 33.75                     | 40.00           | -6.25        | QP       |
| 2   | 56.6750      | 41.69                      | -12.62                  | 29.07                     | 40.00           | -10.93       | QP       |
| 3   | 88.6850      | 46.74                      | -16.36                  | 30.38                     | 43.50           | -13.12       | QP       |
| 4   | 131.8500     | 39.78                      | -11.28                  | 28.50                     | 43.50           | -15.00       | QP       |
| 5   | 188.1100     | 44.76                      | -13.00                  | 31.76                     | 43.50           | -11.74       | QP       |
| 6   | 696.8750     | 27.44                      | -0.72                   | 26.72                     | 46.00           | -19.28       | QP       |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

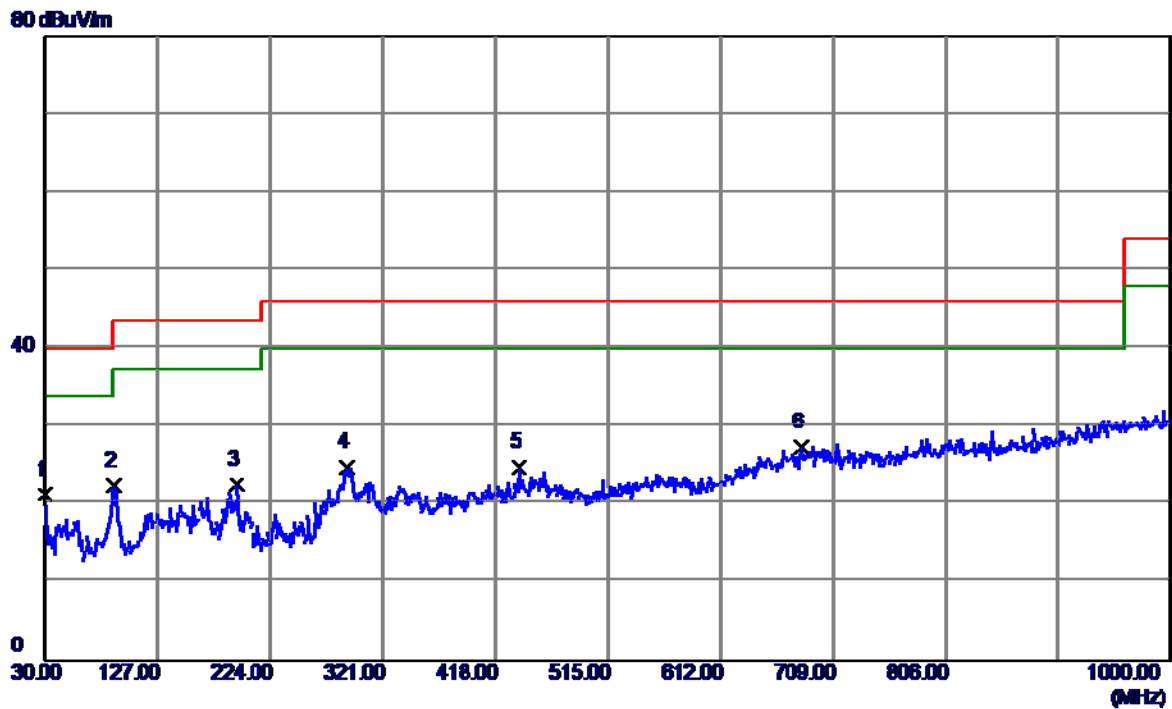


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 30.0000      | 34.04                      | -12.80                  | 21.24                     | 40.00           | -18.76       | QP       |
| 2   | 89.6550      | 38.81                      | -16.39                  | 22.42                     | 43.50           | -21.08       | QP       |
| 3   | 195.3850     | 35.93                      | -13.43                  | 22.50                     | 43.50           | -21.00       | QP       |
| 4   | 289.4750     | 34.89                      | -10.07                  | 24.82                     | 46.00           | -21.18       | QP       |
| 5   | 438.3700     | 31.83                      | -7.10                   | 24.73                     | 46.00           | -21.27       | QP       |
| 6 * | 681.8400     | 28.37                      | -1.03                   | 27.34                     | 46.00           | -18.66       | QP       |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(LTE)                      |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

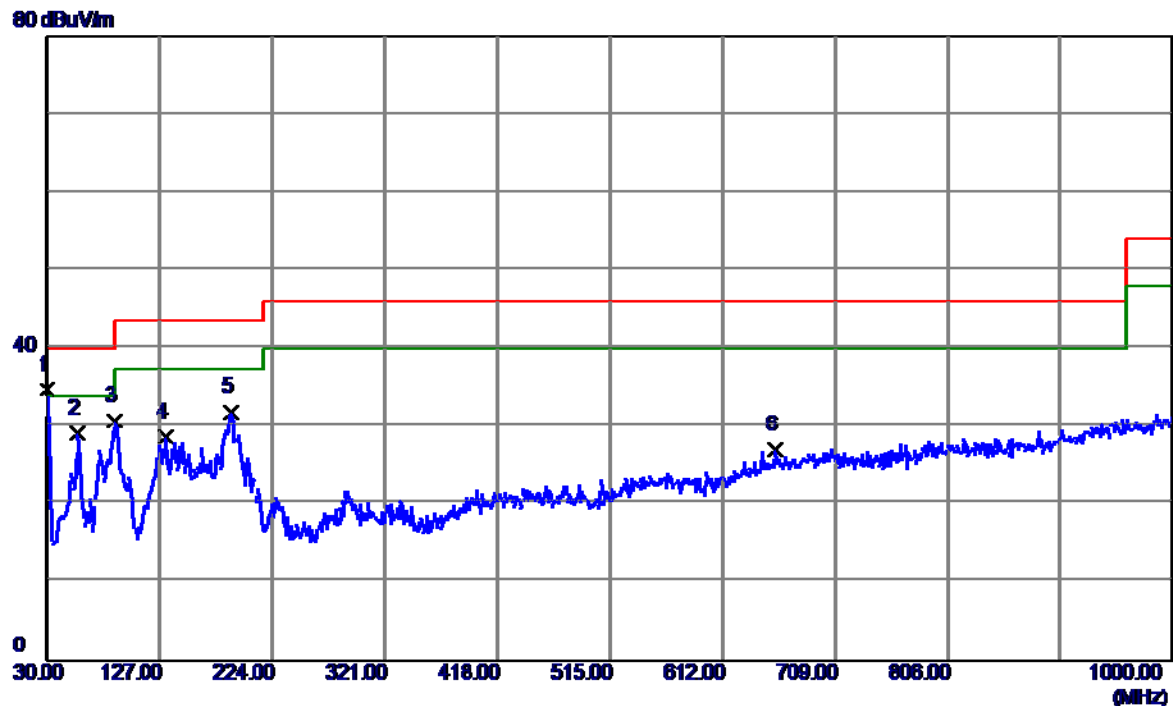

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 30.0000      | 47.46                      | -12.80                  | 34.66                     | 40.00           | -5.34        | QP       |
| 2   | 56.1900      | 41.68                      | -12.60                  | 29.08                     | 40.00           | -10.92       | QP       |
| 3   | 88.6850      | 47.09                      | -16.36                  | 30.73                     | 43.50           | -12.77       | QP       |
| 4   | 132.3350     | 39.98                      | -11.31                  | 28.67                     | 43.50           | -14.83       | QP       |
| 5   | 188.5950     | 44.87                      | -13.05                  | 31.82                     | 43.50           | -11.68       | QP       |
| 6   | 657.1050     | 28.57                      | -1.54                   | 27.03                     | 46.00           | -18.97       | QP       |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(LTE)                      |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

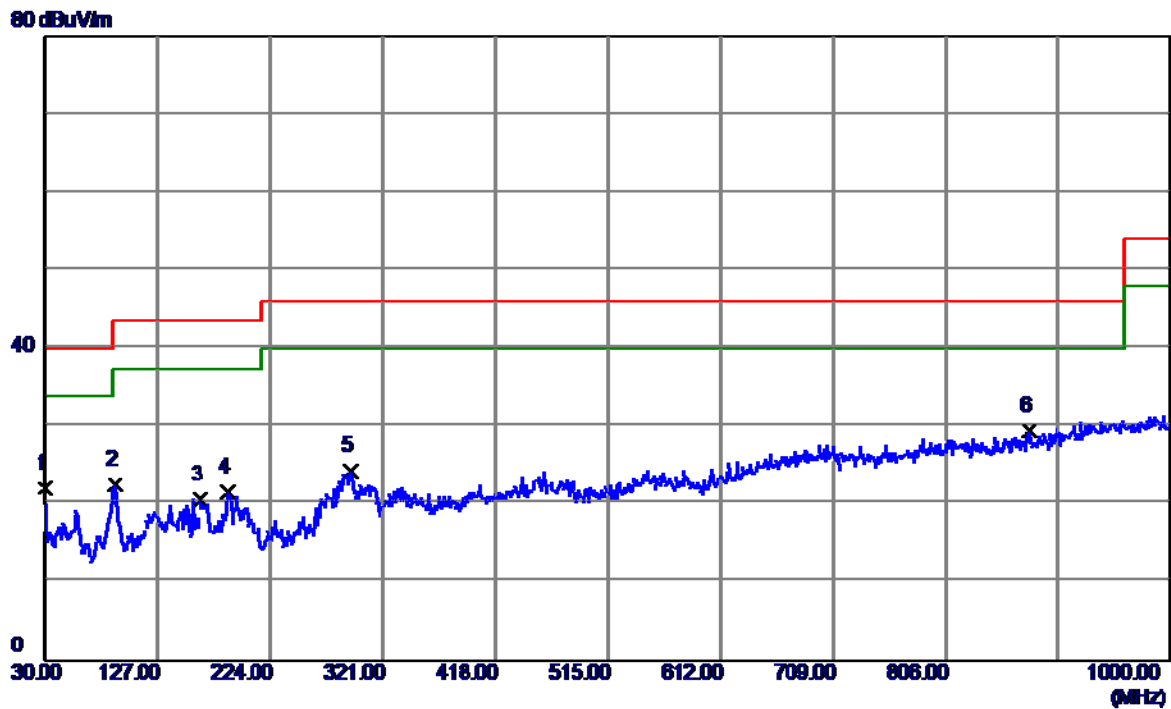


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 30.0000      | 34.81                      | -12.80                  | 22.01                     | 40.00           | -17.99       | QP       |
| 2   | 90.6250      | 38.92                      | -16.38                  | 22.54                     | 43.50           | -20.96       | QP       |
| 3   | 163.8600     | 32.51                      | -11.84                  | 20.67                     | 43.50           | -22.83       | QP       |
| 4   | 187.6250     | 34.48                      | -12.95                  | 21.53                     | 43.50           | -21.97       | QP       |
| 5   | 292.8700     | 34.36                      | -9.97                   | 24.39                     | 46.00           | -21.61       | QP       |
| 6 * | 878.2650     | 28.22                      | 1.21                    | 29.43                     | 46.00           | -16.57       | QP       |

#### 4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “\*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB COPY:CR   |                   |          |
| Test Engineer | Treyy Chen    |                   |          |

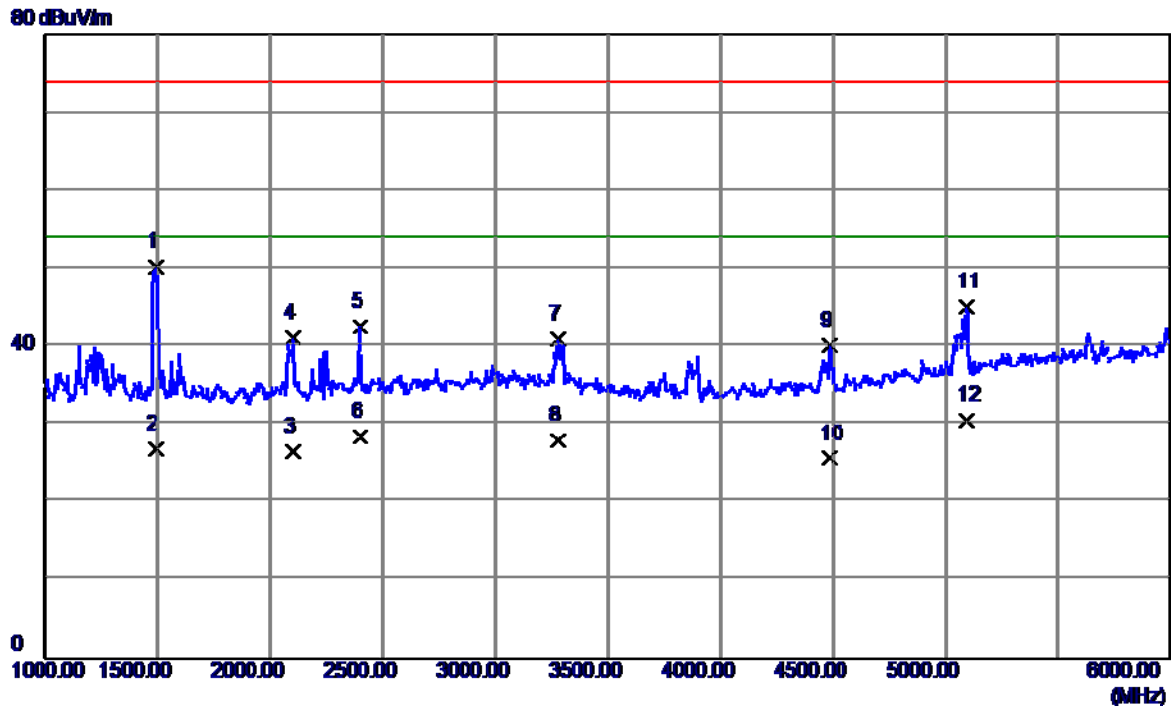

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1495.0000    | 55.20                      | -4.97                   | 50.23                     | 74.00           | -23.77       | Peak     |
| 2    | 1495.0000    | 31.89                      | -4.97                   | 26.92                     | 54.00           | -27.08       | AVG      |
| 3    | 2097.5000    | 28.65                      | -2.04                   | 26.61                     | 54.00           | -27.39       | AVG      |
| 4    | 2100.0000    | 43.08                      | -2.02                   | 41.06                     | 74.00           | -32.94       | Peak     |
| 5    | 2397.5000    | 42.93                      | -0.39                   | 42.54                     | 74.00           | -31.46       | Peak     |
| 6    | 2397.5000    | 28.87                      | -0.39                   | 28.48                     | 54.00           | -25.52       | AVG      |
| 7    | 3277.5000    | 38.67                      | 2.32                    | 40.99                     | 74.00           | -33.01       | Peak     |
| 8    | 3277.5000    | 25.64                      | 2.32                    | 27.96                     | 54.00           | -26.04       | AVG      |
| 9    | 4485.0000    | 36.36                      | 3.85                    | 40.21                     | 74.00           | -33.79       | Peak     |
| 10   | 4485.0000    | 21.83                      | 3.85                    | 25.68                     | 54.00           | -28.32       | AVG      |
| 11   | 5092.5000    | 38.54                      | 6.62                    | 45.16                     | 74.00           | -28.84       | Peak     |
| 12 * | 5092.5000    | 23.98                      | 6.62                    | 30.60                     | 54.00           | -23.40       | AVG      |


|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB COPY:CR   |                   |            |
| Test Engineer | Treey Chen    |                   |            |

80 dBuV/m

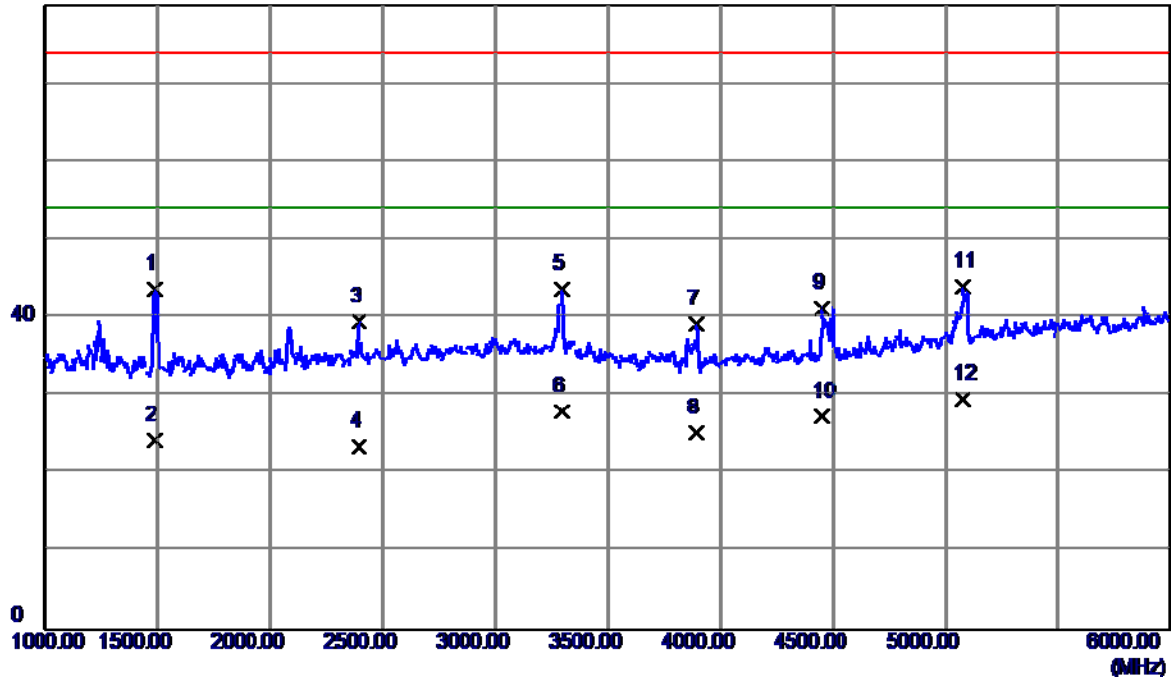


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1487.5000    | 48.65                      | -4.99                   | 43.66                     | 74.00           | -30.34       | Peak     |
| 2    | 1487.5000    | 29.37                      | -4.99                   | 24.38                     | 54.00           | -29.62       | AVG      |
| 3    | 2395.0000    | 39.98                      | -0.41                   | 39.57                     | 74.00           | -34.43       | Peak     |
| 4    | 2395.0000    | 23.86                      | -0.41                   | 23.45                     | 54.00           | -30.55       | AVG      |
| 5    | 3295.0000    | 41.30                      | 2.31                    | 43.61                     | 74.00           | -30.39       | Peak     |
| 6    | 3295.0000    | 25.65                      | 2.31                    | 27.96                     | 54.00           | -26.04       | AVG      |
| 7    | 3895.0000    | 36.61                      | 2.62                    | 39.23                     | 74.00           | -34.77       | Peak     |
| 8    | 3895.0000    | 22.68                      | 2.62                    | 25.30                     | 54.00           | -28.70       | AVG      |
| 9    | 4450.0000    | 37.44                      | 3.76                    | 41.20                     | 74.00           | -32.80       | Peak     |
| 10   | 4450.0000    | 23.65                      | 3.76                    | 27.41                     | 54.00           | -26.59       | AVG      |
| 11   | 5080.0000    | 37.46                      | 6.58                    | 44.04                     | 74.00           | -29.96       | Peak     |
| 12 * | 5080.0000    | 22.98                      | 6.58                    | 29.56                     | 54.00           | -24.44       | AVG      |

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB COPY:FF   |                   |          |
| Test Engineer | Treyy Chen    |                   |          |

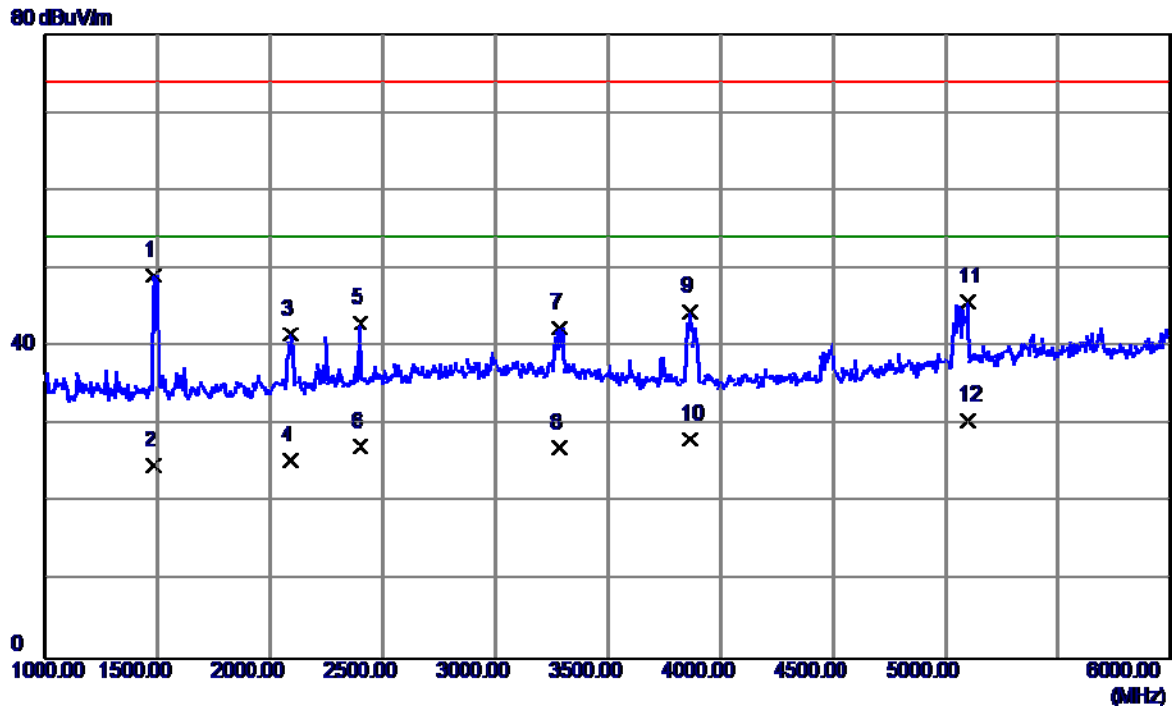


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1482.5000    | 54.20                      | -5.01                   | 49.19                     | 74.00           | -24.81       | Peak     |
| 2    | 1482.5000    | 29.84                      | -5.01                   | 24.83                     | 54.00           | -29.17       | AVG      |
| 3    | 2090.0000    | 43.62                      | -2.08                   | 41.54                     | 74.00           | -32.46       | Peak     |
| 4    | 2090.0000    | 27.45                      | -2.08                   | 25.37                     | 54.00           | -28.63       | AVG      |
| 5    | 2397.5000    | 43.38                      | -0.39                   | 42.99                     | 74.00           | -31.01       | Peak     |
| 6    | 2397.5000    | 27.64                      | -0.39                   | 27.25                     | 54.00           | -26.75       | AVG      |
| 7    | 3285.0000    | 40.14                      | 2.32                    | 42.46                     | 74.00           | -31.54       | Peak     |
| 8    | 3285.0000    | 24.65                      | 2.32                    | 26.97                     | 54.00           | -27.03       | AVG      |
| 9    | 3865.0000    | 41.82                      | 2.59                    | 44.41                     | 74.00           | -29.59       | Peak     |
| 10   | 3865.0000    | 25.64                      | 2.59                    | 28.23                     | 54.00           | -25.77       | AVG      |
| 11   | 5097.5000    | 39.17                      | 6.64                    | 45.81                     | 74.00           | -28.19       | Peak     |
| 12 * | 5097.5000    | 23.87                      | 6.64                    | 30.51                     | 54.00           | -23.49       | AVG      |

|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB COPY:FF   |                   |            |
| Test Engineer | Treyy Chen    |                   |            |

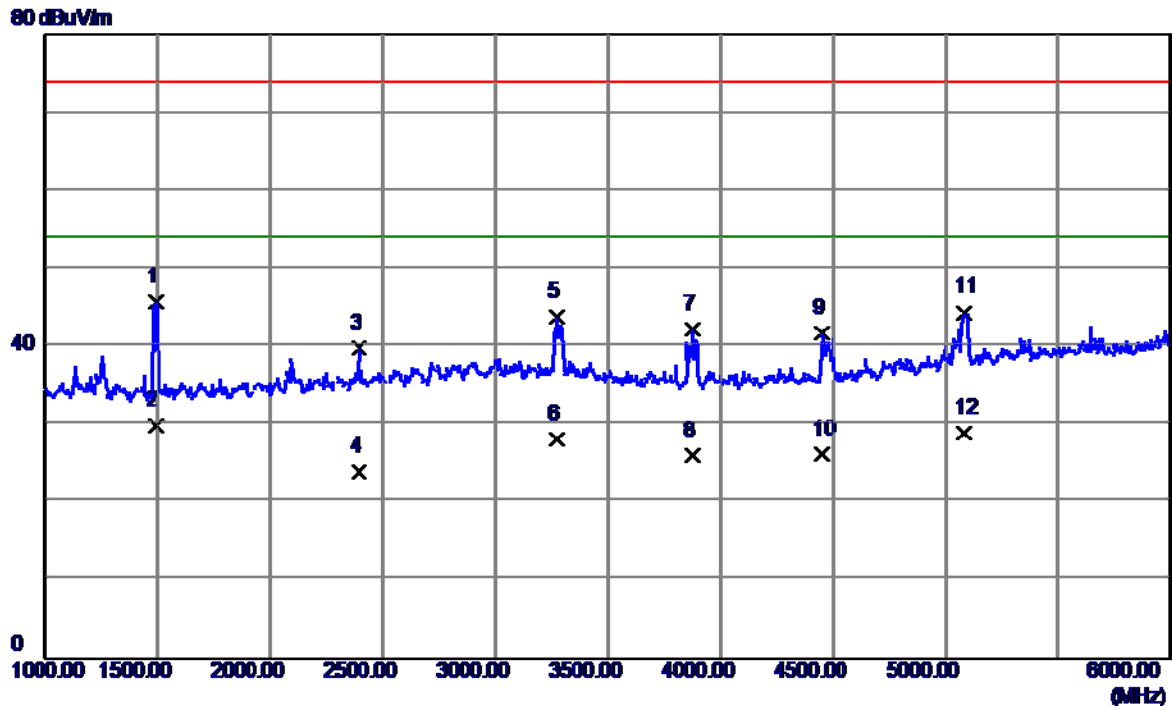


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1492.5000    | 50.76                      | -4.98                   | 45.78                     | 74.00           | -28.22       | Peak     |
| 2 * | 1492.5000    | 34.87                      | -4.98                   | 29.89                     | 54.00           | -24.11       | AVG      |
| 3   | 2392.5000    | 40.27                      | -0.42                   | 39.85                     | 74.00           | -34.15       | Peak     |
| 4   | 2392.5000    | 24.47                      | -0.42                   | 24.05                     | 54.00           | -29.95       | AVG      |
| 5   | 3272.5000    | 41.48                      | 2.32                    | 43.80                     | 74.00           | -30.20       | Peak     |
| 6   | 3272.5000    | 25.84                      | 2.32                    | 28.16                     | 54.00           | -25.84       | AVG      |
| 7   | 3880.0000    | 39.65                      | 2.61                    | 42.26                     | 74.00           | -31.74       | Peak     |
| 8   | 3880.0000    | 23.46                      | 2.61                    | 26.07                     | 54.00           | -27.93       | AVG      |
| 9   | 4450.0000    | 38.00                      | 3.76                    | 41.76                     | 74.00           | -32.24       | Peak     |
| 10  | 4450.0000    | 22.54                      | 3.76                    | 26.30                     | 54.00           | -27.70       | AVG      |
| 11  | 5082.5000    | 37.81                      | 6.59                    | 44.40                     | 74.00           | -29.60       | Peak     |
| 12  | 5082.5000    | 22.41                      | 6.59                    | 29.00                     | 54.00           | -25.00       | AVG      |

|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB COPY:LX   |                   |          |
| Test Engineer | Treey Chen    |                   |          |

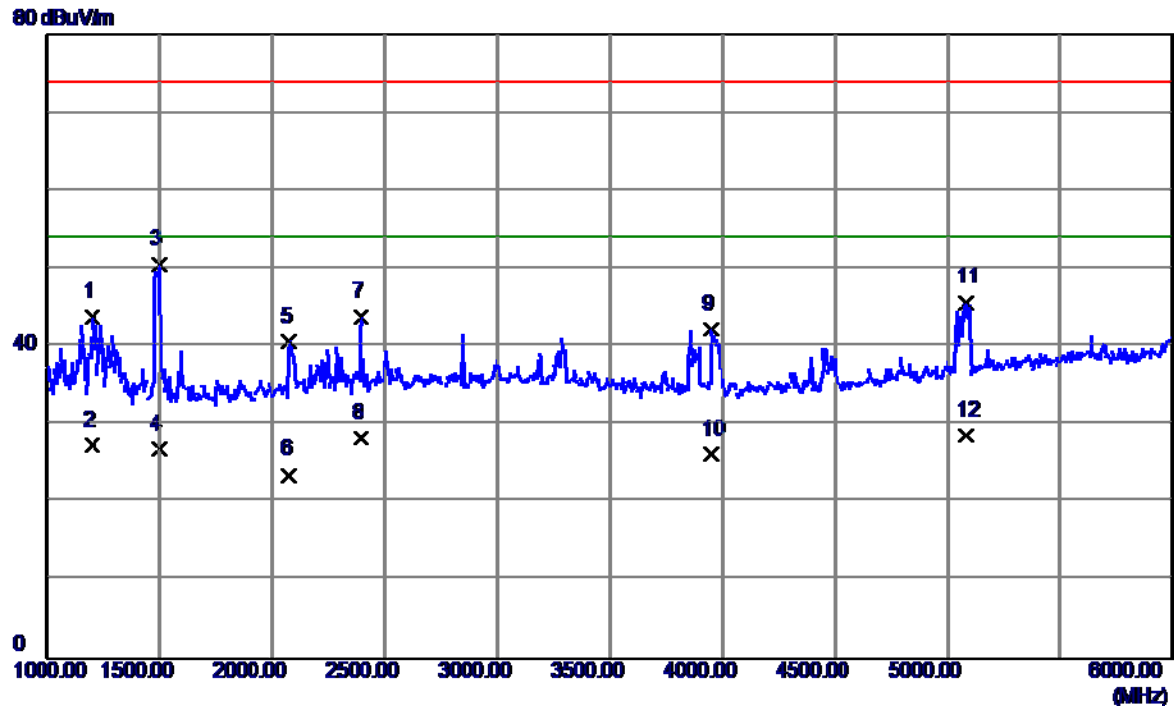


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1197.5000    | 49.89                      | -6.03                   | 43.86                     | 74.00           | -30.14       | Peak     |
| 2   | 1197.5000    | 33.41                      | -6.03                   | 27.38                     | 54.00           | -26.62       | AVG      |
| 3 * | 1500.0000    | 55.45                      | -4.95                   | 50.50                     | 74.00           | -23.50       | Peak     |
| 4   | 1500.0000    | 31.83                      | -4.95                   | 26.88                     | 54.00           | -27.12       | AVG      |
| 5   | 2075.0000    | 42.77                      | -2.16                   | 40.61                     | 74.00           | -33.39       | Peak     |
| 6   | 2075.0000    | 25.76                      | -2.16                   | 23.60                     | 54.00           | -30.40       | AVG      |
| 7   | 2395.0000    | 44.18                      | -0.41                   | 43.77                     | 74.00           | -30.23       | Peak     |
| 8   | 2395.0000    | 28.75                      | -0.41                   | 28.34                     | 54.00           | -25.66       | AVG      |
| 9   | 3950.0000    | 39.57                      | 2.67                    | 42.24                     | 74.00           | -31.76       | Peak     |
| 10  | 3950.0000    | 23.53                      | 2.67                    | 26.20                     | 54.00           | -27.80       | AVG      |
| 11  | 5082.5000    | 39.09                      | 6.59                    | 45.68                     | 74.00           | -28.32       | Peak     |
| 12  | 5082.5000    | 22.01                      | 6.59                    | 28.60                     | 54.00           | -25.40       | AVG      |

|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB COPY:LX   |                   |            |
| Test Engineer | Treey Chen    |                   |            |

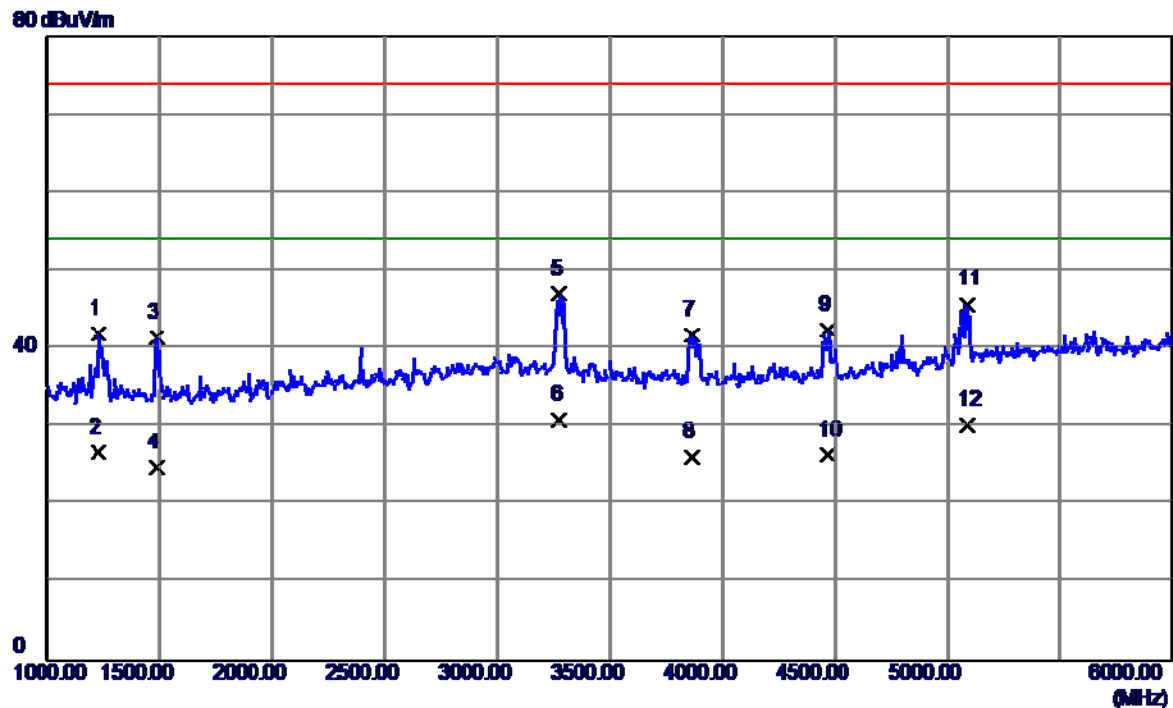

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1230.0000    | 47.76                      | -5.91                   | 41.85                     | 74.00           | -32.15       | Peak     |
| 2   | 1230.0000    | 32.58                      | -5.91                   | 26.67                     | 54.00           | -27.33       | AVG      |
| 3   | 1490.0000    | 46.43                      | -4.99                   | 41.44                     | 74.00           | -32.56       | Peak     |
| 4   | 1490.0000    | 29.85                      | -4.99                   | 24.86                     | 54.00           | -29.14       | AVG      |
| 5   | 3275.0000    | 44.75                      | 2.32                    | 47.07                     | 74.00           | -26.93       | Peak     |
| 6 * | 3275.0000    | 28.54                      | 2.32                    | 30.86                     | 54.00           | -23.14       | AVG      |
| 7   | 3865.0000    | 39.14                      | 2.59                    | 41.73                     | 74.00           | -32.27       | Peak     |
| 8   | 3865.0000    | 23.57                      | 2.59                    | 26.16                     | 54.00           | -27.84       | AVG      |
| 9   | 4465.0000    | 38.54                      | 3.80                    | 42.34                     | 74.00           | -31.66       | Peak     |
| 10  | 4465.0000    | 22.58                      | 3.80                    | 26.38                     | 54.00           | -27.62       | AVG      |
| 11  | 5087.5000    | 39.07                      | 6.61                    | 45.68                     | 74.00           | -28.32       | Peak     |
| 12  | 5087.5000    | 23.68                      | 6.61                    | 30.29                     | 54.00           | -23.71       | AVG      |


|               |               |                   |          |
|---------------|---------------|-------------------|----------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3  |
| Temperature   | 25°C          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Vertical |
| Test Mode     | USB COPY+IDLE |                   |          |
| Note          | USB COPY:PY   |                   |          |
| Test Engineer | Treey Chen    |                   |          |

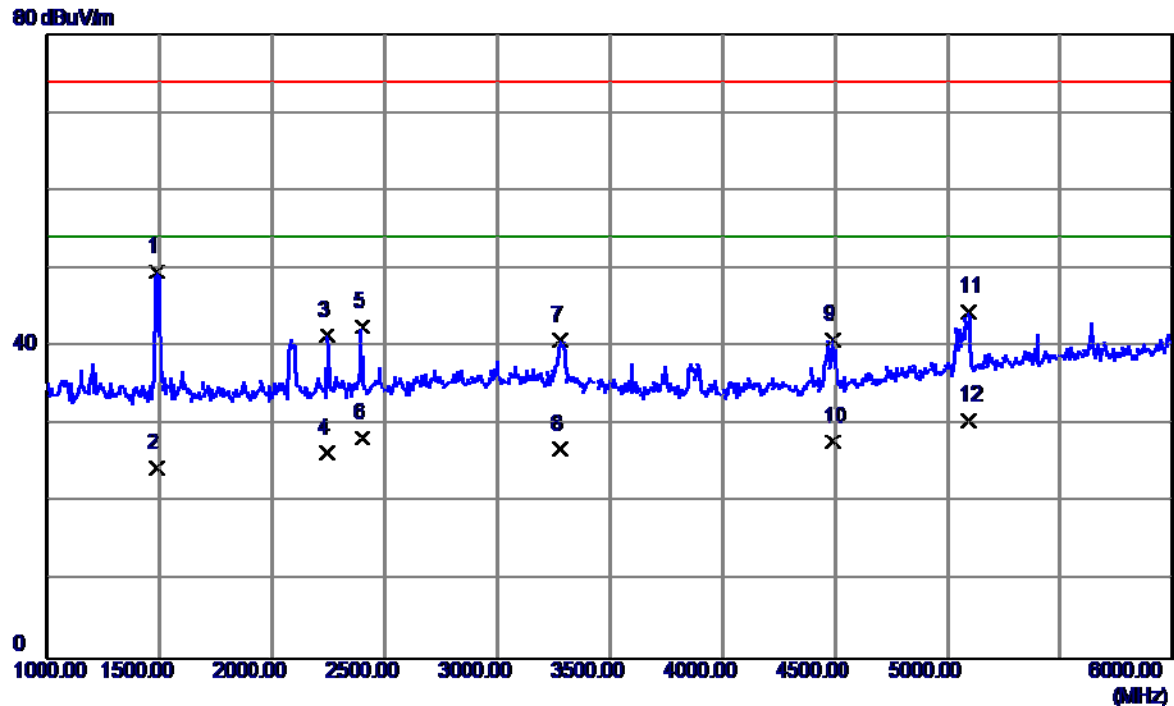

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1487.5000    | 54.62                      | -4.99                   | 49.63                     | 74.00           | -24.37       | Peak     |
| 2    | 1487.5000    | 29.44                      | -4.99                   | 24.45                     | 54.00           | -29.55       | AVG      |
| 3    | 2242.5000    | 42.62                      | -1.24                   | 41.38                     | 74.00           | -32.62       | Peak     |
| 4    | 2242.5000    | 27.64                      | -1.24                   | 26.40                     | 54.00           | -27.60       | AVG      |
| 5    | 2400.0000    | 43.01                      | -0.38                   | 42.63                     | 74.00           | -31.37       | Peak     |
| 6    | 2400.0000    | 28.63                      | -0.38                   | 28.25                     | 54.00           | -25.75       | AVG      |
| 7    | 3280.0000    | 38.44                      | 2.32                    | 40.76                     | 74.00           | -33.24       | Peak     |
| 8    | 3280.0000    | 24.63                      | 2.32                    | 26.95                     | 54.00           | -27.05       | AVG      |
| 9    | 4487.5000    | 37.03                      | 3.85                    | 40.88                     | 74.00           | -33.12       | Peak     |
| 10   | 4487.5000    | 23.94                      | 3.85                    | 27.79                     | 54.00           | -26.21       | AVG      |
| 11   | 5092.5000    | 37.88                      | 6.62                    | 44.50                     | 74.00           | -29.50       | Peak     |
| 12 * | 5092.5000    | 23.87                      | 6.62                    | 30.49                     | 54.00           | -23.51       | AVG      |


|               |               |                   |            |
|---------------|---------------|-------------------|------------|
| EUT           | Smart Phone   | Model Name        | WAS-LX3    |
| Temperature   | 25°C          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz  | Polarization      | Horizontal |
| Test Mode     | USB COPY+IDLE |                   |            |
| Note          | USB COPY:PY   |                   |            |
| Test Engineer | Treey Chen    |                   |            |

80 dBuV/m

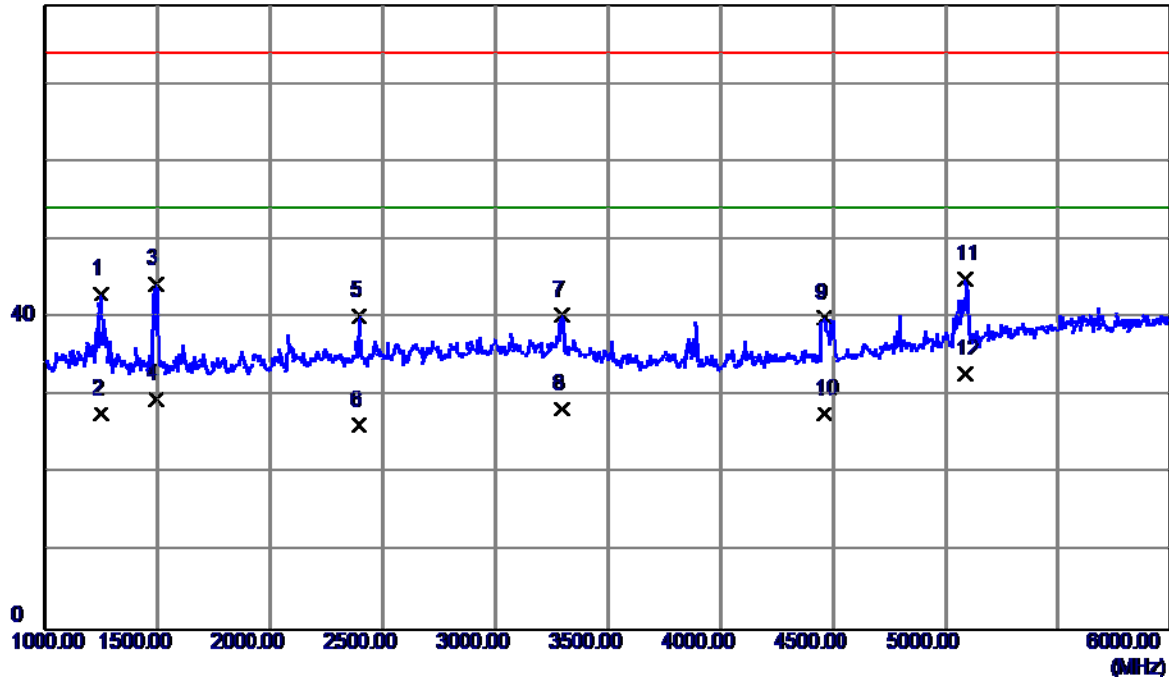

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1250.0000    | 48.83                      | -5.84                   | 42.99                     | 74.00           | -31.01       | Peak     |
| 2    | 1250.0000    | 33.46                      | -5.84                   | 27.62                     | 54.00           | -26.38       | AVG      |
| 3    | 1492.5000    | 49.23                      | -4.98                   | 44.25                     | 74.00           | -29.75       | Peak     |
| 4    | 1492.5000    | 34.64                      | -4.98                   | 29.66                     | 54.00           | -24.34       | AVG      |
| 5    | 2395.0000    | 40.65                      | -0.41                   | 40.24                     | 74.00           | -33.76       | Peak     |
| 6    | 2395.0000    | 26.66                      | -0.41                   | 26.25                     | 54.00           | -27.75       | AVG      |
| 7    | 3292.5000    | 38.07                      | 2.32                    | 40.39                     | 74.00           | -33.61       | Peak     |
| 8    | 3292.5000    | 25.94                      | 2.32                    | 28.26                     | 54.00           | -25.74       | AVG      |
| 9    | 4462.5000    | 36.17                      | 3.79                    | 39.96                     | 74.00           | -34.04       | Peak     |
| 10   | 4462.5000    | 23.90                      | 3.79                    | 27.69                     | 54.00           | -26.31       | AVG      |
| 11   | 5090.0000    | 38.40                      | 6.62                    | 45.02                     | 74.00           | -28.98       | Peak     |
| 12 * | 5090.0000    | 26.18                      | 6.62                    | 32.80                     | 54.00           | -21.20       | AVG      |


|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

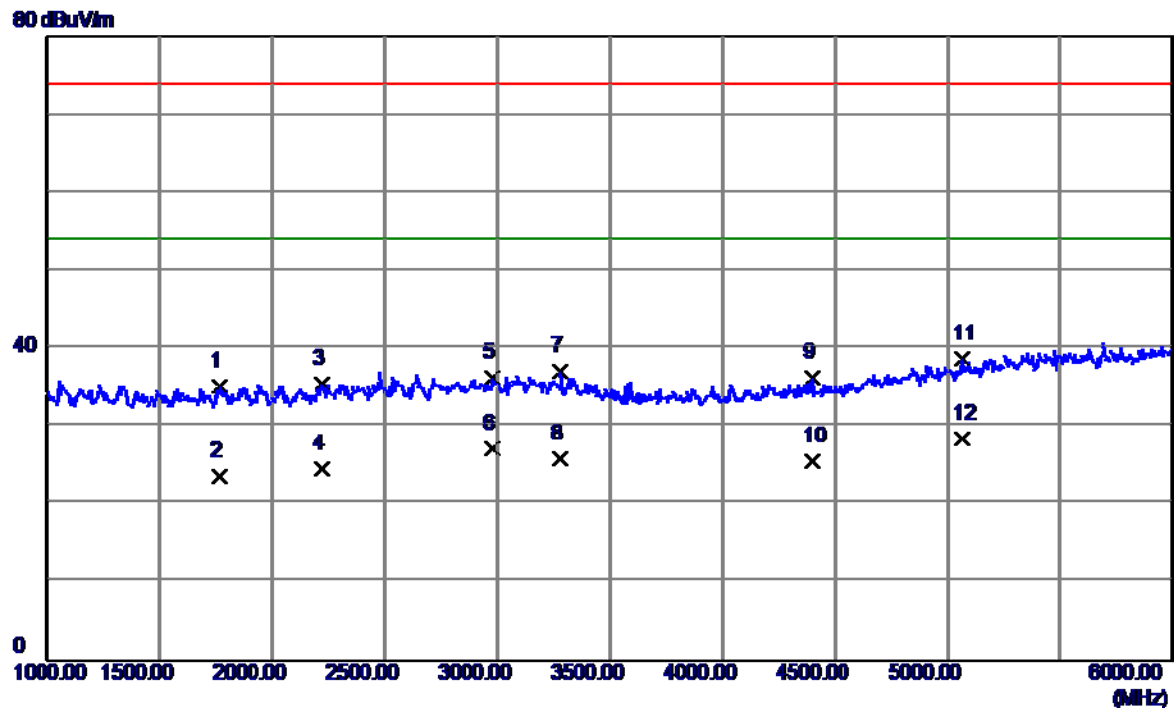

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1765.0000    | 38.96                      | -3.69                   | 35.27                     | 74.00           | -38.73       | Peak     |
| 2    | 1765.0000    | 27.40                      | -3.69                   | 23.71                     | 54.00           | -30.29       | AVG      |
| 3    | 2220.0000    | 36.91                      | -1.36                   | 35.55                     | 74.00           | -38.45       | Peak     |
| 4    | 2220.0000    | 25.94                      | -1.36                   | 24.58                     | 54.00           | -29.42       | AVG      |
| 5    | 2977.5000    | 34.01                      | 2.30                    | 36.31                     | 74.00           | -37.69       | Peak     |
| 6    | 2977.5000    | 24.94                      | 2.30                    | 27.24                     | 54.00           | -26.76       | AVG      |
| 7    | 3280.0000    | 34.84                      | 2.32                    | 37.16                     | 74.00           | -36.84       | Peak     |
| 8    | 3280.0000    | 23.63                      | 2.32                    | 25.95                     | 54.00           | -28.05       | AVG      |
| 9    | 4402.0000    | 32.61                      | 3.65                    | 36.26                     | 74.00           | -37.74       | Peak     |
| 10   | 4402.0000    | 21.94                      | 3.65                    | 25.59                     | 54.00           | -28.41       | AVG      |
| 11   | 5065.0000    | 32.21                      | 6.53                    | 38.74                     | 74.00           | -35.26       | Peak     |
| 12 * | 5065.0000    | 21.96                      | 6.53                    | 28.49                     | 54.00           | -25.51       | AVG      |


|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

80 dBuV/m

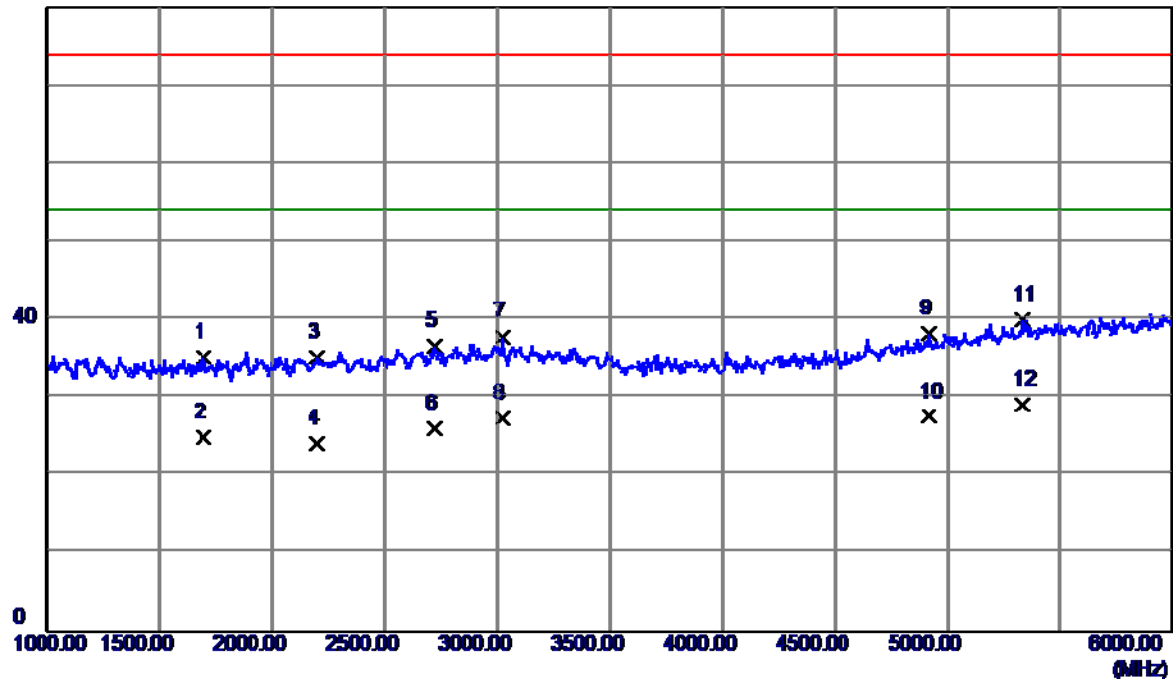

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1692.5000    | 39.27                      | -4.03                   | 35.24                     | 74.00           | -38.76       | Peak     |
| 2    | 1692.5000    | 28.94                      | -4.03                   | 24.91                     | 54.00           | -29.09       | AVG      |
| 3    | 2197.5000    | 36.62                      | -1.49                   | 35.13                     | 74.00           | -38.87       | Peak     |
| 4    | 2197.5000    | 25.64                      | -1.49                   | 24.15                     | 54.00           | -29.85       | AVG      |
| 5    | 2720.0000    | 35.48                      | 1.15                    | 36.63                     | 74.00           | -37.37       | Peak     |
| 6    | 2720.0000    | 24.94                      | 1.15                    | 26.09                     | 54.00           | -27.91       | AVG      |
| 7    | 3022.5000    | 35.34                      | 2.39                    | 37.73                     | 74.00           | -36.27       | Peak     |
| 8    | 3022.5000    | 24.94                      | 2.39                    | 27.33                     | 54.00           | -26.67       | AVG      |
| 9    | 4917.5000    | 32.29                      | 5.91                    | 38.20                     | 74.00           | -35.80       | Peak     |
| 10   | 4917.5000    | 21.69                      | 5.91                    | 27.60                     | 54.00           | -26.40       | AVG      |
| 11   | 5332.5000    | 32.61                      | 7.44                    | 40.05                     | 74.00           | -33.95       | Peak     |
| 12 * | 5332.5000    | 21.62                      | 7.44                    | 29.06                     | 54.00           | -24.94       | AVG      |


|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                       | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                               | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on         |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SCUD(SONY) |                   |          |
| Test Engineer | Treey Chen                                 |                   |          |

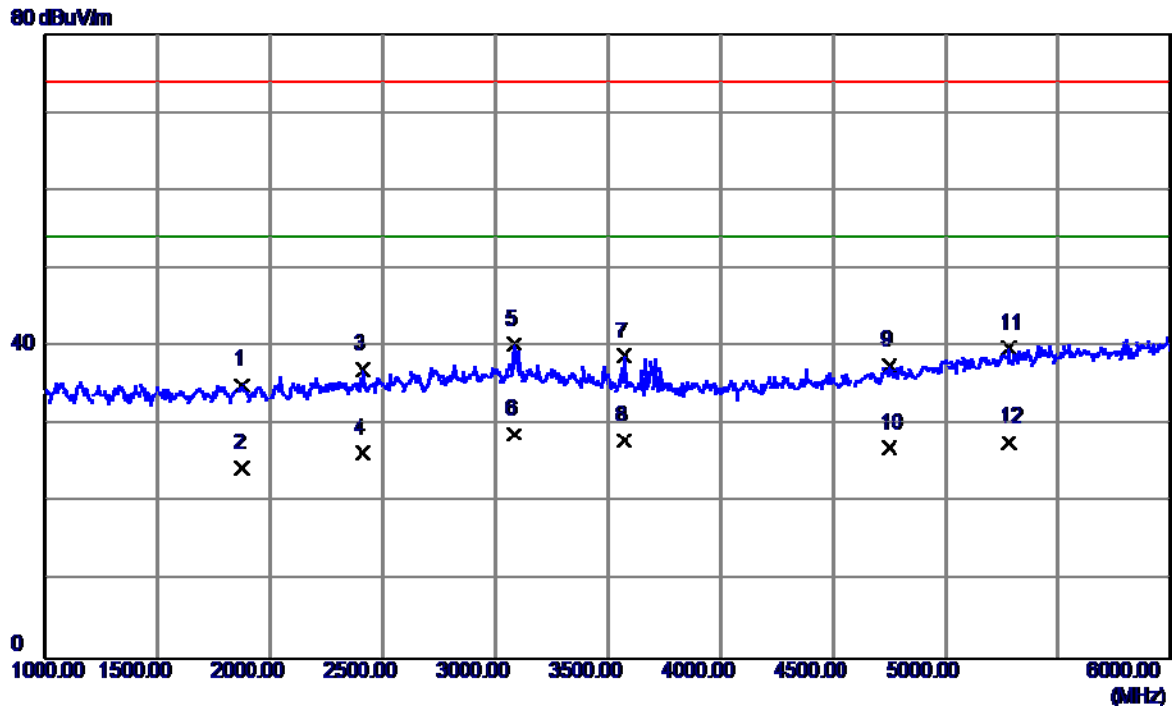

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1875.0000    | 38.29                      | -3.17                   | 35.12                     | 74.00           | -38.88       | Peak     |
| 2   | 1875.0000    | 27.64                      | -3.17                   | 24.47                     | 54.00           | -29.53       | AVG      |
| 3   | 2412.5000    | 37.37                      | -0.31                   | 37.06                     | 74.00           | -36.94       | Peak     |
| 4   | 2412.5000    | 26.64                      | -0.31                   | 26.33                     | 54.00           | -27.67       | AVG      |
| 5   | 3085.0000    | 37.92                      | 2.38                    | 40.30                     | 74.00           | -33.70       | Peak     |
| 6 * | 3085.0000    | 26.42                      | 2.38                    | 28.80                     | 54.00           | -25.20       | AVG      |
| 7   | 3572.5000    | 36.48                      | 2.32                    | 38.80                     | 74.00           | -35.20       | Peak     |
| 8   | 3572.5000    | 25.64                      | 2.32                    | 27.96                     | 54.00           | -26.04       | AVG      |
| 9   | 4752.5000    | 32.45                      | 5.11                    | 37.56                     | 74.00           | -36.44       | Peak     |
| 10  | 4752.5000    | 21.86                      | 5.11                    | 26.97                     | 54.00           | -27.03       | AVG      |
| 11  | 5282.5000    | 32.55                      | 7.27                    | 39.82                     | 74.00           | -34.18       | Peak     |
| 12  | 5282.5000    | 20.49                      | 7.27                    | 27.76                     | 54.00           | -26.24       | AVG      |


|               |                                            |                   |            |
|---------------|--------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                       | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                               | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on         |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SCUD(SONY) |                   |            |
| Test Engineer | Treey Chen                                 |                   |            |

80 dBuV/m

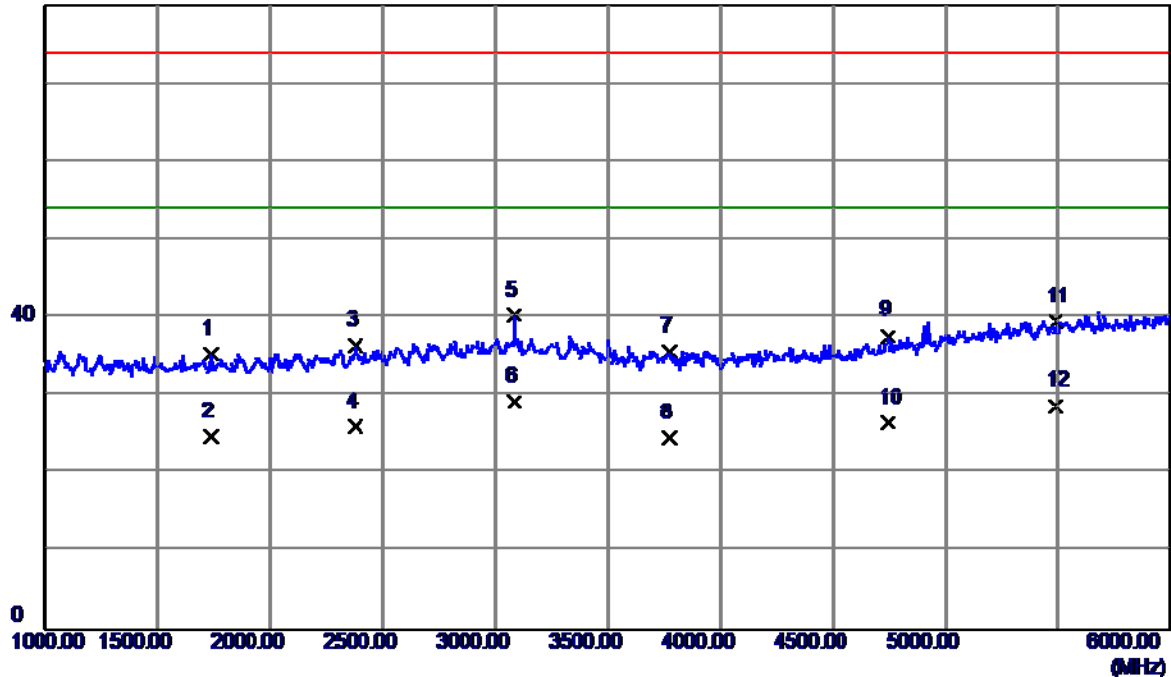


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1740.0000    | 39.23                      | -3.81                   | 35.42                     | 74.00           | -38.58       | Peak     |
| 2   | 1740.0000    | 28.62                      | -3.81                   | 24.81                     | 54.00           | -29.19       | AVG      |
| 3   | 2377.5000    | 37.00                      | -0.50                   | 36.50                     | 74.00           | -37.50       | Peak     |
| 4   | 2377.5000    | 26.64                      | -0.50                   | 26.14                     | 54.00           | -27.86       | AVG      |
| 5   | 3082.5000    | 37.89                      | 2.38                    | 40.27                     | 74.00           | -33.73       | Peak     |
| 6 * | 3082.5000    | 26.84                      | 2.38                    | 29.22                     | 54.00           | -24.78       | AVG      |
| 7   | 3772.5000    | 33.24                      | 2.51                    | 35.75                     | 74.00           | -38.25       | Peak     |
| 8   | 3772.5000    | 22.15                      | 2.51                    | 24.66                     | 54.00           | -29.34       | AVG      |
| 9   | 4745.0000    | 32.61                      | 5.07                    | 37.68                     | 74.00           | -36.32       | Peak     |
| 10  | 4745.0000    | 21.45                      | 5.07                    | 26.52                     | 54.00           | -27.48       | AVG      |
| 11  | 5487.5000    | 31.62                      | 7.97                    | 39.59                     | 74.00           | -34.41       | Peak     |
| 12  | 5487.5000    | 20.75                      | 7.97                    | 28.72                     | 54.00           | -25.28       | AVG      |

|               |                                              |                   |          |
|---------------|----------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on           |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SUNWODA(ALT) |                   |          |
| Test Engineer | Treey Chen                                   |                   |          |

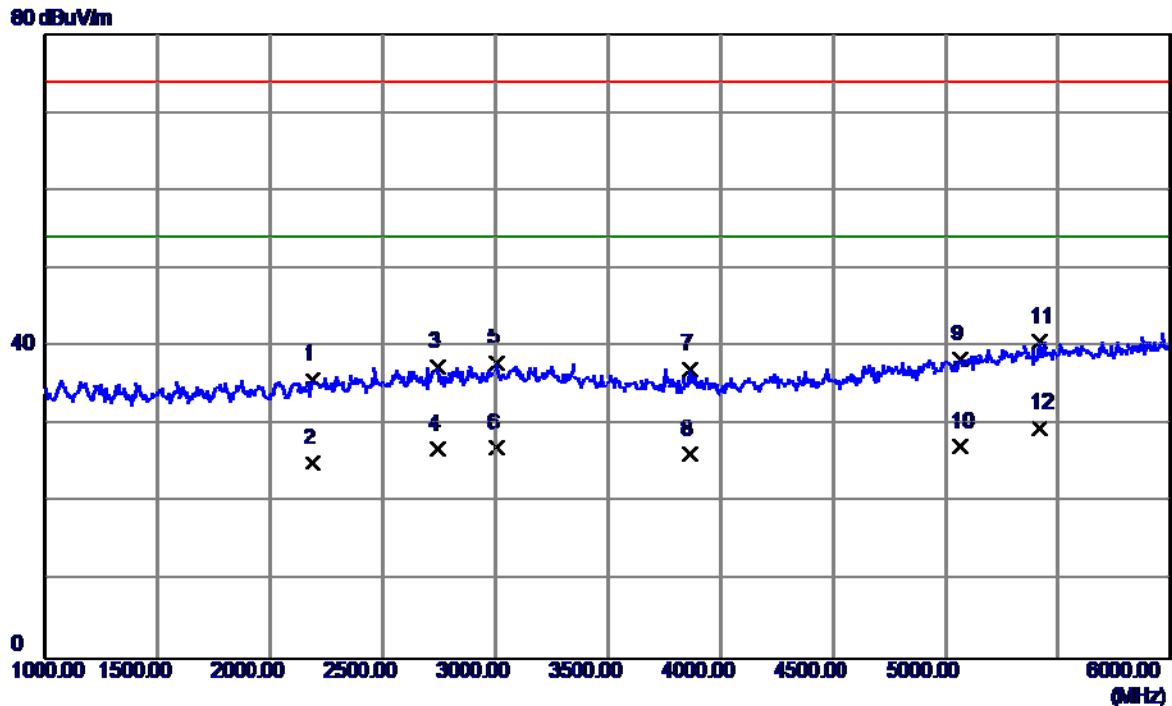

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 2190.0000    | 37.42                      | -1.53                   | 35.89                     | 74.00           | -38.11       | Peak     |
| 2    | 2190.0000    | 26.63                      | -1.53                   | 25.10                     | 54.00           | -28.90       | AVG      |
| 3    | 2745.0000    | 36.14                      | 1.26                    | 37.40                     | 74.00           | -36.60       | Peak     |
| 4    | 2745.0000    | 25.64                      | 1.26                    | 26.90                     | 54.00           | -27.10       | AVG      |
| 5    | 3005.0000    | 35.48                      | 2.40                    | 37.88                     | 74.00           | -36.12       | Peak     |
| 6    | 3005.0000    | 24.64                      | 2.40                    | 27.04                     | 54.00           | -26.96       | AVG      |
| 7    | 3867.5000    | 34.46                      | 2.60                    | 37.06                     | 74.00           | -36.94       | Peak     |
| 8    | 3867.5000    | 23.63                      | 2.60                    | 26.23                     | 54.00           | -27.77       | AVG      |
| 9    | 5067.5000    | 31.93                      | 6.54                    | 38.47                     | 74.00           | -35.53       | Peak     |
| 10   | 5067.5000    | 20.60                      | 6.54                    | 27.14                     | 54.00           | -26.86       | AVG      |
| 11   | 5417.5000    | 32.92                      | 7.73                    | 40.65                     | 74.00           | -33.35       | Peak     |
| 12 * | 5417.5000    | 21.94                      | 7.73                    | 29.67                     | 54.00           | -24.33       | AVG      |


|               |                                              |                   |            |
|---------------|----------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                  | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on           |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:SUNWODA(ALT) |                   |            |
| Test Engineer | Treey Chen                                   |                   |            |

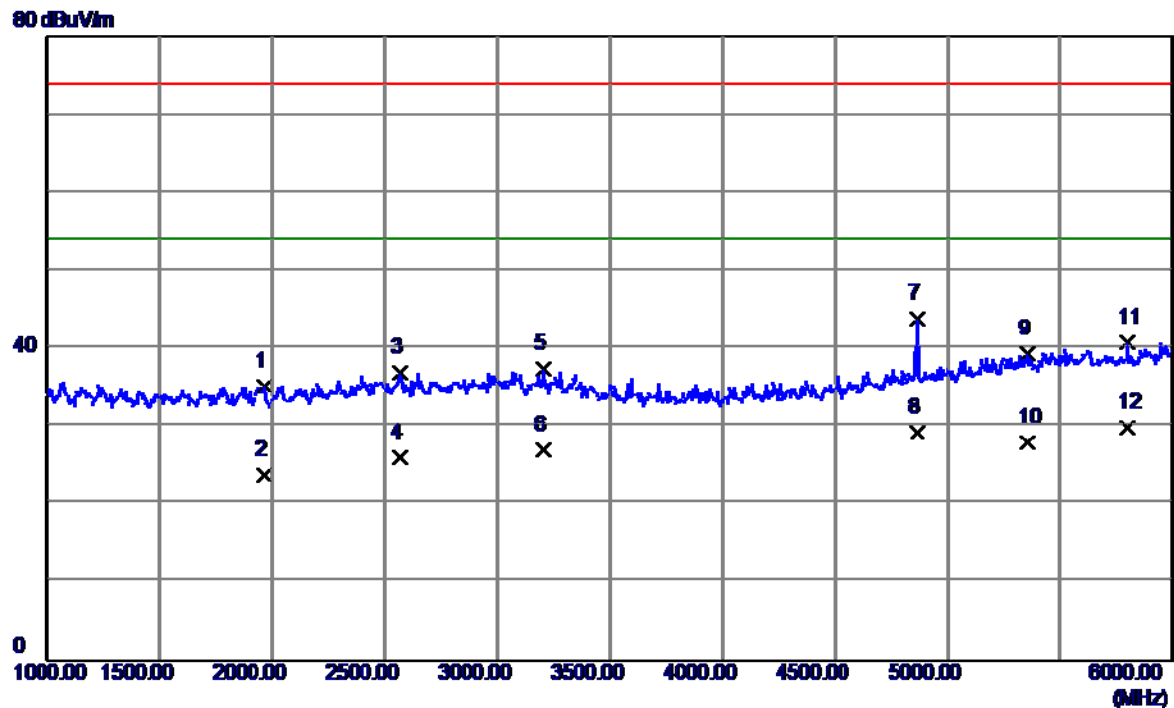

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1965.0000    | 37.97                      | -2.74                   | 35.23                     | 74.00           | -38.77       | Peak     |
| 2    | 1965.0000    | 26.65                      | -2.74                   | 23.91                     | 54.00           | -30.09       | AVG      |
| 3    | 2567.5000    | 36.42                      | 0.47                    | 36.89                     | 74.00           | -37.11       | Peak     |
| 4    | 2567.5000    | 25.64                      | 0.47                    | 26.11                     | 54.00           | -27.89       | AVG      |
| 5    | 3207.5000    | 35.09                      | 2.34                    | 37.43                     | 74.00           | -36.57       | Peak     |
| 6    | 3207.5000    | 24.64                      | 2.34                    | 26.98                     | 54.00           | -27.02       | AVG      |
| 7    | 4865.0000    | 38.21                      | 5.65                    | 43.86                     | 74.00           | -30.14       | Peak     |
| 8    | 4865.0000    | 23.65                      | 5.65                    | 29.30                     | 54.00           | -24.70       | AVG      |
| 9    | 5355.0000    | 31.90                      | 7.52                    | 39.42                     | 74.00           | -34.58       | Peak     |
| 10   | 5355.0000    | 20.50                      | 7.52                    | 28.02                     | 54.00           | -25.98       | AVG      |
| 11   | 5797.5000    | 32.46                      | 8.28                    | 40.74                     | 74.00           | -33.26       | Peak     |
| 12 * | 5797.5000    | 21.64                      | 8.28                    | 29.92                     | 54.00           | -24.08       | AVG      |

|               |                                               |                   |          |
|---------------|-----------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                          | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                  | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on            |                   |          |
| Note          | Adapter:Salcomp+USB COPY:LX+BATTERY:SCUD(ATL) |                   |          |
| Test Engineer | Treey Chen                                    |                   |          |


80 dBuV/m

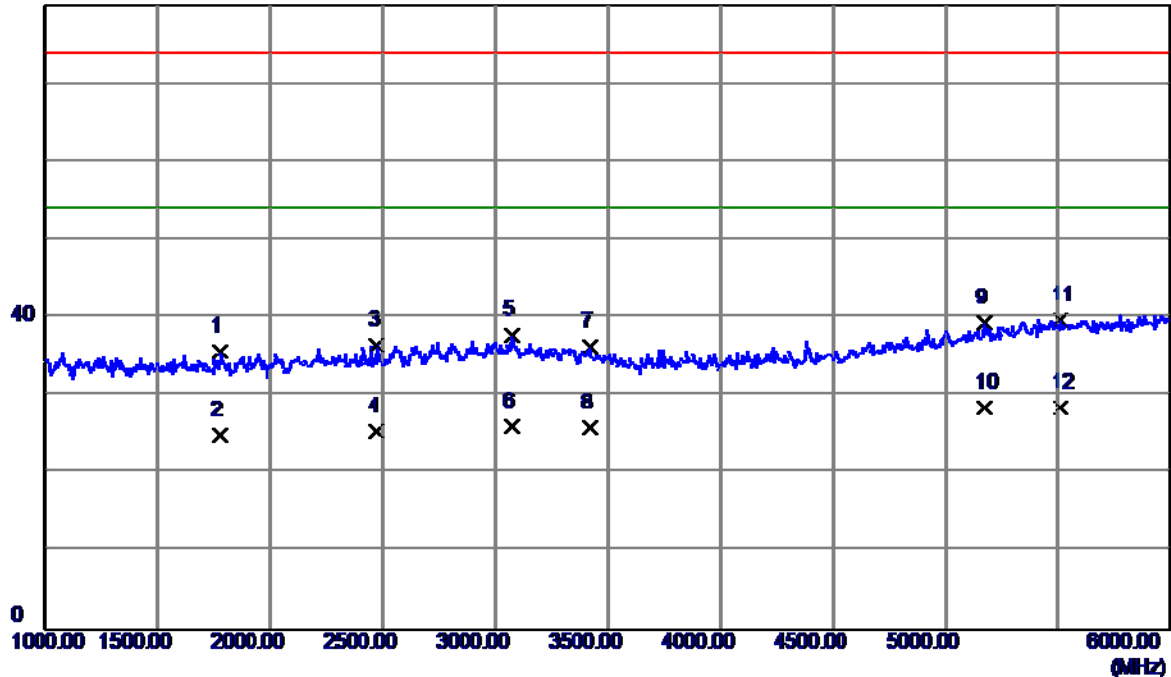

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1780.0000    | 39.36                      | -3.62                   | 35.74                     | 74.00           | -38.26       | Peak     |
| 2    | 1780.0000    | 28.64                      | -3.62                   | 25.02                     | 54.00           | -28.98       | AVG      |
| 3    | 2475.0000    | 36.42                      | 0.03                    | 36.45                     | 74.00           | -37.55       | Peak     |
| 4    | 2475.0000    | 25.41                      | 0.03                    | 25.44                     | 54.00           | -28.56       | AVG      |
| 5    | 3070.0000    | 35.34                      | 2.38                    | 37.72                     | 74.00           | -36.28       | Peak     |
| 6    | 3070.0000    | 23.65                      | 2.38                    | 26.03                     | 54.00           | -27.97       | AVG      |
| 7    | 3420.0000    | 34.11                      | 2.28                    | 36.39                     | 74.00           | -37.61       | Peak     |
| 8    | 3420.0000    | 23.65                      | 2.28                    | 25.93                     | 54.00           | -28.07       | AVG      |
| 9    | 5170.0000    | 32.40                      | 6.89                    | 39.29                     | 74.00           | -34.71       | Peak     |
| 10 * | 5170.0000    | 21.59                      | 6.89                    | 28.48                     | 54.00           | -25.52       | AVG      |
| 11   | 5512.5000    | 31.66                      | 8.02                    | 39.68                     | 74.00           | -34.32       | Peak     |
| 12   | 5512.5000    | 20.46                      | 8.02                    | 28.48                     | 54.00           | -25.52       | AVG      |


|               |                                               |                   |            |
|---------------|-----------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                   | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                          | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                  | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on            |                   |            |
| Note          | Adapter:Salcomp+USB COPY:LX+BATTERY:SCUD(ATL) |                   |            |
| Test Engineer | Treyy Chen                                    |                   |            |

80 dBuV/m

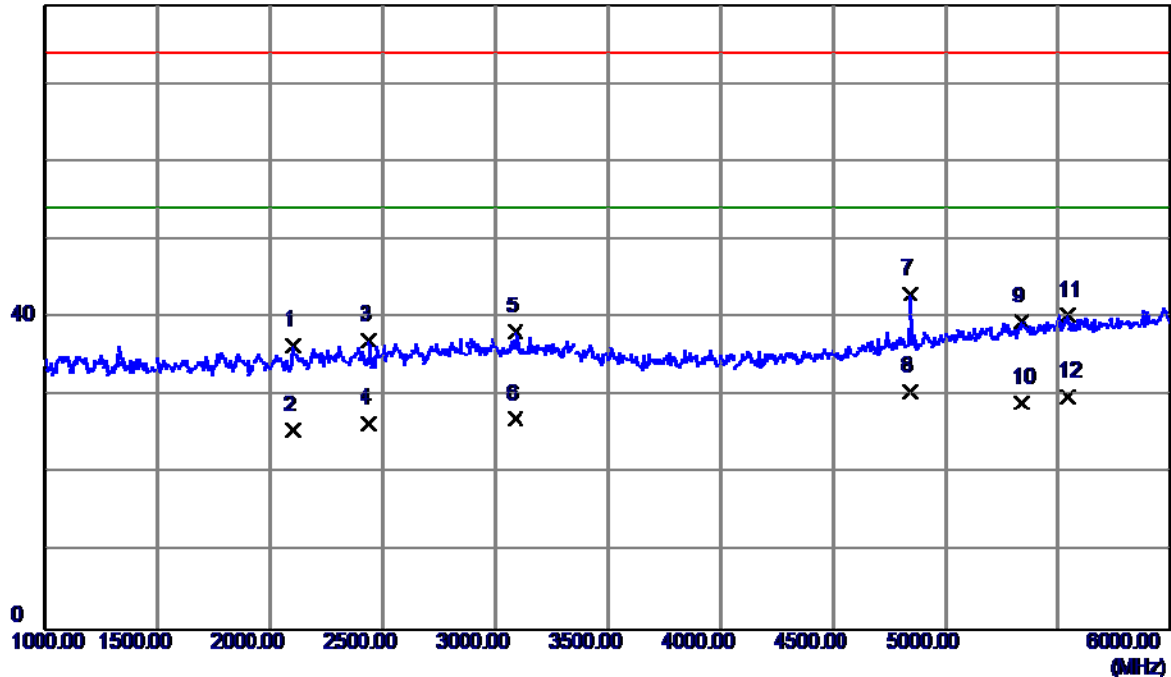


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 2097.5000    | 38.52                      | -2.04                   | 36.48                     | 74.00           | -37.52       | Peak     |
| 2   | 2097.5000    | 27.64                      | -2.04                   | 25.60                     | 54.00           | -28.40       | AVG      |
| 3   | 2440.0000    | 37.35                      | -0.16                   | 37.19                     | 74.00           | -36.81       | Peak     |
| 4   | 2440.0000    | 26.64                      | -0.16                   | 26.48                     | 54.00           | -27.52       | AVG      |
| 5   | 3090.0000    | 35.81                      | 2.37                    | 38.18                     | 74.00           | -35.82       | Peak     |
| 6   | 3090.0000    | 24.65                      | 2.37                    | 27.02                     | 54.00           | -26.98       | AVG      |
| 7   | 4845.0000    | 37.55                      | 5.56                    | 43.11                     | 74.00           | -30.89       | Peak     |
| 8 * | 4845.0000    | 24.94                      | 5.56                    | 30.50                     | 54.00           | -23.50       | AVG      |
| 9   | 5337.5000    | 32.06                      | 7.46                    | 39.52                     | 74.00           | -34.48       | Peak     |
| 10  | 5337.5000    | 21.60                      | 7.46                    | 29.06                     | 54.00           | -24.94       | AVG      |
| 11  | 5545.0000    | 32.32                      | 8.05                    | 40.37                     | 74.00           | -33.63       | Peak     |
| 12  | 5545.0000    | 21.80                      | 8.05                    | 29.85                     | 54.00           | -24.15       | AVG      |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

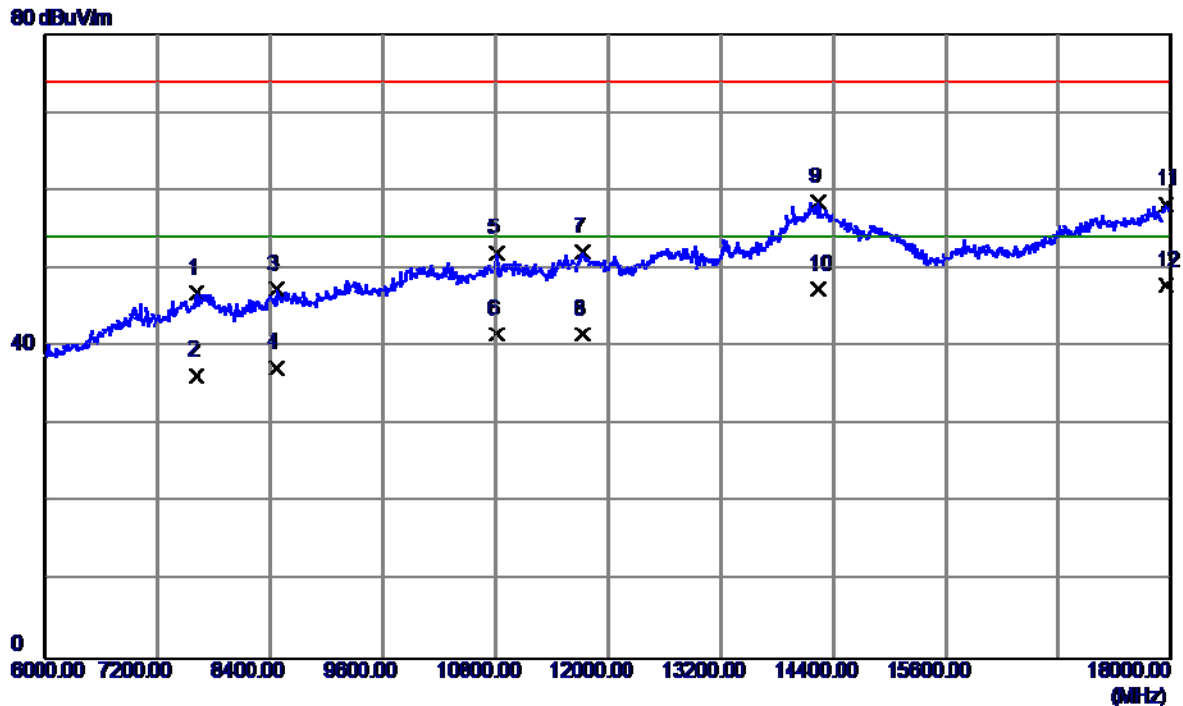


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7614.0000    | 34.26                      | 12.61                   | 46.87                     | 74.00           | -27.13       | Peak     |
| 2    | 7614.0000    | 23.75                      | 12.61                   | 36.36                     | 54.00           | -17.64       | AVG      |
| 3    | 8472.0000    | 34.08                      | 13.33                   | 47.41                     | 74.00           | -26.59       | Peak     |
| 4    | 8472.0000    | 23.88                      | 13.33                   | 37.21                     | 54.00           | -16.79       | AVG      |
| 5    | 10812.0000   | 35.07                      | 16.99                   | 52.06                     | 74.00           | -21.94       | Peak     |
| 6    | 10812.0000   | 24.56                      | 16.99                   | 41.55                     | 54.00           | -12.45       | AVG      |
| 7    | 11730.0000   | 34.47                      | 17.72                   | 52.19                     | 74.00           | -21.81       | Peak     |
| 8    | 11730.0000   | 23.91                      | 17.72                   | 41.63                     | 54.00           | -12.37       | AVG      |
| 9    | 14244.0000   | 35.80                      | 22.69                   | 58.49                     | 74.00           | -15.51       | Peak     |
| 10   | 14244.0000   | 24.61                      | 22.69                   | 47.30                     | 54.00           | -6.70        | AVG      |
| 11   | 17946.0000   | 33.29                      | 24.95                   | 58.24                     | 74.00           | -15.76       | Peak     |
| 12 * | 17946.0000   | 22.94                      | 24.95                   | 47.89                     | 54.00           | -6.11        | AVG      |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+WIFI+BT+GPS+Camera on        |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

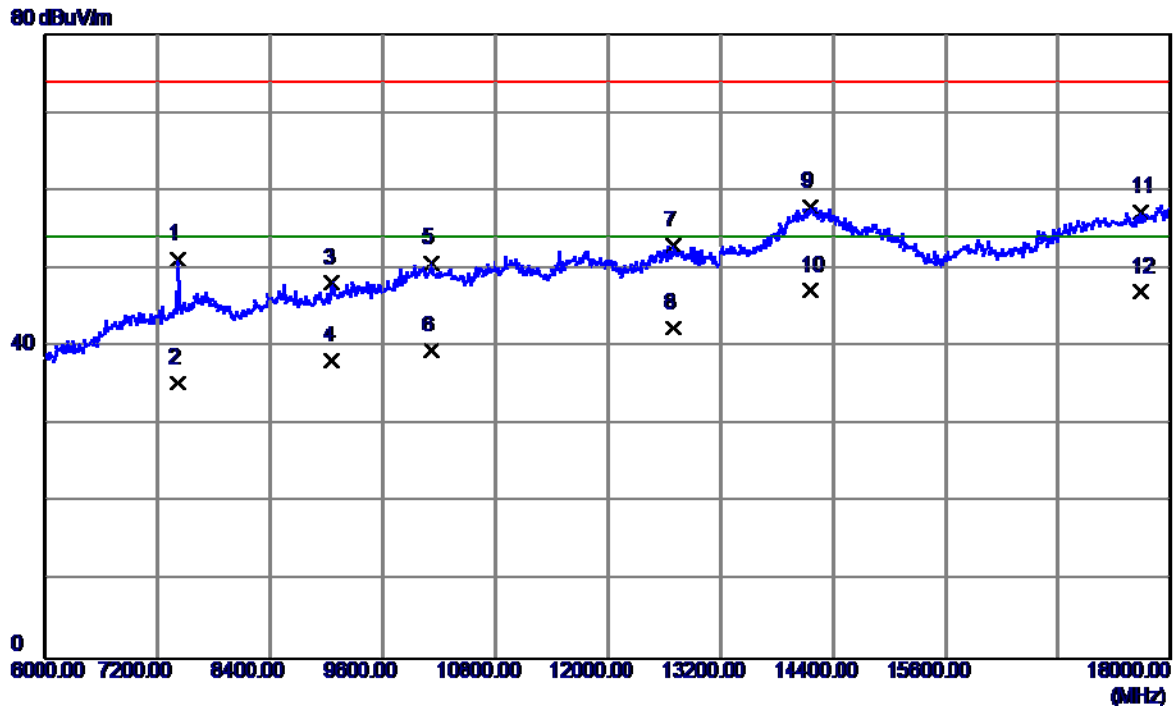

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7416.0000    | 38.71                      | 12.44                   | 51.15                     | 74.00           | -22.85       | Peak     |
| 2    | 7416.0000    | 22.87                      | 12.44                   | 35.31                     | 54.00           | -18.69       | AVG      |
| 3    | 9060.0000    | 33.69                      | 14.53                   | 48.22                     | 74.00           | -25.78       | Peak     |
| 4    | 9060.0000    | 23.64                      | 14.53                   | 38.17                     | 54.00           | -15.83       | AVG      |
| 5    | 10122.0000   | 34.97                      | 15.83                   | 50.80                     | 74.00           | -23.20       | Peak     |
| 6    | 10122.0000   | 23.64                      | 15.83                   | 39.47                     | 54.00           | -14.53       | AVG      |
| 7    | 12696.0000   | 34.58                      | 18.37                   | 52.95                     | 74.00           | -21.05       | Peak     |
| 8    | 12696.0000   | 24.08                      | 18.37                   | 42.45                     | 54.00           | -11.55       | AVG      |
| 9    | 14160.0000   | 35.22                      | 22.62                   | 57.84                     | 74.00           | -16.16       | Peak     |
| 10 * | 14160.0000   | 24.63                      | 22.62                   | 47.25                     | 54.00           | -6.75        | AVG      |
| 11   | 17676.0000   | 33.21                      | 24.05                   | 57.26                     | 74.00           | -16.74       | Peak     |
| 12   | 17676.0000   | 22.94                      | 24.05                   | 46.99                     | 54.00           | -7.01        | AVG      |


|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                                   |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:Goertek |                   |          |
| Test Engineer | Treey Chen                                                |                   |          |

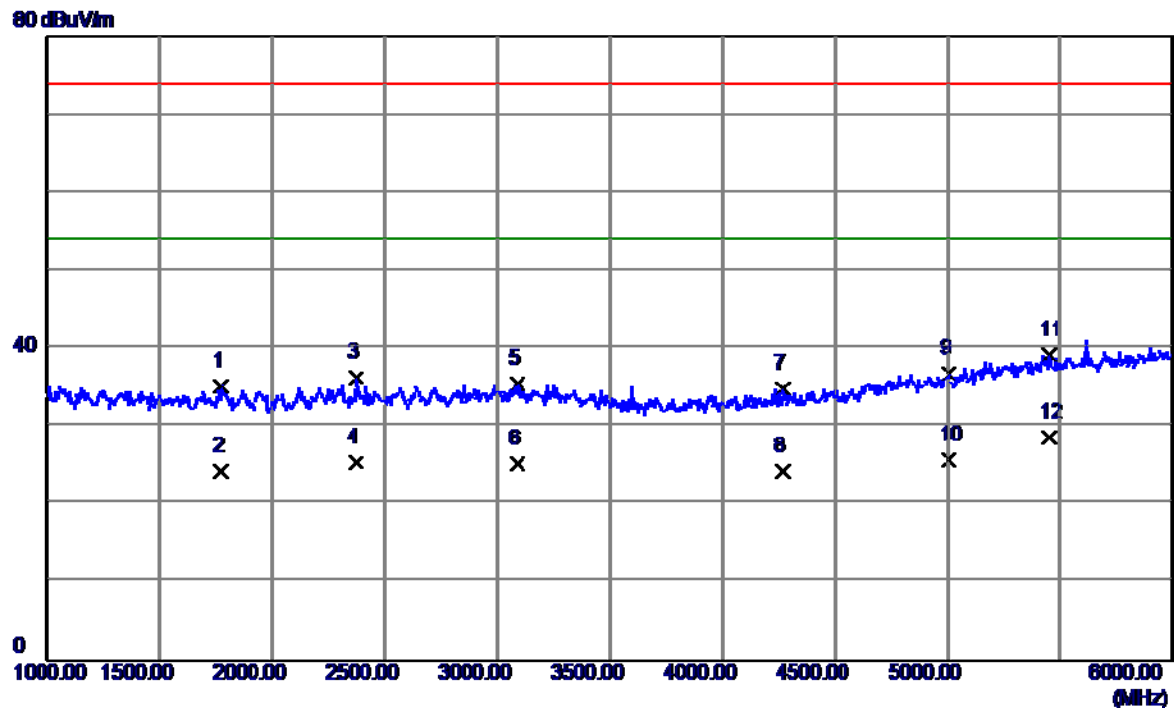

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1775.0000    | 38.85                      | -3.64                   | 35.21                     | 74.00           | -38.79       | Peak     |
| 2    | 1775.0000    | 27.94                      | -3.64                   | 24.30                     | 54.00           | -29.70       | AVG      |
| 3    | 2370.0000    | 36.84                      | -0.54                   | 36.30                     | 74.00           | -37.70       | Peak     |
| 4    | 2370.0000    | 25.94                      | -0.54                   | 25.40                     | 54.00           | -28.60       | AVG      |
| 5    | 3087.5000    | 33.14                      | 2.37                    | 35.51                     | 74.00           | -38.49       | Peak     |
| 6    | 3087.5000    | 22.94                      | 2.37                    | 25.31                     | 54.00           | -28.69       | AVG      |
| 7    | 4267.5000    | 31.53                      | 3.34                    | 34.87                     | 74.00           | -39.13       | Peak     |
| 8    | 4267.5000    | 20.94                      | 3.34                    | 24.28                     | 54.00           | -29.72       | AVG      |
| 9    | 5007.5000    | 30.52                      | 6.34                    | 36.86                     | 74.00           | -37.14       | Peak     |
| 10   | 5007.5000    | 19.48                      | 6.34                    | 25.82                     | 54.00           | -28.18       | AVG      |
| 11   | 5452.5000    | 31.28                      | 7.85                    | 39.13                     | 74.00           | -34.87       | Peak     |
| 12 * | 5452.5000    | 20.74                      | 7.85                    | 28.59                     | 54.00           | -25.41       | AVG      |


|               |                                                           |                   |            |
|---------------|-----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                                   |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:Goertek |                   |            |
| Test Engineer | Treey Chen                                                |                   |            |

80 dBuV/m

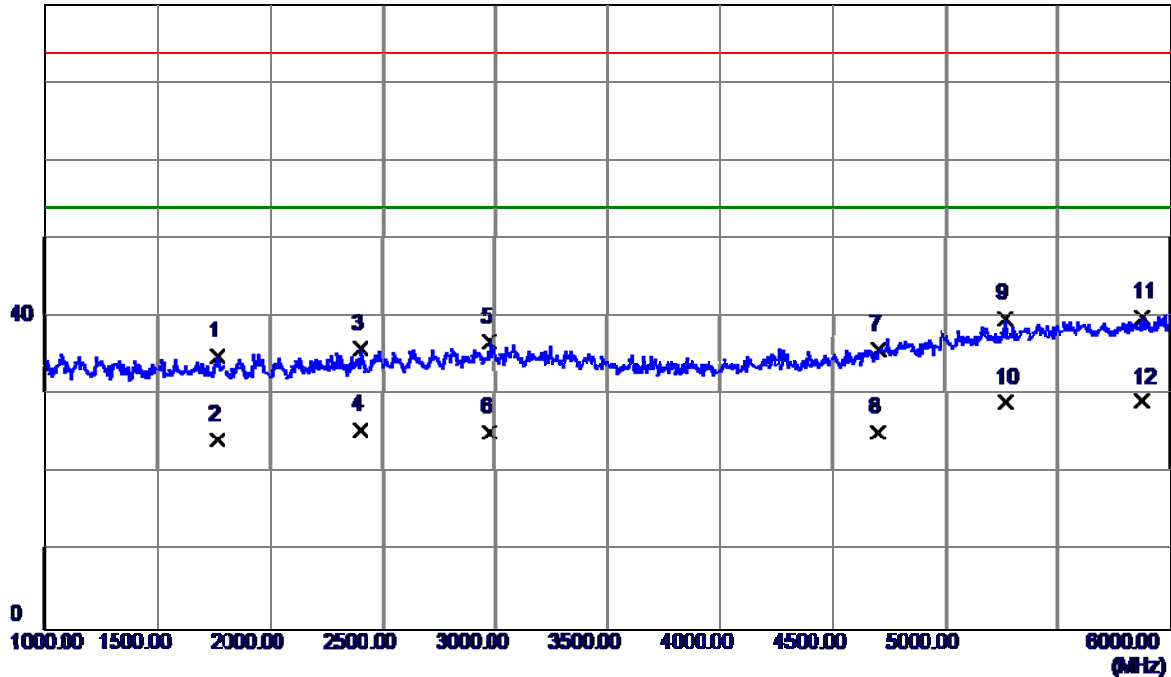

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1765.0000    | 38.77                      | -3.69                   | 35.08                     | 74.00           | -38.92       | Peak     |
| 2    | 1765.0000    | 27.95                      | -3.69                   | 24.26                     | 54.00           | -29.74       | AVG      |
| 3    | 2405.0000    | 36.37                      | -0.35                   | 36.02                     | 74.00           | -37.98       | Peak     |
| 4    | 2405.0000    | 25.94                      | -0.35                   | 25.59                     | 54.00           | -28.41       | AVG      |
| 5    | 2977.5000    | 34.53                      | 2.30                    | 36.83                     | 74.00           | -37.17       | Peak     |
| 6    | 2977.5000    | 22.94                      | 2.30                    | 25.24                     | 54.00           | -28.76       | AVG      |
| 7    | 4705.0000    | 31.03                      | 4.88                    | 35.91                     | 74.00           | -38.09       | Peak     |
| 8    | 4705.0000    | 20.47                      | 4.88                    | 25.35                     | 54.00           | -28.65       | AVG      |
| 9    | 5265.0000    | 32.63                      | 7.21                    | 39.84                     | 74.00           | -34.16       | Peak     |
| 10   | 5265.0000    | 21.95                      | 7.21                    | 29.16                     | 54.00           | -24.84       | AVG      |
| 11   | 5877.5000    | 31.66                      | 8.35                    | 40.01                     | 74.00           | -33.99       | Peak     |
| 12 * | 5877.5000    | 20.85                      | 8.35                    | 29.20                     | 54.00           | -24.80       | AVG      |


|               |                                                         |                   |          |
|---------------|---------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                             | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                    | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                            | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                                 |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:MERRY |                   |          |
| Test Engineer | Treey Chen                                              |                   |          |

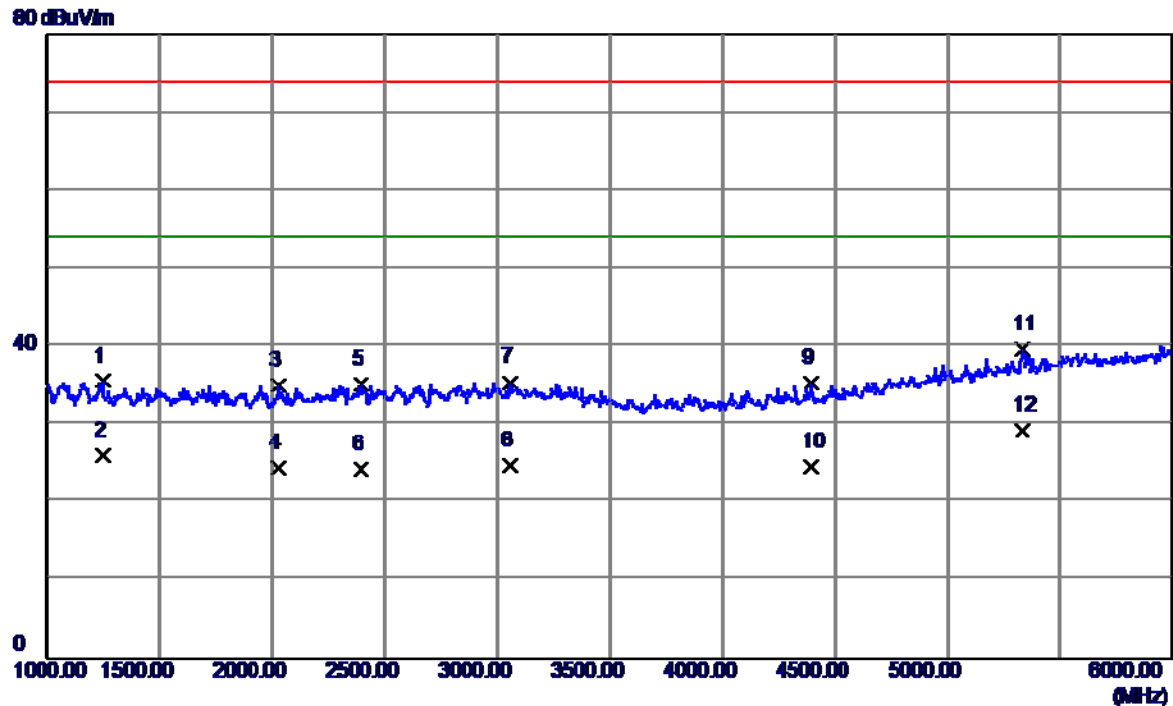

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1247.5000    | 41.45                      | -5.85                   | 35.60                     | 74.00           | -38.40       | Peak     |
| 2    | 1247.5000    | 31.90                      | -5.85                   | 26.05                     | 54.00           | -27.95       | AVG      |
| 3    | 2027.5000    | 37.51                      | -2.42                   | 35.09                     | 74.00           | -38.91       | Peak     |
| 4    | 2027.5000    | 26.87                      | -2.42                   | 24.45                     | 54.00           | -29.55       | AVG      |
| 5    | 2392.5000    | 35.56                      | -0.42                   | 35.14                     | 74.00           | -38.86       | Peak     |
| 6    | 2392.5000    | 24.81                      | -0.42                   | 24.39                     | 54.00           | -29.61       | AVG      |
| 7    | 3057.5000    | 33.06                      | 2.38                    | 35.44                     | 74.00           | -38.56       | Peak     |
| 8    | 3057.5000    | 22.39                      | 2.38                    | 24.77                     | 54.00           | -29.23       | AVG      |
| 9    | 4395.0000    | 31.79                      | 3.64                    | 35.43                     | 74.00           | -38.57       | Peak     |
| 10   | 4395.0000    | 20.93                      | 3.64                    | 24.57                     | 54.00           | -29.43       | AVG      |
| 11   | 5335.0000    | 32.26                      | 7.45                    | 39.71                     | 74.00           | -34.29       | Peak     |
| 12 * | 5335.0000    | 21.78                      | 7.45                    | 29.23                     | 54.00           | -24.77       | AVG      |


|               |                                                         |                   |            |
|---------------|---------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                             | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                    | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                            | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                                 |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG)Earphone:MERRY |                   |            |
| Test Engineer | Treey Chen                                              |                   |            |

80 dBuV/m

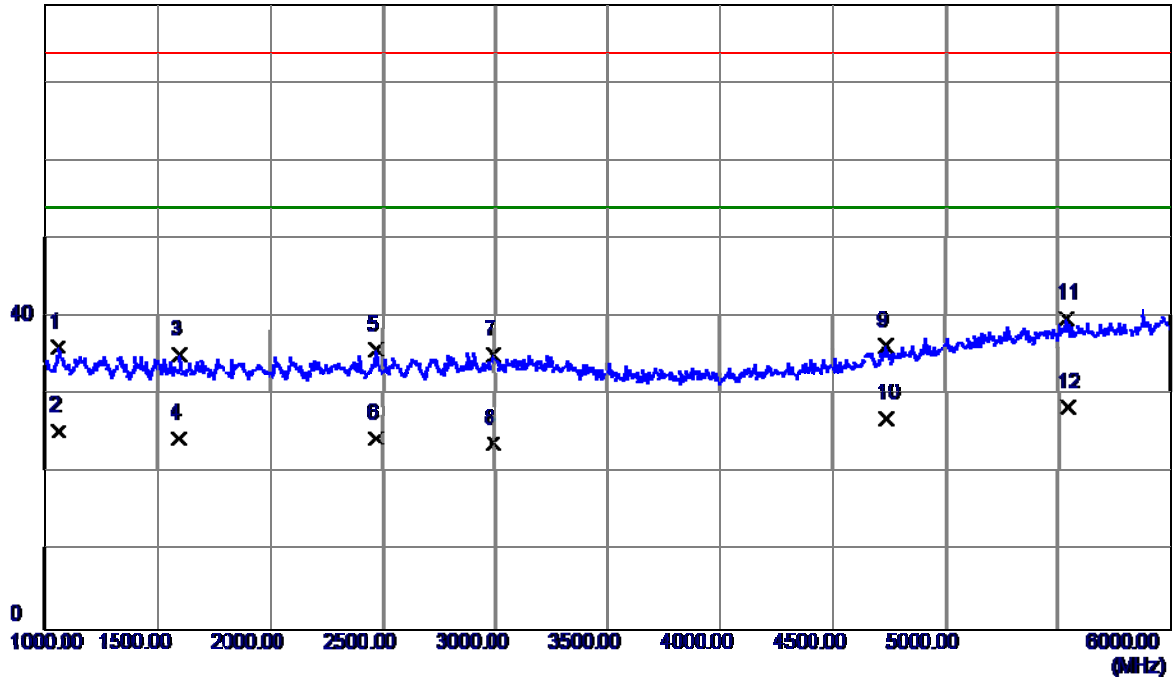


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1062.5000    | 42.61                      | -6.51                   | 36.10                     | 74.00           | -37.90       | Peak     |
| 2    | 1062.5000    | 31.94                      | -6.51                   | 25.43                     | 54.00           | -28.57       | AVG      |
| 3    | 1602.5000    | 39.64                      | -4.46                   | 35.18                     | 74.00           | -38.82       | Peak     |
| 4    | 1602.5000    | 28.94                      | -4.46                   | 24.48                     | 54.00           | -29.52       | AVG      |
| 5    | 2470.0000    | 35.83                      | 0.01                    | 35.84                     | 74.00           | -38.16       | Peak     |
| 6    | 2470.0000    | 24.40                      | 0.01                    | 24.41                     | 54.00           | -29.59       | AVG      |
| 7    | 2995.0000    | 32.86                      | 2.38                    | 35.24                     | 74.00           | -38.76       | Peak     |
| 8    | 2995.0000    | 21.40                      | 2.38                    | 23.78                     | 54.00           | -30.22       | AVG      |
| 9    | 4740.0000    | 31.20                      | 5.05                    | 36.25                     | 74.00           | -37.75       | Peak     |
| 10   | 4740.0000    | 21.98                      | 5.05                    | 27.03                     | 54.00           | -26.97       | AVG      |
| 11   | 5537.5000    | 31.85                      | 8.04                    | 39.89                     | 74.00           | -34.11       | Peak     |
| 12 * | 5537.5000    | 20.41                      | 8.04                    | 28.45                     | 54.00           | -25.55       | AVG      |

|               |                                                                 |                   |          |
|---------------|-----------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                     | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                            | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                    | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                                         |                   |          |
| Note          | Adapter:BYD+USB<br>COPY:LX+BATTERY:DESAY(LG)Earphone:LianChuang |                   |          |
| Test Engineer | Treey Chen                                                      |                   |          |

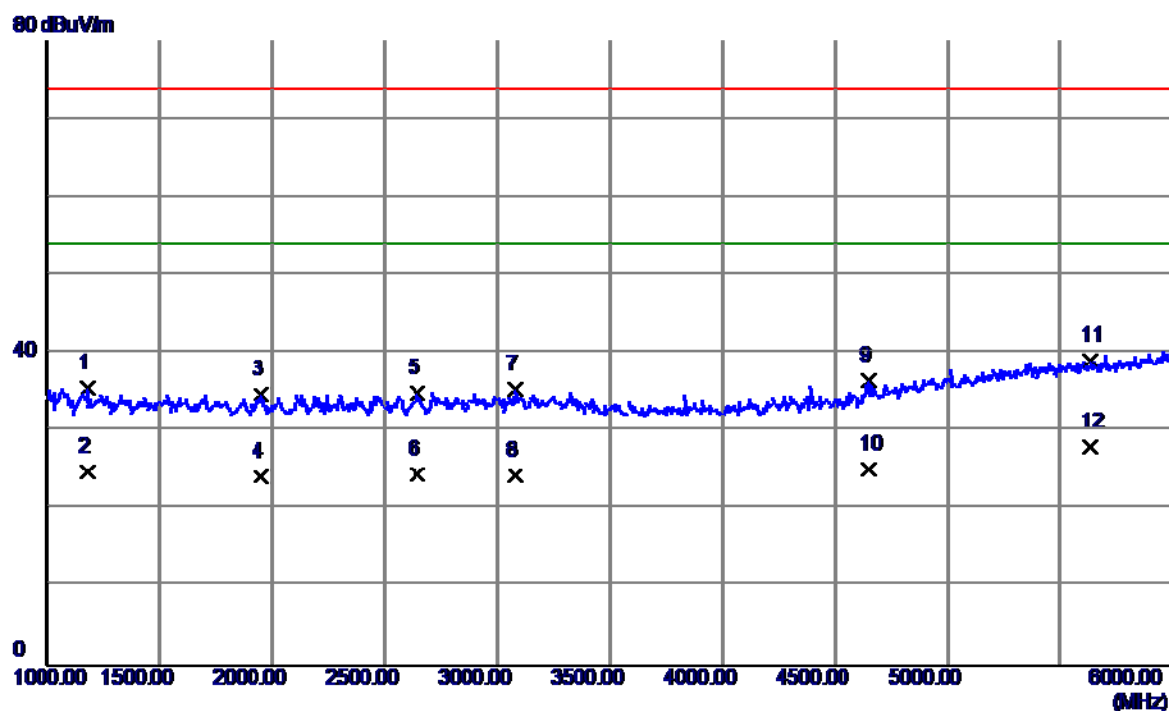


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1177.5000    | 41.62                      | -6.10                   | 35.52                     | 74.00           | -38.48       | Peak     |
| 2    | 1177.5000    | 30.97                      | -6.10                   | 24.87                     | 54.00           | -29.13       | AVG      |
| 3    | 1947.5000    | 37.61                      | -2.82                   | 34.79                     | 74.00           | -39.21       | Peak     |
| 4    | 1947.5000    | 26.93                      | -2.82                   | 24.11                     | 54.00           | -29.89       | AVG      |
| 5    | 2645.0000    | 34.03                      | 0.82                    | 34.85                     | 74.00           | -39.15       | Peak     |
| 6    | 2645.0000    | 23.64                      | 0.82                    | 24.46                     | 54.00           | -29.54       | AVG      |
| 7    | 3077.5000    | 32.91                      | 2.38                    | 35.29                     | 74.00           | -38.71       | Peak     |
| 8    | 3077.5000    | 21.94                      | 2.38                    | 24.32                     | 54.00           | -29.68       | AVG      |
| 9    | 4647.5000    | 31.85                      | 4.60                    | 36.45                     | 74.00           | -37.55       | Peak     |
| 10   | 4647.5000    | 20.50                      | 4.60                    | 25.10                     | 54.00           | -28.90       | AVG      |
| 11   | 5635.0000    | 30.93                      | 8.13                    | 39.06                     | 74.00           | -34.94       | Peak     |
| 12 * | 5635.0000    | 19.94                      | 8.13                    | 28.07                     | 54.00           | -25.93       | AVG      |

|               |                                                                 |                   |            |
|---------------|-----------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                     | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                            | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                    | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                                         |                   |            |
| Note          | Adapter:BYD+USB<br>COPY:LX+BATTERY:DESAY(LG)Earphone:LianChuang |                   |            |
| Test Engineer | Treey Chen                                                      |                   |            |

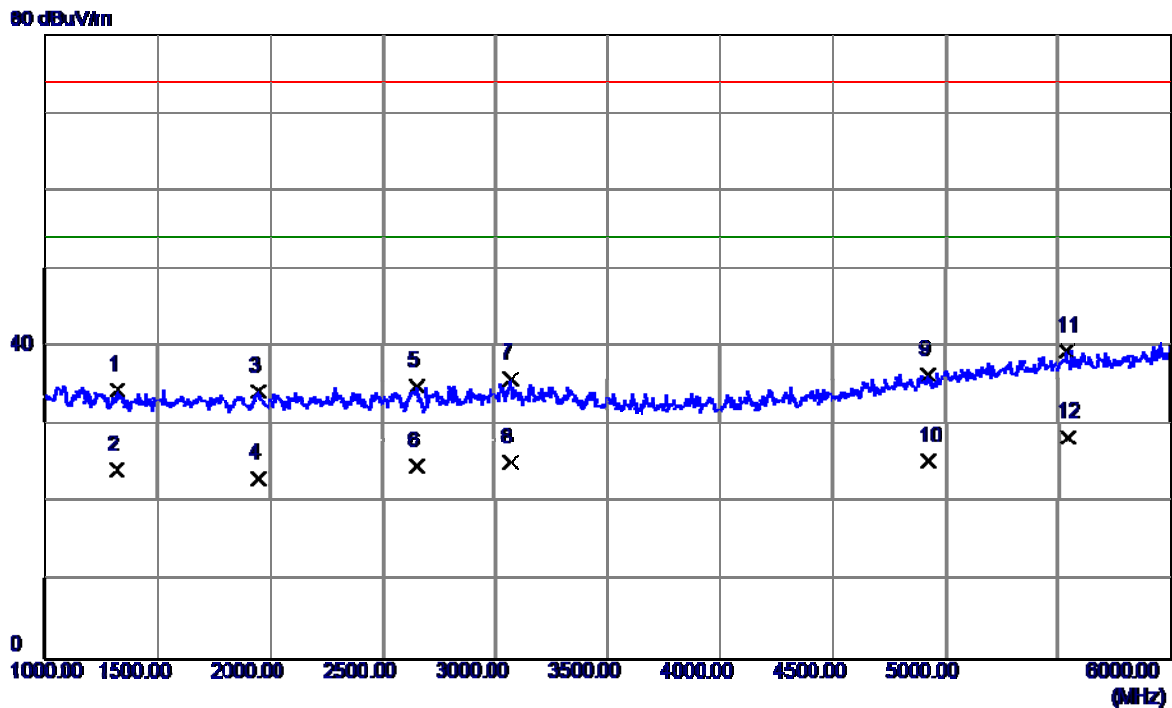


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1322.5000    | 40.16                      | -5.58                   | 34.58                     | 74.00           | -39.42       | Peak     |
| 2    | 1322.5000    | 29.94                      | -5.58                   | 24.36                     | 54.00           | -29.64       | AVG      |
| 3    | 1950.0000    | 37.18                      | -2.81                   | 34.37                     | 74.00           | -39.63       | Peak     |
| 4    | 1950.0000    | 26.00                      | -2.81                   | 23.19                     | 54.00           | -30.81       | AVG      |
| 5    | 2657.5000    | 34.10                      | 0.87                    | 34.97                     | 74.00           | -39.03       | Peak     |
| 6    | 2657.5000    | 23.91                      | 0.87                    | 24.78                     | 54.00           | -29.22       | AVG      |
| 7    | 3070.0000    | 33.66                      | 2.38                    | 36.04                     | 74.00           | -37.96       | Peak     |
| 8    | 3070.0000    | 22.96                      | 2.38                    | 25.34                     | 54.00           | -28.66       | AVG      |
| 9    | 4927.5000    | 30.54                      | 5.96                    | 36.50                     | 74.00           | -37.50       | Peak     |
| 10   | 4927.5000    | 19.49                      | 5.96                    | 25.45                     | 54.00           | -28.55       | AVG      |
| 11   | 5537.5000    | 31.48                      | 8.04                    | 39.52                     | 74.00           | -34.48       | Peak     |
| 12 * | 5537.5000    | 20.50                      | 8.04                    | 28.54                     | 54.00           | -25.46       | AVG      |

|               |                                                                |                   |          |
|---------------|----------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                    | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                                           | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                   | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                                        |                   |          |
| Note          | Adapter:BYD+USB<br>COPY:LX+BATTERY:DESAY(LG)Earphone:QuanCheng |                   |          |
| Test Engineer | Treey Chen                                                     |                   |          |

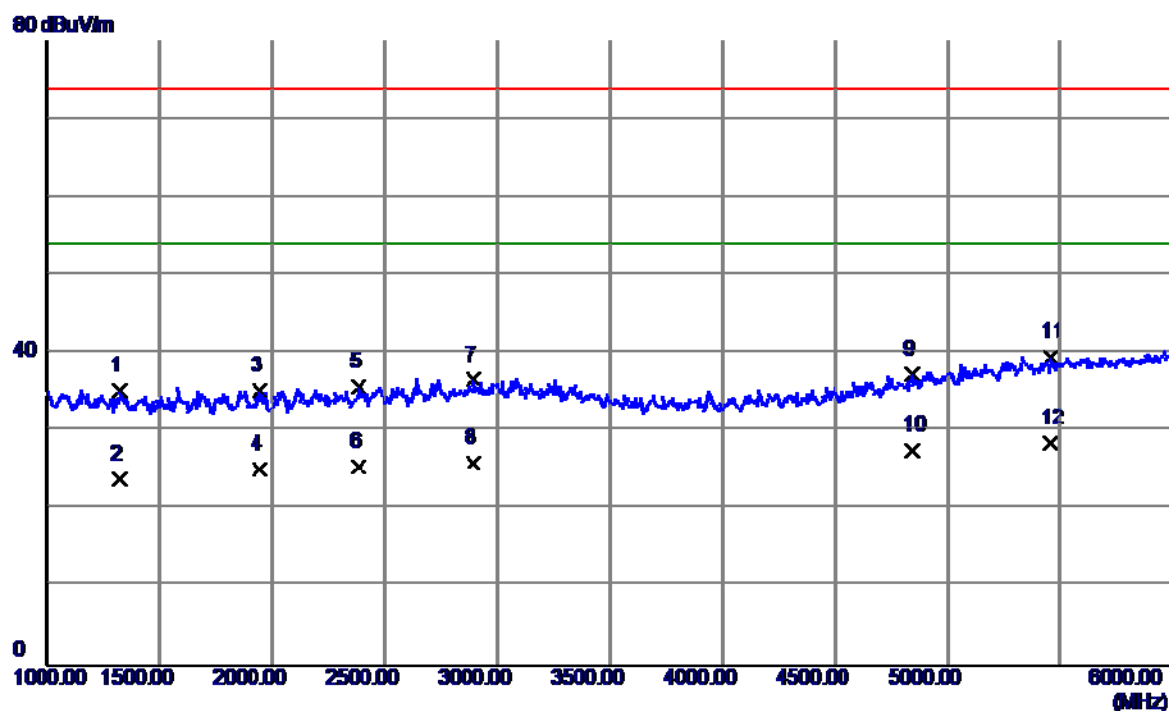


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1320.0000    | 40.83                      | -5.59                   | 35.24                     | 74.00           | -38.76       | Peak     |
| 2    | 1320.0000    | 29.49                      | -5.59                   | 23.90                     | 54.00           | -30.10       | AVG      |
| 3    | 1945.0000    | 38.03                      | -2.83                   | 35.20                     | 74.00           | -38.80       | Peak     |
| 4    | 1945.0000    | 27.94                      | -2.83                   | 25.11                     | 54.00           | -28.89       | AVG      |
| 5    | 2382.5000    | 36.08                      | -0.47                   | 35.61                     | 74.00           | -38.39       | Peak     |
| 6    | 2382.5000    | 25.93                      | -0.47                   | 25.46                     | 54.00           | -28.54       | AVG      |
| 7    | 2895.0000    | 34.63                      | 1.93                    | 36.56                     | 74.00           | -37.44       | Peak     |
| 8    | 2895.0000    | 23.94                      | 1.93                    | 25.87                     | 54.00           | -28.13       | AVG      |
| 9    | 4845.0000    | 31.67                      | 5.56                    | 37.23                     | 74.00           | -36.77       | Peak     |
| 10   | 4845.0000    | 21.98                      | 5.56                    | 27.54                     | 54.00           | -26.46       | AVG      |
| 11   | 5455.0000    | 31.64                      | 7.86                    | 39.50                     | 74.00           | -34.50       | Peak     |
| 12 * | 5455.0000    | 20.56                      | 7.86                    | 28.42                     | 54.00           | -25.58       | AVG      |

|               |                                                                |                   |            |
|---------------|----------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                    | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                                           | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                   | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                                        |                   |            |
| Note          | Adapter:BYD+USB<br>COPY:LX+BATTERY:DESAY(LG)Earphone:QuanCheng |                   |            |
| Test Engineer | Treey Chen                                                     |                   |            |

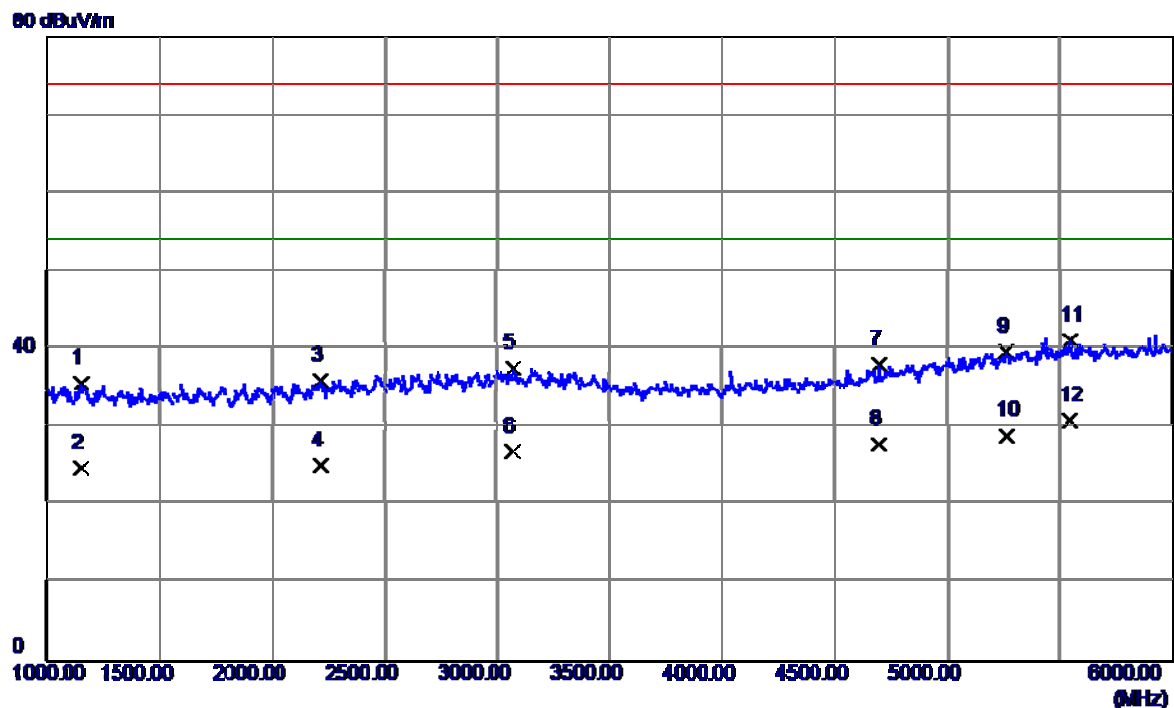

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1155.0000    | 41.91                      | -6.18                   | 35.73                     | 74.00           | -38.27       | Peak     |
| 2    | 1155.0000    | 30.94                      | -6.18                   | 24.76                     | 54.00           | -29.24       | AVG      |
| 3    | 2217.5000    | 37.40                      | -1.38                   | 36.02                     | 74.00           | -37.98       | Peak     |
| 4    | 2217.5000    | 26.48                      | -1.38                   | 25.10                     | 54.00           | -28.90       | AVG      |
| 5    | 3072.5000    | 35.16                      | 2.38                    | 37.54                     | 74.00           | -36.46       | Peak     |
| 6    | 3072.5000    | 24.49                      | 2.38                    | 26.87                     | 54.00           | -27.13       | AVG      |
| 7    | 4697.5000    | 33.28                      | 4.84                    | 38.12                     | 74.00           | -35.88       | Peak     |
| 8    | 4697.5000    | 22.94                      | 4.84                    | 27.78                     | 54.00           | -26.22       | AVG      |
| 9    | 5260.0000    | 32.51                      | 7.19                    | 39.70                     | 74.00           | -34.30       | Peak     |
| 10   | 5260.0000    | 21.84                      | 7.19                    | 29.03                     | 54.00           | -24.97       | AVG      |
| 11   | 5542.5000    | 33.01                      | 8.05                    | 41.06                     | 74.00           | -32.94       | Peak     |
| 12 * | 5542.5000    | 22.87                      | 8.05                    | 30.92                     | 54.00           | -23.08       | AVG      |


|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Speaker                   |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

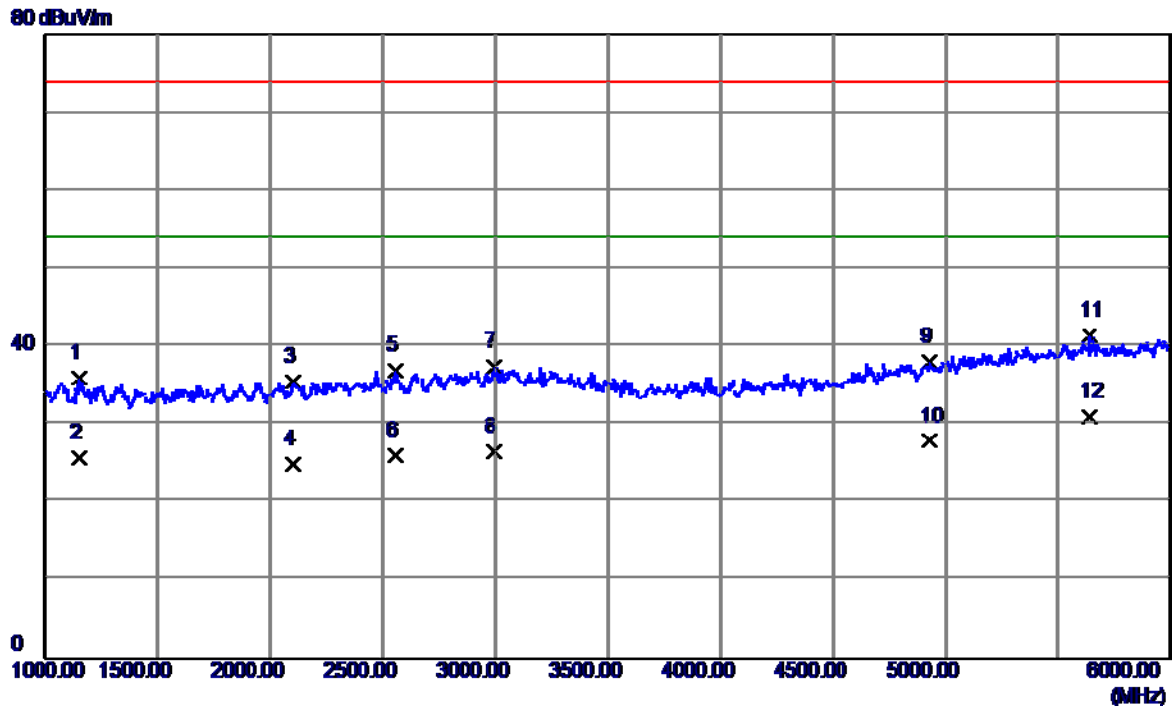

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1150.0000    | 42.13                      | -6.20                   | 35.93                     | 74.00           | -38.07       | Peak     |
| 2    | 1150.0000    | 31.95                      | -6.20                   | 25.75                     | 54.00           | -28.25       | AVG      |
| 3    | 2102.5000    | 37.60                      | -2.01                   | 35.59                     | 74.00           | -38.41       | Peak     |
| 4    | 2102.5000    | 26.90                      | -2.01                   | 24.89                     | 54.00           | -29.11       | AVG      |
| 5    | 2557.5000    | 36.46                      | 0.43                    | 36.89                     | 74.00           | -37.11       | Peak     |
| 6    | 2557.5000    | 25.63                      | 0.43                    | 26.06                     | 54.00           | -27.94       | AVG      |
| 7    | 2992.5000    | 35.00                      | 2.37                    | 37.37                     | 74.00           | -36.63       | Peak     |
| 8    | 2992.5000    | 24.16                      | 2.37                    | 26.53                     | 54.00           | -27.47       | AVG      |
| 9    | 4927.5000    | 32.17                      | 5.96                    | 38.13                     | 74.00           | -35.87       | Peak     |
| 10   | 4927.5000    | 21.96                      | 5.96                    | 27.92                     | 54.00           | -26.08       | AVG      |
| 11   | 5637.5000    | 33.31                      | 8.13                    | 41.44                     | 74.00           | -32.56       | Peak     |
| 12 * | 5637.5000    | 22.95                      | 8.13                    | 31.08                     | 54.00           | -22.92       | AVG      |


|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Speaker                   |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

80 dBuV/m

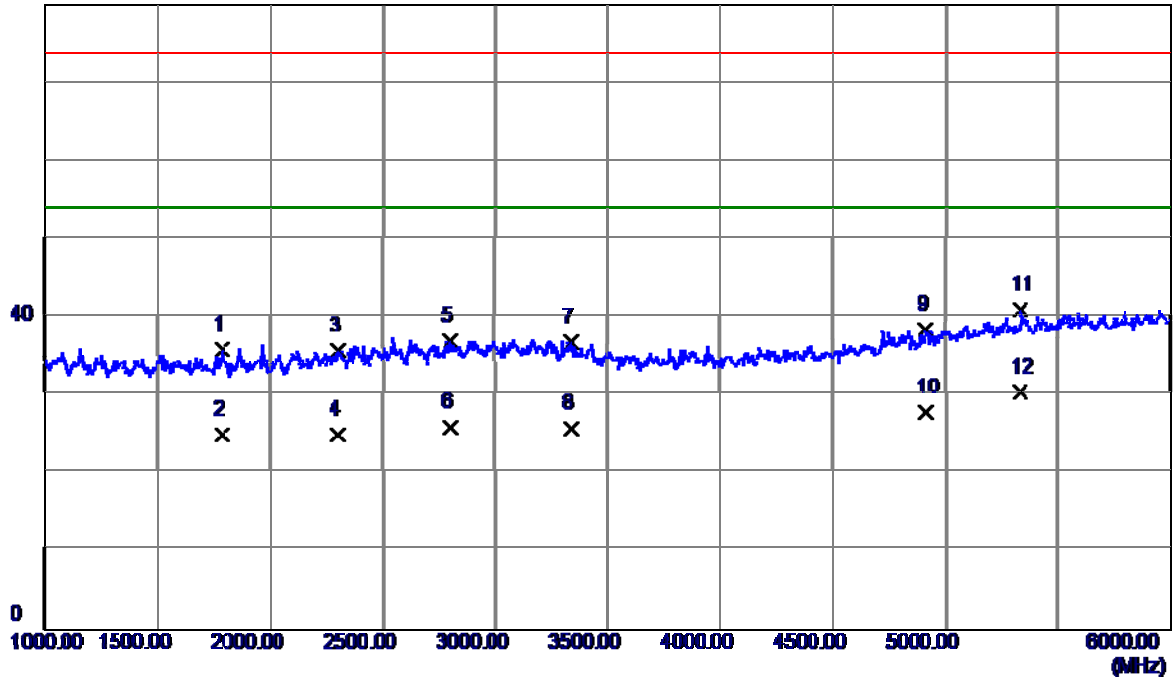

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1787.5000    | 39.36                      | -3.58                   | 35.78                     | 74.00           | -38.22       | Peak     |
| 2    | 1787.5000    | 28.49                      | -3.58                   | 24.91                     | 54.00           | -29.09       | AVG      |
| 3    | 2305.0000    | 36.53                      | -0.90                   | 35.63                     | 74.00           | -38.37       | Peak     |
| 4    | 2305.0000    | 25.93                      | -0.90                   | 25.03                     | 54.00           | -28.97       | AVG      |
| 5    | 2805.0000    | 35.42                      | 1.53                    | 36.95                     | 74.00           | -37.05       | Peak     |
| 6    | 2805.0000    | 24.46                      | 1.53                    | 25.99                     | 54.00           | -28.01       | AVG      |
| 7    | 3337.5000    | 34.51                      | 2.30                    | 36.81                     | 74.00           | -37.19       | Peak     |
| 8    | 3337.5000    | 23.40                      | 2.30                    | 25.70                     | 54.00           | -28.30       | AVG      |
| 9    | 4917.5000    | 32.46                      | 5.91                    | 38.37                     | 74.00           | -35.63       | Peak     |
| 10   | 4917.5000    | 21.98                      | 5.91                    | 27.89                     | 54.00           | -26.11       | AVG      |
| 11   | 5335.0000    | 33.44                      | 7.45                    | 40.89                     | 74.00           | -33.11       | Peak     |
| 12 * | 5335.0000    | 22.90                      | 7.45                    | 30.35                     | 54.00           | -23.65       | AVG      |


|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Playing+Earpone                   |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

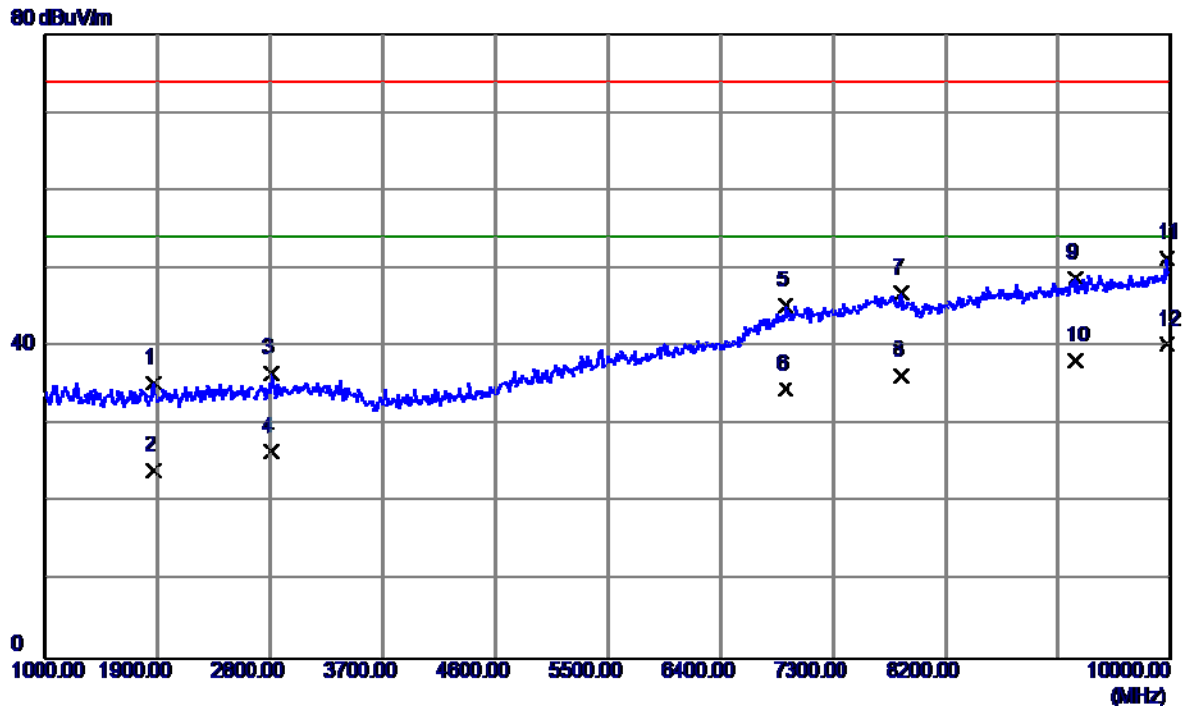

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1868.5000    | 38.63                      | -3.20                   | 35.43                     | 74.00           | -38.57       | Peak     |
| 2    | 1868.5000    | 27.39                      | -3.20                   | 24.19                     | 54.00           | -29.81       | AVG      |
| 3    | 2813.5000    | 35.00                      | 1.57                    | 36.57                     | 74.00           | -37.43       | Peak     |
| 4    | 2813.5000    | 24.93                      | 1.57                    | 26.50                     | 54.00           | -27.50       | AVG      |
| 5    | 6917.5000    | 34.17                      | 11.13                   | 45.30                     | 74.00           | -28.70       | Peak     |
| 6    | 6917.5000    | 23.40                      | 11.13                   | 34.53                     | 54.00           | -19.47       | AVG      |
| 7    | 7849.0000    | 34.36                      | 12.55                   | 46.91                     | 74.00           | -27.09       | Peak     |
| 8    | 7849.0000    | 23.70                      | 12.55                   | 36.25                     | 54.00           | -17.75       | AVG      |
| 9    | 9244.0000    | 34.28                      | 14.53                   | 48.81                     | 74.00           | -25.19       | Peak     |
| 10   | 9244.0000    | 23.68                      | 14.53                   | 38.21                     | 54.00           | -15.79       | AVG      |
| 11   | 9973.0000    | 35.81                      | 15.50                   | 51.31                     | 74.00           | -22.69       | Peak     |
| 12 * | 9973.0000    | 24.84                      | 15.50                   | 40.34                     | 54.00           | -13.66       | AVG      |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Playing+Earpone                   |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |


80 dBuV/m

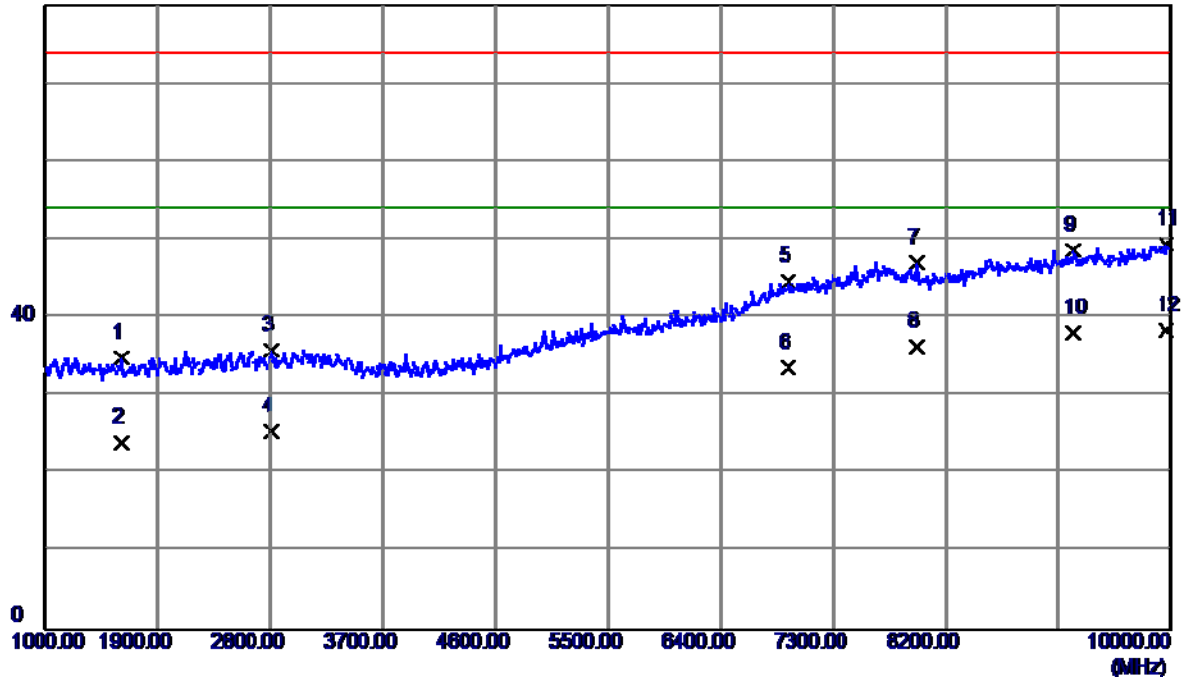

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1607.5000    | 39.30                      | -4.44                   | 34.86                     | 74.00           | -39.14       | Peak     |
| 2    | 1607.5000    | 28.46                      | -4.44                   | 24.02                     | 54.00           | -29.98       | AVG      |
| 3    | 2813.5000    | 34.20                      | 1.57                    | 35.77                     | 74.00           | -38.23       | Peak     |
| 4    | 2813.5000    | 23.83                      | 1.57                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 5    | 6940.0000    | 33.47                      | 11.21                   | 44.68                     | 74.00           | -29.32       | Peak     |
| 6    | 6940.0000    | 22.45                      | 11.21                   | 33.66                     | 54.00           | -20.34       | AVG      |
| 7    | 7966.0000    | 34.48                      | 12.52                   | 47.00                     | 74.00           | -27.00       | Peak     |
| 8    | 7966.0000    | 23.80                      | 12.52                   | 36.32                     | 54.00           | -17.68       | AVG      |
| 9    | 9217.0000    | 34.10                      | 14.53                   | 48.63                     | 74.00           | -25.37       | Peak     |
| 10   | 9217.0000    | 23.48                      | 14.53                   | 38.01                     | 54.00           | -15.99       | AVG      |
| 11   | 9964.0000    | 33.88                      | 15.49                   | 49.37                     | 74.00           | -24.63       | Peak     |
| 12 * | 9964.0000    | 22.87                      | 15.49                   | 38.36                     | 54.00           | -15.64       | AVG      |


|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

80 dBuV/m

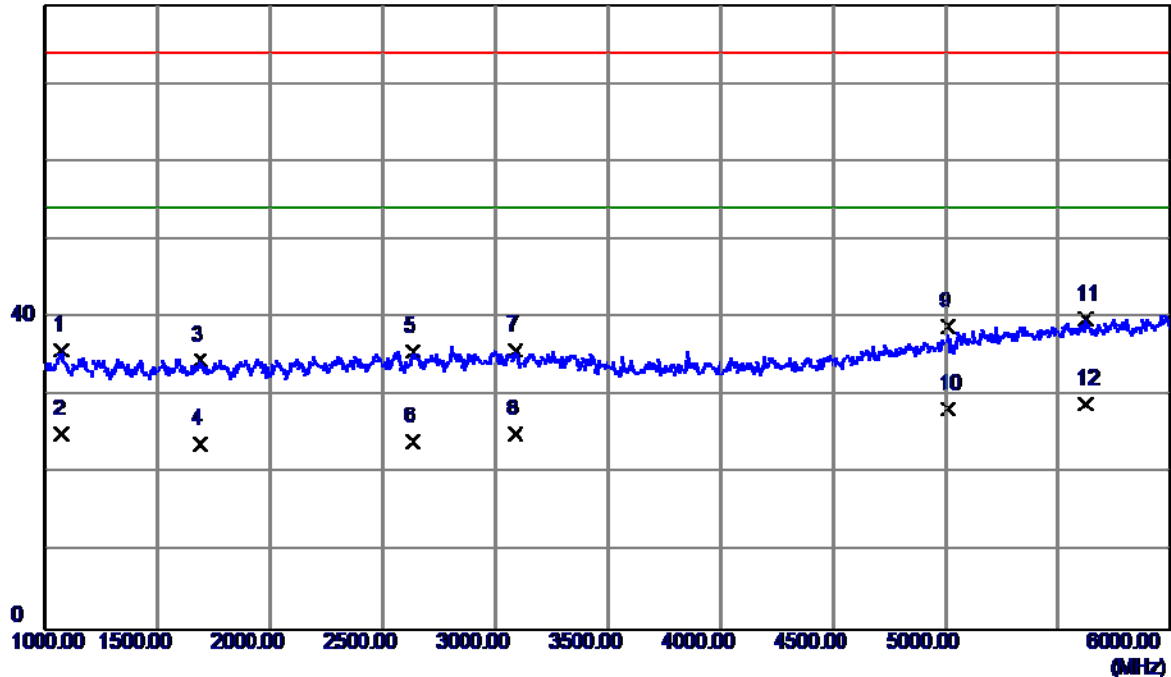

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1075.0000    | 42.26                      | -6.46                   | 35.80                     | 74.00           | -38.20       | Peak     |
| 2    | 1075.0000    | 31.63                      | -6.46                   | 25.17                     | 54.00           | -28.83       | AVG      |
| 3    | 1687.5000    | 38.65                      | -4.06                   | 34.59                     | 74.00           | -39.41       | Peak     |
| 4    | 1687.5000    | 27.94                      | -4.06                   | 23.88                     | 54.00           | -30.12       | AVG      |
| 5    | 2635.0000    | 34.94                      | 0.77                    | 35.71                     | 74.00           | -38.29       | Peak     |
| 6    | 2635.0000    | 23.44                      | 0.77                    | 24.21                     | 54.00           | -29.79       | AVG      |
| 7    | 3090.0000    | 33.49                      | 2.37                    | 35.86                     | 74.00           | -38.14       | Peak     |
| 8    | 3090.0000    | 22.69                      | 2.37                    | 25.06                     | 54.00           | -28.94       | AVG      |
| 9    | 5010.0000    | 32.57                      | 6.34                    | 38.91                     | 74.00           | -35.09       | Peak     |
| 10   | 5010.0000    | 21.98                      | 6.34                    | 28.32                     | 54.00           | -25.68       | AVG      |
| 11   | 5620.0000    | 31.67                      | 8.12                    | 39.79                     | 74.00           | -34.21       | Peak     |
| 12 * | 5620.0000    | 20.83                      | 8.12                    | 28.95                     | 54.00           | -25.05       | AVG      |


|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

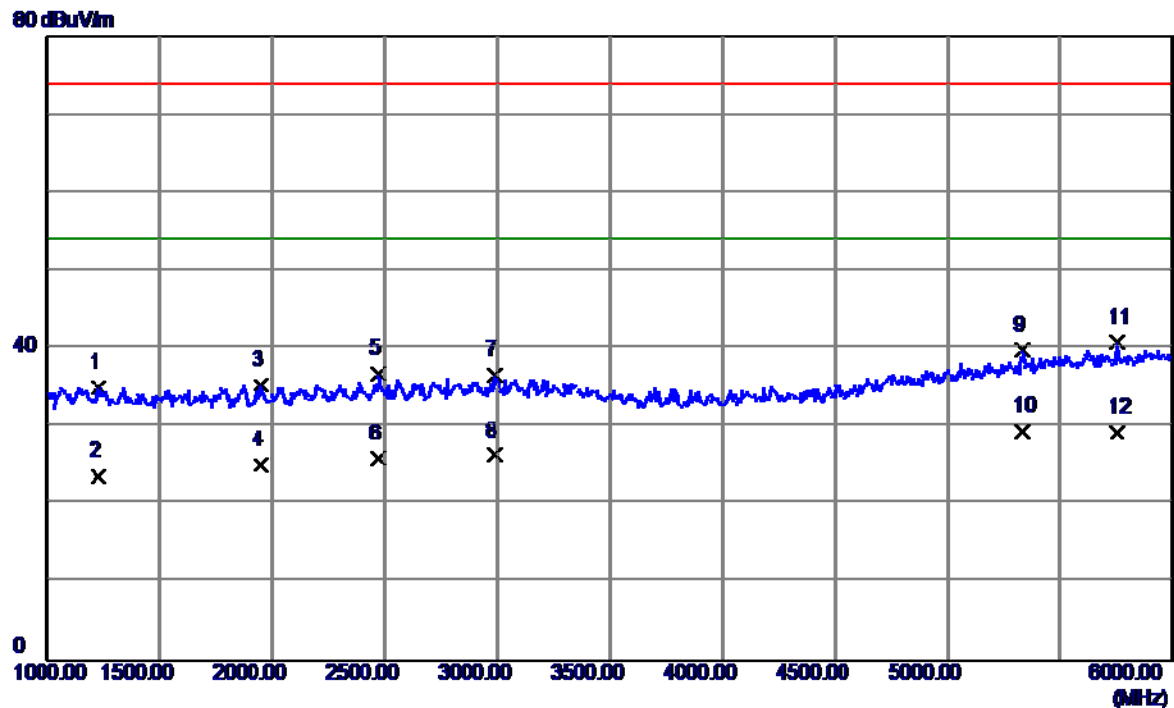

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1227.5000    | 40.99                      | -5.92                   | 35.07                     | 74.00           | -38.93       | Peak     |
| 2    | 1227.5000    | 29.64                      | -5.92                   | 23.72                     | 54.00           | -30.28       | AVG      |
| 3    | 1950.0000    | 38.22                      | -2.81                   | 35.41                     | 74.00           | -38.59       | Peak     |
| 4    | 1950.0000    | 27.94                      | -2.81                   | 25.13                     | 54.00           | -28.87       | AVG      |
| 5    | 2470.0000    | 36.74                      | 0.01                    | 36.75                     | 74.00           | -37.25       | Peak     |
| 6    | 2470.0000    | 25.94                      | 0.01                    | 25.95                     | 54.00           | -28.05       | AVG      |
| 7    | 2990.0000    | 34.23                      | 2.36                    | 36.59                     | 74.00           | -37.41       | Peak     |
| 8    | 2990.0000    | 23.96                      | 2.36                    | 26.32                     | 54.00           | -27.68       | AVG      |
| 9    | 5335.0000    | 32.44                      | 7.45                    | 39.89                     | 74.00           | -34.11       | Peak     |
| 10 * | 5335.0000    | 21.94                      | 7.45                    | 29.39                     | 54.00           | -24.61       | AVG      |
| 11   | 5755.0000    | 32.49                      | 8.24                    | 40.73                     | 74.00           | -33.27       | Peak     |
| 12   | 5755.0000    | 20.98                      | 8.24                    | 29.22                     | 54.00           | -24.78       | AVG      |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treyy Chen                                |                   |          |


80 dBuV/m

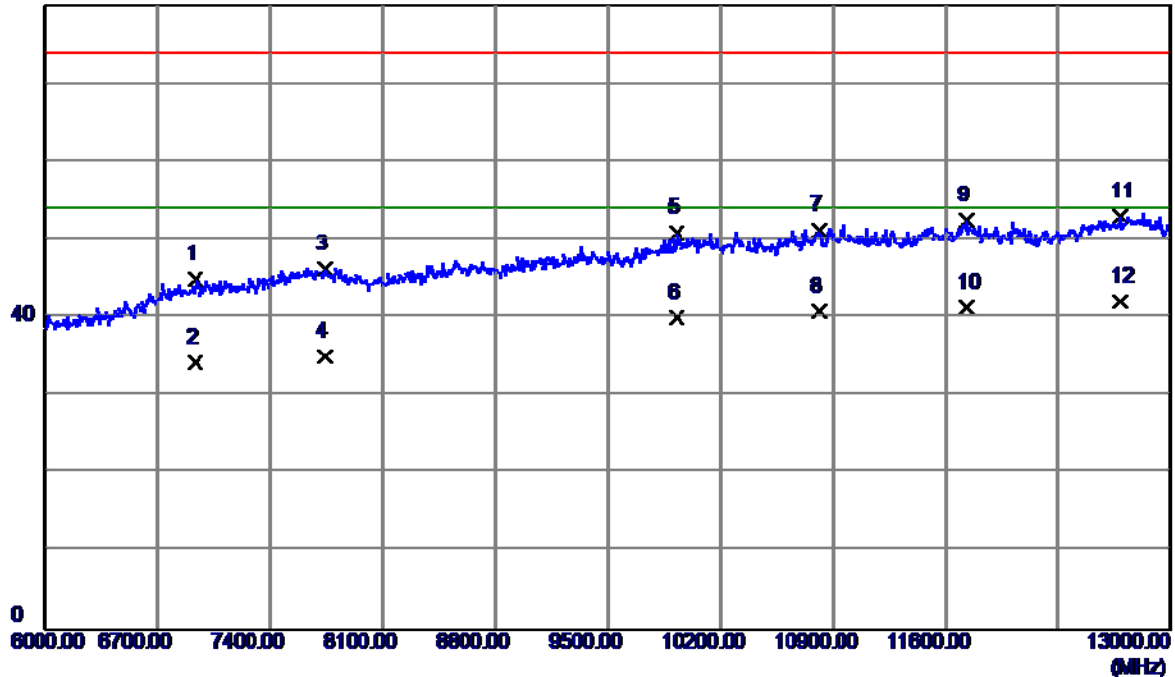

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 6934.5000    | 33.71                      | 11.19                   | 44.90                     | 74.00           | -29.10       | Peak     |
| 2    | 6934.5000    | 22.98                      | 11.19                   | 34.17                     | 54.00           | -19.83       | AVG      |
| 3    | 7739.5000    | 33.62                      | 12.58                   | 46.20                     | 74.00           | -27.80       | Peak     |
| 4    | 7739.5000    | 22.45                      | 12.58                   | 35.03                     | 54.00           | -18.97       | AVG      |
| 5    | 9930.5000    | 35.44                      | 15.42                   | 50.86                     | 74.00           | -23.14       | Peak     |
| 6    | 9930.5000    | 24.64                      | 15.42                   | 40.06                     | 54.00           | -13.94       | AVG      |
| 7    | 10812.5000   | 34.20                      | 16.99                   | 51.19                     | 74.00           | -22.81       | Peak     |
| 8    | 10812.5000   | 23.80                      | 16.99                   | 40.79                     | 54.00           | -13.21       | AVG      |
| 9    | 11729.5000   | 34.73                      | 17.72                   | 52.45                     | 74.00           | -21.55       | Peak     |
| 10   | 11729.5000   | 23.56                      | 17.72                   | 41.28                     | 54.00           | -12.72       | AVG      |
| 11   | 12692.0000   | 34.57                      | 18.37                   | 52.94                     | 74.00           | -21.06       | Peak     |
| 12 * | 12692.0000   | 23.78                      | 18.37                   | 42.15                     | 54.00           | -11.85       | AVG      |


|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(GSM)                      |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

80 dBuV/m

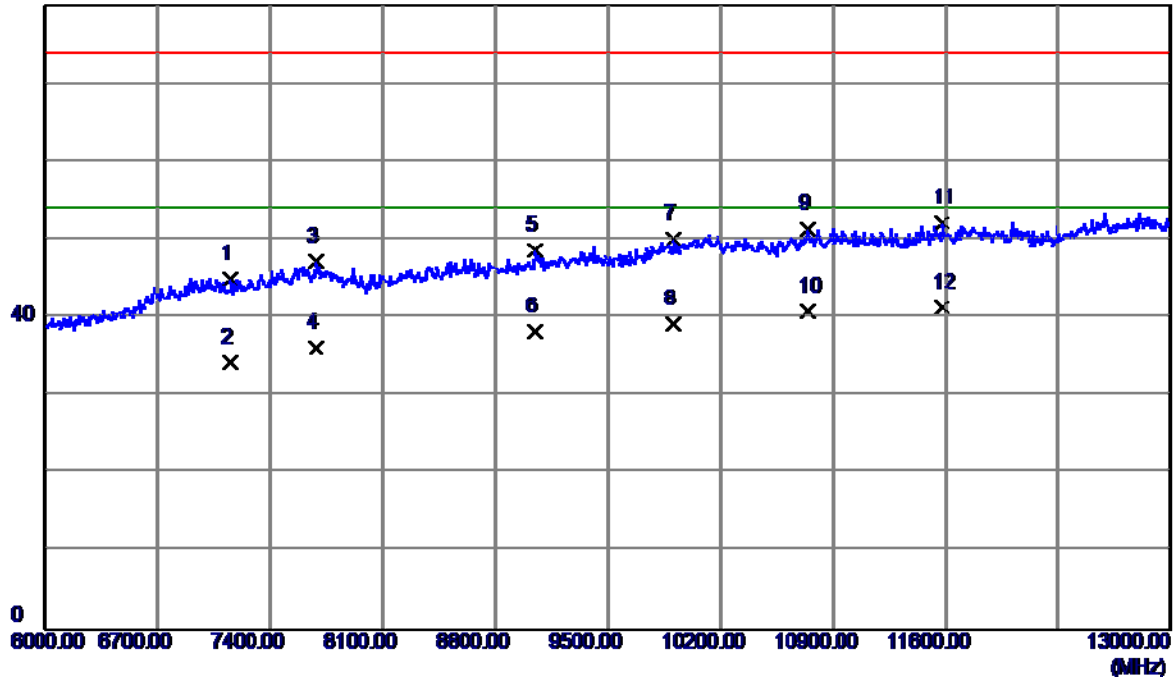


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7155.0000    | 33.18                      | 11.80                   | 44.98                     | 74.00           | -29.02       | Peak     |
| 2    | 7155.0000    | 22.45                      | 11.80                   | 34.25                     | 54.00           | -19.75       | AVG      |
| 3    | 7687.0000    | 34.55                      | 12.59                   | 47.14                     | 74.00           | -26.86       | Peak     |
| 4    | 7687.0000    | 23.64                      | 12.59                   | 36.23                     | 54.00           | -17.77       | AVG      |
| 5    | 9048.5000    | 34.12                      | 14.53                   | 48.65                     | 74.00           | -25.35       | Peak     |
| 6    | 9048.5000    | 23.64                      | 14.53                   | 38.17                     | 54.00           | -15.83       | AVG      |
| 7    | 9906.0000    | 34.72                      | 15.37                   | 50.09                     | 74.00           | -23.91       | Peak     |
| 8    | 9906.0000    | 23.85                      | 15.37                   | 39.22                     | 54.00           | -14.78       | AVG      |
| 9    | 10742.5000   | 34.45                      | 16.92                   | 51.37                     | 74.00           | -22.63       | Peak     |
| 10   | 10742.5000   | 23.87                      | 16.92                   | 40.79                     | 54.00           | -13.21       | AVG      |
| 11   | 11575.5000   | 34.28                      | 17.85                   | 52.13                     | 74.00           | -21.87       | Peak     |
| 12 * | 11575.5000   | 23.45                      | 17.85                   | 41.30                     | 54.00           | -12.70       | AVG      |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

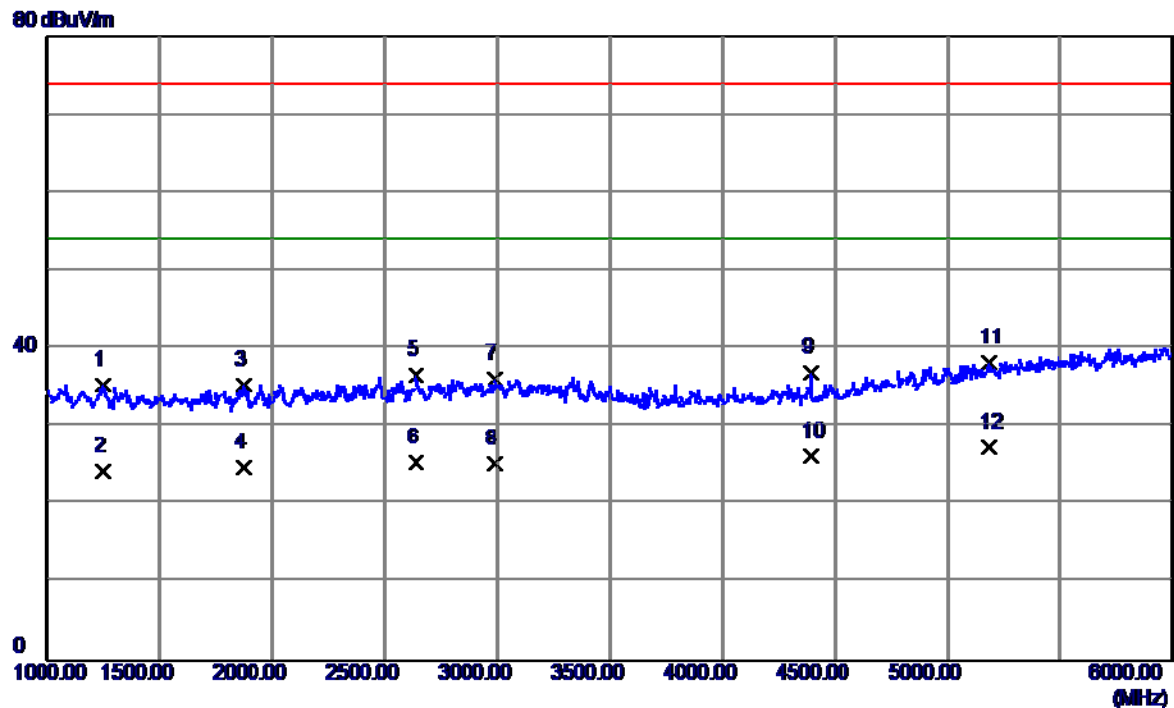


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1250.0000    | 41.24                      | -5.84                   | 35.40                     | 74.00           | -38.60       | Peak     |
| 2    | 1250.0000    | 30.15                      | -5.84                   | 24.31                     | 54.00           | -29.69       | AVG      |
| 3    | 1870.0000    | 38.49                      | -3.19                   | 35.30                     | 74.00           | -38.70       | Peak     |
| 4    | 1870.0000    | 27.94                      | -3.19                   | 24.75                     | 54.00           | -29.25       | AVG      |
| 5    | 2640.0000    | 35.89                      | 0.79                    | 36.68                     | 74.00           | -37.32       | Peak     |
| 6    | 2640.0000    | 24.64                      | 0.79                    | 25.43                     | 54.00           | -28.57       | AVG      |
| 7    | 2987.5000    | 33.75                      | 2.34                    | 36.09                     | 74.00           | -37.91       | Peak     |
| 8    | 2987.5000    | 22.87                      | 2.34                    | 25.21                     | 54.00           | -28.79       | AVG      |
| 9    | 4392.5000    | 33.32                      | 3.63                    | 36.95                     | 74.00           | -37.05       | Peak     |
| 10   | 4392.5000    | 22.64                      | 3.63                    | 26.27                     | 54.00           | -27.73       | AVG      |
| 11   | 5182.5000    | 31.26                      | 6.93                    | 38.19                     | 74.00           | -35.81       | Peak     |
| 12 * | 5182.5000    | 20.47                      | 6.93                    | 27.40                     | 54.00           | -26.60       | AVG      |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

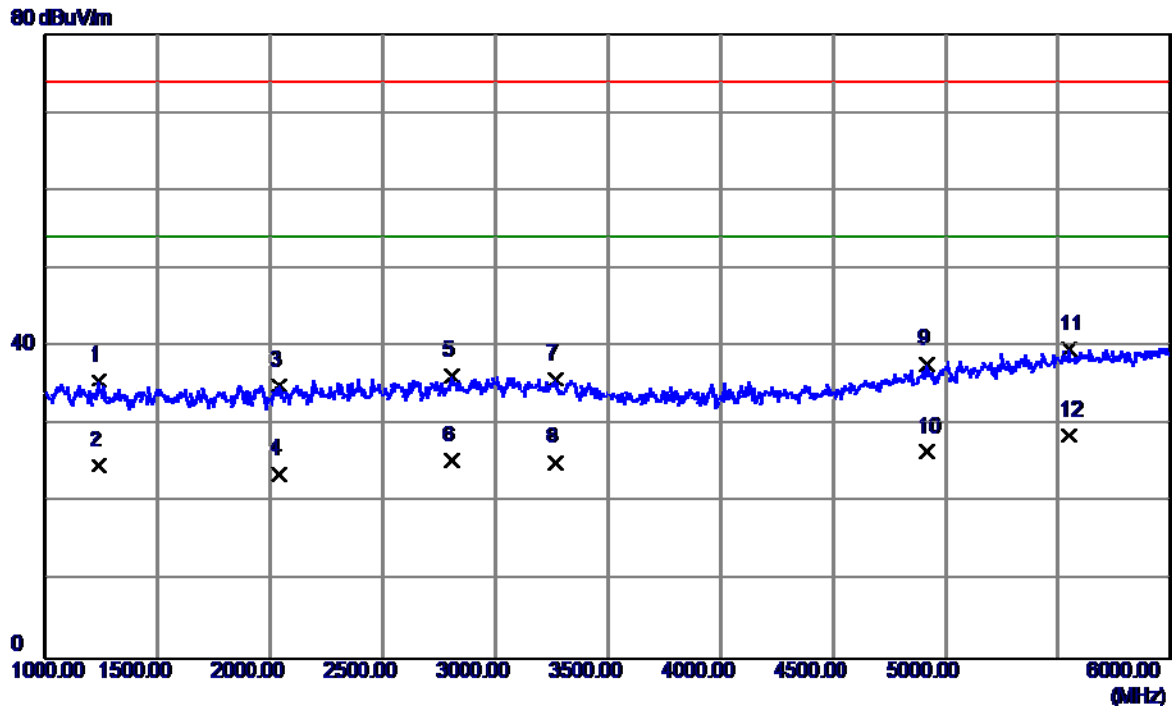


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1237.5000    | 41.51                      | -5.88                   | 35.63                     | 74.00           | -38.37       | Peak     |
| 2    | 1237.5000    | 30.64                      | -5.88                   | 24.76                     | 54.00           | -29.24       | AVG      |
| 3    | 2040.0000    | 37.43                      | -2.35                   | 35.08                     | 74.00           | -38.92       | Peak     |
| 4    | 2040.0000    | 26.00                      | -2.35                   | 23.65                     | 54.00           | -30.35       | AVG      |
| 5    | 2807.5000    | 34.84                      | 1.54                    | 36.38                     | 74.00           | -37.62       | Peak     |
| 6    | 2807.5000    | 23.84                      | 1.54                    | 25.38                     | 54.00           | -28.62       | AVG      |
| 7    | 3265.0000    | 33.45                      | 2.32                    | 35.77                     | 74.00           | -38.23       | Peak     |
| 8    | 3265.0000    | 22.88                      | 2.32                    | 25.20                     | 54.00           | -28.80       | AVG      |
| 9    | 4917.5000    | 31.87                      | 5.91                    | 37.78                     | 74.00           | -36.22       | Peak     |
| 10   | 4917.5000    | 20.58                      | 5.91                    | 26.49                     | 54.00           | -27.51       | AVG      |
| 11   | 5547.5000    | 31.67                      | 8.05                    | 39.72                     | 74.00           | -34.28       | Peak     |
| 12 * | 5547.5000    | 20.54                      | 8.05                    | 28.59                     | 54.00           | -25.41       | AVG      |

|               |                                           |                   |          |
|---------------|-------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3  |
| Temperature   | 25°C                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |          |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |          |
| Test Engineer | Treey Chen                                |                   |          |

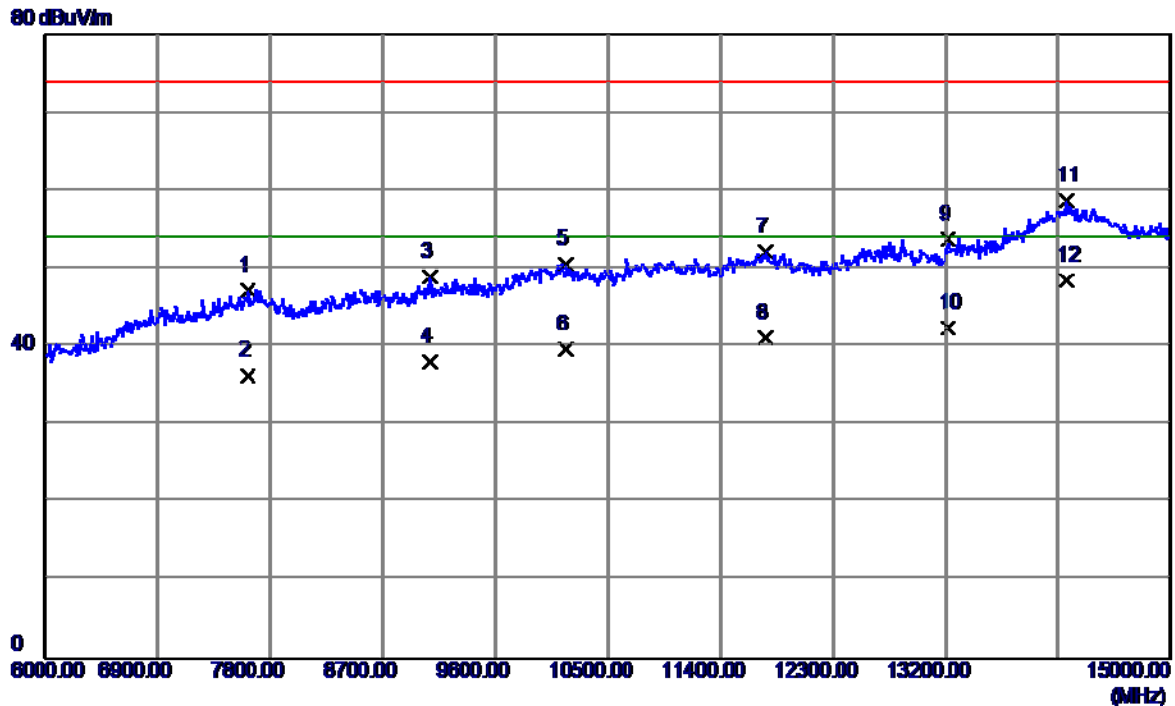

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7620.0000    | 34.55                      | 12.61                   | 47.16                     | 74.00           | -26.84       | Peak     |
| 2    | 7620.0000    | 23.68                      | 12.61                   | 36.29                     | 54.00           | -17.71       | AVG      |
| 3    | 9082.5000    | 34.46                      | 14.53                   | 48.99                     | 74.00           | -25.01       | Peak     |
| 4    | 9082.5000    | 23.54                      | 14.53                   | 38.07                     | 54.00           | -15.93       | AVG      |
| 5    | 10158.0000   | 34.71                      | 15.91                   | 50.62                     | 74.00           | -23.38       | Peak     |
| 6    | 10158.0000   | 23.70                      | 15.91                   | 39.61                     | 54.00           | -14.39       | AVG      |
| 7    | 11764.5000   | 34.51                      | 17.70                   | 52.21                     | 74.00           | -21.79       | Peak     |
| 8    | 11764.5000   | 23.43                      | 17.70                   | 41.13                     | 54.00           | -12.87       | AVG      |
| 9    | 13222.5000   | 34.89                      | 18.91                   | 53.80                     | 74.00           | -20.20       | Peak     |
| 10   | 13222.5000   | 23.47                      | 18.91                   | 42.38                     | 54.00           | -11.62       | AVG      |
| 11   | 14172.0000   | 36.04                      | 22.63                   | 58.67                     | 74.00           | -15.33       | Peak     |
| 12 * | 14172.0000   | 25.83                      | 22.63                   | 48.46                     | 54.00           | -5.54        | AVG      |

|               |                                           |                   |            |
|---------------|-------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                               | Model Name        | WAS-LX3    |
| Temperature   | 25°C                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                              | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(WCDMA)                    |                   |            |
| Note          | Adapter:BYD+USB COPY:LX+BATTERY:DESAY(LG) |                   |            |
| Test Engineer | Treey Chen                                |                   |            |

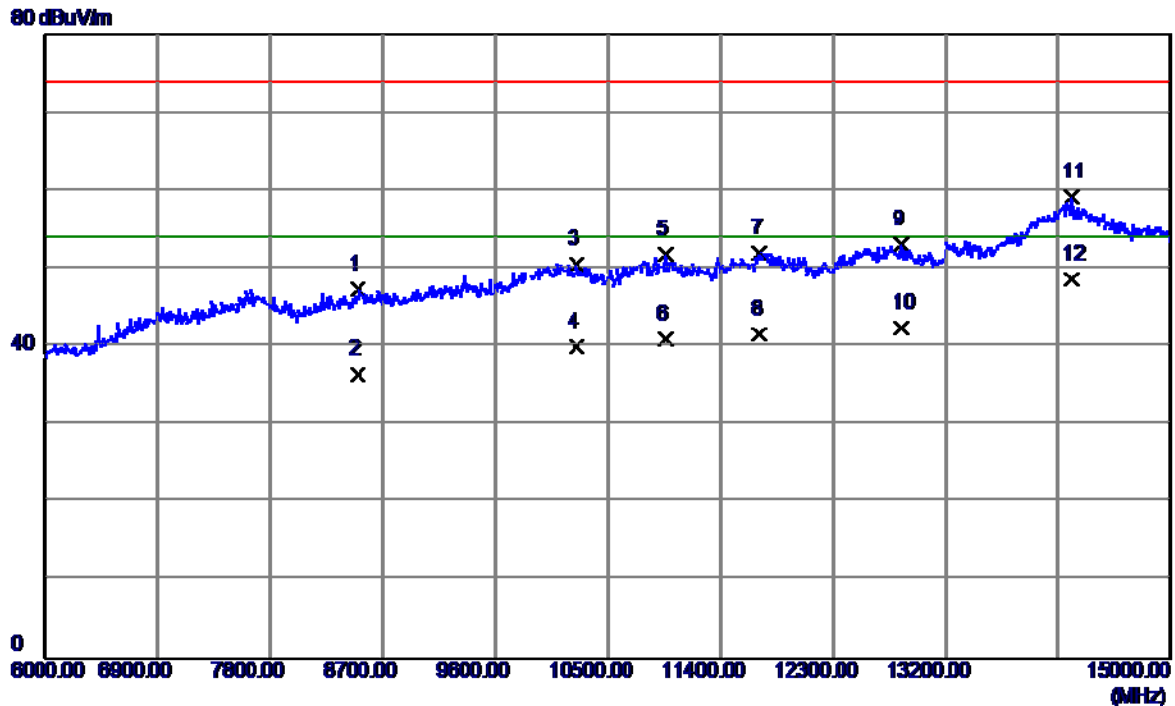

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 8502.0000    | 34.05                      | 13.38                   | 47.43                     | 74.00           | -26.57       | Peak     |
| 2    | 8502.0000    | 23.08                      | 13.38                   | 36.46                     | 54.00           | -17.54       | AVG      |
| 3    | 10252.5000   | 34.45                      | 16.12                   | 50.57                     | 74.00           | -23.43       | Peak     |
| 4    | 10252.5000   | 23.81                      | 16.12                   | 39.93                     | 54.00           | -14.07       | AVG      |
| 5    | 10959.0000   | 34.72                      | 17.14                   | 51.86                     | 74.00           | -22.14       | Peak     |
| 6    | 10959.0000   | 23.89                      | 17.14                   | 41.03                     | 54.00           | -12.97       | AVG      |
| 7    | 11715.0000   | 34.21                      | 17.74                   | 51.95                     | 74.00           | -22.05       | Peak     |
| 8    | 11715.0000   | 23.83                      | 17.74                   | 41.57                     | 54.00           | -12.43       | AVG      |
| 9    | 12849.0000   | 34.55                      | 18.59                   | 53.14                     | 74.00           | -20.86       | Peak     |
| 10   | 12849.0000   | 23.84                      | 18.59                   | 42.43                     | 54.00           | -11.57       | AVG      |
| 11   | 14208.0000   | 36.48                      | 22.66                   | 59.14                     | 74.00           | -14.86       | Peak     |
| 12 * | 14208.0000   | 25.94                      | 22.66                   | 48.60                     | 54.00           | -5.40        | AVG      |