


Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 32.27 dBm VBW 3 MHz
36 dBm 824.04969940 MHz SWT 5 ms Unit dBm

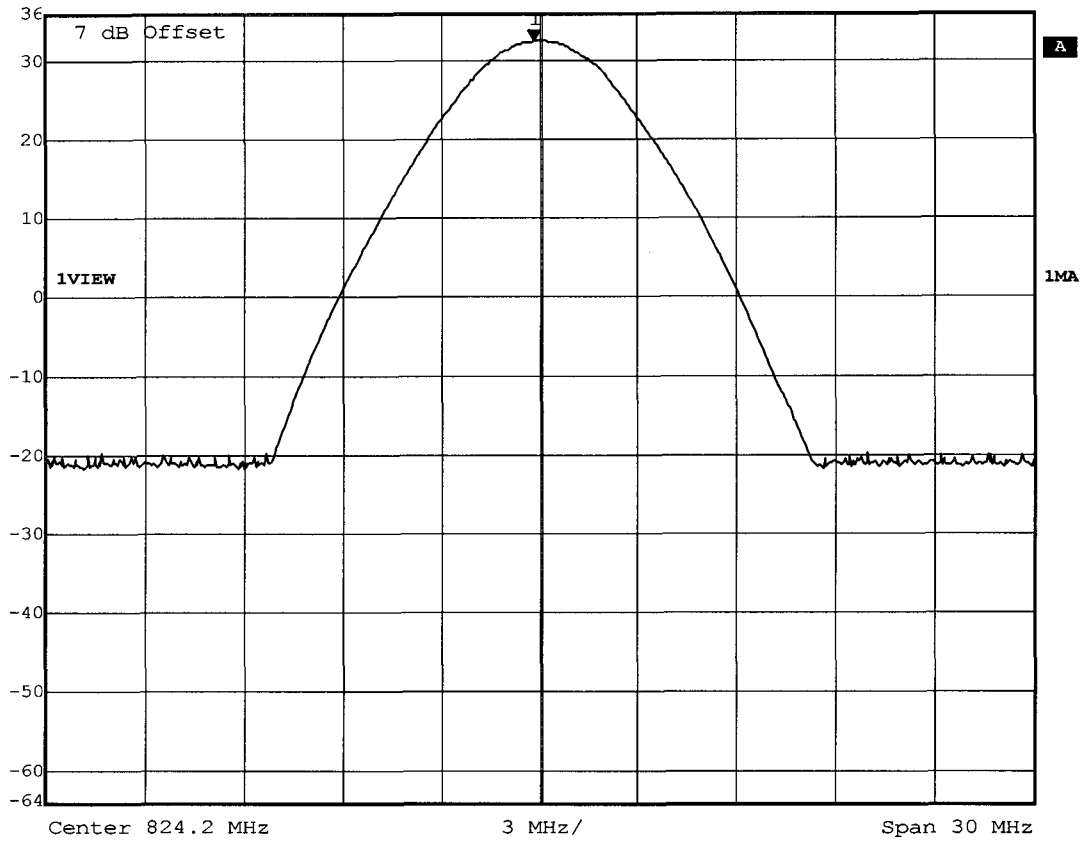

Title: Output power conducted / Channel: 128
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 06:25:52




Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
36 dBm	32.22 dBm	VBW	3 MHz		
	836.29018036 MHz	SWT	5 ms	Unit	dBm

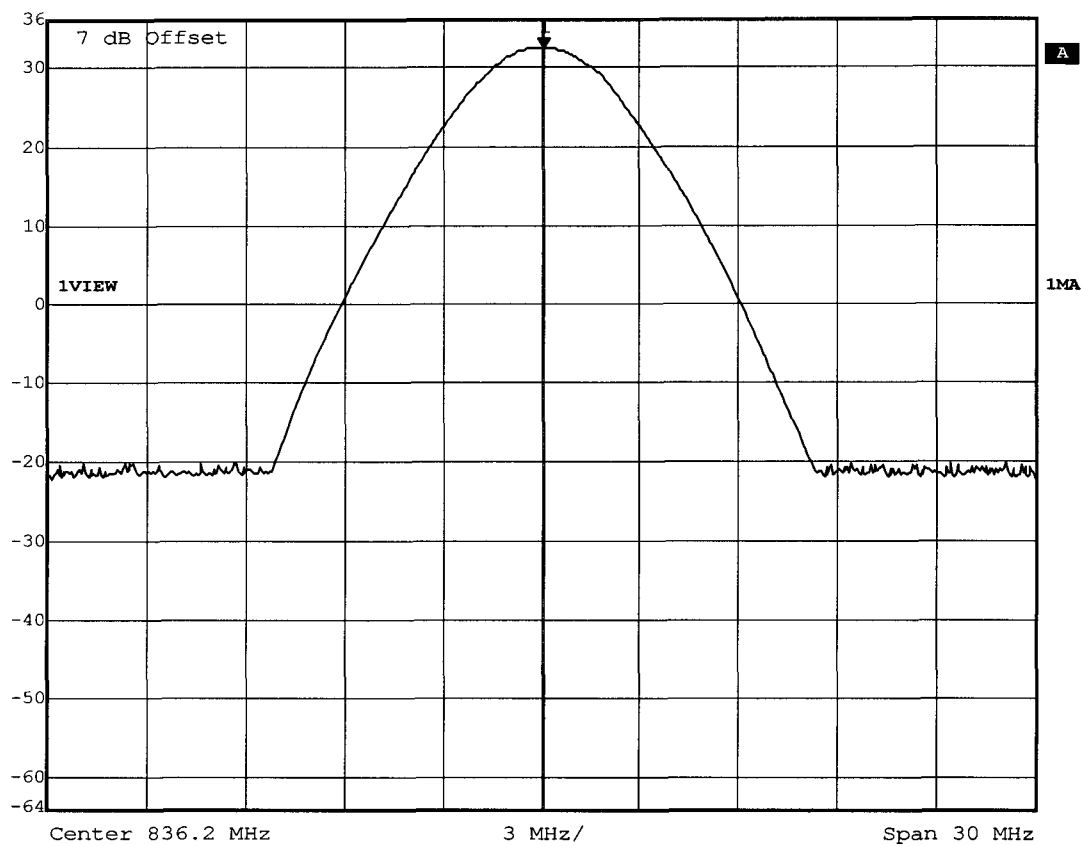

Title: Output power conducted / Channel: 188
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 06:30:23




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 32.13 dBm VBW 3 MHz
36 dBm 848.70981964 MHz SWT 5 ms Unit dBm

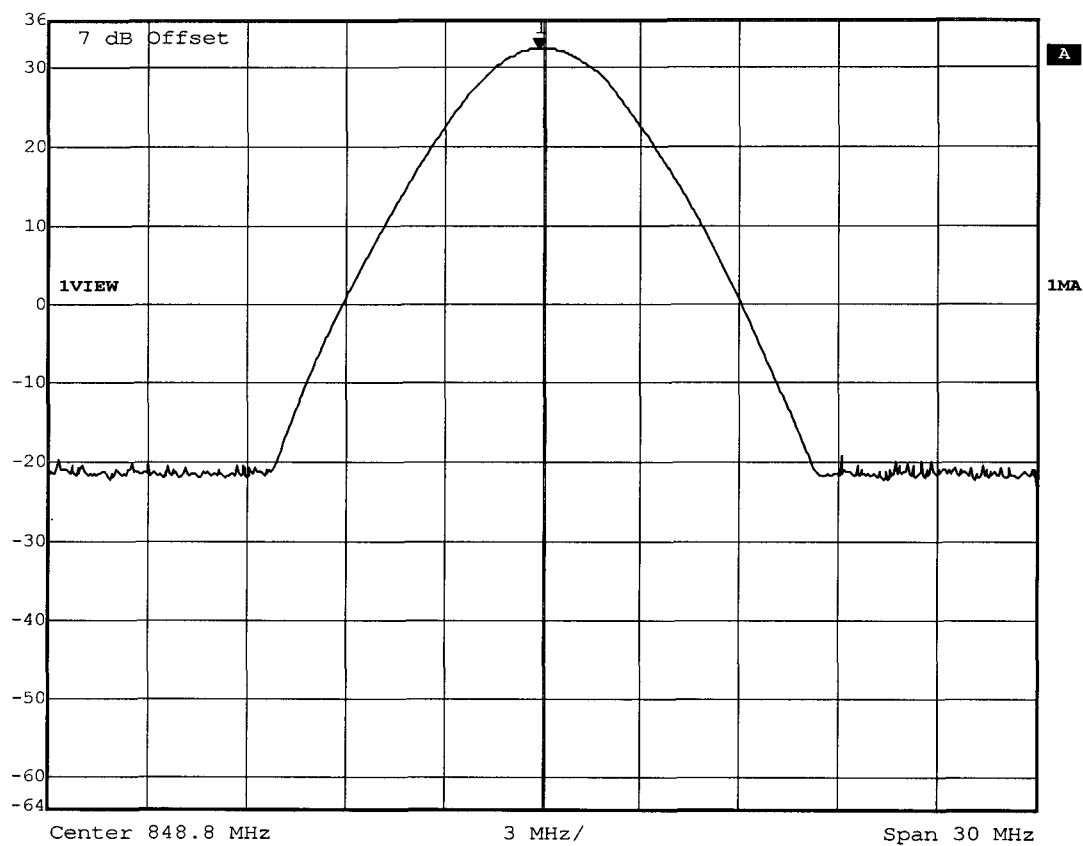

Title: Output power conducted / Channel: 251
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 06:35:04




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 29.21 dBm VBW 3 MHz
36 dBm 1.85023006 GHz SWT 5 ms Unit dBm

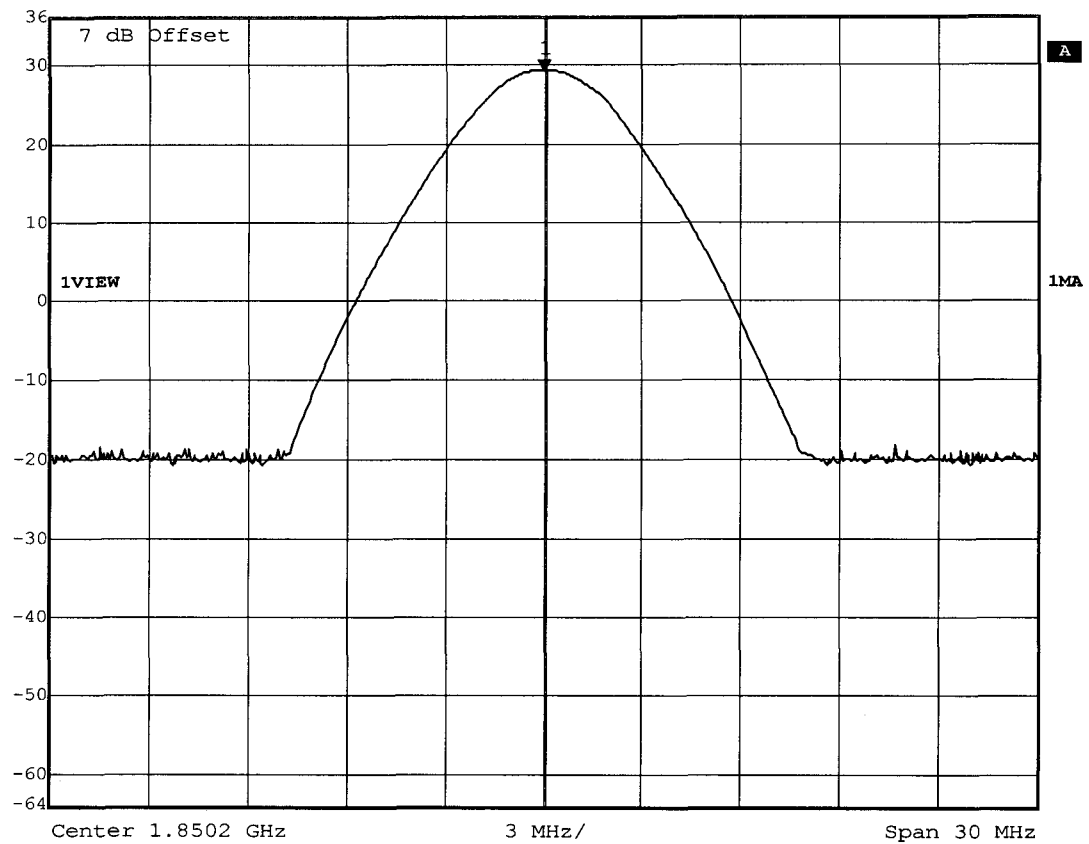

Title: Output power conducted / Channel: 512
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:36:04



Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 28.90 dBm VBW 3 MHz
36 dBm 1.88003006 GHz SWT 5 ms Unit dBm

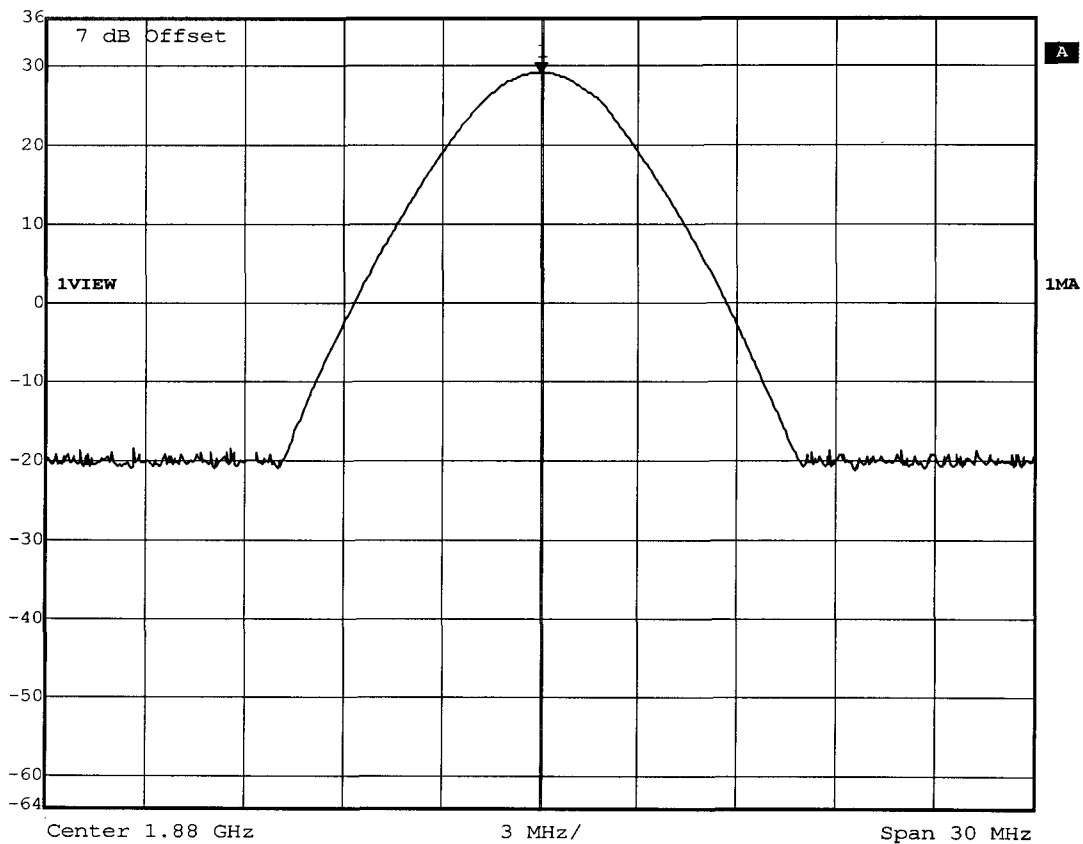


Title: Output power conducted / Channel: 661
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:37:00

Appendix C

ERP, EIRP


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.361MHz, Pmax: 17.01dBm, RBW: 3MHz

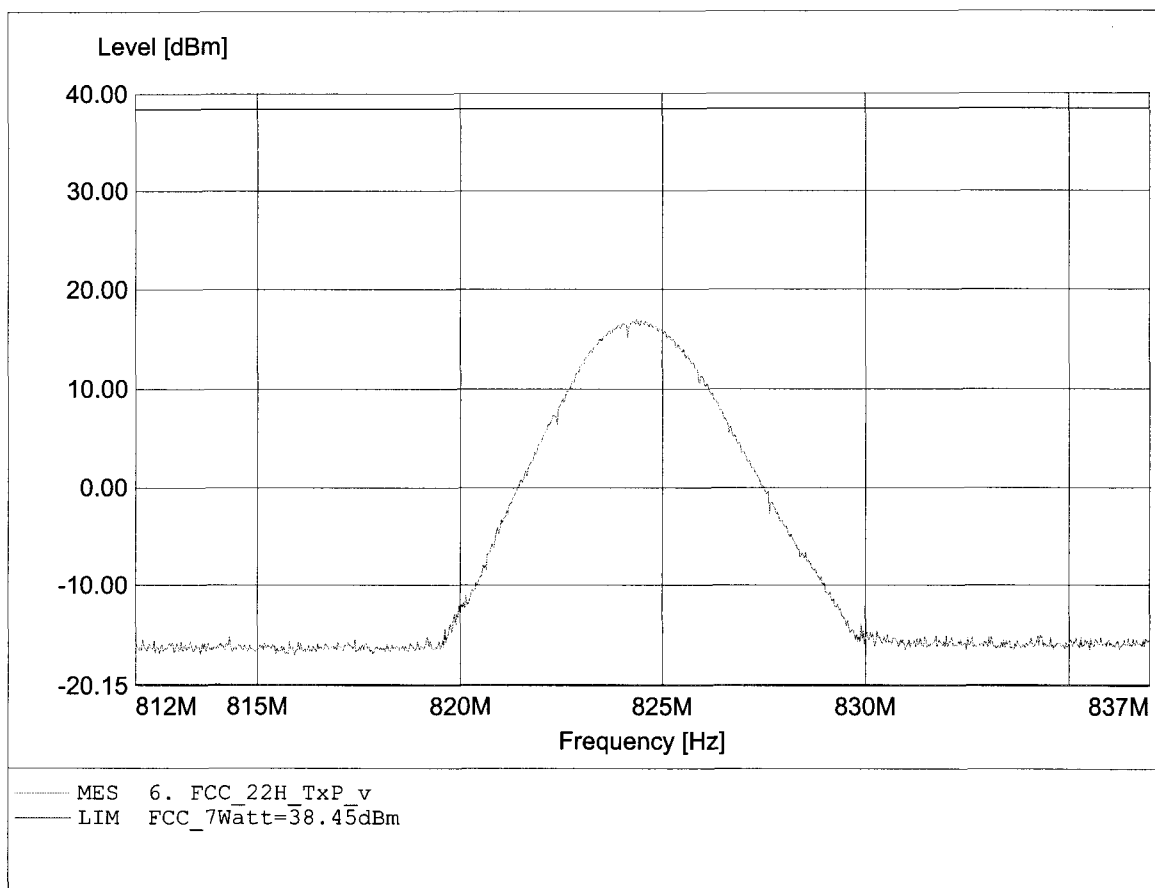


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.250MHz, Pmax: 26.79dBm, RBW: 3MHz

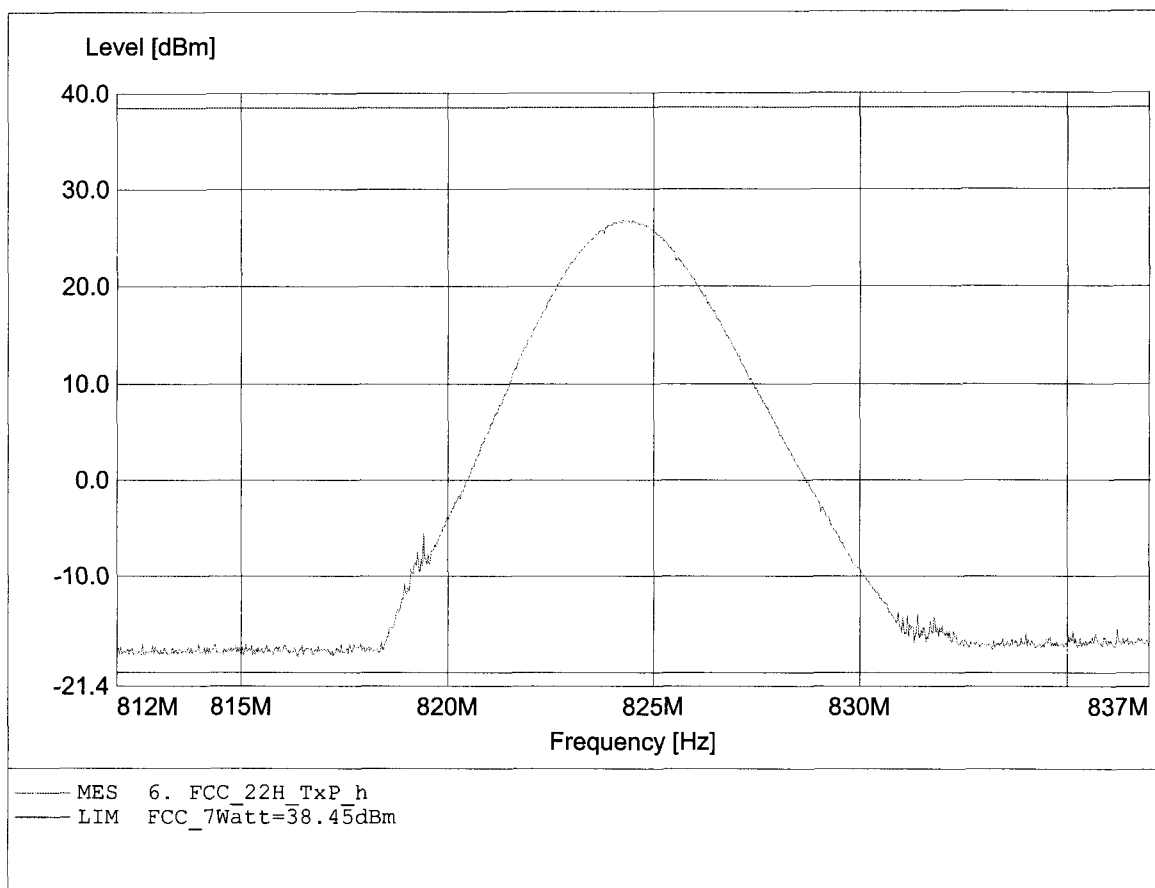


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.347MHz, Pmax: 16.59dBm, RBW: 3MHz

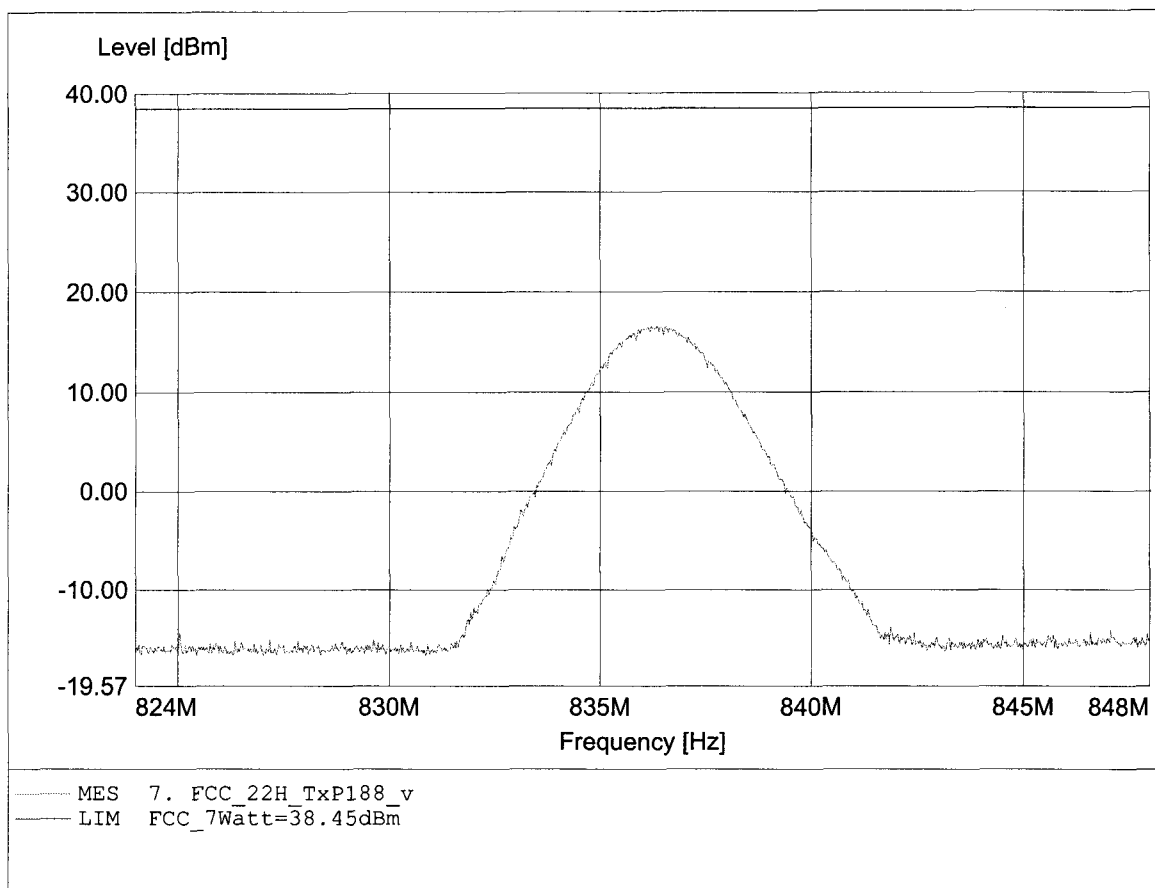


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.453MHz, Pmax: 27.39dBm, RBW: 3MHz

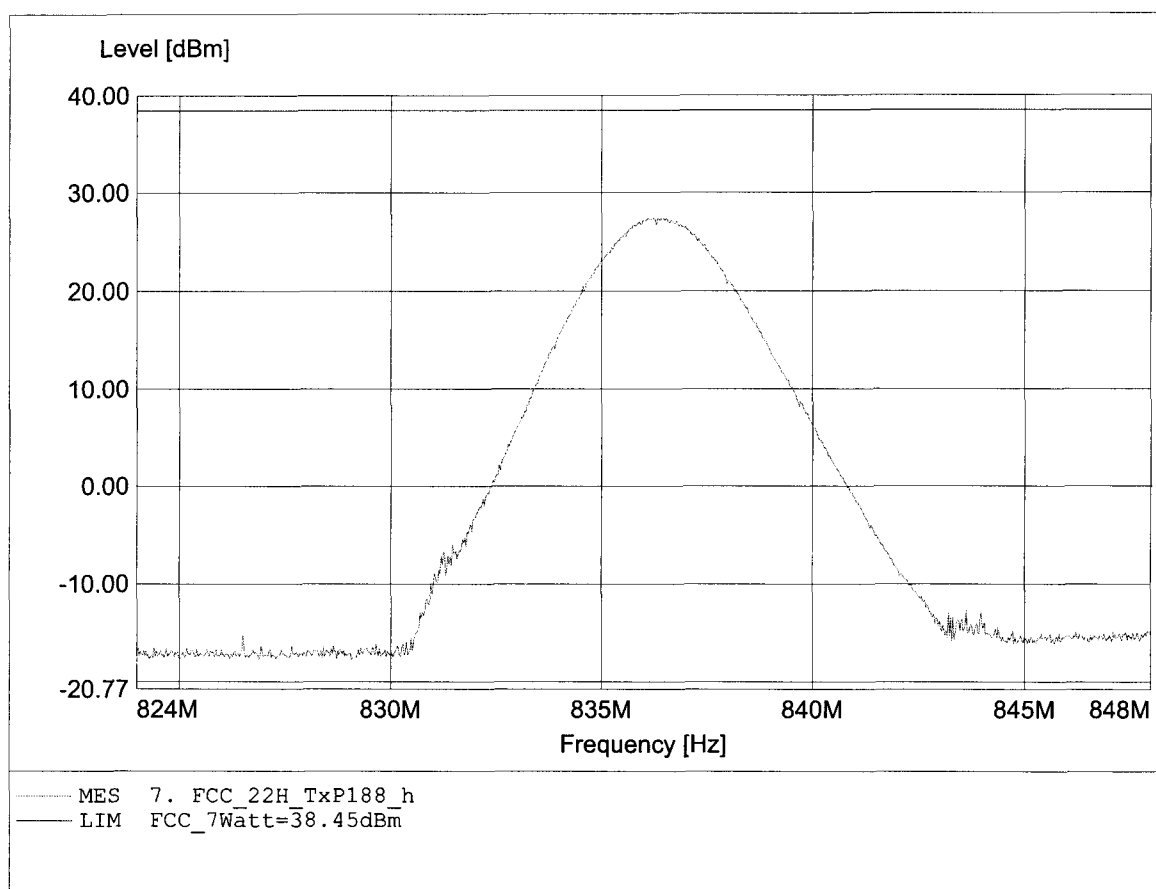


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 849.027MHz, Pmax: 14.99dBm, RBW: 3MHz

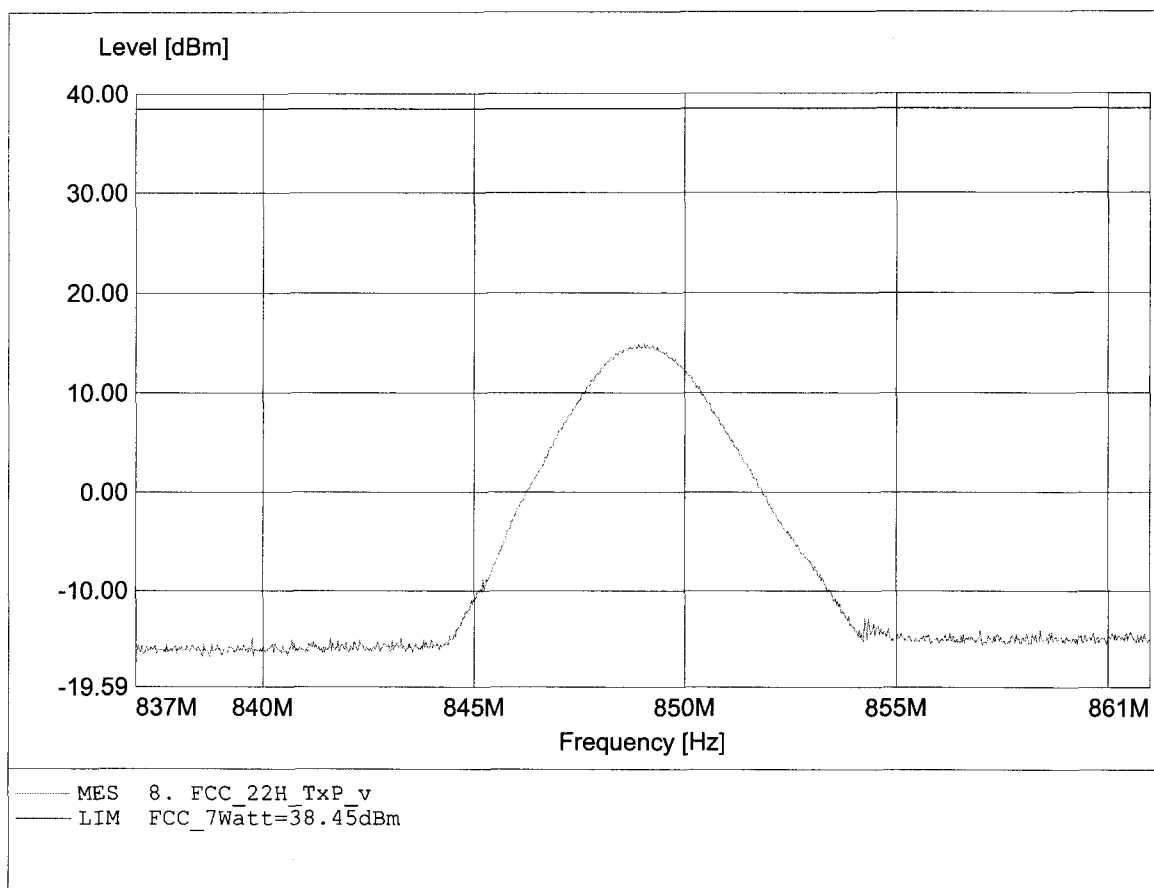


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 849.027MHz, Pmax: 28.42dBm, RBW: 3MHz

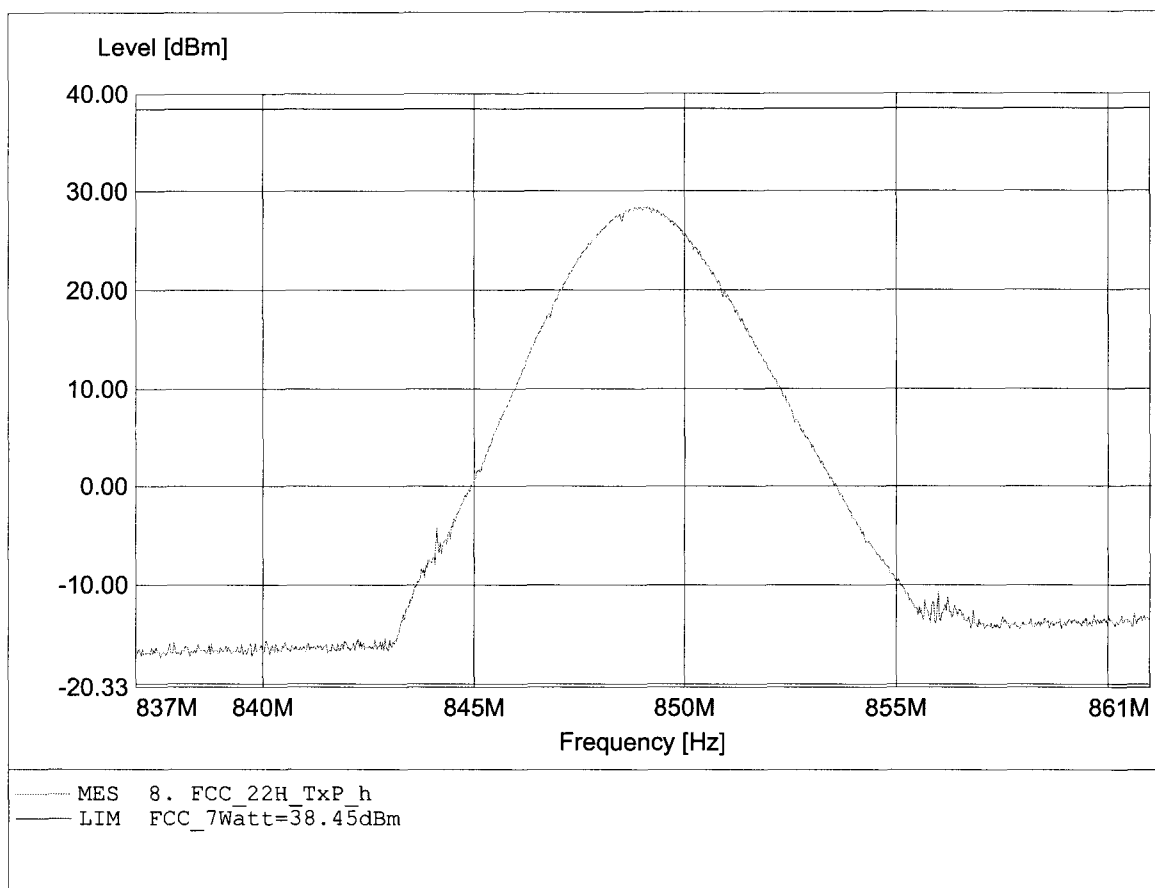


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 28.93dBm, RBW: 3MHz

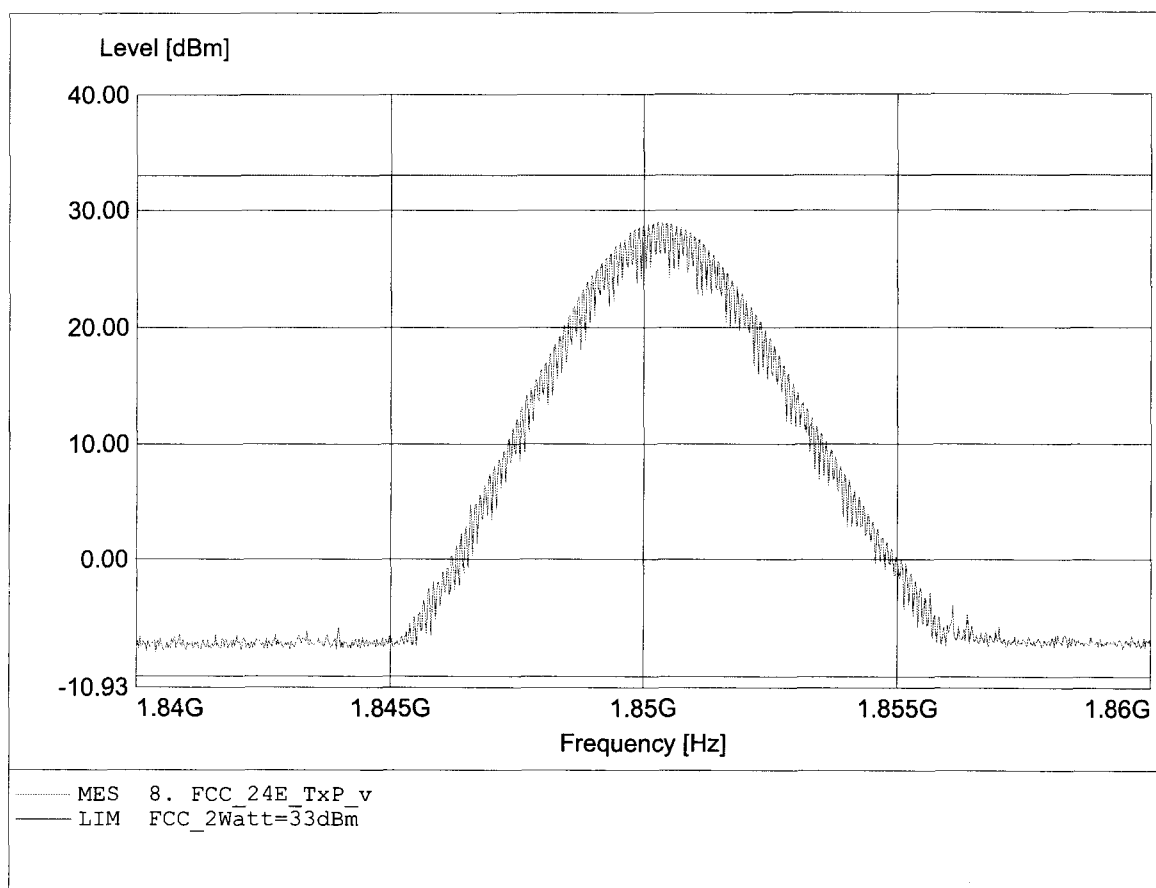


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 32.95dBm, RBW: 3MHz

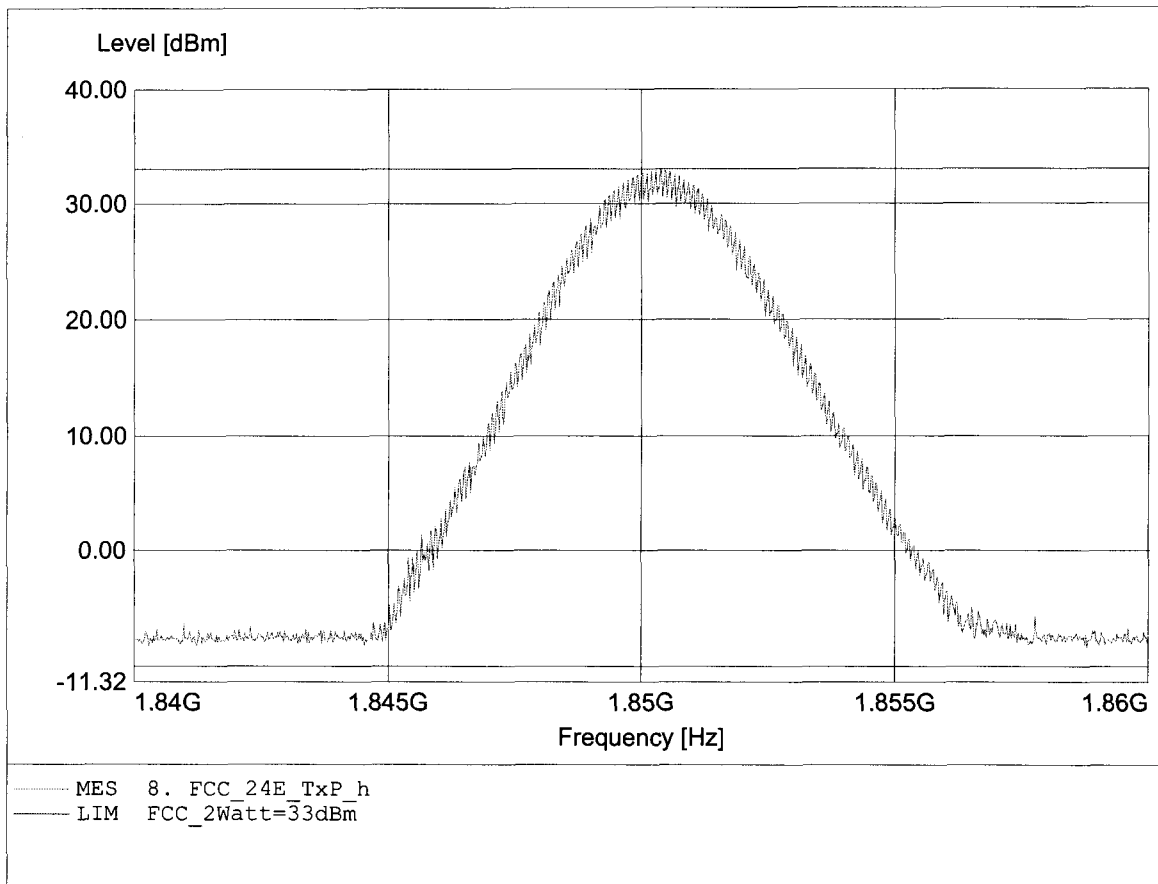


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 27.04dBm, RBW: 3MHz

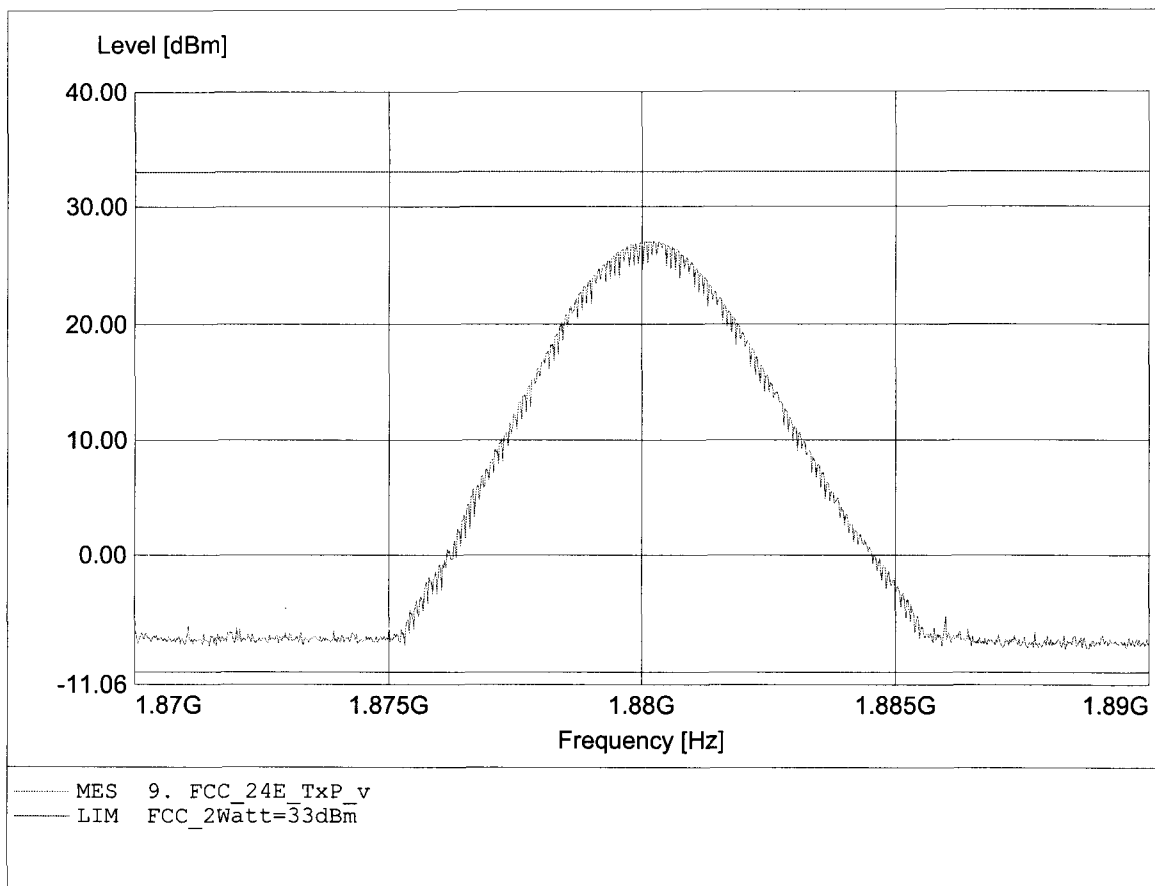


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 31.26dBm, RBW: 3MHz

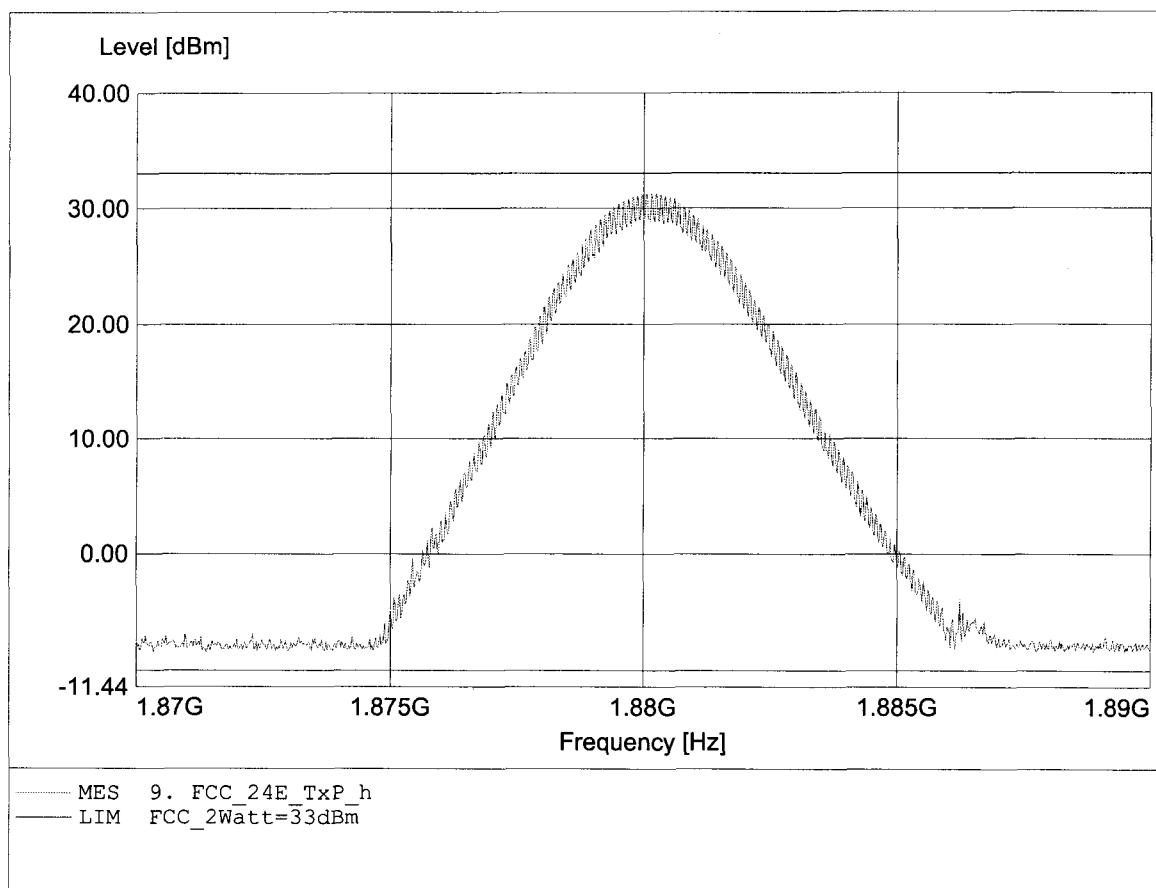


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 25.58dBm, RBW: 3MHz

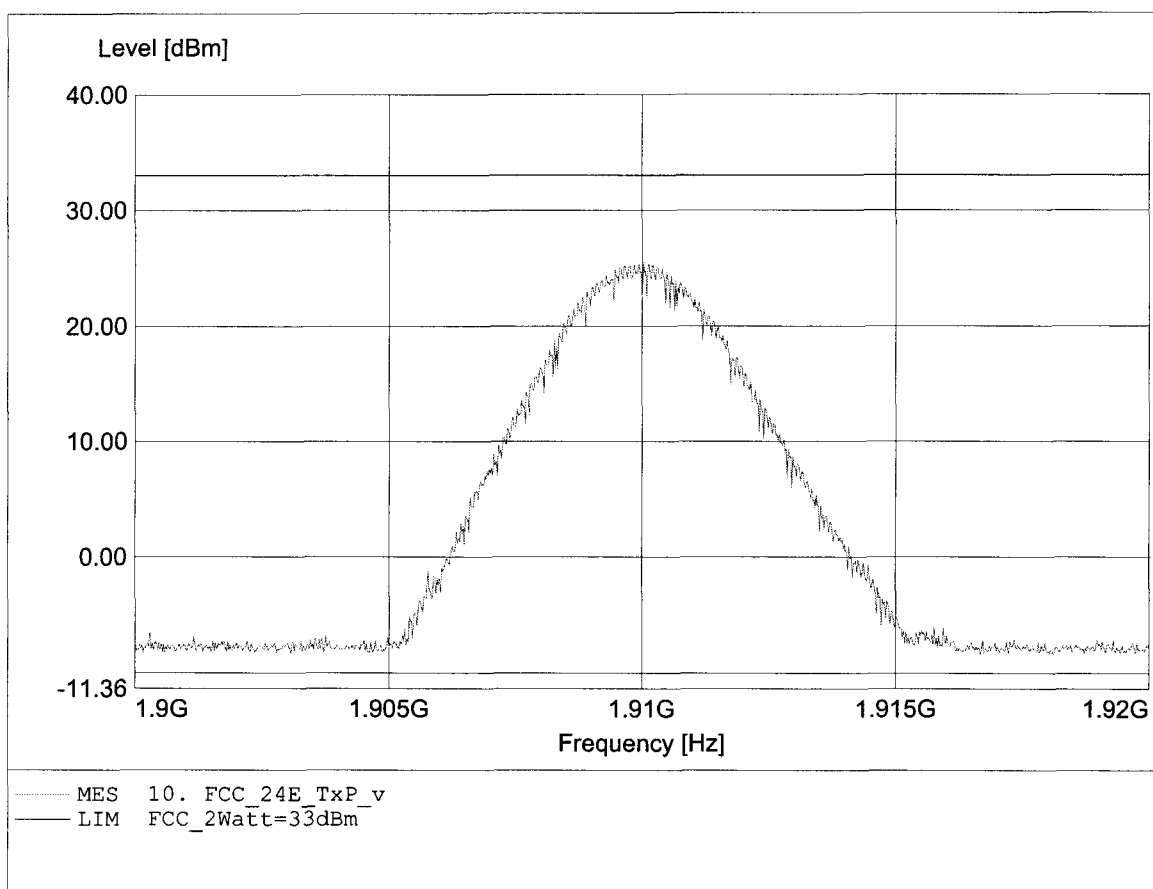

**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 31.93dBm, RBW: 3MHz

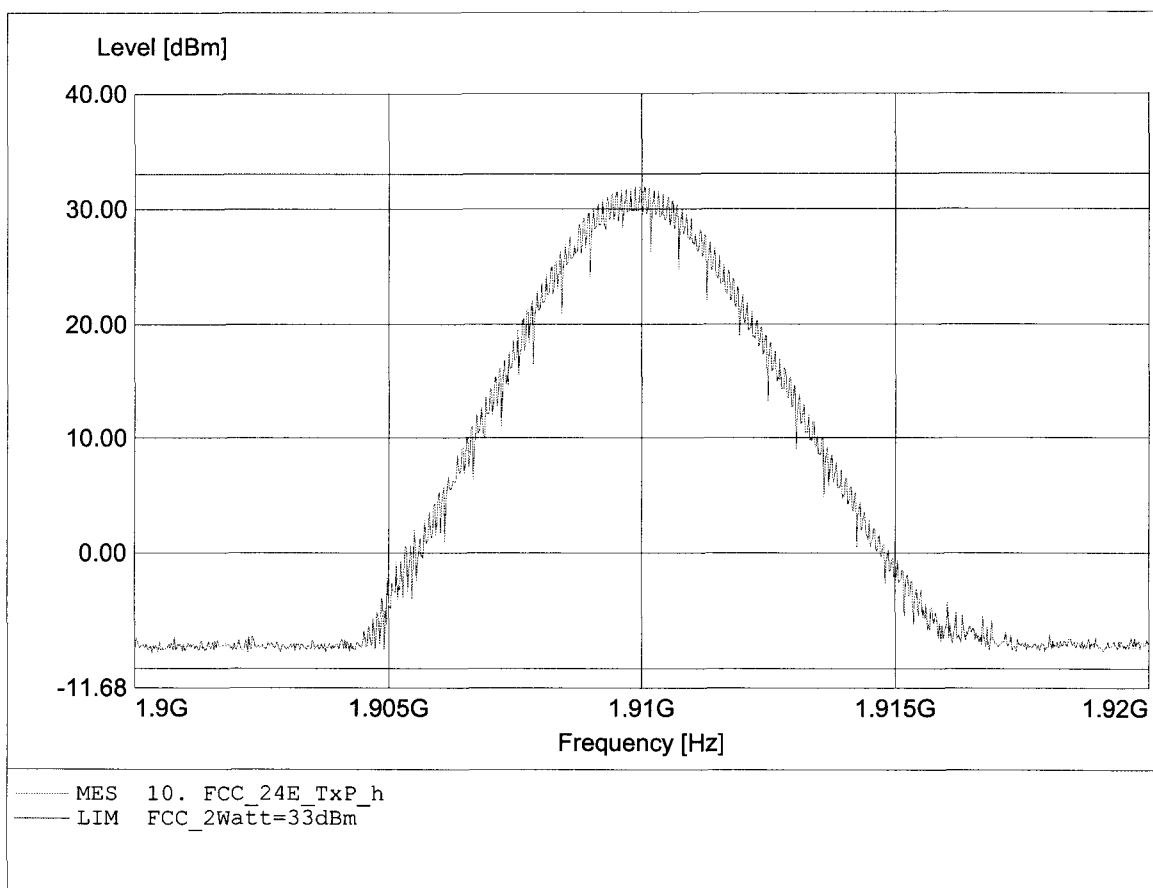

Appendix D

Modulation Requirements

Appendix E

Audio Filter Characteristics

Appendix F


Emission Limitation

Appendix G

Occupied Bandwidth




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 24.80 dBm VBW 3 kHz
36 dBm 824.18296593 MHz SWT 280 ms Unit dBm

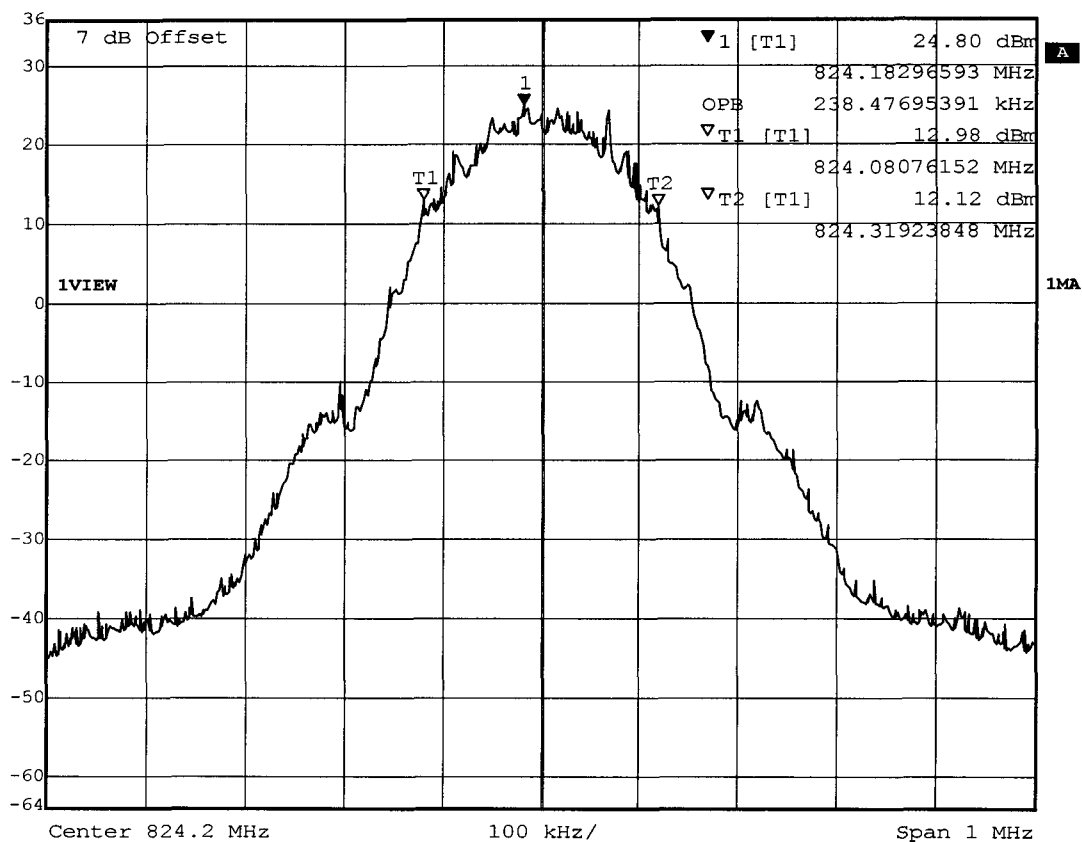

Title: Occupied Bandwidth / Channel: 128
Comment A: Falcom GbmH / Samba 75
Date: 30.AUG.2005 07:05:42




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 23.63 dBm VBW 3 kHz
36 dBm 836.21503006 MHz SWT 280 ms Unit dBm

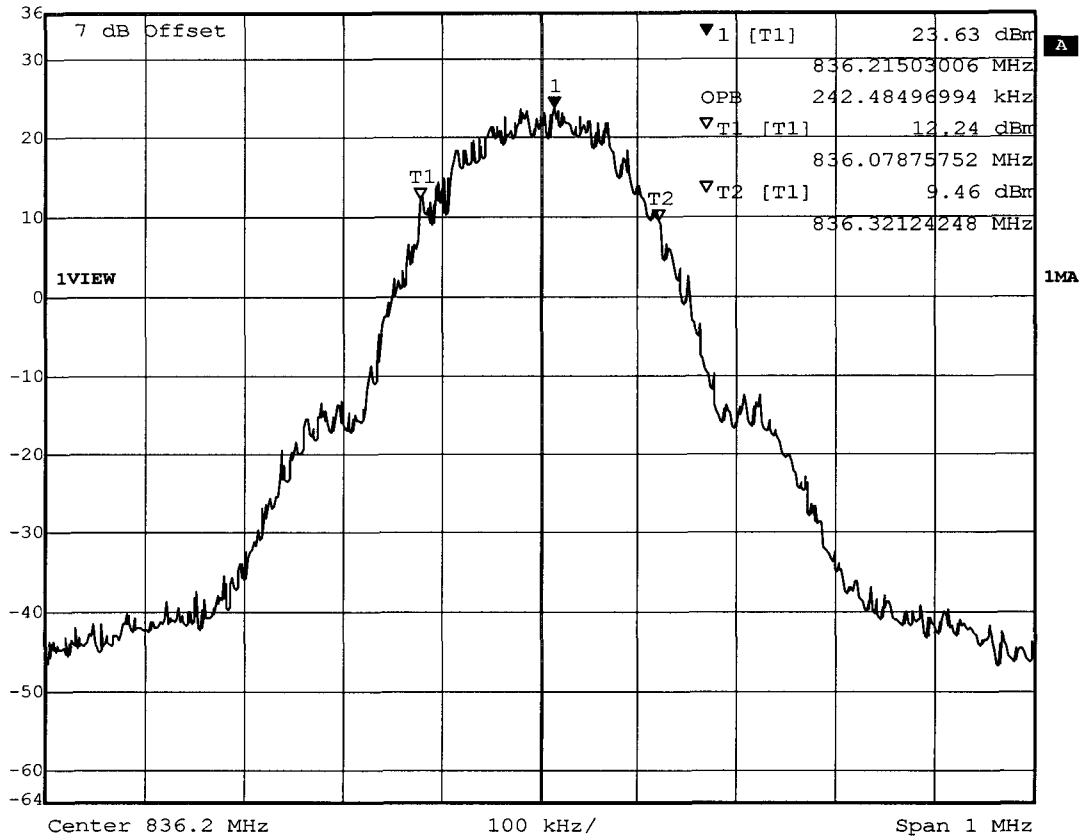

Title: Occupied Bandwidth / Channel: 188
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:08:54




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 24.57 dBm VBW 3 kHz
36 dBm 848.81903808 MHz SWT 280 ms Unit dBm

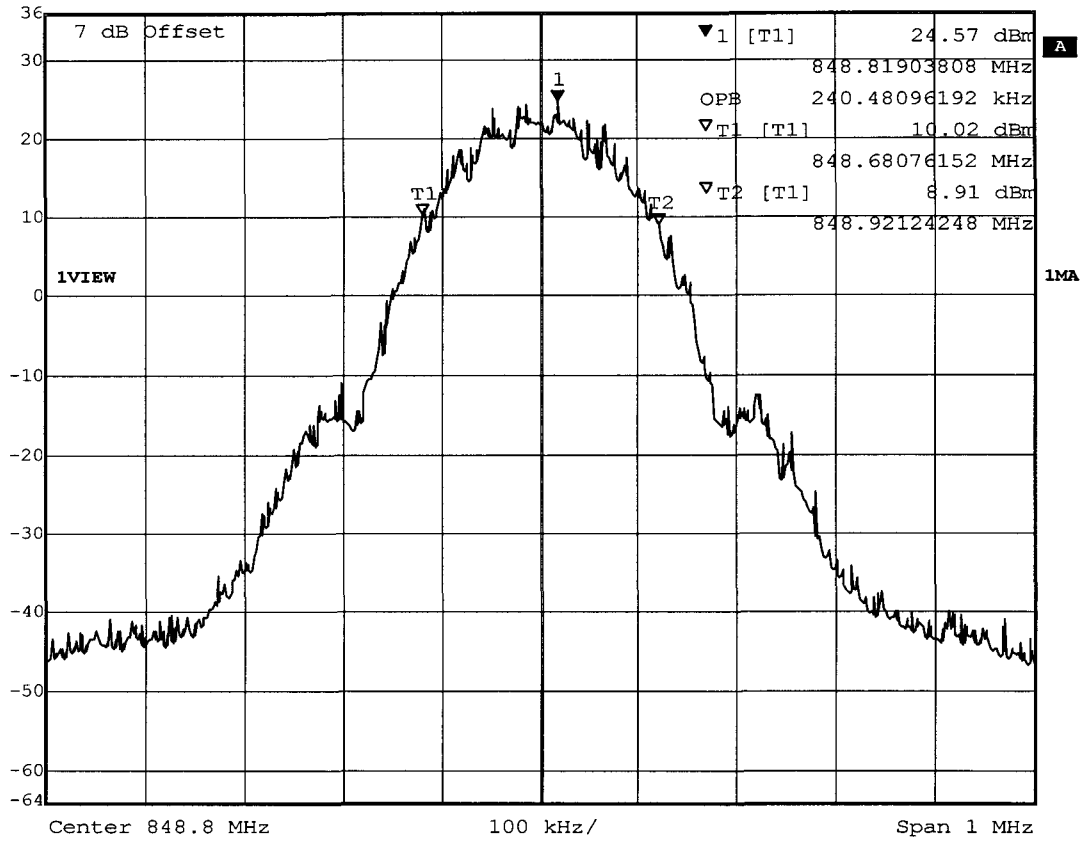

Title: Occupied Bandwidth / Channel: 251
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:10:53




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 300.60120240 kHz SWT 280 ms Unit dBm

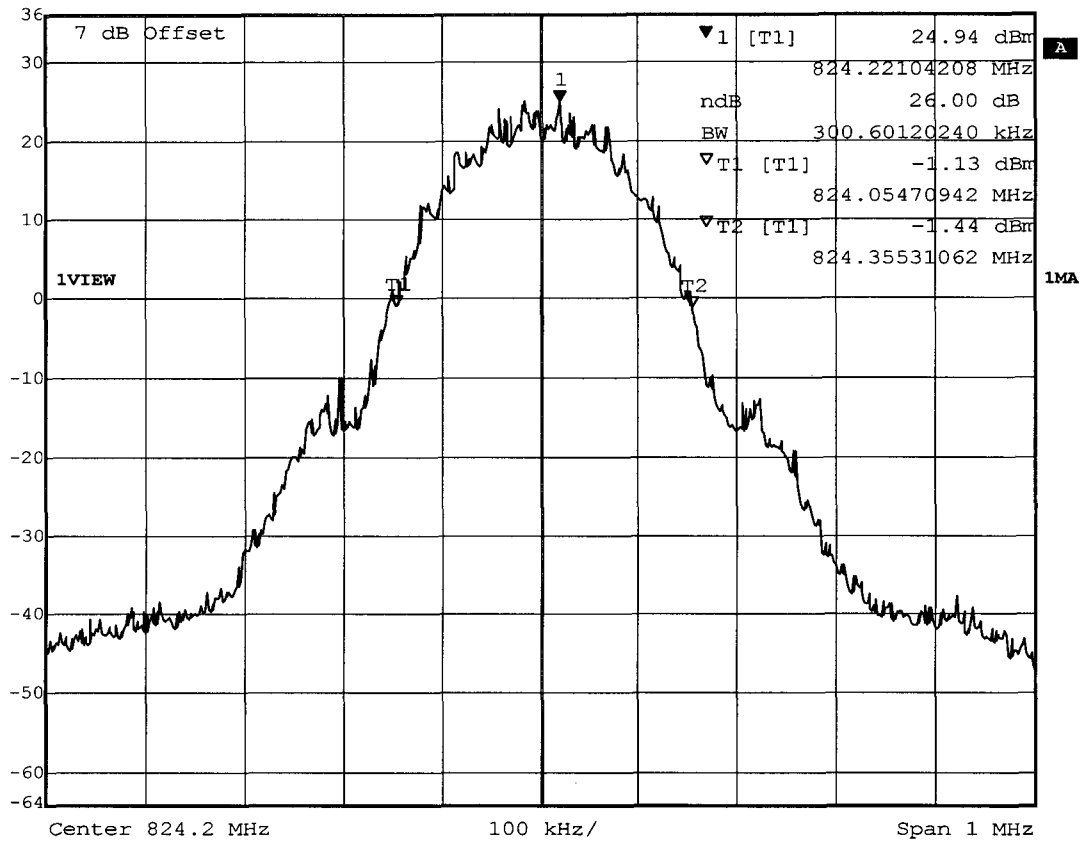

Title: Emission Bandwidth (-26 dB) / Channel: 128
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:20:28




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 310.62124248 kHz SWT 280 ms Unit dBm

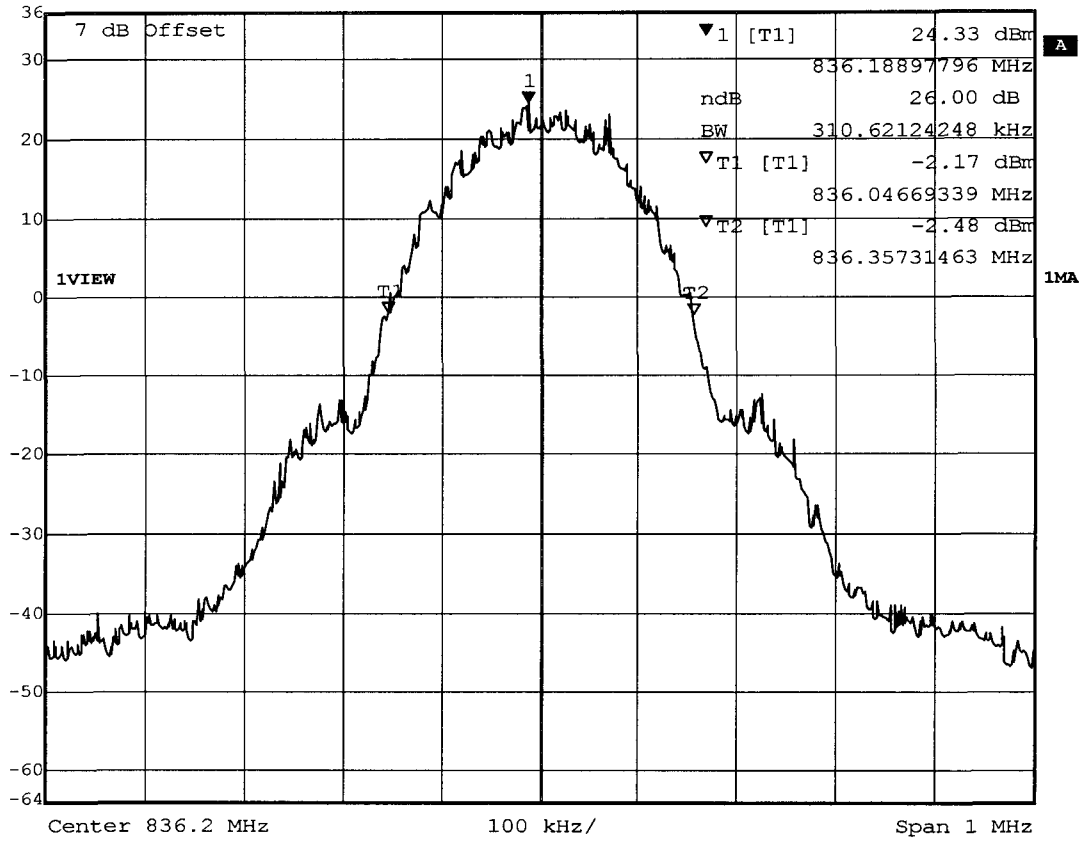

Title: Emission Bandwidth (-26 dB) / Channel: 188
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:23:28




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 310.62124248 kHz SWT 280 ms Unit dBm

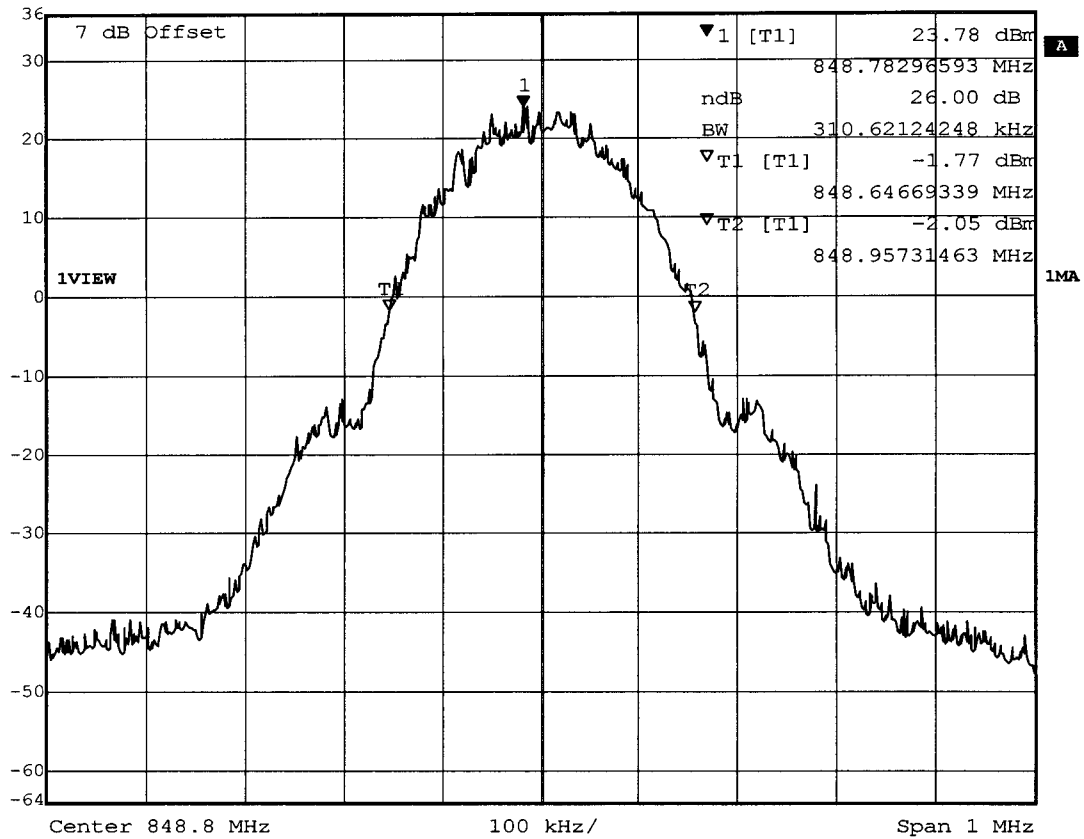

Title: Emission Bandwidth (-26 dB) / Channel: 251
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:25:25




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 21.76 dBm VBW 3 kHz
36 dBm 1.85021904 GHz SWT 280 ms Unit dBm

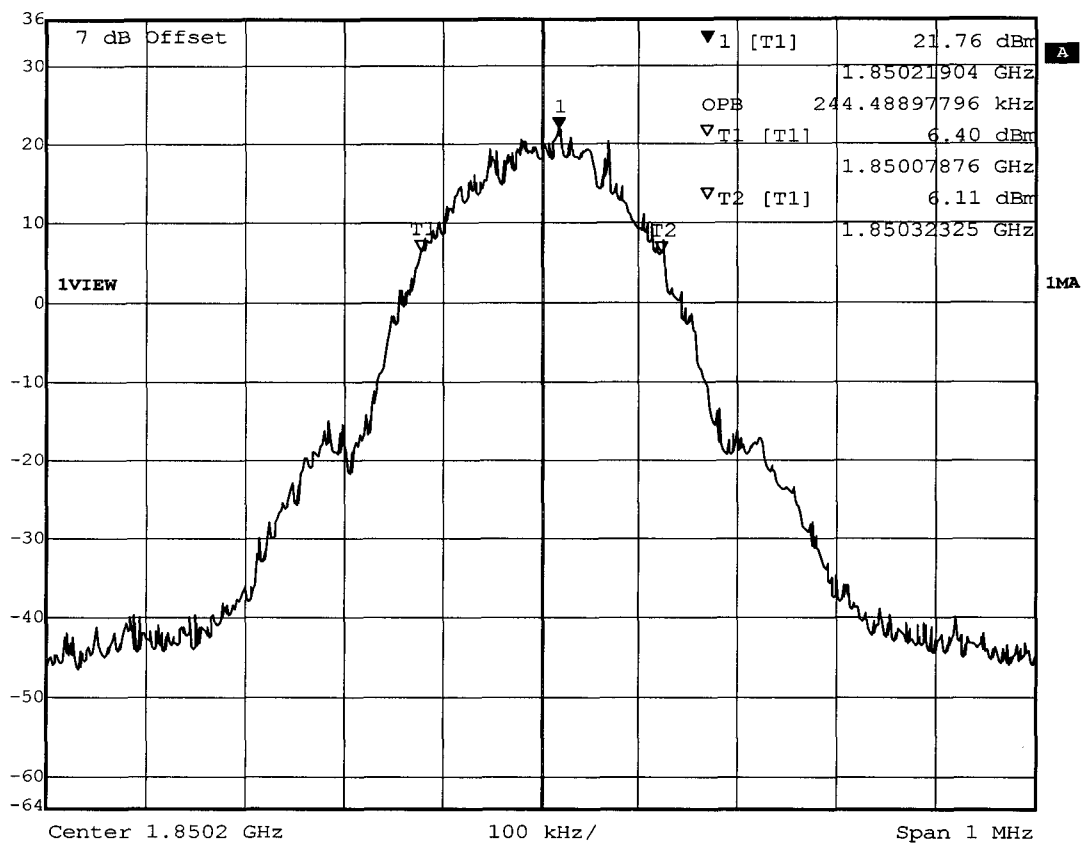

Title: Occupied Bandwidth \ Channel: 512
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:55:41




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 21.02 dBm VBW 3 kHz
36 dBm 1.88001904 GHz SWT 280 ms Unit dBm

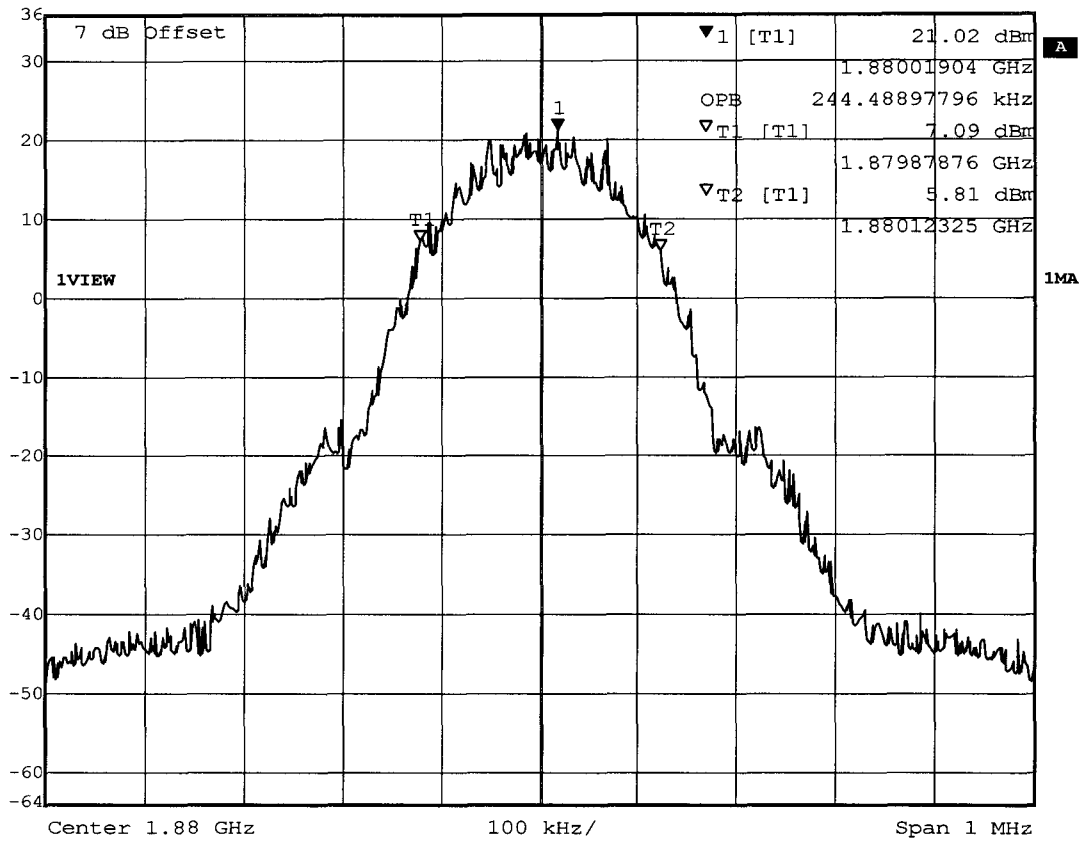

Title: Occupied Bandwidth / Channel: 661
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:57:27




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 20.63 dBm VBW 3 kHz
36 dBm 1.90978697 GHz SWT 280 ms Unit dBm

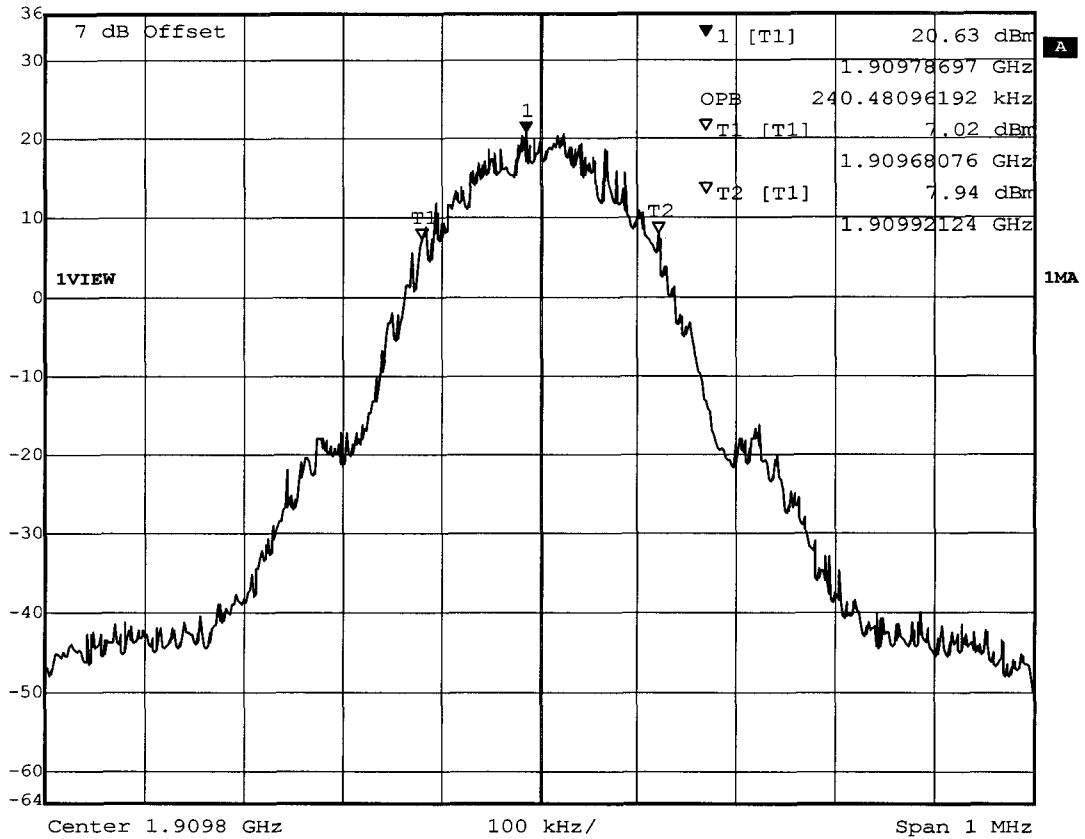

Title: Occupied Bandwidth / Channel: 810
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 08:16:45




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

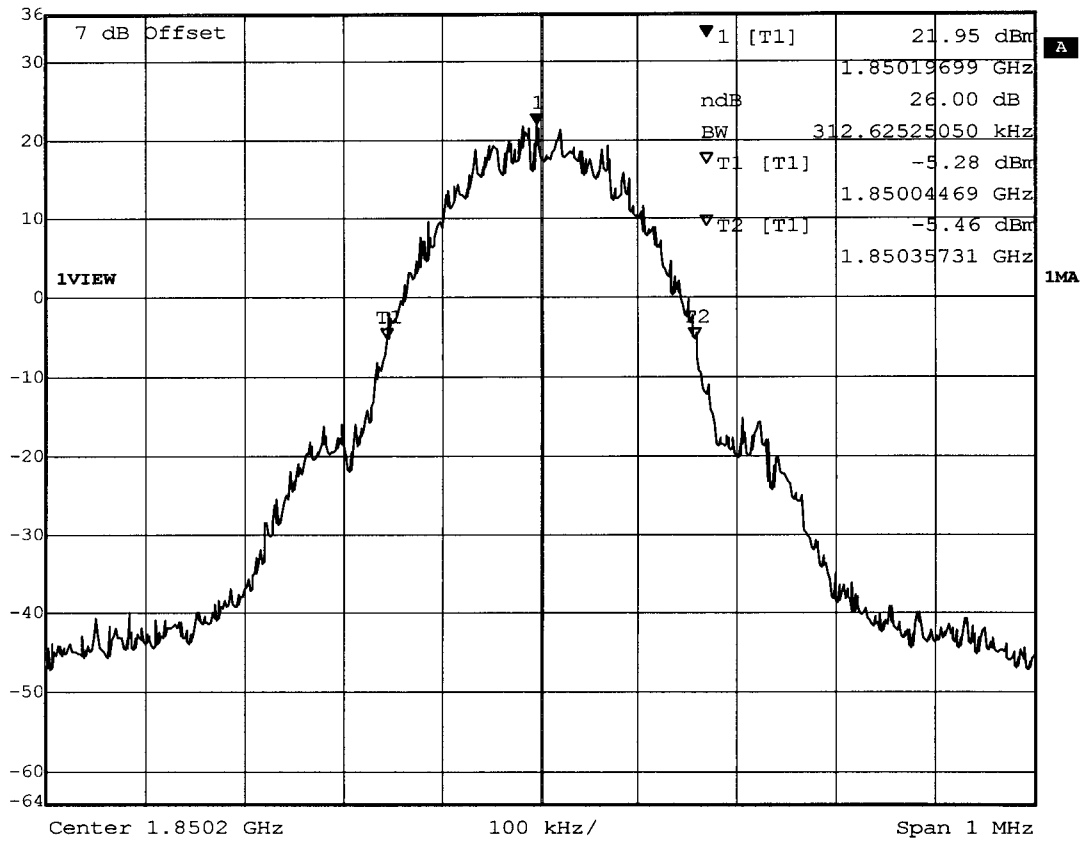

Title: Emission Bandwidth (-26 dB) / Channel: 512
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 08:21:28




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 310.62124249 kHz SWT 280 ms Unit dBm

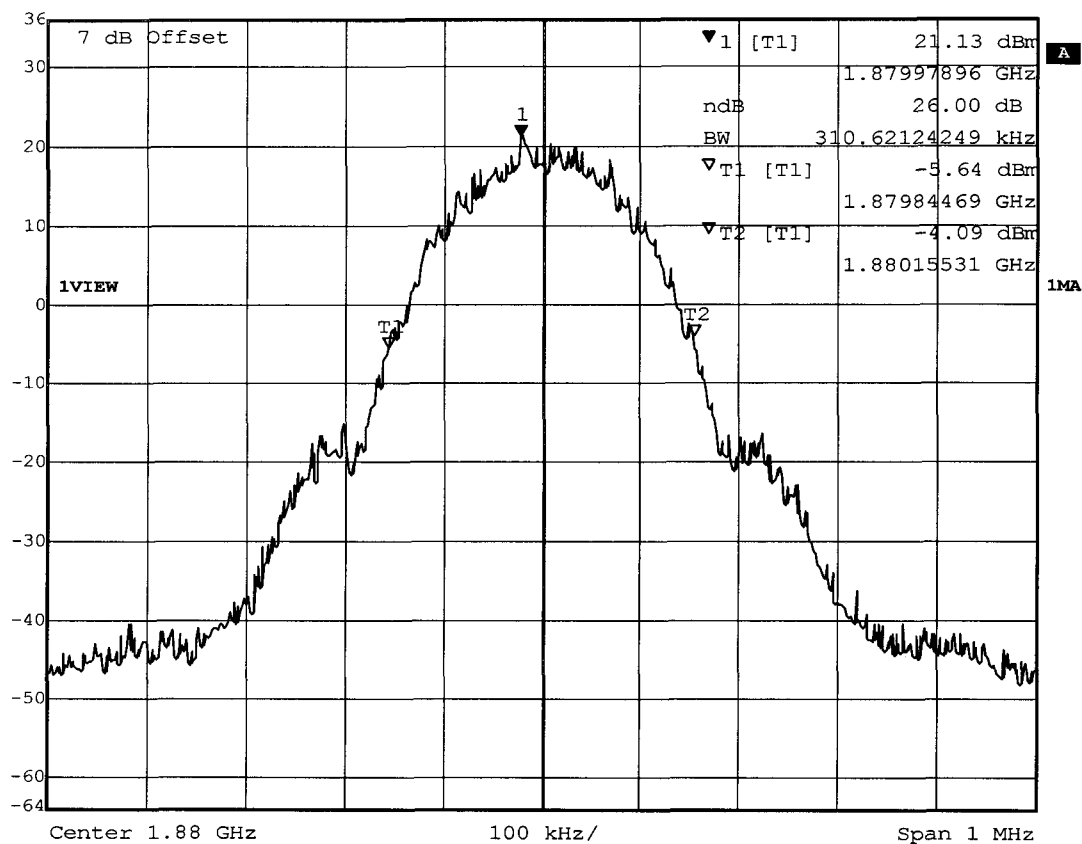

Title: Emission Bandwidth (-26 dB) / Channel: 661
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 08:23:04



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

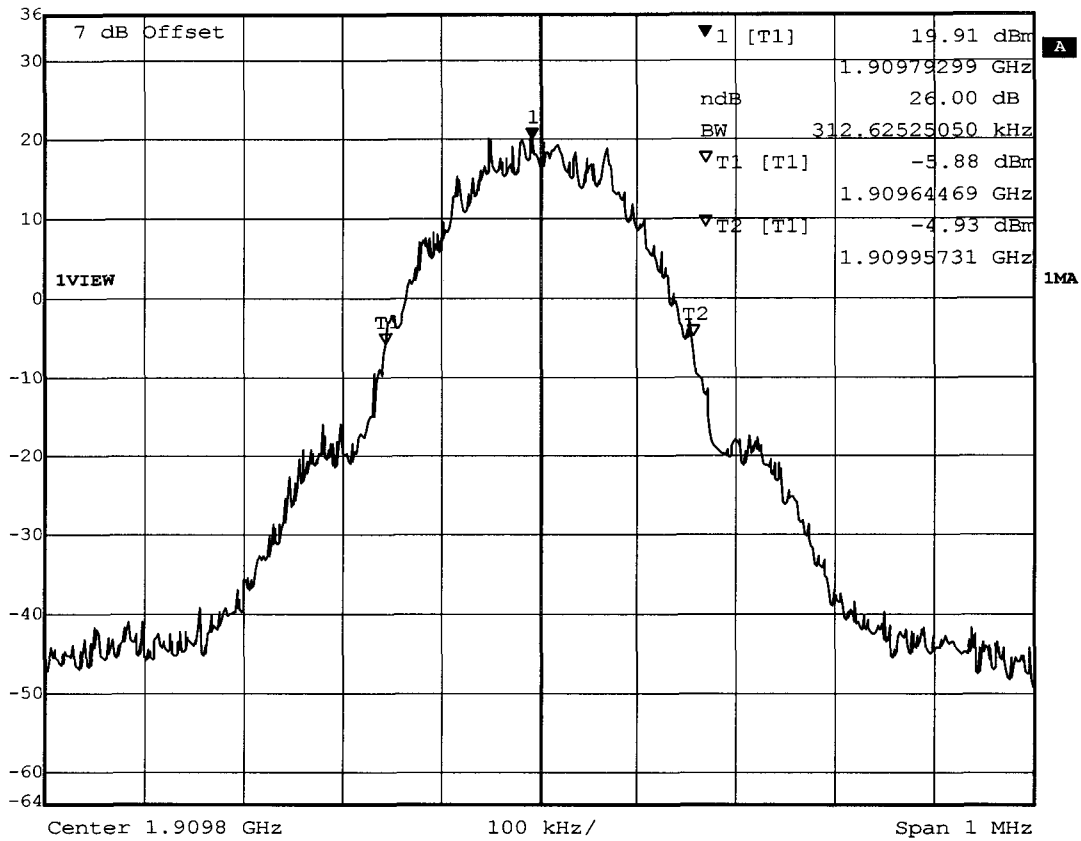

Title: Emission Bandwidth (-26 dB) / Channel: 810
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 08:24:29

Appendix H


Out of Band Emission at Antenna Terminals Mobile Emissions In Base
Frequency Range

Appendix I

Spurious Radiation


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 182.244MHz, Pmax: -51.24dBm, RBW: 1MHz

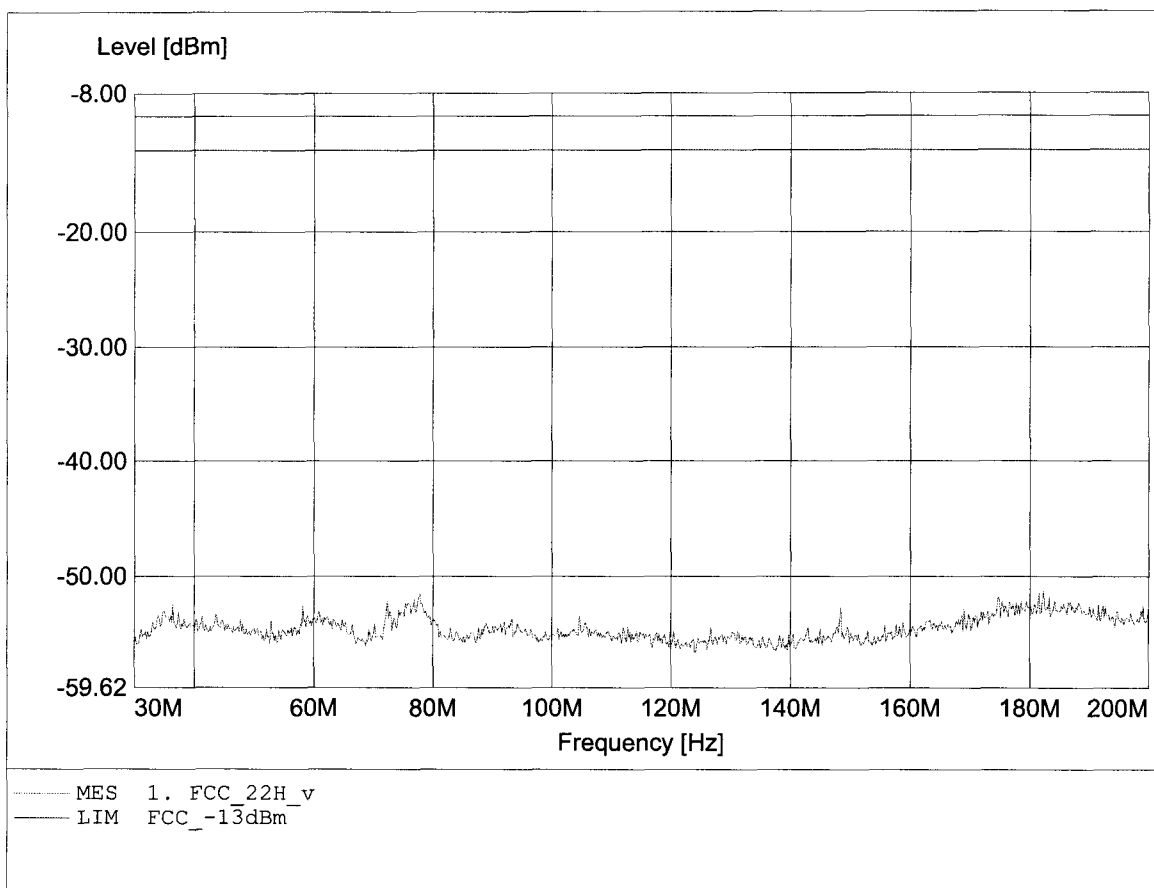


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 45.867MHz, Pmax: -50.81dBm, RBW: 1MHz

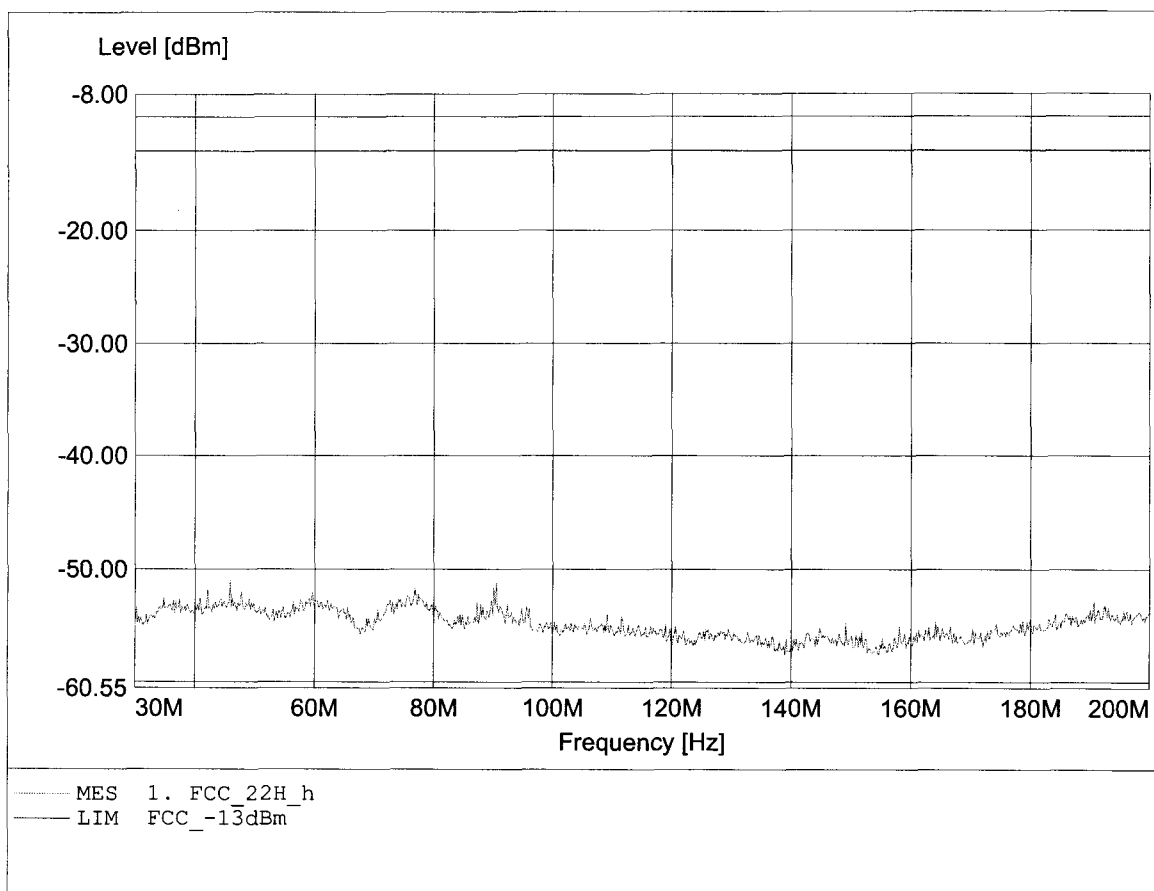


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.978MHz, Pmax: -33.30dBm, RBW: 1MHz

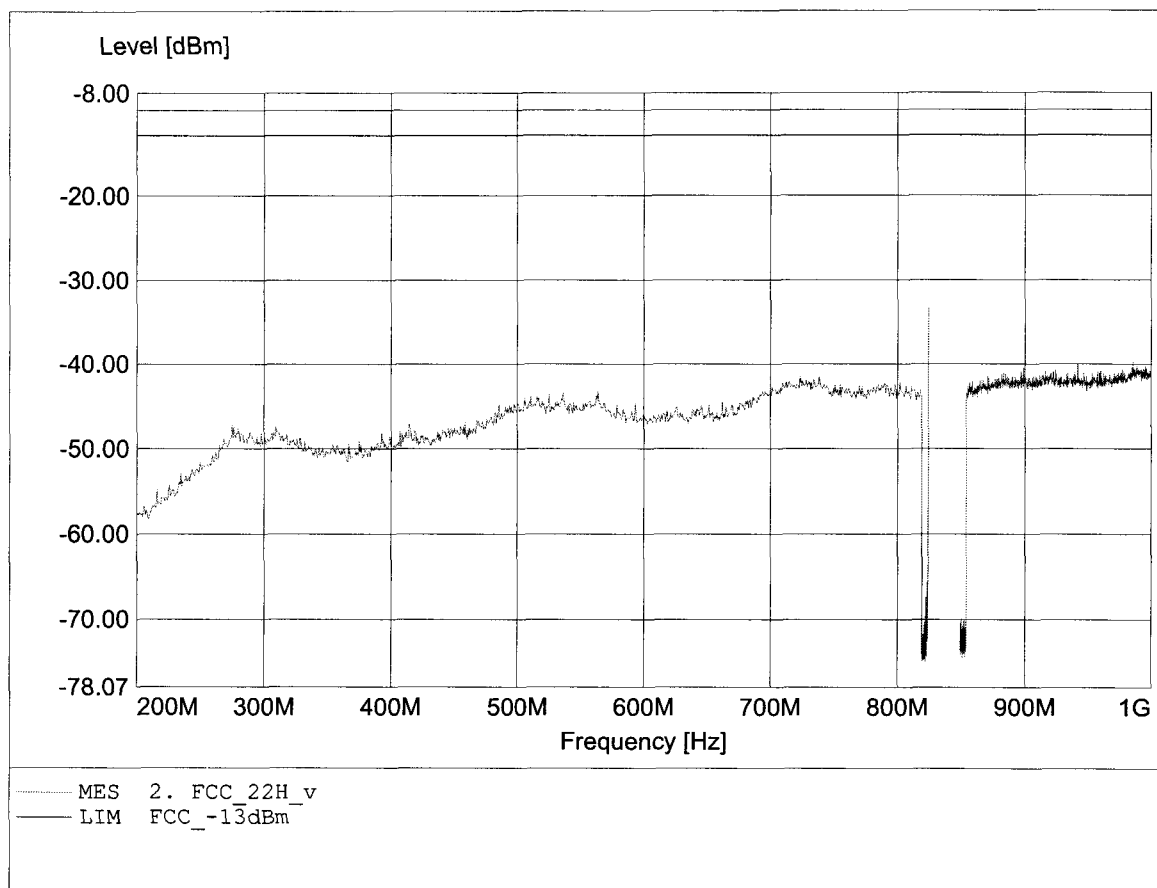


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.983MHz, Pmax: -25.02dBm, RBW: 1MHz

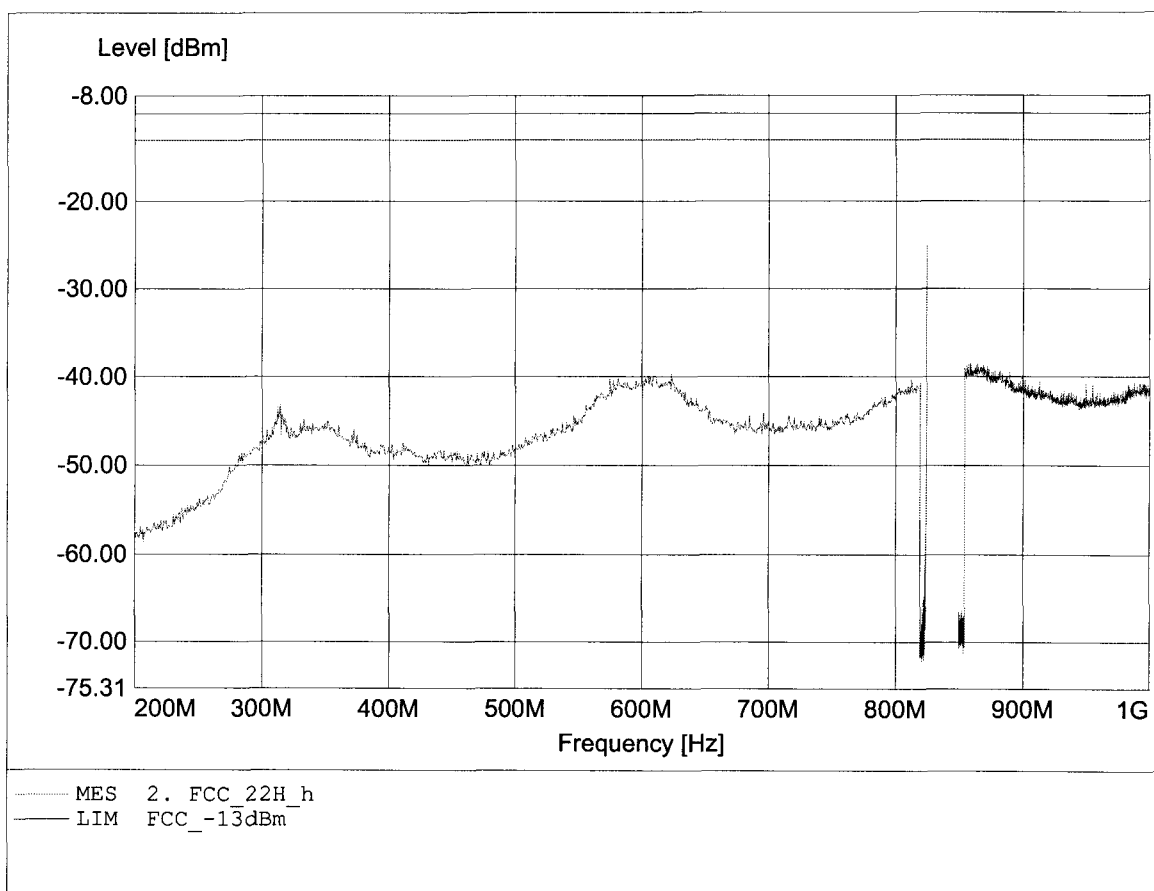


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.993GHz, Pmax: -21.84dBm, RBW: 1MHz

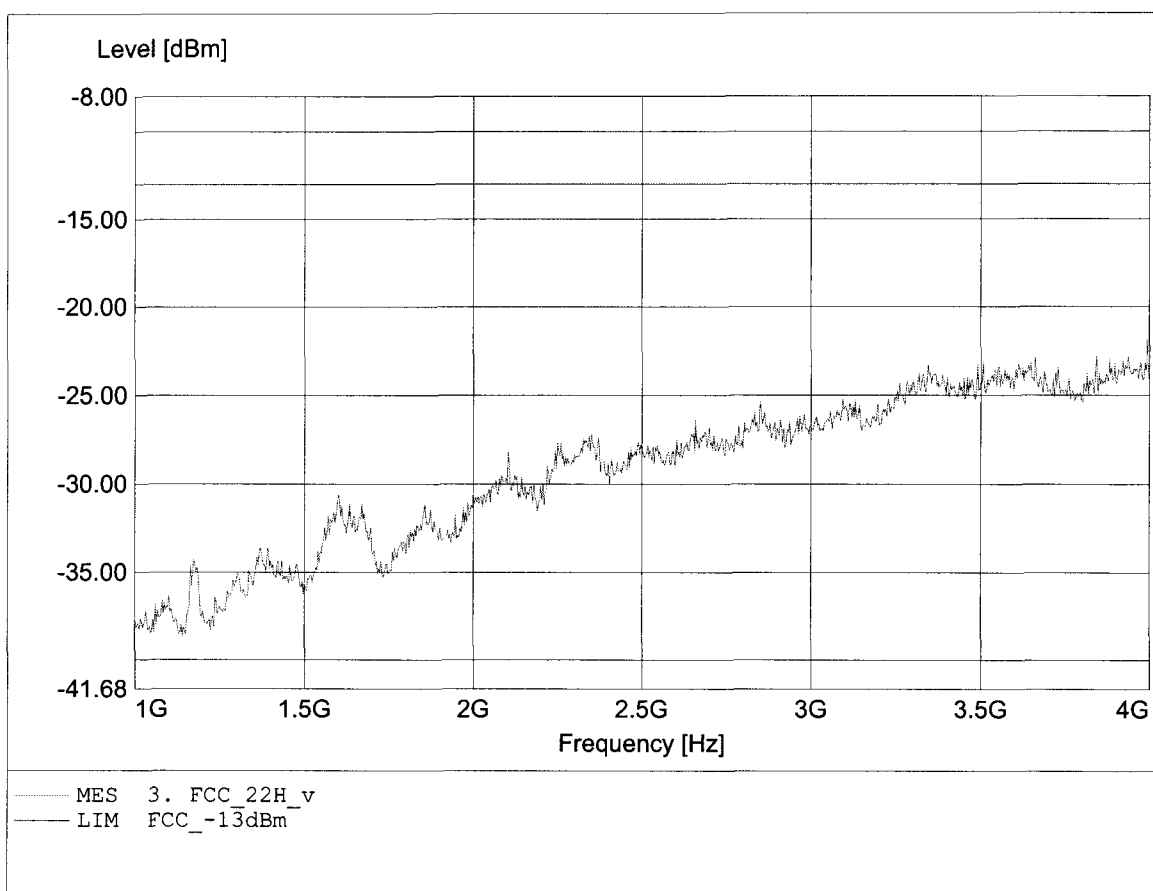


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.653GHz, Pmax: -17.41dBm, RBW: 1MHz

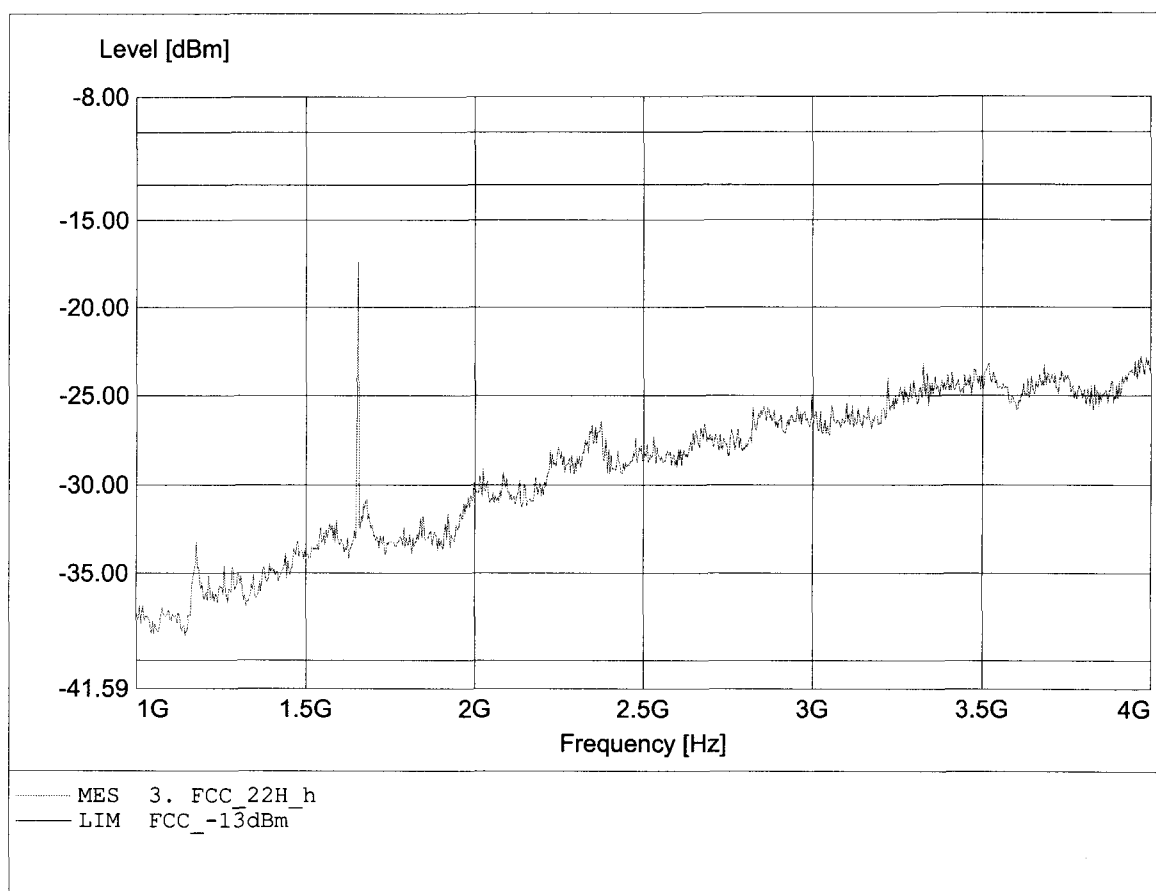


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.773GHz, Pmax: -34.03dBm, RBW: 1MHz

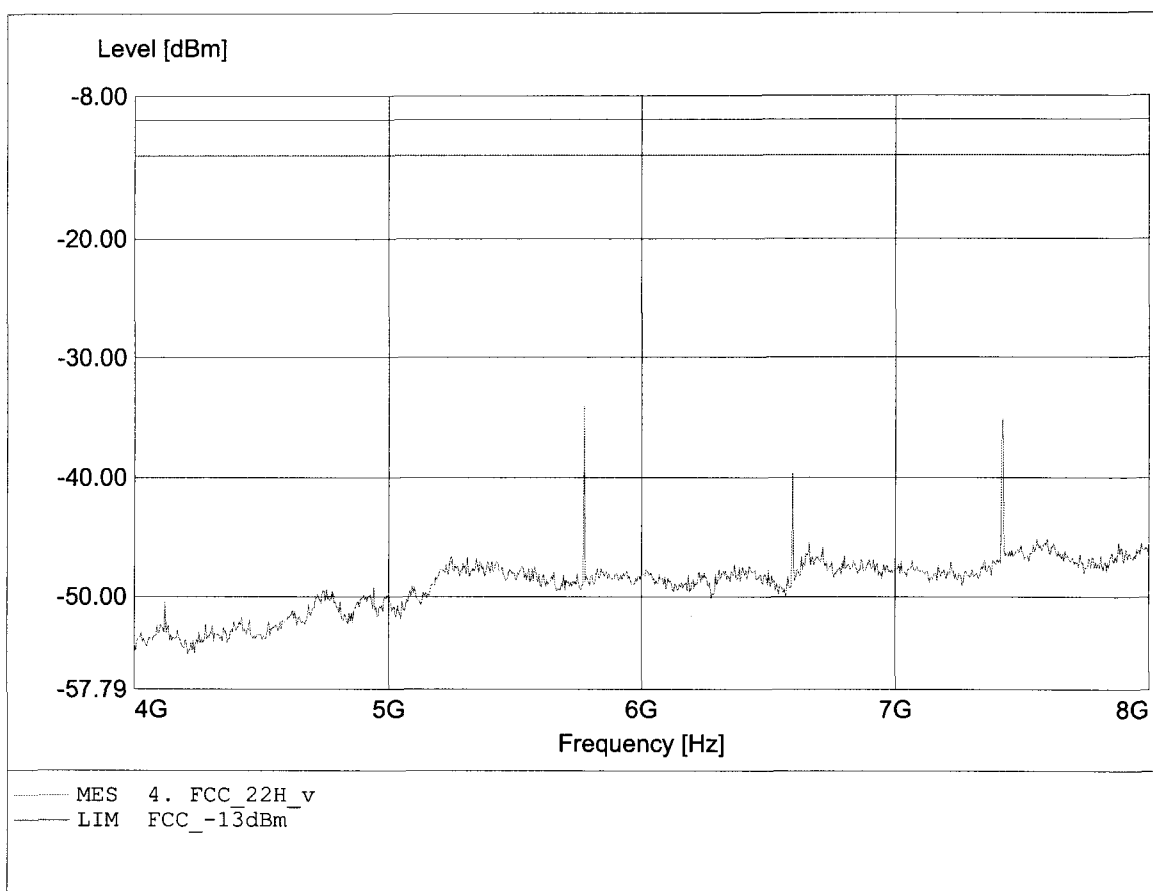


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.773GHz, Pmax: -32.18dBm, RBW: 1MHz

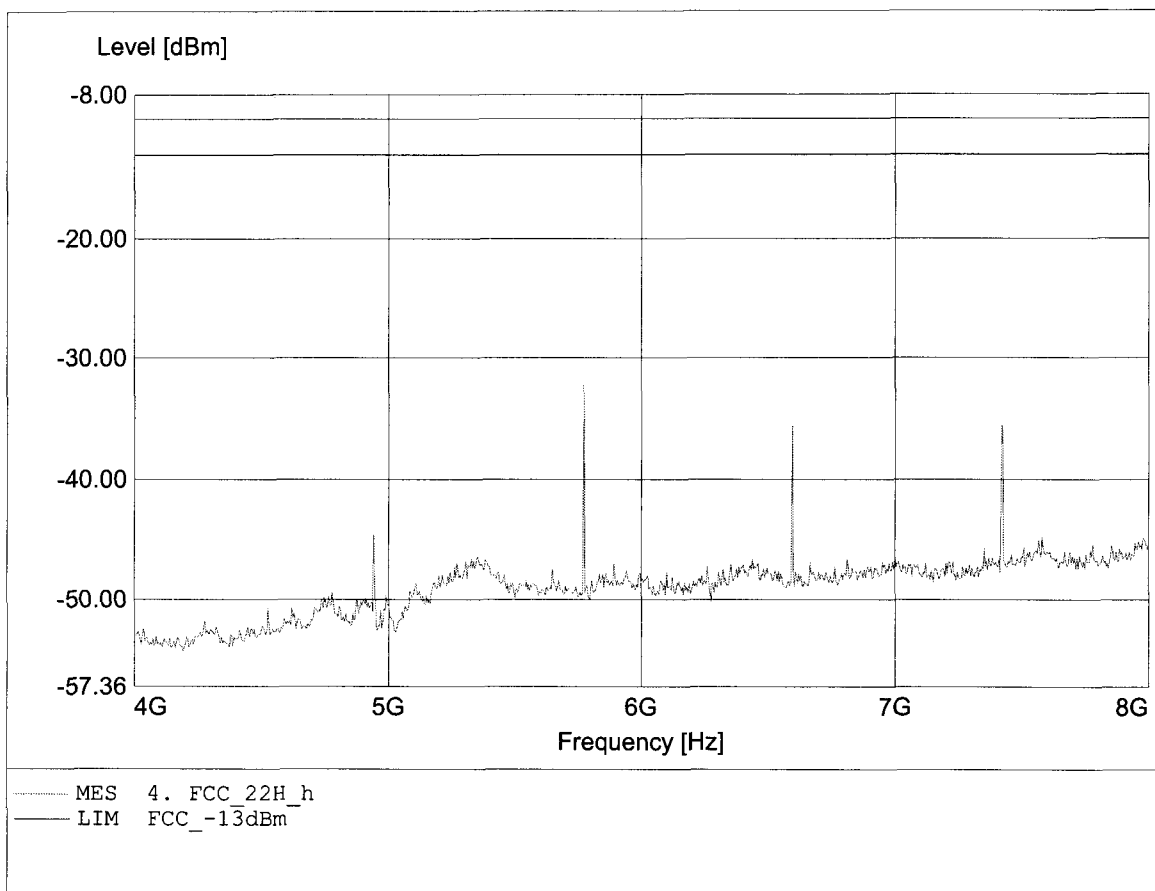


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.716GHz, Pmax: -37.12dBm, RBW: 1MHz

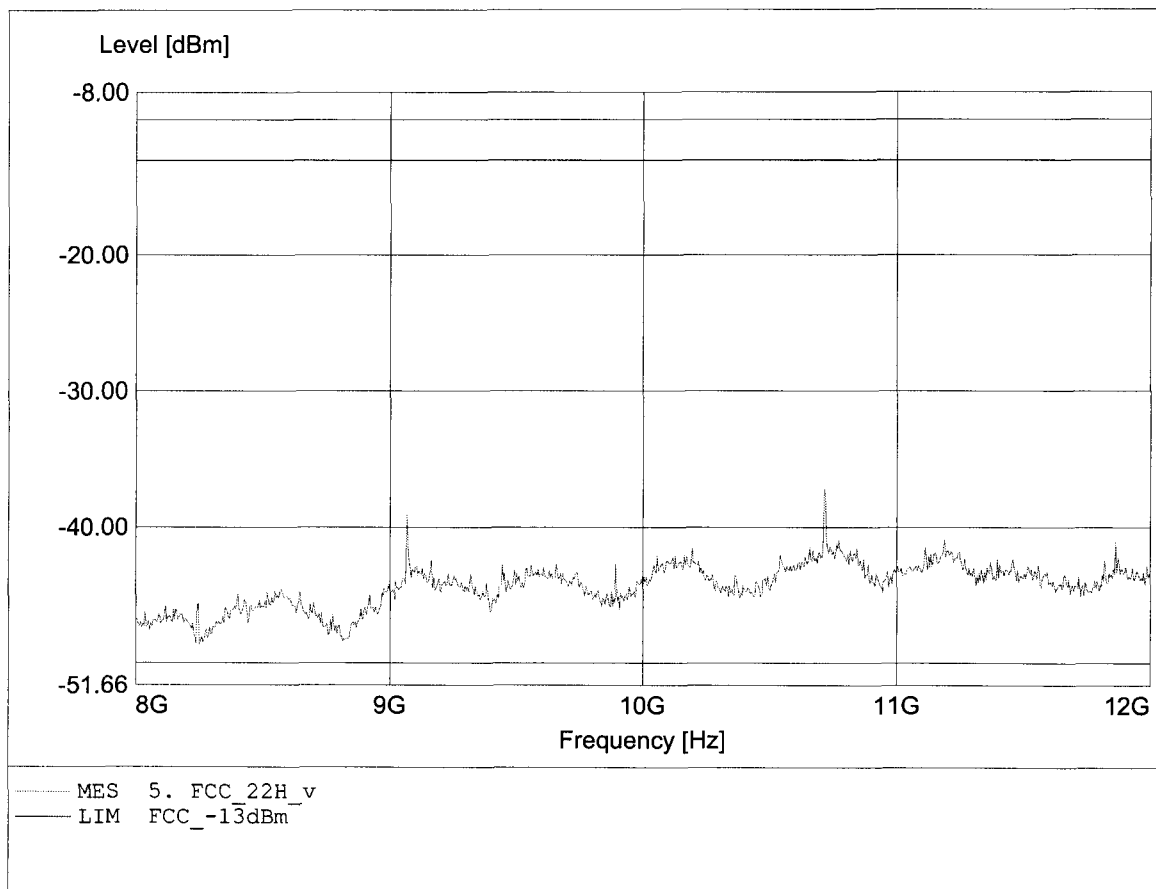


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 128
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.716GHz, Pmax: -34.31dBm, RBW: 1MHz

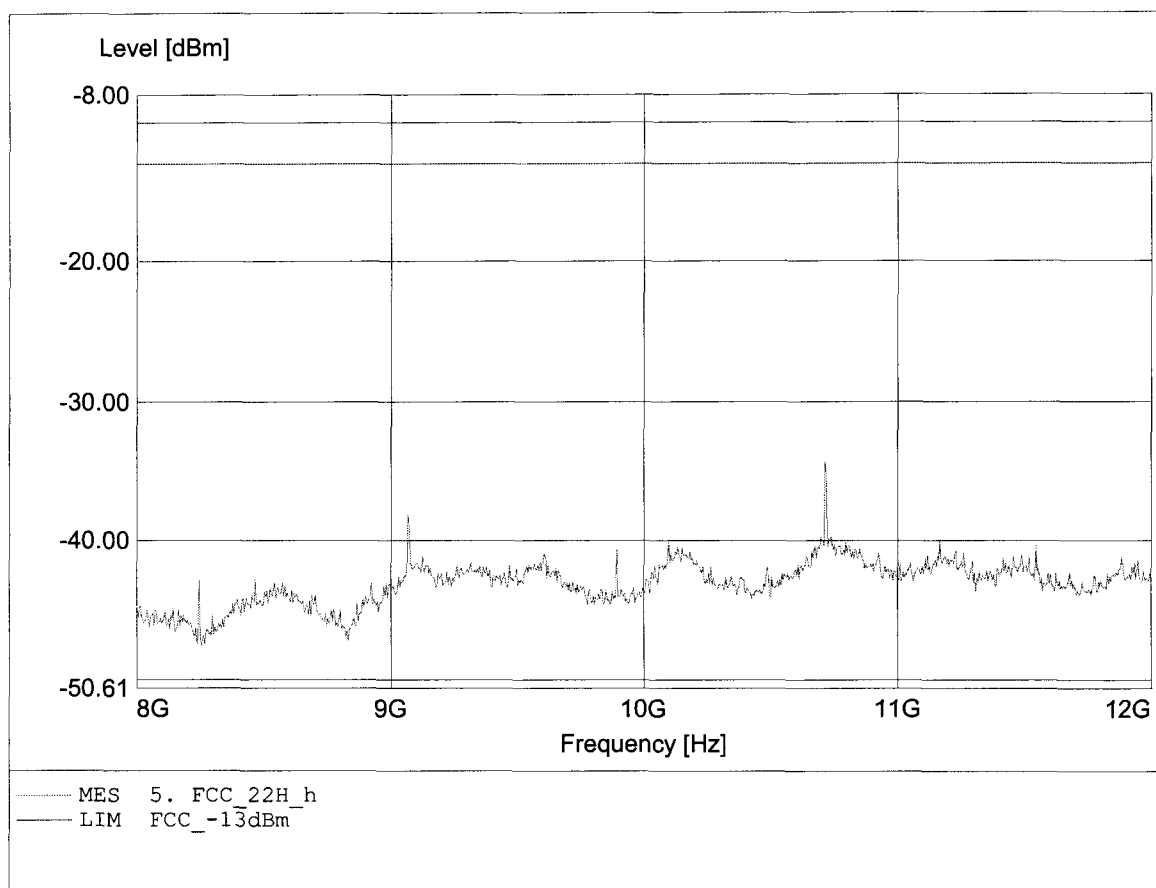


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 77.411MHz, Pmax: -51.44dBm, RBW: 1MHz

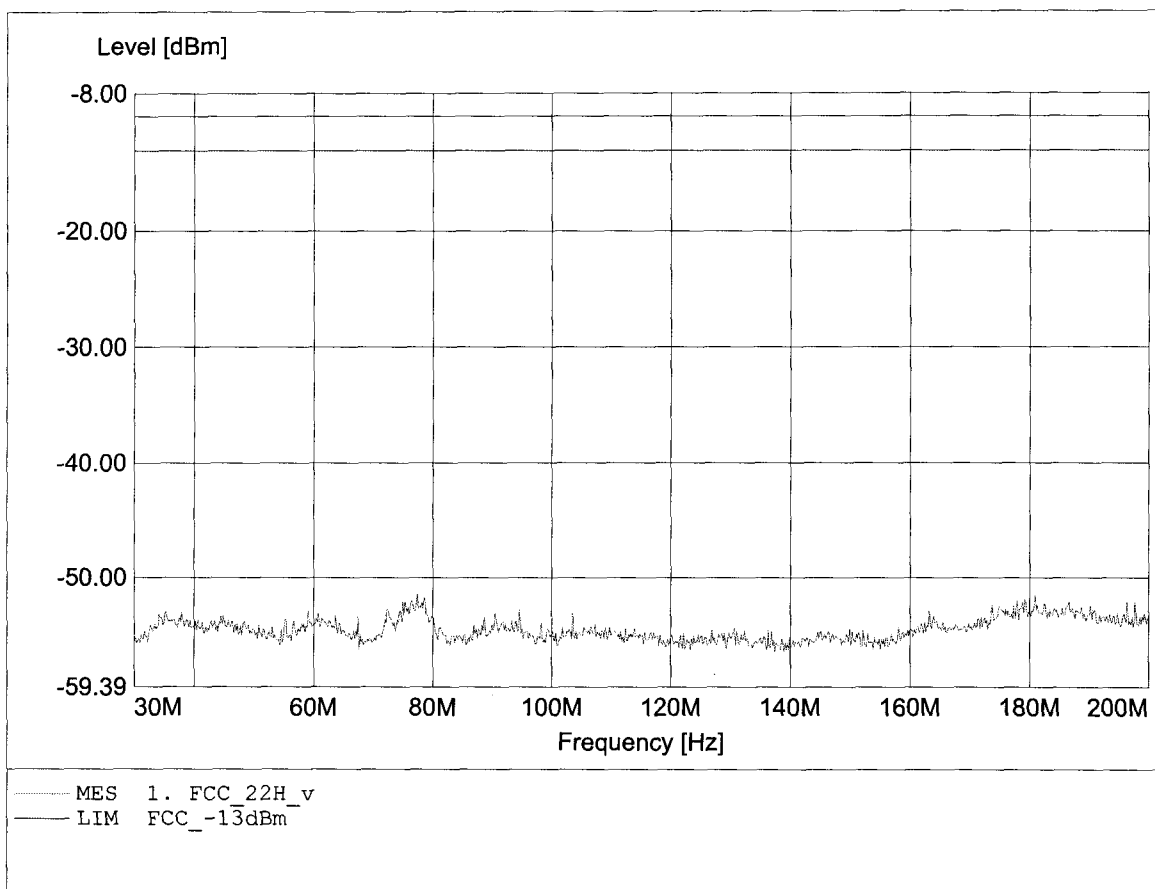


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.667MHz, Pmax: -51.47dBm, RBW: 1MHz

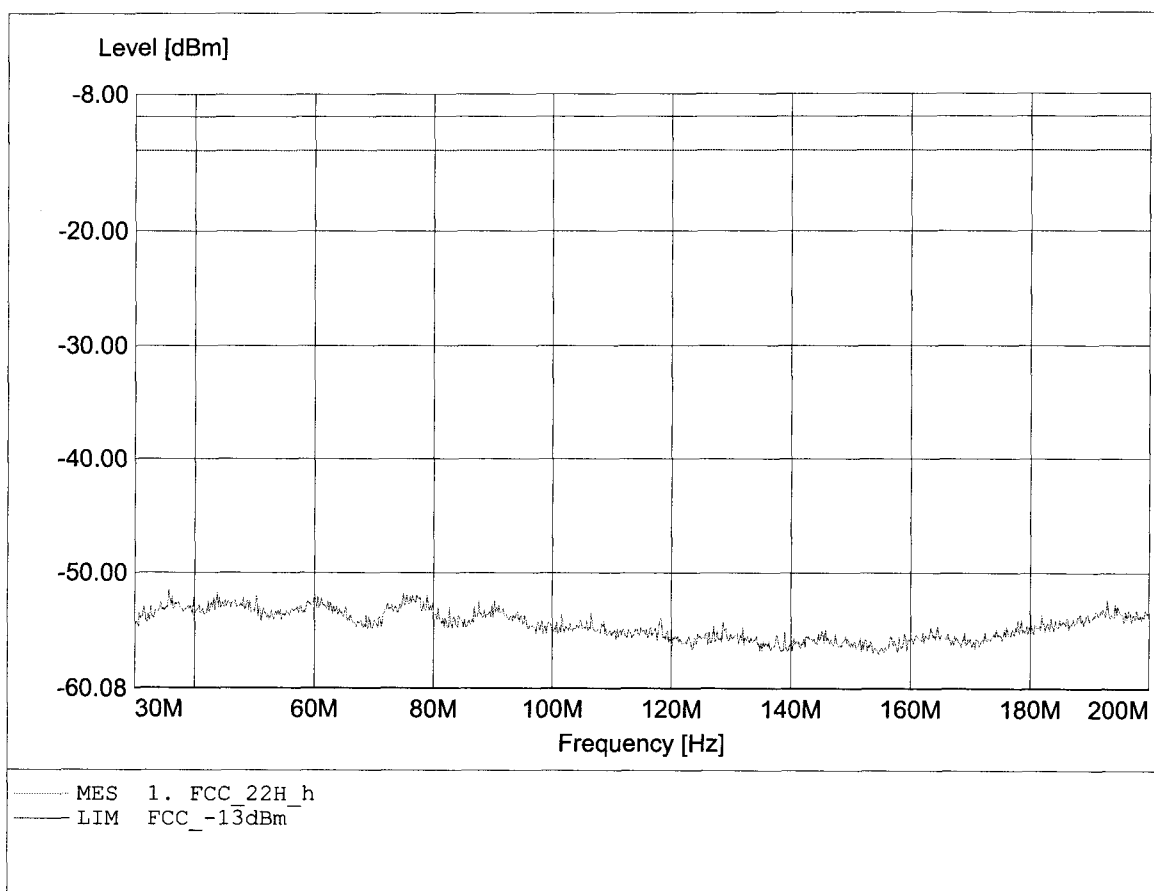


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 981.344MHz, Pmax: -39.72dBm, RBW: 1MHz

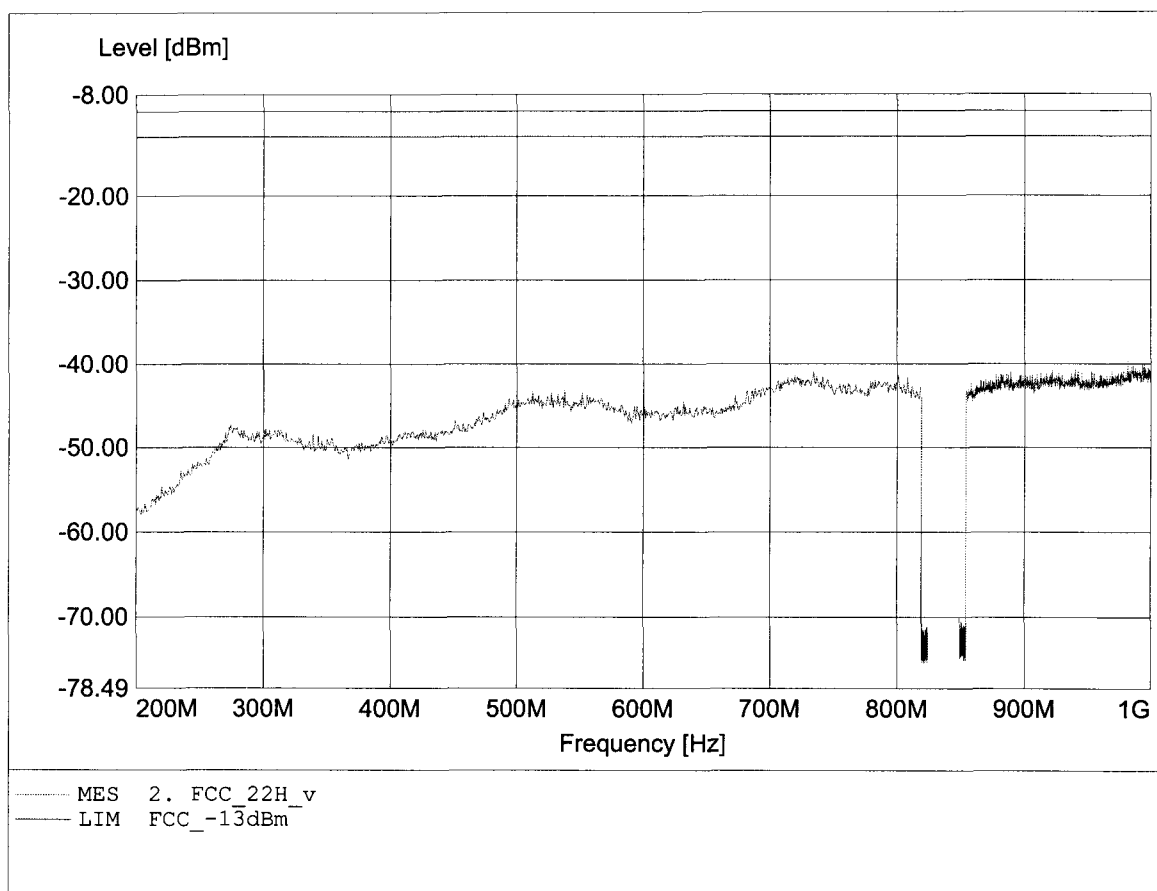


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 878.820MHz, Pmax: -38.19dBm, RBW: 1MHz

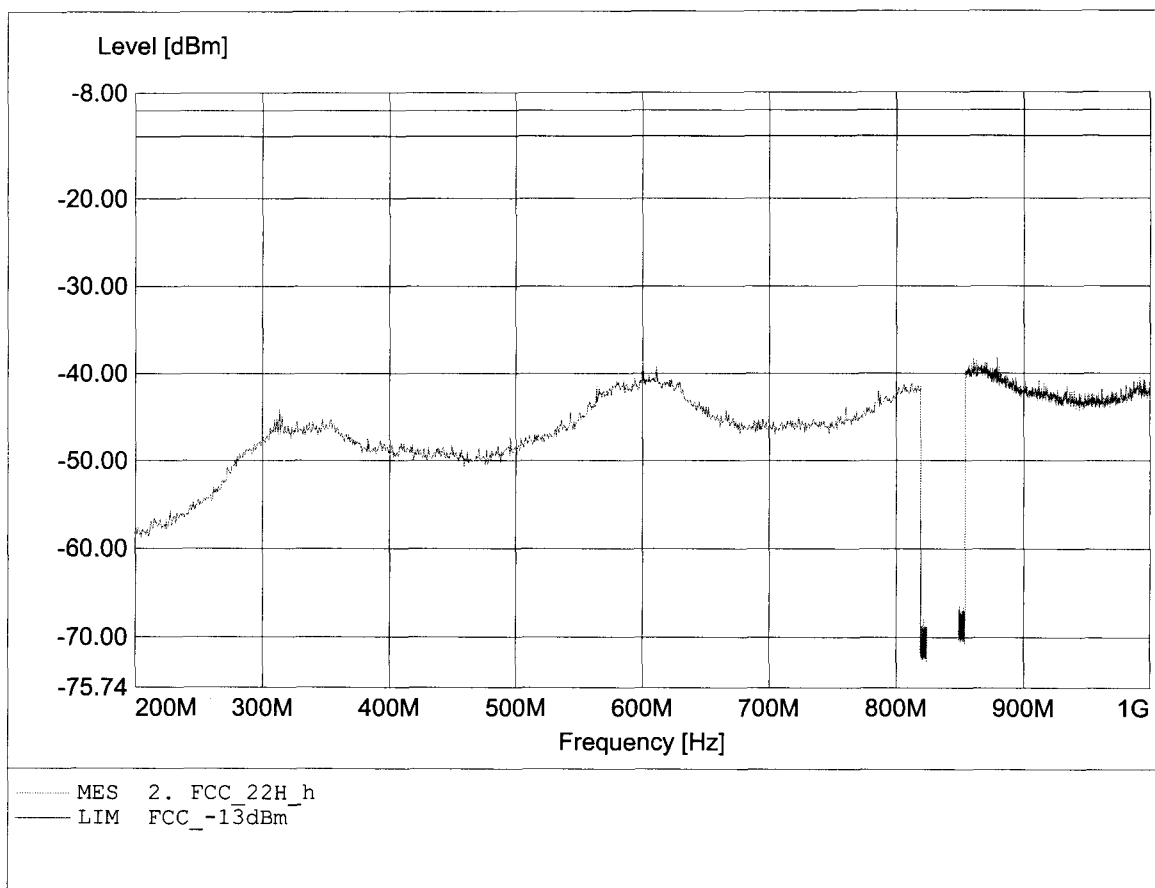


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.903GHz, Pmax: -22.22dBm, RBW: 1MHz

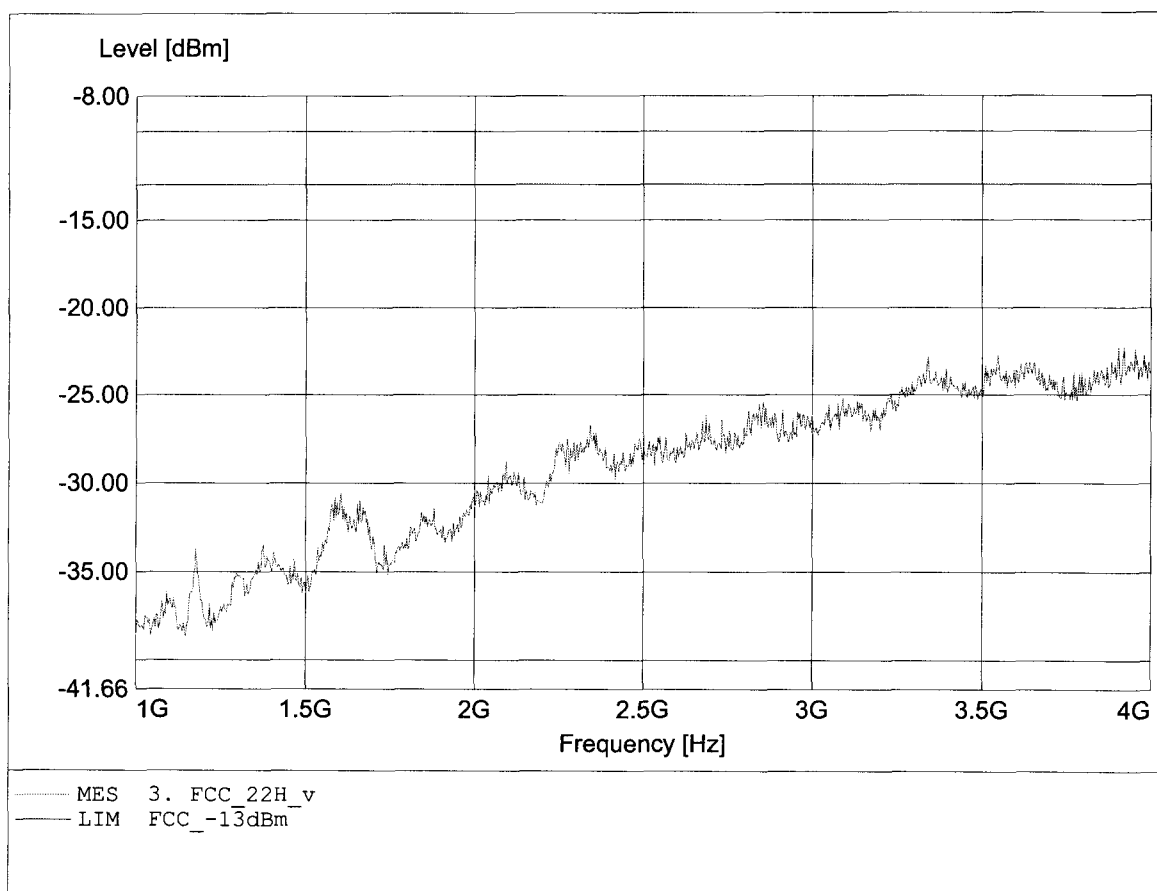


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.677GHz, Pmax: -13.29dBm, RBW: 1MHz

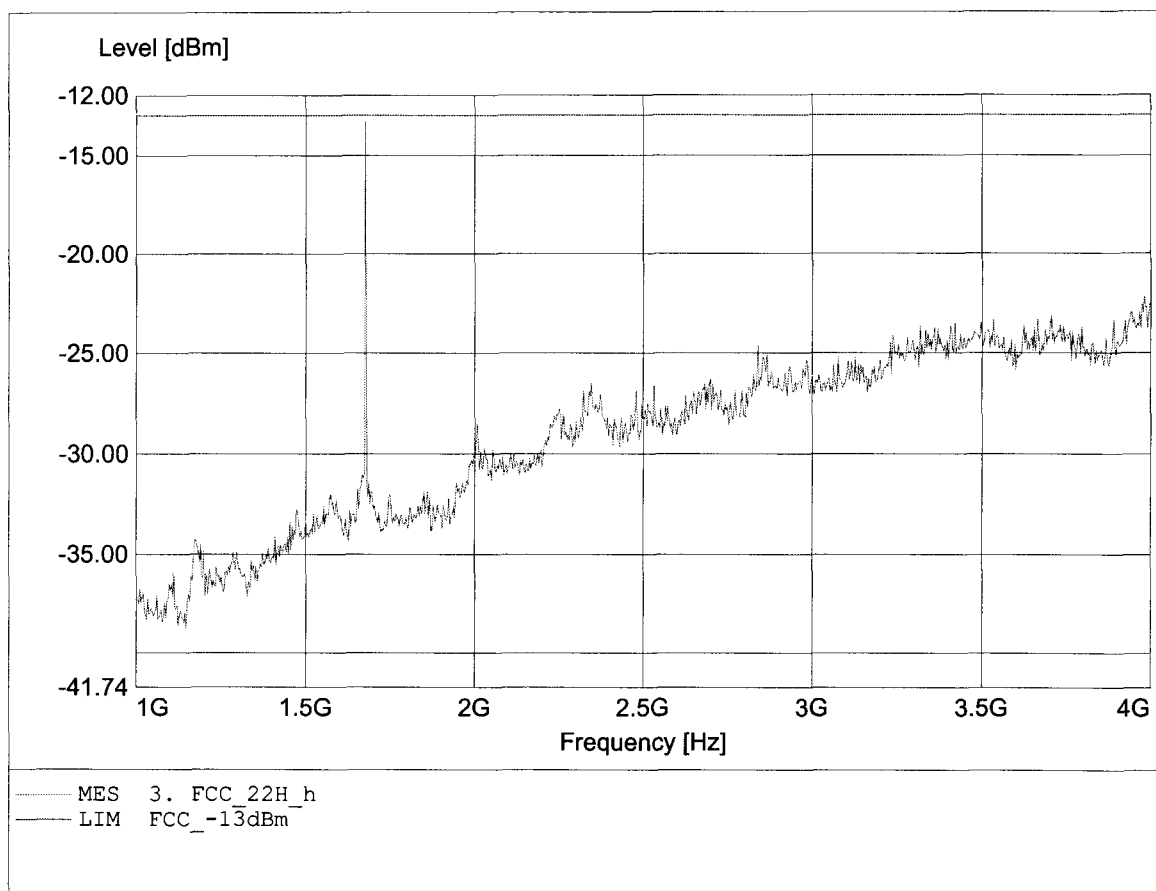


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.858GHz, Pmax: -34.20dBm, RBW: 1MHz

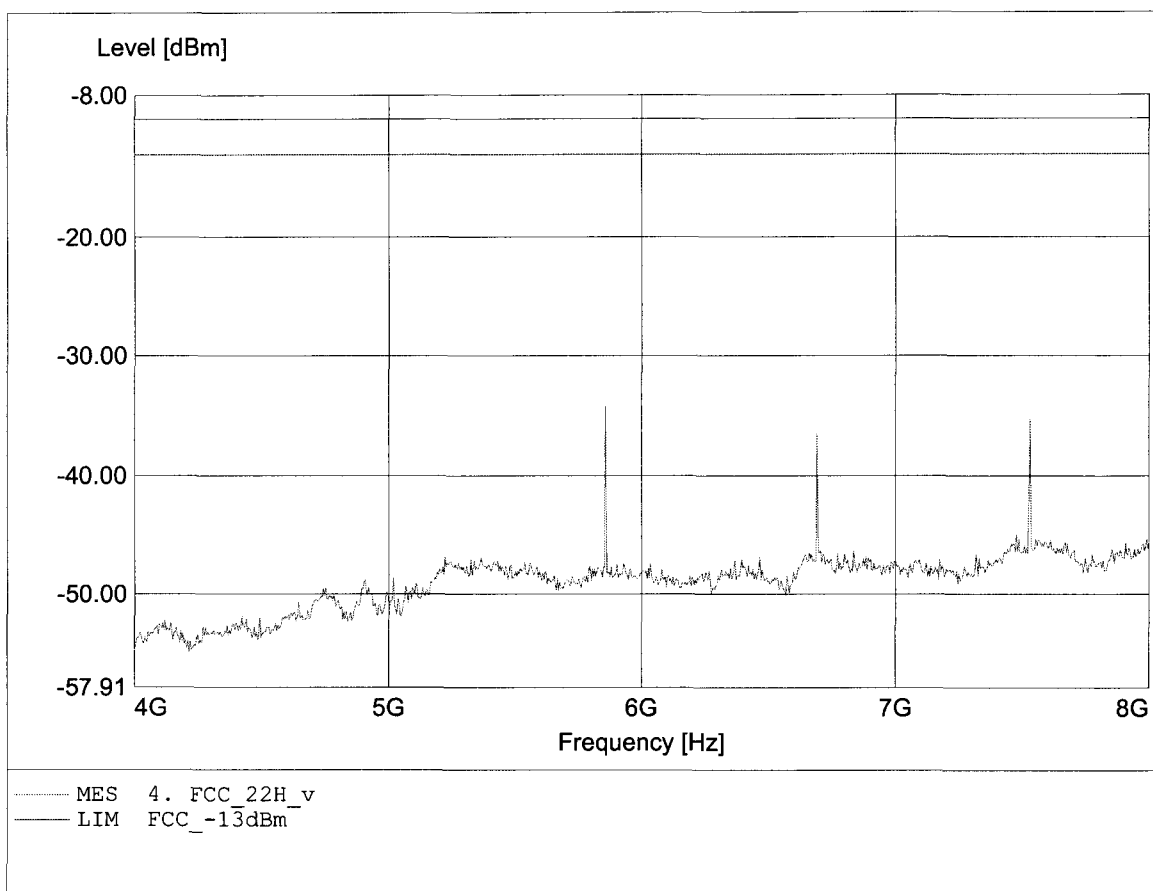


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.693GHz, Pmax: -33.41dBm, RBW: 1MHz

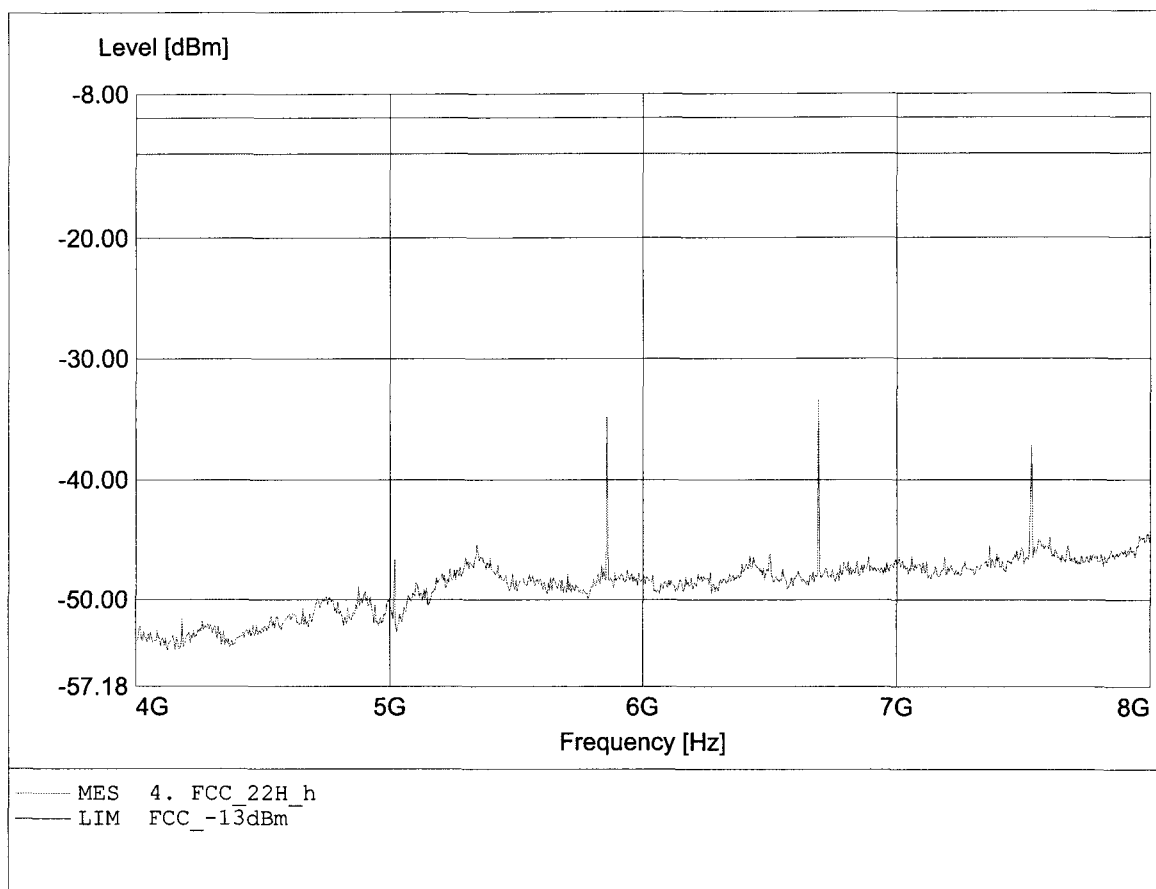


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.178GHz, Pmax: -40.31dBm, RBW: 1MHz

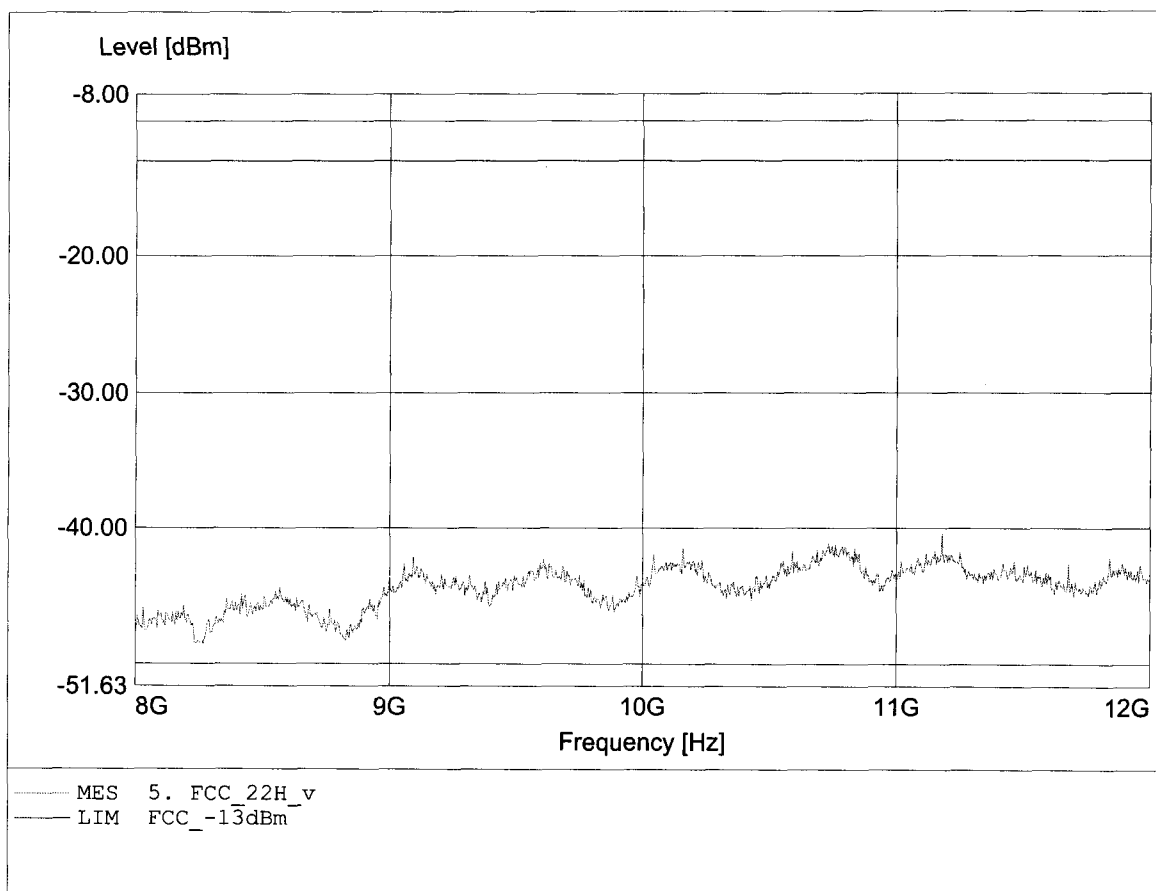


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 188
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.876GHz, Pmax: -39.60dBm, RBW: 1MHz

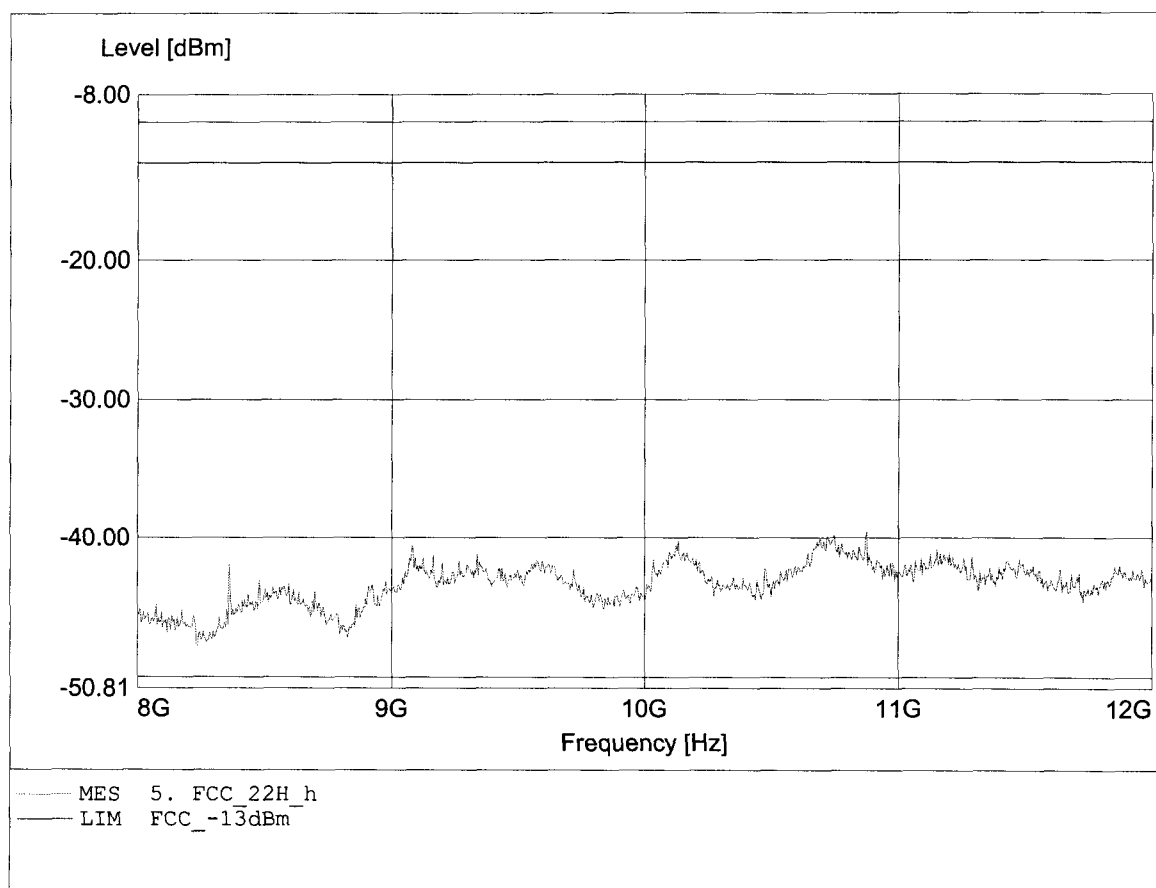


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 178.656MHz, Pmax: -51.50dBm, RBW: 1MHz

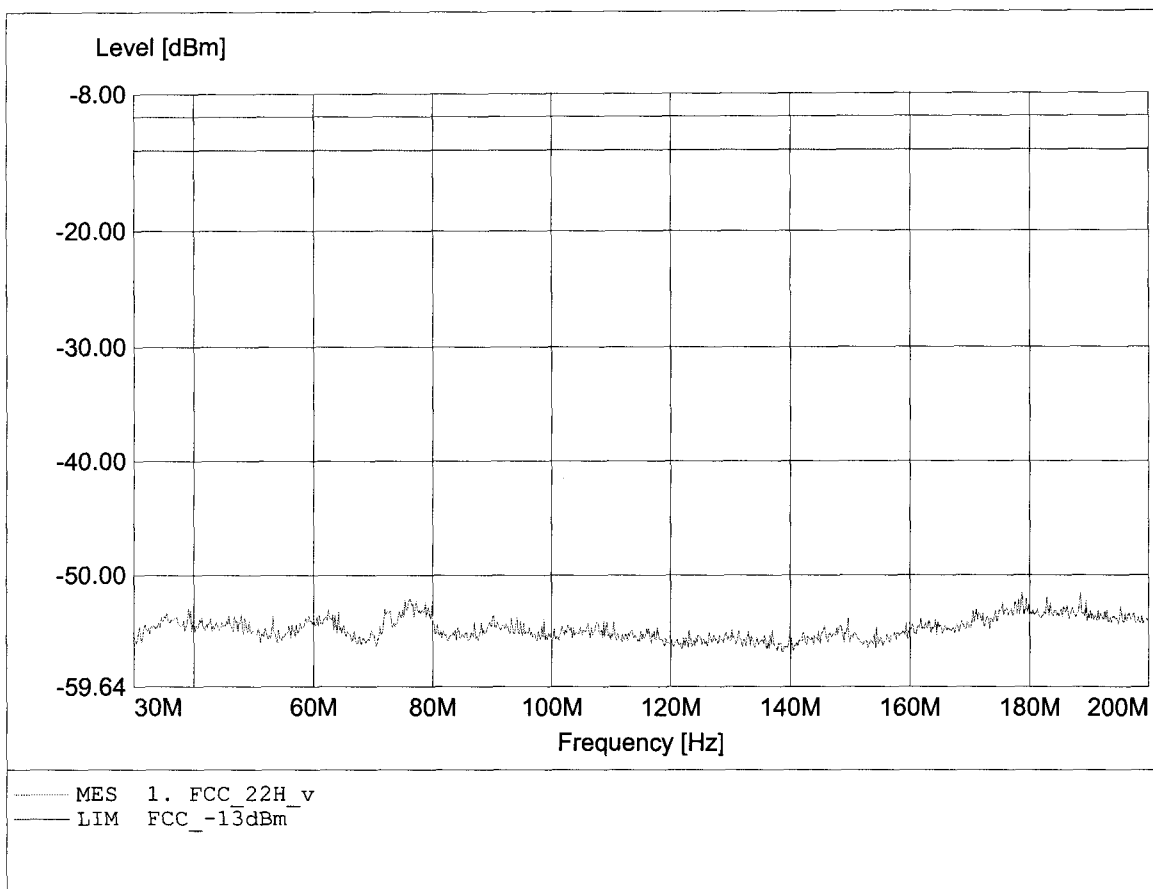


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 77.222MHz, Pmax: -51.44dBm, RBW: 1MHz

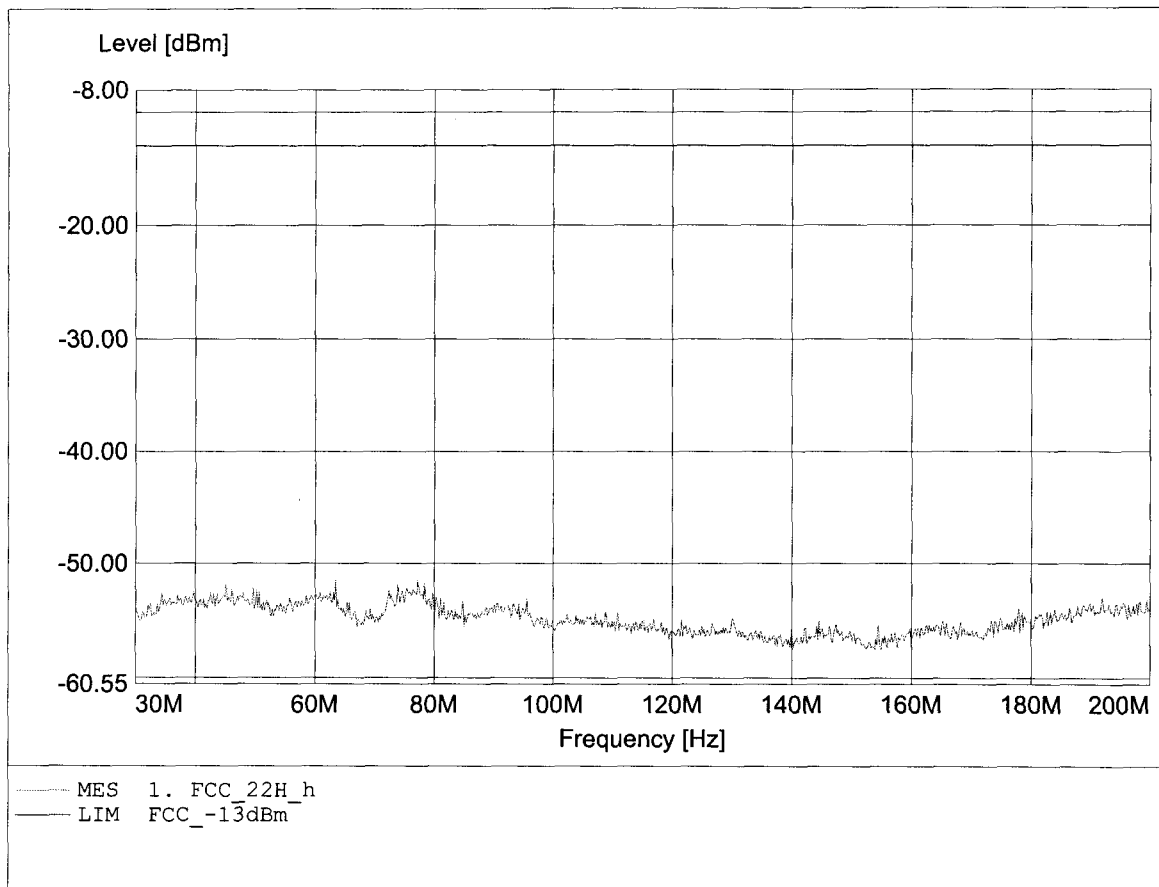


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.017MHz, Pmax: -30.45dBm, RBW: 1MHz

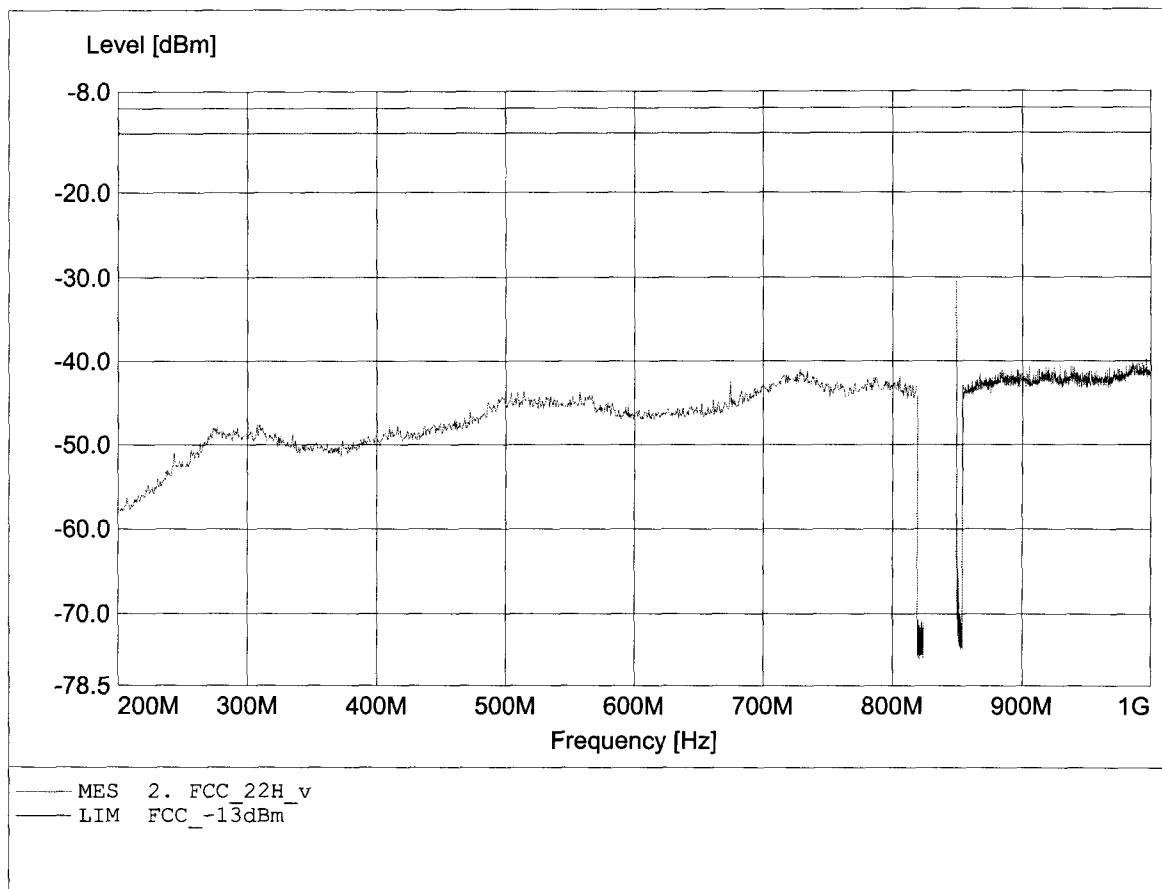


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.017MHz, Pmax: -26.25dBm, RBW: 1MHz

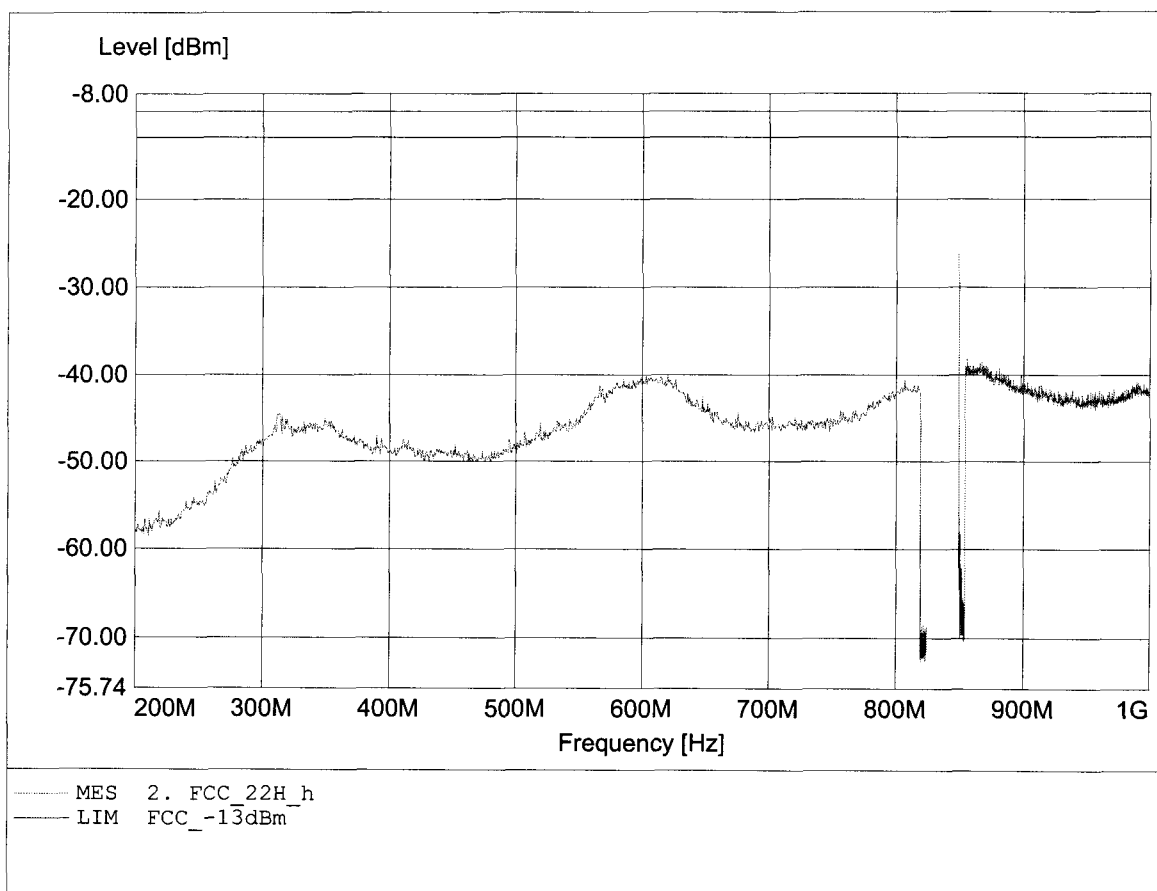


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.490GHz, Pmax: -22.65dBm, RBW: 1MHz

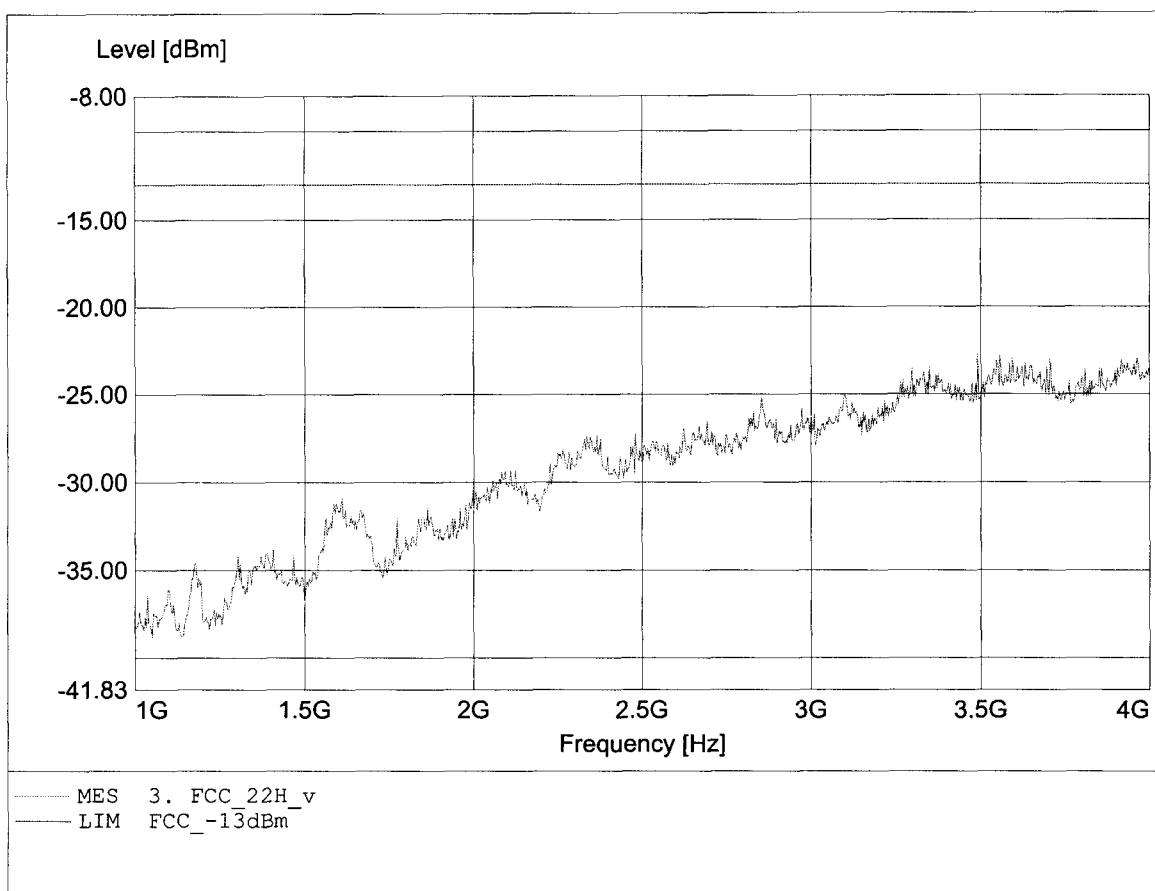


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.703GHz, Pmax: -19.70dBm, RBW: 1MHz

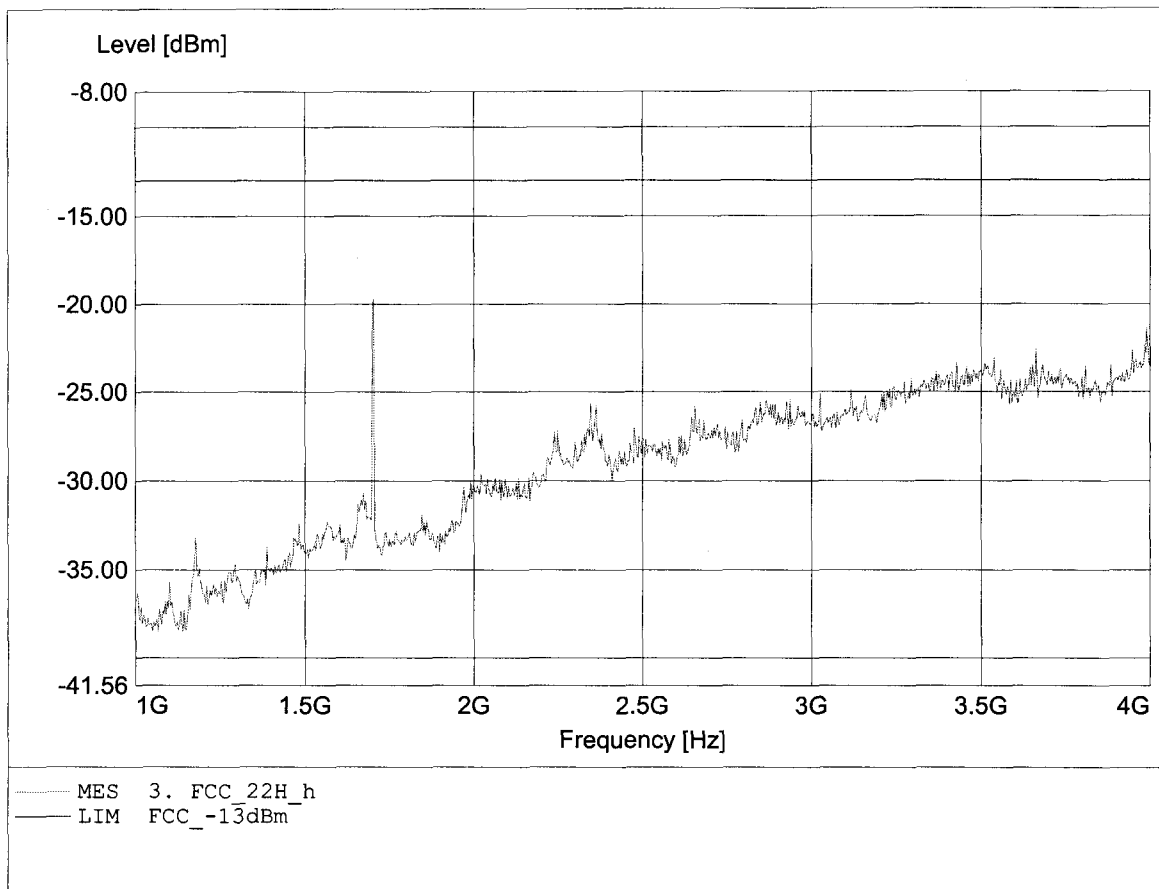


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.796GHz, Pmax: -29.37dBm, RBW: 1MHz

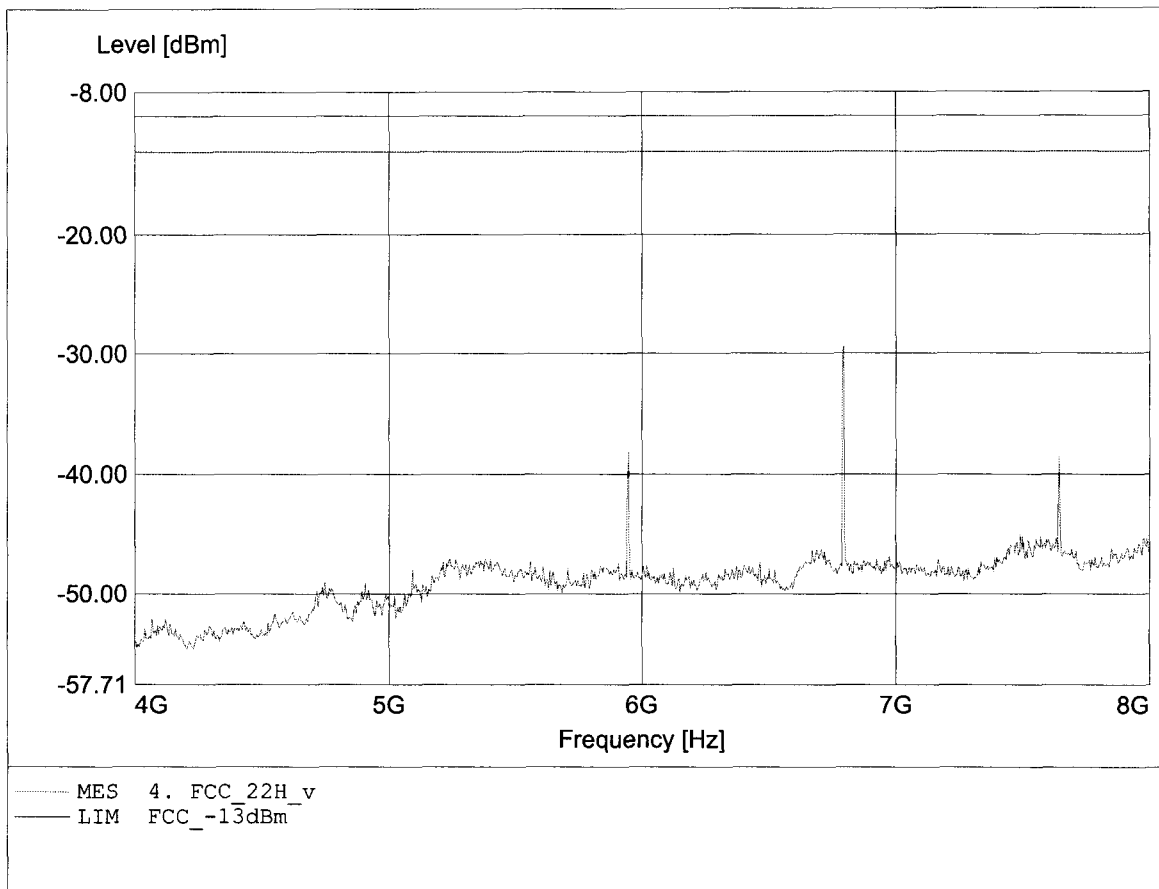


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.791GHz, Pmax: -29.32dBm, RBW: 1MHz

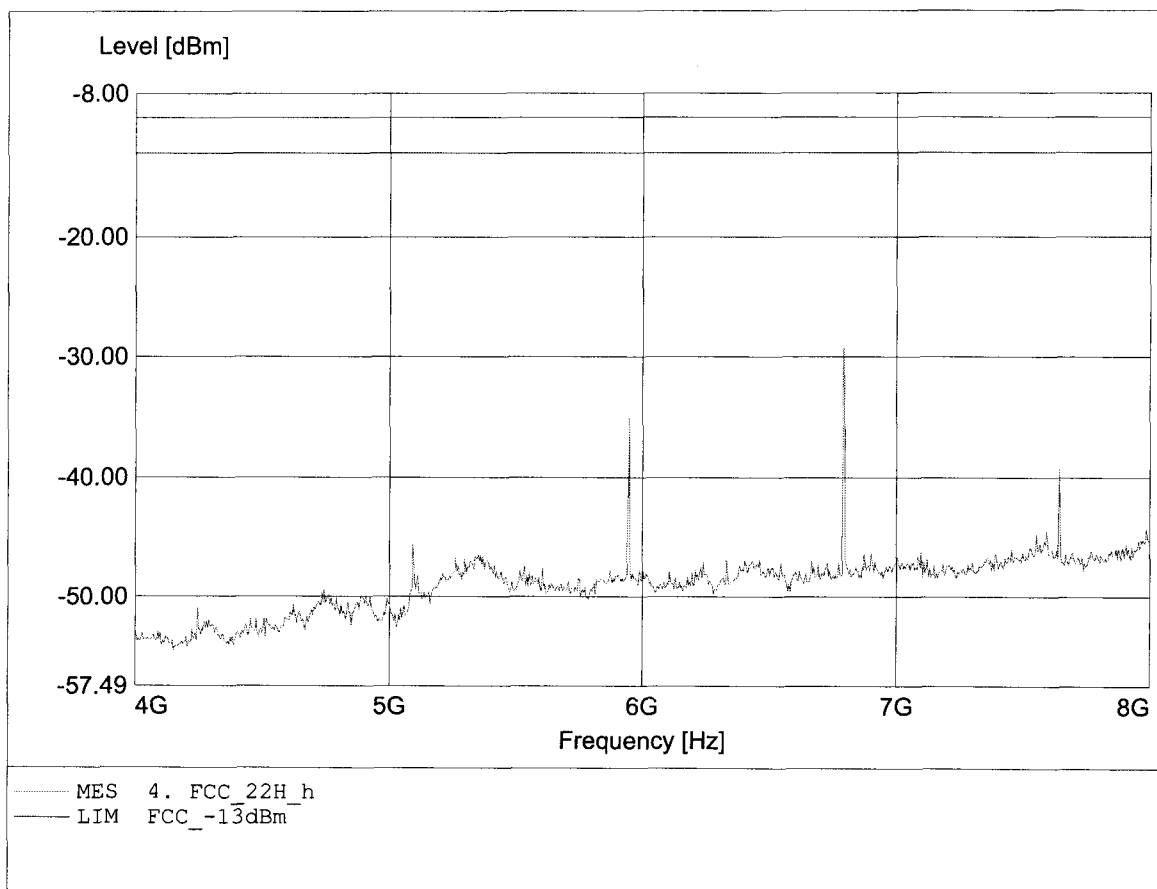


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.751GHz, Pmax: -40.64dBm, RBW: 1MHz

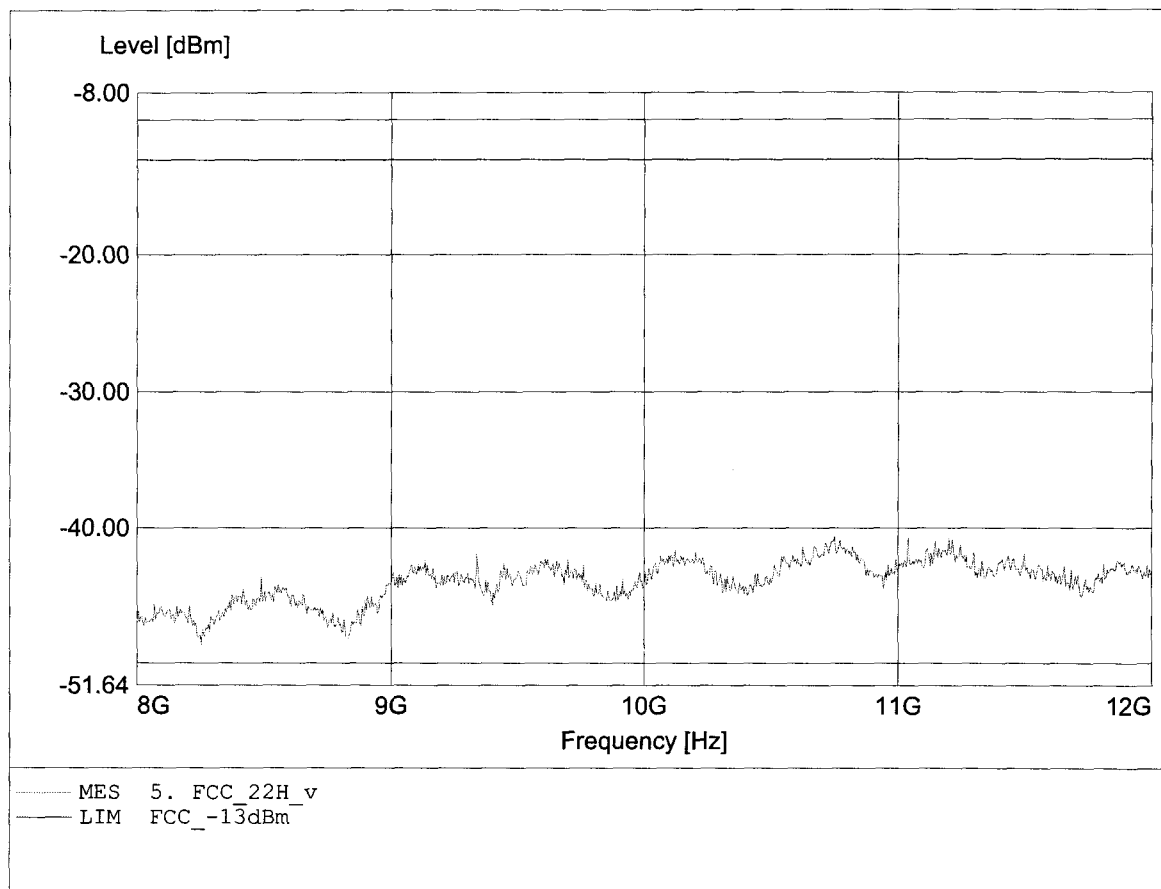


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / ch.: 251
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Walter
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.120GHz, Pmax: -39.89dBm, RBW: 1MHz

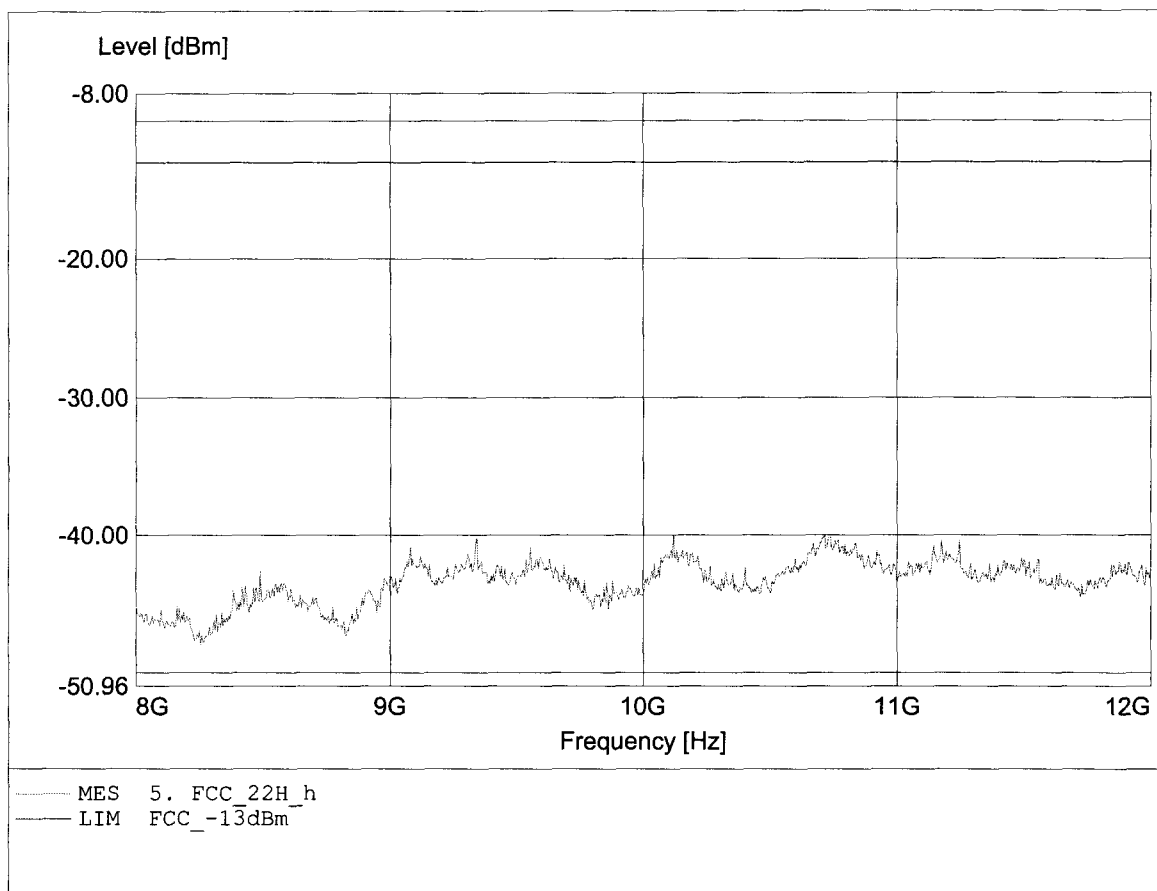


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 167.133MHz, Pmax: -50.92dBm, RBW: 1MHz

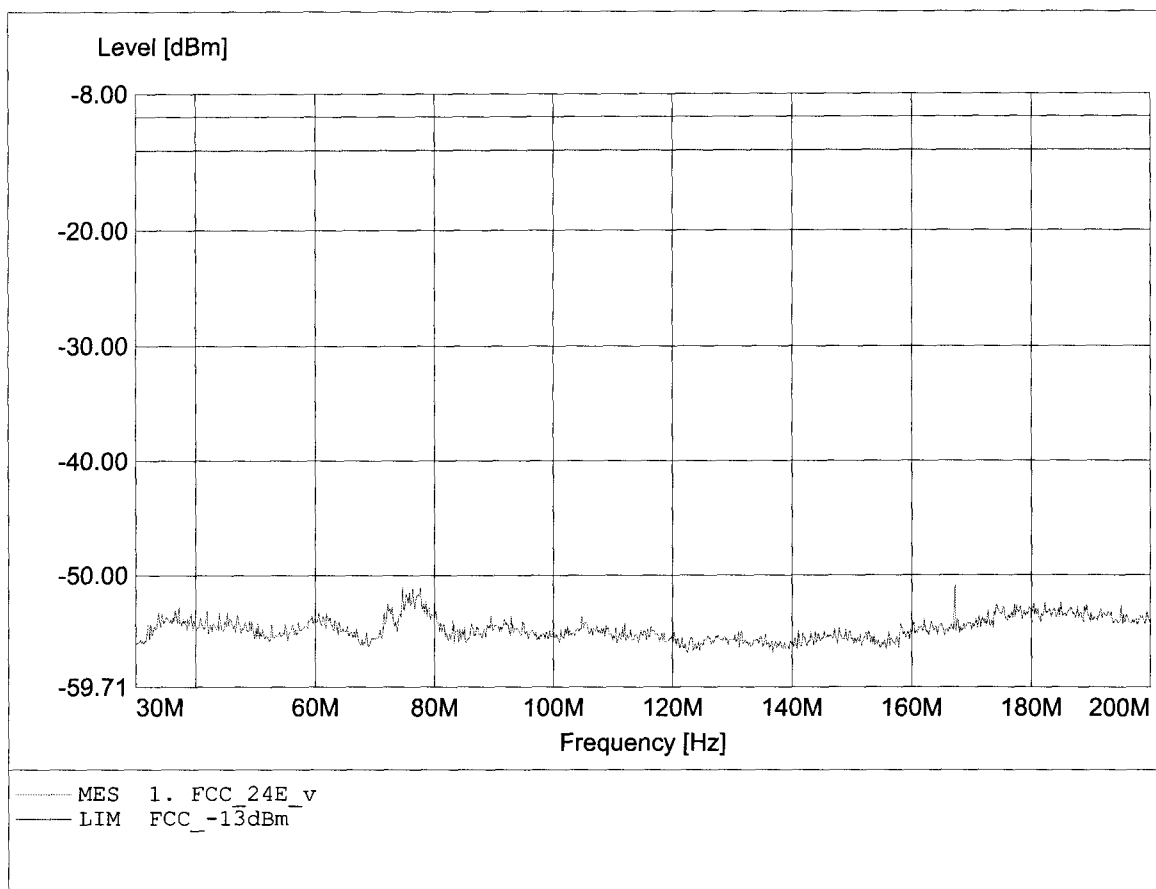


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 39.822MHz, Pmax: -52.09dBm, RBW: 1MHz

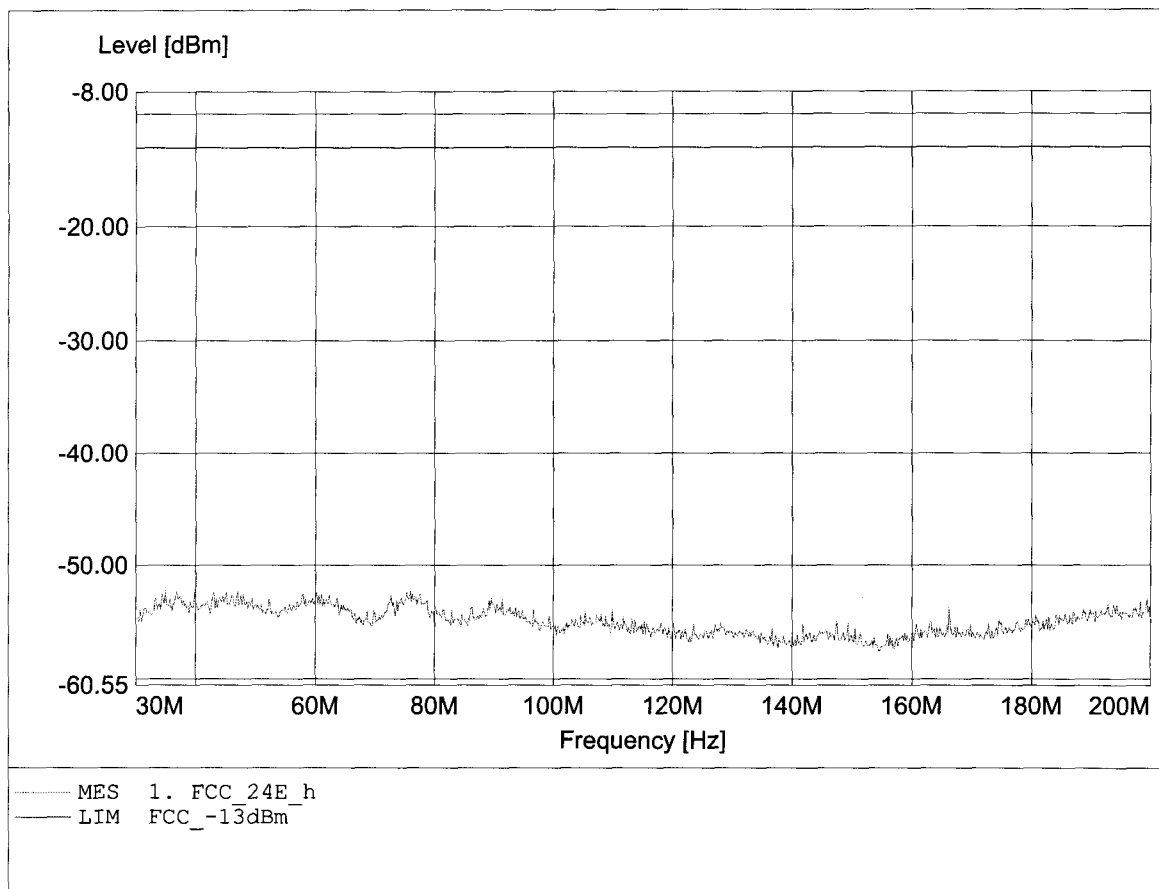


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 987.556MHz, Pmax: -38.39dBm, RBW: 1MHz

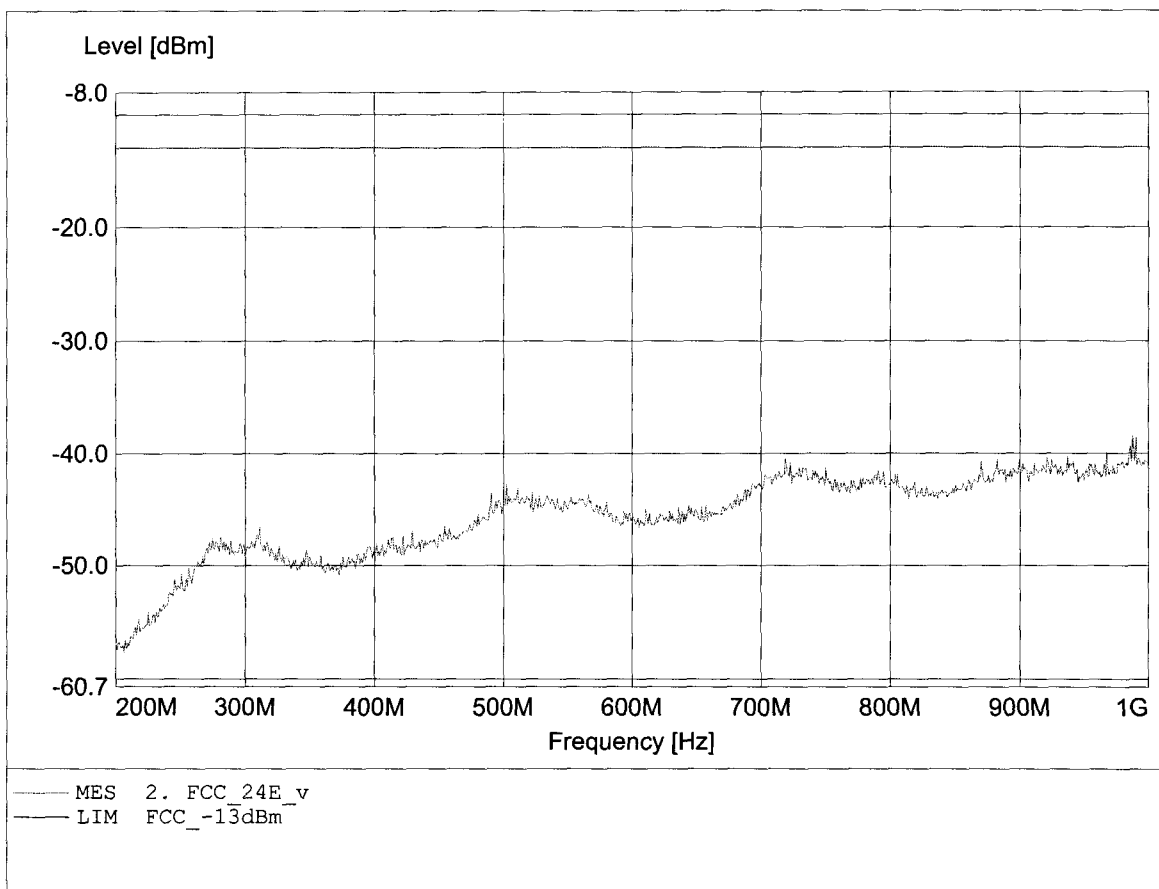


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 880.889MHz, Pmax: -38.29dBm, RBW: 1MHz

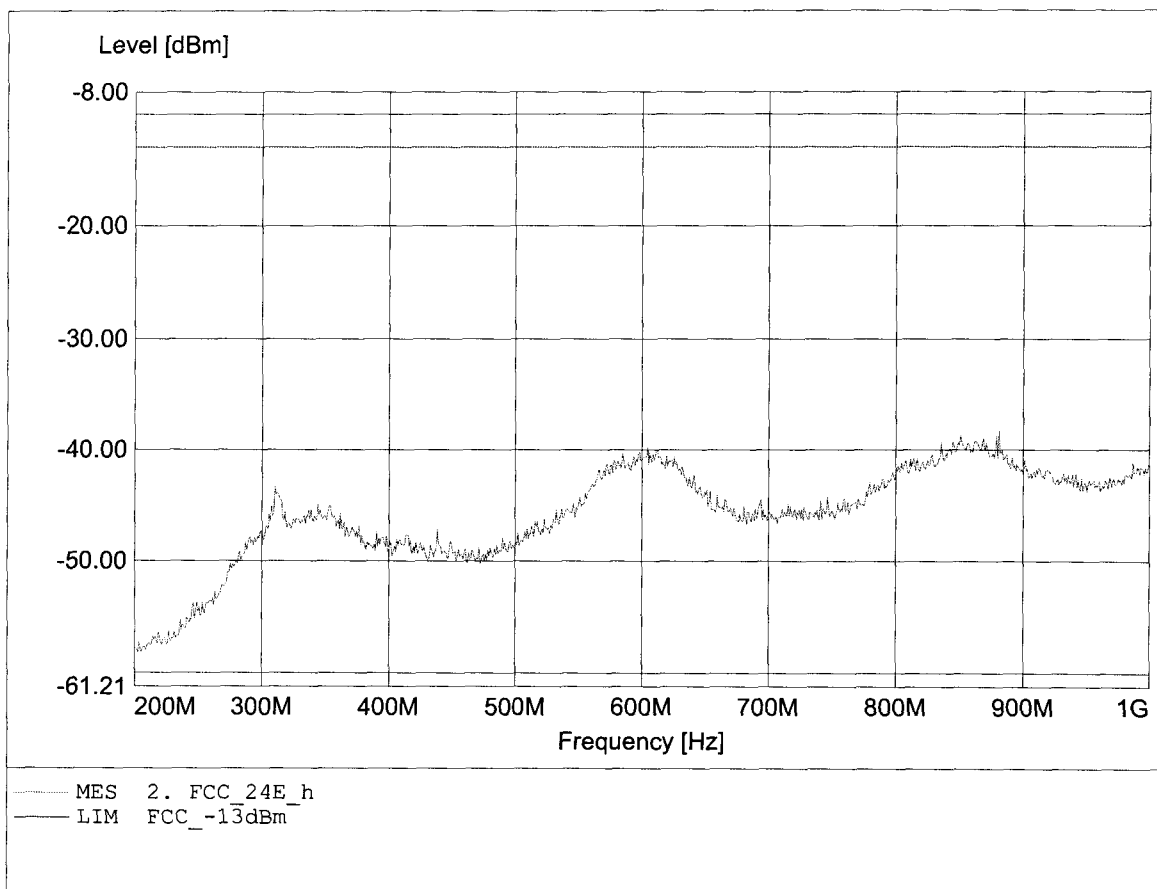


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.991GHz, Pmax: -22.75dBm, RBW: 1MHz/3kHz

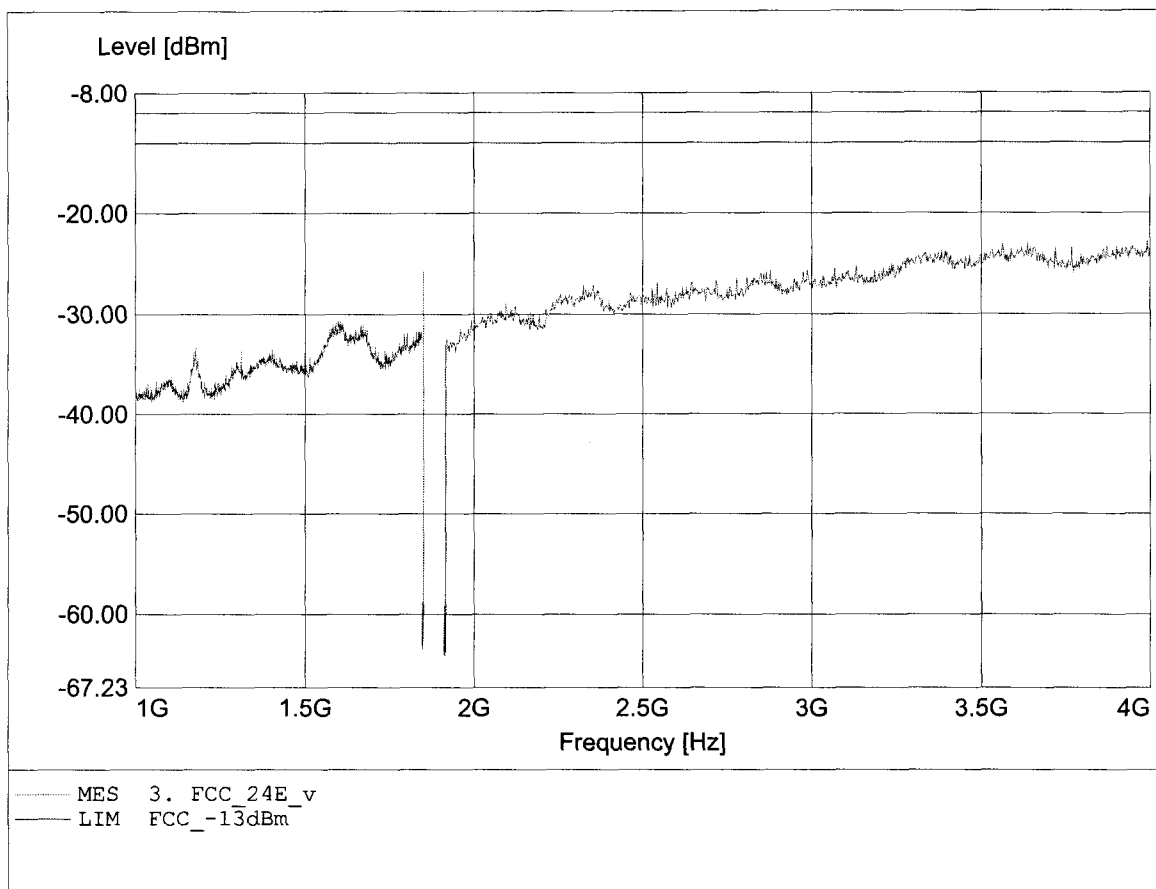


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -16.83dBm, RBW: 1MHz/3kHz

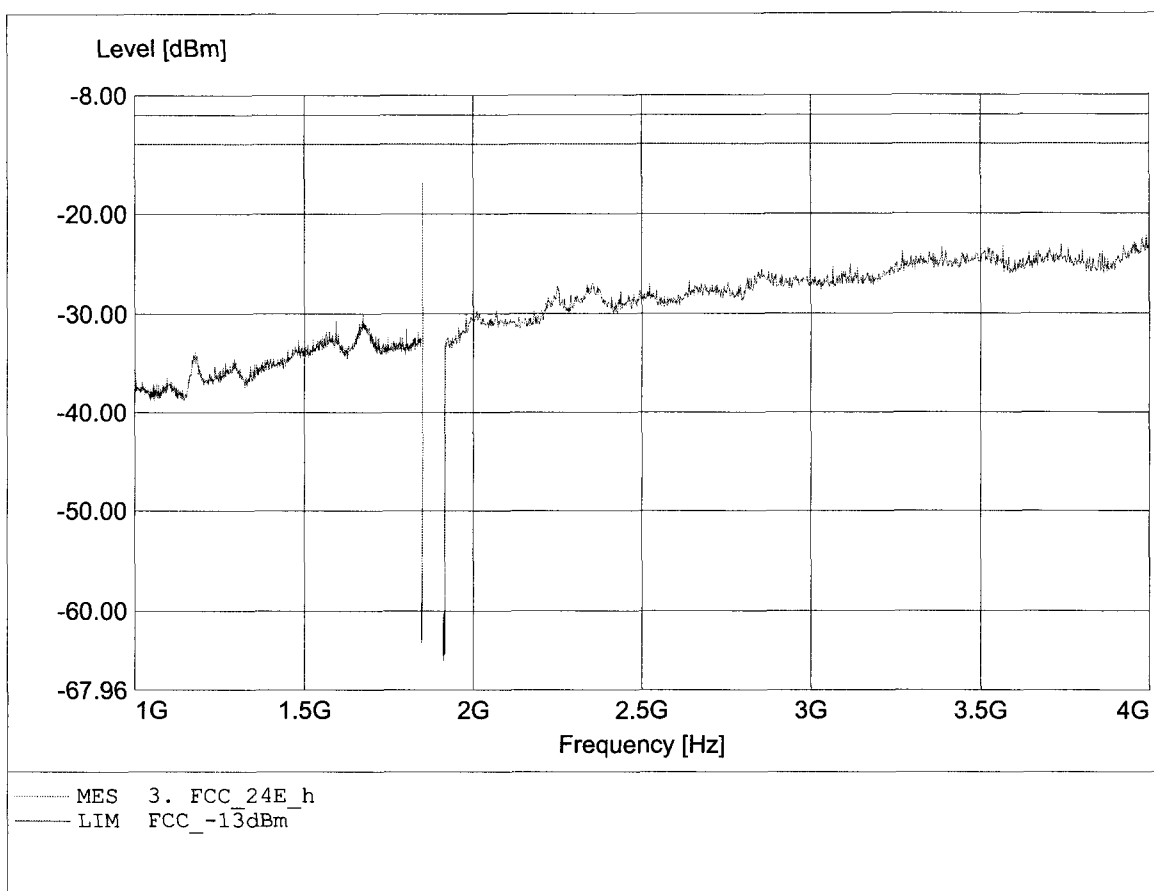


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -34.77dBm, RBW: 1MHz

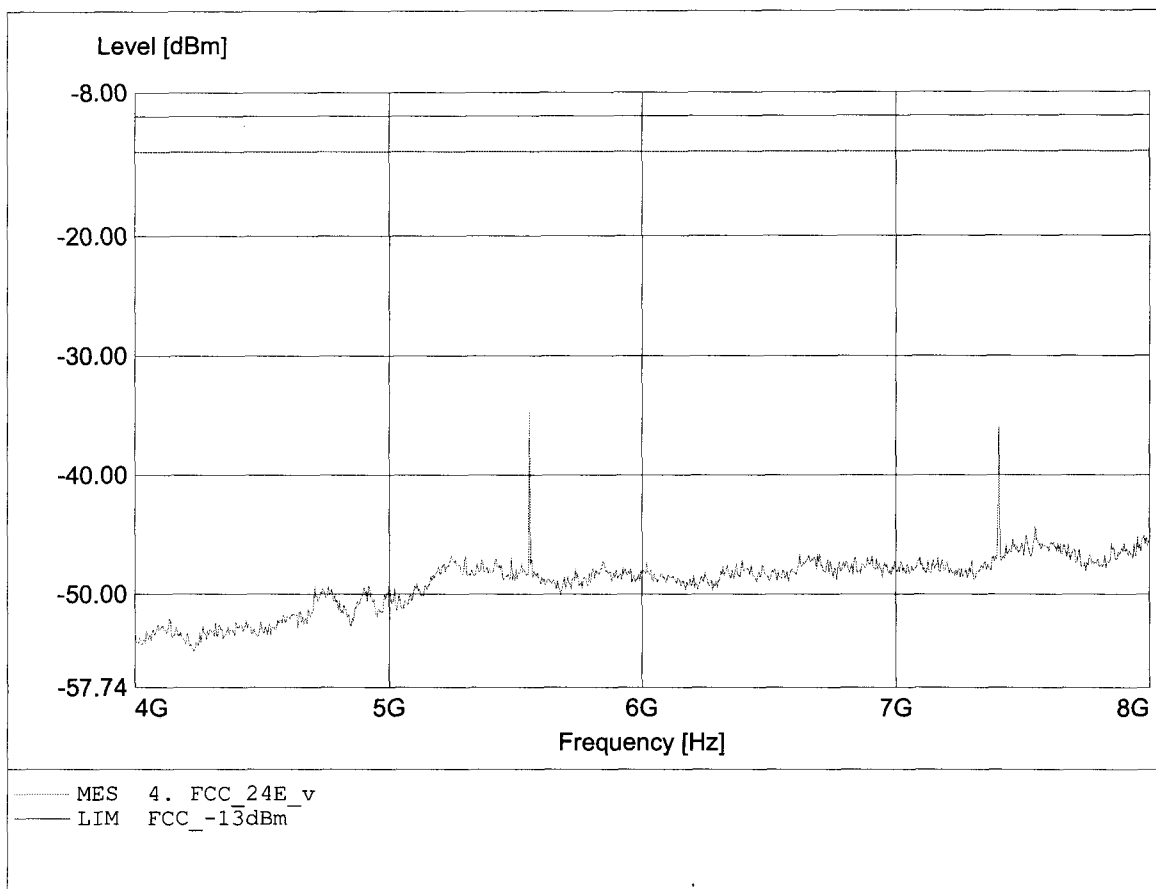


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.404GHz, Pmax: -33.18dBm, RBW: 1MHz

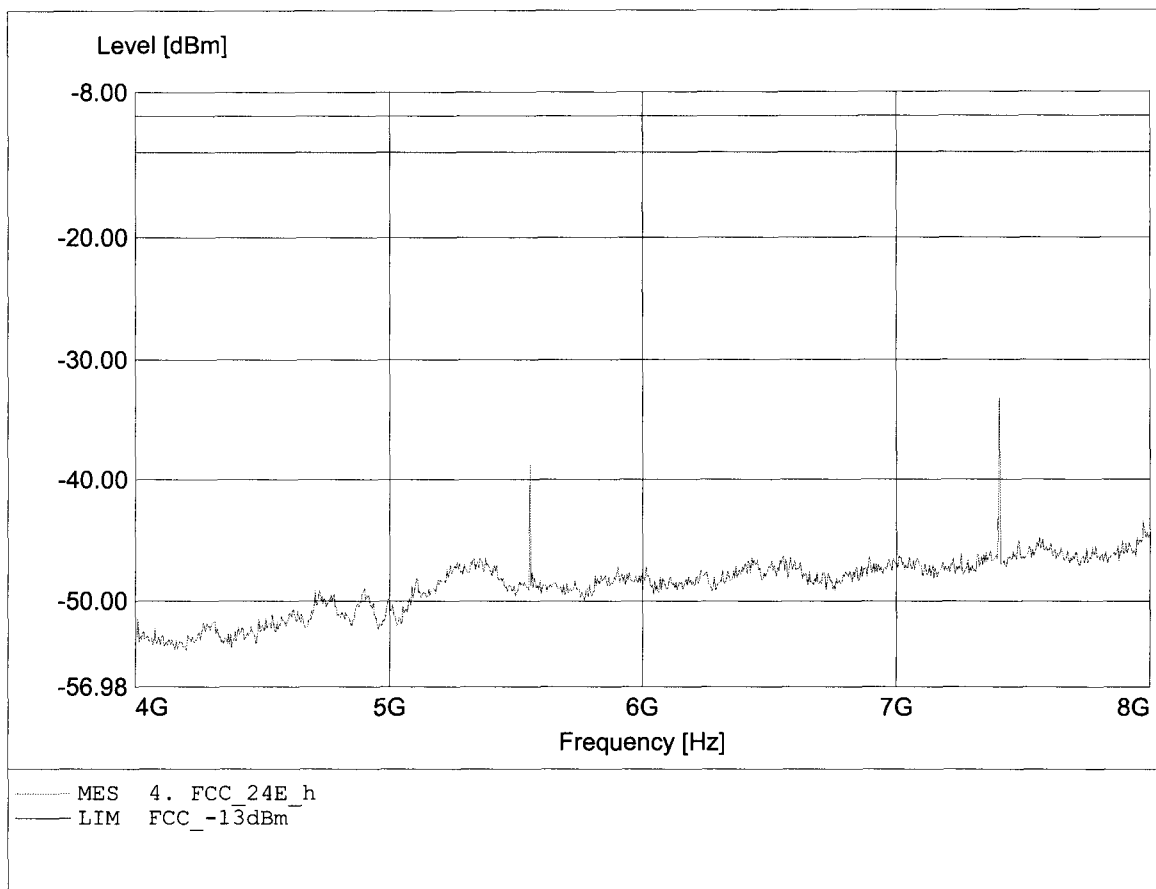


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -33.36dBm, RBW: 1MHz

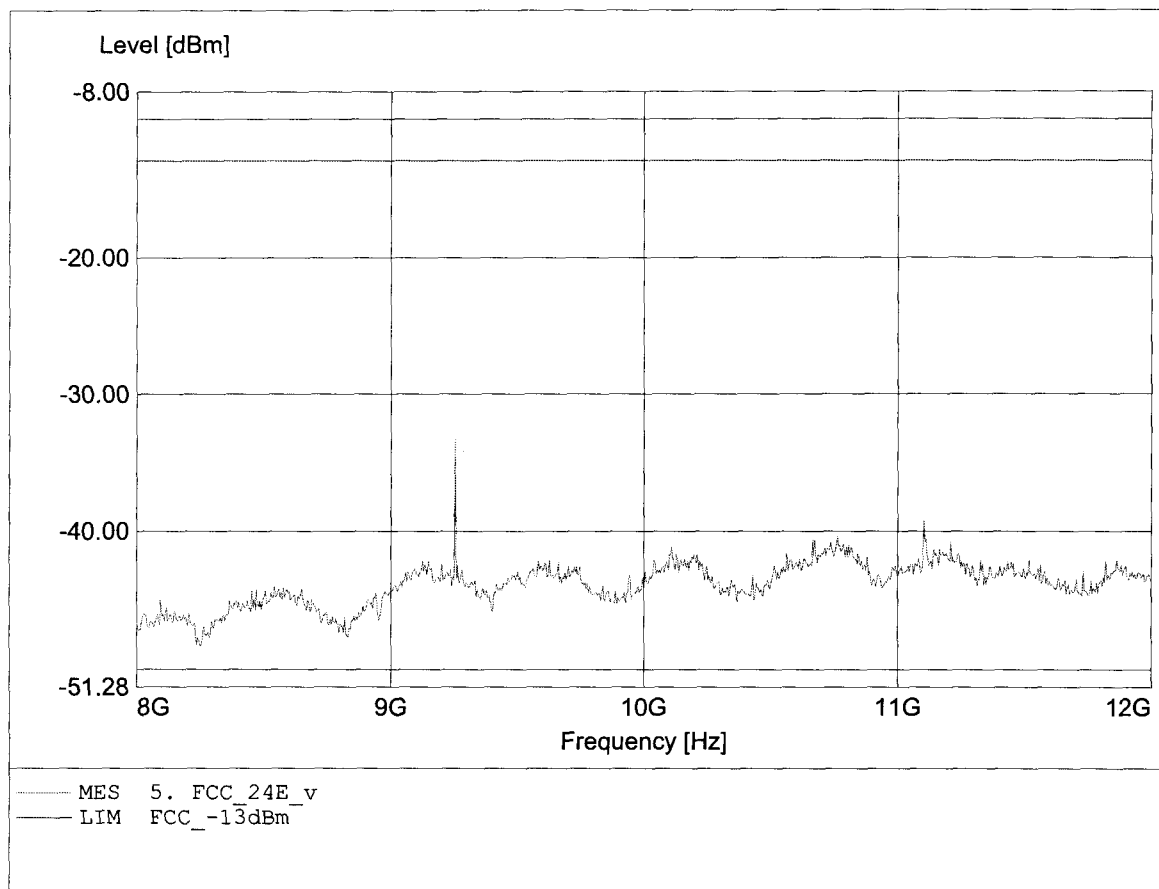


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -35.76dBm, RBW: 1MHz

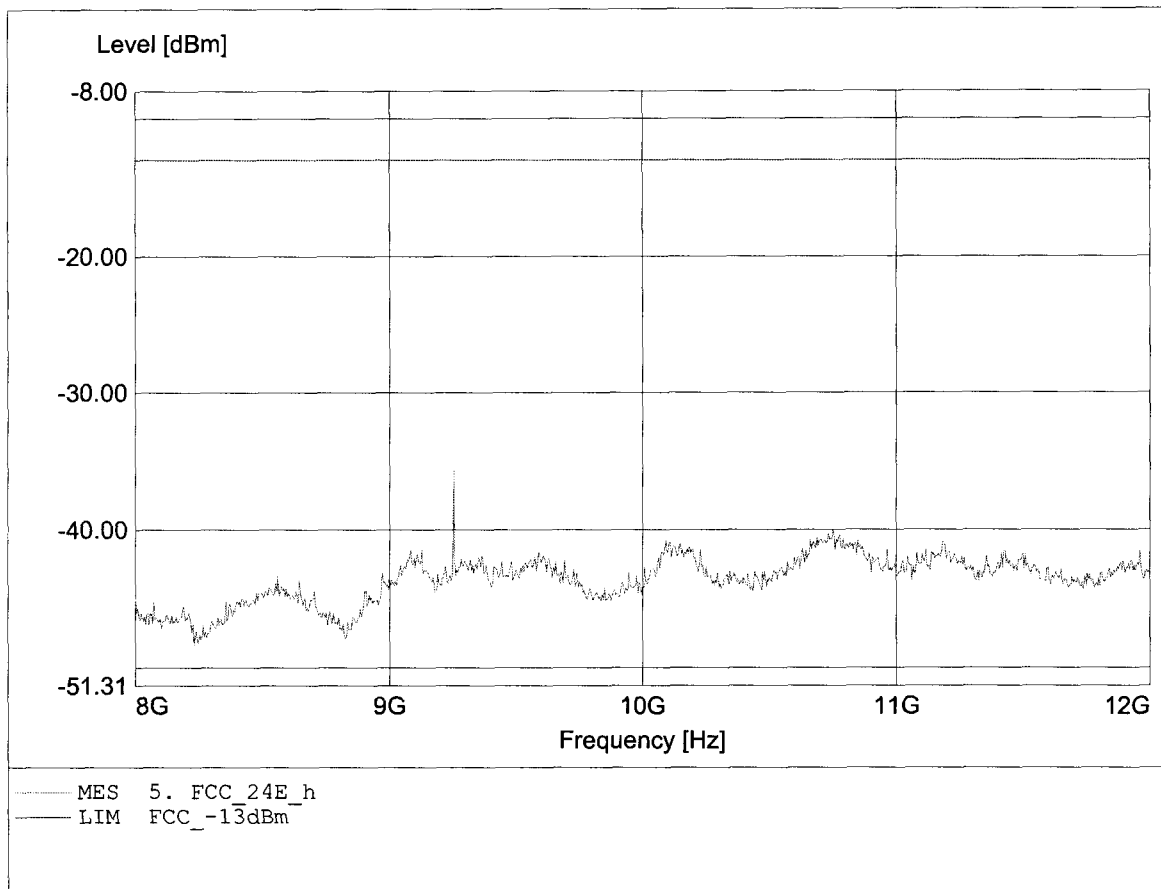


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.460GHz, Pmax: -31.54dBm, RBW: 1MHz

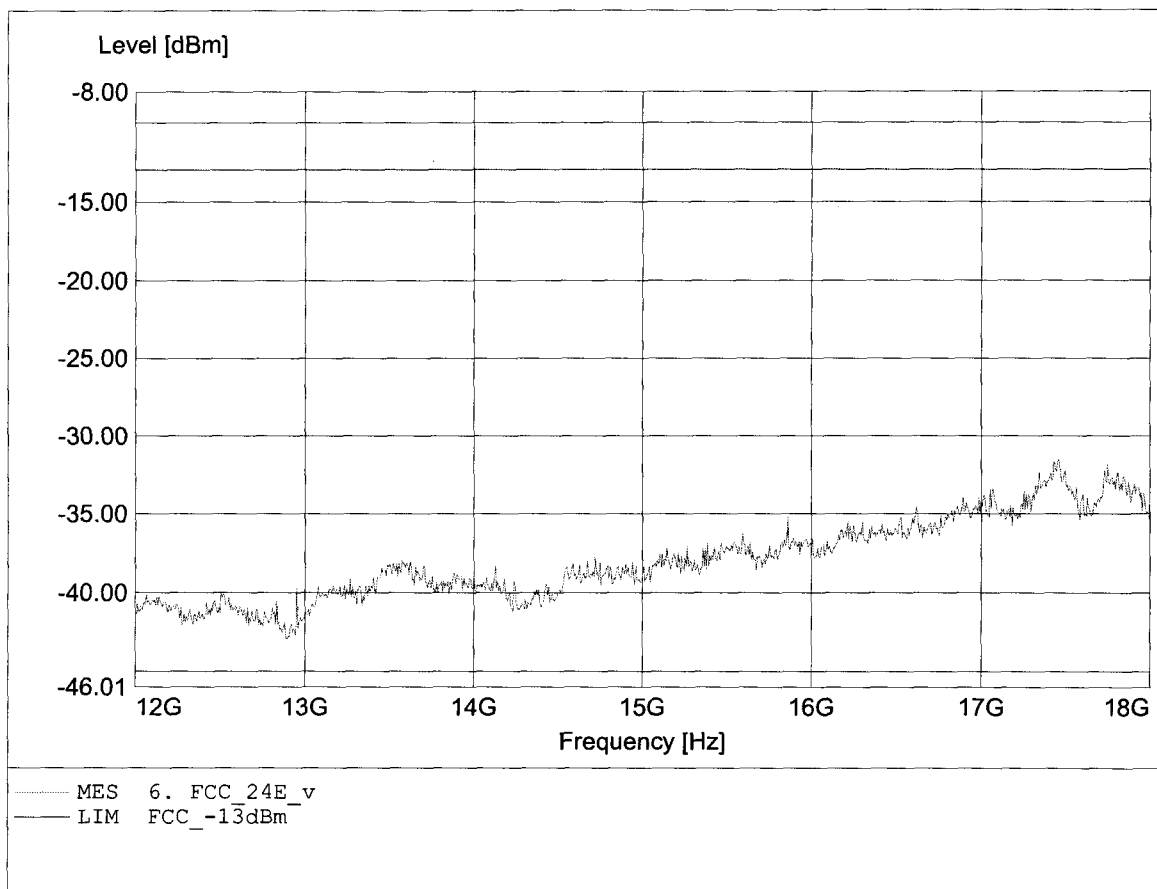


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.440GHz, Pmax: -31.20dBm, RBW: 1MHz

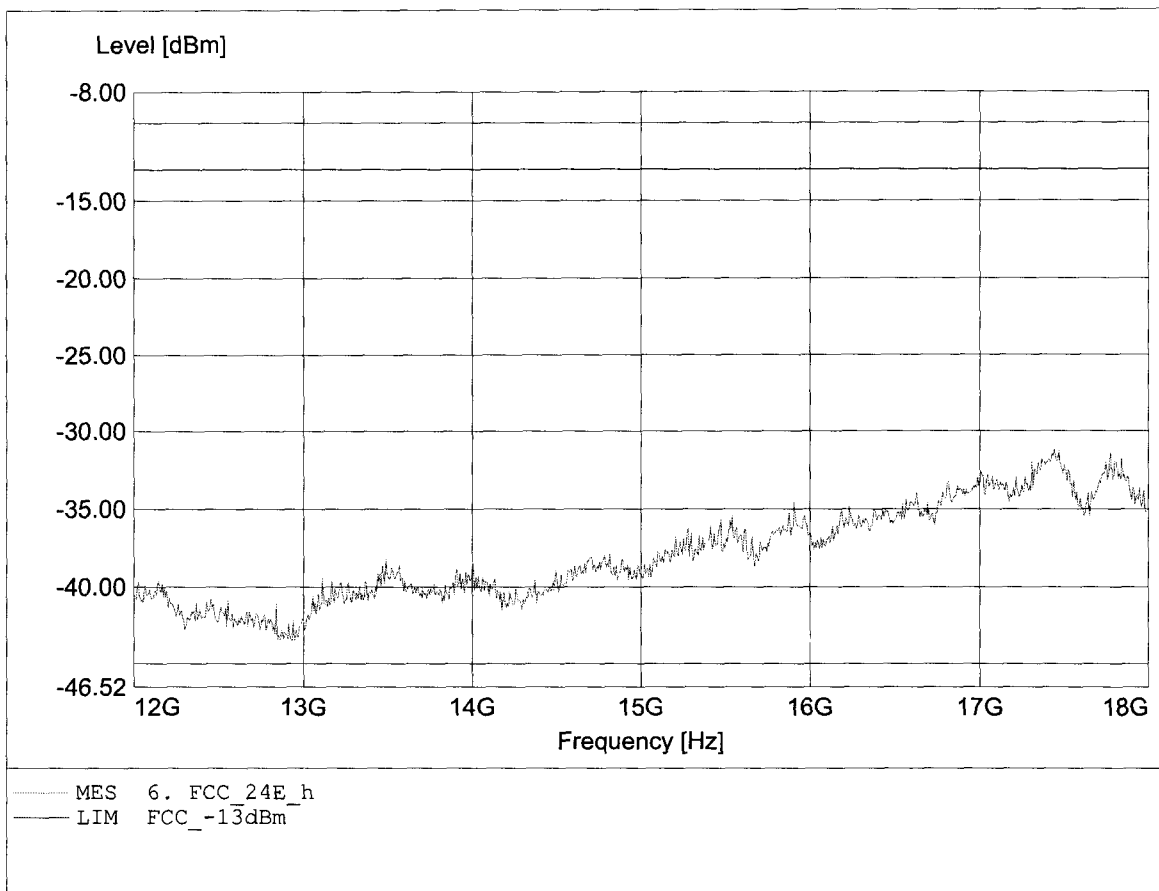


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.501GHz, Pmax: -24.84dBm, RBW: 1MHz

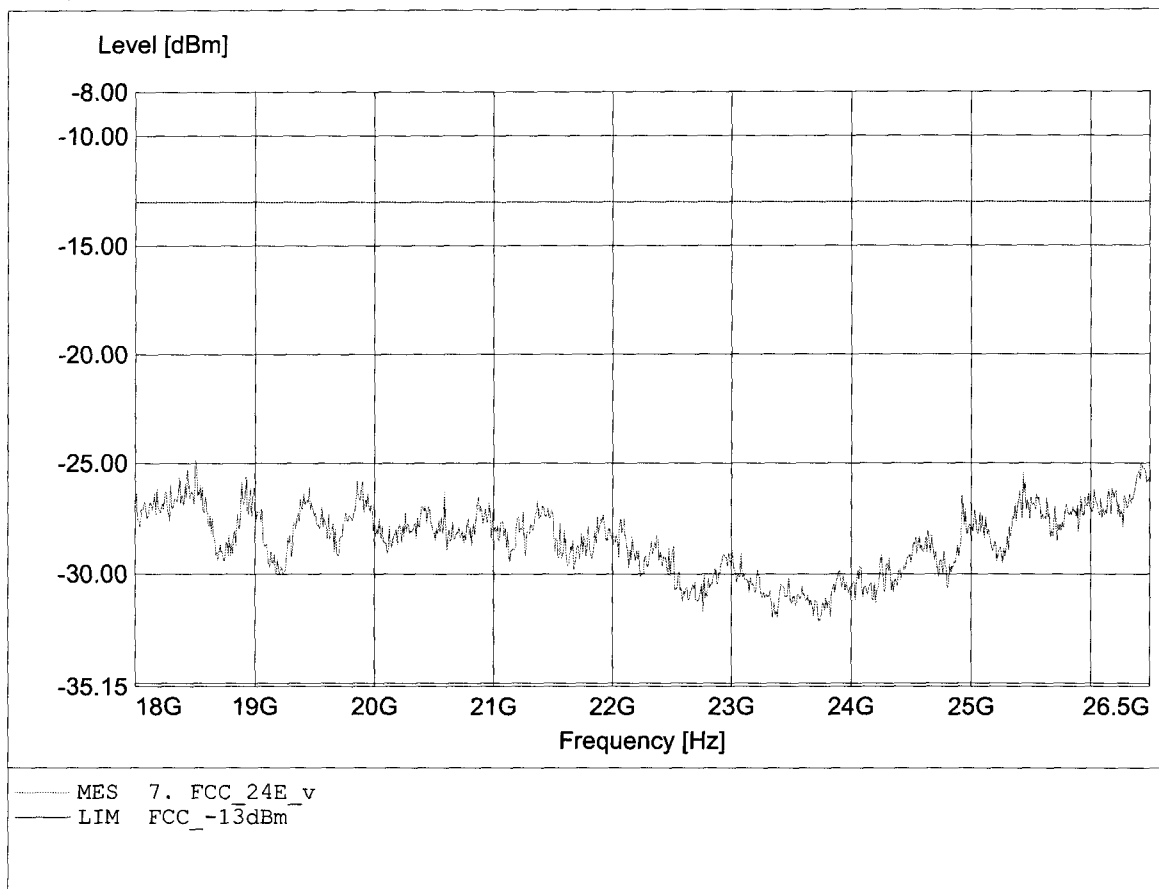


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.377GHz, Pmax: -25.19dBm, RBW: 1MHz

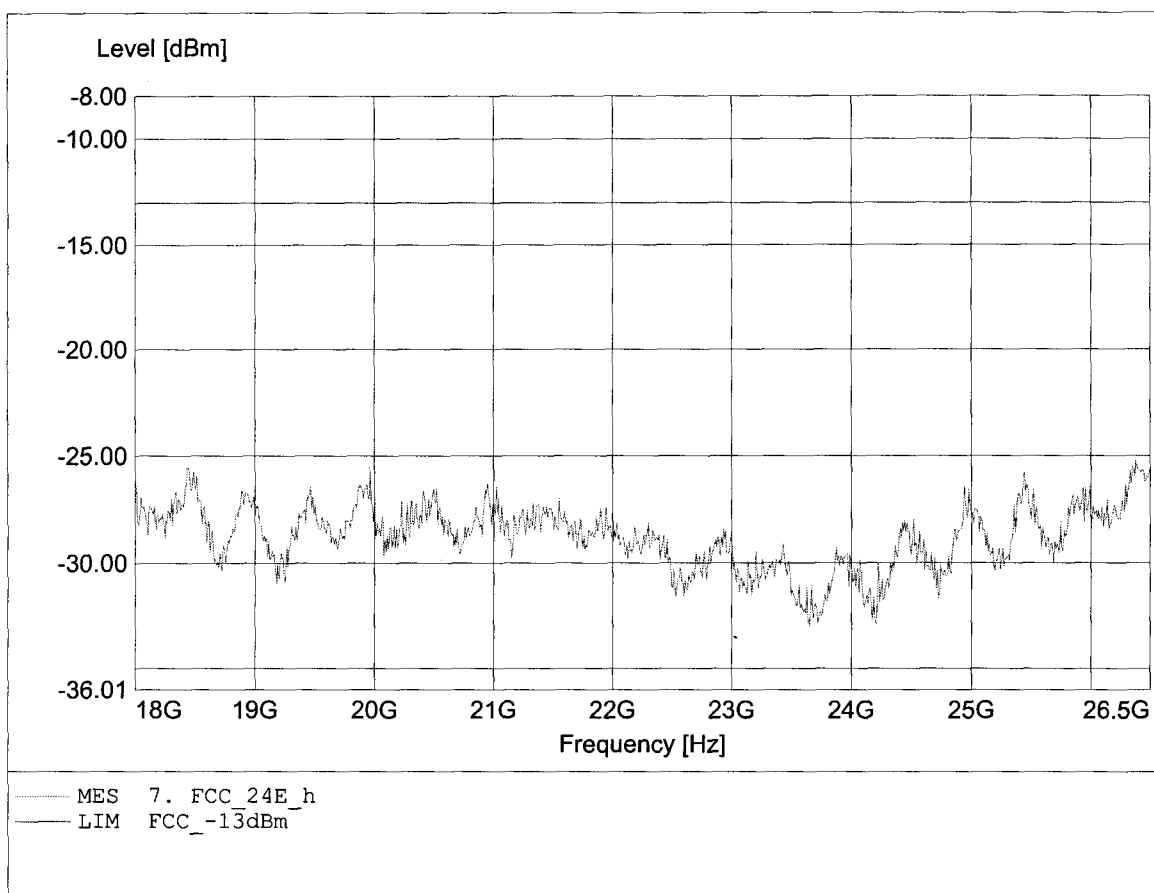


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 76.844MHz, Pmax: -51.41dBm, RBW: 1MHz

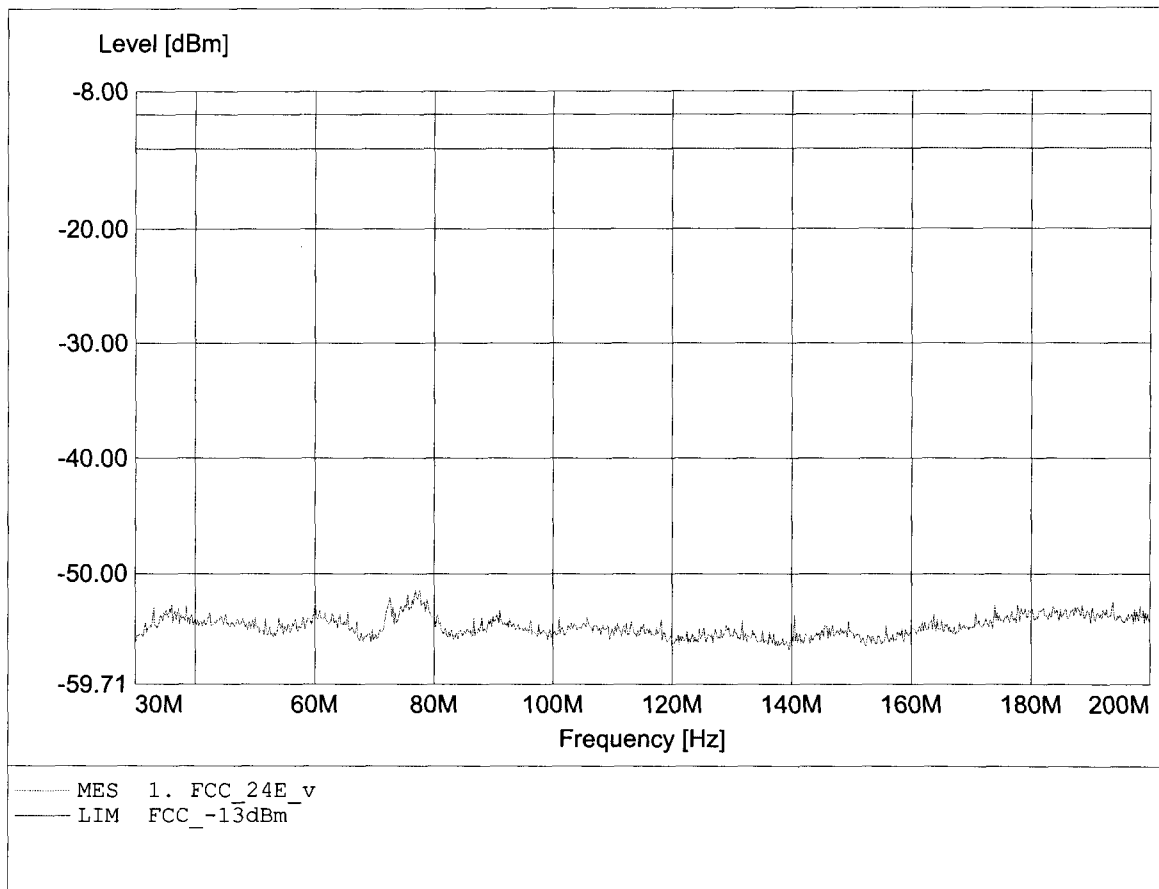


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 75.522MHz, Pmax: -51.53dBm, RBW: 1MHz

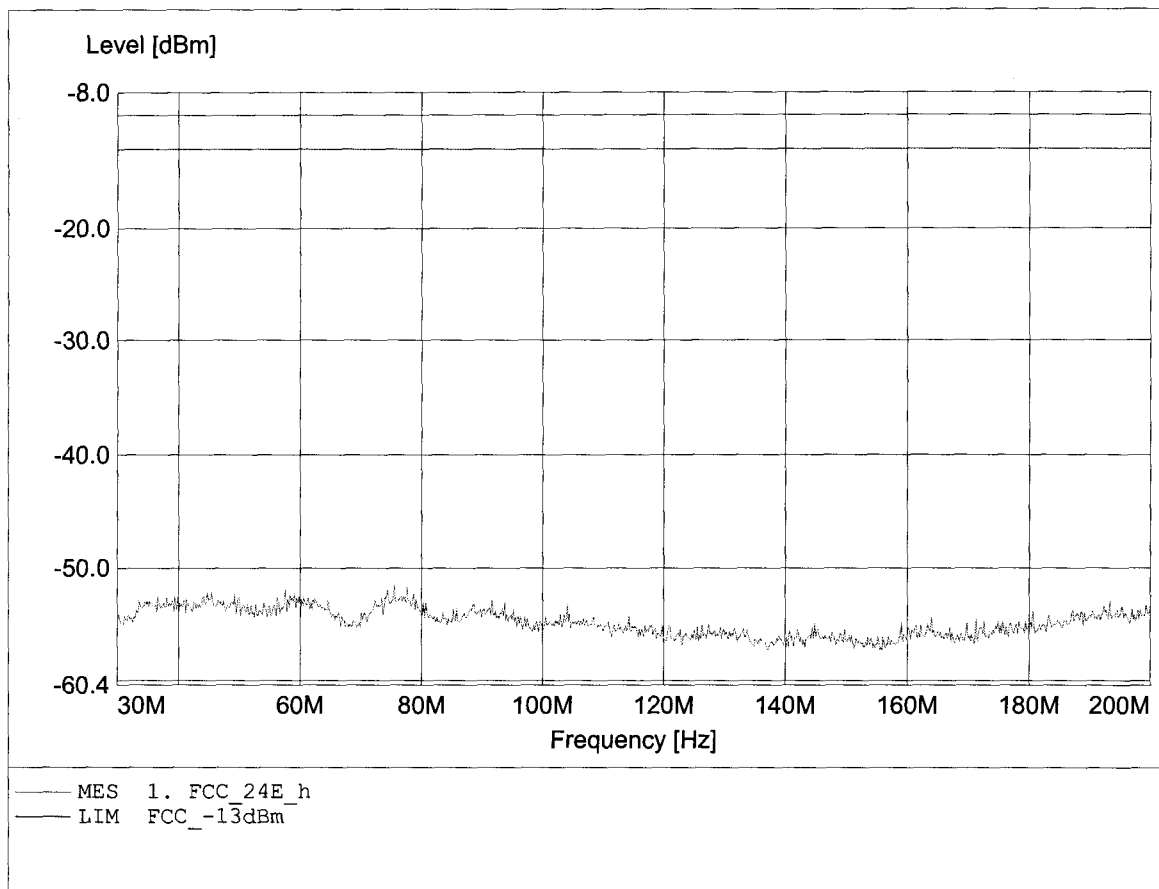


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 992.889MHz, Pmax: -39.90dBm, RBW: 1MHz

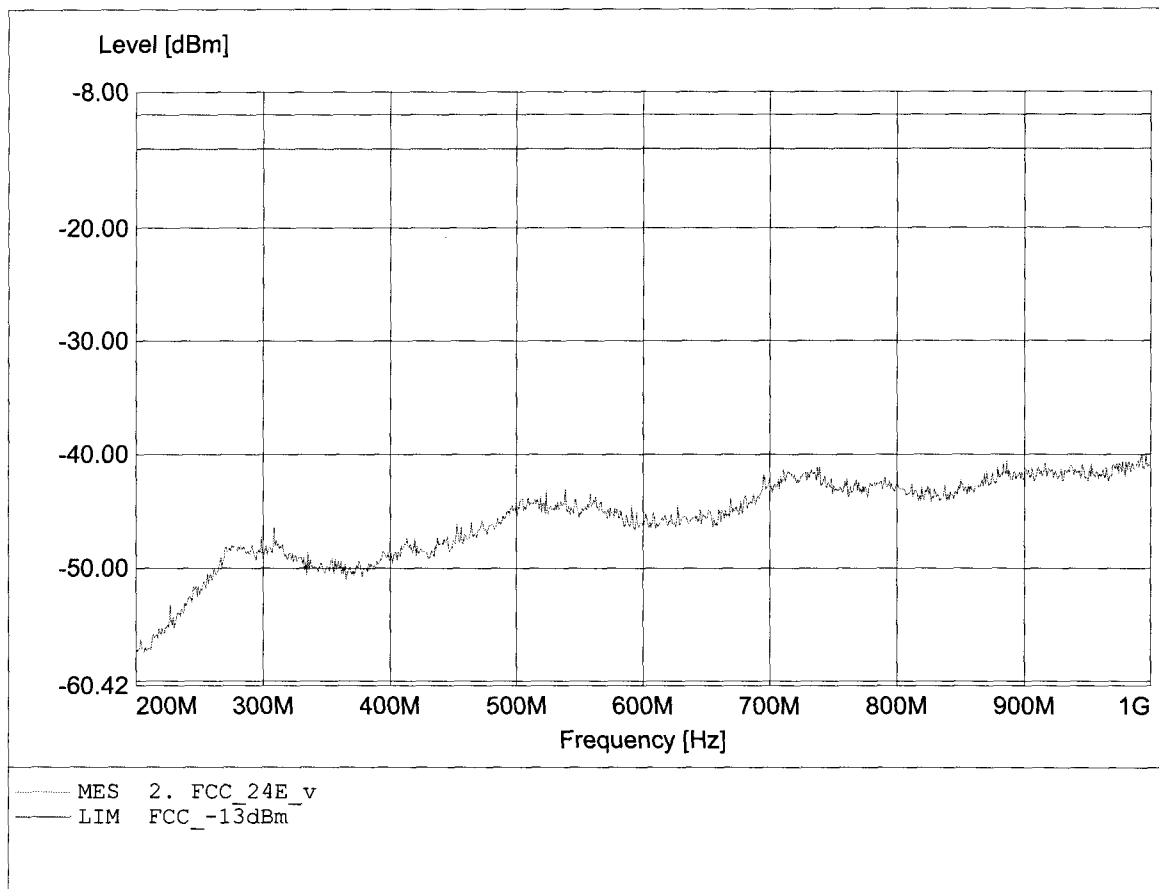


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 864.000MHz, Pmax: -38.70dBm, RBW: 1MHz

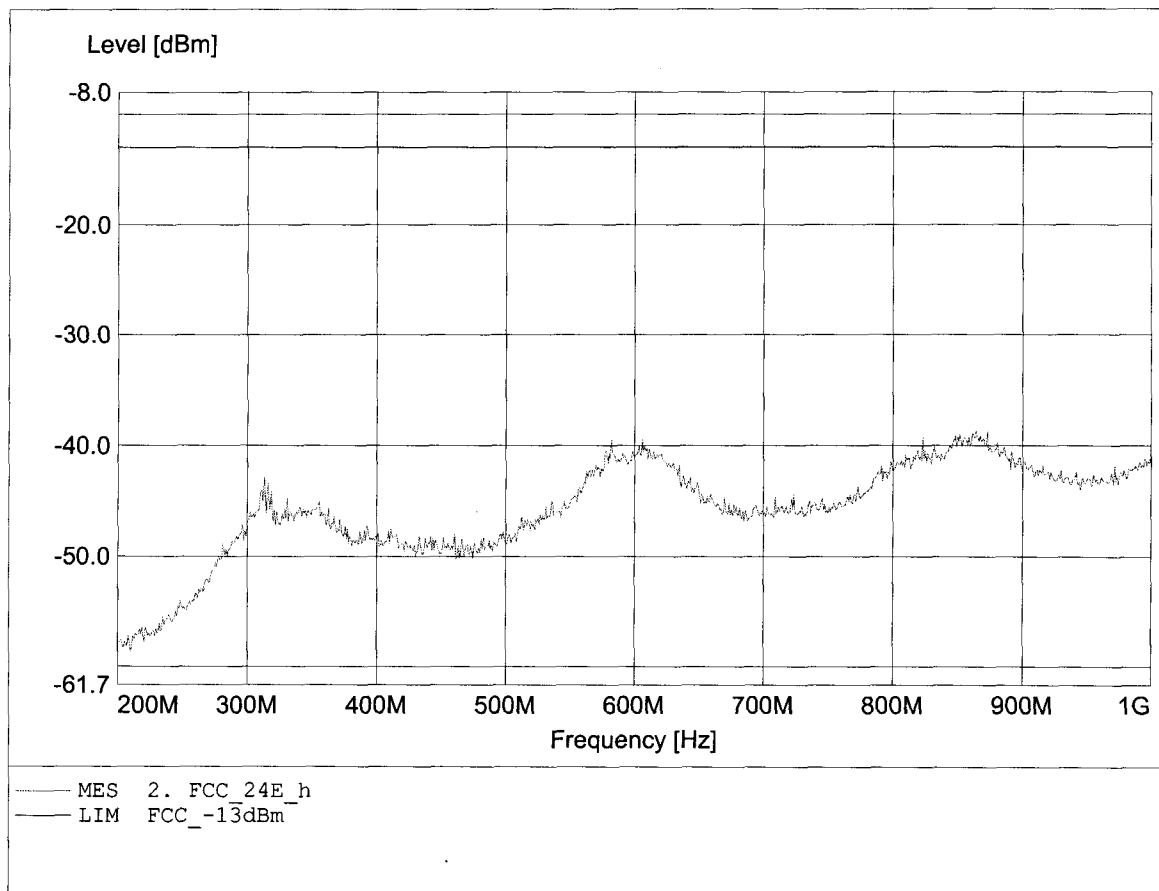


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.947GHz, Pmax: -22.85dBm, RBW: 1MHz/3kHz

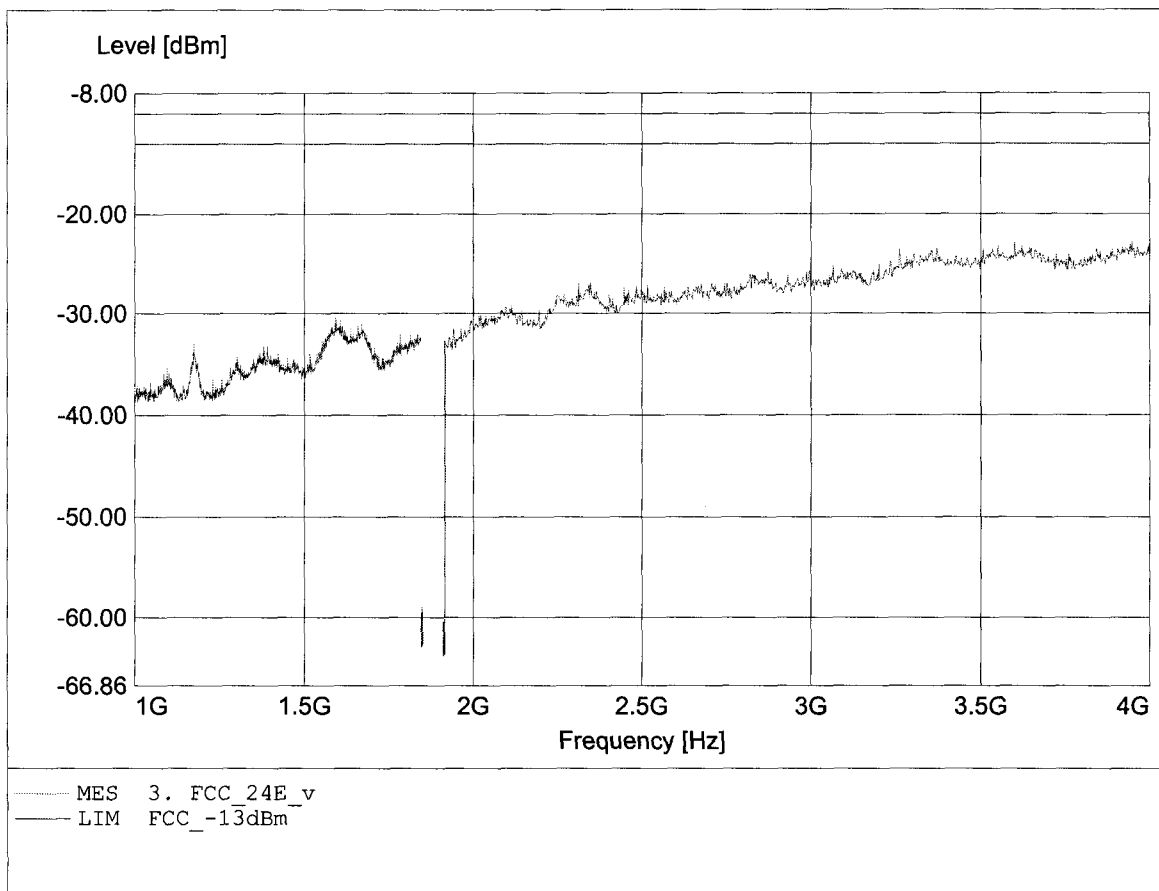


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 4.000GHz, Pmax: -22.14dBm, RBW: 1MHz/3kHz

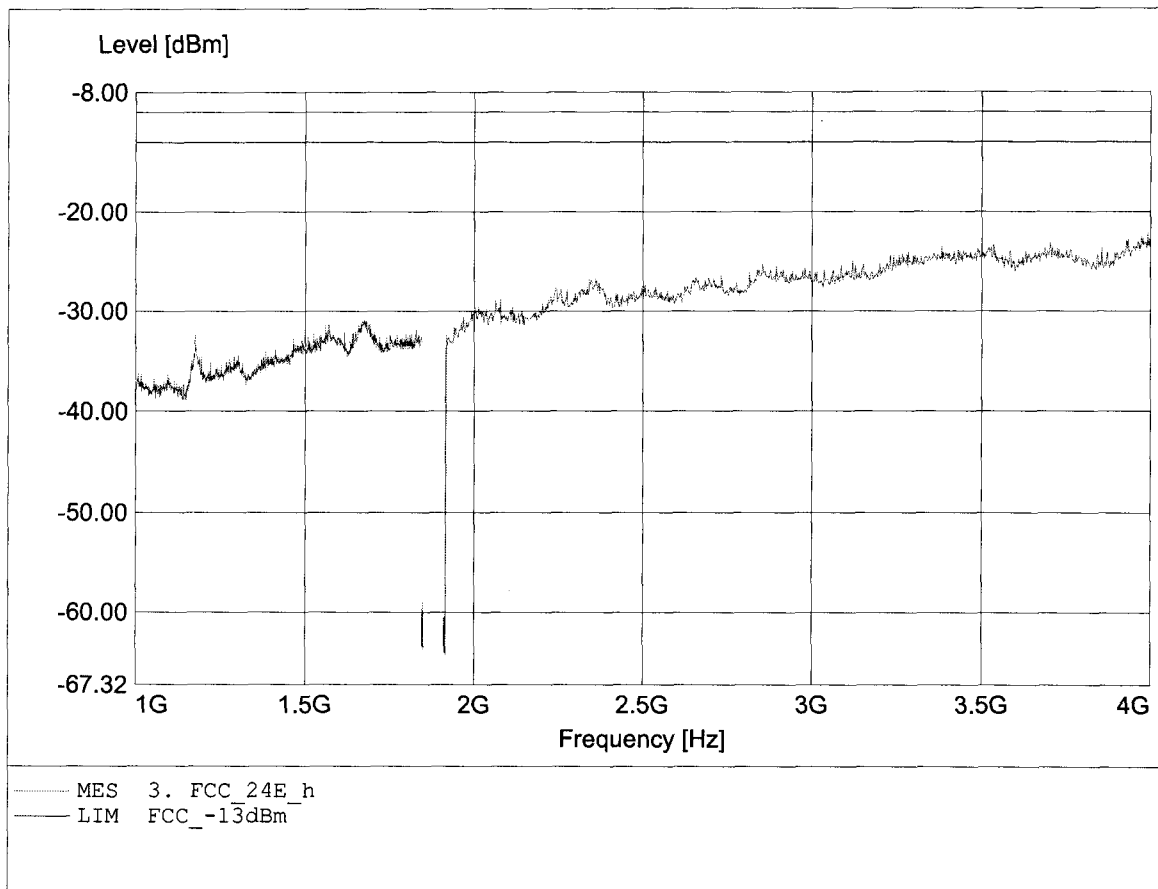


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.644GHz, Pmax: -34.75dBm, RBW: 1MHz

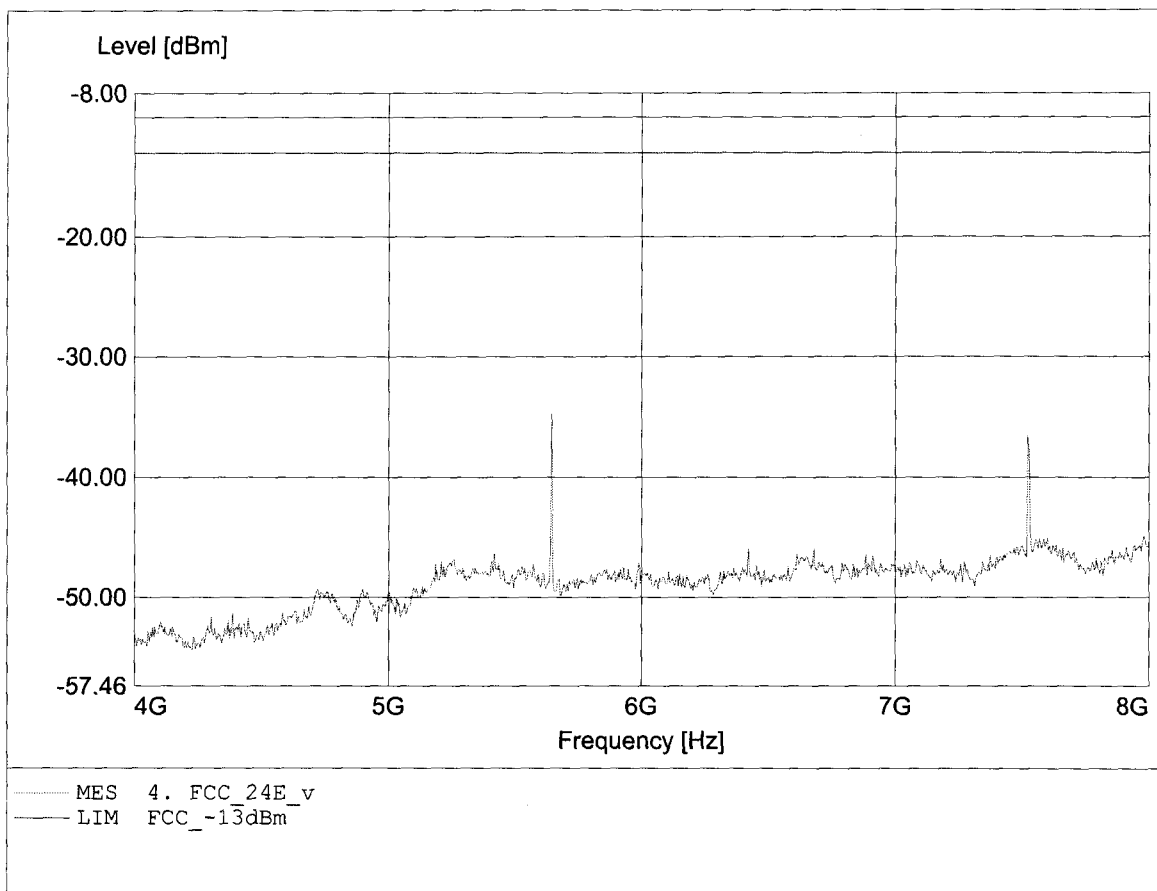


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.520GHz, Pmax: -35.22dBm, RBW: 1MHz

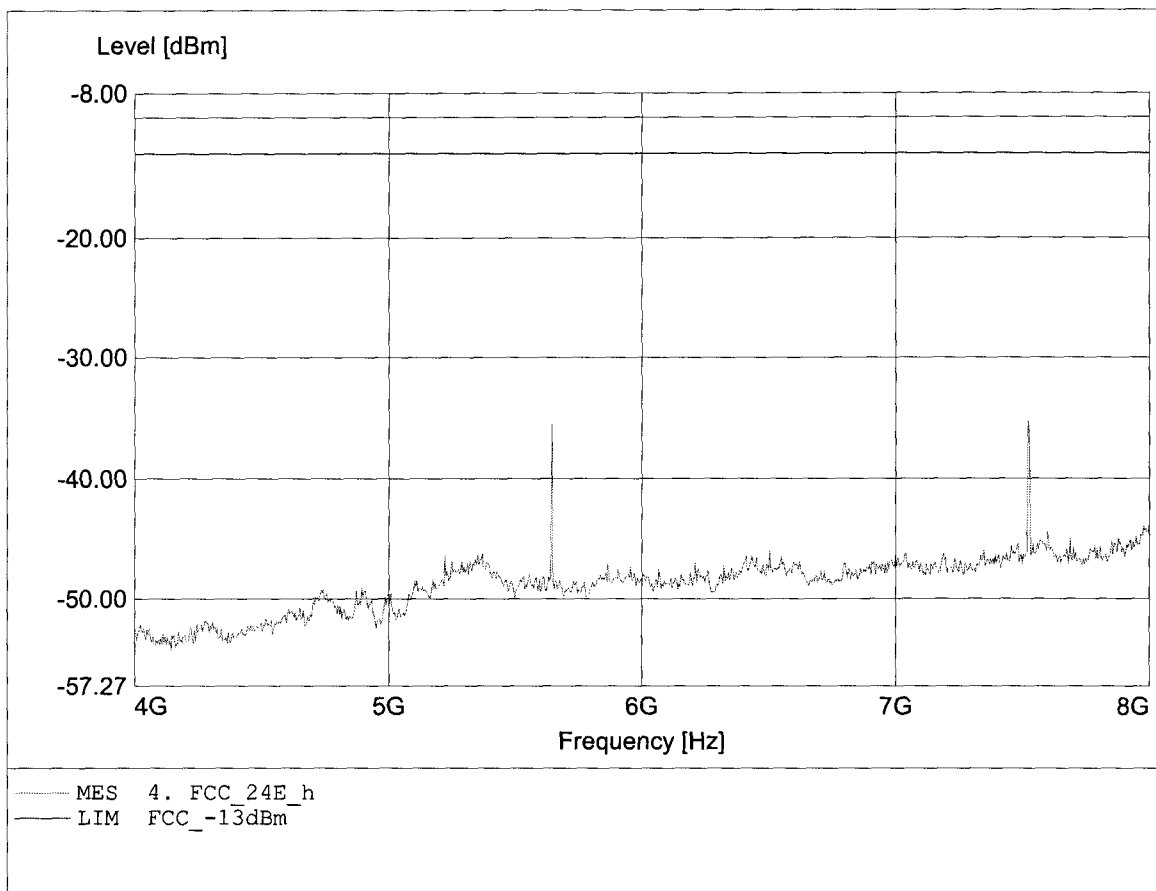


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -35.21dBm, RBW: 1MHz

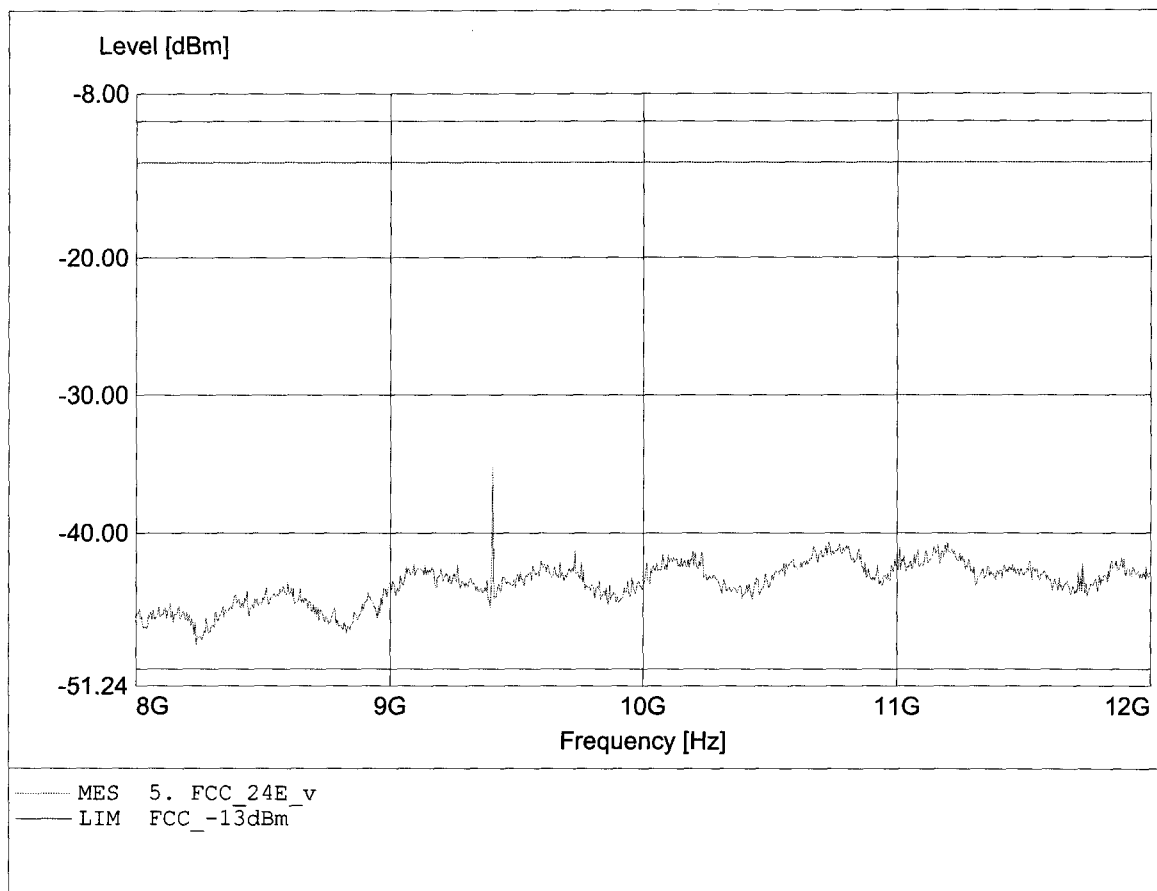


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -38.70dBm, RBW: 1MHz

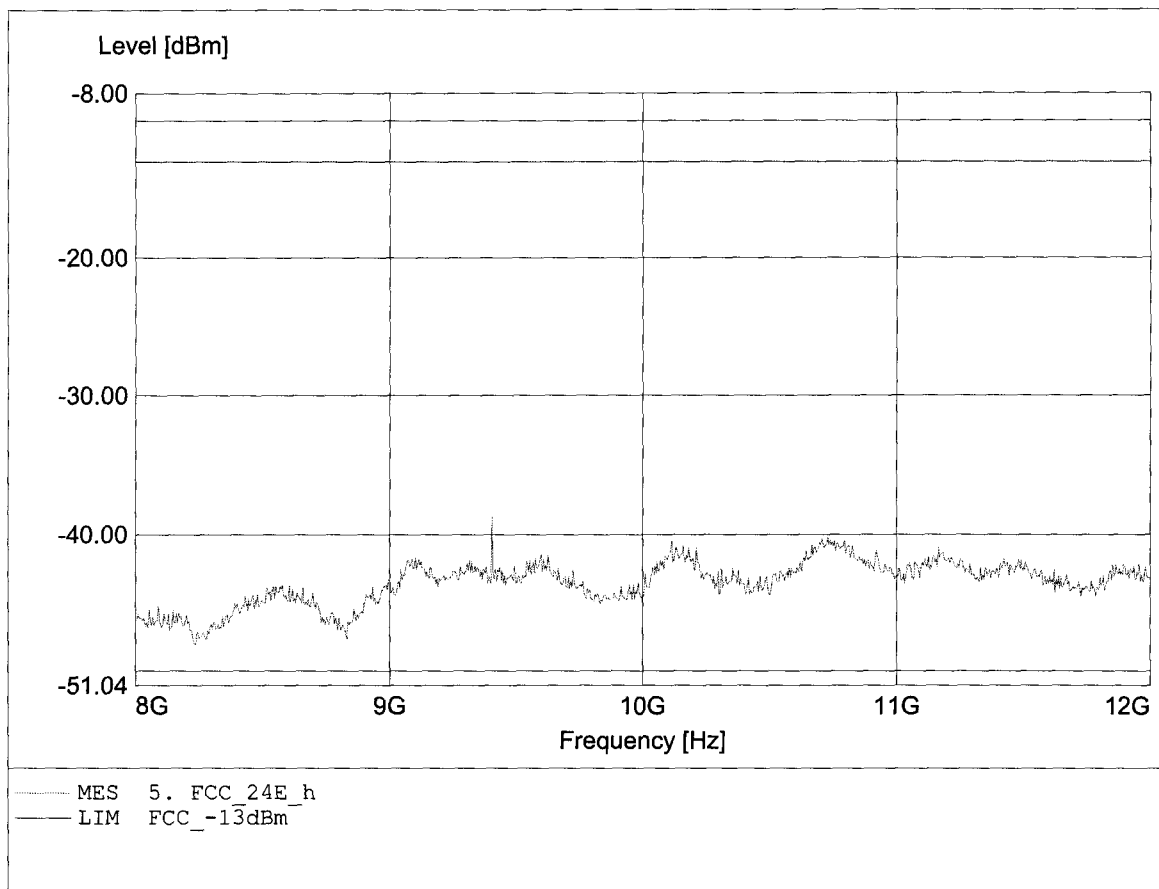


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.460GHz, Pmax: -31.13dBm, RBW: 1MHz

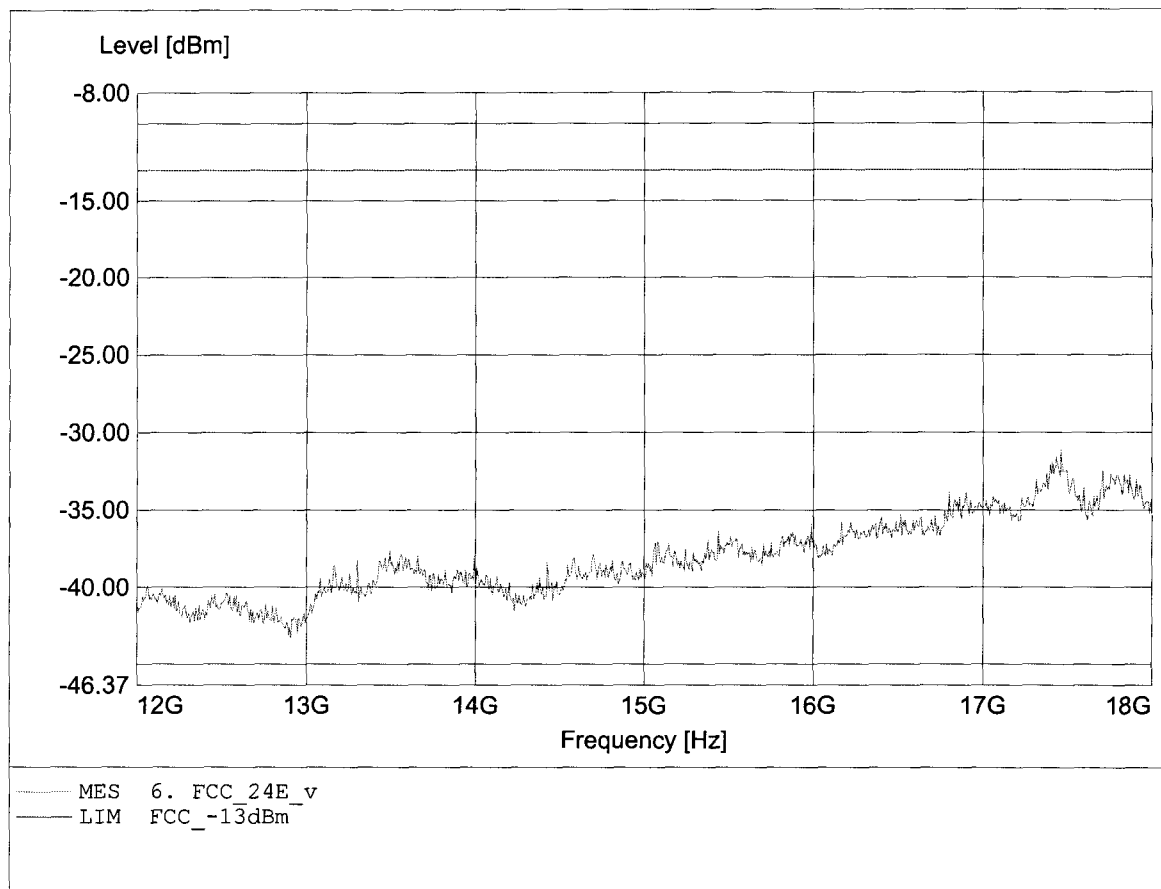


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.433GHz, Pmax: -31.08dBm, RBW: 1MHz

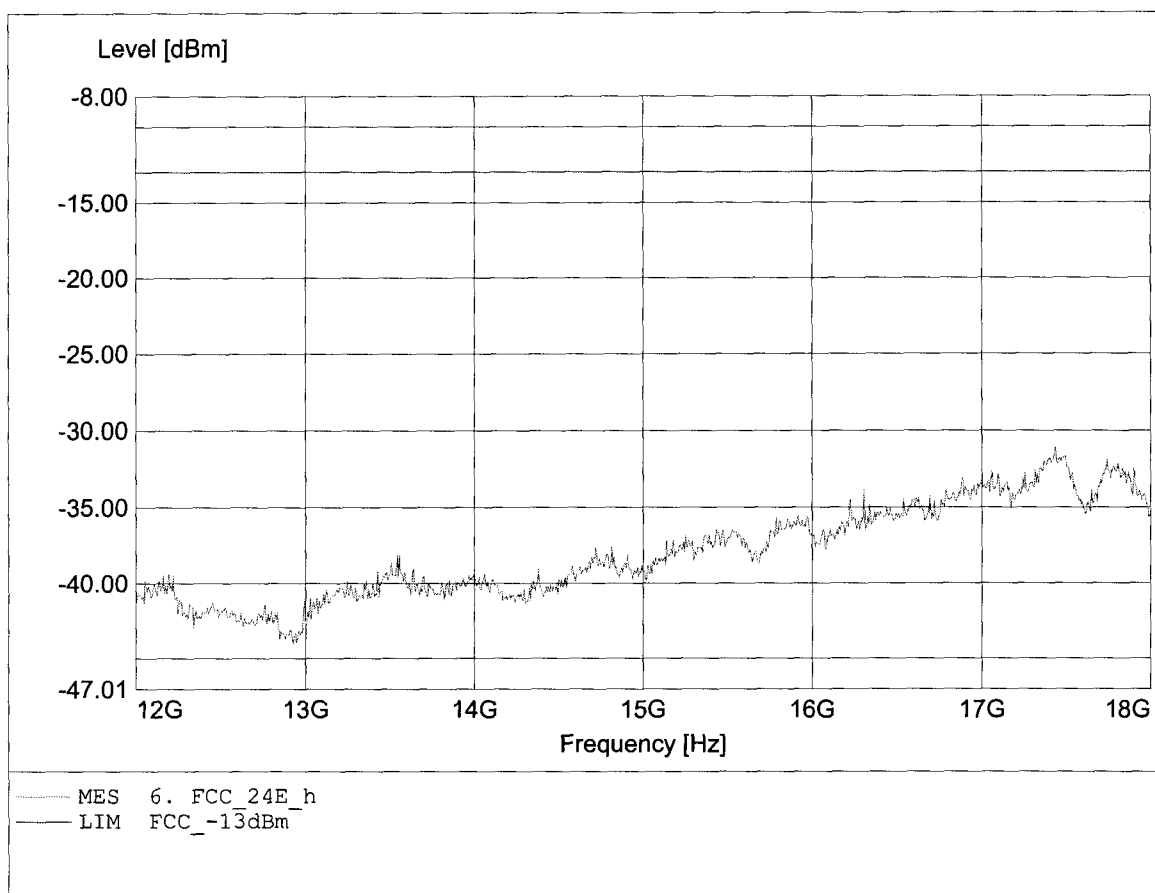


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.462GHz, Pmax: -24.71dBm, RBW: 1MHz

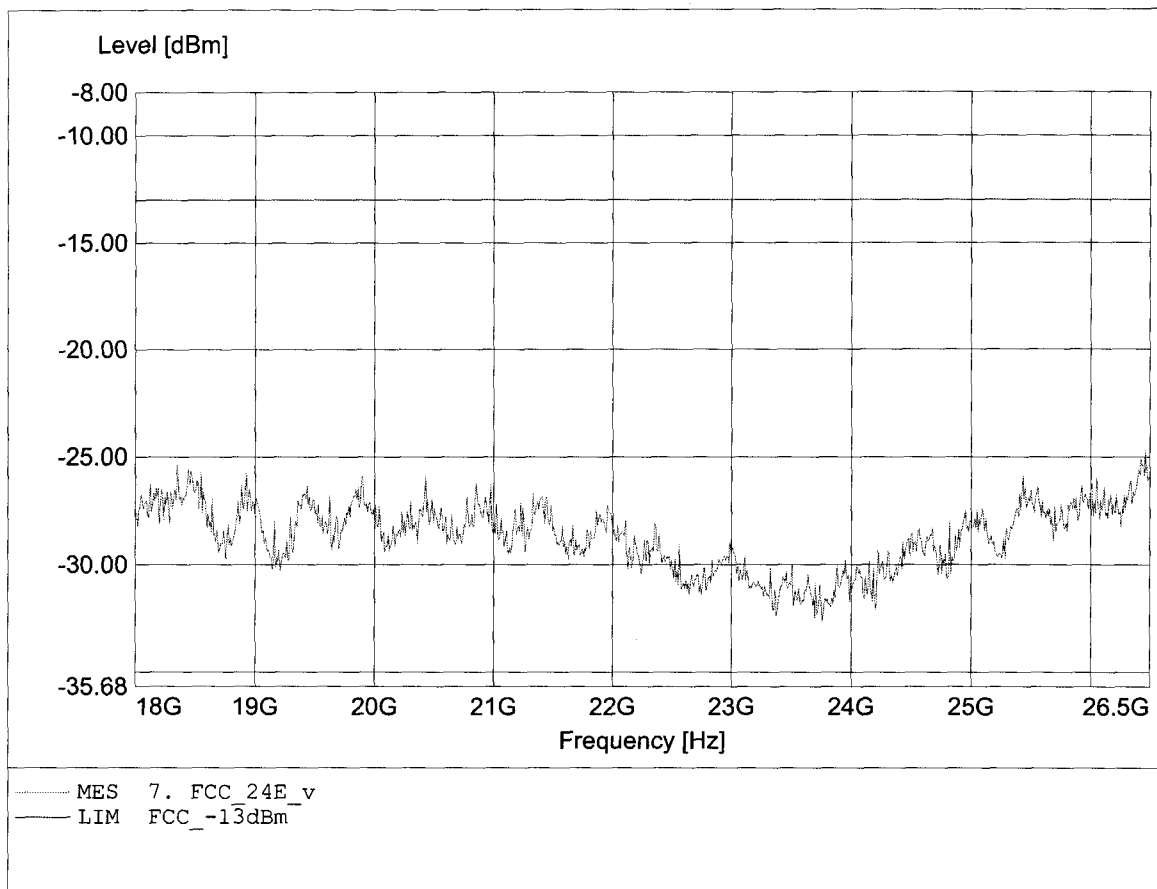


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.331GHz, Pmax: -24.56dBm, RBW: 1MHz

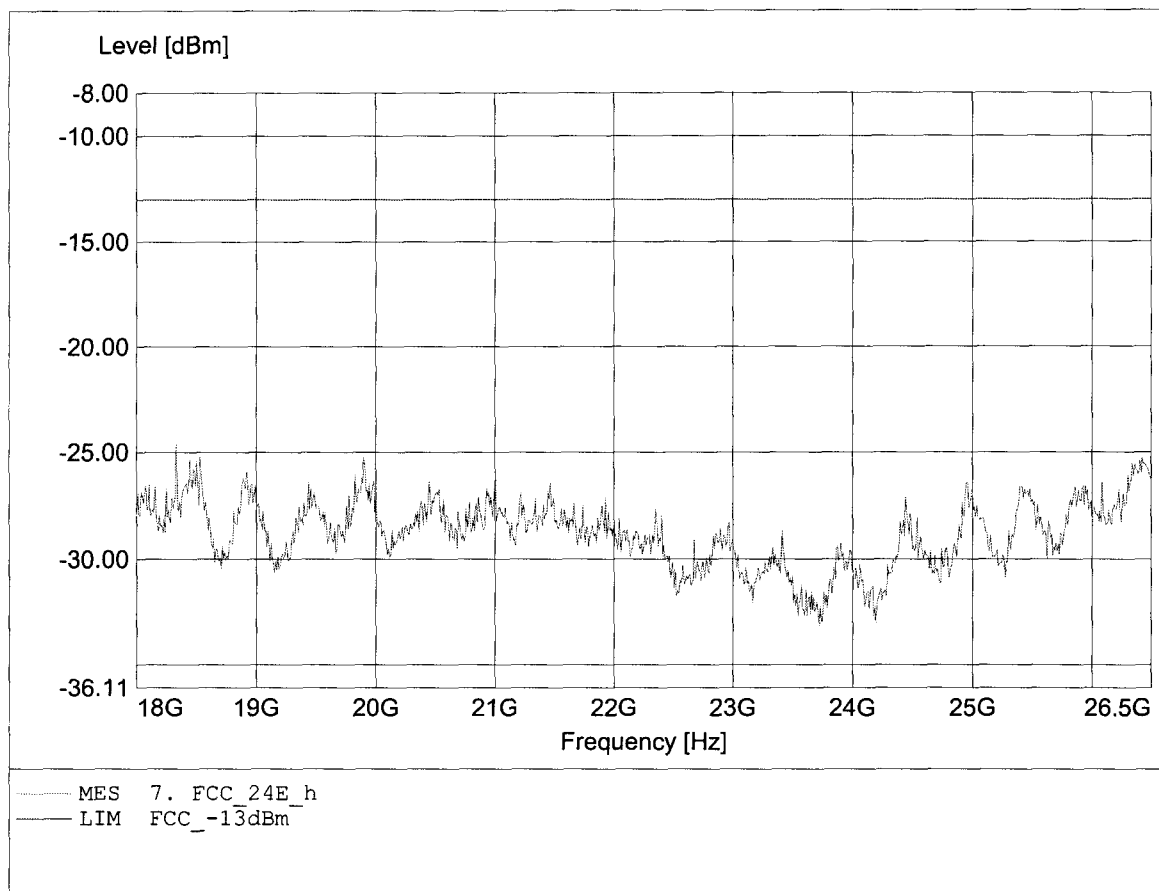


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 77.222MHz, Pmax: -50.77dBm, RBW: 1MHz

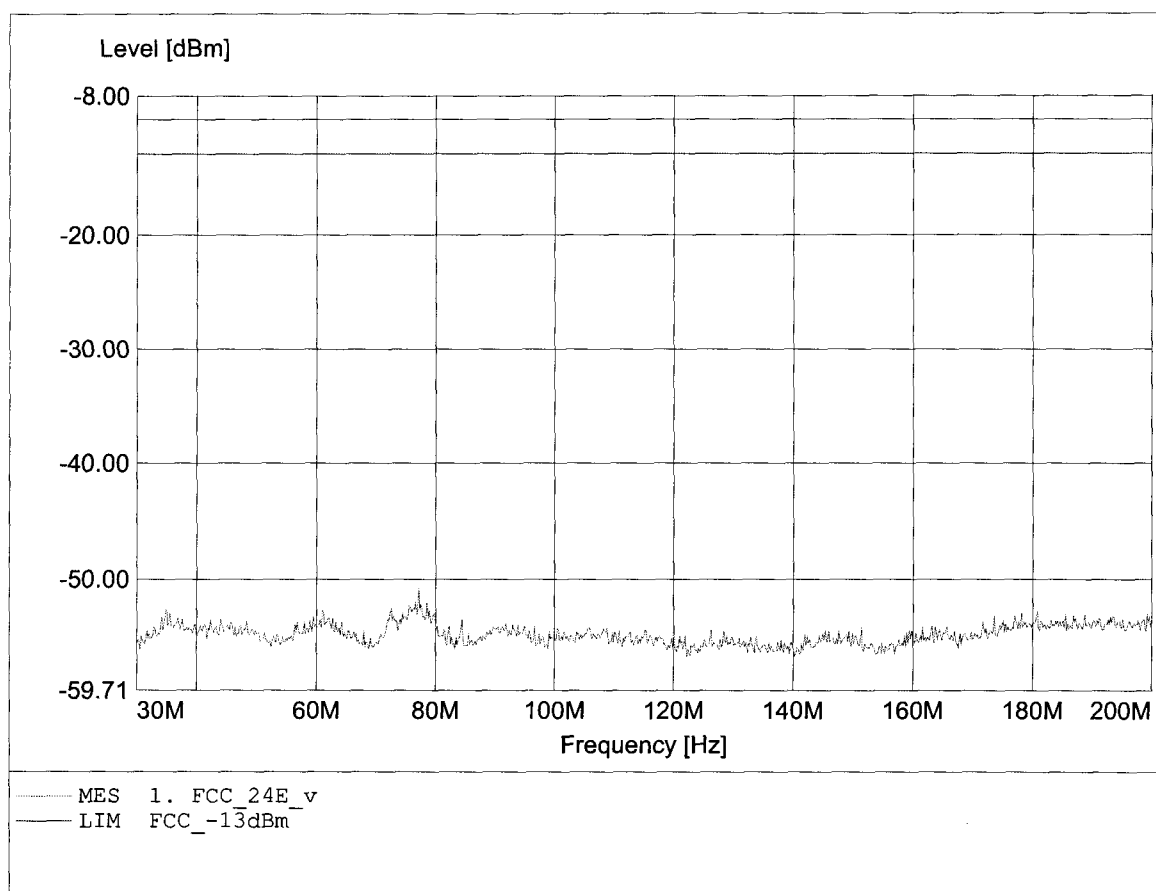


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 74.956MHz, Pmax: -52.14dBm, RBW: 1MHz

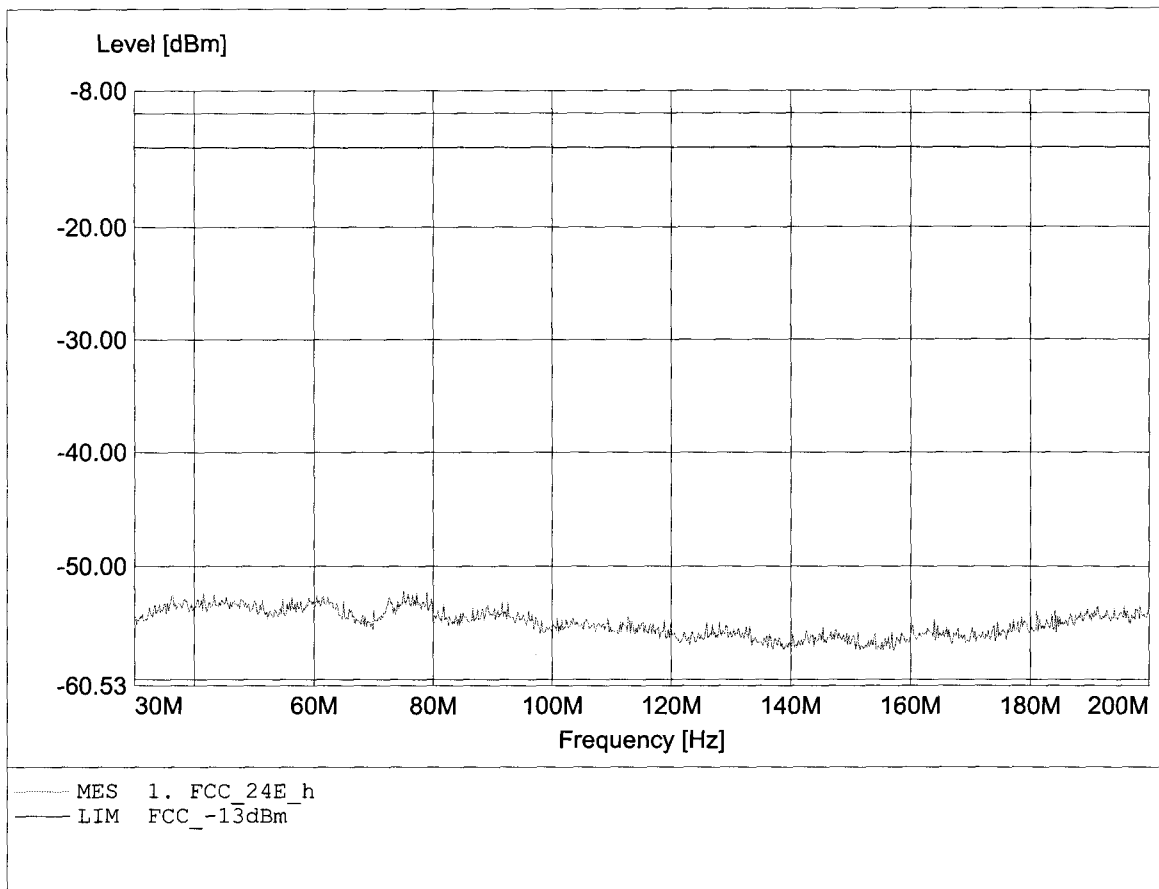


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 975.111MHz, Pmax: -39.86dBm, RBW: 1MHz

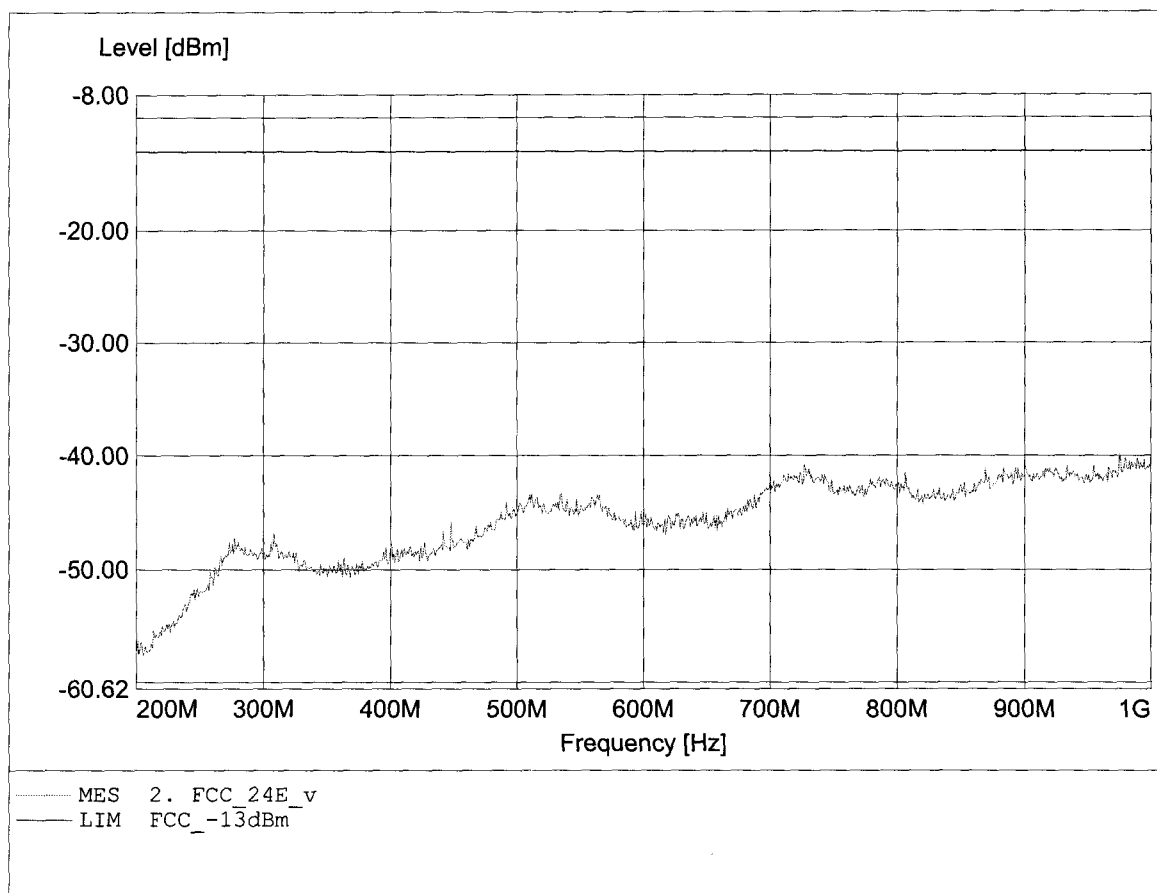


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 864.889MHz, Pmax: -38.69dBm, RBW: 1MHz

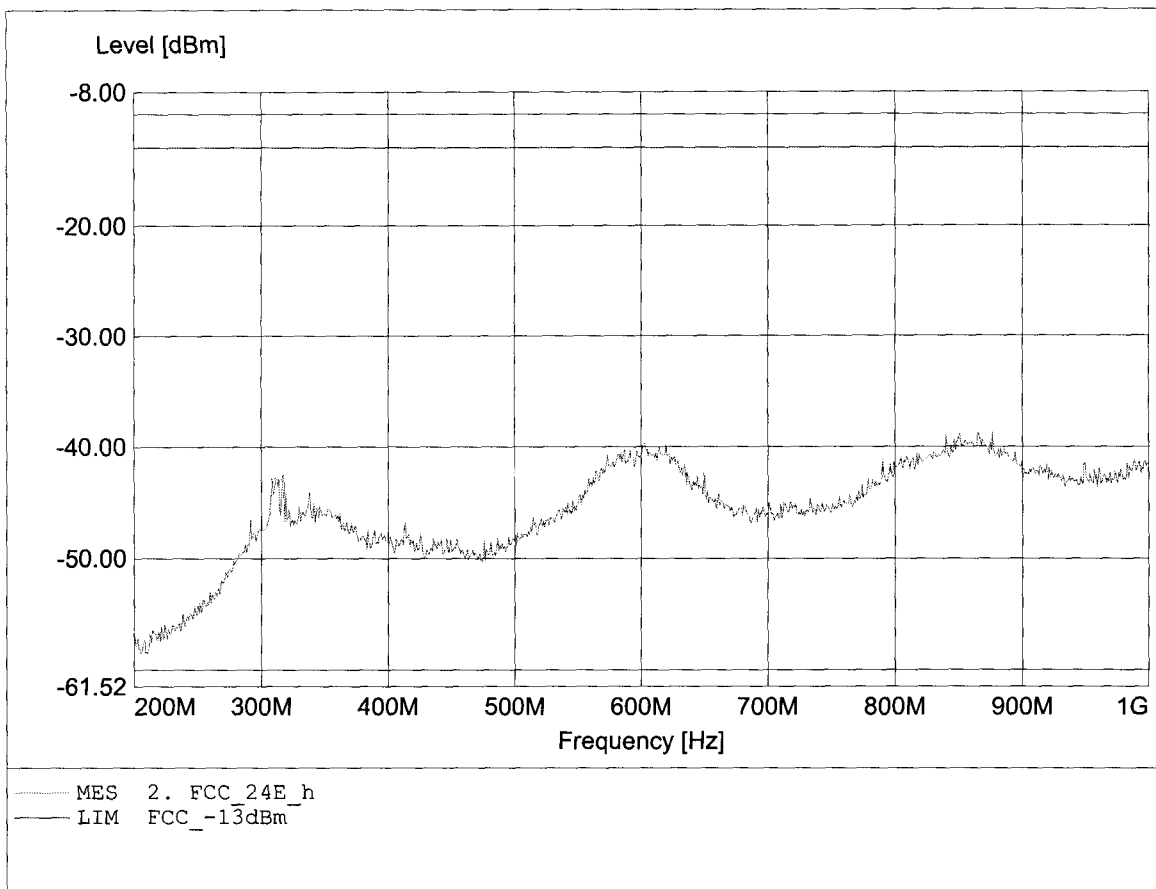


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.622GHz, Pmax: -22.75dBm, RBW: 1MHz/3kHz

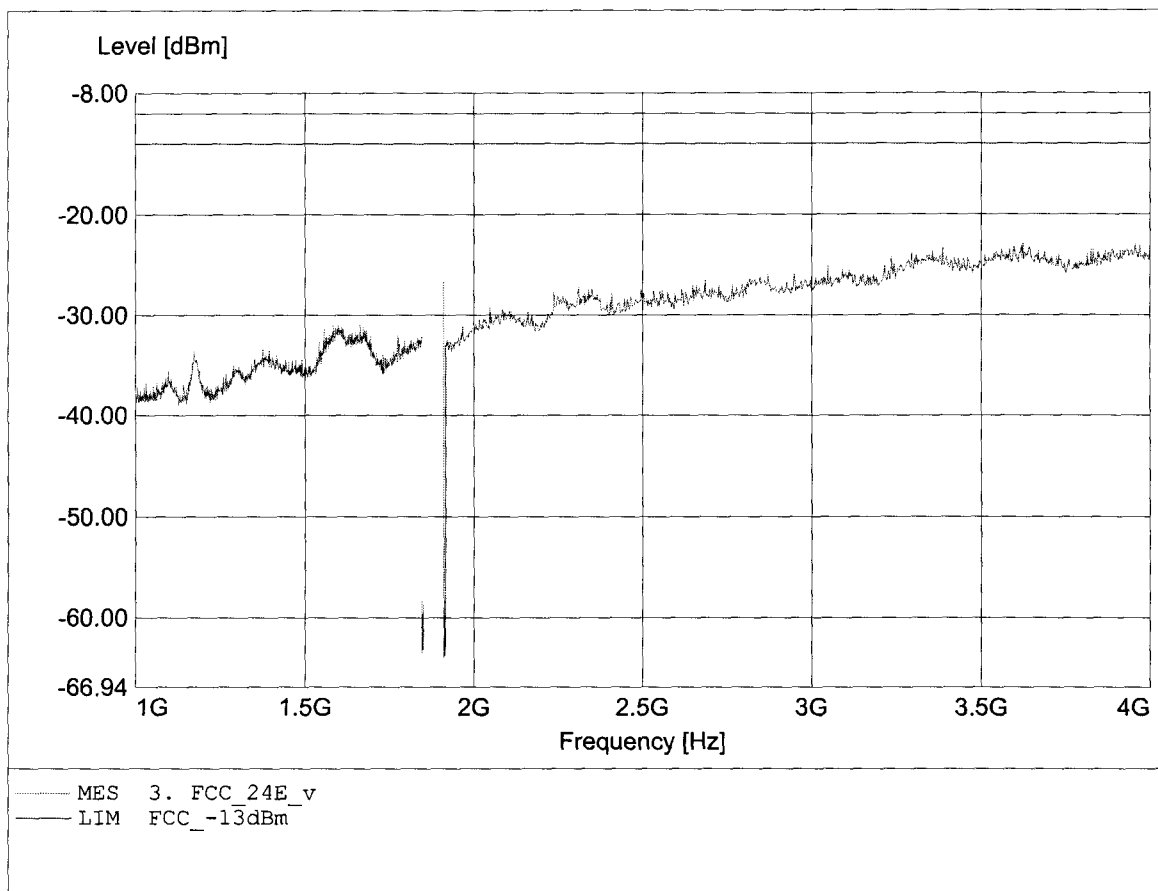


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -20.15dBm, RBW: 1MHz/3kHz

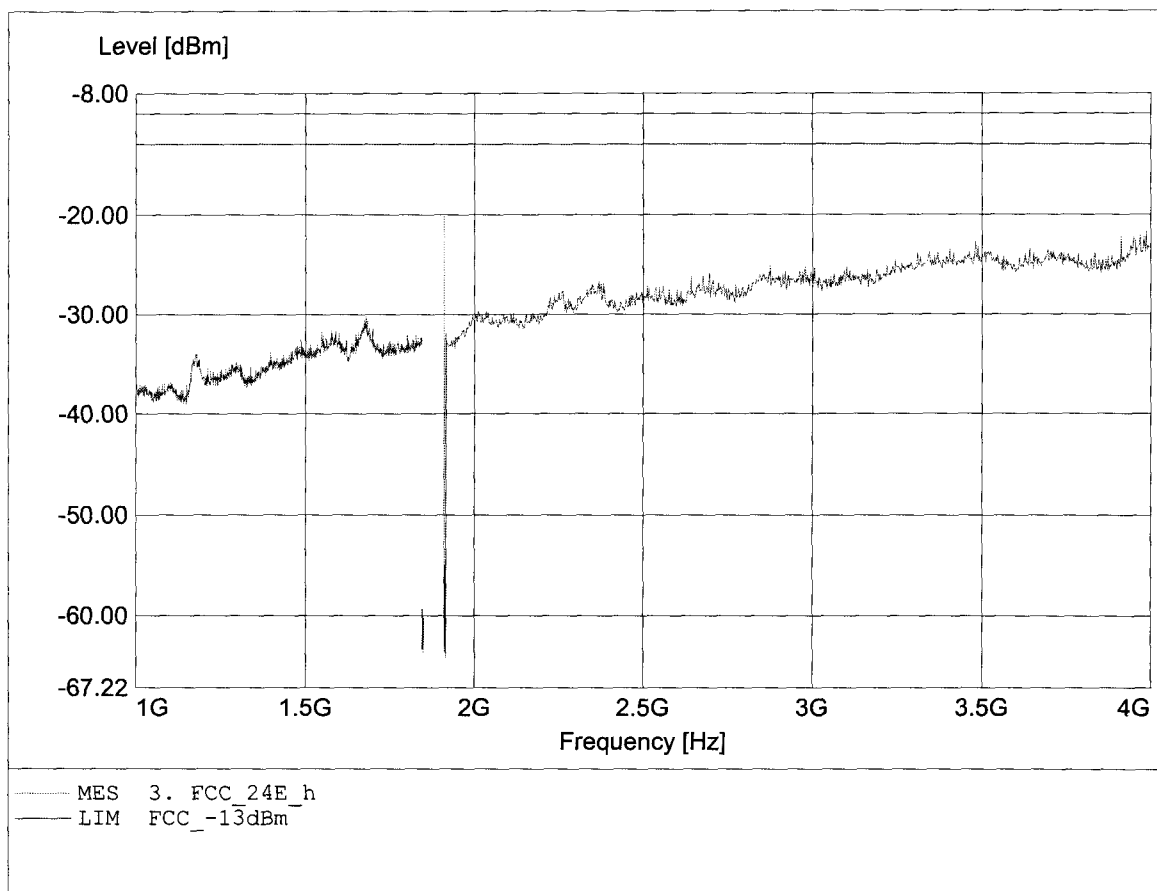


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.640GHz, Pmax: -34.77dBm, RBW: 1MHz

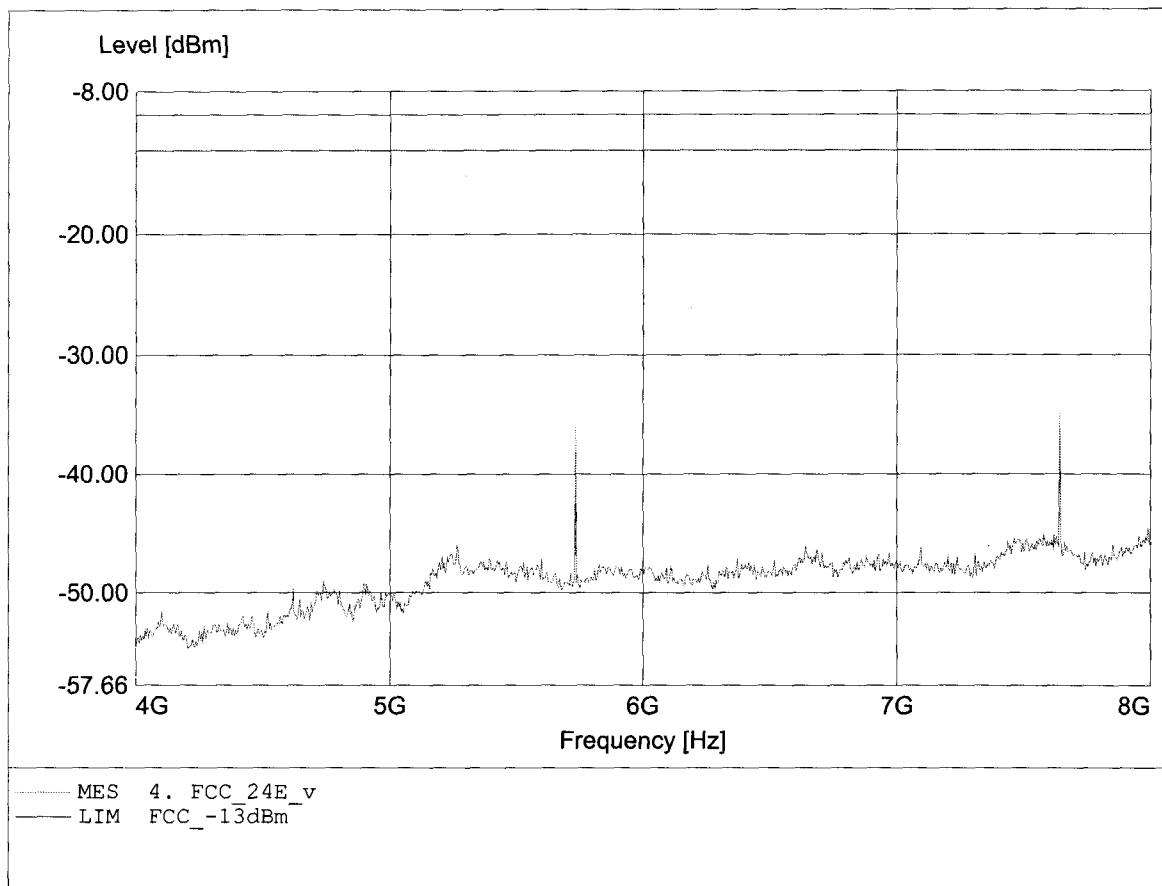


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.733GHz, Pmax: -38.35dBm, RBW: 1MHz

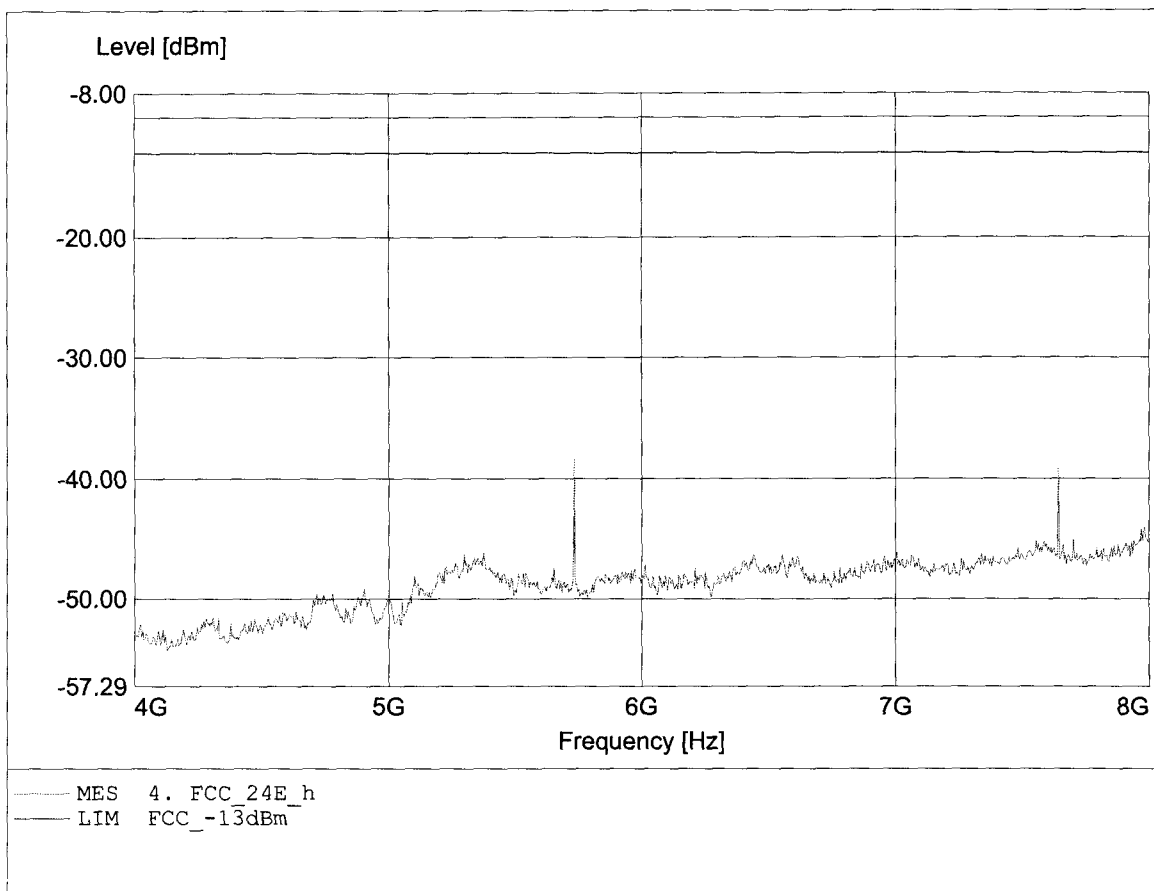


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -38.08dBm, RBW: 1MHz

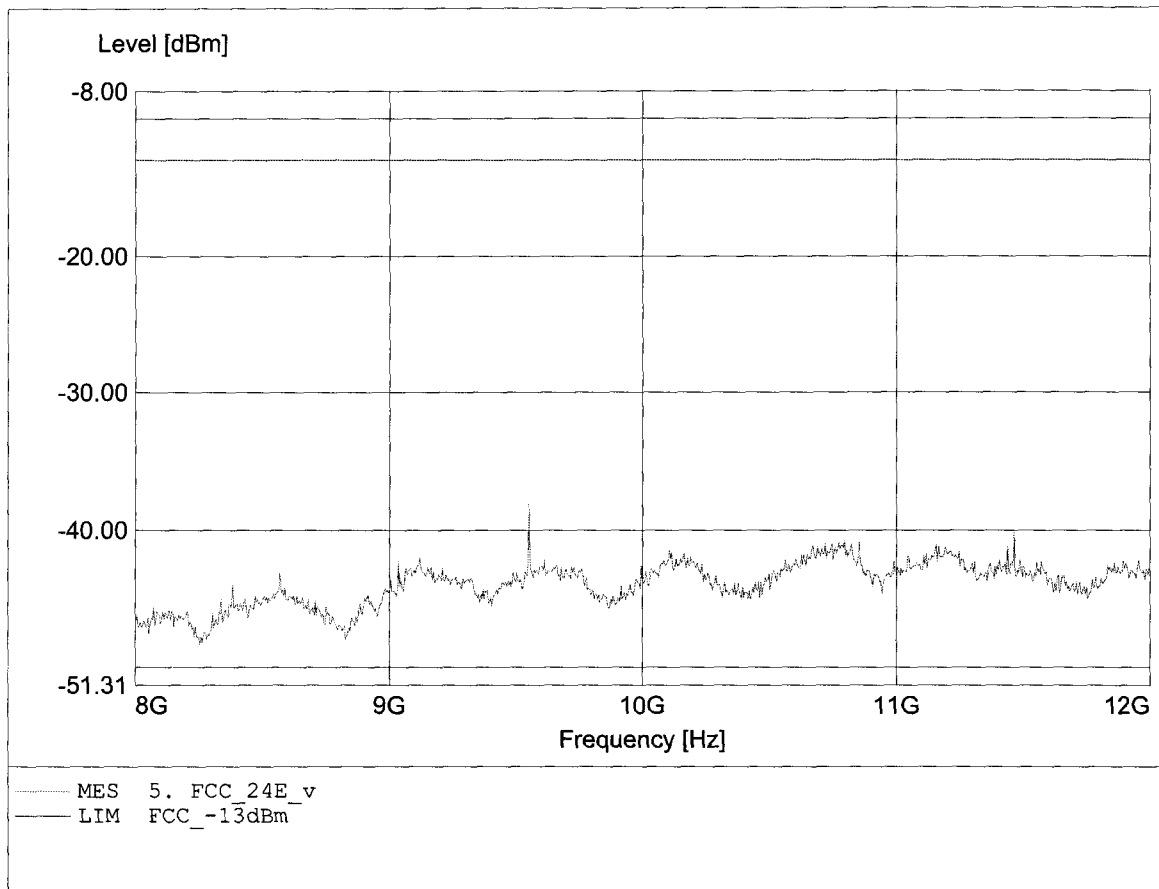


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.551GHz, Pmax: -39.30dBm, RBW: 1MHz

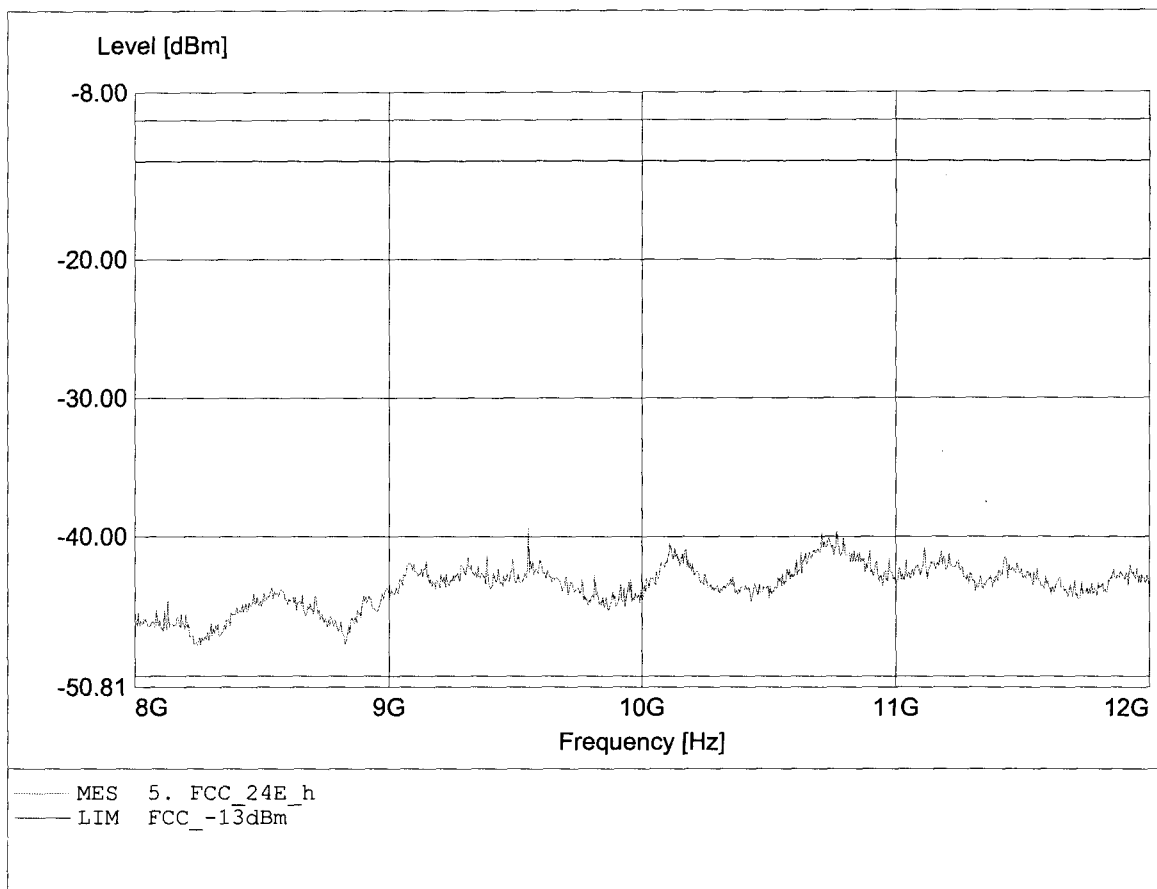


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.427GHz, Pmax: -31.80dBm, RBW: 1MHz

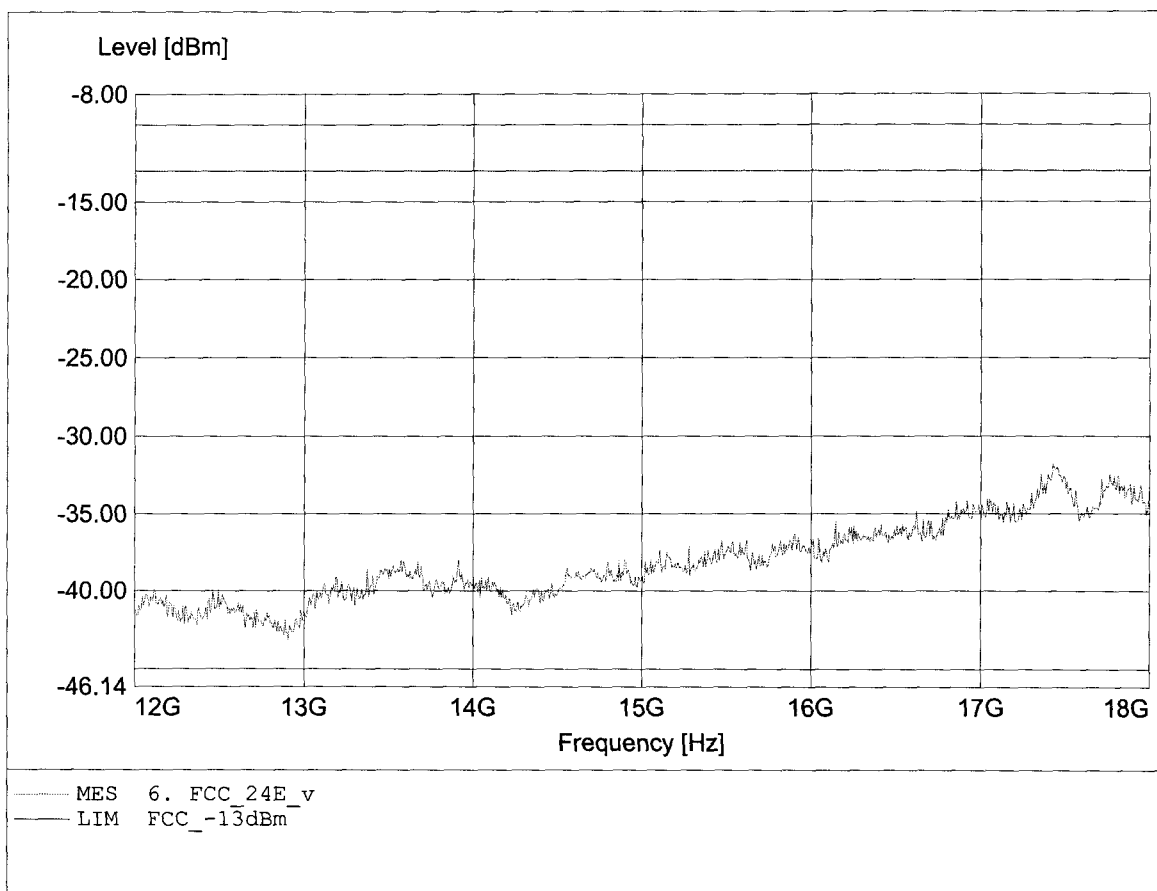


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.440GHz, Pmax: -30.47dBm, RBW: 1MHz

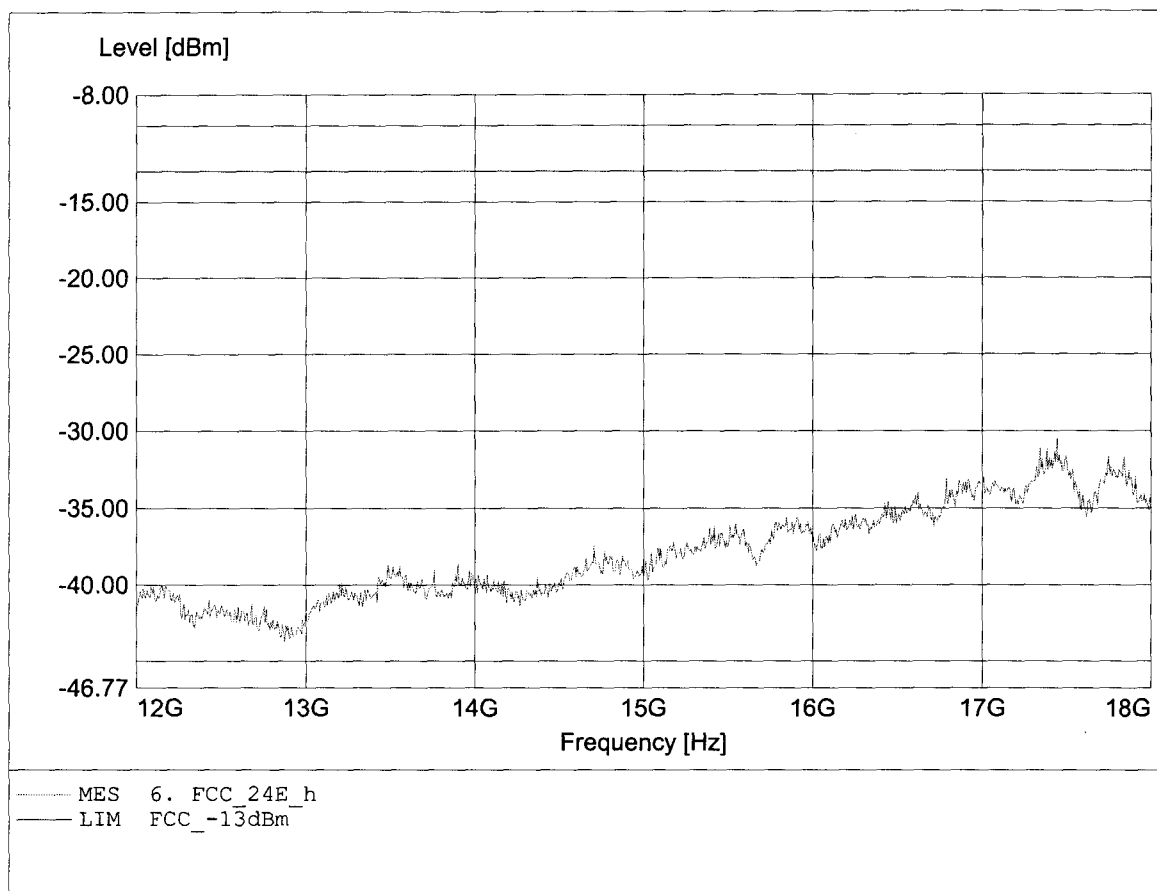


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.472GHz, Pmax: -24.71dBm, RBW: 1MHz

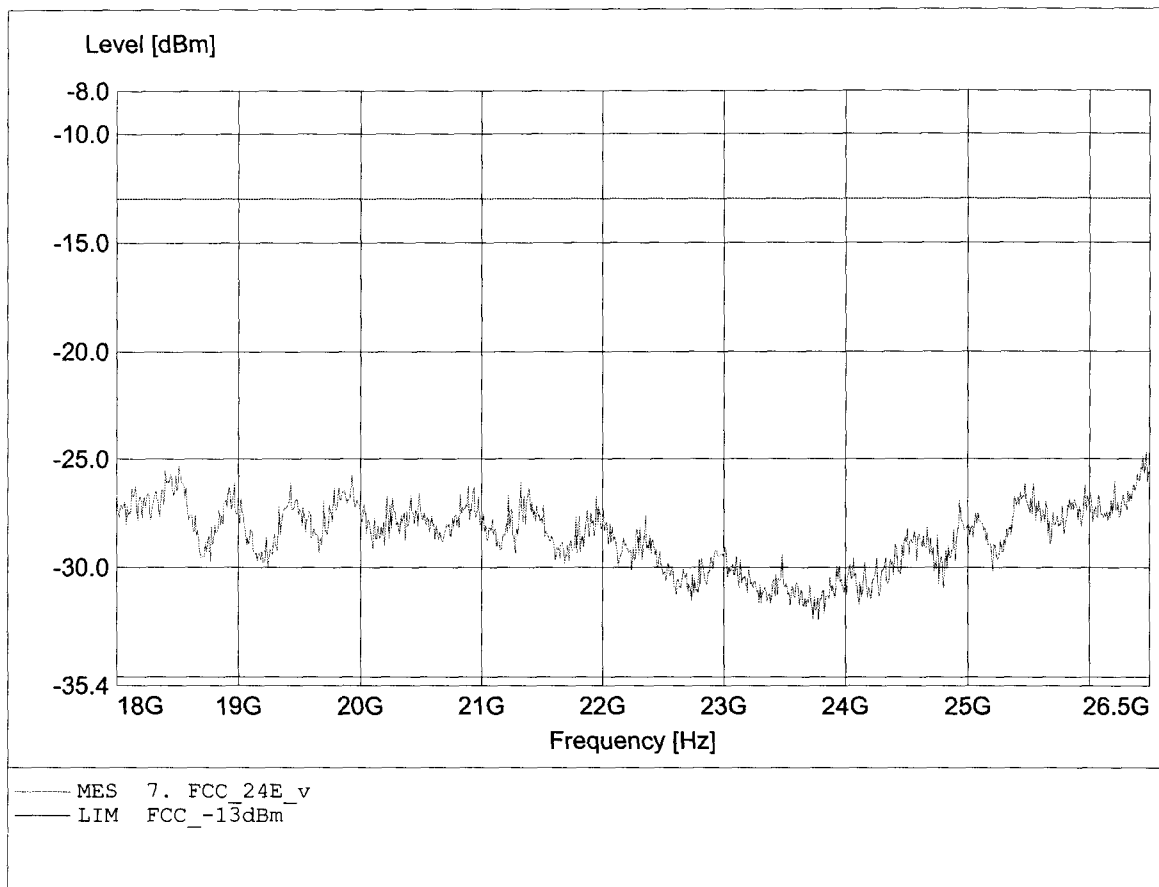

Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Applicant: Falcom GmbH
EUT: GSM Stickphone
Model: Samba 75 / Ch.: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: USB Port
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.434GHz, Pmax: -24.81dBm, RBW: 1MHz

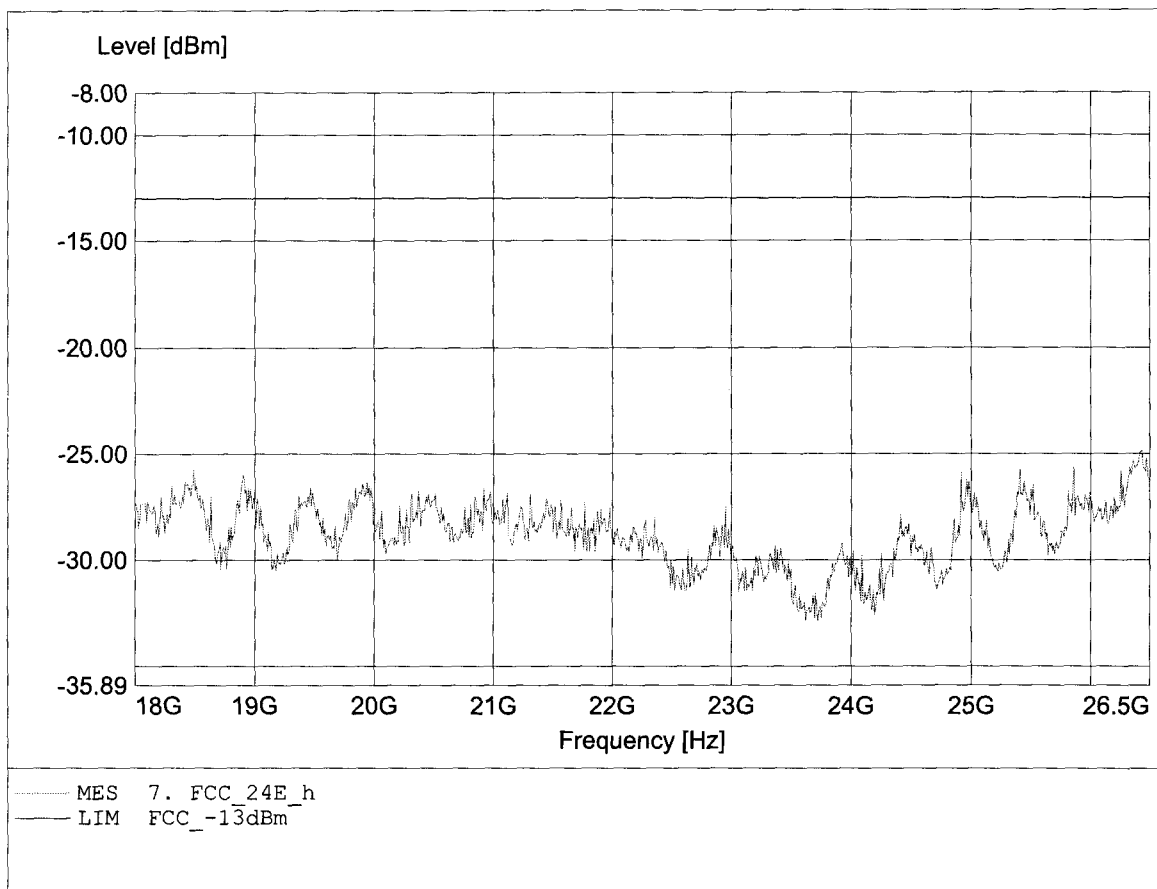


Appendix J

Line Conducted Emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: GSM STICKPHONE
Manufacturer: FALCOM GmbH
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: SAMBA75 mode: link
with Panasonic Laptop: CF72

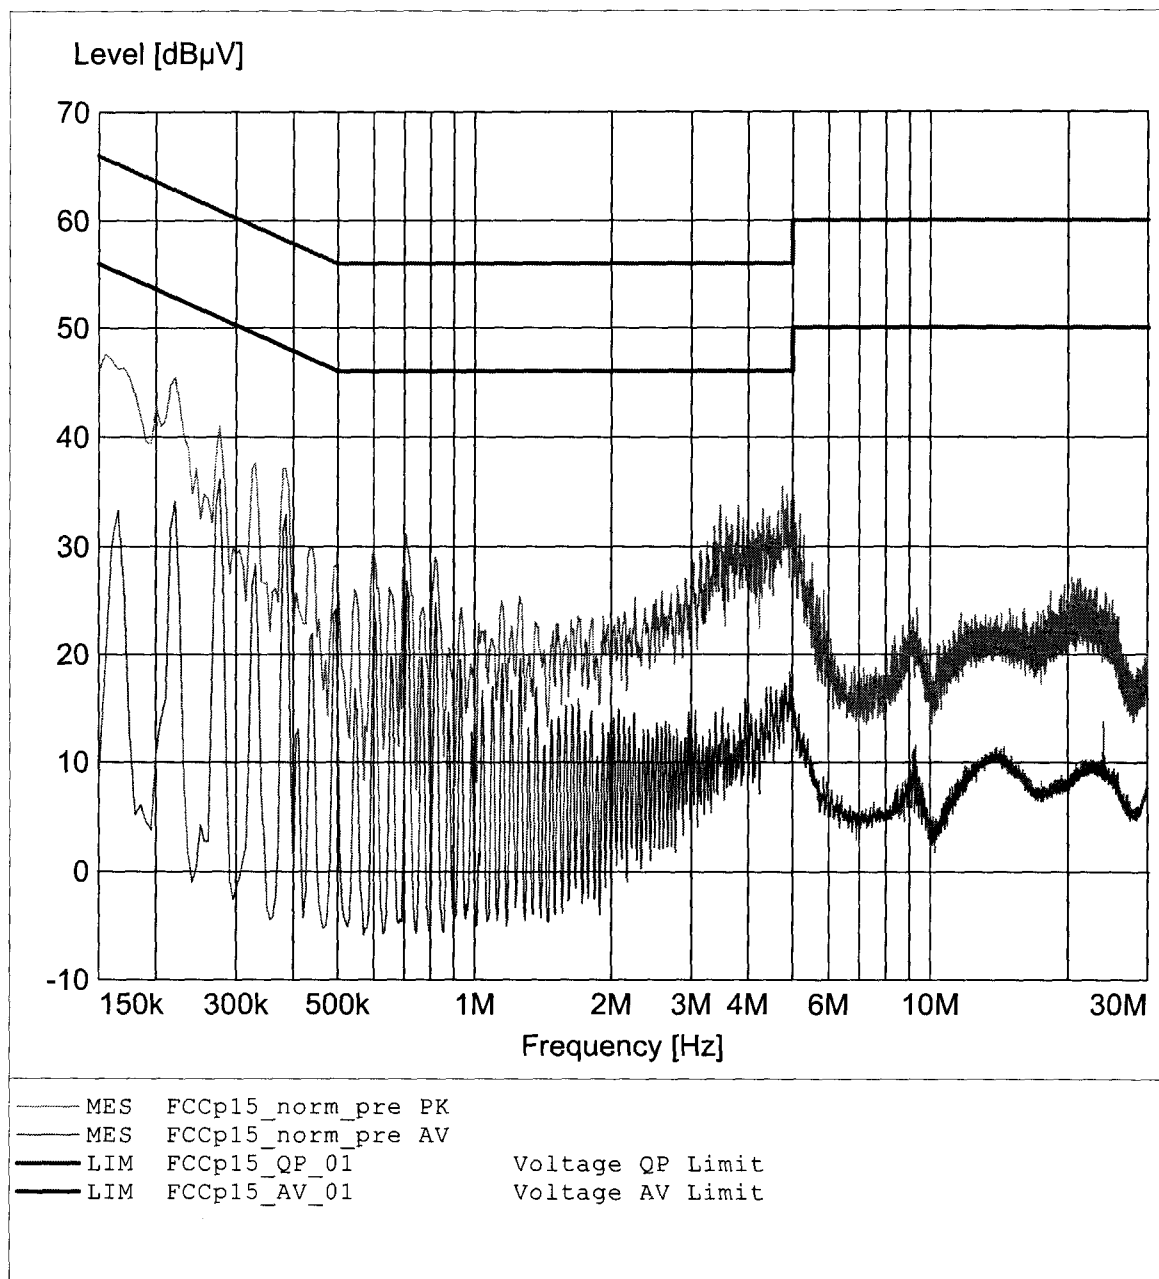

EMI voltage test in the ac-mains according to FCC part 15

EUT: GSM STICKPHONE
Manufacturer: FALCOM GmbH
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: SAMBA75 mode: link
with Panasonic Laptop: CF72

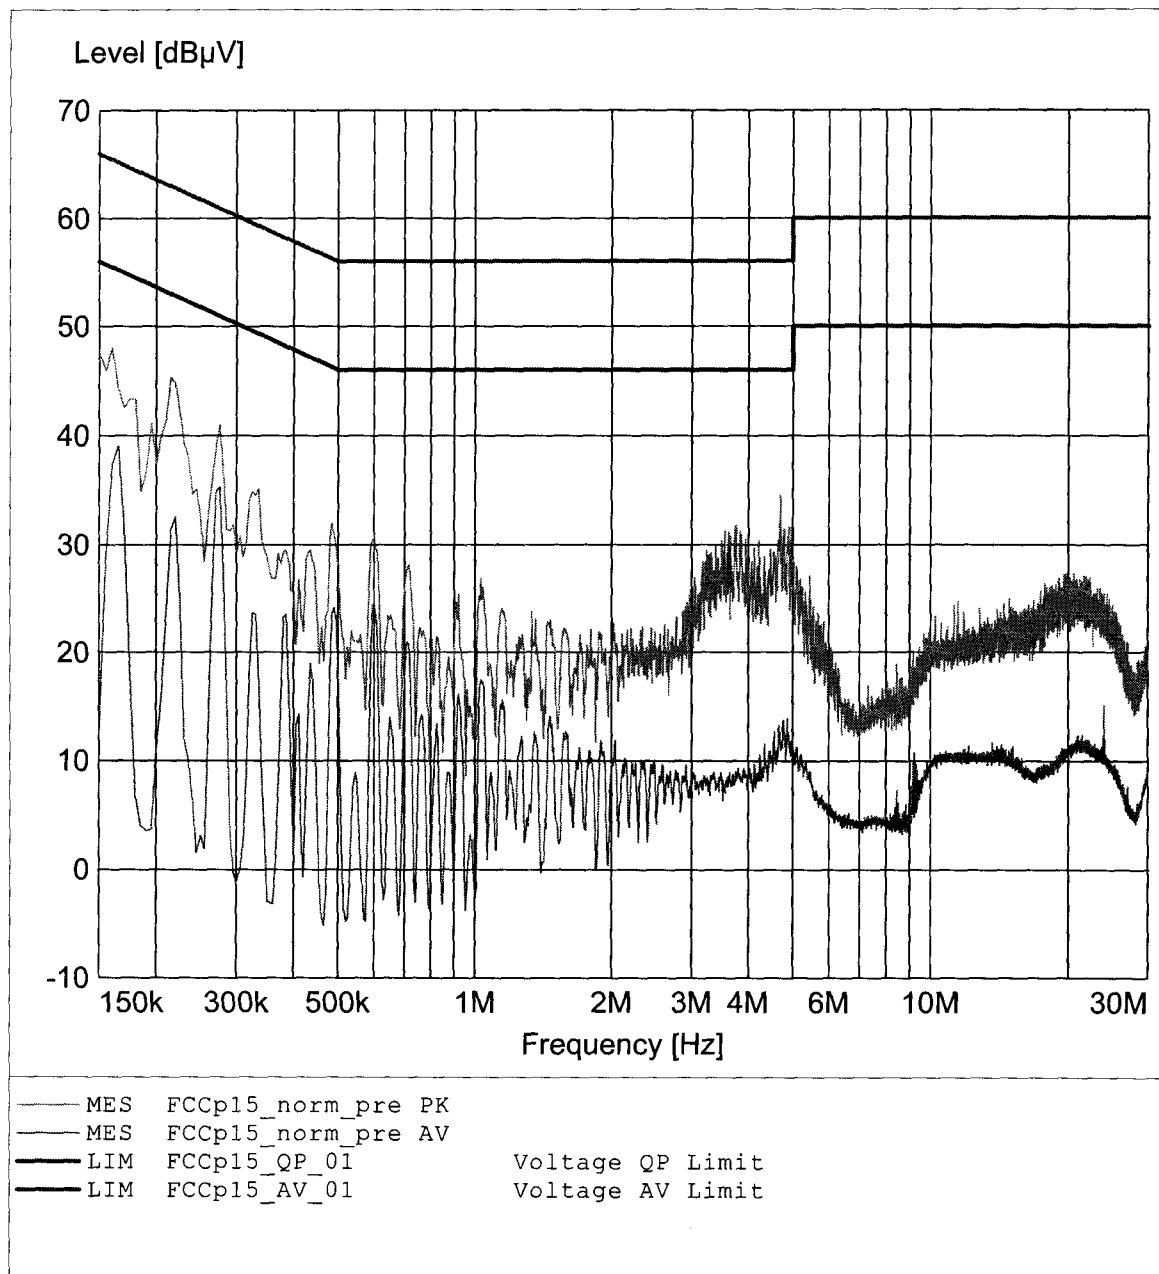

Appendix K

Frequency Stability vs. Temperature

No diagrams
Refer to point 13.2

Appendix L

Frequency Stability vs. Voltage

No diagrams
Refer to point 14.2


Appendix L

Frequency Stability vs. Voltage

No diagrams
Refer to point 14.2



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 310.62124248 kHz SWT 280 ms Unit dBm

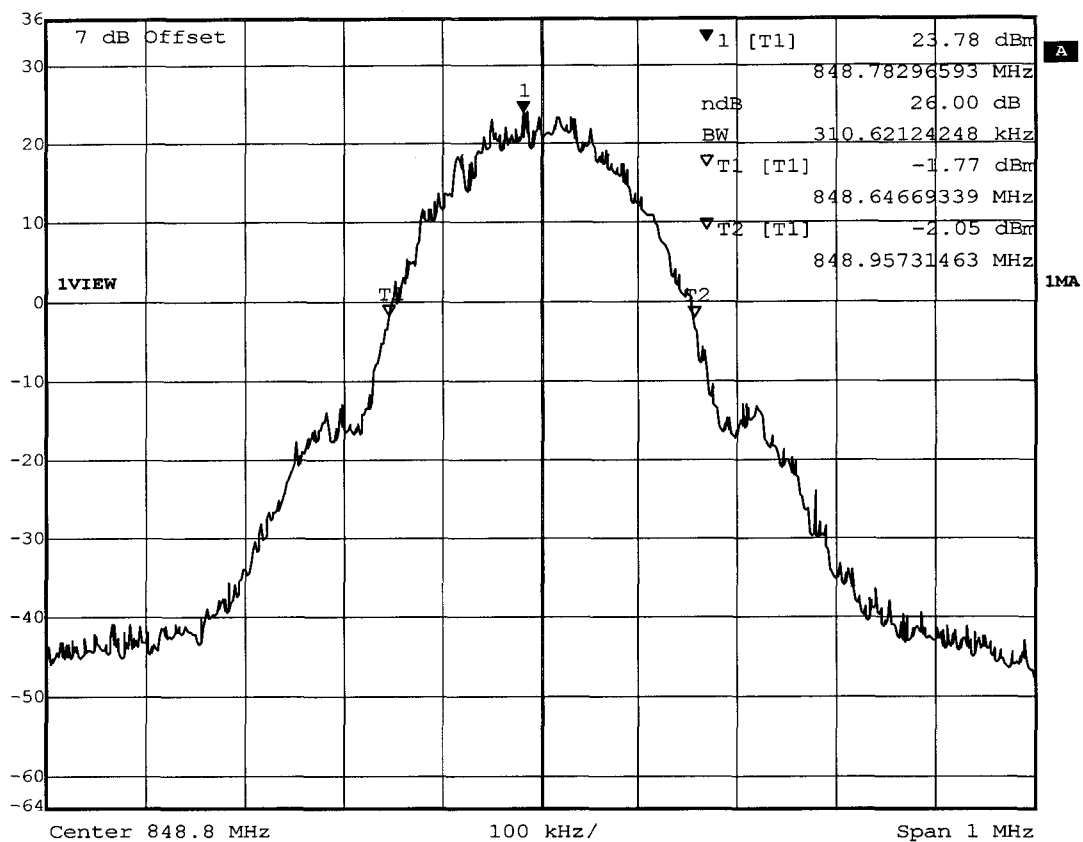

Title: Emission Bandwidth (-26 dB) / Channel: 251
Comment A: Falcom GmbH / Samba 75
Date: 30.AUG.2005 07:25:25