



TEST REPORT

1. Applicant	
Name	: HIMS International Corporation
Brand Name	: E-bot PRO Controller
Address	: 174, Gajeong-ro, Yuseong-gu, Daejeon, KOREA 305-350
FCC ID	: QJCEB100PC
2. Products	
Name	: Remote Controller (E-bot PRO Controller)
Model No.	: EB100PC
Variant Model No.	: N/A
Manufacturer	HIMS International Corporation
Address	174, Gajeong-ro, Yuseong-gu, Daejeon, KOREA 305-350
3. Test Standard	: 47 CFR Part 15, Subpart C
4. Test Method	: ANSI C63.10-2009
5. Test Result	: PASS
6. Dates of Test	: May 12, 2014 to May 14, 2014
7. Date of Issue	: May 16, 2014
8. Test Laboratory	: Standard Engineering Co. Ltd. FCC Designation Number : 624439

Tested by	Approved by
	
SoonHo, Kim / Test Engineer	SeongSeok, Seo / Compliance Engineer

This report may not be reproduced without the full written consent of Standard Engineering Laboratory.



Standard Engineering Co. Ltd.

145, Hwanggeumteo-gil, Eumam-myeon, Seosan-si,
Chungcheongnam-do 356-844, Republic of Korea
Tel.: +82-41-663-9436, Fax :+82-41-663-9434
www.stdeng.com



1. Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10(2009)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10(2009)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10(2009)	PASS
20dB Bandwidth	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10(2009)	PASS
Deactivated time	47 CFR Part 15 Subpart C Section 15.231 (a) (1)	ANSI C63.10(2009)	PASS

2. TABLE OF CONTENTS

1. Test Summary.....	2
2. Table of Contents.....	3
3. General Information.....	4
3.1 Client Information.....	4
3.2 General Description of E.U.T.....	4
3.3 Details of E.U.T.....	4
3.4 Test Environment and Mode.....	4
3.5 Description of Support Units	4
3.6 Abnormalities from Standard Conditions.....	5
3.7 Other Information Requested by the Customer.....	5
3.8 Test Location.....	5
4. Equipment Used during Test.....	6
5. Test Results and Measurement Data.....	7
5.1 Antenna Requirement.....	7
5.2 Spurious Emissions.....	8
5.2.1 Spurious Emissions.....	8
5.2.1.1 Field Strength Of The Fundamental Signal.....	11
5.2.1.2 Spurious Emissions.....	12
5.3 20dB Bandwidth.....	15
5.4 Deactivated time.....	17
** APPENDIX.....	19

3. General Information

3.1. Client Information

Applicant	: HIMS International Corporation
Address of Applicant	: 174, Gajeong-ro, Yuseong-gu,Daejeon, KOREA 305-350
Manufacturer	: HIMS International Corporation
Address of Manufacturer	: 174, Gajeong-ro, Yuseong-gu,Daejeon, KOREA 305-350

3.2. General Description of E.U.T.

Product Name	: Remote Controller (E-bot PRO Controller)
Model No.	: EB100PC

3.3. Details of E.U.T.

Operation Frequency	: 447.925MHz
Channel Numbers	: 1
Modulation Type	: 2GFSK
Antenna Type	: Integral antenna
Antenna Gain	: 0dBi
Power Supply	: 3.0V DC (1.5V x 2 "Alkaline AAA Type Battery")
Test Voltage	: DC 3.0V

3.4. Test Environment and Mode

Operating Environment:	
Temperature	: 26.5 °C
Humidity	: 47% RH
Atmospheric Pressure	: 1023 mbar
Test mode:	
Transmitting mode	: Keep the EUT in transmitting mode with modulation.

3.5. Description of Support Units

The EUT has been tested independent unit.

3.6. Abnormalities from Standard Conditions

None.

3.7. Other Information Requested by the Customer

None.

3.8. Test Location

145, Hwanggeumteo-gil, Eumam-myeon, Seosan-si, Chungcheongnam-do, Republic of Korea. (FCC Designation Number : 624439)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

4. Equipment Used during Test

No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Data	Used equipment
1	EMI Test Receiver	LIG	LSA-265	L07098033	20/12/2013	12/20/2014	■
2	EMI Test Receiver	Rhode & Schwarz	ESIB7	3311	02/11/2014	02/11/2015	■
2	Bi-log Antenna	Schwarzbeck	VULB9163	164	09/06/2012	09/06/2014	■
5	Loop Antenna	EMCO	6502	9206-2769	02/13/2014	02/13/2016	■
6	Spectrum Analyzer	Agilent	E4440A	US45303130	02/04/2014	02/04/2015	■
8	Frequency Counter	HP	5347A	3009A02742	02/04/2014	02/04/2015	■
13	Attenuator	Agilent	8495B	3308A22485	02/04/2014	02/04/2015	□
15	Power Meter	Agilent	E4418B	MY405111655	02/04/2014	02/04/2015	□
16	Power Sensor	HP	8485A	2347A02746	02/04/2014	02/04/2015	□
18	RF Cable	Gigalane	SMS102-MF1 41-SMS102-1.0 M	PB1252301285	N/A	N/A	■
20	Signal Generator	HP	83630A	3420A00728	02/04/2014	02/04/2015	■
21	Oscilloscope	HP	54815A	US38380122	02/04/2014	02/04/2015	□
23	Pre Amplifier	Agilent	8449B	3008A02105	02/04/2014	02/04/2015	■
25	Signal Generator	Rhode & Schwarz	SML03	102330	01/23/2014	01/23/2015	■
26	POWER DIVIDER	Agilent	11636B	50309	02/04/2014	02/04/2015	□
27	Power Sensor	Agilent	8482B	3318A05111	02/04/2014	02/04/2015	□
29	DC Power Supply	HP	6032A	US35420383	02/04/2014	02/04/2015	□
30	Slidacs	Sunchang Electrics	5KV	N/A	02/04/2014	02/04/2015	□
32	Bandreject Filter	K&L Microwave	50140	555	02/04/2014	02/04/2015	□
33	Horn Antenna	Schwarzbeck	BBHA9120A	346	01/27/2013	01/27/2015	■
34	Horn Antenna	A.H. SYSTEMS	SAS-572	269	09/07/2013	09/07/2015	■
35	DC Power Supply	Provice	PWS-5005D	205050	02/04/2014	02/04/2015	■
36	Artificial Mains	Rhode & Schwarz	ESH2-Z5	100064	01/27/2014	01/27/2015	□
38	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100137	11/15/2013	11/15/2014	□

5. Test Results and Measurement Data

5.1. Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna

PASS

The transmitter has an Integrated Helical antenna. The directional gain of the antenna is 0 dBi. please refer to the EUT internal photos.

5.2. Spurious Emissions

5.2.1. Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10 2009				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	447.925MHz	100.83		Peak Value	
		80.83		Average Value	




Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

Test Configuration:


1) 9 kHz to 30 MHz emissions:

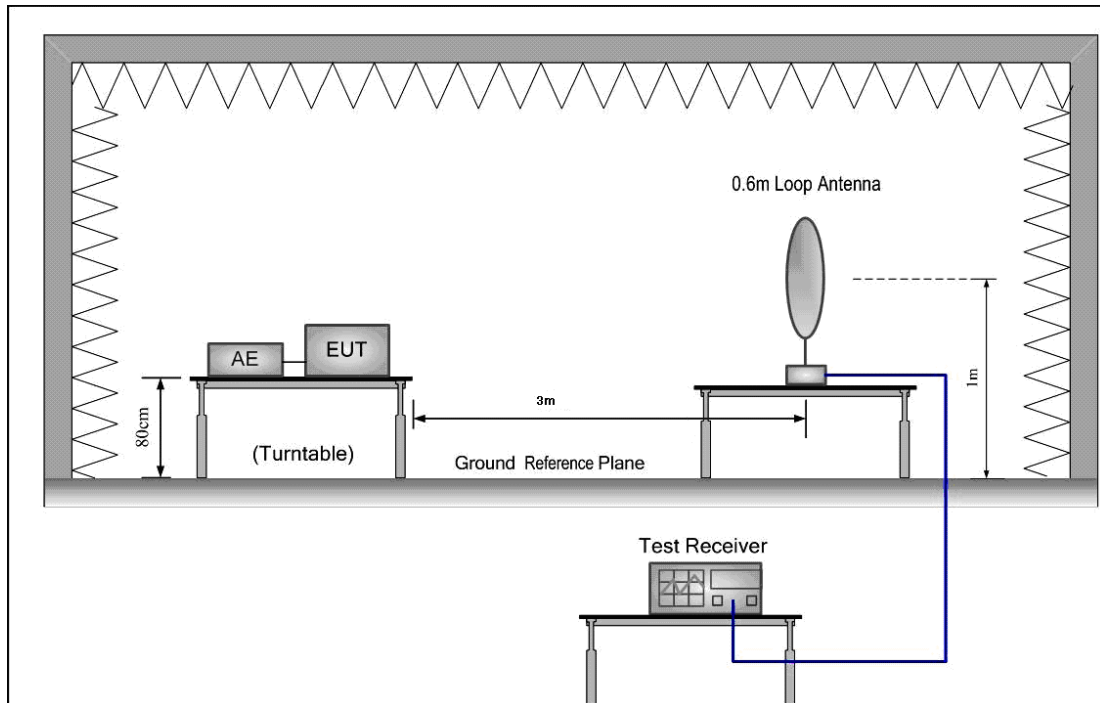

2) 30 MHz to 1 GHz emissions:

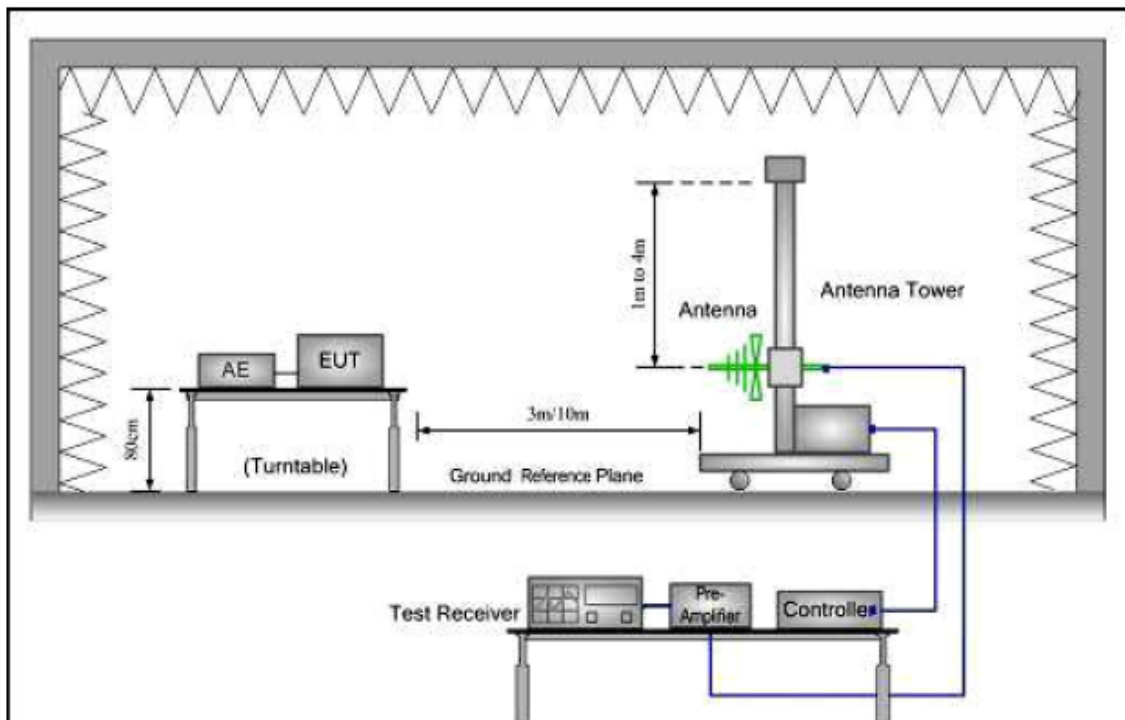

3) 1 GHz to 25 GHz emissions:

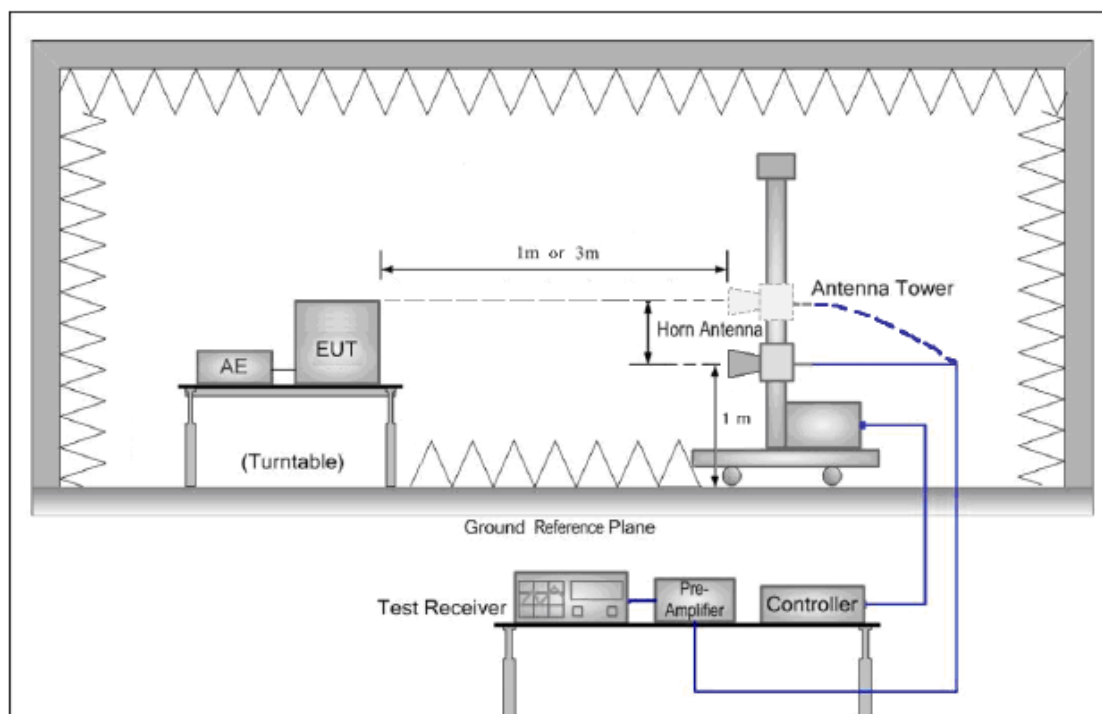

Measurement Data

5.2.1.1. Field Strength Of The Fundamental Signal

Frequency (MHz)	Detetor	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	polarization
447.925	Peak	48.67	21.78	70.45	100.83	30.38	Horizontal
	Avg	47.32	21.78	69.10	80.83	11.73	Horizontal
	Peak	52.59	21.78	74.37	100.83	26.46	Vertical
	Avg	51.28	21.78	73.06	80.83	7.77	Vertical

Remark:

1. 3m Limit(dBuV/m) = $20\log[41.6667(F(\text{MHz}))-7083.3333] = 80.83$
2. Correction Factor = Antenna Factor + Cable Loss
3. Field Strength of Fundamental test results meet both peak and average limit

5.2.1.2. Spurious Emissions


9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Vertical:

Level (dB μ V/m)

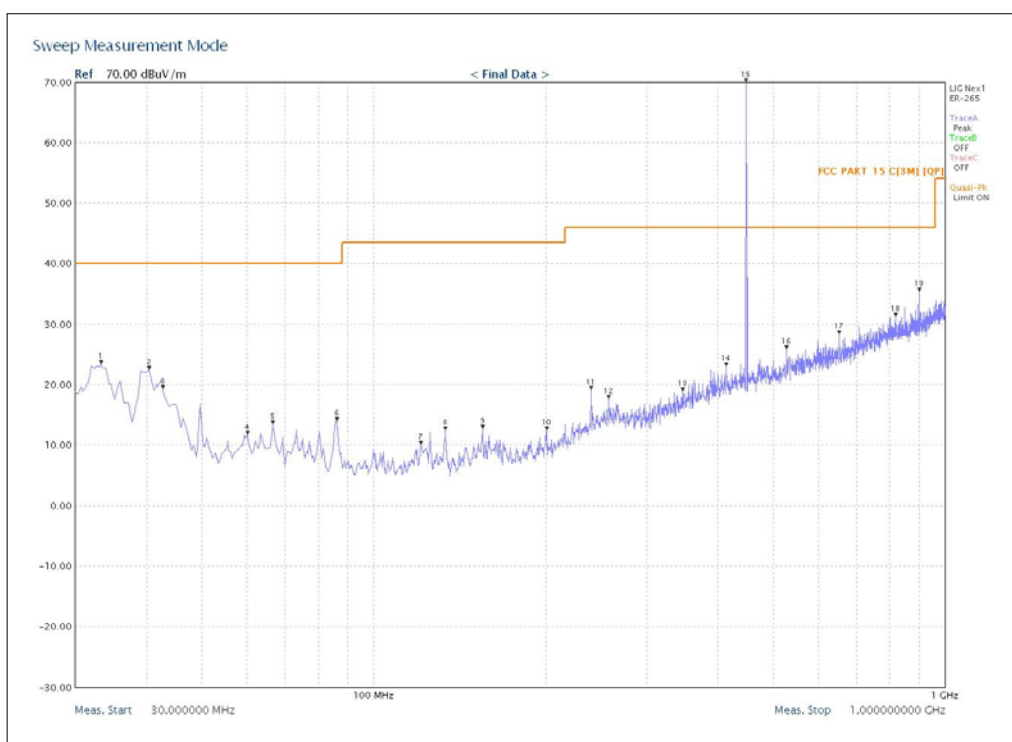


Quasi-peak measurement

Frequency (MHz)	Detect Mode	Polarization (V/H)	Measured Value (dB μ V)	Antenna Factor + Cable Loss (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
33.31	QP	V	23.40	6.29	17.11	40.0	16.60
40.42	QP	V	22.40	8.87	13.53	40.0	17.60
240.20	QP	V	19.16	15.78	3.38	46.0	26.84
900.52	QP	V	35.40	30.58	4.82	46.0	10.60

Horizontal:

Level (dB μ V/m)

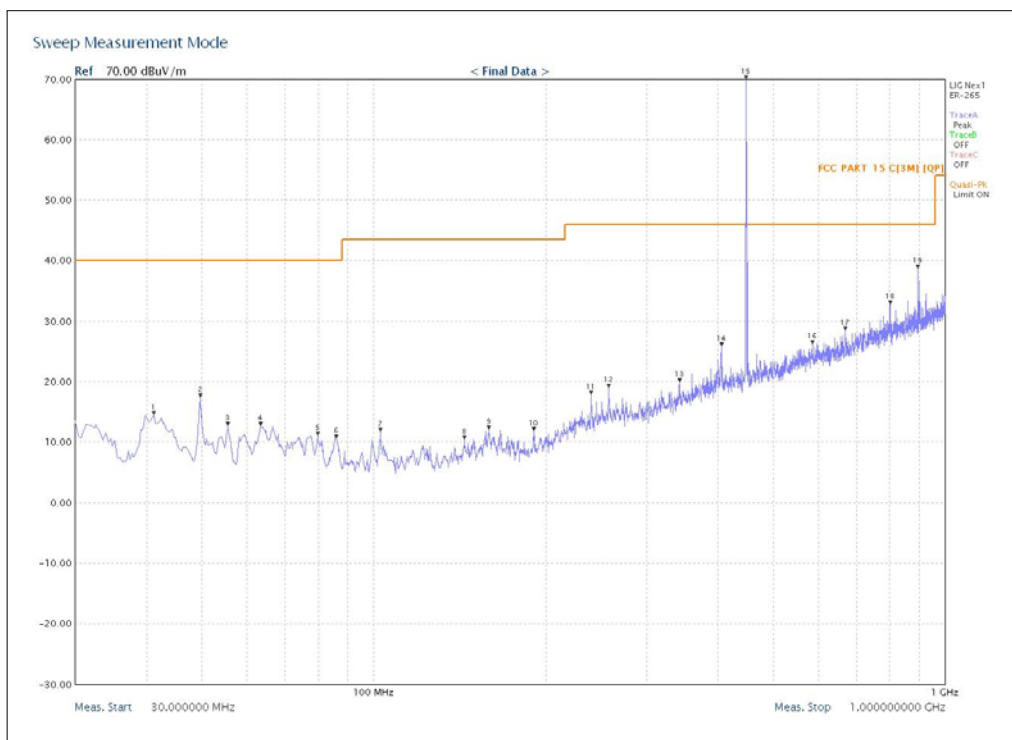

Quasi-peak measurement

Frequency (MHz)	Detect Mode	Polarization (V/H)	Measured Value (dB μ V)	Antenna Factor + Cable Loss (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
49.65	QP	H	17.34	10.07	7.27	40.0	22.66
405.51	QP	H	25.83	21.90	3.93	46.0	20.17
895.90	QP	H	38.61	30.52	8.09	46.0	7.39

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Polarization (V/H)	Measured Value (dBμV)	Correction Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
			Antenna+Cable-Amp. Gain			
1792.00	H	43.49	2.06	41.43	74.0	30.51
3135.50	H	44.86	7.33	37.53	74.0	29.14
4031.50	H	48.02	11.32	36.70	74.0	25.98
2698.00	V	49.42	5.68	43.74	74.0	24.58
3135.50	V	44.34	7.80	36.54	74.0	29.66
3583.50	V	45.37	9.38	35.99	74.0	28.63
4031.50	V	45.80	11.32	34.48	74.0	28.20


Average Measurement:

Frequency (MHz)	Polarization (V/H)	Measured Value (dBμV)	Correction Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
			Antenna+Cable-Amp. Gain			
1792.00	H	38.41	2.06	36.35	54.0	15.59
3135.50	H	40.14	7.33	32.81	54.0	13.86
4031.50	H	45.52	11.32	34.20	54.0	8.48
2698.00	V	43.51	5.64	37.87	54.0	10.49
3135.50	V	43.65	7.33	36.32	54.0	10.35
3583.50	V	42.07	9.38	32.69	54.0	11.93
4031.50	V	42.00	11.32	30.68	54.0	12.00

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Emission Level = Measured Value + Antenna Factor + Cable Loss – Amplifier Gain.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

5.3. 20dB Bandwidth

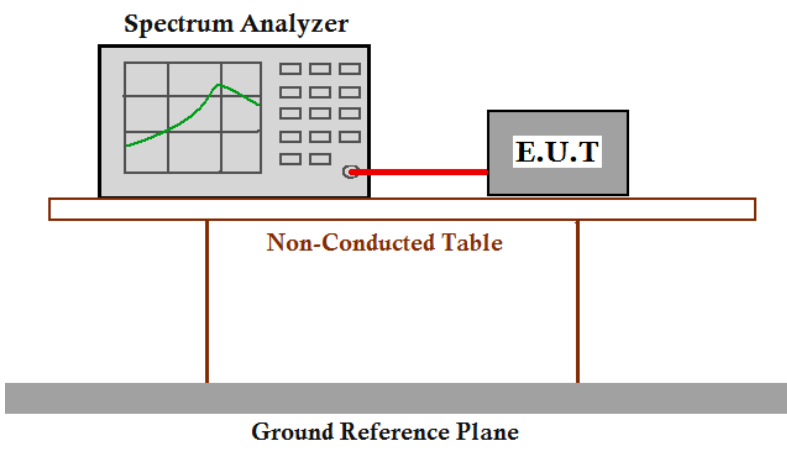
Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2009
Test Configuration:	 The diagram shows a Spectrum Analyzer and an E.U.T. (Equipment Under Test) connected by a red cable. They are placed on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.
Instruments Used:	Refer to section 4.10 for details
Exploratory Test Mode:	Transmitting mode
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Results:	Pass

Measurement Data


20dB bandwidth (MHz)	Limit (MHz)	Results
0.48950	1.0848	Pass



Result plot as follows:

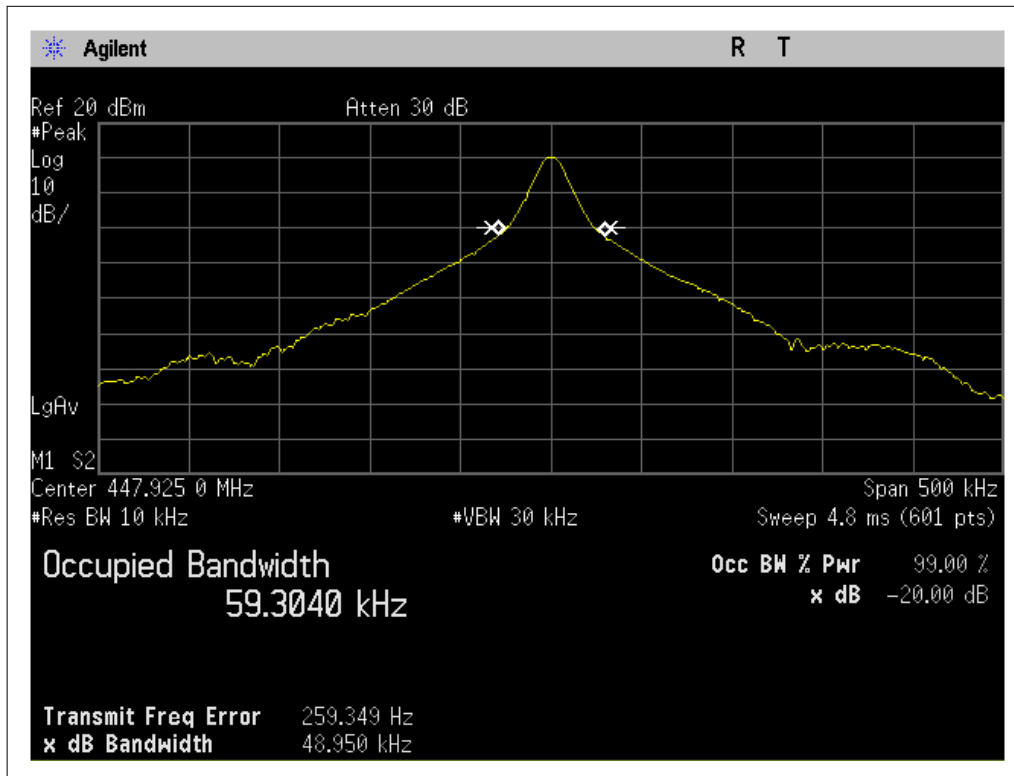

5.4. Deactivated time


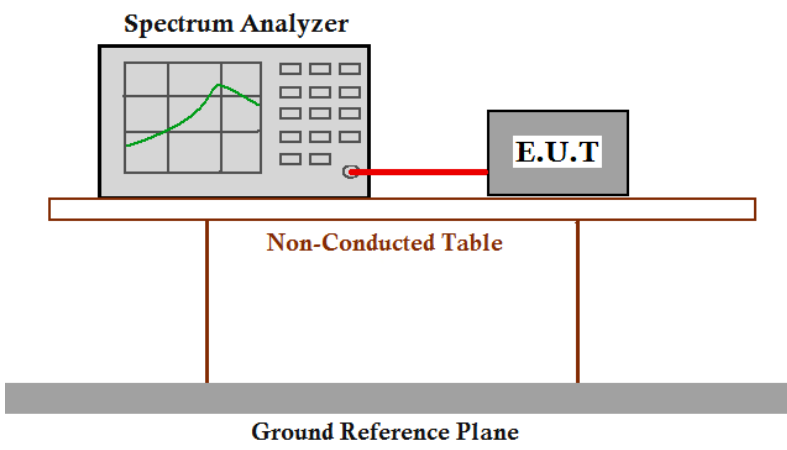
Test Requirement:	47 CFR Part 15C Section 15.231 (a) (1)
Test Method:	ANSI C63.10:2009
Test Configuration:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a thick grey horizontal bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 4.10 for details
Exploratory Test Mode:	Transmitting mode
Limit:	Within not more than 5 seconds
Test Results:	Pass

Measurement Data

Test item	Limit (sec)	Results
Deactivated time	Within not more than 5 seconds	Pass



Result plot as follows:

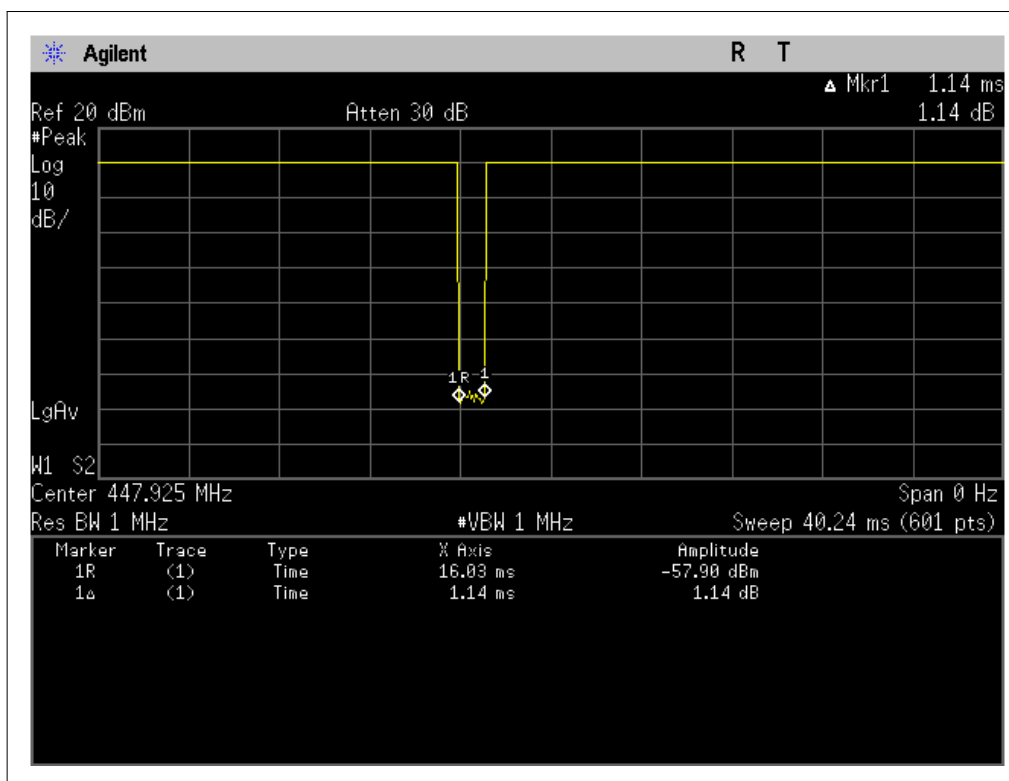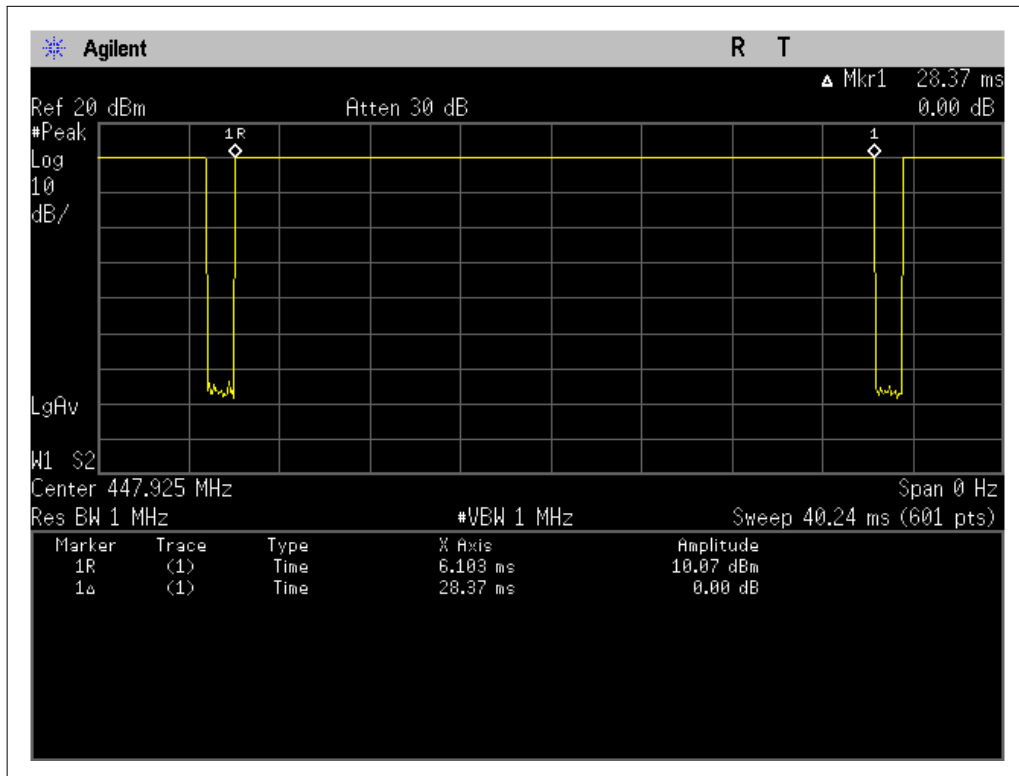

APPENDIX

1. EUT photo

