


EMC Technologies Pty. Ltd. - Global Product Certification

FCC Class B  
Conducted Emissions (dBuV)

Job No:M030233F

Test Date: 03/03/03

r:\pcfa\030233F\_1.PCF  
GRAPH No. 1

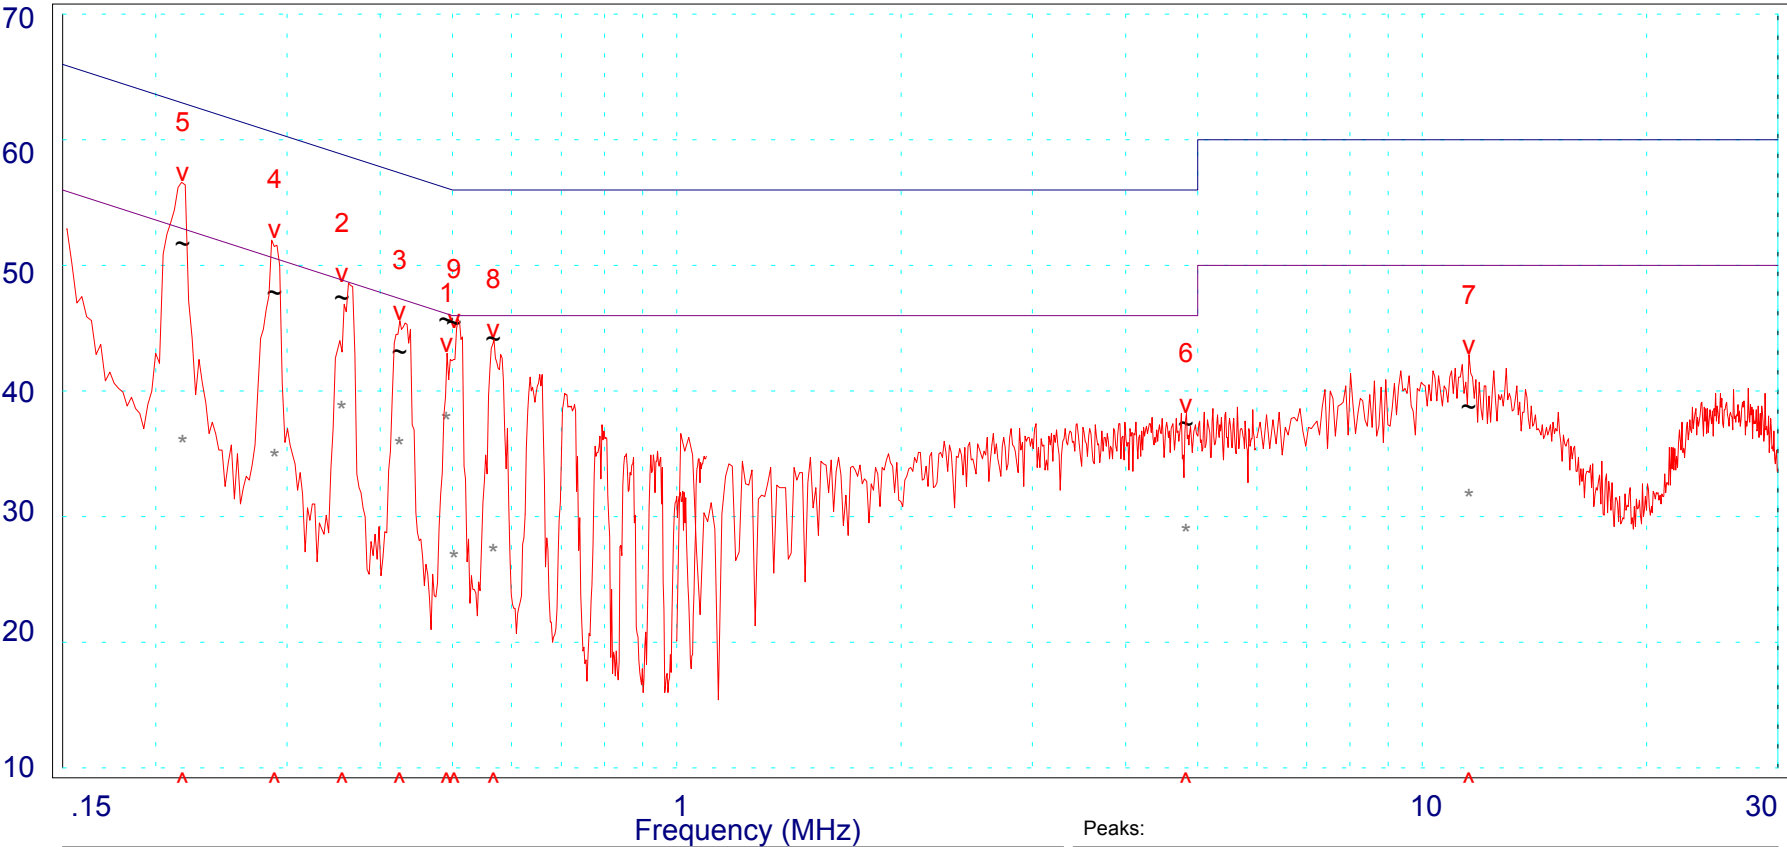

Fujitsu Australia Limited  
Lifebook - Rialto (E4010)

Conducted Emissions - Active Line

Limits:  
FCC\_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)  
FCC\_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Legend:  
Active Line

Ver 5.5 Build 71  
conducted lab 3 using L-22 25A LISN  
t:L0220104 c1:C1610503 c2:C1520503 p:NONE a:L0171103  
Site ID: Room#3,57 Assembly Drv. Tullamarine, VIC  
Test Officer:Chieu Huynh

Source:  
M030233c 8 9 10

Melbourne- 57 Assembly Drv Tullamarine, 3043, Vic, Australia Ph+(613) 9335 3333 Fax+(613) 9338 9260  
Sydney---- 16,6 Gladstone Rd Castle Hill, 2154, NSW, Australia Ph+(612) 9899 4599 Fax+(612) 9899 4019

| Peaks: |            |             |        |                 |          |               |                 |          |
|--------|------------|-------------|--------|-----------------|----------|---------------|-----------------|----------|
| No     | Freq (MHz) | Peak (dBuV) | Qp Val | FCC_BQPN (dBuV) | dL1 (dB) | Av Val (dBuV) | FCC_BAVN (dBuV) | dL2 (dB) |
| 1      | .49        | 43.0        | 44.8   | 56.2            | -11.4    | 36.7          | 46.2            | -9.5     |
| 2      | .36        | 48.6        | 46.6   | 58.8            | -12.2    | 37.6          | 48.8            | -11.2    |
| 3      | .42        | 45.6        | 42.3   | 57.4            | -15.1    | 34.7          | 47.4            | -12.7    |
| 4      | .29        | 52.1        | 47.0   | 60.6            | -13.6    | 33.8          | 50.6            | -16.8    |
| 5      | .22        | 56.6        | 50.9   | 62.9            | -12.0    | 34.9          | 52.9            | -18.0    |
| 6      | 4.82       | 38.2        | 36.6   | 56.0            | -19.4    | 27.8          | 46.0            | -18.2    |
| 7      | 11.55      | 42.9        | 37.9   | 60.0            | -22.1    | 30.6          | 50.0            | -19.4    |
| 8      | .57        | 44.1        | 43.3   | 56.0            | -12.7    | 26.2          | 46.0            | -19.8    |
| 9      | .50        | 44.9        | 44.6   | 56.0            | -11.4    | 25.7          | 46.0            | -20.3    |


EMC Technologies Pty. Ltd. - Global Product Certification

FCC Class B  
Conducted Emissions (dBuV)

Job No:M030233F

Test Date: 03/03/03

r:\pcfa\030233F\_2.PCF  
GRAPH No. 2

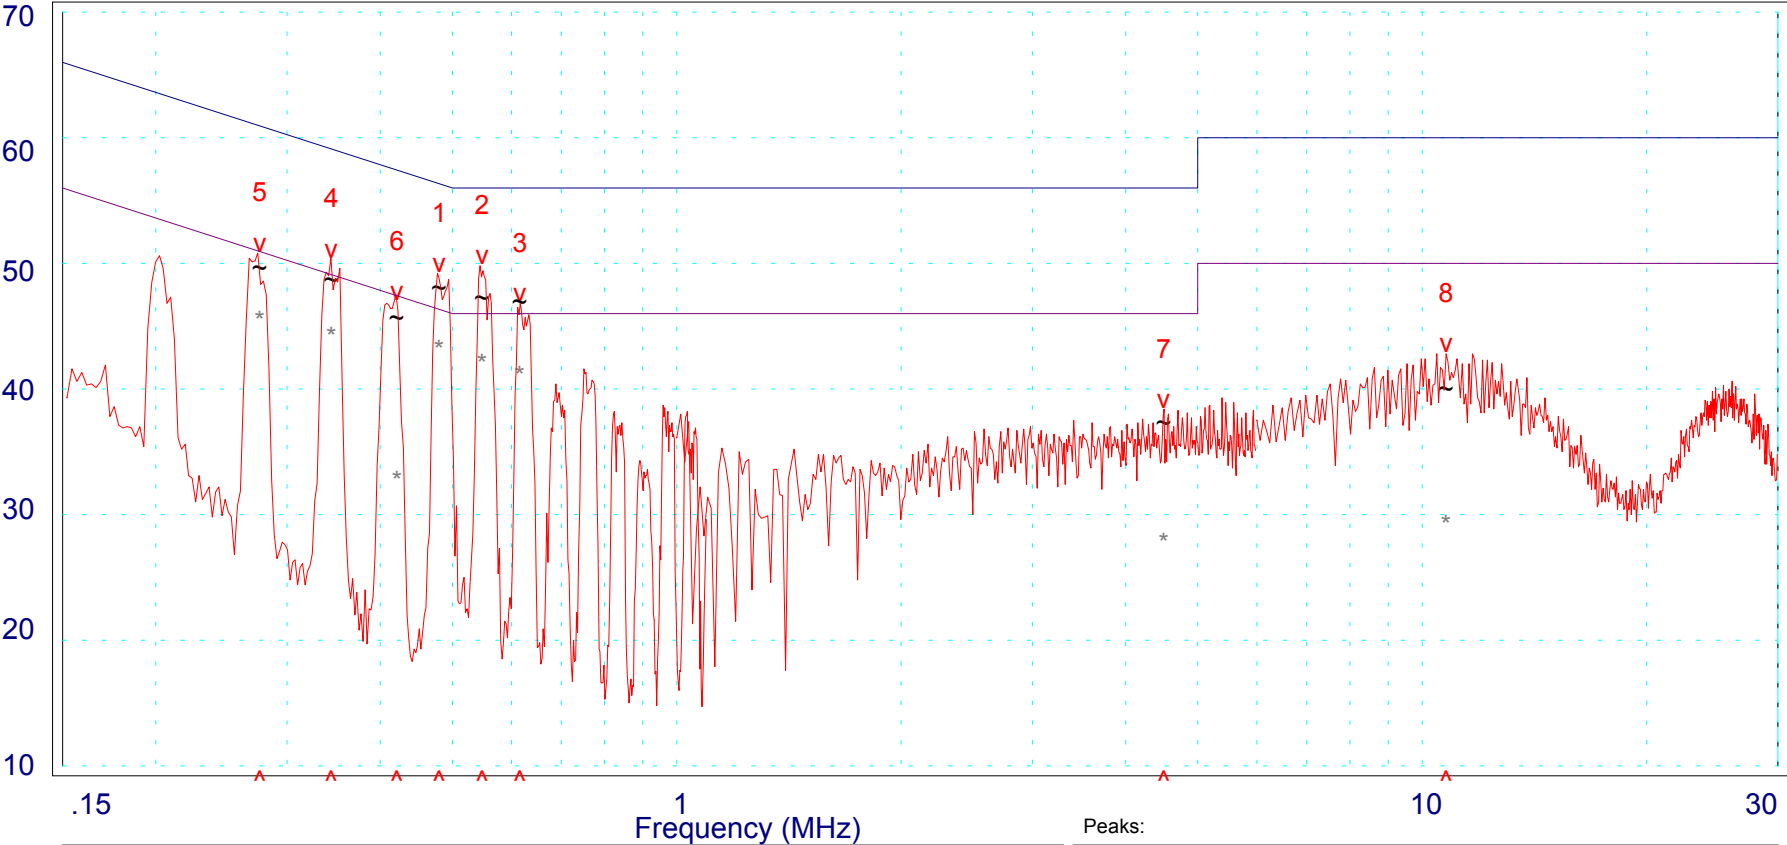

Fujitsu Australia Limited  
Lifebook - Rialto (E4010)

Conducted Emissions - Neutral Line

Limits:  
FCC\_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)  
FCC\_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Legend:  
— Neutral Line

Ver 5.5 Build 71  
conducted lab 3 using L-22 25A LISN  
t:L0220104 c1:C1610503 c2:C1520503 p:NONE a:L0171103  
Site ID: Room#3,57 Assembly Drv. Tullamarine, VIC  
Test Officer:Chieu Huynh

Source:  
M030233c 11 12 13

Melbourne- 57 Assembly Drv Tullamarine, 3043, Vic, Australia Ph+(613) 9335 3333 Fax+(613) 9338 9260  
Sydney---- 16,6 Gladstone Rd Castle Hill, 2154, NSW, Australia Ph+(612) 9899 4599 Fax+(612) 9899 4019

| Peaks: |            |             |               |                   |               |                     |          |
|--------|------------|-------------|---------------|-------------------|---------------|---------------------|----------|
| No     | Freq (MHz) | Peak (dBuV) | Qp Val (dBuV) | FCC_BQPN dL1 (dB) | Av Val (dBuV) | FCC_BAVN dL2 (dBuV) | dL2 (dB) |
| 1      | .48        | 49.2        | 47.2          | 56.3              | -9.1          | 42.3                | 46.3     |
| 2      | .55        | 49.8        | 46.4          | 56.0              | -9.6          | 41.2                | 46.0     |
| 3      | .62        | 46.8        | 46.1          | 56.0              | -9.9          | 40.2                | 46.0     |
| 4      | .34        | 50.4        | 47.9          | 59.1              | -11.2         | 43.3                | 49.1     |
| 5      | .28        | 50.8        | 48.8          | 60.9              | -12.1         | 44.6                | 50.9     |
| 6      | .42        | 47.0        | 44.8          | 57.4              | -12.6         | 31.9                | 47.4     |
| 7      | 4.50       | 38.4        | 36.5          | 56.0              | -19.5         | 26.9                | 46.0     |
| 8      | 10.76      | 42.8        | 39.2          | 60.0              | -20.8         | 28.4                | 50.0     |

EMC Technologies Pty. Ltd. - Global Product Certification


FCC Class B  
Conducted Emissions (dBuV)

Job No:M030233F

Test Date: 03/03/03

r:\pcfa\030233F\_3.PCF

GRAPH No. 3

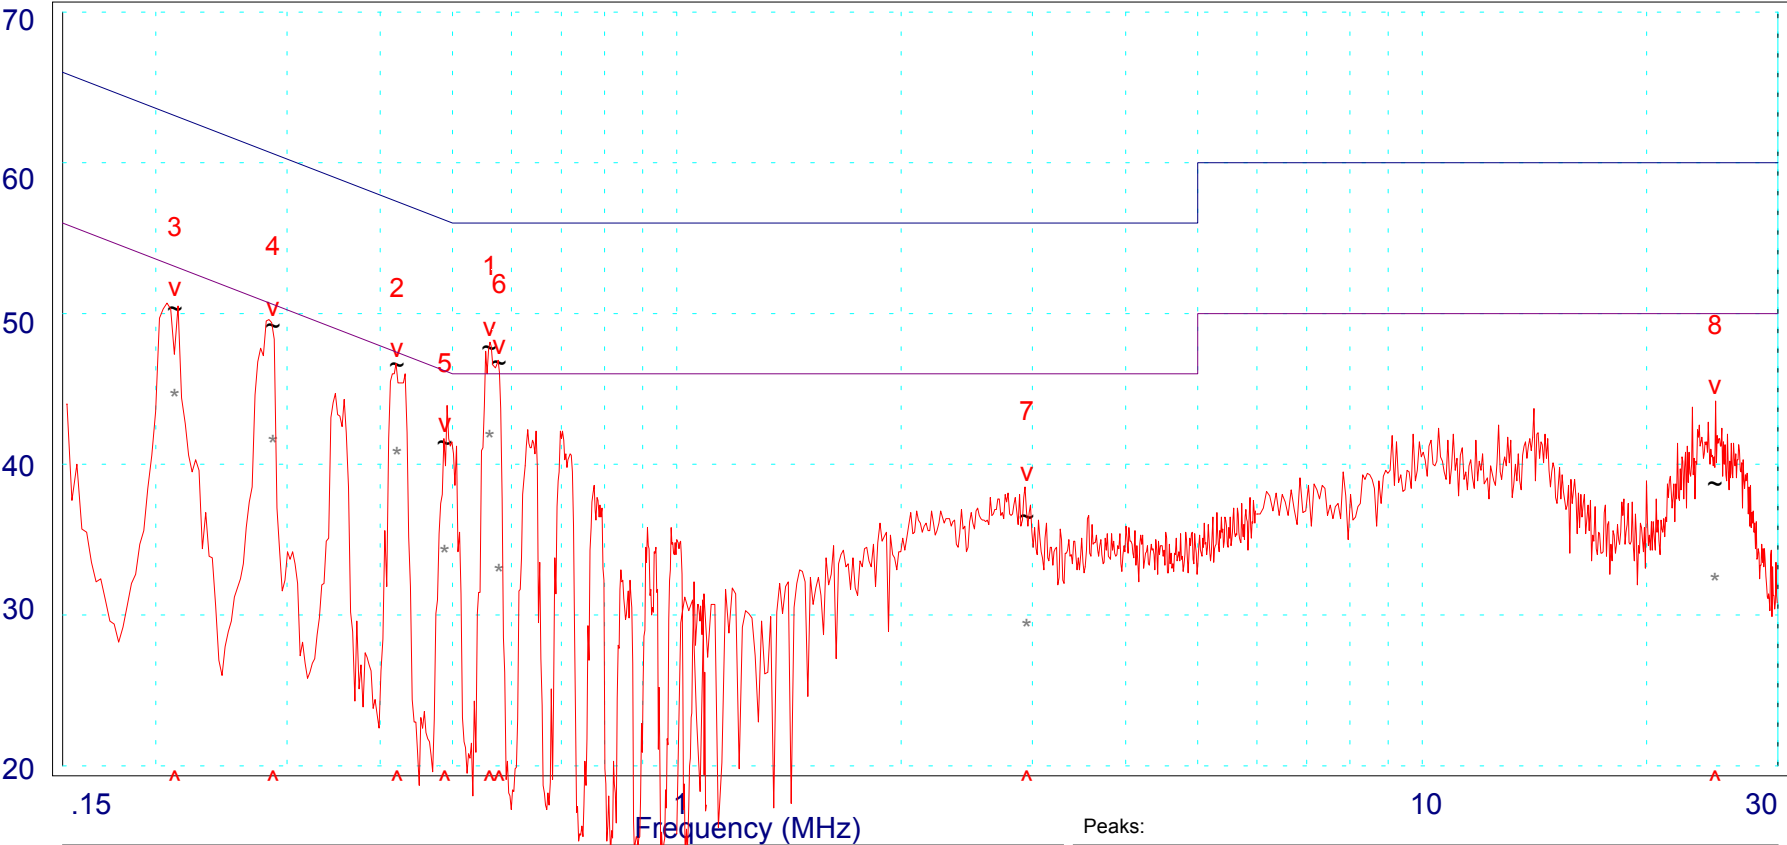

Fujitsu Australia Limited  
Lifebook - Ginger

Conducted Emissions - Active Line

Limits:  
FCC\_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)  
FCC\_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Legend:  
— ALine1

Ver 5.5 Build 71  
conducted lab 3 using L-22 25A LISN  
t:L0220104 c1:C1610503 c2:C1520503 p:NONE a:L0171103  
Site ID: Room#3,57 Assembly Drv. Tullamarine, VIC  
Test Officer:Chieu Huynh

Source:  
M020235c 7 8 9

Melbourne- 57 Assembly Drv Tullamarine, 3043, Vic, Australia Ph+(613) 9335 3333 Fax+(613) 9338 9260  
Sydney---- 16,6 Gladstone Rd Castle Hill, 2154, NSW, Australia Ph+(612) 9899 4599 Fax+(612) 9899 4019

| Peaks: |            |             |        |                 |          |               |                   |
|--------|------------|-------------|--------|-----------------|----------|---------------|-------------------|
| No     | Freq (MHz) | Peak (dBuV) | Qp Val | FCC_BQPN (dBuV) | dL1 (dB) | Av Val (dBuV) | FCC_BAVN dL2 (dB) |
| 1      | .56        | 48.1        | 46.7   | 56.0            | -9.3     | 40.6          | 46.0 -5.4         |
| 2      | .42        | 46.7        | 45.6   | 57.4            | -11.8    | 39.5          | 47.4 -7.9         |
| 3      | .21        | 50.7        | 49.3   | 63.1            | -13.8    | 43.3          | 53.1 -9.8         |
| 4      | .29        | 49.5        | 48.2   | 60.6            | -12.4    | 40.3          | 50.6 -10.3        |
| 5      | .49        | 41.7        | 40.4   | 56.2            | -15.8    | 33.0          | 46.2 -13.2        |
| 6      | .58        | 46.9        | 45.7   | 56.0            | -10.3    | 31.7          | 46.0 -14.3        |
| 7      | 2.95       | 38.5        | 35.5   | 56.0            | -20.5    | 28.1          | 46.0 -17.9        |
| 8      | 24.71      | 44.2        | 37.7   | 60.0            | -22.3    | 31.1          | 50.0 -18.9        |

EMC Technologies Pty. Ltd. - Global Product Certification


FCC Class B  
Conducted Emissions (dBuV)

Job No:M030233F

Test Date: 03/03/03

r:\pcf\030233F\_4.PCF

GRAPH No. 4

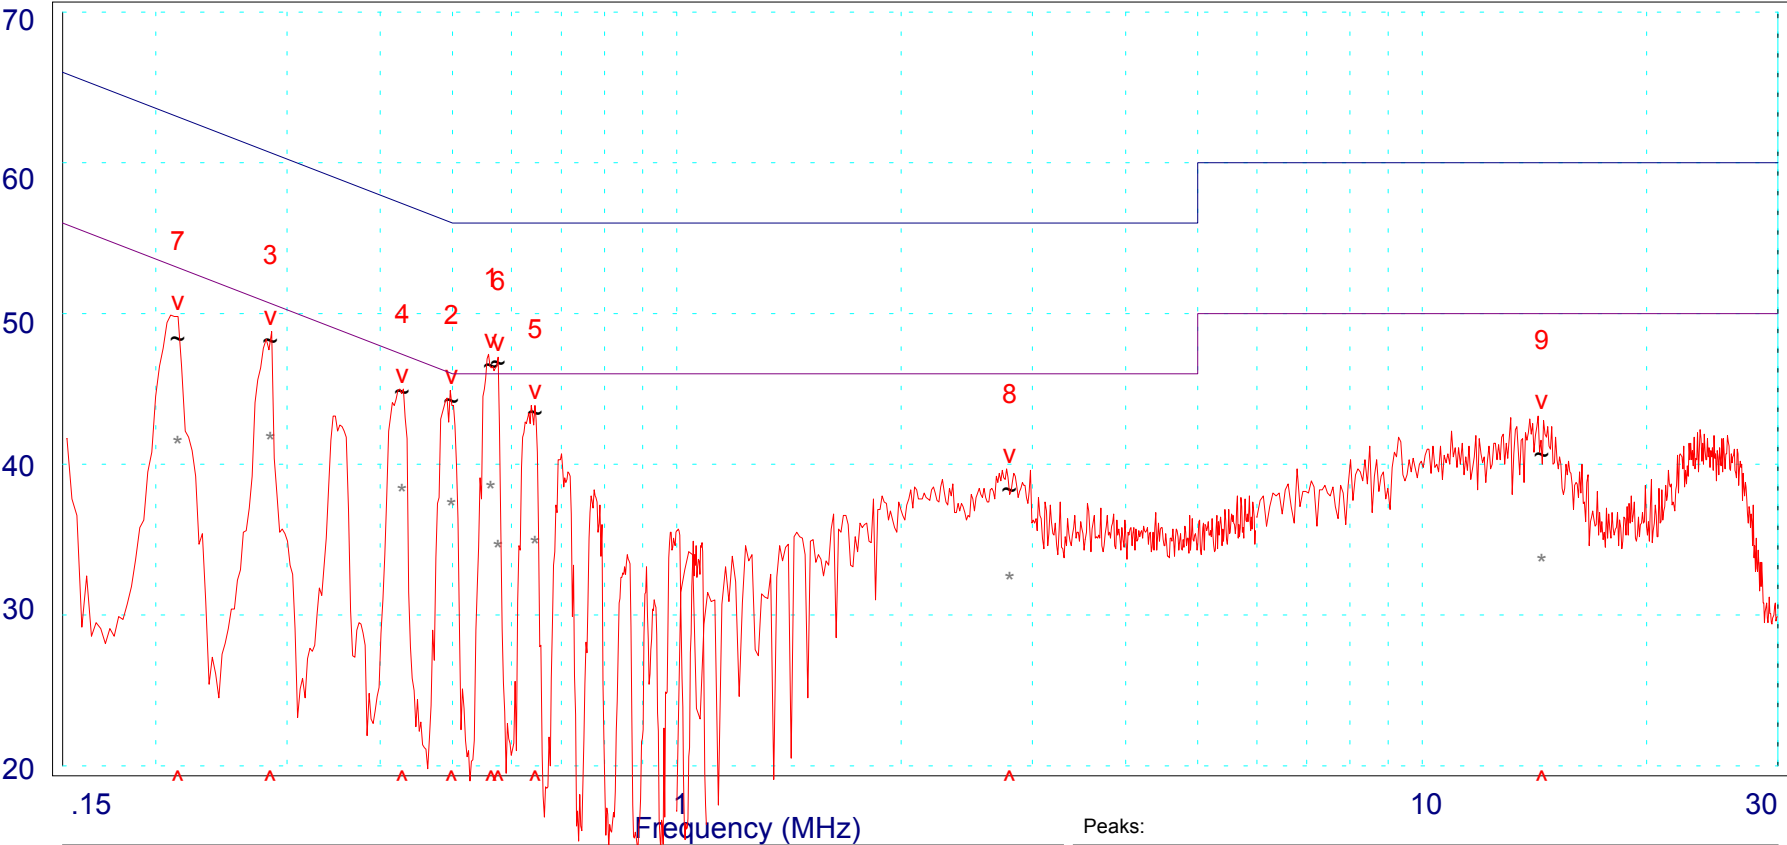

Fujitsu Australia Limited  
Lifebook - Ginger

Conducted Emissions - Neutral Line

Limits:  
FCC\_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)  
FCC\_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

Legend:  
NLine1

Ver 5.5 Build 71  
conducted lab 3 using L-22 25A LISN  
t:L0220104 c1:C1610503 c2:C1520503 p:NONE a:L0171103  
Site ID: Room#3,57 Assembly Drv. Tullamarine, VIC  
Test Officer:Chieu Huynh

Source:  
M020235c 10 11 12

Melbourne- 57 Assembly Drv Tullamarine, 3043, Vic, Australia Ph+(613) 9335 3333 Fax+(613) 9338 9260  
Sydney---- 16,6 Gladstone Rd Castle Hill, 2154, NSW, Australia Ph+(612) 9899 4599 Fax+(612) 9899 4019

| Peaks: |            |             |               |                   |               |                   |      |       |
|--------|------------|-------------|---------------|-------------------|---------------|-------------------|------|-------|
| No     | Freq (MHz) | Peak (dBuV) | Qp Val (dBuV) | FCC_BQPN dL1 (dB) | Av Val (dBuV) | FCC_BAVN dL2 (dB) |      |       |
| 1      | .56        | 47.3        | 45.5          | 56.0              | -10.5         | 37.2              | 46.0 | -8.8  |
| 2      | .50        | 44.9        | 43.2          | 56.0              | -12.8         | 36.1              | 46.0 | -9.9  |
| 3      | .28        | 48.9        | 47.2          | 60.7              | -13.5         | 40.5              | 50.7 | -10.2 |
| 4      | .43        | 45.0        | 43.8          | 57.3              | -13.5         | 37.0              | 47.3 | -10.3 |
| 5      | .65        | 43.9        | 42.4          | 56.0              | -13.6         | 33.6              | 46.0 | -12.4 |
| 6      | .58        | 47.1        | 45.7          | 56.0              | -10.3         | 33.3              | 46.0 | -12.7 |
| 7      | .21        | 49.8        | 47.3          | 63.0              | -15.7         | 40.2              | 53.0 | -12.8 |
| 8      | 2.80       | 39.7        | 37.3          | 56.0              | -18.7         | 31.2              | 46.0 | -14.8 |
| 9      | 14.46      | 43.2        | 39.6          | 60.0              | -20.4         | 32.4              | 50.0 | -17.6 |