

THANK YOU!

For purchasing the new ESCORT M2 Dash Cam

Download Drive Smarter® to Get Started

With the Drive Smarter® app you can view, edit, and share footage from your smartphone or PC/Mac plus share and receive real-time driver alerts. Download today!





drivesmarter.com/downloads



Full manual available at: www.escortradar.com/manuals



ESCORT M2 Features

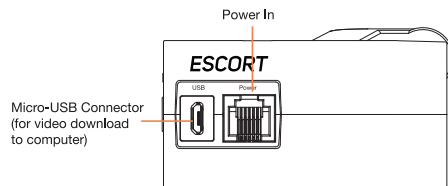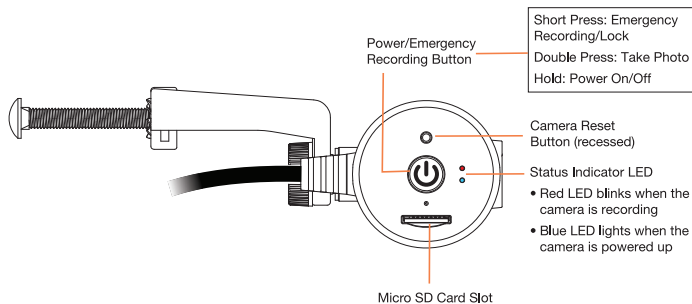


Note: Some components from your compatible detector's mount will be used. Your M2 is pre-mounted on the Camera Mount Arm.


Attach ESCORT M2 to EZ Mag Mount™

Remove your detector from the sticky mount and attach the M2 as shown below.

- 1 Remove Radar from Windshield and Detach EZ Mag Mount™

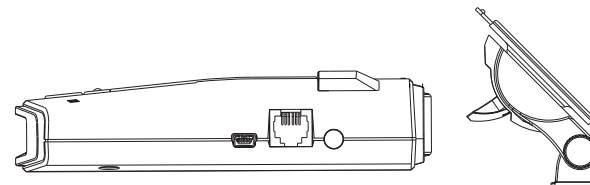

- 2 Attach ESCORT M2 to Mount

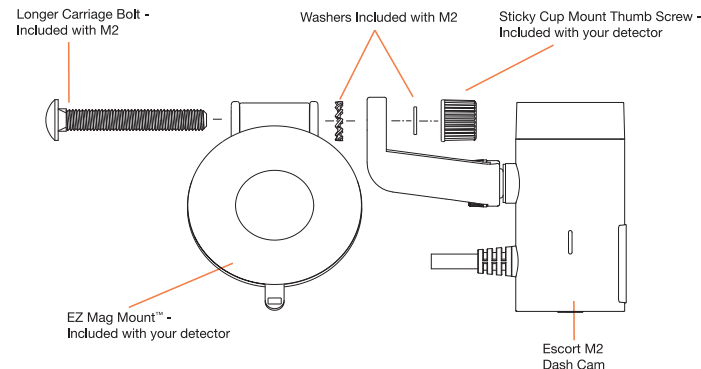

Warning: Tighten Thumb Screw firmly to ensure stable video recordings

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.


©2021 ESCORT Inc. ESCORT® is a trademark of ESCORT, Inc. APPLE AND THE APPLE LOGO ARE TRADEMARKS OF APPLE INC., REGISTERED IN THE U.S. AND OTHER COUNTRIES. APP STORE IS A SERVICE MARK OF APPLE INC. ANDROID, GOOGLE PLAY, AND THE GOOGLE PLAY LOGO ARE TRADEMARKS OF GOOGLE INC. AND ANY USE OF SUCH MARKS BY ESCORT IS UNDER LICENSE.

DRIVE SMARTER® IS A REGISTERED TRADEMARK OF CEDAR ELECTRONICS CORPORATION.


©2021 ESCORT Inc.

Mount to Your Windshield

- 3 Attach radar/laser detector to EZ Mag Mount™ with M2 installed




- 4 Connect M2 power cable to radar/laser detector




Important: Make sure the M2 (not the detector) is centered on your windshield.

- 5 Connect Smart Cord to M2 and 12V power source



- 6 Mount to windshield, adjust radar/camera angle and tighten assembly screws



7 Download the Drive Smarter® App

Download the Drive Smarter App from the App Store or Google Play and install it on your smartphone. Follow the Tutorial on the App.



- Adjust Volume
- Change Language
- Change Resolution
- Format SD Card
- Update Firmware
- ...and more!

Troubleshooting

If your unit is not operating properly, please follow these troubleshooting steps:

- Make sure the power cord to the M2, as well as the pigtail cord from the M2 to the detector, are both properly connected.
- Make sure the socket of your vehicle's cigarette lighter is clean and free of corrosion.
- Make sure the power cord's adapter is firmly seated in your cigarette lighter, and the power LED is on.
- Make sure the micro SD memory card is properly inserted into the memory card slot.
- If there is an SD card error, format the SD card from the app. Please note this will delete all files stored on the card.

For detailed and up-to-date FAQs, please visit www.escortradar.com/FAQs

ESCORT M2

RADAR-MOUNTED SMART DASH CAM



QUICK START GUIDE