APPENDIX B – EUT TEST SETUP PHOTOGRAPHS

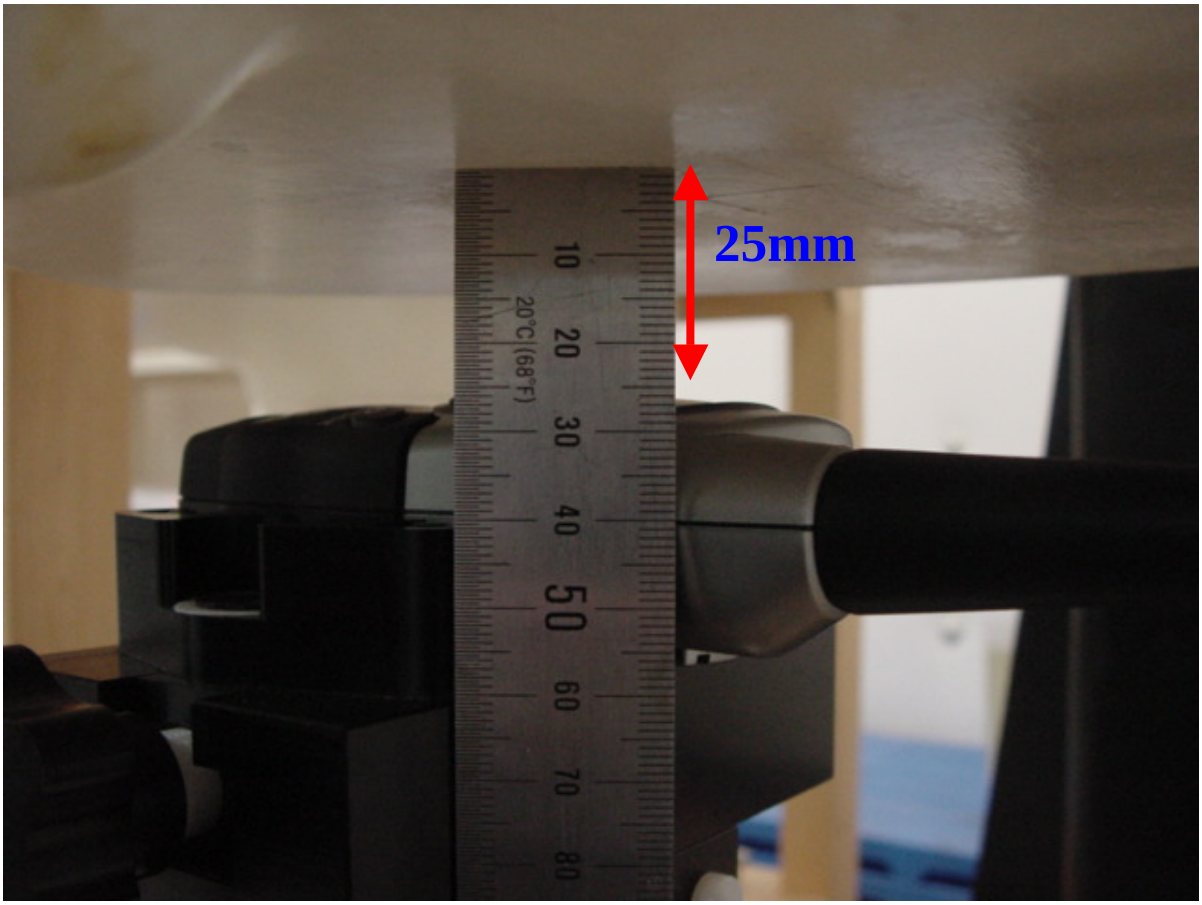
25mm
10
20
30
40
50
60
70
80
20°C (68°F)

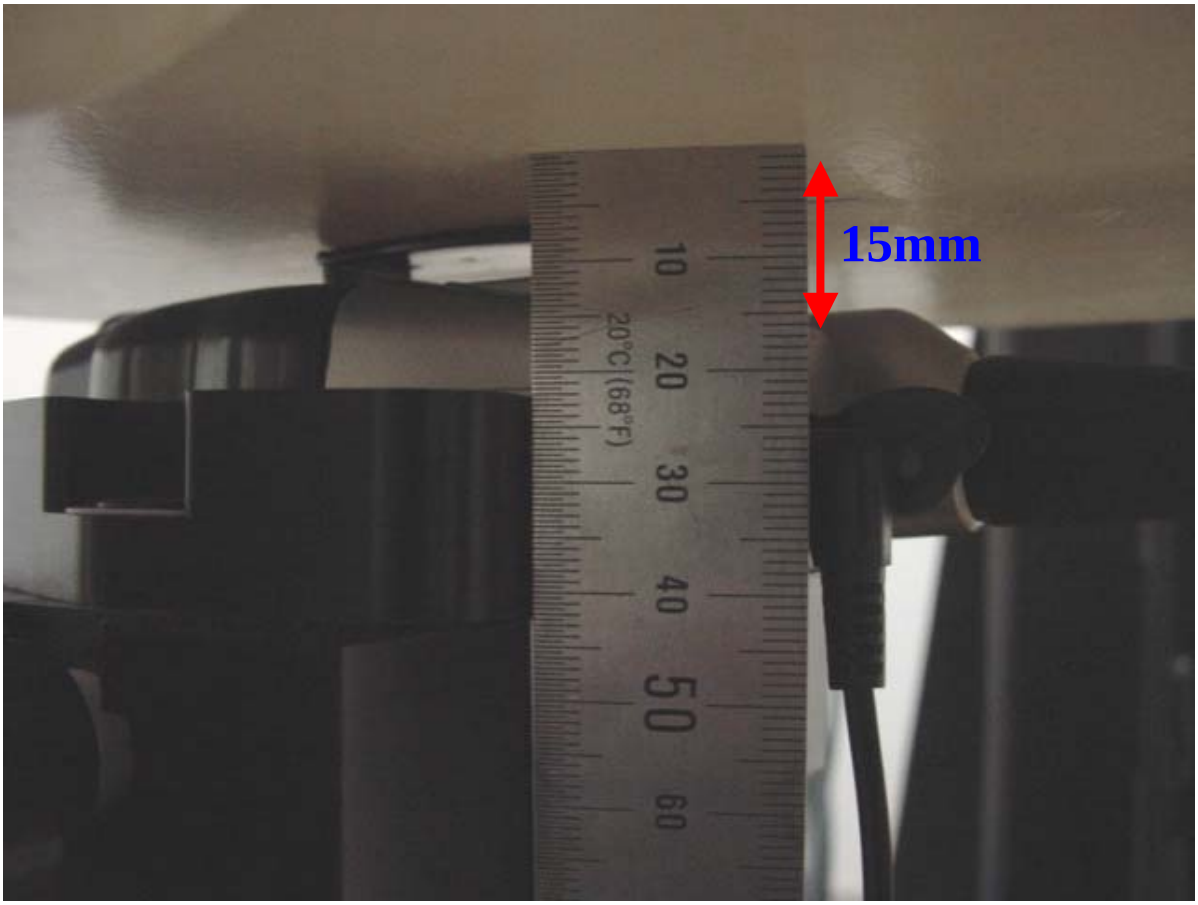
15mm
10
20
30
40
50
60
20°C (68°F)

[Tissue Liquid Depth : 15cm]

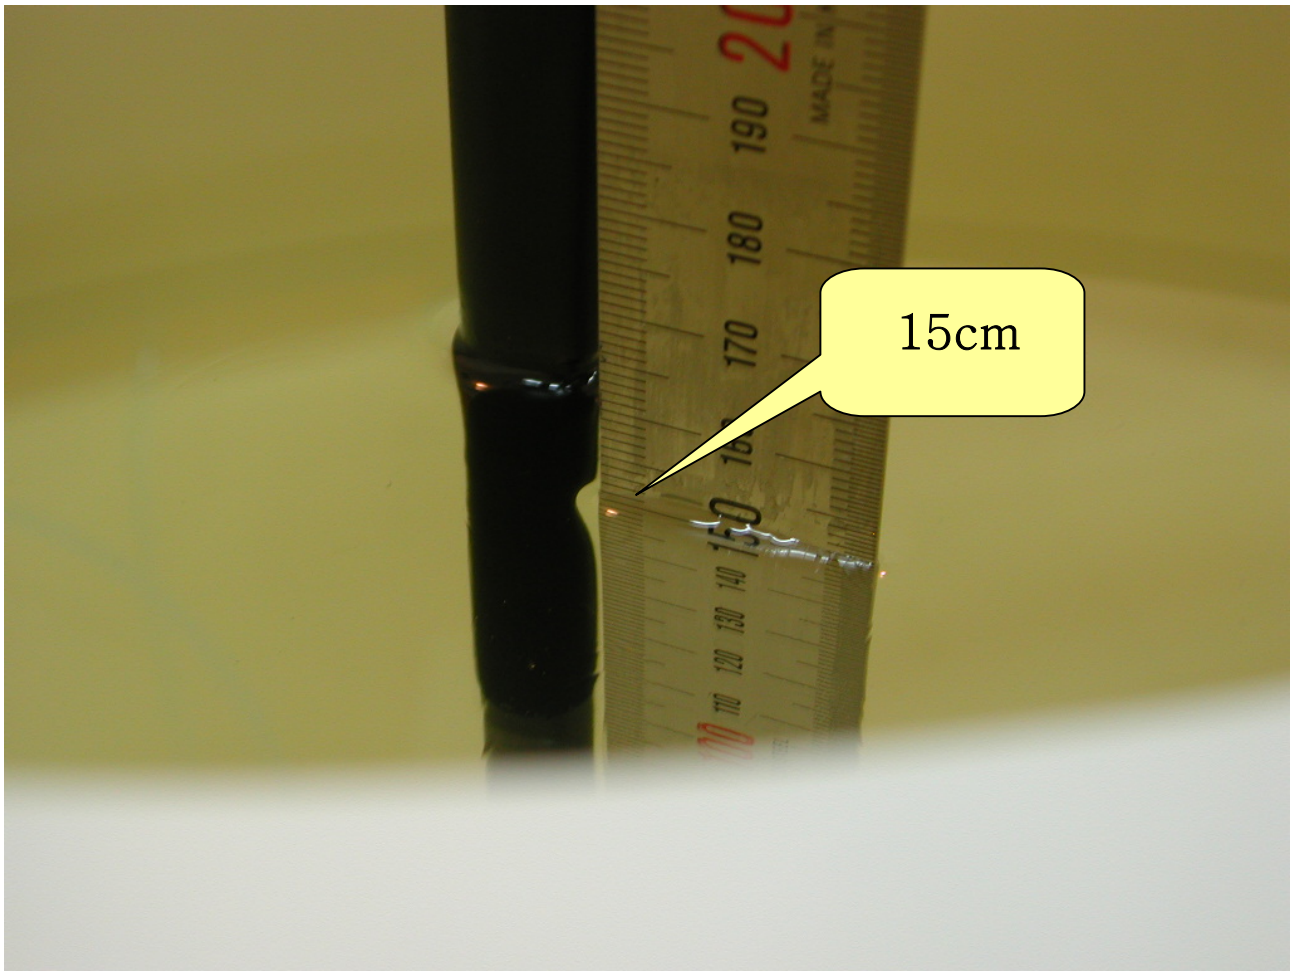

■ Battery Type: Energizer (Alkaline)

GMRS	
Time	Power Out
0	4.100
2	3.900
4	3.700
6	3.500
8	3.280
10	3.000
12	2.900
14	2.800
16	2.700
18	2.650
20	2.600
22	2.550
24	2.500
26	2.470
28	2.430
30	2.400
32	2.370
34	2.350
36	2.330
38	2.300
40	2.280

■ Battery Type: Duracell (Alkaline)

FRS	
Time	Power Out
0	0.800
2	0.700
4	0.600
6	0.500
8	0.440
10	0.380
12	0.360
14	0.340
16	0.310
18	0.290
20	0.270
22	0.250
24	0.230
26	0.210
28	0.190
30	0.180
32	0.170
34	0.160
36	0.150
38	0.140
40	0.130

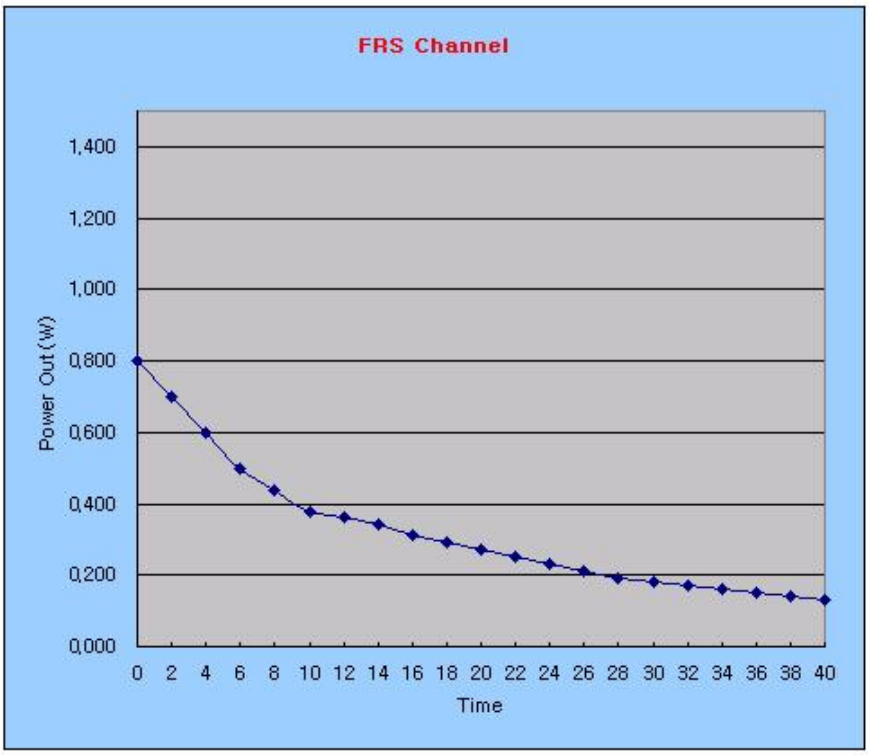

Date : March 18, 2004

Federal Communications Commission
Authorization and Evaluation Division
7435 Oskland Mills Road
Columbia, MD21046

Subject : 2104 Model Battery Type

To whom it may concern
Here we would like to confirm that the 'AA' type batteries only should be used For this subject model 2104.(FCC ID: QL2GMRS2104)

Sincerely Yours,
Global Link Corporation Limited.

Signed by

President

Feb'24'2004