



**FCC CFR47 PART 15 SUBPART C
CLASS II PERMISSIVE CHANGE**

TEST REPORT

FOR

WIRELESS BRIDGE/ROUTER

MODEL NUMBER: VIVATO 2.4 GHZ WI-FI BRIDGE/ROUTER

BRAND NAME: VIVATO WI-FI BRIDGE/ROUTER

FCC ID: QLNVP824BWFBR

REPORT NUMBER: 04U2645-1

ISSUE DATE: JULY 22, 2004

Prepared for
VIVATO, INC.
12610 E. MIRABEAU PKWY, SUITE 900
SPOKANE, WA 99216
USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION.....	4
3. CLASS II PERMISSIVE CHANGE DESCRIPTION.....	4
4. TEST METHODOLOGY	5
5. FACILITIES AND ACCREDITATION	5
6. CALIBRATION AND UNCERTAINTY.....	6
6.1. MEASURING INSTRUMENT CALIBRATION.....	6
6.2. MEASUREMENT UNCERTAINTY.....	6
6.3. TEST AND MEASUREMENT EQUIPMENT.....	7
7. SETUP OF EQUIPMENT UNDER TEST	8
8. APPLICABLE LIMITS AND TEST RESULTS	12
8.1. MAXIMUM PERMISSIBLE EXPOSURE	12
8.2. RADIATED EMISSIONS.....	15
8.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS LIMITS.....	15
8.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	18
8.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	126
8.3. POWERLINE CONDUCTED EMISSIONS	132
9. SETUP PHOTOS	136

1. TEST RESULT CERTIFICATION

COMPANY NAME: VIVATO, INC.
12610 E. MIRABEAU PKWY, SUITE 900
SPOKANE, WA 99216, USA

EUT DESCRIPTION: WIRELESS BRIDGE/ROUTER

MODEL: Vivato 2.4 GHz Wi-Fi Bridge/Router

DATE TESTED: APRIL 28 TO MAY 11, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



NEELESH RAJ
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is 802.11b Access Point/Bridge containing two identical transceivers that operate in 2400 to 2483.5 MHz band. The maximum peak output power is 24.47 dBm.

3. CLASS II PERMISSIVE CHANGE DESCRIPTION

The EUT can be operated in the following 6 configurations with the following Antenna's. The following Panel and Omni Antenna's are used for point to multipoint operation, and all Yagi Antenna's are used for point to point operation.

CONFIG#1

ANTENNA	GAIN (dBi)	ANTENNA	GAIN (dBi)
OMNI	11	YAGI	10

CONFIG#2

ANTENNA	GAIN (dBi)	*ANTENNA	GAIN (dBi)
OMNI	11	YAGI	10
		*ANTENNA	GAIN (dBi)
		YAGI	10

*Power splitter (3dB) is used for dual operation.

CONFIG#3

ANTENNA	GAIN (dBi)	ANTENNA	GAIN (dBi)
PANEL	8	OMNI	8.5

CONFIG#4

ANTENNA	GAIN (dBi)	ANTENNA	GAIN (dBi)
OMNI	8.5	OMNI	11

CONFIG#5

ANTENNA	GAIN (dBi)	ANTENNA	GAIN (dBi)
OMNI	8.5	YAGI	10

CONFIG#6

ANTENNA	GAIN (dBi)	ANTENNA	GAIN (dBi)
PANEL	8	PANEL	8

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

5. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

6. CALIBRATION AND UNCERTAINTY

6.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

6.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2/15/1906	2/4/2005
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	10/13/04
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/13/04
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/04
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/04
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/04
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/04
RF Filter Section	HP	85420E	3705A00256	11/21/04
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/04
Spectrum Analyzer	HP	E4446A	US42510266	7/23/04
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	4/25/05

7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	FUJITSU	LIFEBOOK C353	CP009840	N/A
AC ADAPTER	N/A	AM-121000	N/A	N/A
AC ADAPTER	SUMSUNG	PSCV 480103A	N/A	N/A
OMNI ANTENNA (11dBi)	MAXRAD	MFB24011PTRPC	N/A	N/A
YAGI ANTENNA (10dBi)	MAXRAD	MYP24010PTRPC	N/A	N/A
PANEL ANTENNA (8dBi)	MAXRAD	MP24008XFPTRPC	N/A	N/A
OMNI ANTENNA (8.5dBi)	SUPERPASS	SPSHG60	N/A	N/A

I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US115	UNSHIELDED	2m	N/A
2	DC	1	DC	UNSHIELDED	2m	N/A
3	RS232	1	DB9	SHIELDED	2m	N/A

TEST SETUP

The EUT was remotely operated by the laptop. EUT was set in continuous transmit mode. All Antennas' were tested in their worst-case configurations (angles & polarization).

The transmitter was set to its rated peak output power of 24.47 dBm during all tests.

SETUP DIAGRAM FOR TESTS

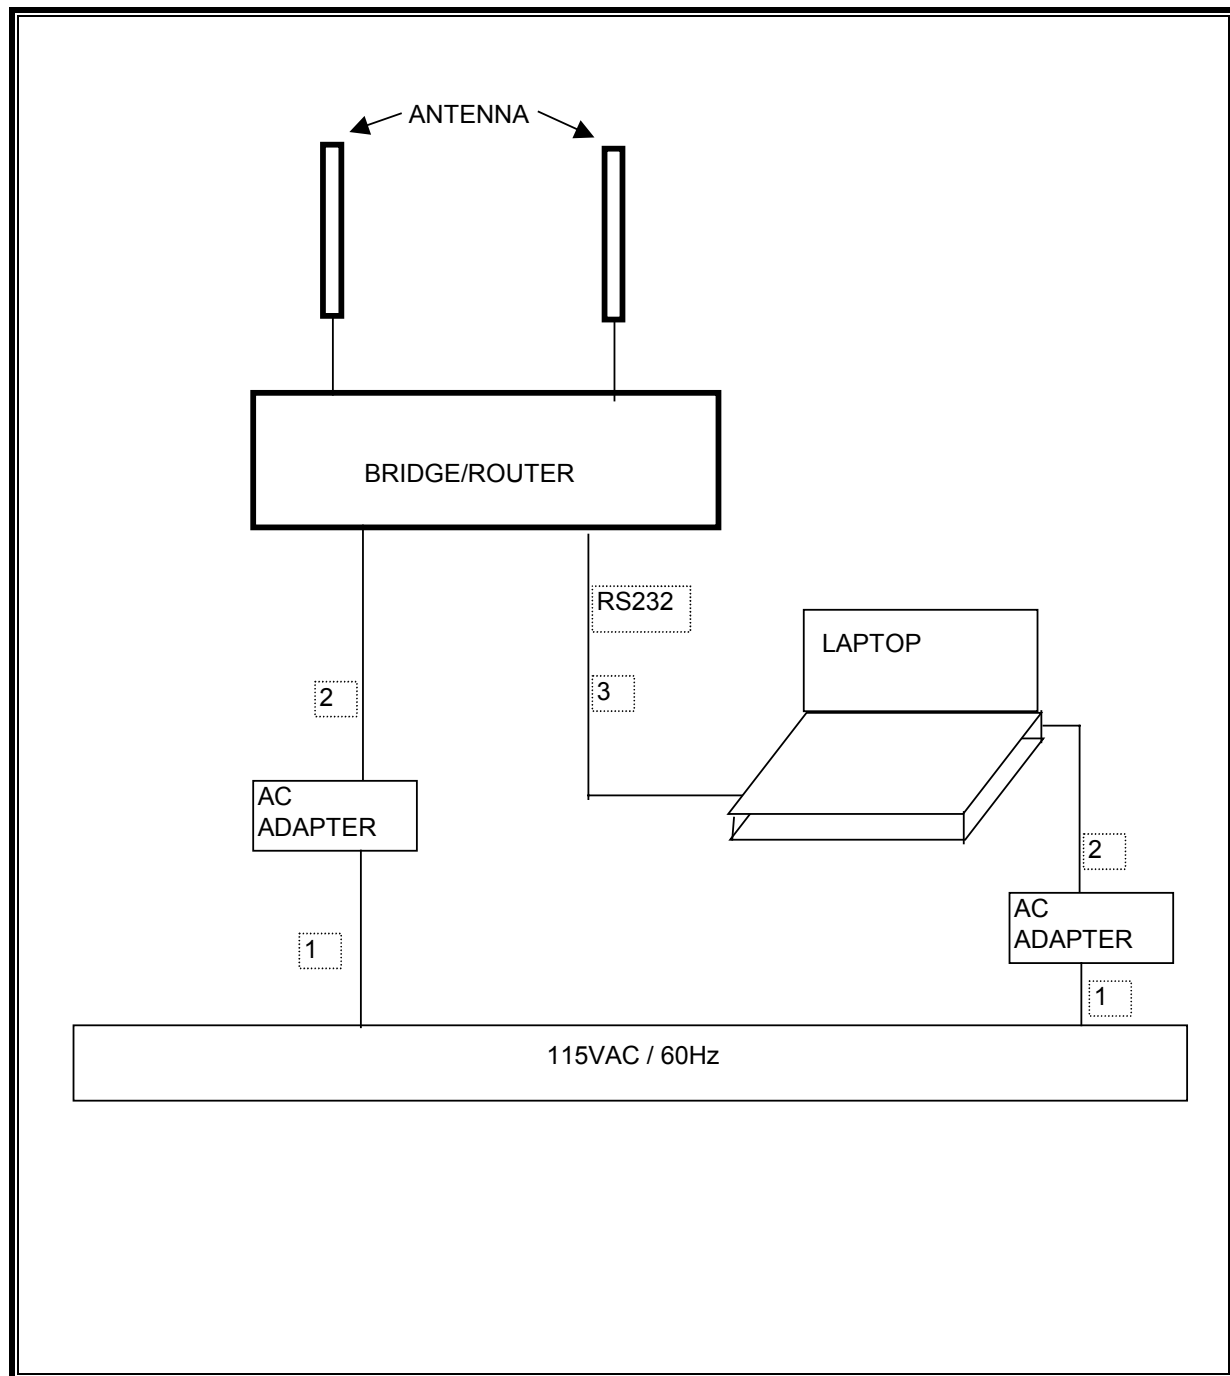

SETUP FOR DIGITAL DEVICE TESTS

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	FUJITSU	LIFEBOOK C353	CP009840	N/A
AC ADAPTER	N/A	AM-121000	N/A	N/A
AC ADAPTER	SUMSUNG	PSCV 480103A	N/A	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US115	UNSHIELDED	2m	N/A
2	DC	1	DC	UNSHIELDED	2m	N/A
3	RS232	1	DB9	SHIELDED	2m	N/A
4	RJ45	1	ETHERNET	UNSHIELDED	10m	N/A

TEST SETUP

The EUT was remotely operated by the laptop. EUT was set in continuous transmit mode. Config#1 was found be worst case.

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

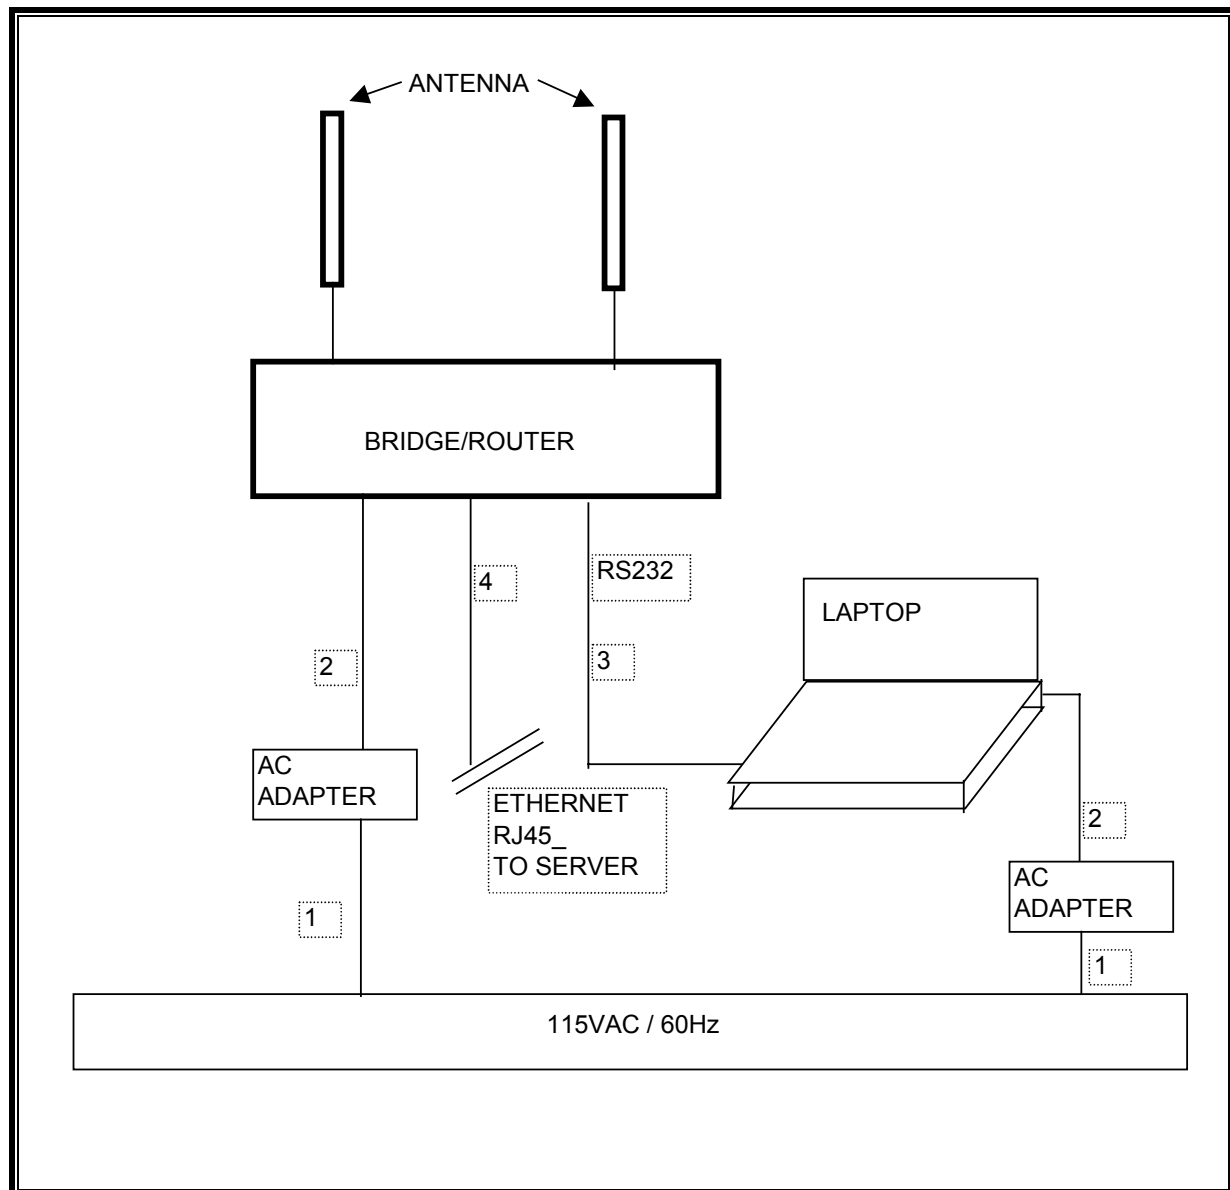

8. APPLICABLE LIMITS AND TEST RESULTS

8.1. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

For multiple antennas, a worst-case upper bound calculation can be made by assuming that all signals are in phase. Since Power Density is proportional to Power times Gain, the total power density is = (P₁ * G₁) + (P₂ * G₂) + ... + (P_n * G_n) and the MPE distance is given by

$$d = 0.282 * ((10^{((P_1 + G_1) / 20)} + 10^{((P_2 + G_2) / 20)} + \dots + 10^{((P_n + G_n) / 20)}) / \sqrt{S})$$

where

d = MPE distance in cm
P₁ = Power fed to antenna 1 in dBm
G₁ = Antenna 1 Gain in dBi
P₂ = Power fed to antenna 2 in dBm
G₂ = Antenna n Gain in dBi
P_n = Power fed to antenna 2 in dBm
G_n = Antenna n Gain in dBi
S = Power Density Limit in mW/cm²

For all two antenna configurations, P₁ = P₂ = P, thus:

$$d = 0.282 * (10^{((P + G_1) / 20)} + 10^{((P + G_2) / 20)}) / \sqrt{S}$$

LIMITS

From §1.1310 Table 1 (B), S = 1.0 mW/cm²

RESULTS

No non-compliance noted:

Antenna Configuration Number	Antenna Types / Gains	Power Density Limit (mW/cm ²)	Output Power (dBm)	Antenna Gain 1 (dBi)	Antenna Gain 2 (dBi)	MPE Distance (cm)
1	11 dBi Omni / 10 dBi Yagi	1.0	24.47	11.00	10.00	31.66
2	11 dBi Omni / 10 dBi Yagi / 10 dBi Yagi	1.0	24.47	11.00		37.86
			21.47		10.00	
			21.47		10.00	
3	8 dBi Panel / 8.5 dBi Omni	1.0	24.47	8.00	8.50	24.40
4	8.5 dBi Omni / 11 dBi Omni	1.0	24.47	8.50	11.00	29.29
5	8.5 dBi Omni / 10 dBi Yagi	1.0	24.47	8.50	10.00	27.47
6	8 dBi Panel / 8 dBi Panel	1.0	24.47	8.00	8.00	23.70

8.2. RADIATED EMISSIONS

8.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS LIMITS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

No non-compliance noted:

No transmitter spurious emissions were detected above the system noise floor below 1GHz from all 6 configurations.


8.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


CONFIG #1:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL


OMNI - MFB24011PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

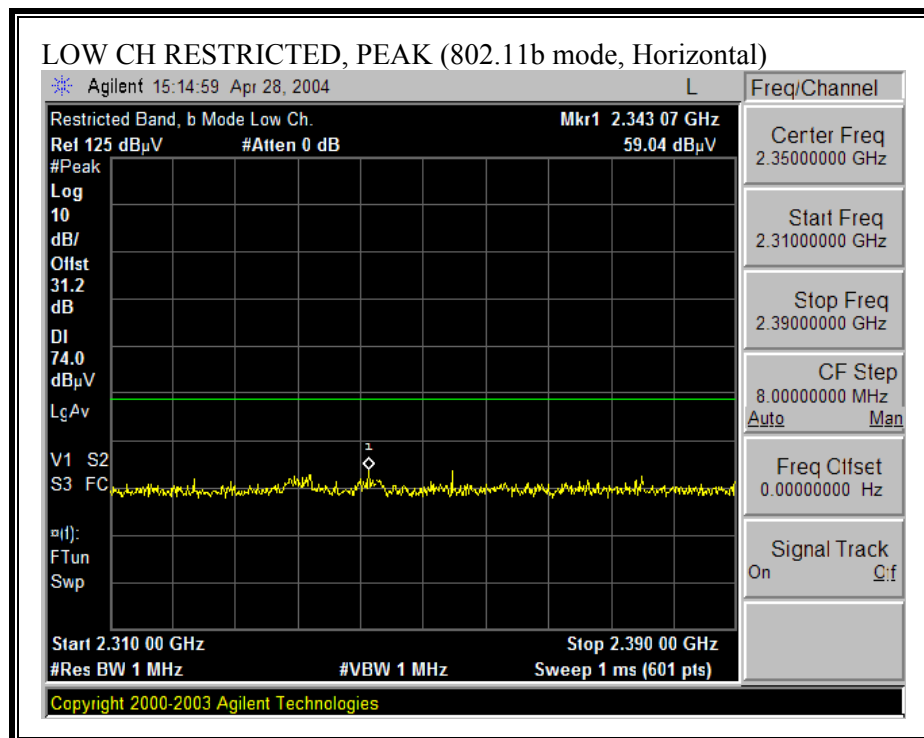

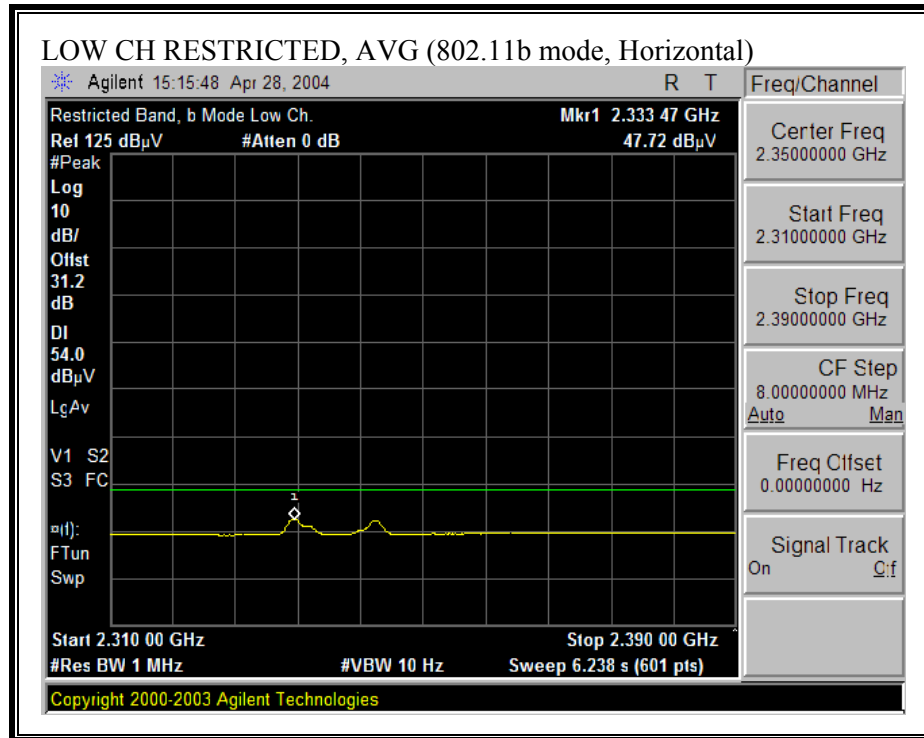



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

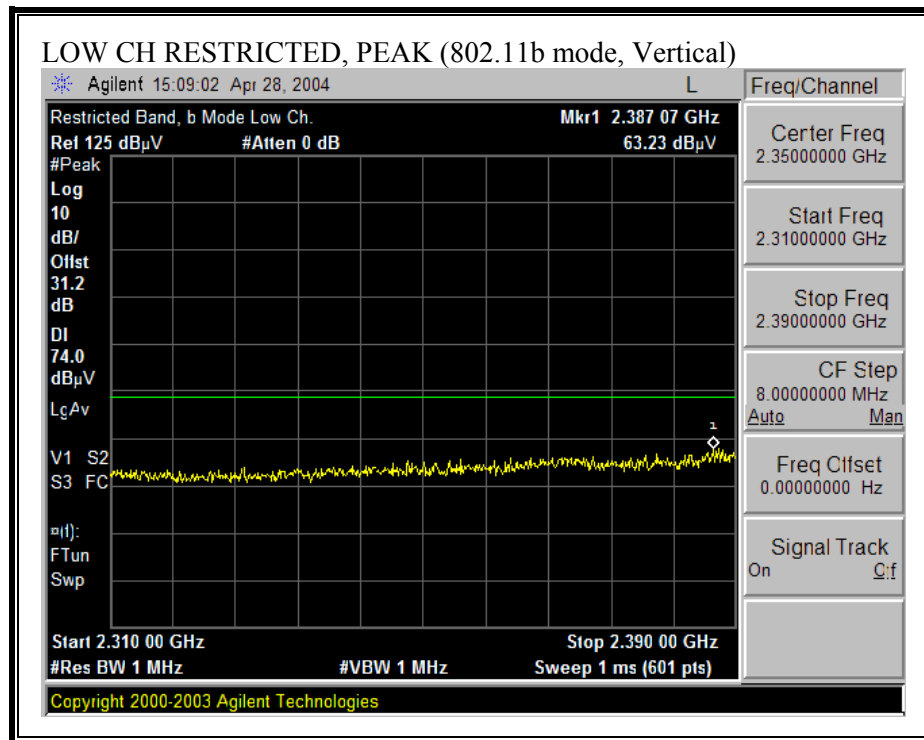

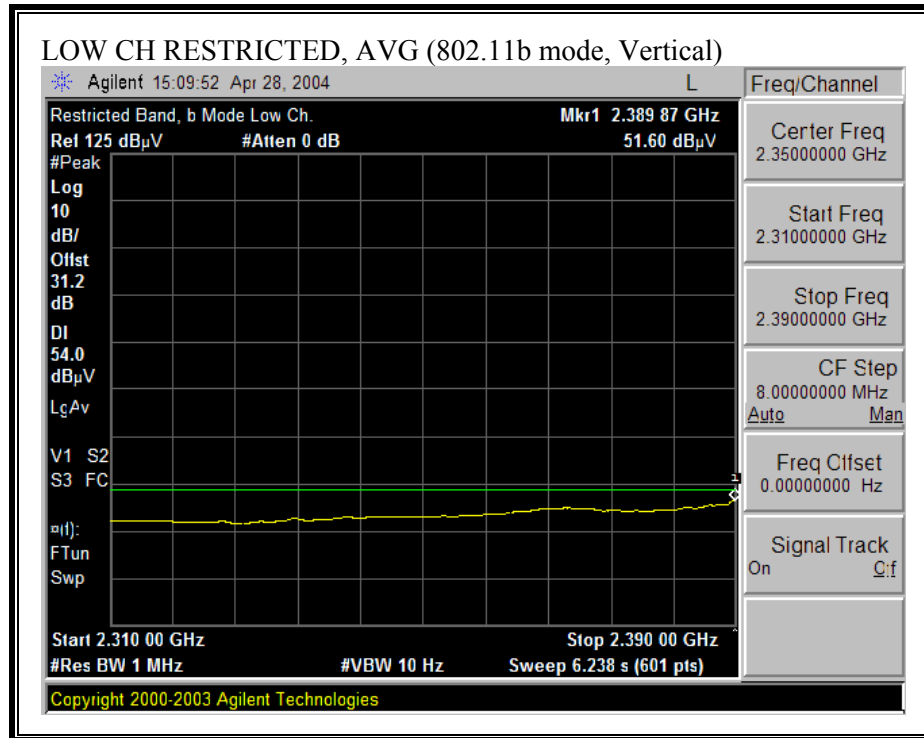



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

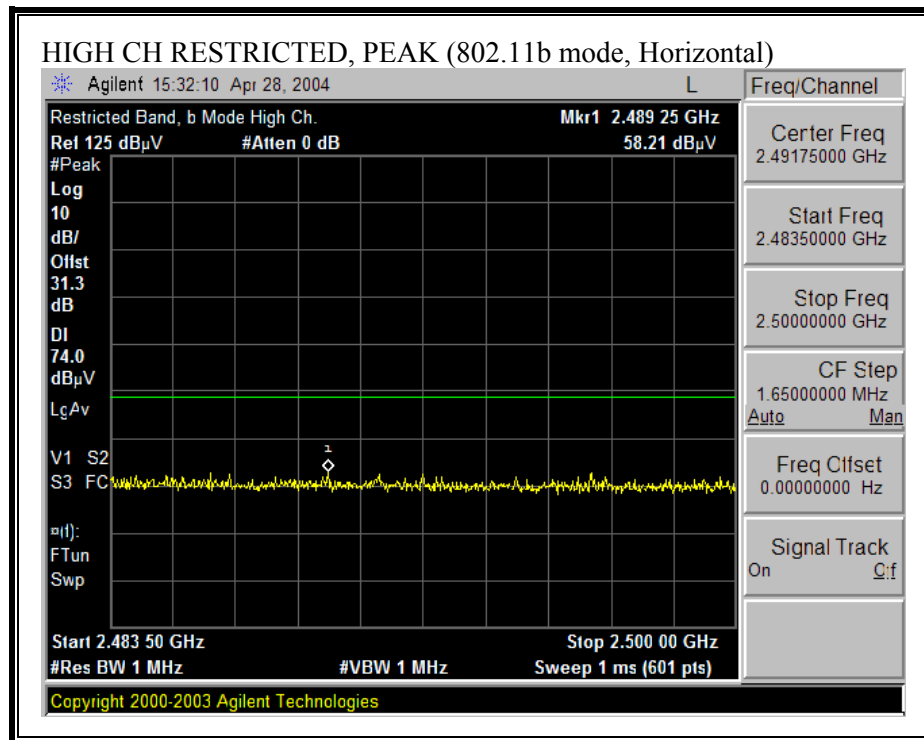

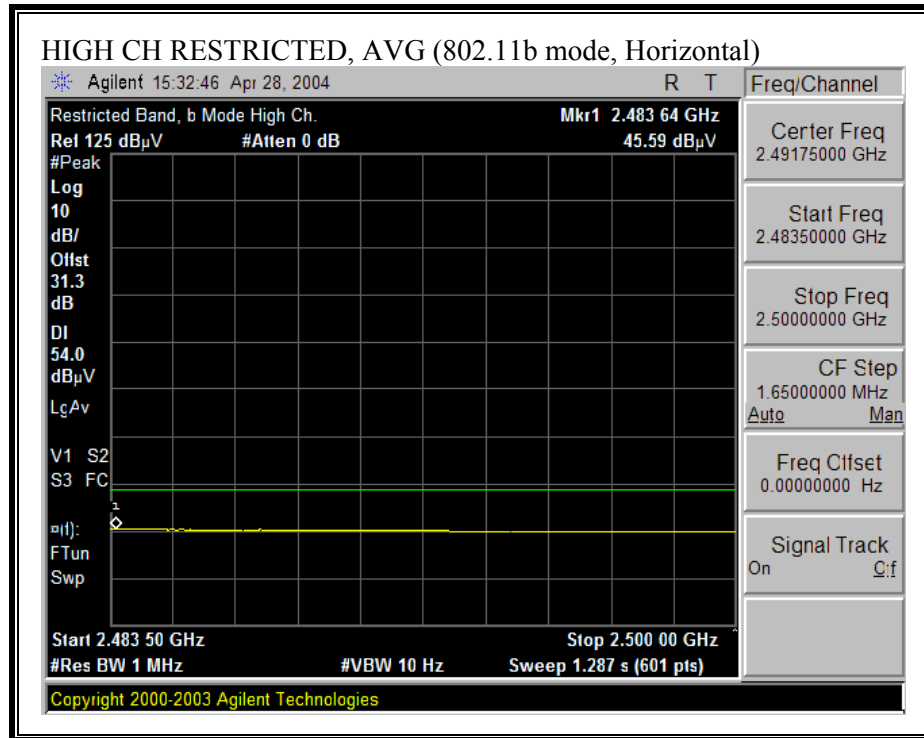


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

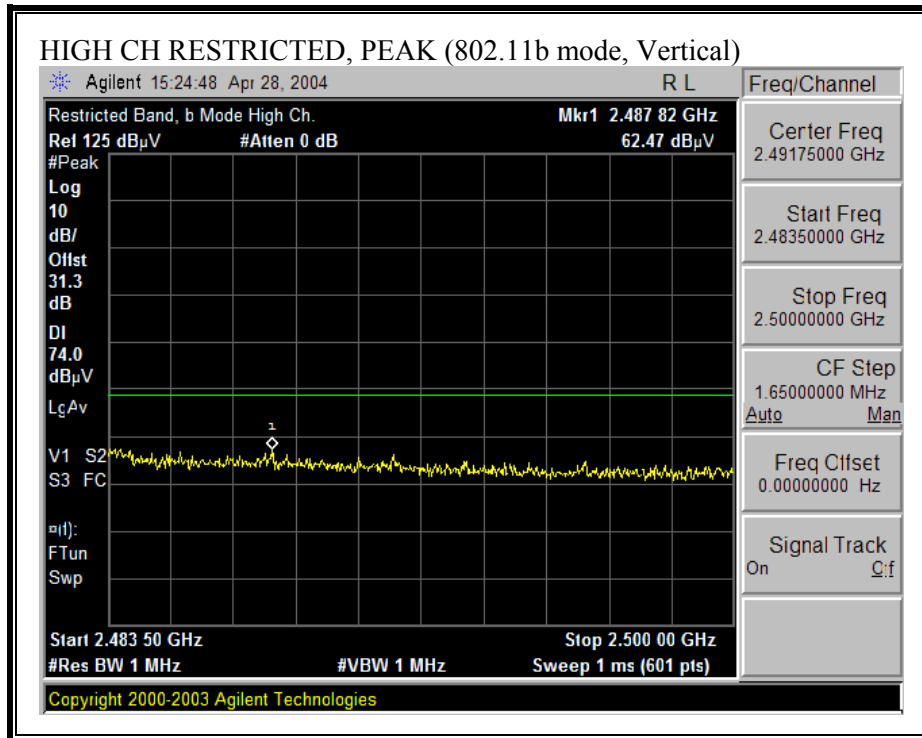


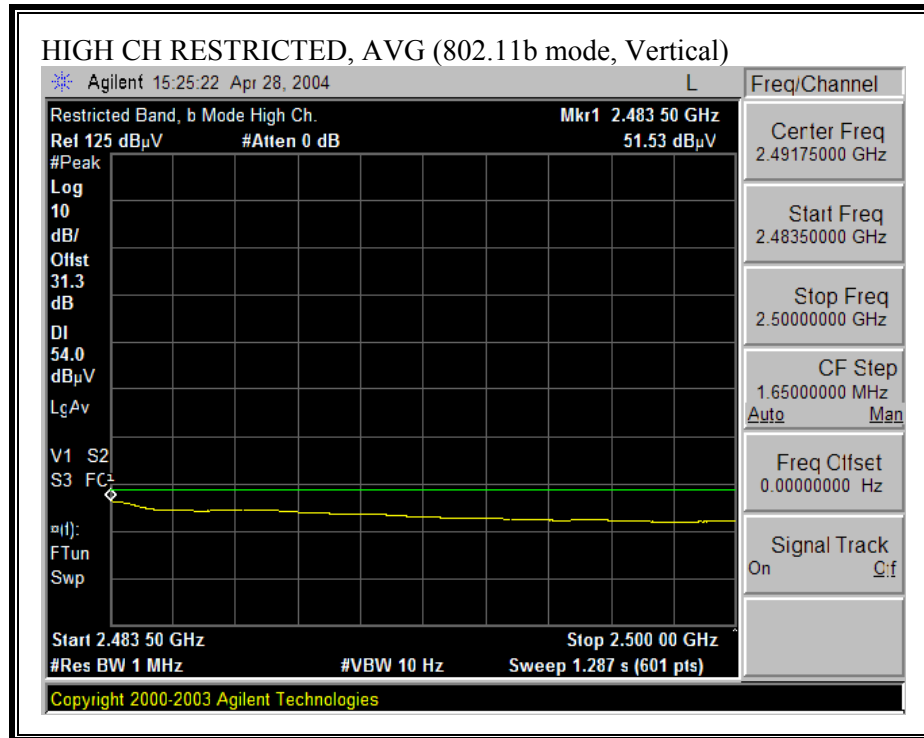


YAGI – MYP24010PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

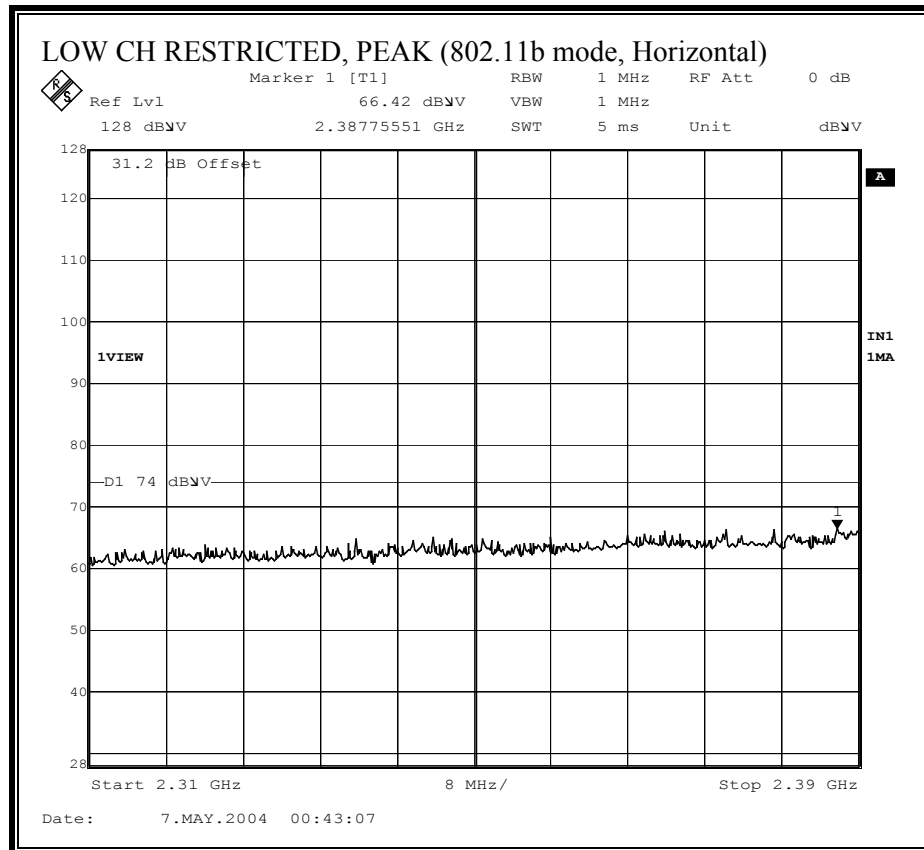

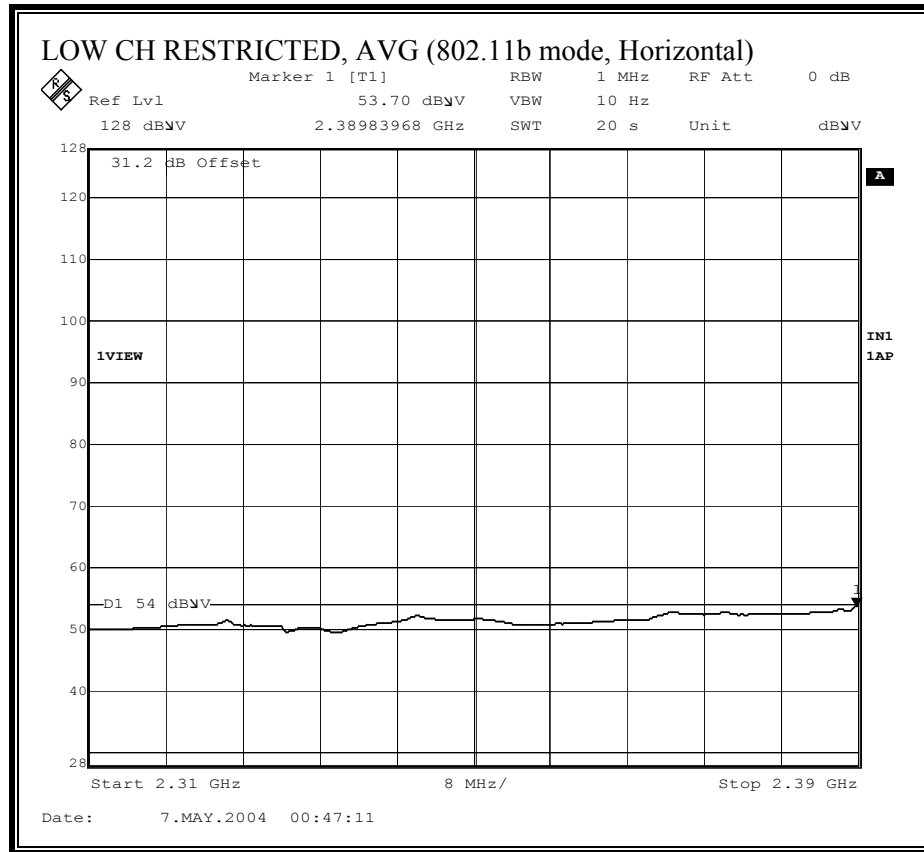



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

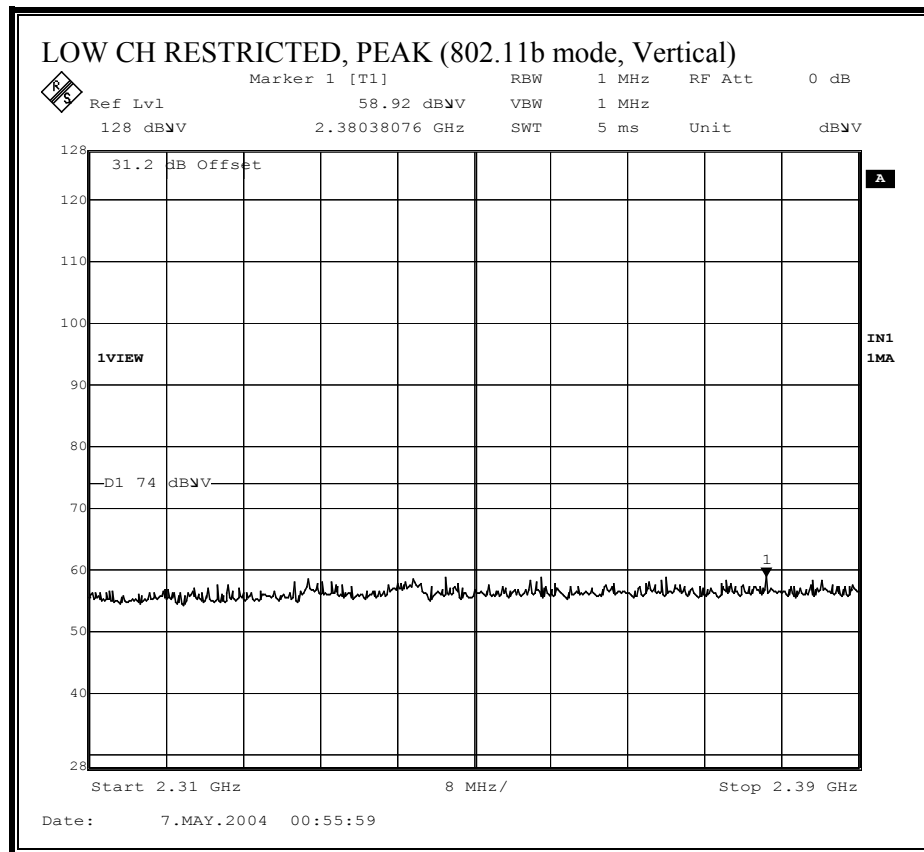

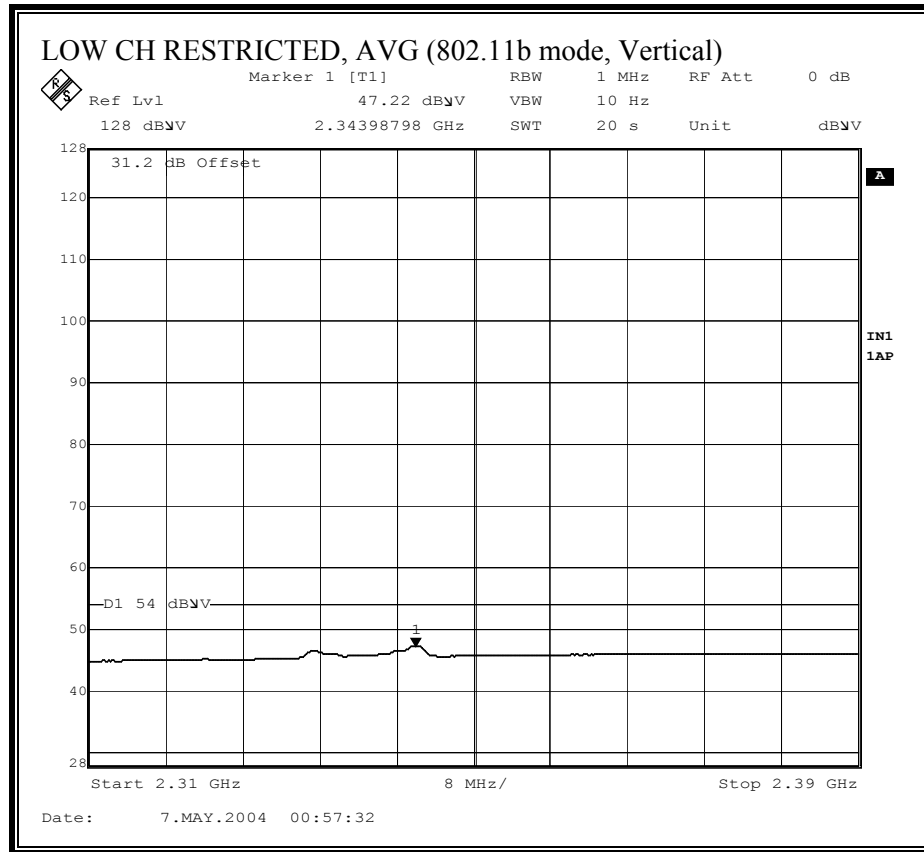



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

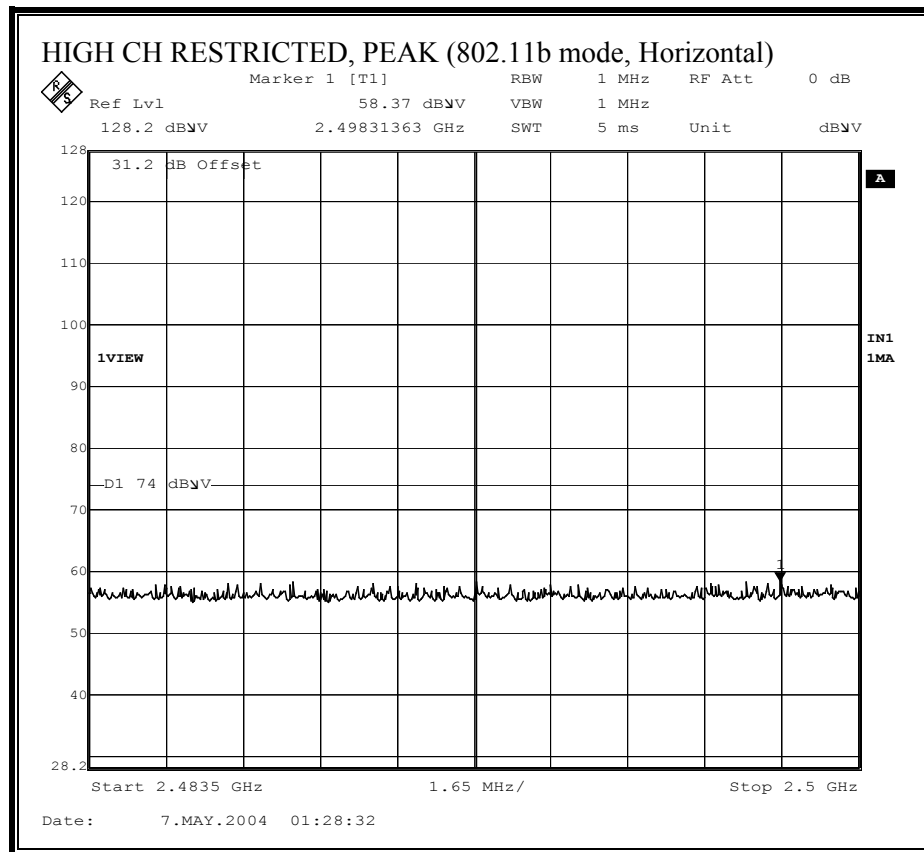

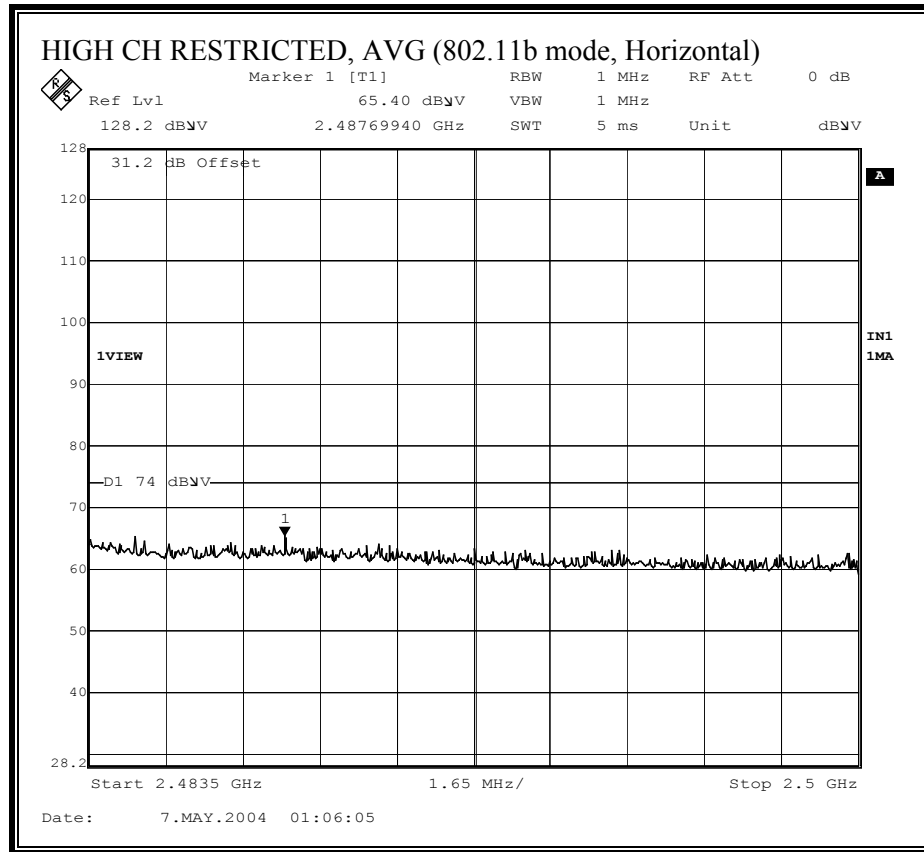

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

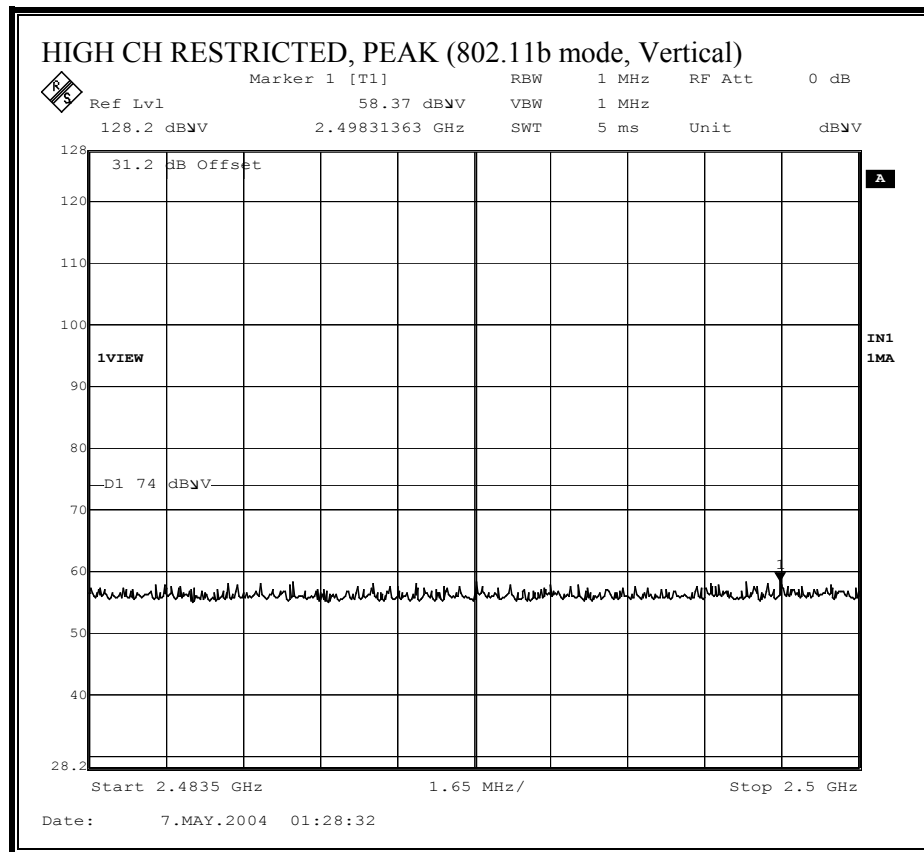

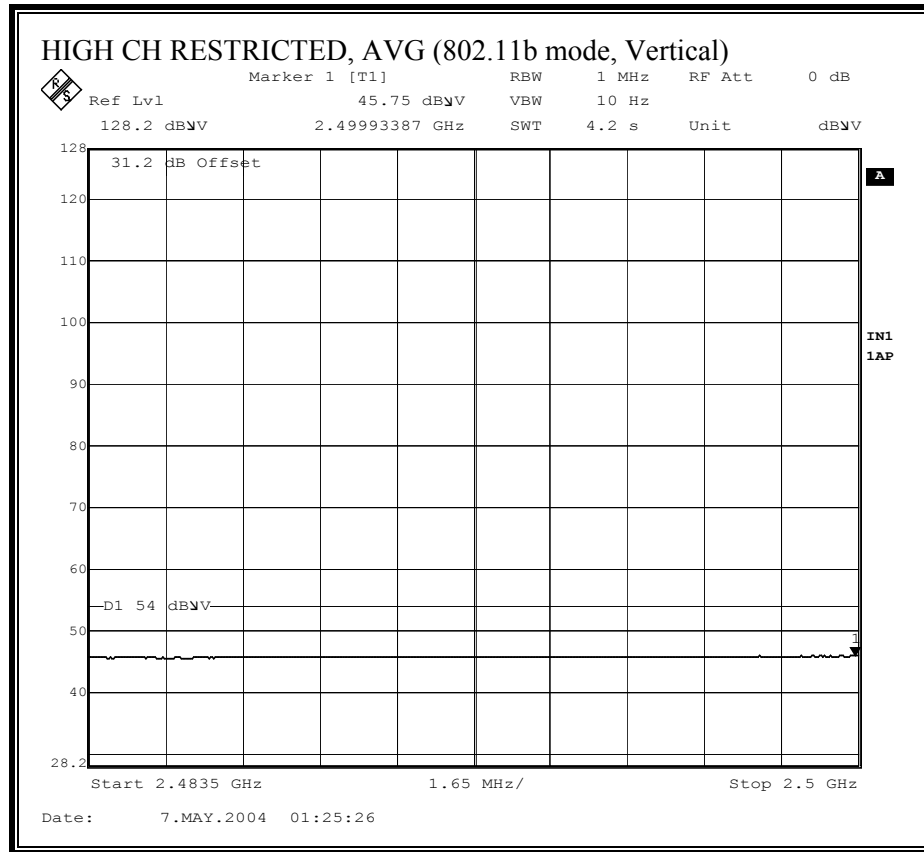



CONFIG #2:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL
					MYP24010PTRPC	10	HORIZONTAL


OMNI_MFB24011PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

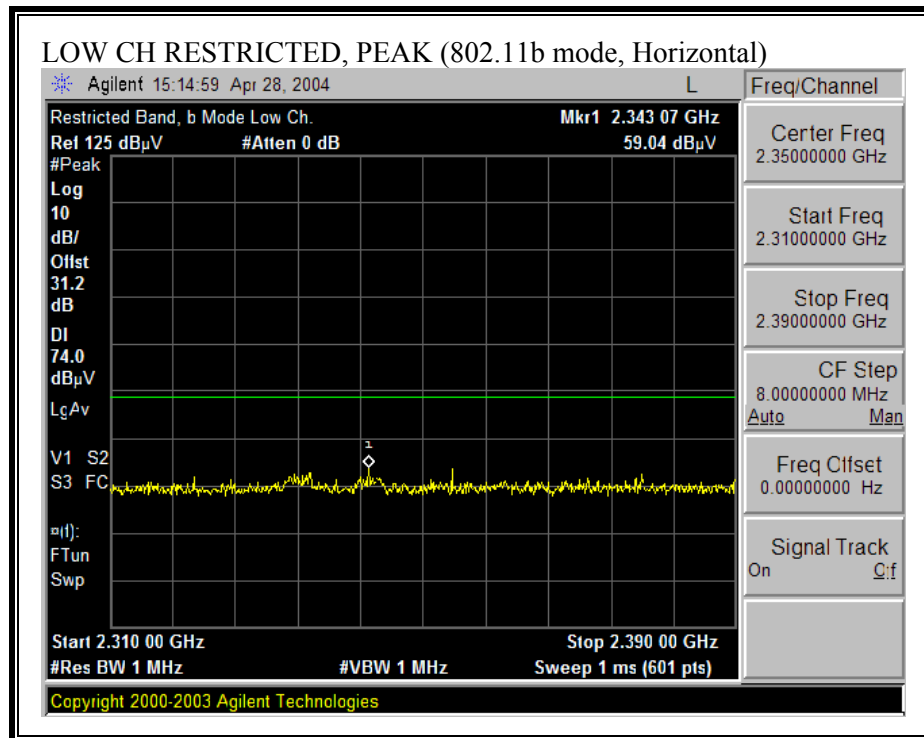

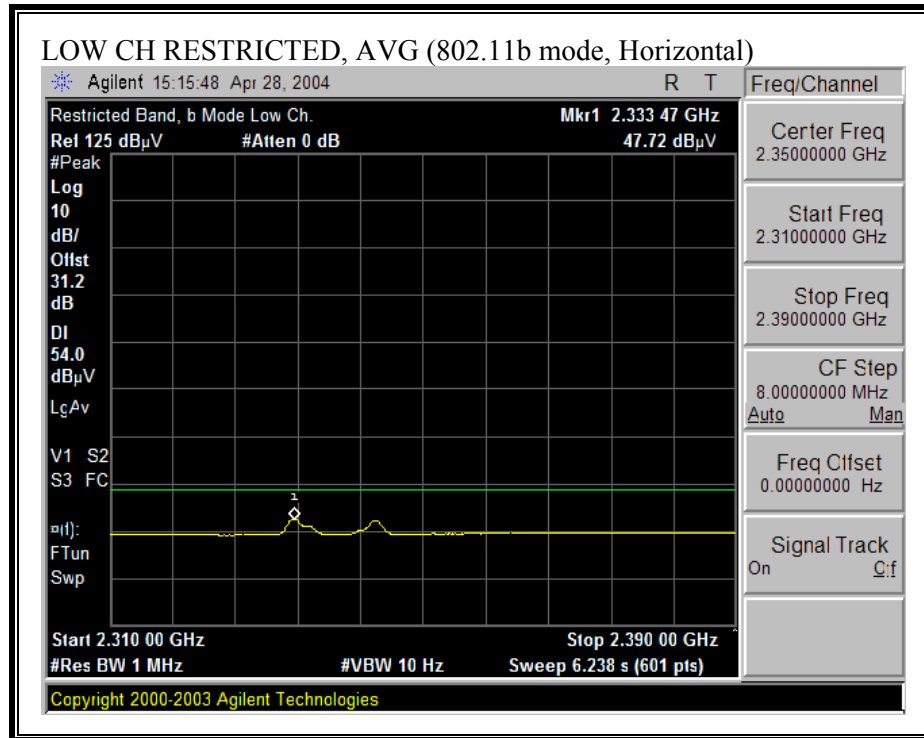



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

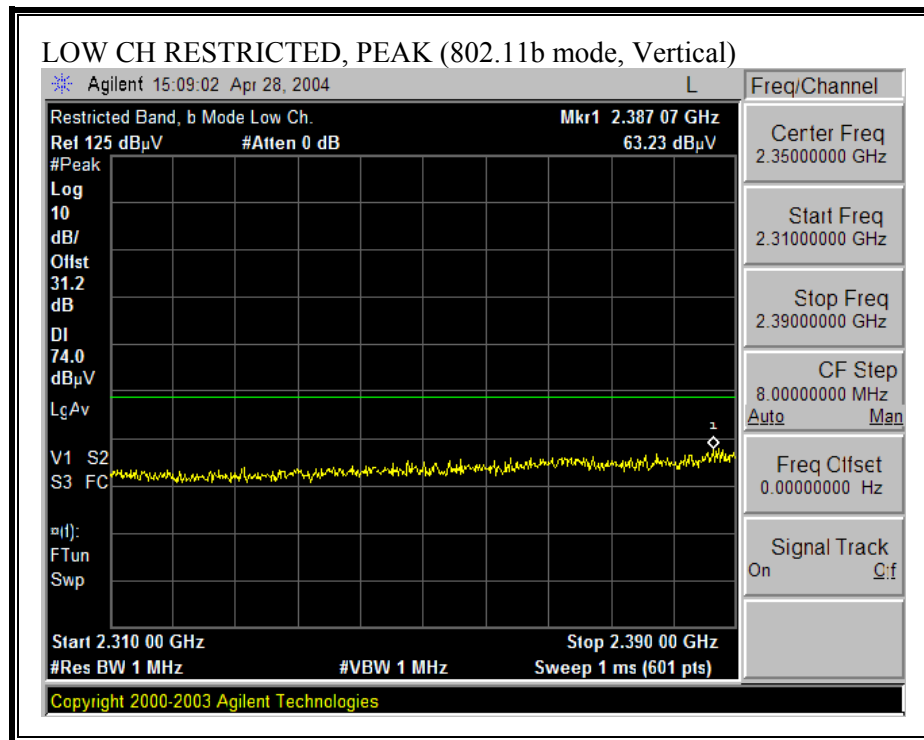

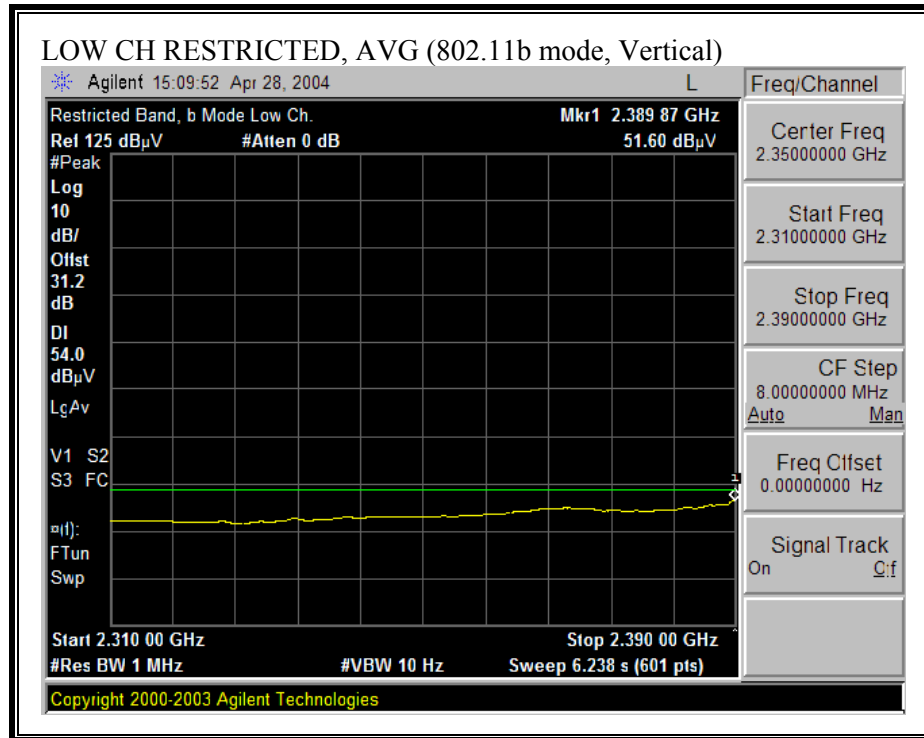



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

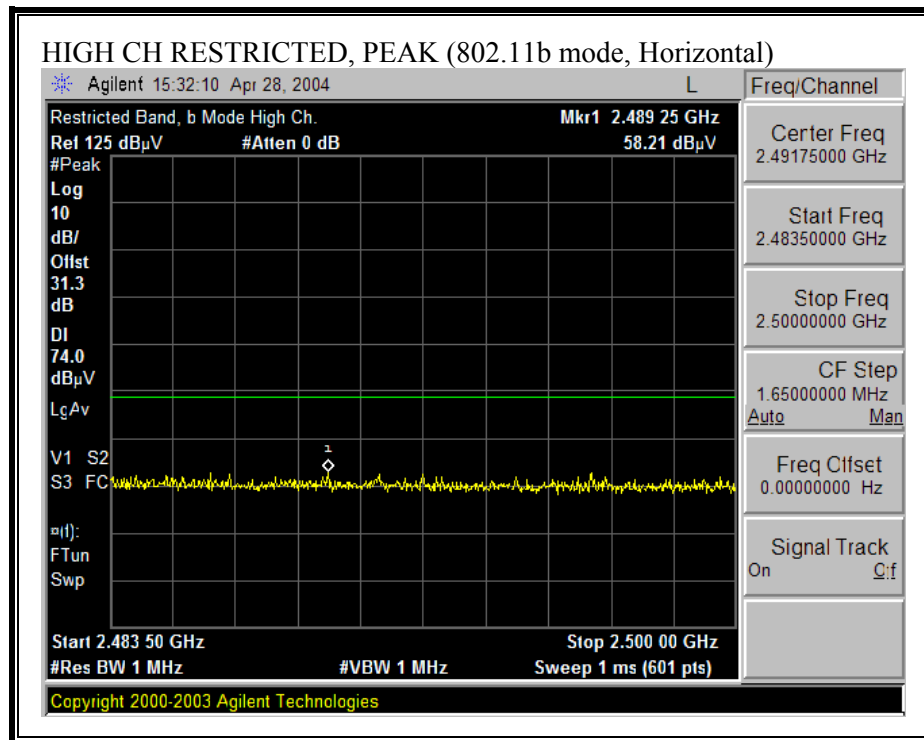

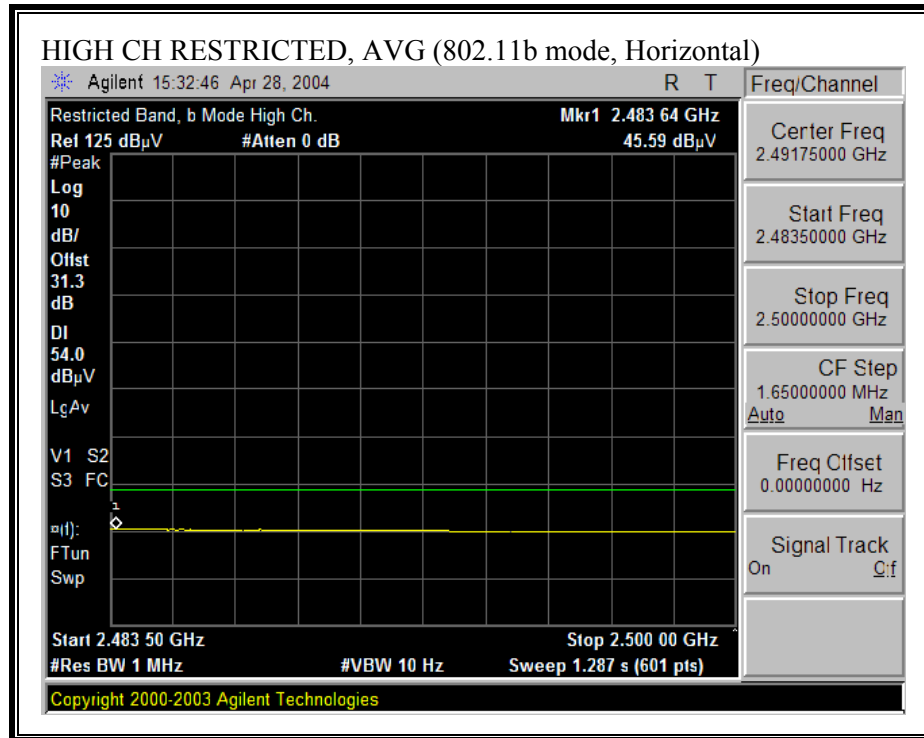


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

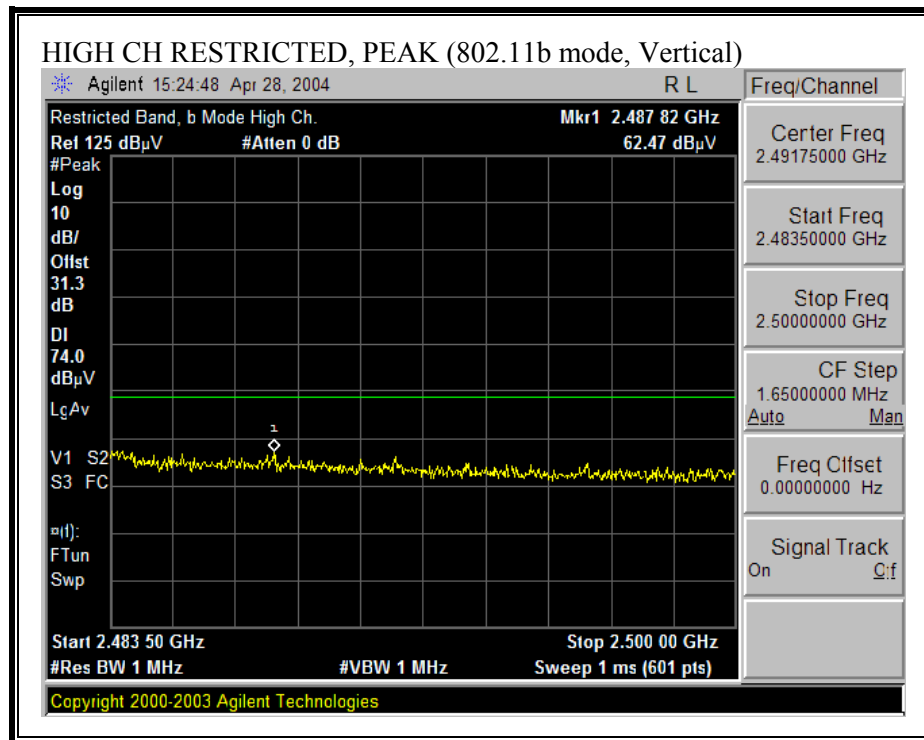


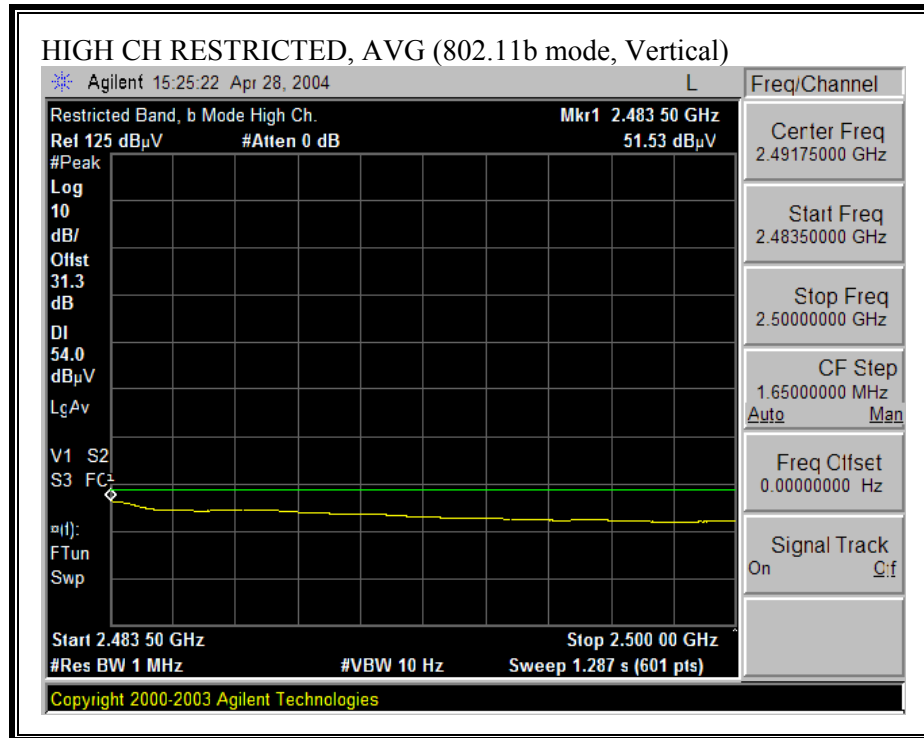


DUAL YAGI – MYP24010PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

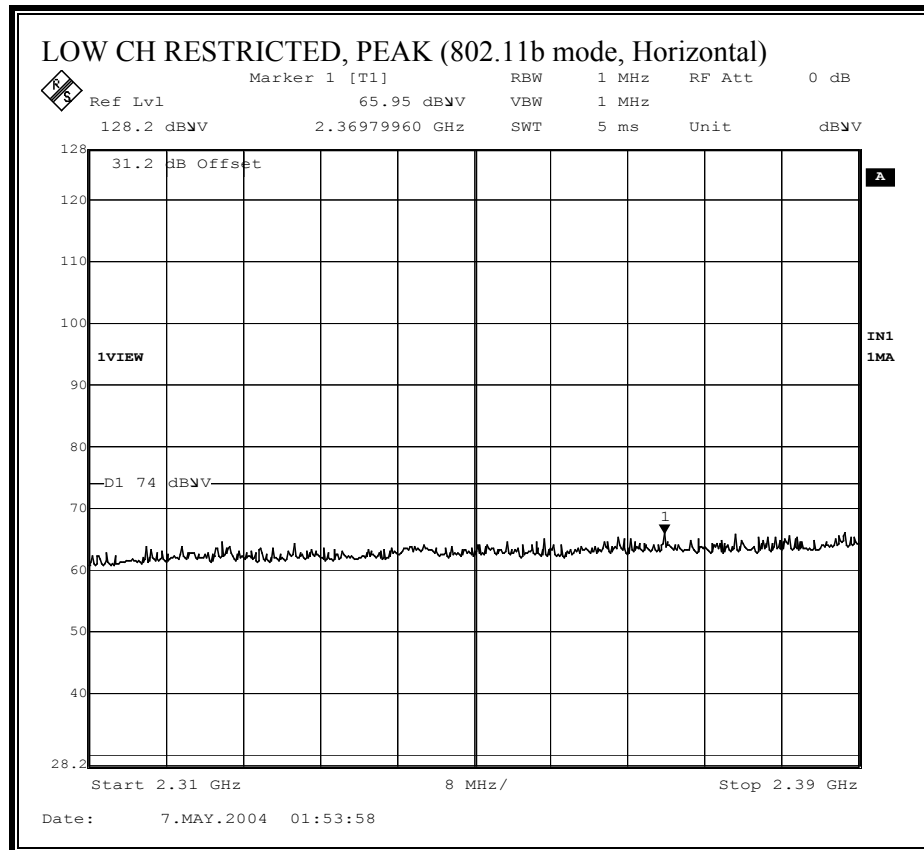

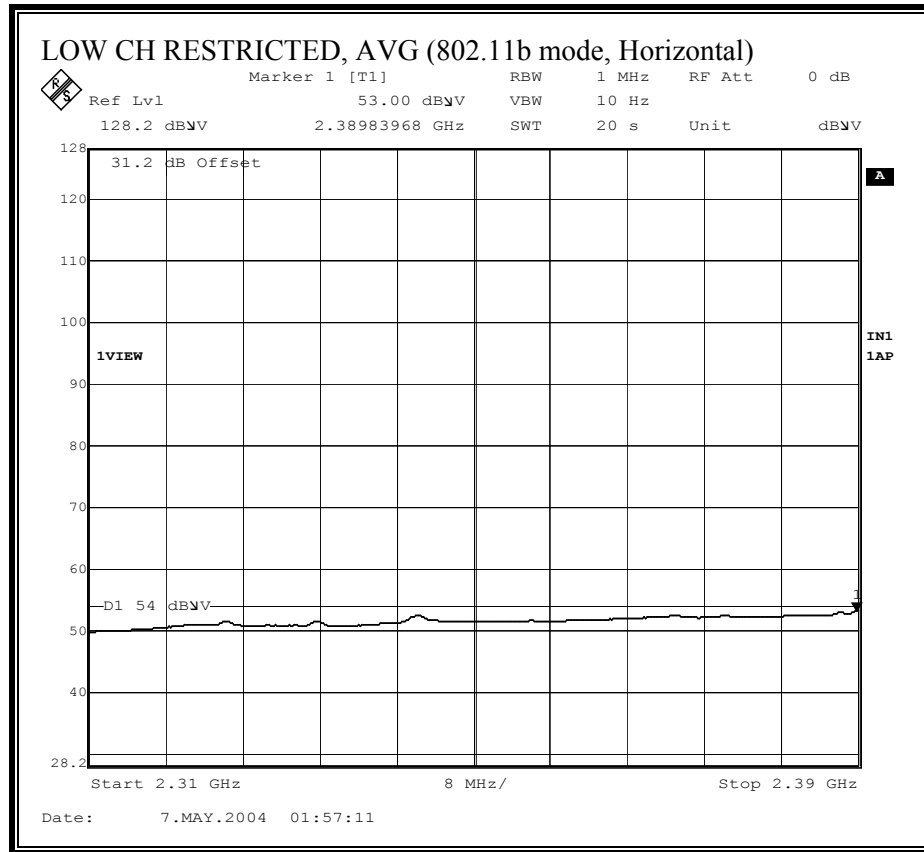



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

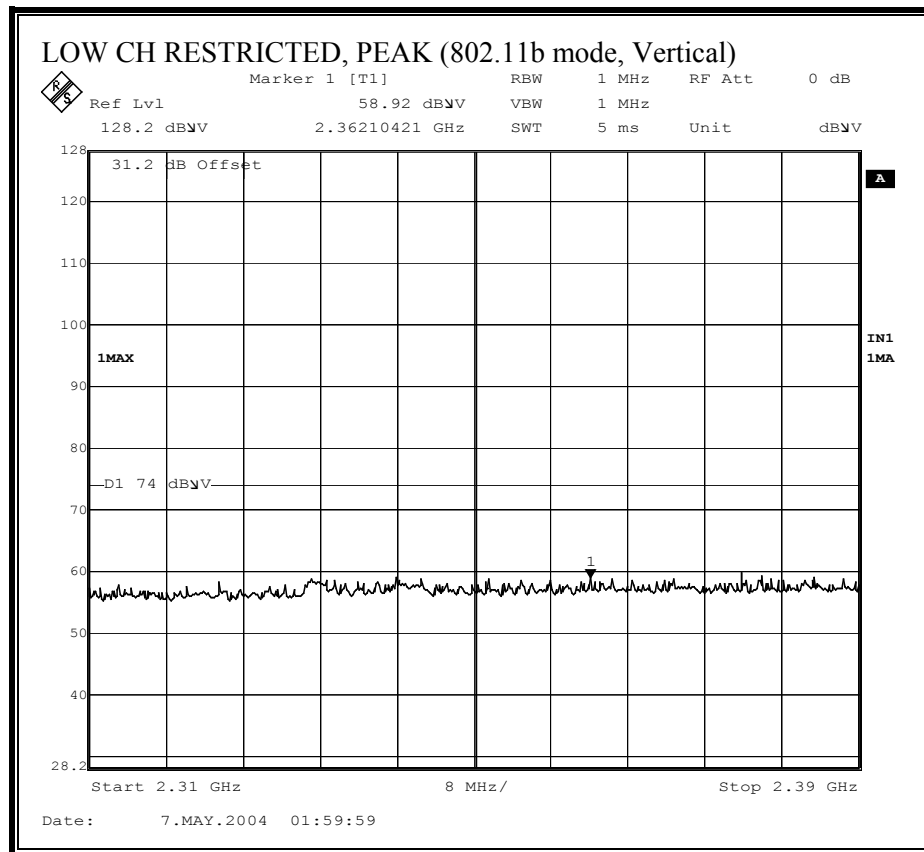

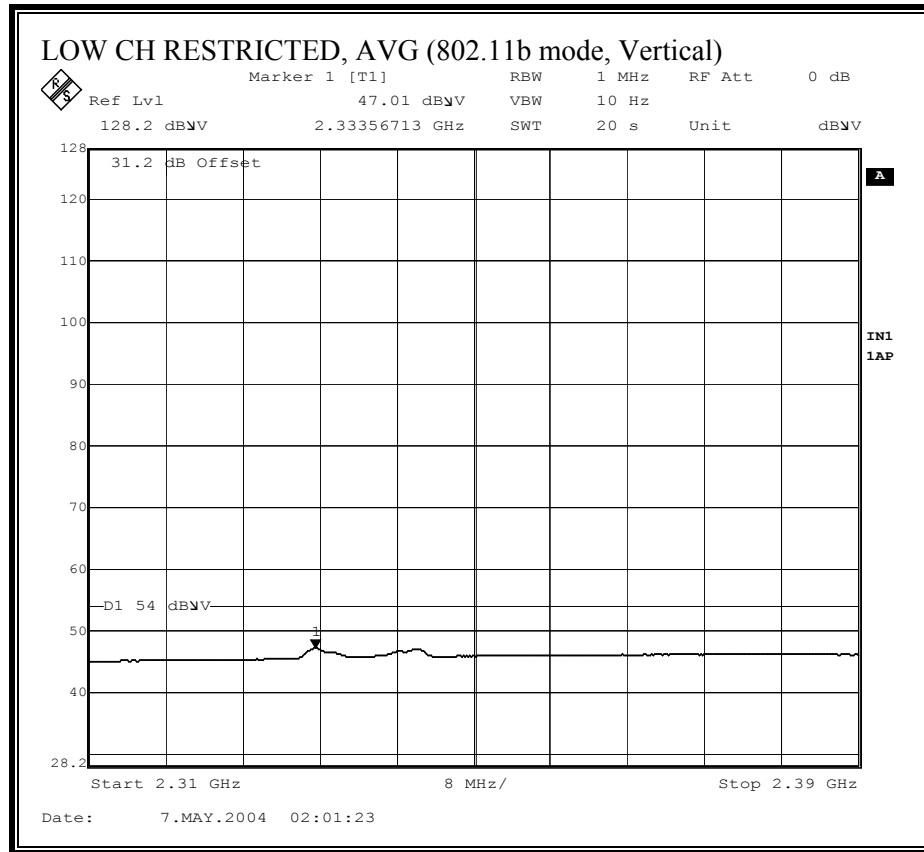



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

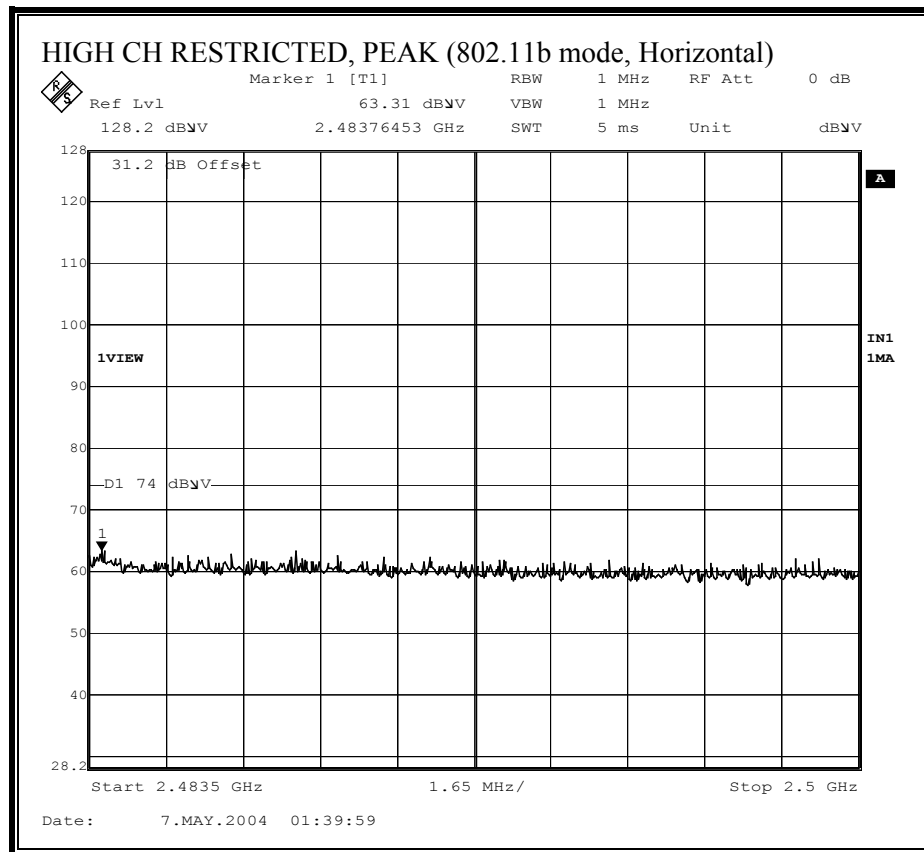

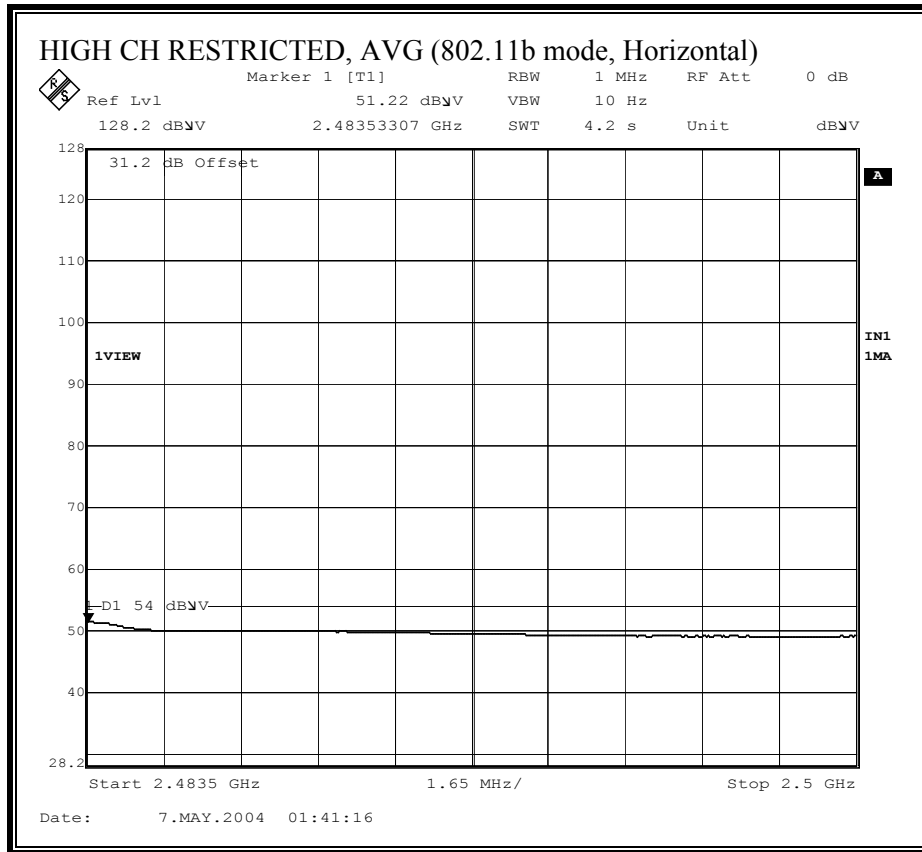

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

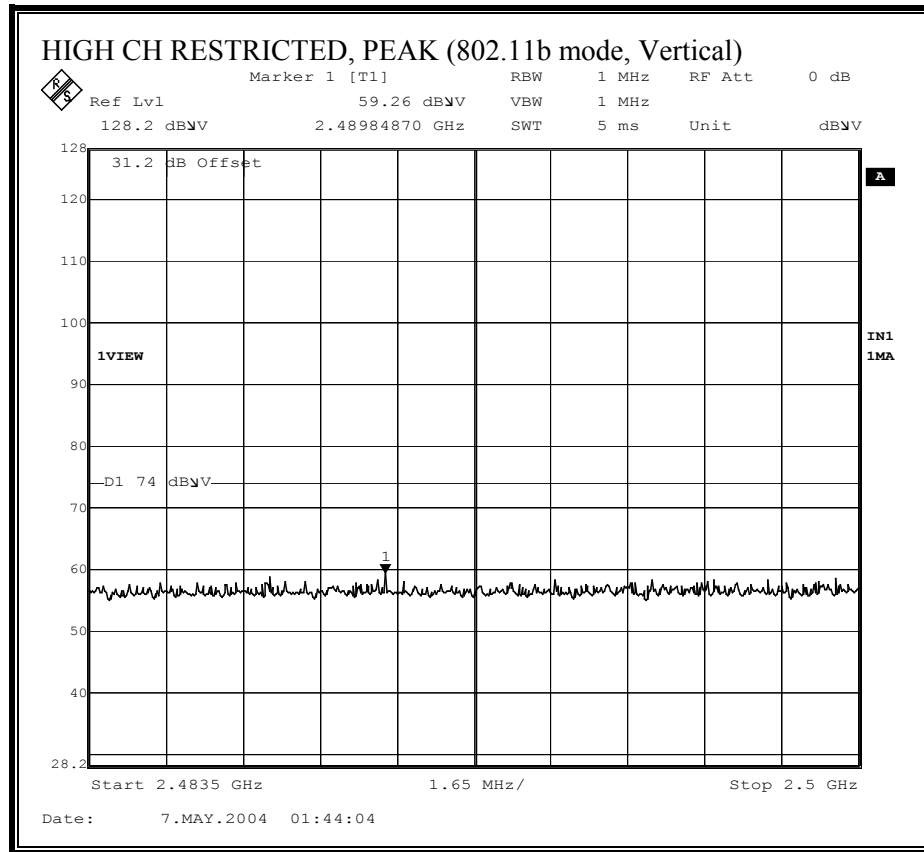

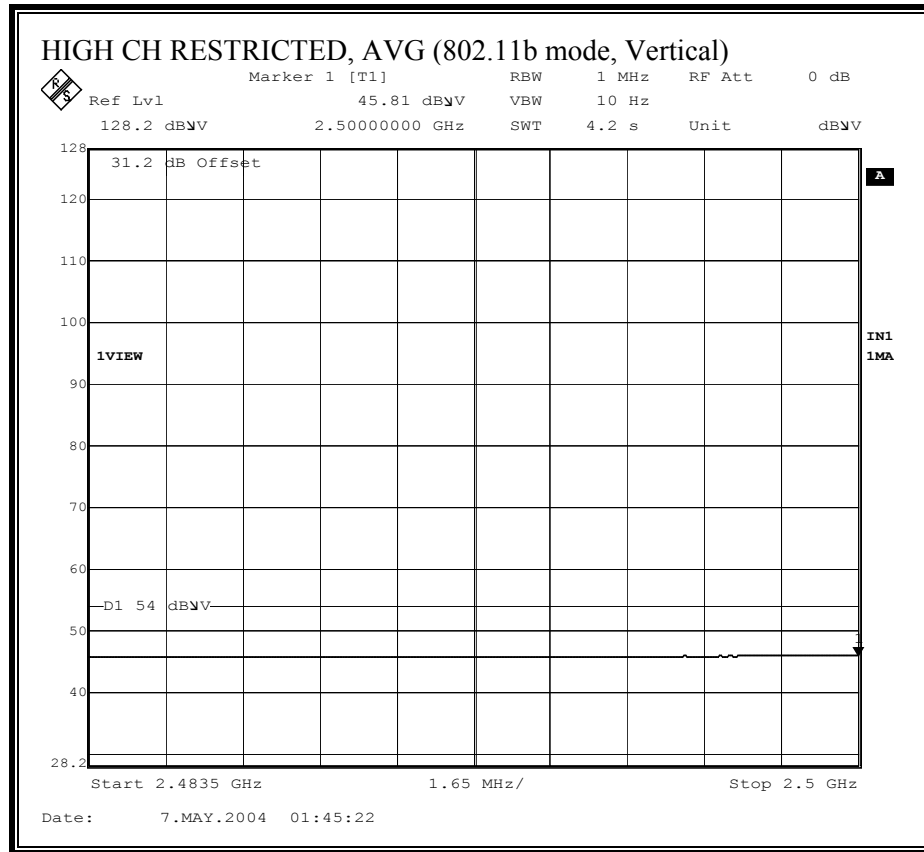



CONFIG #3:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	PANEL	M24008XFPTRPC	8	HORIZONTAL


OMNI – SPSHG60


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

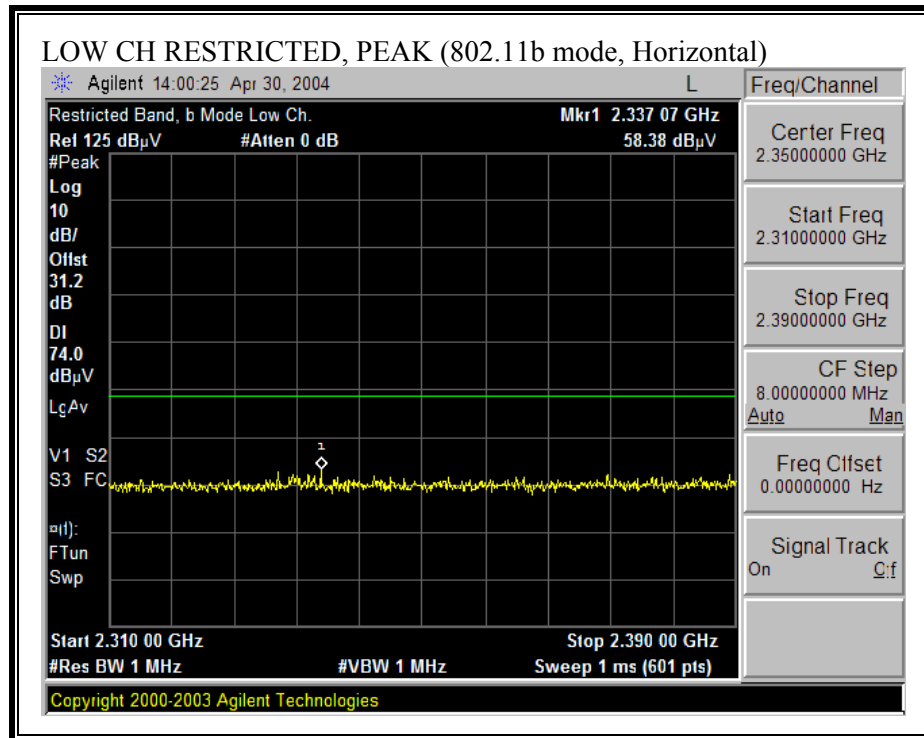


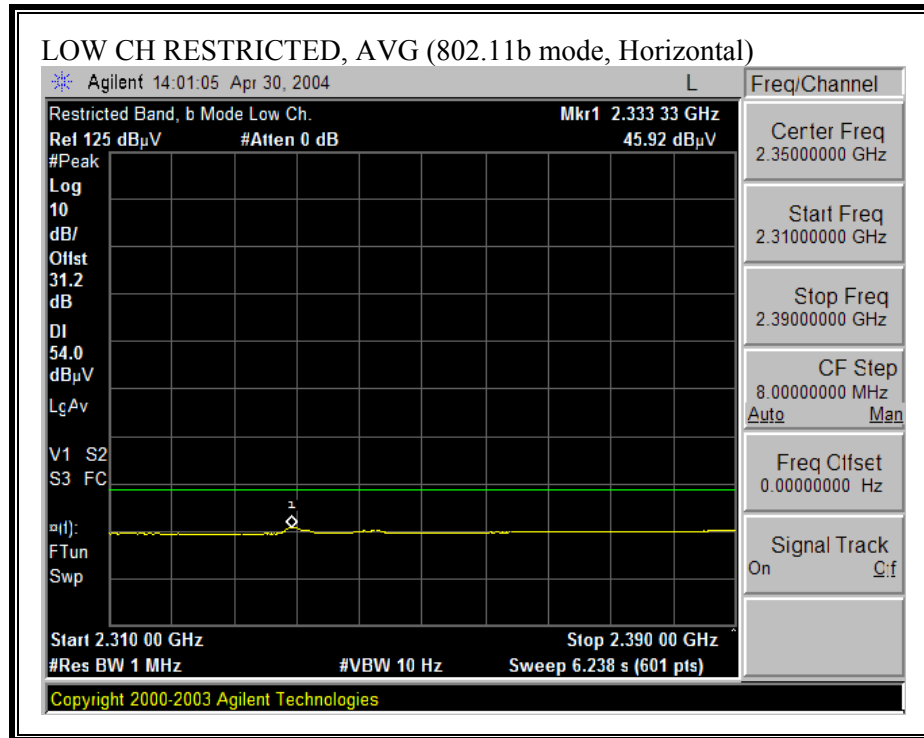


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

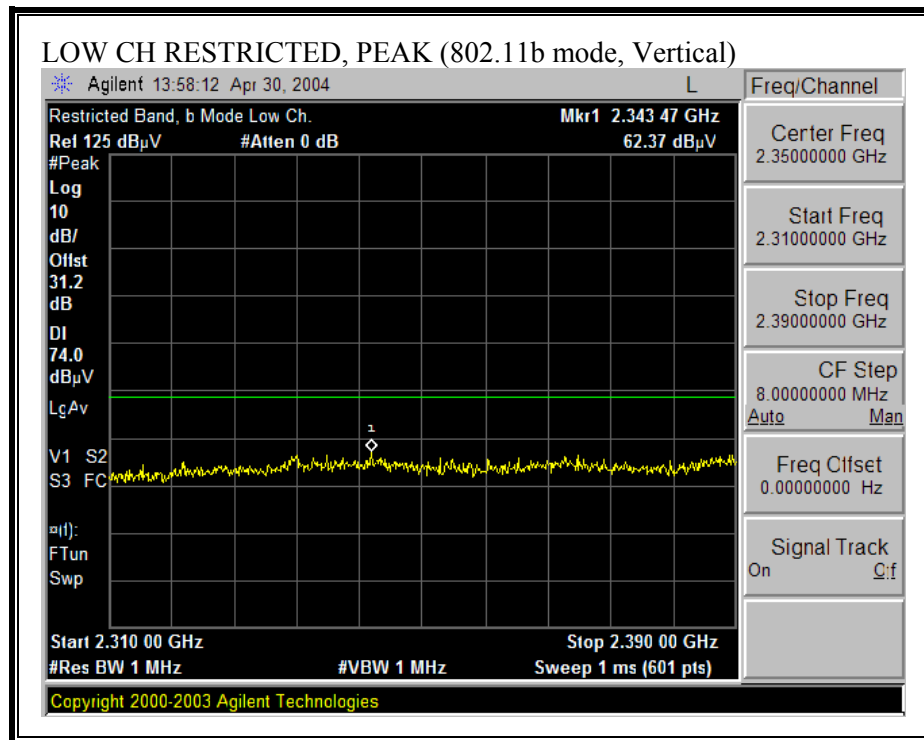


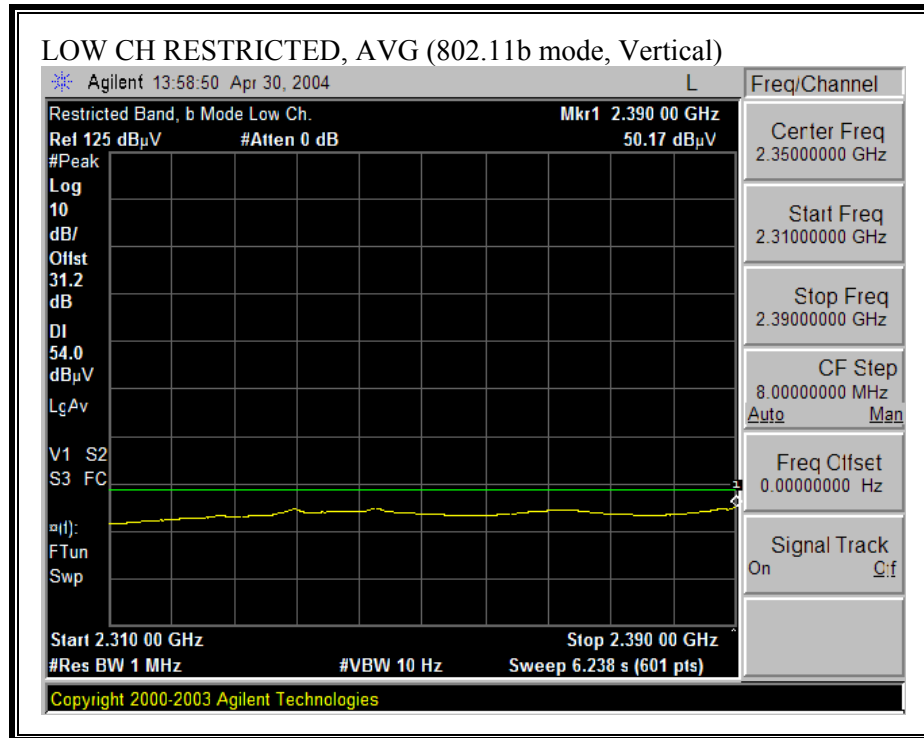


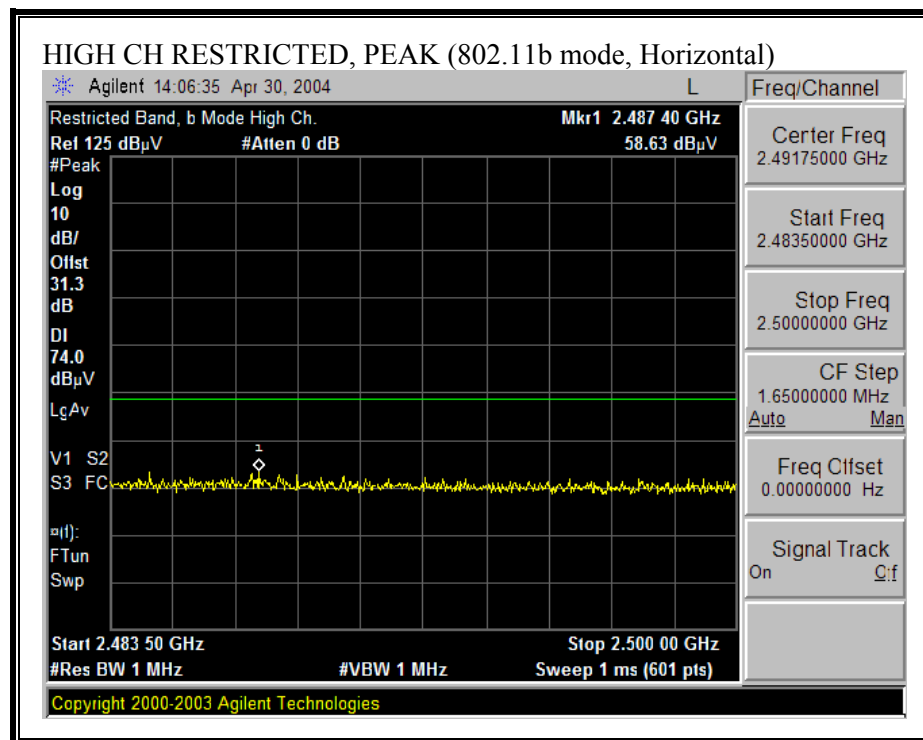

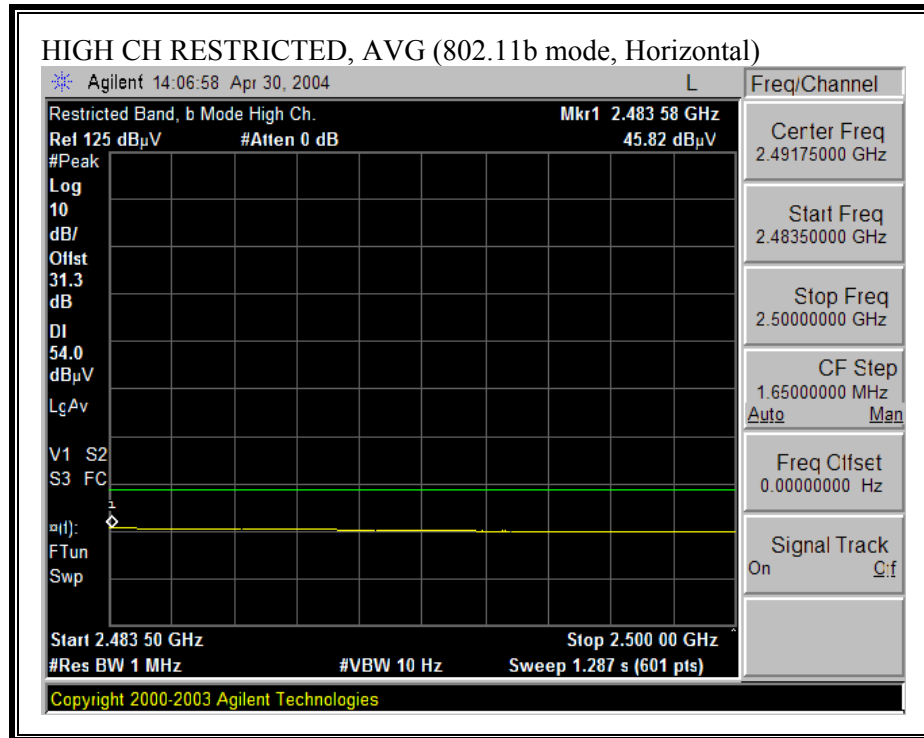


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

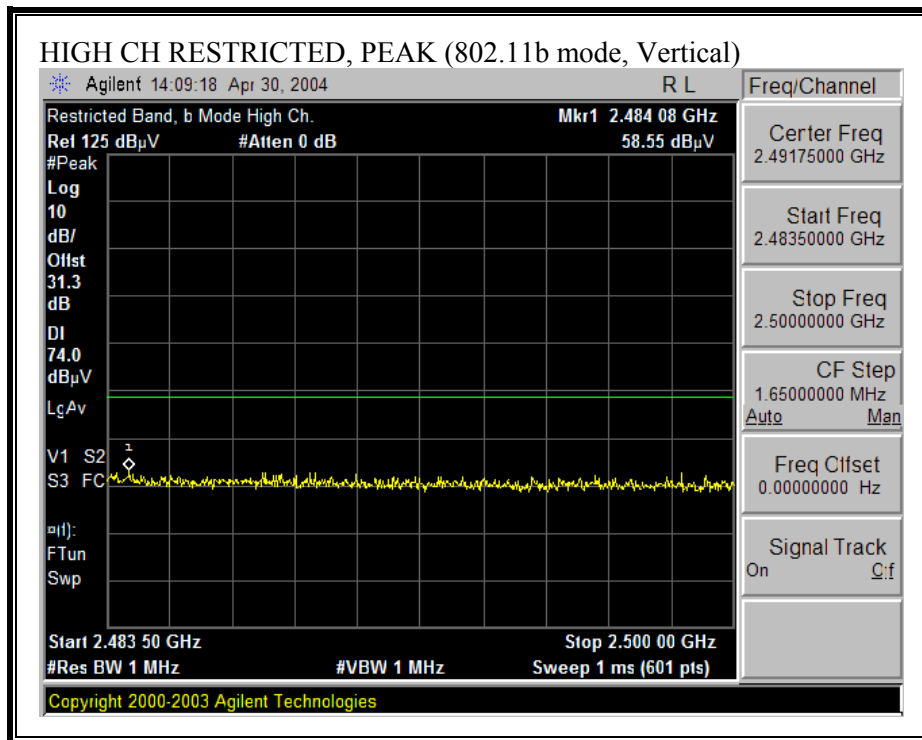


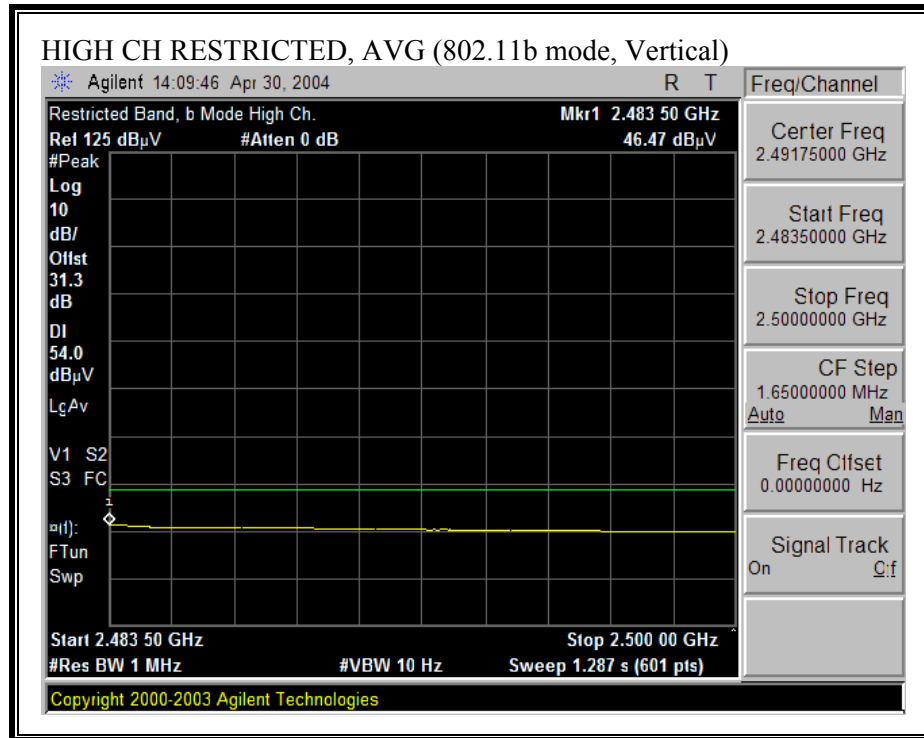


PANEL – M24008XFPTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

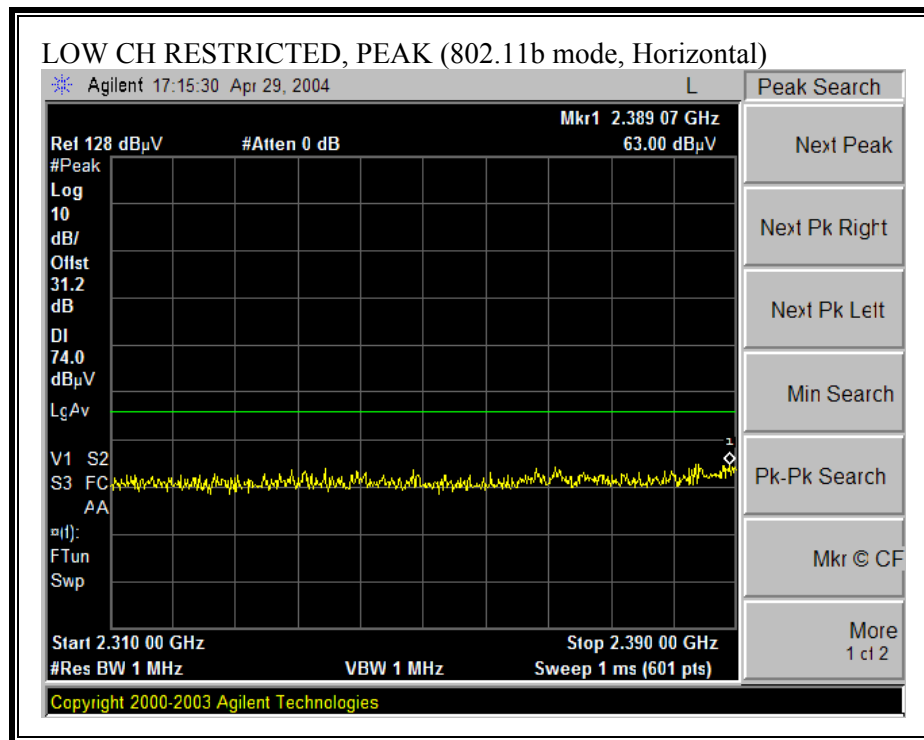

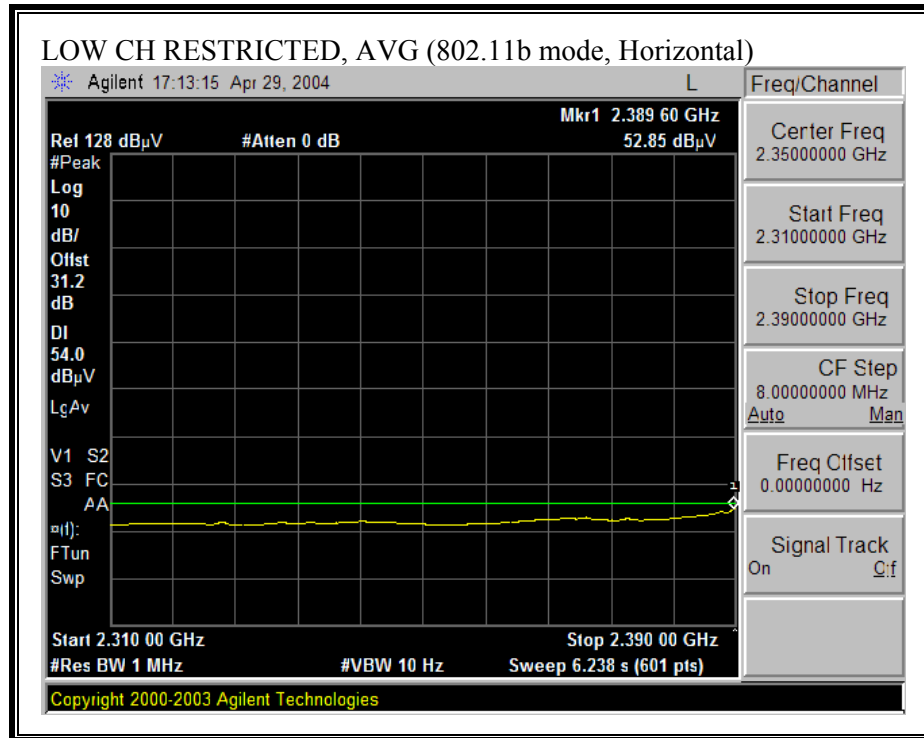



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

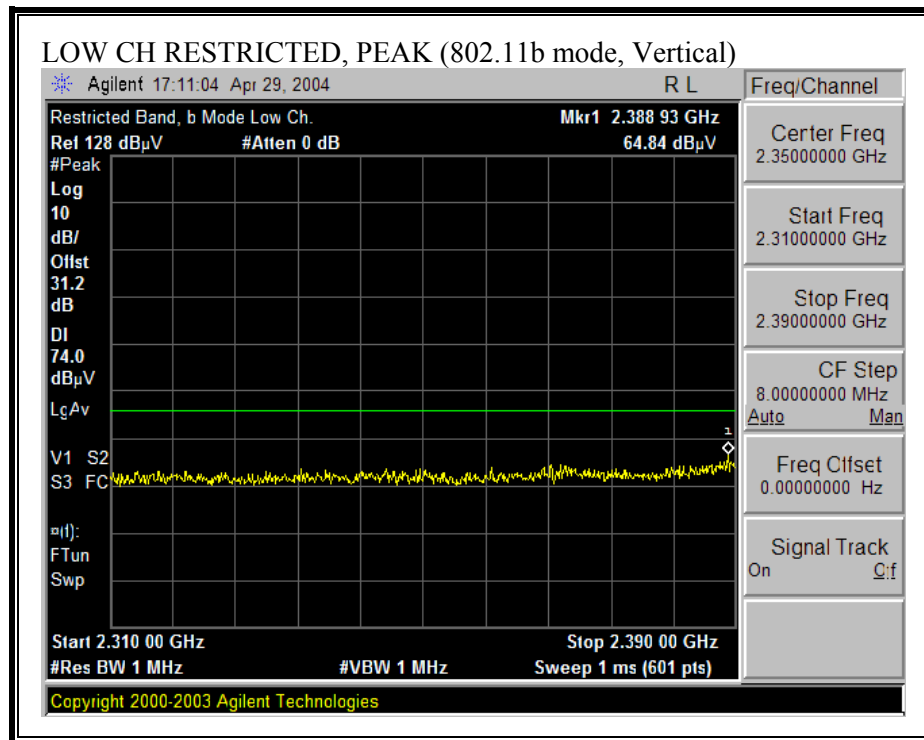

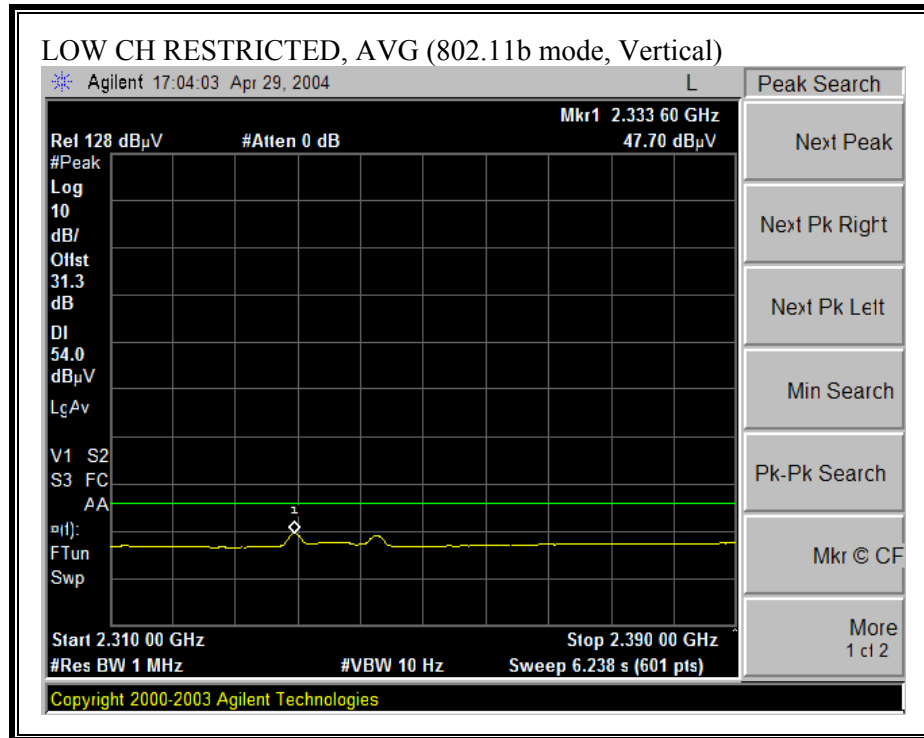



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

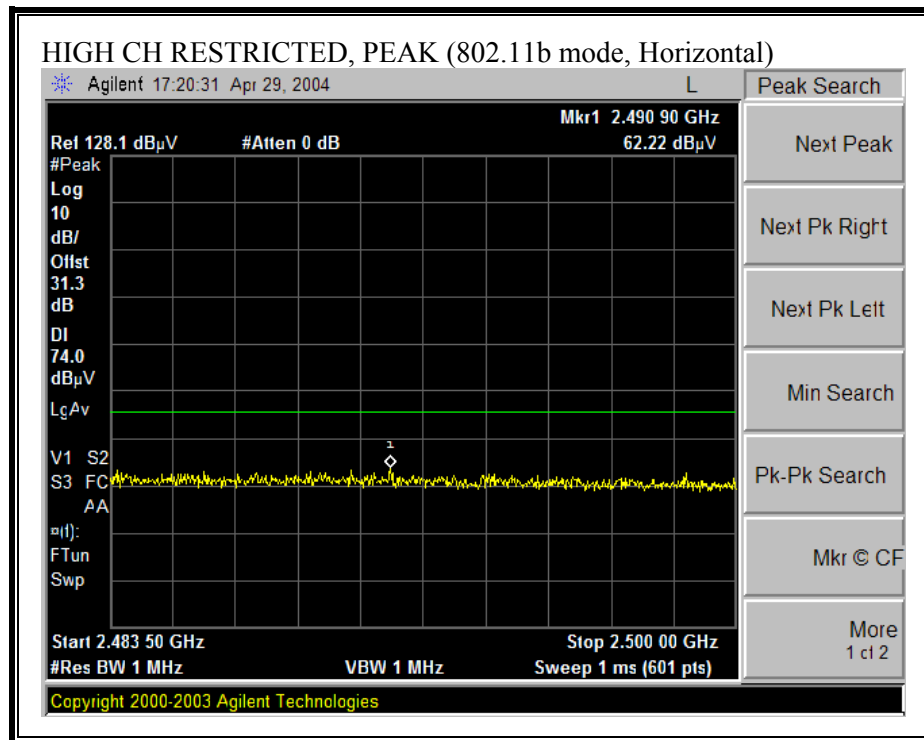

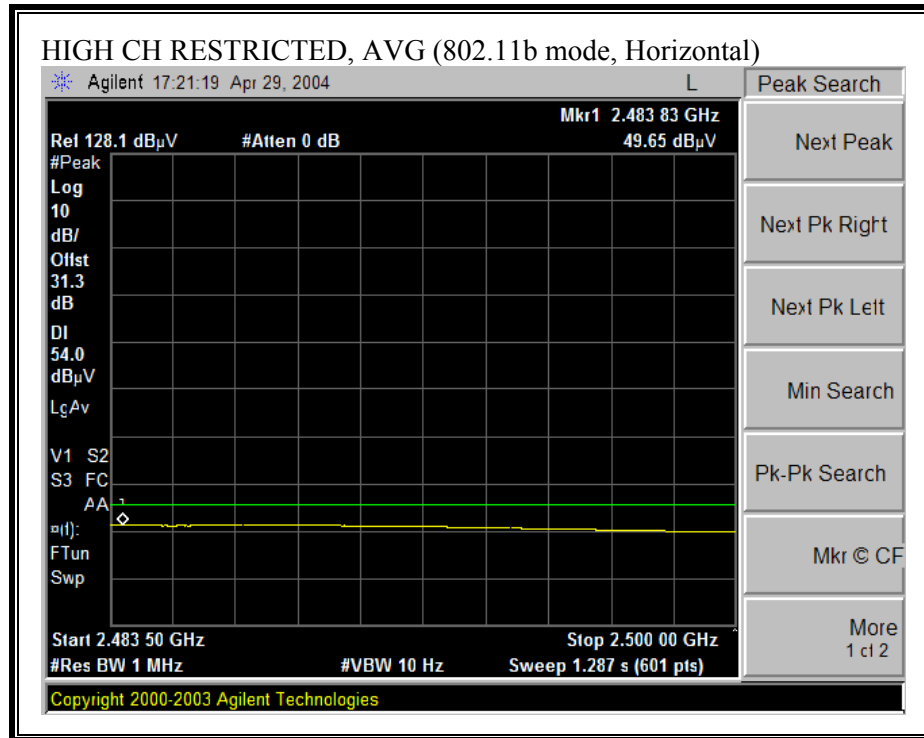

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

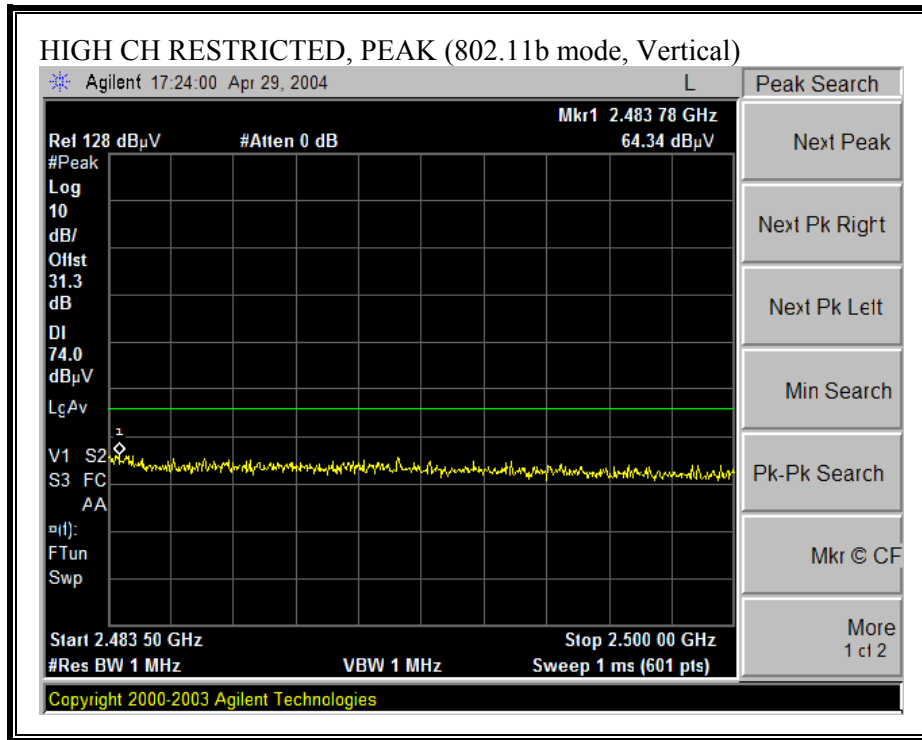

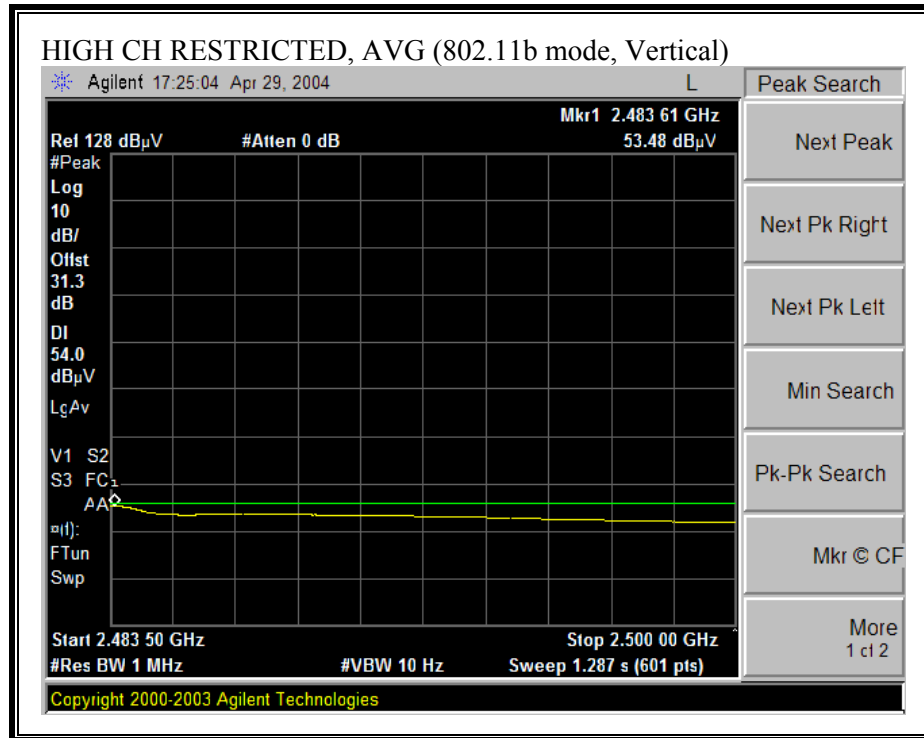



CONFIG #4:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	OMNI	MFB24011PTRPC	11	VERTICAL


OMNI – SPSHG60


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

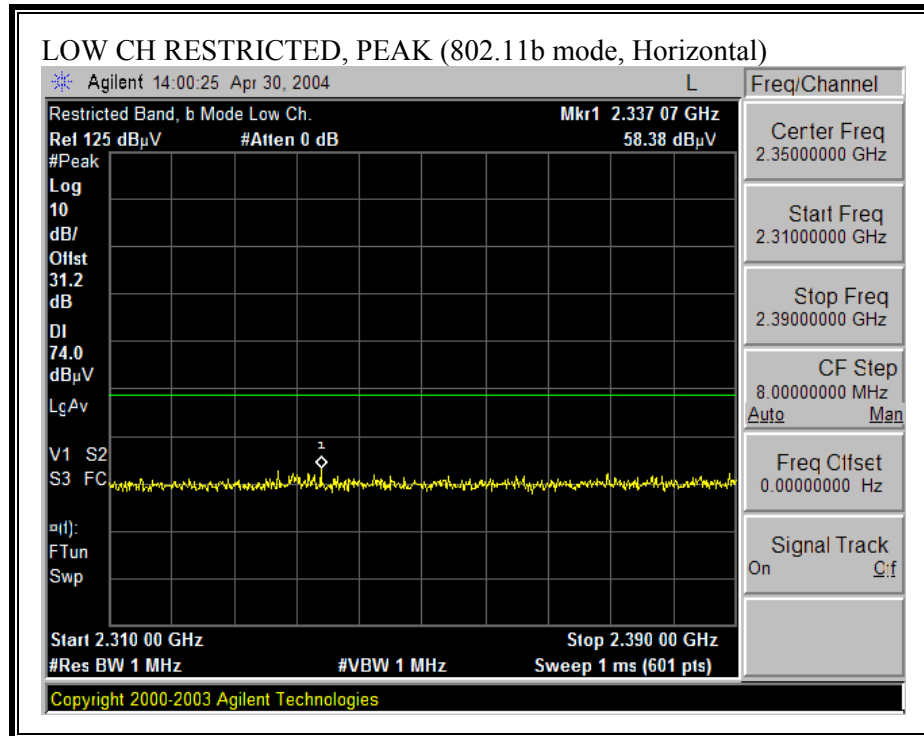


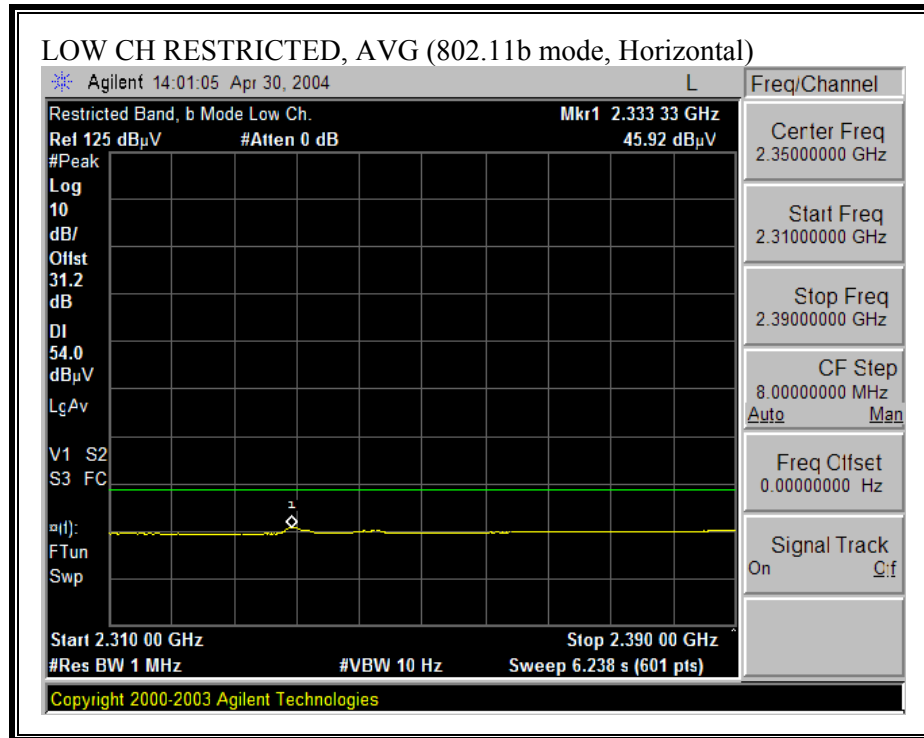


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

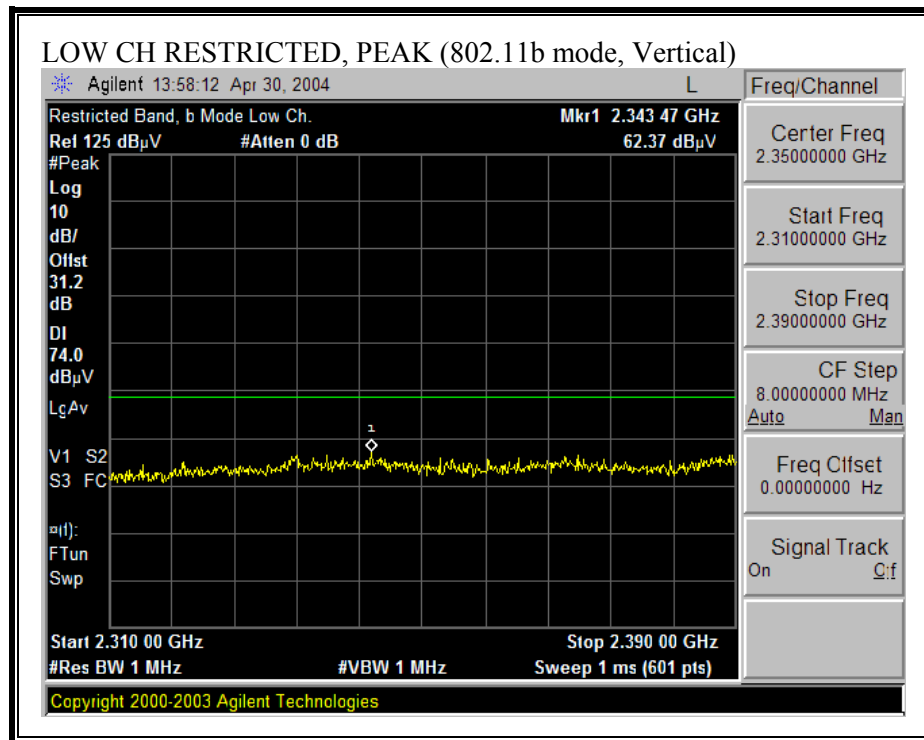


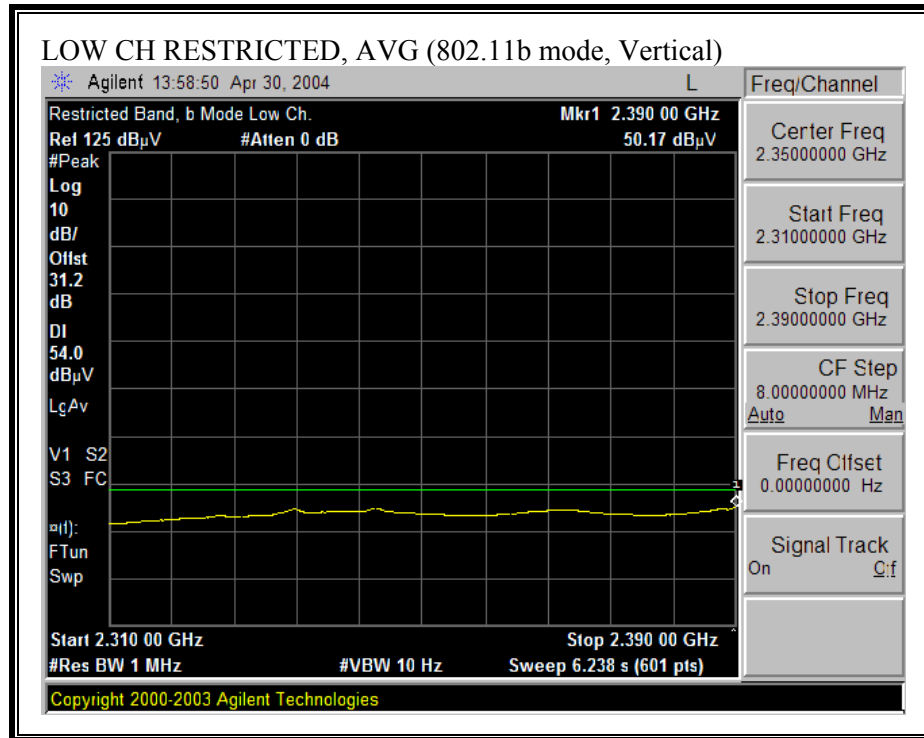


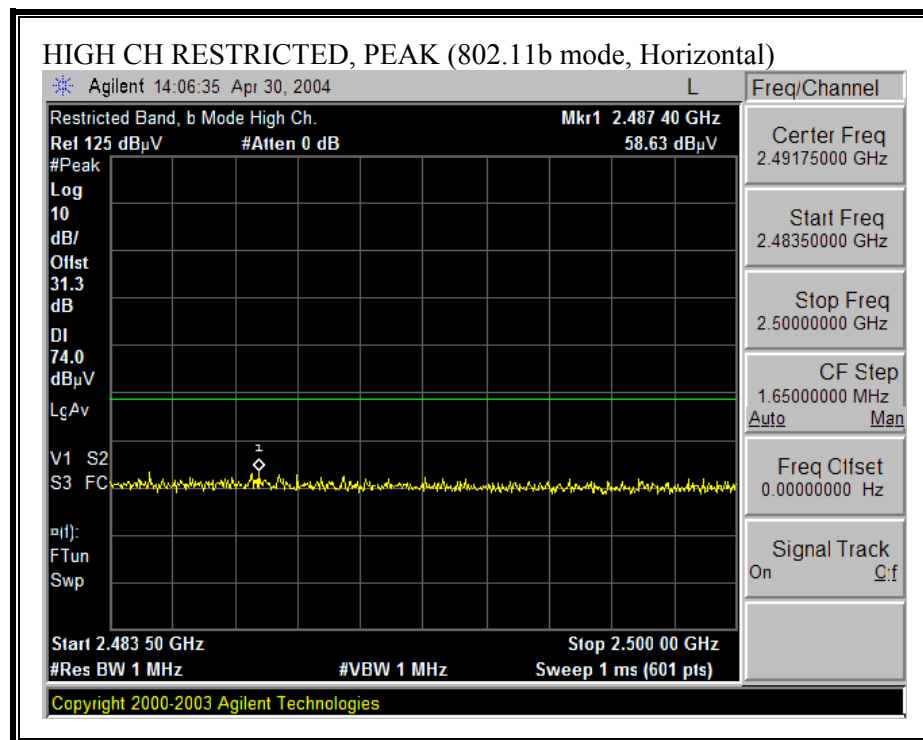

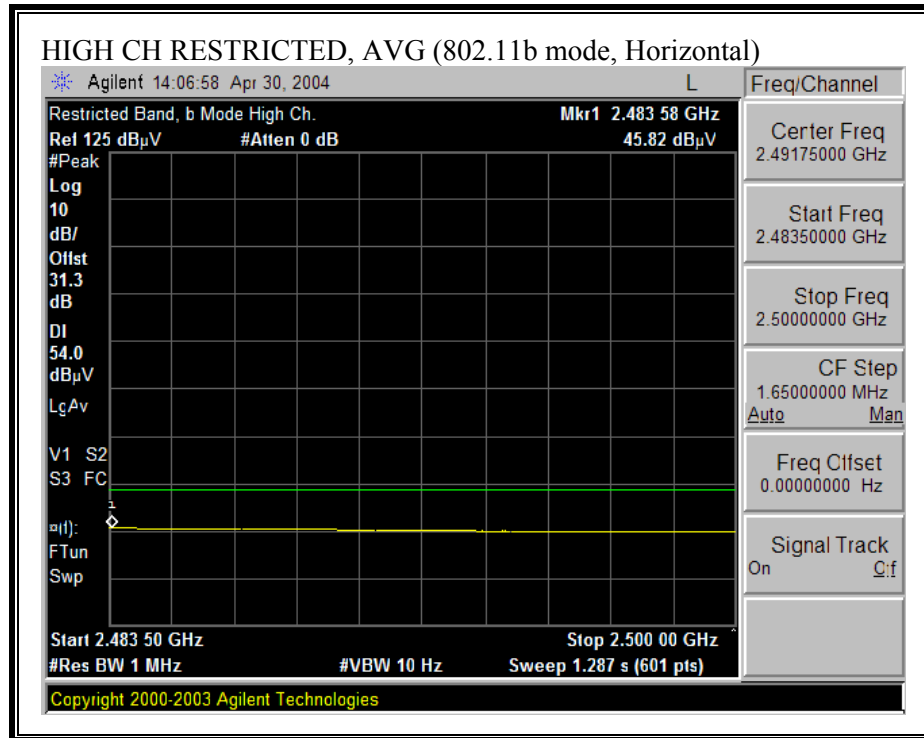


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

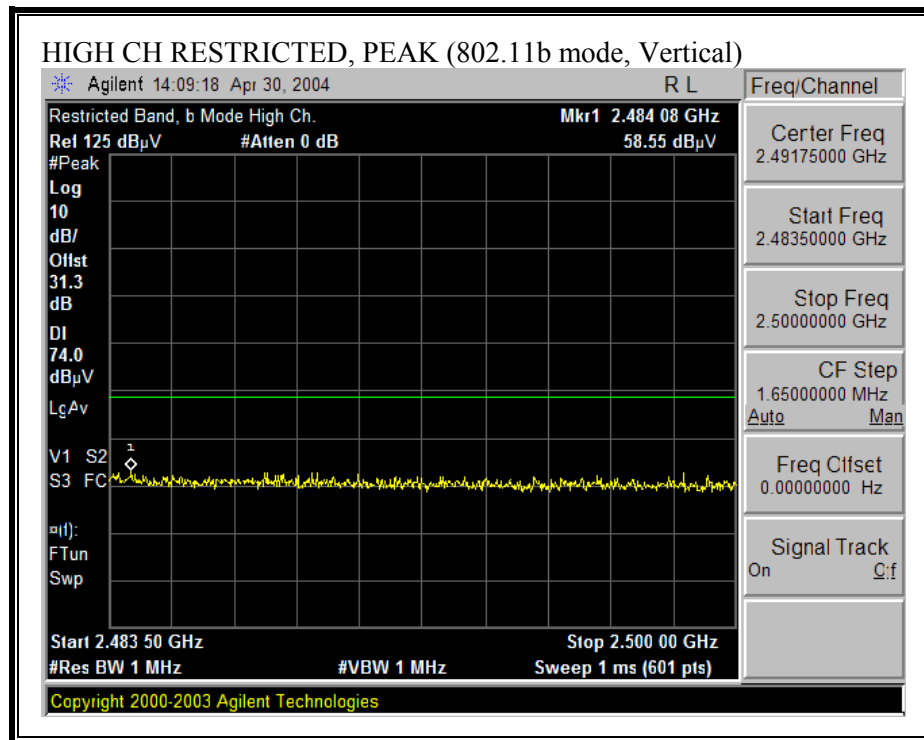


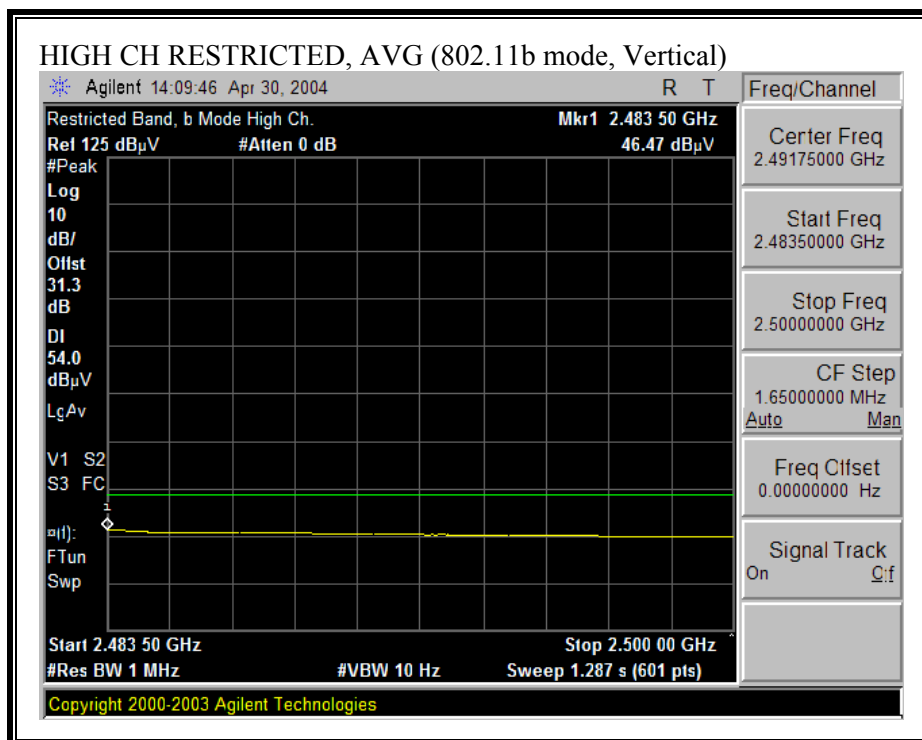


OMNI - MFB24011PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

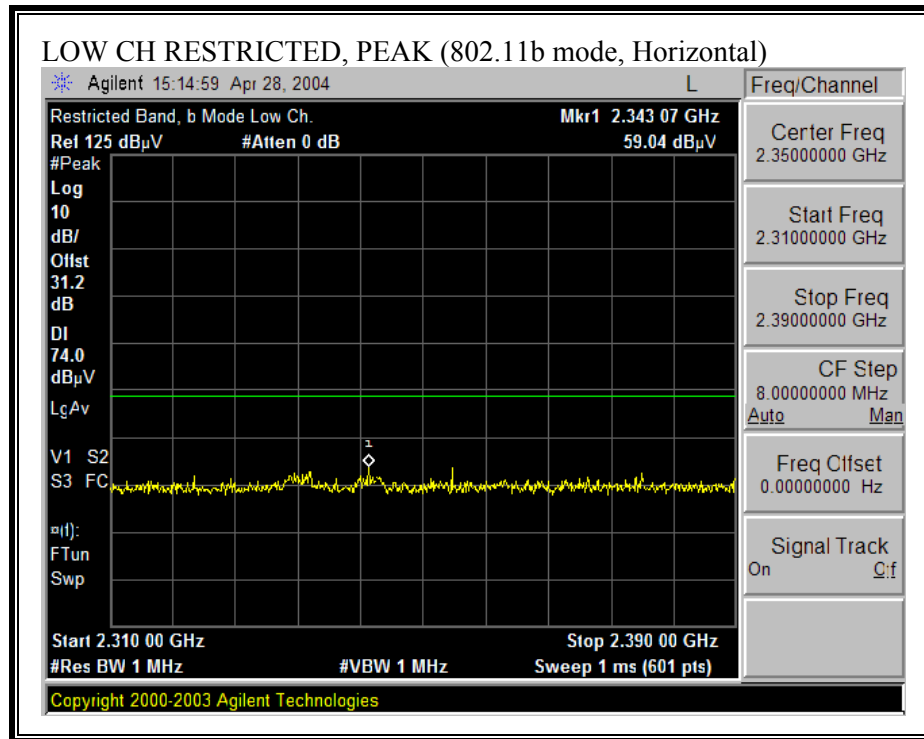


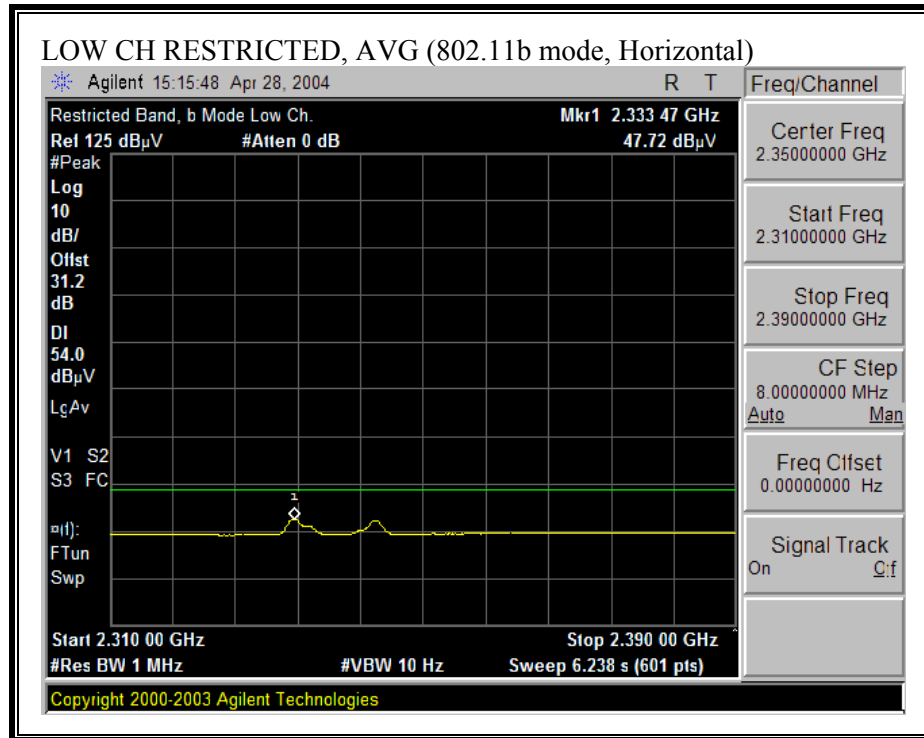


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

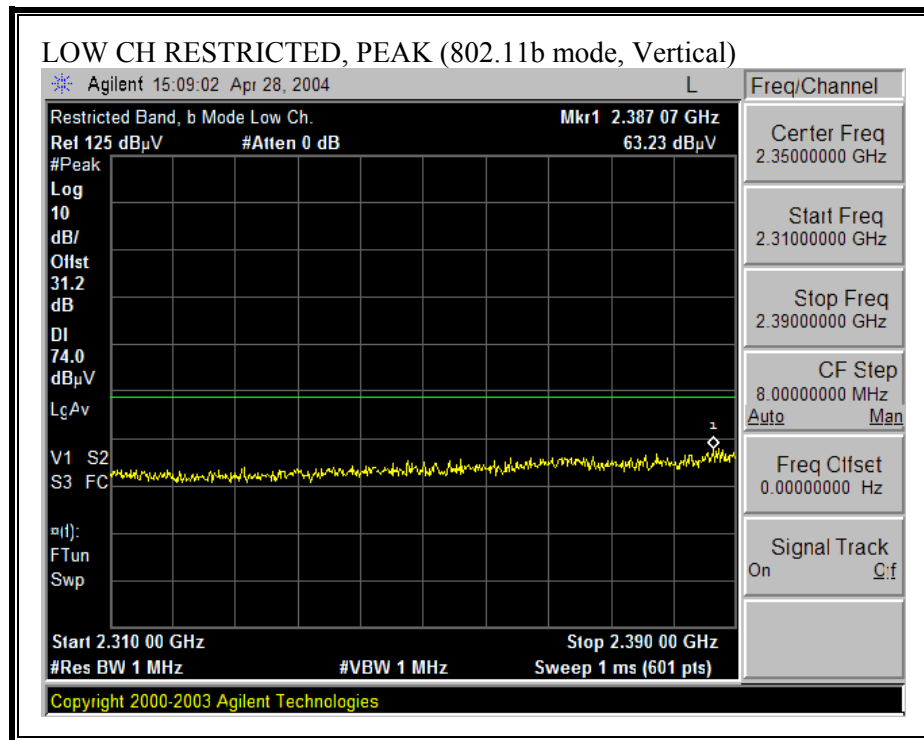


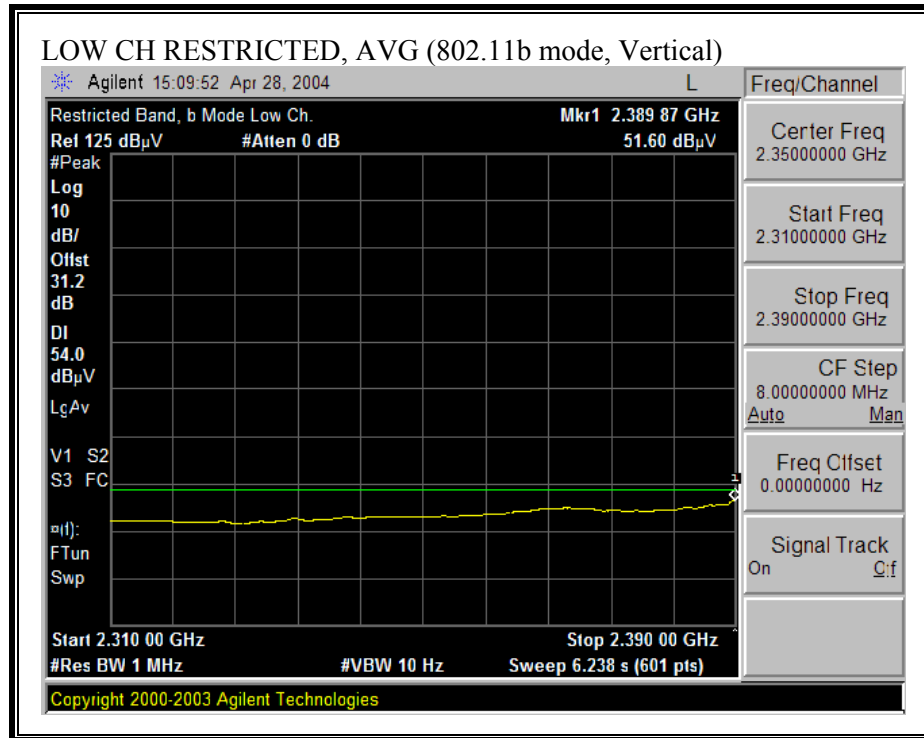


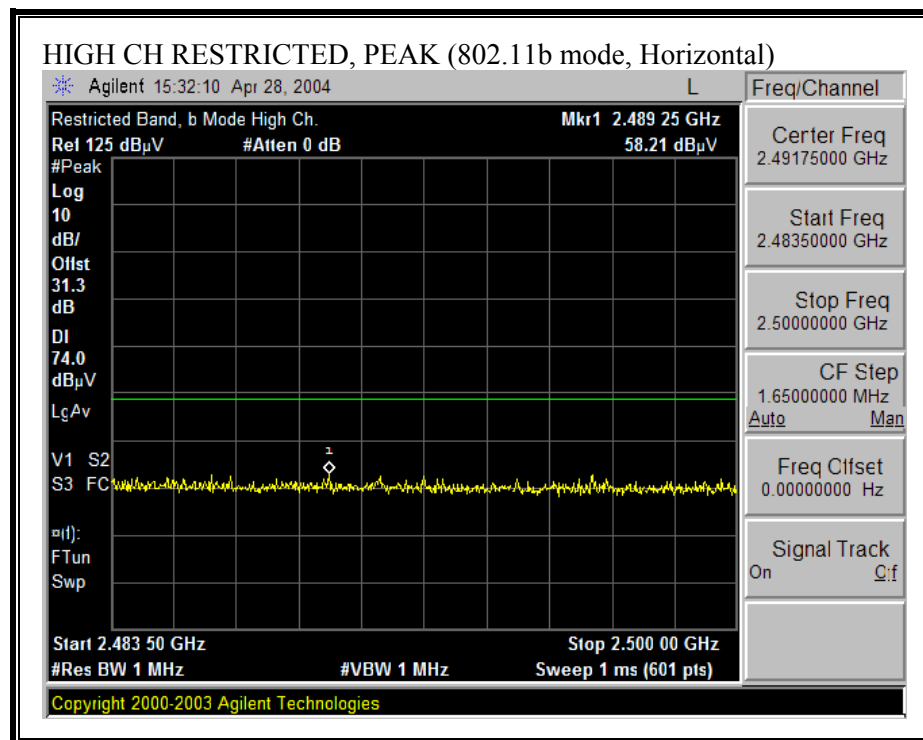

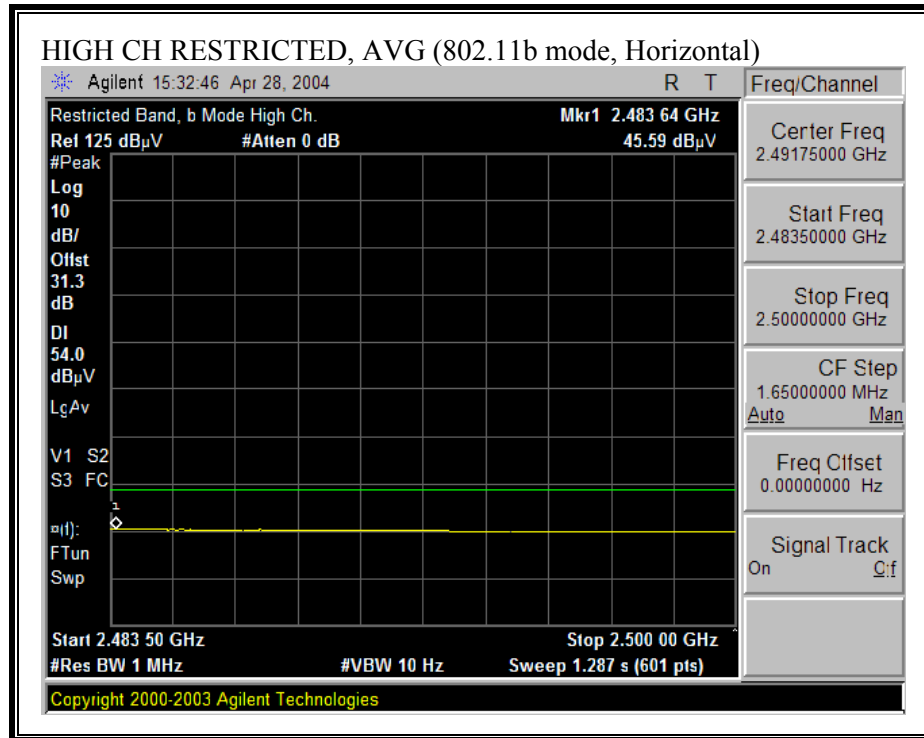

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

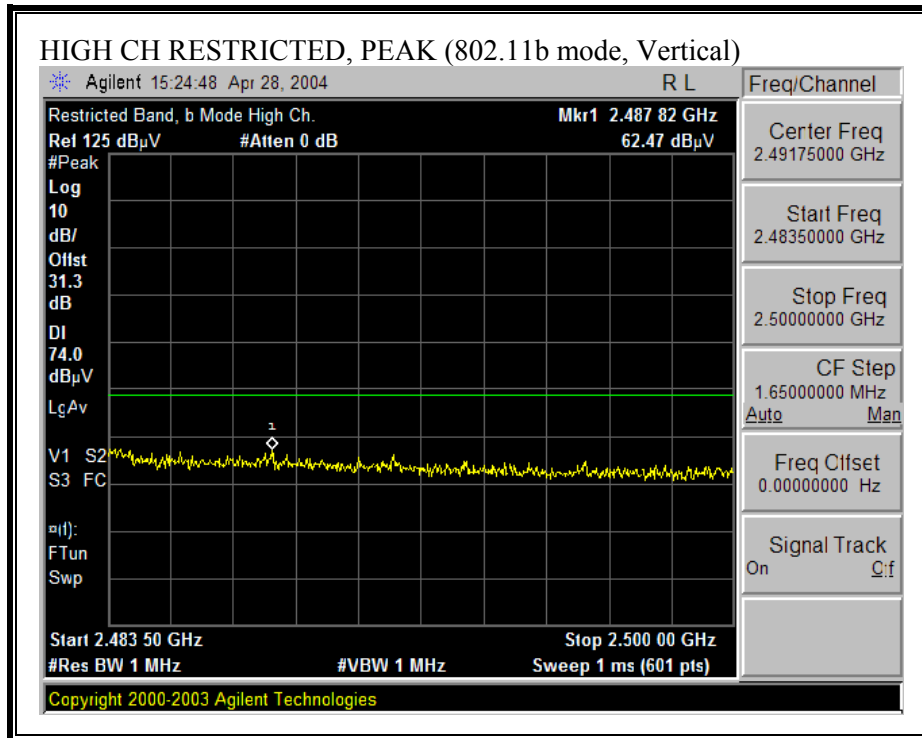

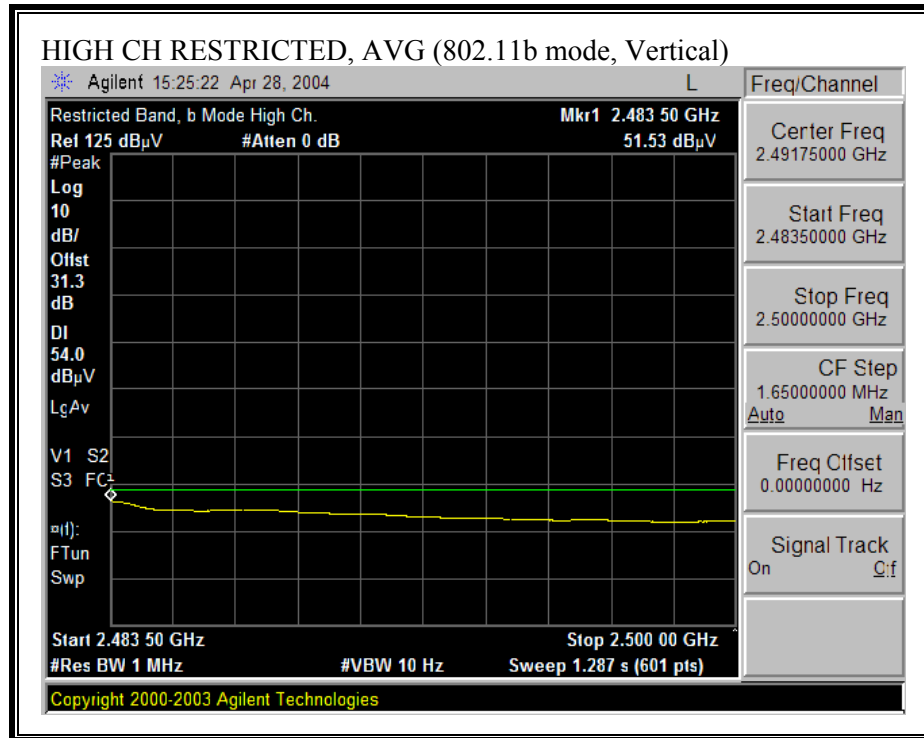



CONFIG #5:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	YAGI	MYP24010PTRPC	10	HORIZONTAL


OMNI – SPSHG60


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

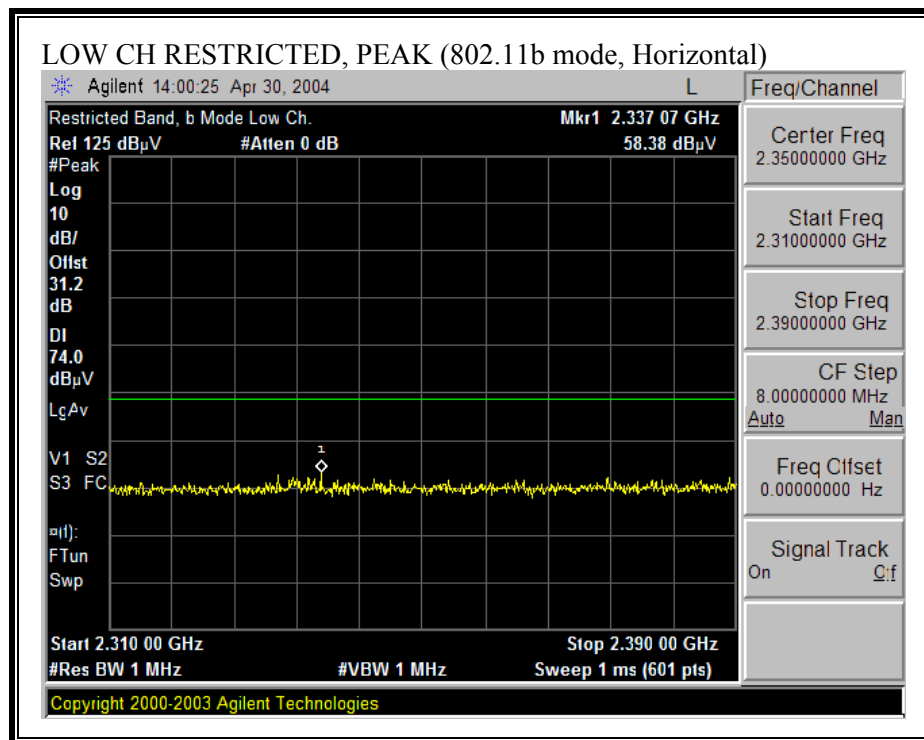


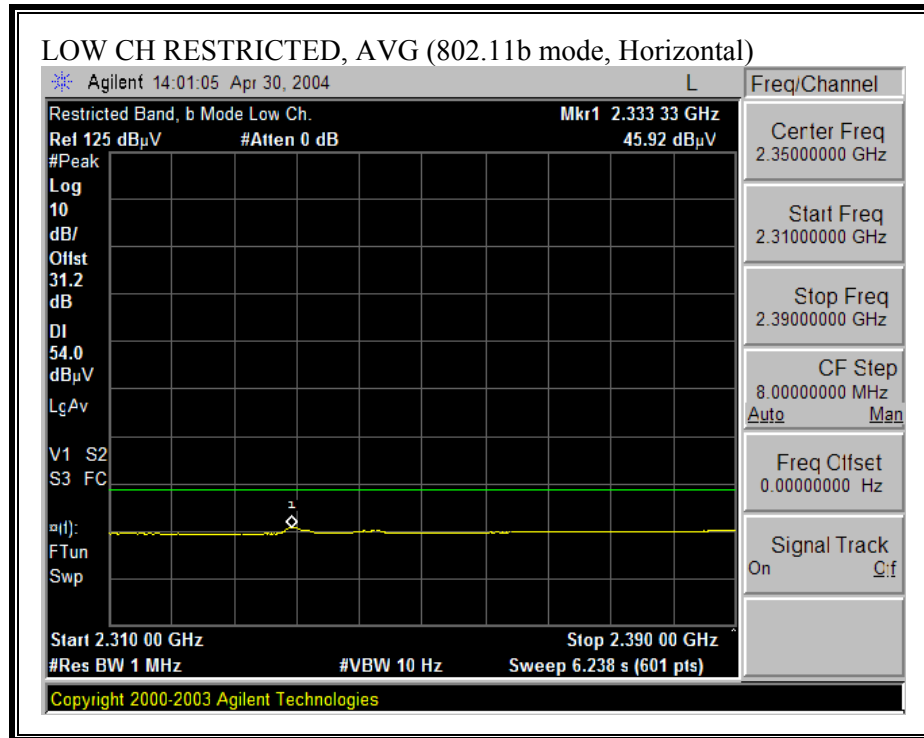


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

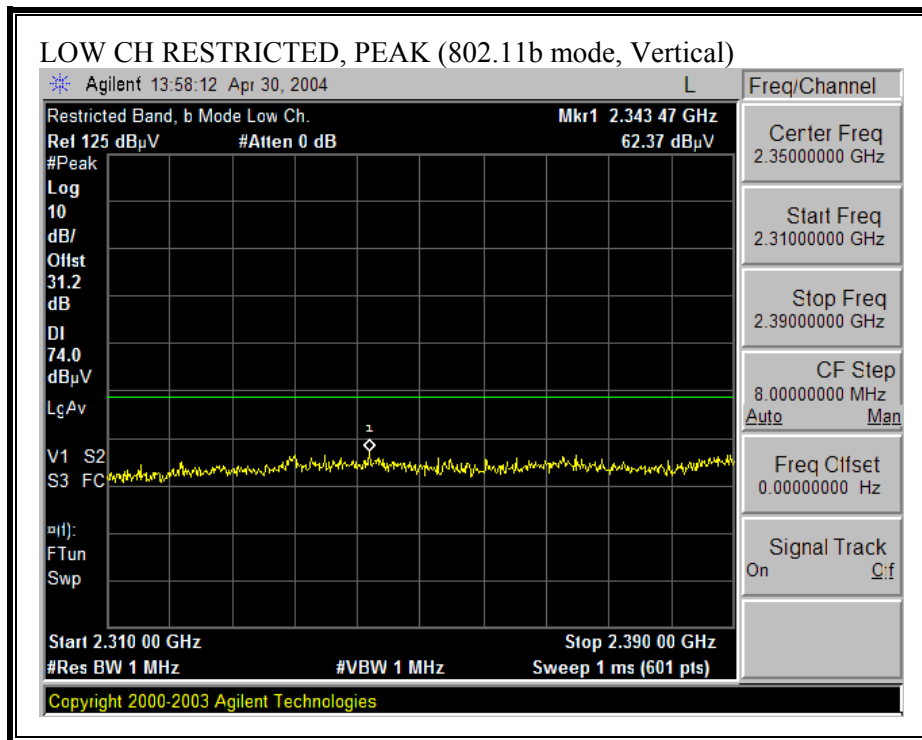


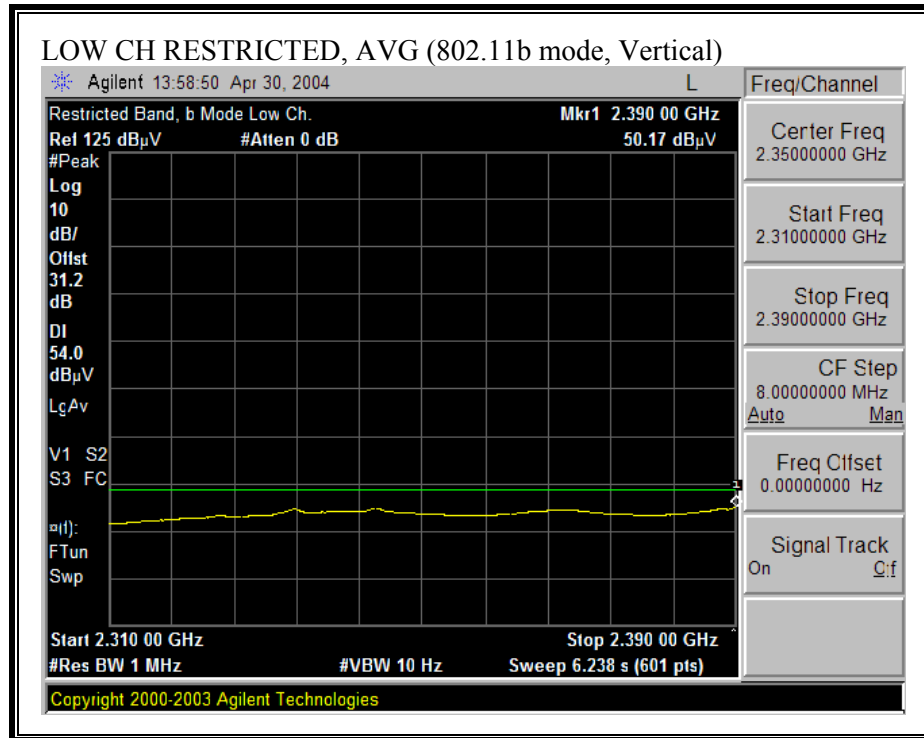


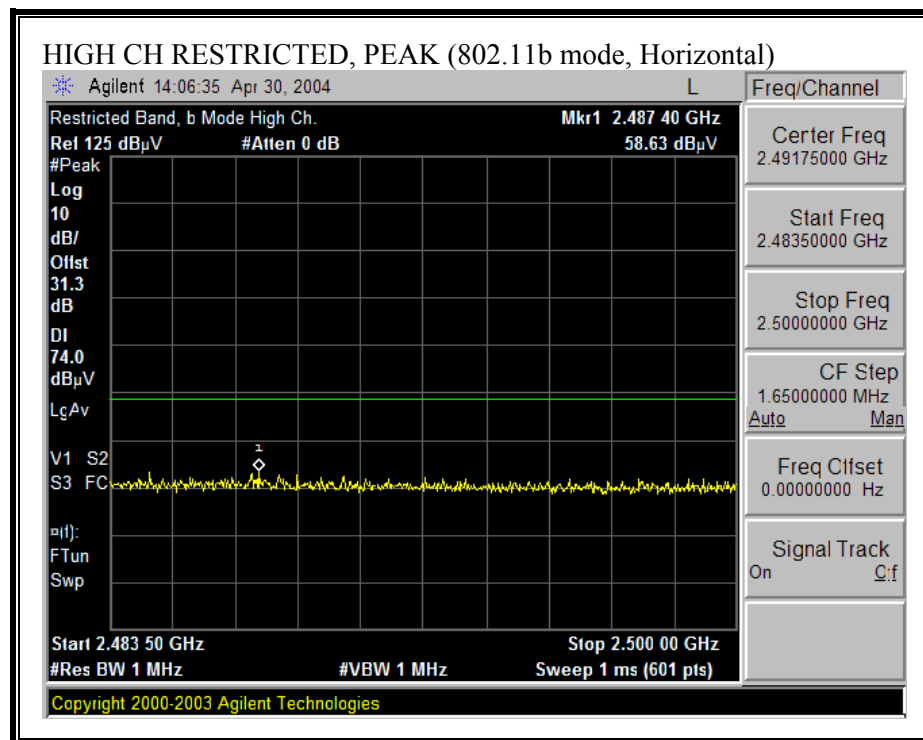

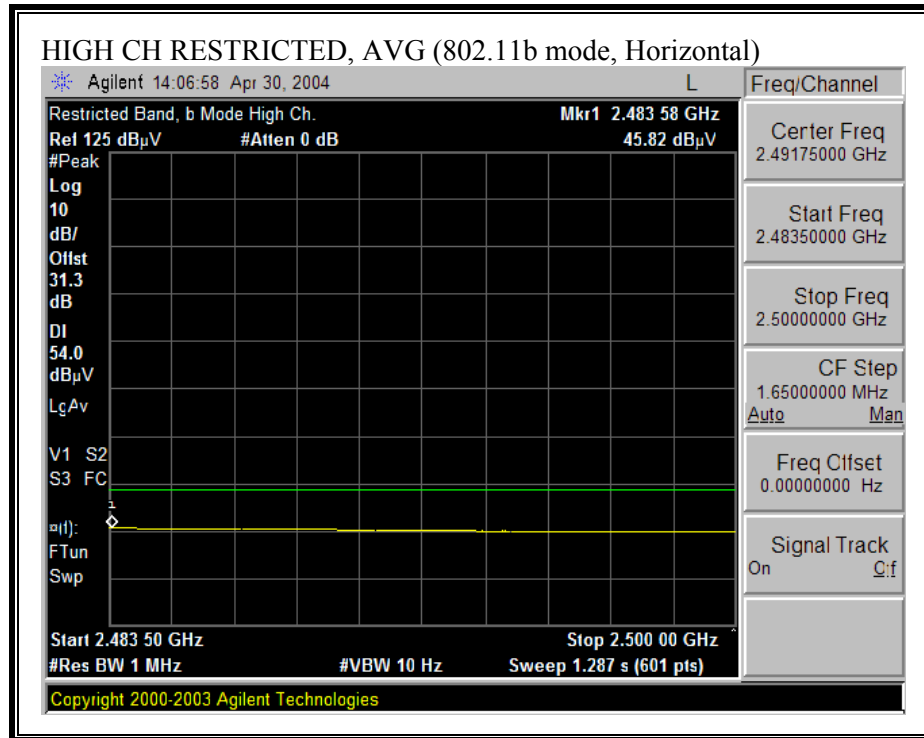


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

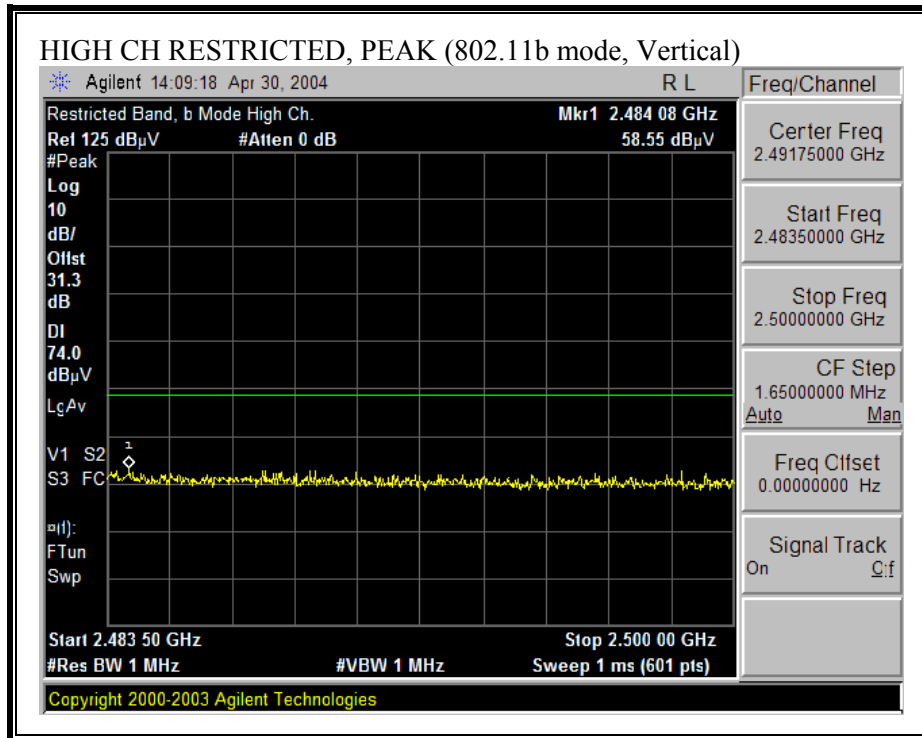


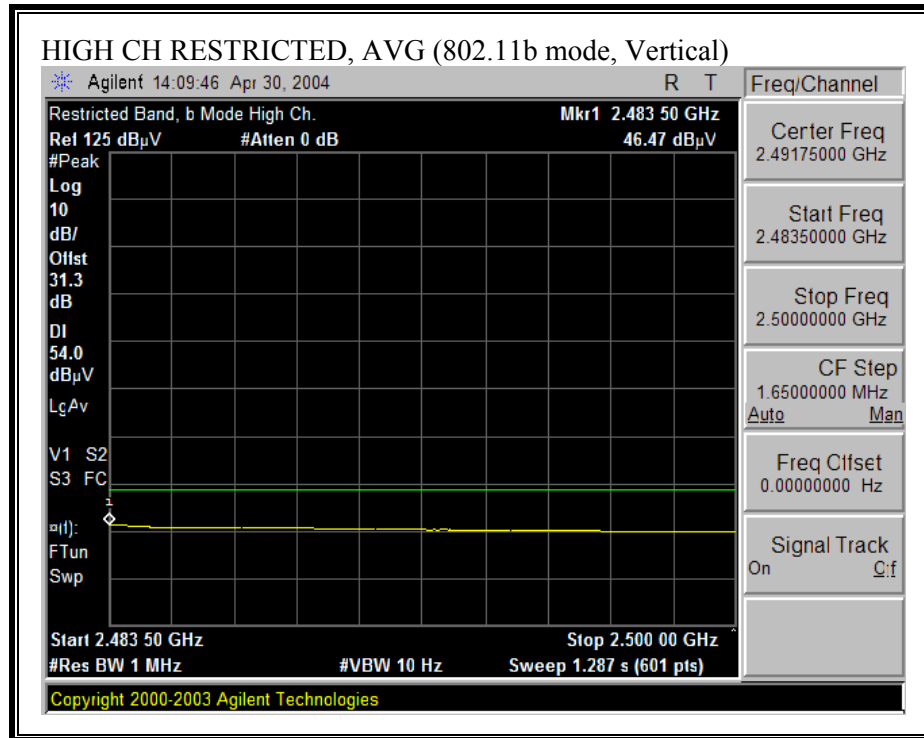


YAGI – MYP24010PTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

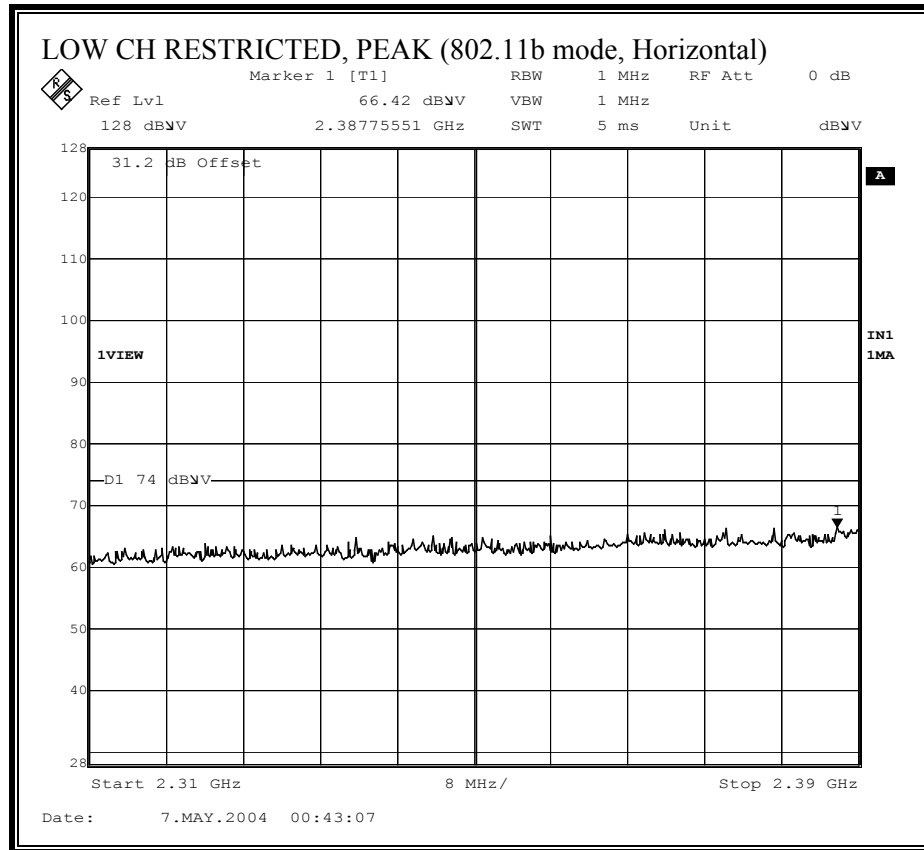





RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

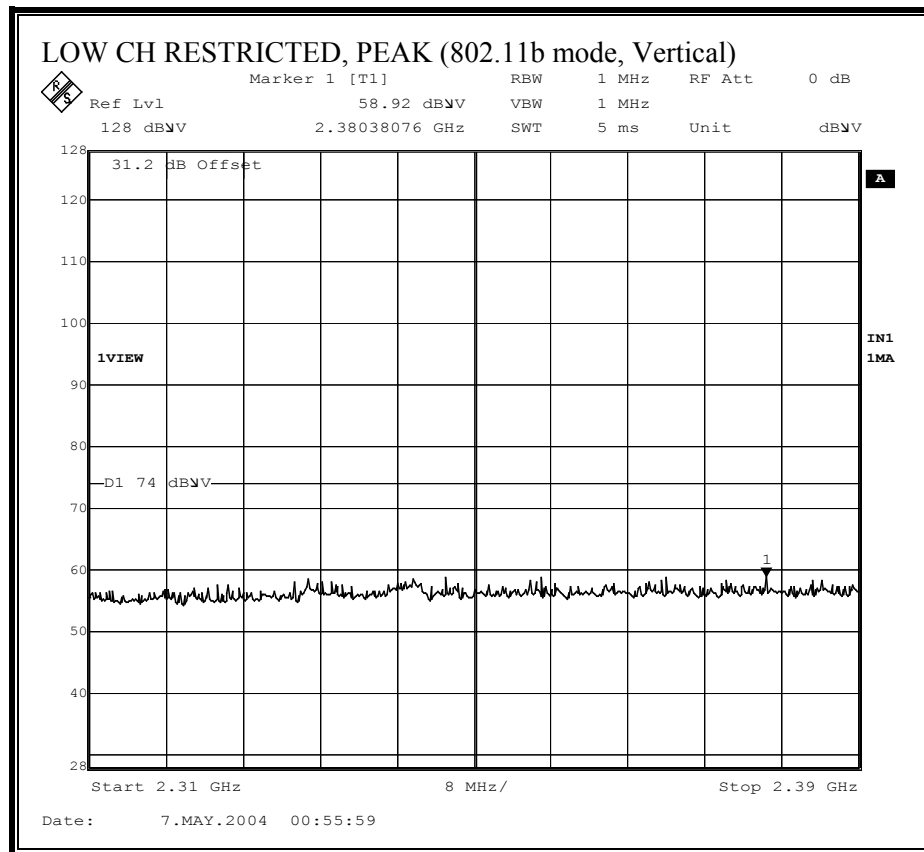

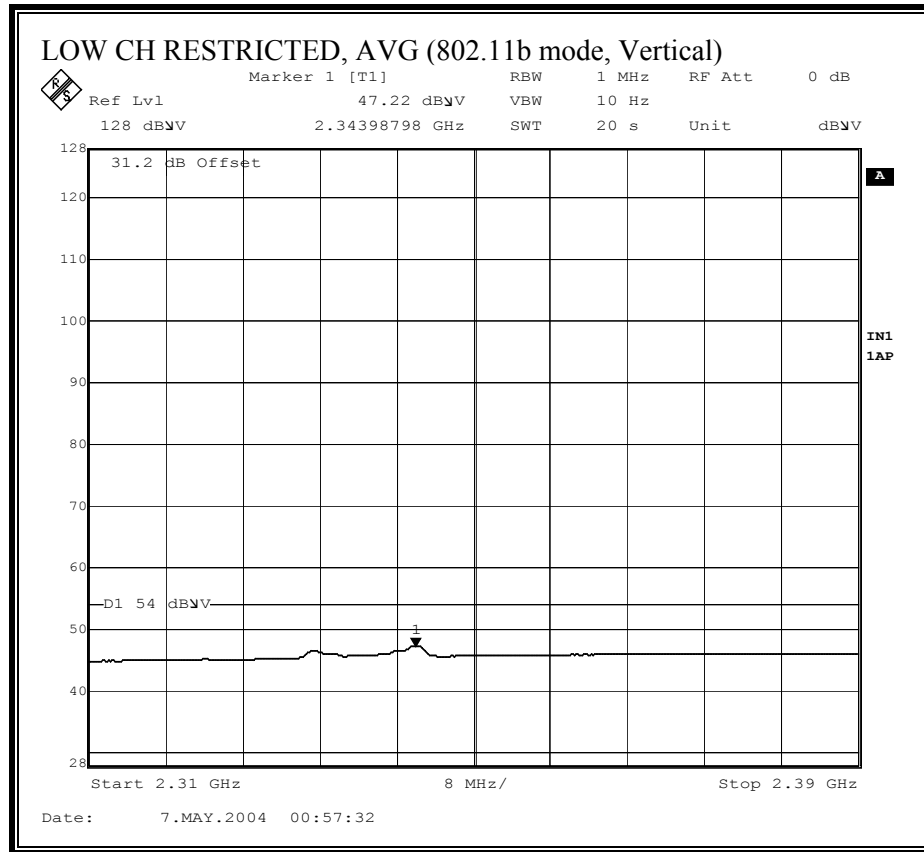



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

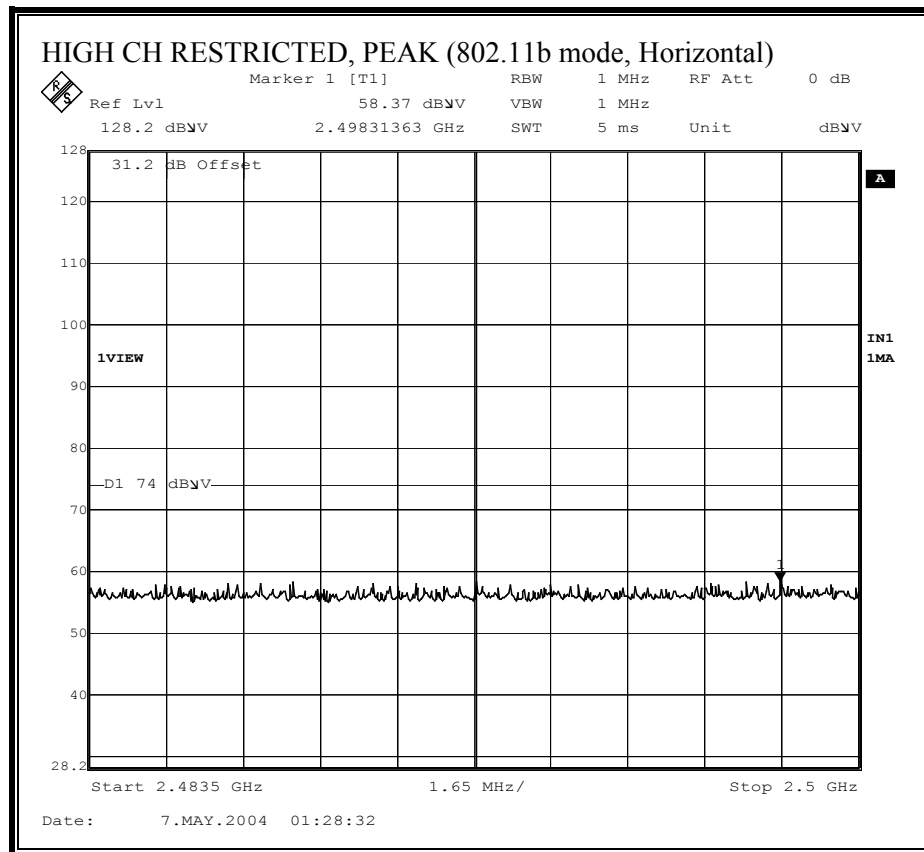

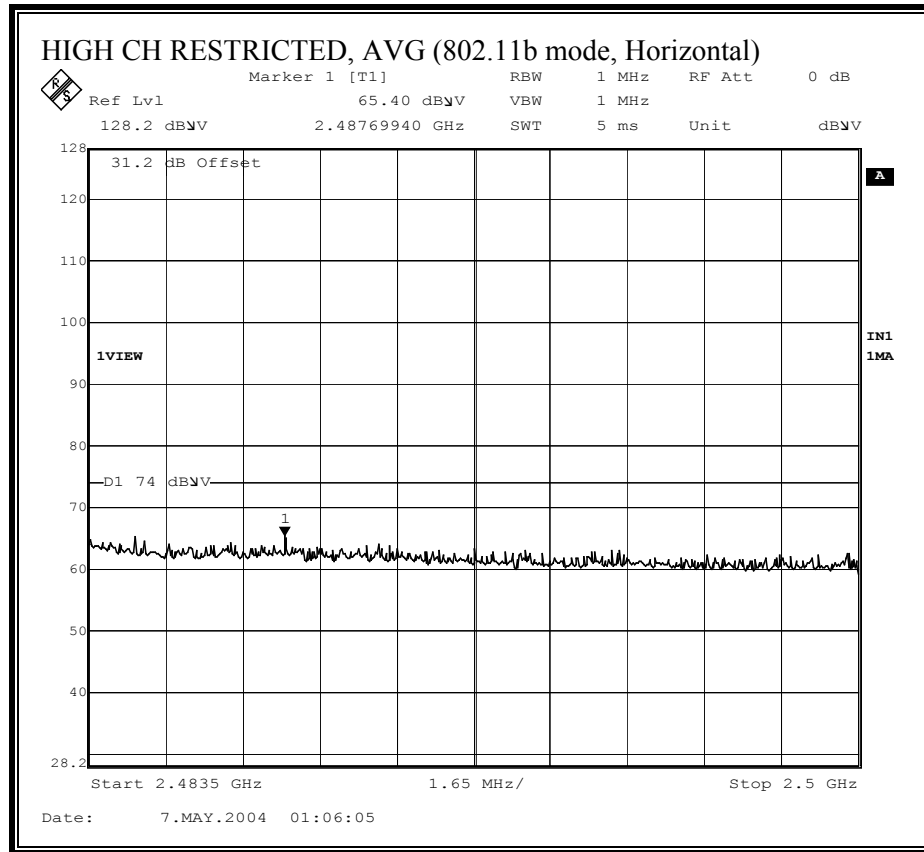

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

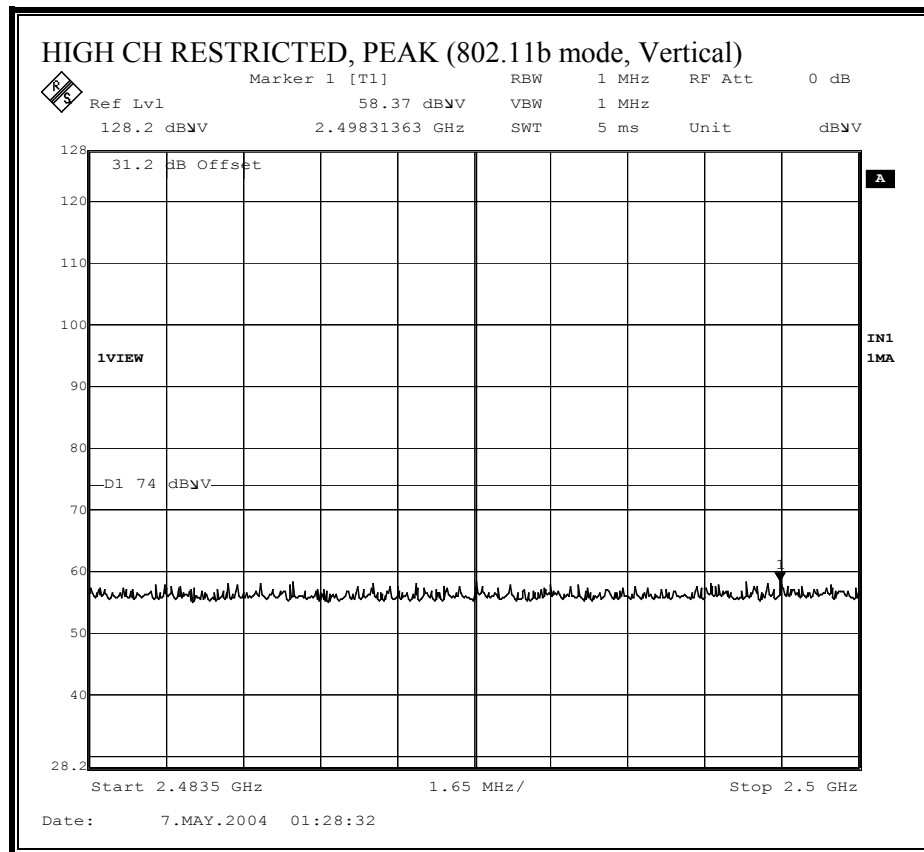





CONFIG #6:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
PANEL	M24008XFPTRPC	8	HORIZONTAL	PANEL	M24008XFPTRPC	8	HORIZONTAL


PANEL – M24008XFPTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

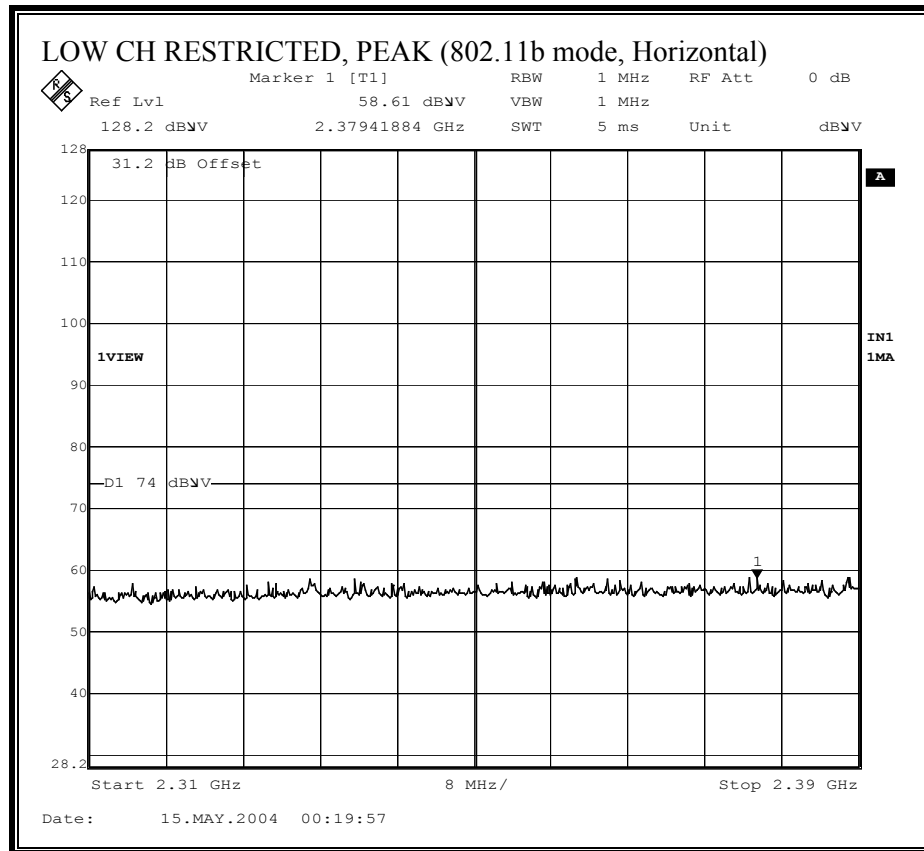

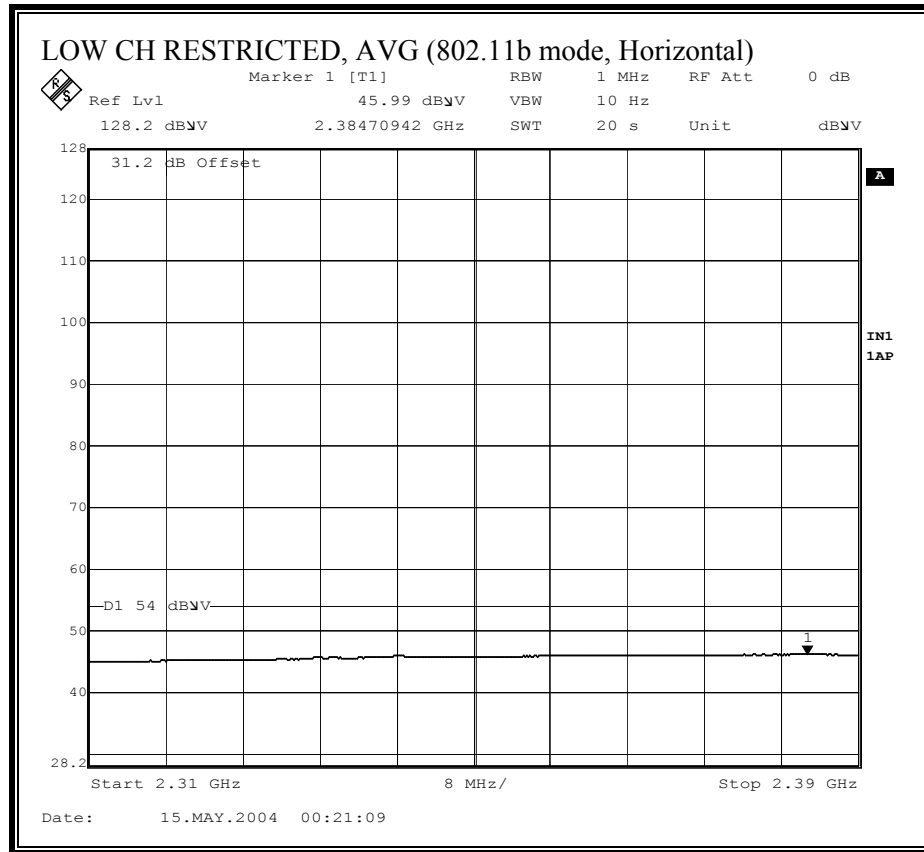



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

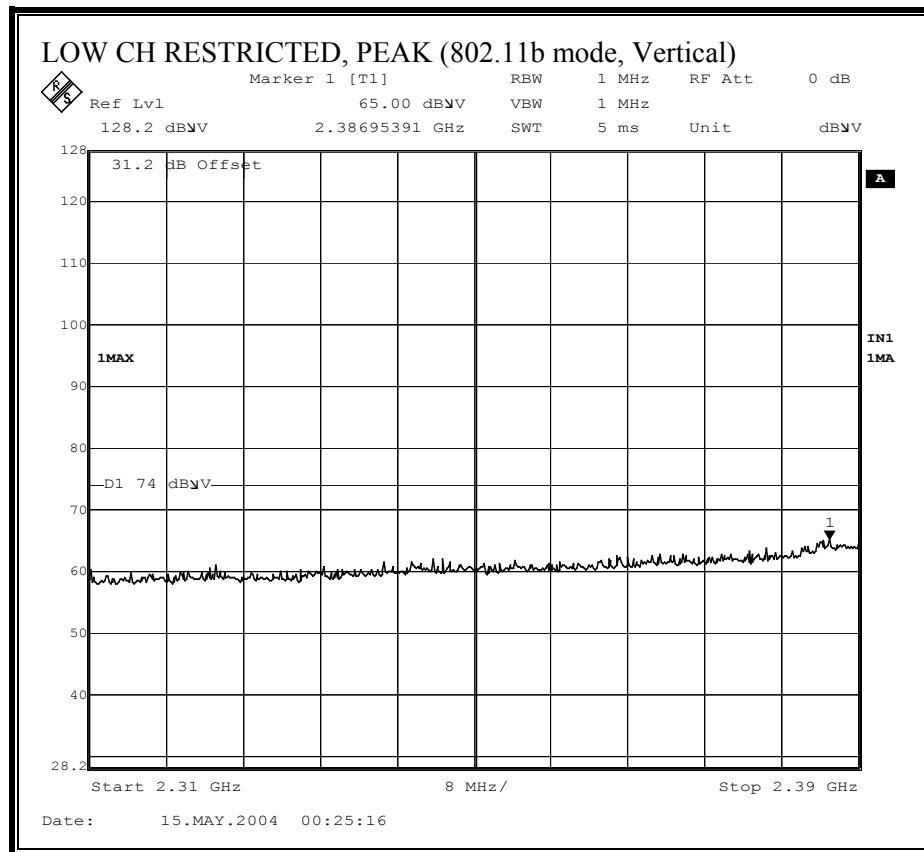

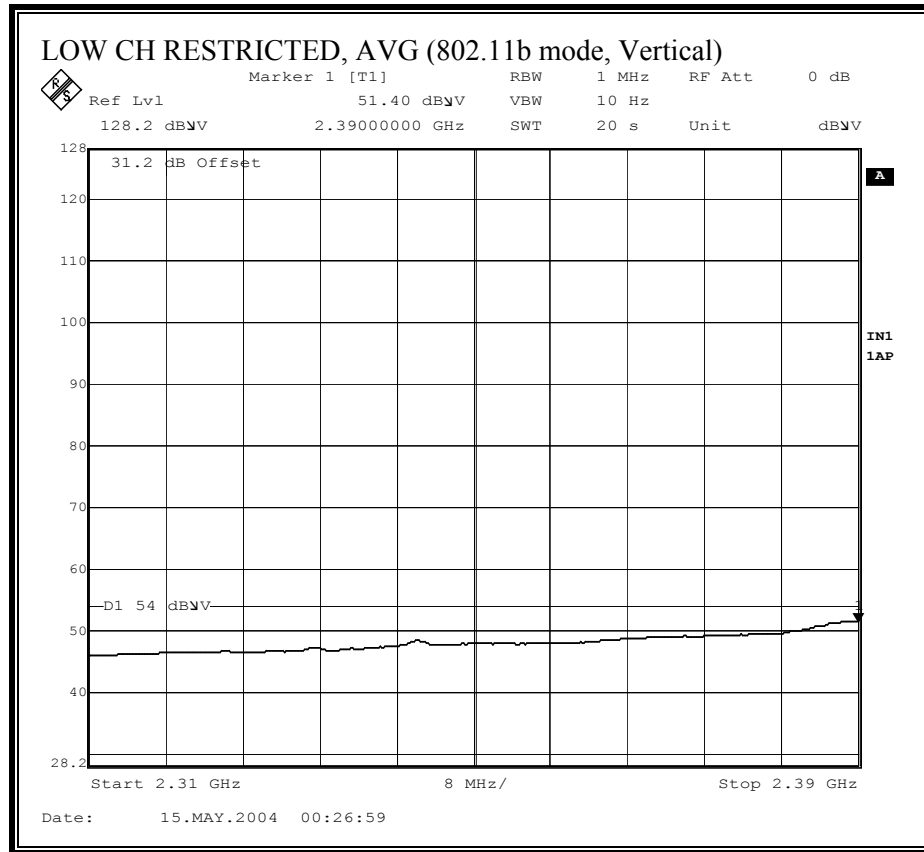



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

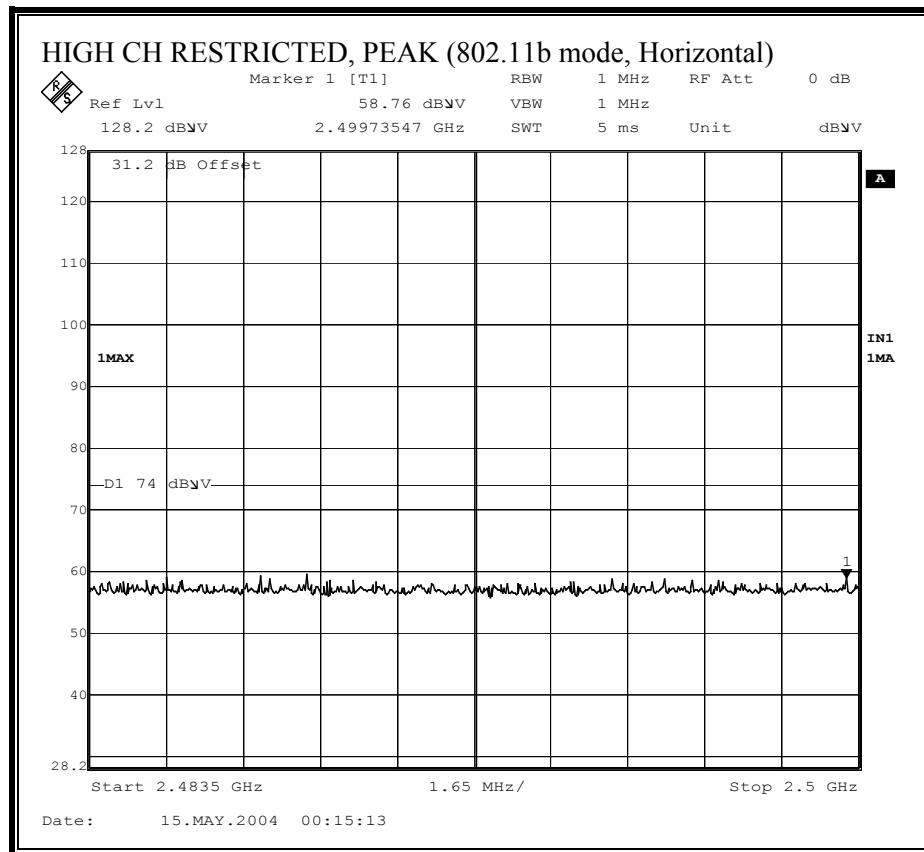

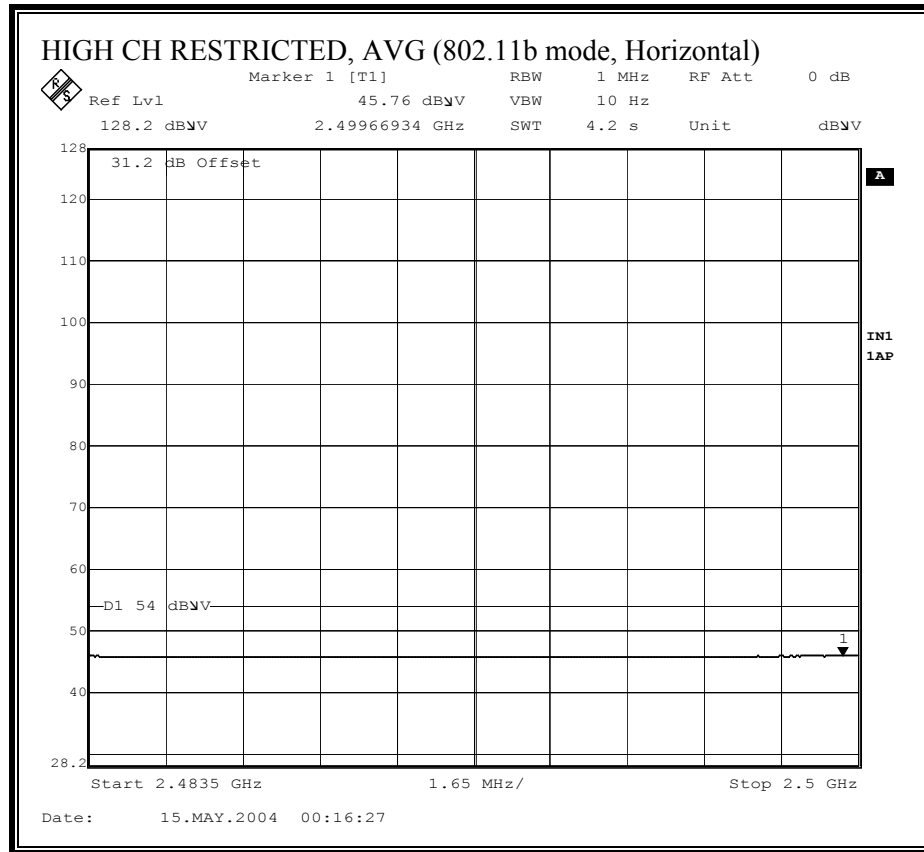


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

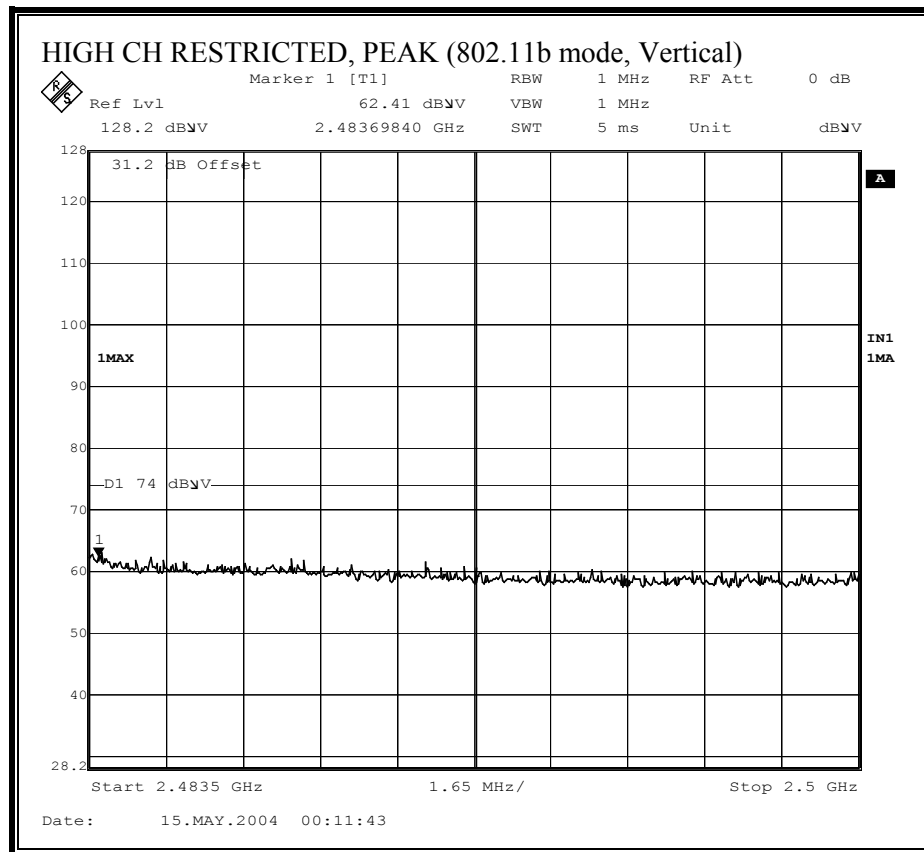


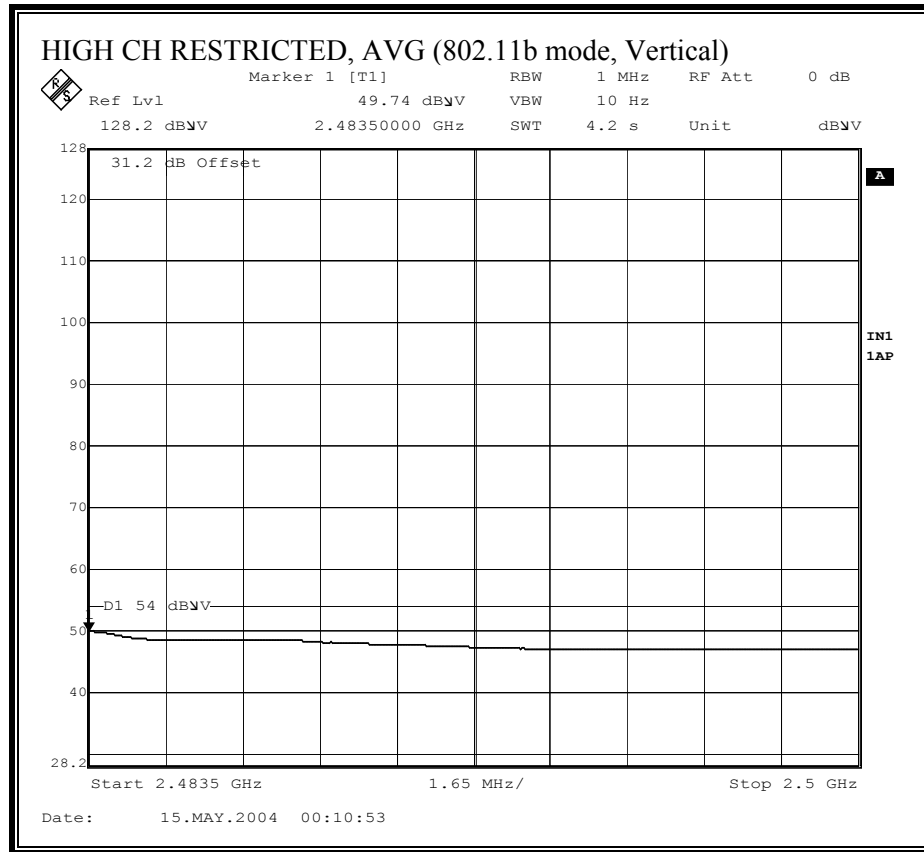


PANEL – M24008XFPTRPC


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

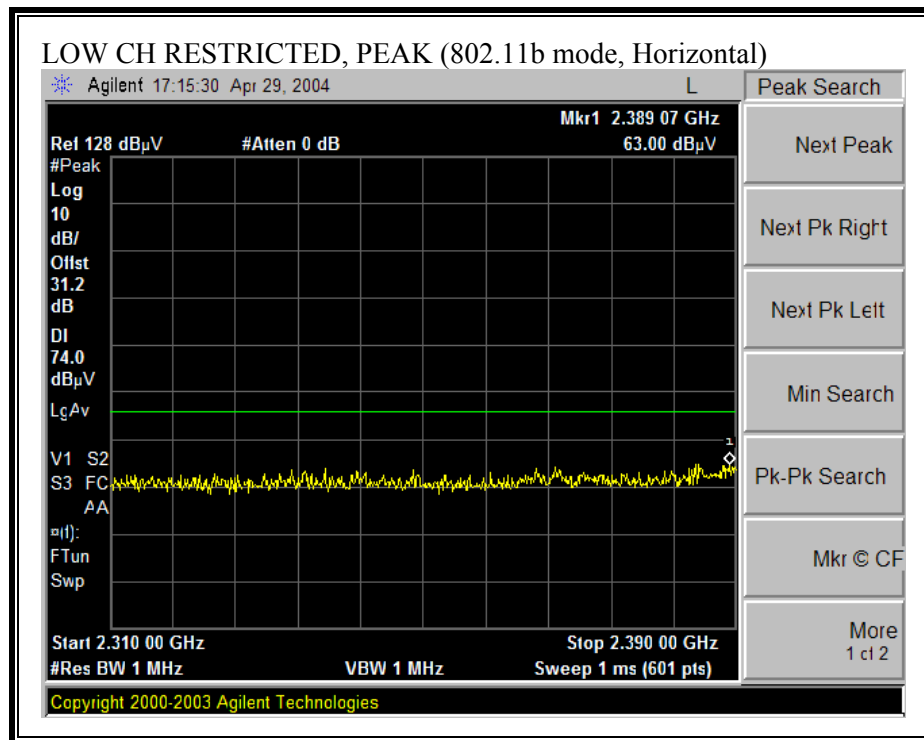

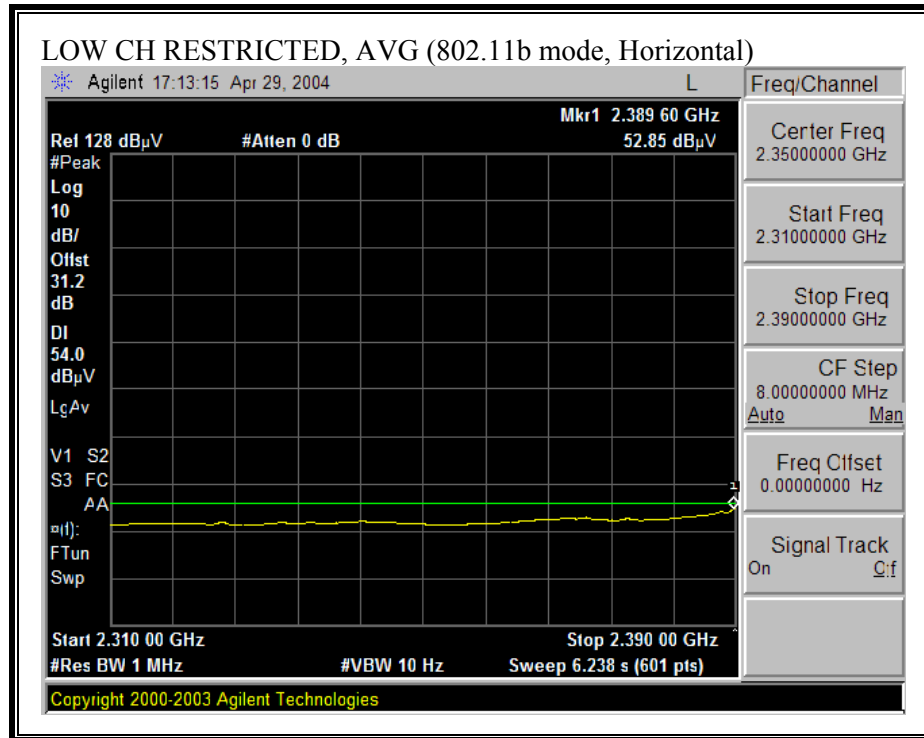



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

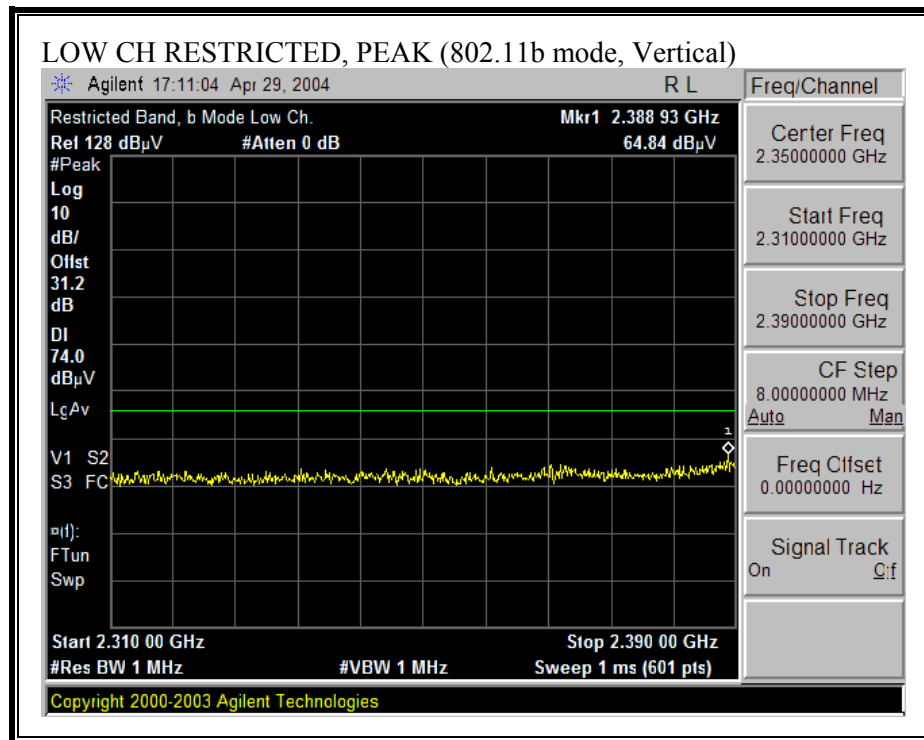

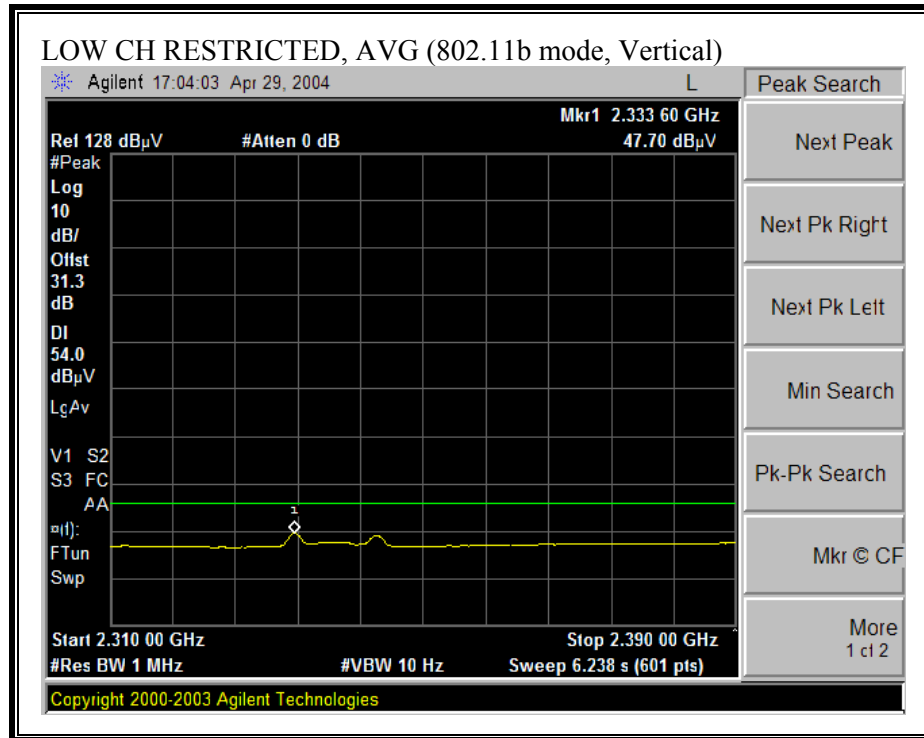



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

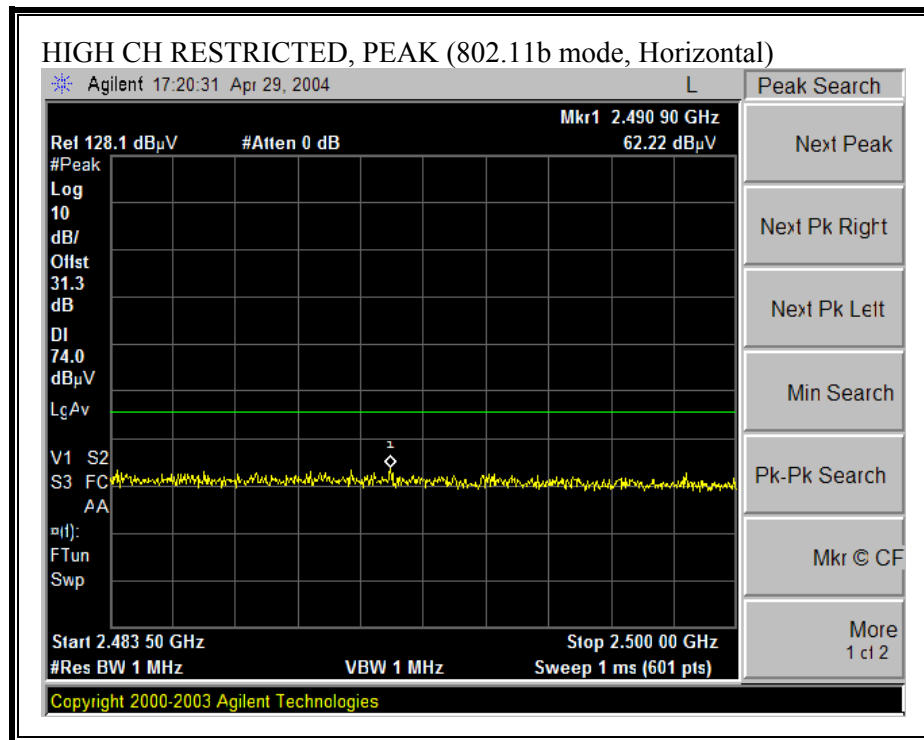

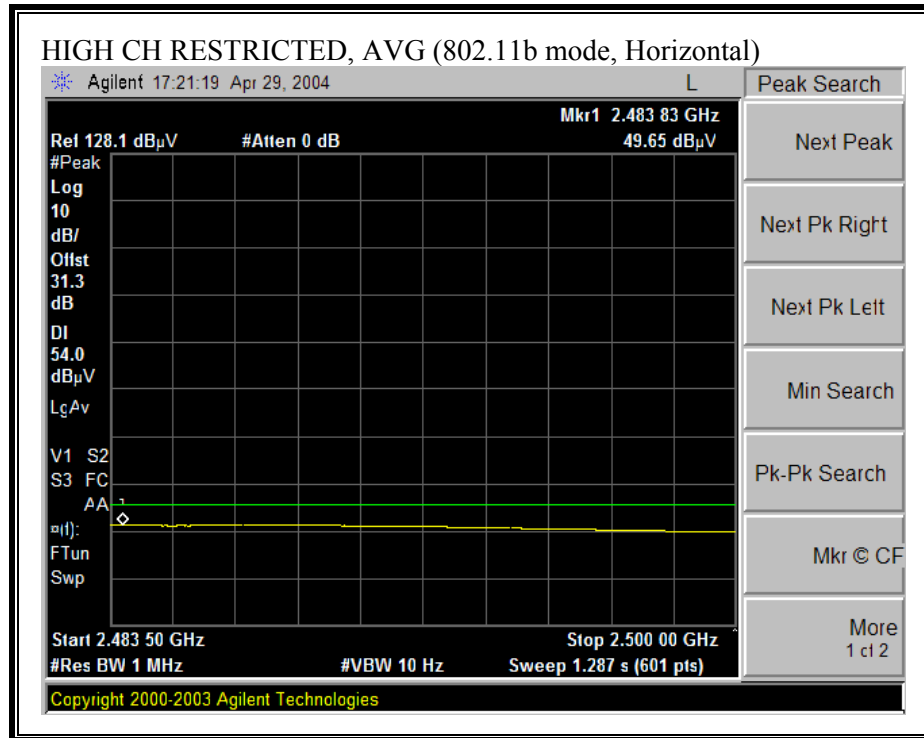

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

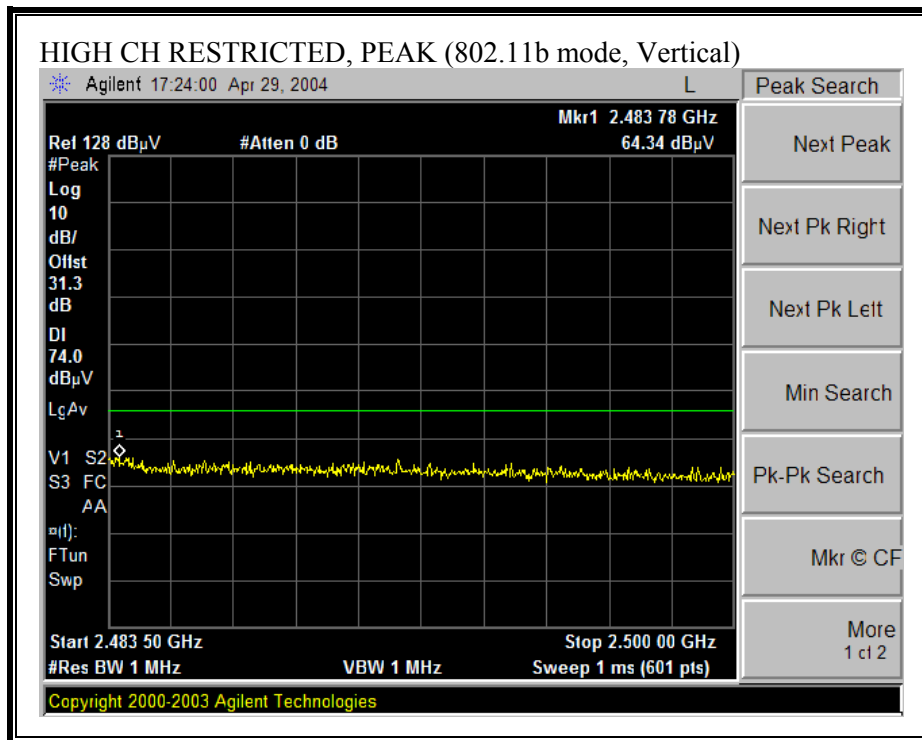

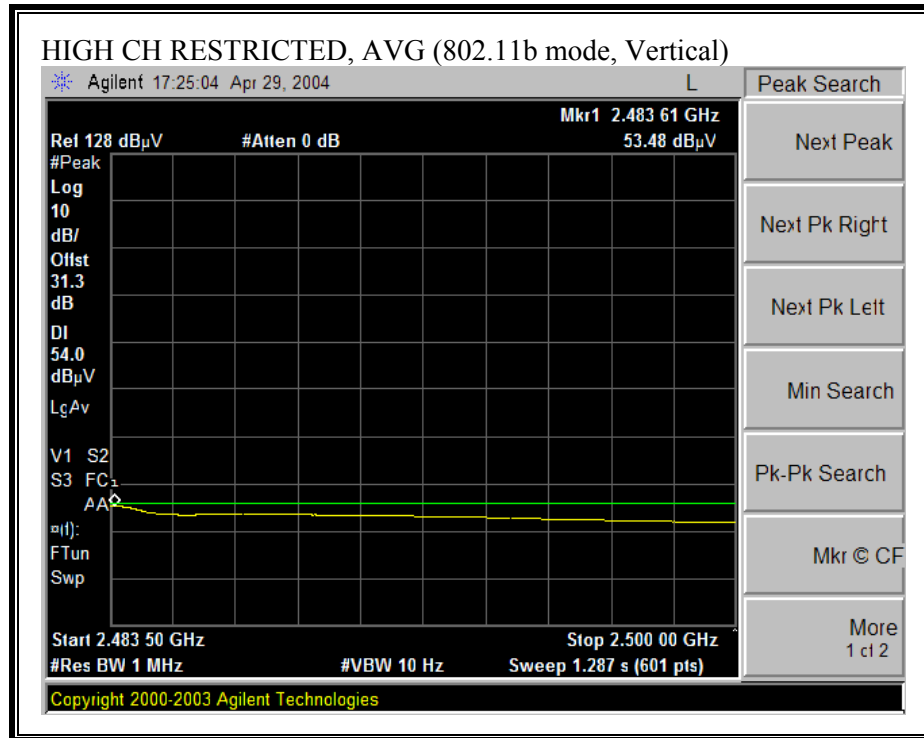

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

CONFIG #1:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL

OMNI - MFB24011PTRPC

05/07/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
Project #: 04U2645-1
Company: VIVATO
EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER
EUT M/N: MFB24011PTRPC_OMNI 11dBi
Test Target: FCC15 CLASS B_HARMONIC / SPUR
Mode Oper: TX LOW/ MID / HI _ CONFIG #1 (OMNI 11dBi VERTICAL & YAGI 10dBi HORIZONTAL_WLAN1: OMNI)

Test Equipment:

EMCO Horn 1-18GHz
T60; S/N: 2238 @3m

Spectrum Analyzer
HP 8593EM Analyzer

Pre-amplifier 1-26GHz
T87 Miteq 924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Hi Frequency Cables
☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Limit
FCC 15.209

Peak Measurements:
1 MHz Resolution Bandwidth
1 MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10 Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	51.4	37.6	33.1	2.9	-44.7	0.0	1.0	43.7	29.9	74.0	54.0	-30.3	-24.1	V
12.060	9.8	49.7	35.7	39.3	6.2	-42.2	0.0	1.0	54.0	40.0	74.0	54.0	-20.0	-14.0	V_NOISE FLOOR
4.824	9.8	52.3	39.3	33.1	2.9	-44.7	0.0	1.0	44.5	31.6	74.0	54.0	-29.5	-22.4	H
12.060	9.8	50.0	37.8	39.3	6.2	-42.2	0.0	1.0	54.3	42.1	74.0	54.0	-19.7	-11.9	H_NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	51.4	36.7	33.1	2.9	-44.7	0.0	1.0	43.7	29.0	74.0	54.0	-30.3	-25.0	V
7.311	9.8	54.0	39.6	36.2	3.8	-44.5	0.0	1.0	50.5	36.1	74.0	54.0	-23.5	-17.9	V_NOISE FLOOR
4.874	9.8	53.2	39.7	33.1	2.9	-44.7	0.0	1.0	45.5	32.0	74.0	54.0	-28.5	-22.0	H
7.311	9.8	60.0	46.8	36.2	3.8	-44.5	0.0	1.0	56.5	43.2	74.0	54.0	-17.5	-10.8	H_NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	50.9	36.8	33.2	2.9	-44.8	0.0	1.0	43.2	29.1	74.0	54.0	-30.8	-24.9	V
7.386	9.8	51.4	37.5	36.3	3.9	-44.5	0.0	1.0	48.1	34.2	74.0	54.0	-25.9	-19.8	V_NOISE FLOOR
4.924	9.8	51.0	38.4	33.2	2.9	-44.8	0.0	1.0	43.3	30.7	74.0	54.0	-30.7	-23.3	H
7.386	9.8	52.5	37.3	36.3	3.9	-44.5	0.0	1.0	49.1	34.0	74.0	54.0	-24.9	-20.0	H_NOISE FLOOR

f Measurement Frequency

Dist Distance to Antenna

Read Analyzer Reading

AF Antenna Factor

CL Cable Loss

Amp Preamp Gain

D Corr Distance Correct to 3 meters

Avg Average Field Strength @ 3 m

Peak Calculated Peak Field Strength

HPF High Pass Filter

Avg Lim Average Field Strength Limit

Pk Lim Peak Field Strength Limit

Avg Mar Margin vs. Average Limit

Pk Mar Margin vs. Peak Limit

YAGI – MYP24010PTRPC

05/07/04 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN															
Project #: 04U2645-1															
Company: VIVATO															
EUT Descr.: 802.11b 2.4GHz BRIDGE / ROUTER															
EUT M/N: MYP24010PTRPC_YAGI 10dB															
Test Target: FCC15 CLASS B _ HARMONIC / SPUR															
Mode Oper: TX LOW/ MID / HI _ CONFIG #1 (OMNI 11dBi VERTICAL & YAGI 10dBi HORIZONTAL_WLAN2:YAGI)															
Test Equipment:															
EMCO Horn 1-18GHz		Spectrum Analyzer		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz							
T60; S/N: 2238 @3m		HP 8593EM Analyzer		T87 Miteq 924342											
Hi Frequency Cables				Limit		Peak Measurements:				Average Measurements:					
☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				FCC 15.205		1 MHz Resolution Bandwidth 1MHz Video Bandwidth				1 MHz Resolution Bandwidth 10Hz Video Bandwidth					
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	49.1	35.0	33.1	2.9	-44.7	0.0	1.0	41.4	27.2	74.0	54.0	-32.6	-26.8	V
12.060	9.8	48.9	35.8	39.3	6.2	-42.2	0.0	1.0	53.1	40.1	74.0	54.0	-20.9	-13.9	V_NOISE FLOOR
4.824	9.8	53.9	37.3	33.1	2.9	-44.7	0.0	1.0	46.1	29.6	74.0	54.0	-27.9	-24.4	H
12.060	9.8	48.4	35.7	39.3	6.2	-42.2	0.0	1.0	52.7	40.0	74.0	54.0	-21.3	-14.0	H_NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	48.5	35.6	33.1	2.9	-44.7	0.0	1.0	40.8	27.9	74.0	54.0	-33.2	-26.1	V
7.311	9.8	50.6	36.8	36.2	3.8	-44.5	0.0	1.0	47.1	33.3	74.0	54.0	-26.9	-20.7	V_NOISE FLOOR
4.874	9.8	49.7	35.1	33.1	2.9	-44.7	0.0	1.0	42.0	27.4	74.0	54.0	-32.0	-26.6	H
7.311	9.8	50.4	36.8	36.2	3.8	-44.5	0.0	1.0	46.9	33.2	74.0	54.0	-27.1	-20.8	H_NOISE FLOOR
HI CH2462MHz															
4.924	9.8	49.1	35.7	33.2	2.9	-44.8	0.0	1.0	41.4	28.0	74.0	54.0	-32.6	-26.0	V
7.386	9.8	50.1	36.5	36.3	3.9	-44.5	0.0	1.0	46.8	33.2	74.0	54.0	-27.2	-20.8	V_NOISE FLOOR
4.924	9.8	55.5	43.3	33.2	2.9	-44.8	0.0	1.0	47.8	35.6	74.0	54.0	-26.2	-18.4	H
7.386	9.8	52.3	39.3	36.3	3.9	-44.5	0.0	1.0	49.0	36.0	74.0	54.0	-25.0	-18.0	H_NOISE FLOOR
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

CONFIG #2:

ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL
					MYP24010PTRPC	10	HORIZONTAL

OMNI - MFB24011PTRPC

05/07/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: MFB24011PTRPC_OMNI 11dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #2 (OMNI 11dBi VERTICAL & YAGI 10dBi HORIZONTAL_ WLAN1: OMNI															
Test Equipment:															
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz							
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth					
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	51.4	37.6	33.1	2.9	-44.7	0.0	1.0	43.7	29.9	74.0	54.0	-30.3	-24.1	V
12.060	9.8	49.7	35.7	39.3	6.2	-42.2	0.0	1.0	54.0	40.0	74.0	54.0	-20.0	-14.0	V_NOISE FLOOR
4.824	9.8	52.3	39.3	33.1	2.9	-44.7	0.0	1.0	44.5	31.6	74.0	54.0	-29.5	-22.4	H
12.060	9.8	50.0	37.8	39.3	6.2	-42.2	0.0	1.0	54.3	42.1	74.0	54.0	-19.7	-11.9	H_NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	51.4	36.7	33.1	2.9	-44.7	0.0	1.0	43.7	29.0	74.0	54.0	-30.3	-25.0	V
7.311	9.8	54.0	39.6	36.2	3.8	-44.5	0.0	1.0	50.5	36.1	74.0	54.0	-23.5	-17.9	V_NOISE FLOOR
4.874	9.8	53.2	39.7	33.1	2.9	-44.7	0.0	1.0	45.5	32.0	74.0	54.0	-28.5	-22.0	H
7.311	9.8	60.0	46.8	36.2	3.8	-44.5	0.0	1.0	56.5	43.2	74.0	54.0	-17.5	-10.8	H_NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	50.9	36.8	33.2	2.9	-44.8	0.0	1.0	43.2	29.1	74.0	54.0	-30.8	-24.9	V
7.386	9.8	51.4	37.5	36.3	3.9	-44.5	0.0	1.0	48.1	34.2	74.0	54.0	-25.9	-19.8	V_NOISE FLOOR
4.924	9.8	51.0	38.4	33.2	2.9	-44.8	0.0	1.0	43.3	30.7	74.0	54.0	-30.7	-23.3	H
7.386	9.8	52.5	37.3	36.3	3.9	-44.5	0.0	1.0	49.1	34.0	74.0	54.0	-24.9	-20.0	H_NOISE FLOOR
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter											

DUAL YAGI – MYP24010PTRPC

05/07/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: MYP24010TRPC_DUAL YAGI 10dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #2 (OMNI 11dBi VERTICAL & DUAL YAGI 10dBi HORIZONTAL_WLAN2:YAGI)															
Test Equipment:															
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz							
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth					
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	48.5	35.4	33.1	2.9	-44.7	0.0	1.0	40.7	27.7	74.0	54.0	-33.3	-26.3	V
12.060	9.8	49.7	37.0	39.3	6.2	-42.2	0.0	1.0	54.0	41.3	74.0	54.0	-20.0	-12.7	V_NOISE FLOOR
4.824	9.8	49.9	35.5	33.1	2.9	-44.7	0.0	1.0	42.2	27.8	74.0	54.0	-31.8	-26.2	H
12.060	9.8	50.8	36.9	39.3	6.2	-42.2	0.0	1.0	55.1	41.2	74.0	54.0	-18.9	-12.8	H_NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	49.5	35.6	33.1	2.9	-44.7	0.0	1.0	41.8	27.9	74.0	54.0	-32.2	-26.1	V
7.311	9.8	50.2	37.0	36.2	3.8	-44.5	0.0	1.0	46.7	33.5	74.0	54.0	-27.3	-20.5	V_NOISE FLOOR
4.874	9.8	48.7	35.8	33.1	2.9	-44.7	0.0	1.0	41.0	28.1	74.0	54.0	-33.0	-25.9	H
7.311	9.8	50.4	37.0	36.2	3.8	-44.5	0.0	1.0	46.9	33.5	74.0	54.0	-27.1	-20.5	H_NOISE FLOOR
HI CH2462MHz															
4.924	9.8	48.2	35.5	33.2	2.9	-44.8	0.0	1.0	40.5	27.8	74.0	54.0	-33.5	-26.2	V
7.386	9.8	50.0	36.8	36.3	3.9	-44.5	0.0	1.0	46.7	33.5	74.0	54.0	-27.3	-20.5	V_NOISE FLOOR
4.924	9.8	48.5	35.3	33.2	2.9	-44.8	0.0	1.0	40.8	27.6	74.0	54.0	-33.2	-26.4	H
7.386	9.8	51.2	36.7	36.3	3.9	-44.5	0.0	1.0	47.9	33.4	74.0	54.0	-26.1	-20.6	H_NOISE FLOOR
f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit CL Cable Loss HPF High Pass Filter															

CONFIG #3:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
PANEL	M24008XFTRPC	8	HORIZONTAL	OMNI	SPSHG60	8.5	HORIZONTAL

PANEL – M24008XFTRPC

05/10/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
Project #: 04U2645-1
Company: VIVATO
EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER
EUT M/N: PANEL 8dBi (MP24008XFTRPC)
Test Target: FCC15 CLASS B HARMONIC / SPUR
Mode Oper: TX LOW/ MID / HI _ CONFIG #3 (PANEL 8dBi (MP24008XFTRPC)_HORIZONTAL & OMNI 8.5dBi (SPSHG60) HORIZONTAL_
WLAN1: PANEL 8dBi)
Test Equipment:

EMCO Horn 1-18GHz
T60; S/N: 2238 @3m

Spectrum Analyzer
HP 8593EM Analyzer

Pre-amplifier 1-26GHz
T87 Miteq 924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Hi Frequency Cables
☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Limit
FCC 15.209

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	48.5	36.8	33.1	2.9	-44.7	0.0	1.0	40.7	29.1	74.0	54.0	-33.3	-24.9	V
12.060	9.8	45.0	35.0	39.3	6.2	-42.2	0.0	1.0	49.3	39.3	74.0	54.0	-24.7	-14.7	V NOISE FLOOR
4.824	9.8	48.0	36.8	33.1	2.9	-44.7	0.0	1.0	40.3	29.1	74.0	54.0	-33.7	-24.9	H
12.060	9.8	46.6	35.9	39.3	6.2	-42.2	0.0	1.0	50.9	40.2	74.0	54.0	-23.1	-13.8	H NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	49.5	35.6	33.1	2.9	-44.7	0.0	1.0	41.8	27.9	74.0	54.0	-32.2	-26.1	V
7.311	9.8	50.2	36.7	36.2	3.8	-44.5	0.0	1.0	46.7	33.2	74.0	54.0	-27.3	-20.8	V NOISE FLOOR
4.874	9.8	48.9	36.0	33.1	2.9	-44.7	0.0	1.0	41.2	28.3	74.0	54.0	-32.8	-25.7	H
7.311	9.8	50.4	37.0	36.2	3.8	-44.5	0.0	1.0	46.9	33.5	74.0	54.0	-27.1	-20.5	H NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	50.0	36.8	33.2	2.9	-44.8	0.0	1.0	42.3	29.1	74.0	54.0	-31.7	-24.9	V
7.386	9.8	49.0	35.0	36.3	3.9	-44.5	0.0	1.0	45.7	31.7	74.0	54.0	-28.3	-22.3	V NOISE FLOOR
4.924	9.8	48.5	35.3	33.2	2.9	-44.8	0.0	1.0	40.8	27.6	74.0	54.0	-33.2	-26.4	H
7.386	9.8	47.4	34.8	36.3	3.9	-44.5	0.0	1.0	44.1	31.5	74.0	54.0	-29.9	-22.5	H NOISE FLOOR

f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss
Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter
Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

OMNI – SPSHG60

05/10/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: SPSHG60_OMNI 8.5dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #3 (PANEL 8dBi (MP24008XFTRPC)_HORIZONTAL & OMNI 8.5dBi (SPSHG60) HORIZONTAL _ WLAN2: OMNI 8.5dBi)															
Test Equipment:															
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz							
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth					
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	55.0	42.8	33.1	2.9	-44.7	0.0	1.0	47.3	35.1	74.0	54.0	-26.7	-18.9	V
12.060	9.8	46.0	36.0	39.3	6.2	-42.2	0.0	1.0	50.3	40.3	74.0	54.0	-23.7	-13.7	V_NOISE FLOOR
4.824	9.8	52.0	41.0	33.1	2.9	-44.7	0.0	1.0	44.3	33.3	74.0	54.0	-29.7	-20.7	H
12.060	9.8	46.6	35.9	39.3	6.2	-42.2	0.0	1.0	50.9	40.2	74.0	54.0	-23.1	-13.8	H_NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	58.5	47.8	33.1	2.9	-44.7	0.0	1.0	50.8	40.1	74.0	54.0	-23.2	-13.9	V
7.311	9.8	53.0	43.0	36.2	3.8	-44.5	0.0	1.0	49.5	39.5	74.0	54.0	-24.5	-14.5	V_NOISE FLOOR
4.874	9.8	55.0	43.2	33.1	2.9	-44.7	0.0	1.0	47.3	35.5	74.0	54.0	-26.7	-18.5	H
7.311	9.8	49.2	36.7	36.2	3.8	-44.5	0.0	1.0	45.7	33.2	74.0	54.0	-28.3	-20.8	H_NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	59.4	47.2	33.2	2.9	-44.8	0.0	1.0	51.7	39.5	74.0	54.0	-22.3	-14.5	V
7.386	9.8	51.1	37.4	36.3	3.9	-44.5	0.0	1.0	47.8	34.1	74.0	54.0	-26.2	-19.9	V_NOISE FLOOR
4.924	9.8	54.8	43.6	33.2	2.9	-44.8	0.0	1.0	47.1	35.9	74.0	54.0	-26.9	-18.1	H
7.386	9.8	49.0	36.7	36.3	3.9	-44.5	0.0	1.0	45.7	33.4	74.0	54.0	-28.3	-20.6	H_NOISE FLOOR
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

CONFIG #4:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	OMNI	MFB24011PTRPC	11	VERTICAL

OMNI – SPSHG60

05/10/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
Project #: 04U2645-1
Company: VIVATO
EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER
EUT M/N: SPSHG60_OMNI 8.5dBi
Test Target: FCC15 CLASS B_HARMONIC / SPUR
Mode Oper: TX LOW/ MID / HI _ CONFIG #4 (OMNI 8.5dBi (SPSHG60) HORIZONTAL & OMNI 11dBi (MFP24011PTRPC)_VERTICAL(WLAN1: OMNI)

Test Equipment:

EMCO Horn 1-18GHz
T60; S/N: 2238 @3m

Spectrum Analyzer
HP 8593EM Analyzer

Pre-amplifier 1-26GHz
T87 Miteq 924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Hi Frequency Cables
☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Limit
FCC 15.209

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	55.0	42.8	33.1	2.9	-44.7	0.0	1.0	47.3	35.1	74.0	54.0	-26.7	-18.9	V
12.060	9.8	46.0	36.0	39.3	6.2	-42.2	0.0	1.0	50.3	40.3	74.0	54.0	-23.7	-13.7	V NOISE FLOOR
4.824	9.8	52.0	41.0	33.1	2.9	-44.7	0.0	1.0	44.3	33.3	74.0	54.0	-29.7	-20.7	H
12.060	9.8	46.6	35.9	39.3	6.2	-42.2	0.0	1.0	50.9	40.2	74.0	54.0	-23.1	-13.8	H NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	58.5	47.8	33.1	2.9	-44.7	0.0	1.0	50.8	40.1	74.0	54.0	-23.2	-13.9	V
7.311	9.8	53.0	43.0	36.2	3.8	-44.5	0.0	1.0	49.5	39.5	74.0	54.0	-24.5	-14.5	V NOISE FLOOR
4.874	9.8	55.0	43.2	33.1	2.9	-44.7	0.0	1.0	47.3	35.5	74.0	54.0	-26.7	-18.5	H
7.311	9.8	49.2	36.7	36.2	3.8	-44.5	0.0	1.0	45.7	33.2	74.0	54.0	-28.3	-20.8	H NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	59.4	47.2	33.2	2.9	-44.8	0.0	1.0	51.7	39.5	74.0	54.0	-22.3	-14.5	V
7.386	9.8	51.1	37.4	36.3	3.9	-44.5	0.0	1.0	47.8	34.1	74.0	54.0	-26.2	-19.9	V NOISE FLOOR
4.924	9.8	54.8	43.6	33.2	2.9	-44.8	0.0	1.0	47.1	35.9	74.0	54.0	-26.9	-18.1	H
7.386	9.8	49.0	36.7	36.3	3.9	-44.5	0.0	1.0	45.7	33.4	74.0	54.0	-28.3	-20.6	H NOISE FLOOR

f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss
Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter
Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

OMNI - MFB24011PTRPC

05/07/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																		
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: MFB24011PTRPC_OMNI 11dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #4 (OMNI 8.5dBi (SPHSG60) HORIZONTAL & OMNI 11dBi VERTICAL (WLAN2: OMNI 11dBi)																		
Test Equipment:																		
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz										
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)										Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth		Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth				
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes			
LOW CH 2412MHz																		
4.824	9.8	50.5	36.7	33.1	2.9	-44.7	0.0	1.0	42.8	29.0	74.0	54.0	-31.2	-25.0	V			
12.060	9.8	48.8	34.8	39.3	6.2	-42.2	0.0	1.0	53.1	39.1	74.0	54.0	-20.9	-14.9	V_NOISE FLOOR			
4.824	9.8	51.4	38.4	33.1	2.9	-44.7	0.0	1.0	43.6	30.7	74.0	54.0	-30.4	-23.3	H			
12.060	9.8	49.1	36.9	39.3	6.2	-42.2	0.0	1.0	53.4	41.2	74.0	54.0	-20.6	-12.8	H_NOISE FLOOR			
MID CH 2437MHz																		
4.874	9.8	50.5	35.8	33.1	2.9	-44.7	0.0	1.0	42.8	28.1	74.0	54.0	-31.2	-25.9	V			
7.311	9.8	53.1	38.7	36.2	3.8	-44.5	0.0	1.0	49.6	35.2	74.0	54.0	-24.4	-18.8	V_NOISE FLOOR			
4.874	9.8	52.3	38.8	33.1	2.9	-44.7	0.0	1.0	44.6	31.1	74.0	54.0	-29.4	-22.9	H			
7.311	9.8	59.1	45.9	36.2	3.8	-44.5	0.0	1.0	55.6	42.3	74.0	54.0	-18.4	-11.7	H_NOISE FLOOR			
HI CH 2462MHz																		
4.924	9.8	50.0	35.9	33.2	2.9	-44.8	0.0	1.0	42.3	28.2	74.0	54.0	-31.7	-25.8	V			
7.386	9.8	50.5	36.6	36.3	3.9	-44.5	0.0	1.0	47.2	33.3	74.0	54.0	-26.8	-20.7	V_NOISE FLOOR			
4.924	9.8	50.1	37.5	33.2	2.9	-44.8	0.0	1.0	42.4	29.8	74.0	54.0	-31.6	-24.2	H			
7.386	9.8	51.6	36.4	36.3	3.9	-44.5	0.0	1.0	48.2	33.1	74.0	54.0	-25.8	-20.9	H_NOISE FLOOR			

CONFIG #5:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	YAGI	MYP24010PTRPC	10	HORIZONTAL

OMNI – SPSHG60

05/10/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
Project #: 04U2645-1
Company: VIVATO
EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER
EUT M/N: SPSHG60_OMNI 8.5dBi
Test Target: FCC15 CLASS B_HARMONIC / SPUR
Mode Oper: TX LOW/ MID / HI _ CONFIG #5 (OMNI 8.5dBi (SPSHG60) HORIZONTAL & YAGI 10dBi (MYP24010PTRPC) VERTICAL_WLAN1: OMNI

Test Equipment:

EMCO Horn 1-18GHz
T60; S/N: 2238 @3m

Spectrum Analyzer
HP 8593EM Analyzer

Pre-amplifier 1-26GHz
T87 Miteq 924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Hi Frequency Cables
☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Limit
FCC 15.209

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	55.0	42.8	33.1	2.9	-44.7	0.0	1.0	47.3	35.1	74.0	54.0	-26.7	-18.9	V
12.060	9.8	46.0	36.0	39.3	6.2	-42.2	0.0	1.0	50.3	40.3	74.0	54.0	-23.7	-13.7	V NOISE FLOOR
4.824	9.8	52.0	41.0	33.1	2.9	-44.7	0.0	1.0	44.3	33.3	74.0	54.0	-29.7	-20.7	H
12.060	9.8	46.6	35.9	39.3	6.2	-42.2	0.0	1.0	50.9	40.2	74.0	54.0	-23.1	-13.8	H NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	58.5	47.8	33.1	2.9	-44.7	0.0	1.0	50.8	40.1	74.0	54.0	-23.2	-13.9	V
7.311	9.8	53.0	43.0	36.2	3.8	-44.5	0.0	1.0	49.5	39.5	74.0	54.0	-24.5	-14.5	V NOISE FLOOR
4.874	9.8	55.0	43.2	33.1	2.9	-44.7	0.0	1.0	47.3	35.5	74.0	54.0	-26.7	-18.5	H
7.311	9.8	49.2	36.7	36.2	3.8	-44.5	0.0	1.0	45.7	33.2	74.0	54.0	-28.3	-20.8	H NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	59.4	47.2	33.2	2.9	-44.8	0.0	1.0	51.7	39.5	74.0	54.0	-22.3	-14.5	V
7.386	9.8	51.1	37.4	36.3	3.9	-44.5	0.0	1.0	47.8	34.1	74.0	54.0	-26.2	-19.9	V NOISE FLOOR
4.924	9.8	54.8	43.6	33.2	2.9	-44.8	0.0	1.0	47.1	35.9	74.0	54.0	-26.9	-18.1	H
7.386	9.8	49.0	36.7	36.3	3.9	-44.5	0.0	1.0	45.7	33.4	74.0	54.0	-28.3	-20.6	H NOISE FLOOR

f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss
Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter
Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

YAGI – MYP24010PTRPC

05/12/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descrip.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: MYP24011PTRPCYAGI 10dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #5 (OMNI 8.5dBi HORIZONTAL & YAGI 10dBi VERTICAL_WLAN2:YAGI)																
Test Equipment:																
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Mitteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz								
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth						
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
LOW CH 2412MHz																
4.824	9.8	48.8	35.6	33.1	2.9	-44.7	0.0	1.0	41.1	27.9	74.0	54.0	-32.9	-26.1	V	
12.060	9.8	48.0	33.0	39.3	6.2	-42.2	0.0	1.0	52.3	37.3	74.0	54.0	-21.7	-16.7	V_NOISE FLOOR	
4.824	9.8	46.0	34.6	33.1	2.9	-44.7	0.0	1.0	38.3	26.9	74.0	54.0	-35.7	-27.1	H	
12.060	9.8	44.5	32.0	39.3	6.2	-42.2	0.0	1.0	48.8	36.3	74.0	54.0	-25.2	-17.7	H_NOISE FLOOR	
MID CH 2437MHz																
4.874	9.8	53.9	40.6	33.1	2.9	-44.7	0.0	1.0	46.1	32.9	74.0	54.0	-27.9	-21.1	V	
7.311	9.8	50.0	36.8	36.2	3.8	-44.5	0.0	1.0	46.5	33.3	74.0	54.0	-27.5	-20.7	V_NOISE FLOOR	
4.874	9.8	47.8	35.1	33.1	2.9	-44.7	0.0	1.0	40.1	27.4	74.0	54.0	-33.9	-26.6	H	
7.311	9.8	49.1	36.5	36.2	3.8	-44.5	0.0	1.0	45.6	33.0	74.0	54.0	-28.4	-21.0	H_NOISE FLOOR	
HI CH 2462MHz																
4.924	9.8	54.0	41.2	33.2	2.9	-44.8	0.0	1.0	46.2	33.5	74.0	54.0	-27.8	-20.5	V	
7.386	9.8	48.7	37.0	36.3	3.9	-44.5	0.0	1.0	45.3	33.7	74.0	54.0	-28.7	-20.3	V_NOISE FLOOR	
4.924	9.8	48.0	36.8	33.2	2.9	-44.8	0.0	1.0	40.3	29.1	74.0	54.0	-33.7	-24.9	H	
7.386	9.8	50.0	37.0	36.3	3.9	-44.5	0.0	1.0	46.7	33.7	74.0	54.0	-27.3	-20.3	H_NOISE FLOOR	
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											

CONFIG #6:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
PANEL	M24008XFTRPC	8	HORIZONTAL	PANEL	M24008XFTRPC	8	HORIZONTAL

PANEL – M24008XFTRPC

05/14/04 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
Project #: 04U2645-1
Company: VIVATO
EUT Descr.: 802.11b 2.4GHz BRIDGE / ROUTER
EUT M/N: MP24008XFTRPC_PANEL 8dBi
Test Target: FCC15 CLASS B_HARMONIC / SPUR
Mode Oper: TX LOW/ MID / HI _ CONFIG #6_PANEL 8dBi (MP24008XFTRPC)_HORIZONTAL & PANEL 8dBi (MP24008XFTRPC)_WLAN1: PANEL 8dBi
Test Equipment:

EMCO Horn 1-18GHz

Spectrum Analyzer

Pre-amplifier 1-26GHz

Pre-amplifier 26-40GHz

Horn > 18GHz

T60; S/N: 2238 @3m

HP 8593EM Analyzer

T87 Miteq 924342

Hi Frequency Cables
☒ (2 ft)
☐ (2 ~ 3 ft)
☐ (4 ~ 6 ft)
☒ (12 ft)

Limit
FCC 15.209

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
LOW CH 2412MHz															
4.824	9.8	51.9	39.6	33.1	2.9	-44.7	0.0	1.0	44.2	31.9	74.0	54.0	-29.8	-22.1	V
12.060	9.8	46.0	35.8	39.3	6.2	-42.2	0.0	1.0	50.3	40.1	74.0	54.0	-23.7	-13.9	V NOISE FLOOR
4.824	9.8	50.2	37.7	33.1	2.9	-44.7	0.0	1.0	42.5	29.9	74.0	54.0	-31.5	-24.1	H
12.060	9.8	47.3	36.5	39.3	6.2	-42.2	0.0	1.0	51.6	40.8	74.0	54.0	-22.4	-13.2	H NOISE FLOOR
MID CH 2437MHz															
4.874	9.8	55.9	43.8	33.1	2.9	-44.7	0.0	1.0	48.2	36.1	74.0	54.0	-25.8	-17.9	V
7.311	9.8	51.5	38.0	36.2	3.8	-44.5	0.0	1.0	47.9	34.5	74.0	54.0	-26.1	-19.5	V NOISE FLOOR
4.874	9.8	50.0	37.3	33.1	2.9	-44.7	0.0	1.0	42.3	29.6	74.0	54.0	-31.7	-24.4	H
7.311	9.8	50.4	38.1	36.2	3.8	-44.5	0.0	1.0	46.9	34.6	74.0	54.0	-27.1	-19.4	H NOISE FLOOR
HI CH 2462MHz															
4.924	9.8	53.8	42.1	33.2	2.9	-44.8	0.0	1.0	46.1	34.4	74.0	54.0	-27.9	-19.6	V
7.386	9.8	51.7	37.6	36.3	3.9	-44.5	0.0	1.0	48.4	34.3	74.0	54.0	-25.6	-19.7	V NOISE FLOOR
4.924	9.8	50.8	36.9	33.2	2.9	-44.8	0.0	1.0	43.0	29.2	74.0	54.0	-31.0	-24.8	H
7.386	9.8	48.8	35.7	36.3	3.9	-44.5	0.0	1.0	45.5	32.4	74.0	54.0	-28.5	-21.6	H NOISE FLOOR


f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss
Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter
Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

PANEL – M24008XFPTRPC

05/14/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: VIEN TRAN Project #: 04U2645-1 Company: VIVATO EUT Descr.: 802.11b 2.4GHz BRIDGE / ROUTER EUT M/N: MP24008XFPTRPC_PANEL 8dBi Test Target: FCC15 CLASS B _ HARMONIC / SPUR Mode Oper: TX LOW/ MID / HI _ CONFIG #6_PANEL 8dBi (MP24008XFPTRPC)_HORIZONTAL & PANEL 8dBi (MP24008XFPTRPC)_ WLAN2: PANEL 8dBi)																
Test Equipment:																
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Spectrum Analyzer HP 8593EM Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz								
Hi Frequency Cables ☒ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Limit FCC 15.209		Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth						
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
LOW CH 2412MHz																
4.824	9.8	48.8	37.1	33.1	2.9	-44.7	0.0	1.0	41.0	29.4	74.0	54.0	-33.0	-24.6	V	
12.060	9.8	45.3	35.3	39.3	6.2	-42.2	0.0	1.0	49.6	39.6	74.0	54.0	-24.4	-14.4	V NOISE FLOOR	
4.824	9.8	48.3	37.1	33.1	2.9	-44.7	0.0	1.0	40.6	29.4	74.0	54.0	-33.4	-24.6	H	
12.060	9.8	46.9	36.2	39.3	6.2	-42.2	0.0	1.0	51.2	40.5	74.0	54.0	-22.8	-13.5	H NOISE FLOOR	
MID CH 2437MHz																
4.874	9.8	49.8	35.9	33.1	2.9	-44.7	0.0	1.0	42.1	28.2	74.0	54.0	-31.9	-25.8	V	
7.311	9.8	50.5	37.0	36.2	3.8	-44.5	0.0	1.0	47.0	33.5	74.0	54.0	-27.0	-20.5	V NOISE FLOOR	
4.874	9.8	49.2	36.3	33.1	2.9	-44.7	0.0	1.0	41.5	28.6	74.0	54.0	-32.5	-25.4	H	
7.311	9.8	50.7	37.3	36.2	3.8	-44.5	0.0	1.0	47.2	33.8	74.0	54.0	-26.8	-20.2	H NOISE FLOOR	
HI CH 2462MHz																
4.924	9.8	50.3	37.1	33.2	2.9	-44.8	0.0	1.0	42.6	29.4	74.0	54.0	-31.4	-24.6	V	
7.386	9.8	49.3	35.3	36.3	3.9	-44.5	0.0	1.0	46.0	32.0	74.0	54.0	-28.0	-22.0	V NOISE FLOOR	
4.924	9.8	48.8	35.6	33.2	2.9	-44.8	0.0	1.0	41.1	27.9	74.0	54.0	-32.9	-26.1	H	
7.386	9.8	47.7	35.1	36.3	3.9	-44.5	0.0	1.0	44.4	31.8	74.0	54.0	-29.6	-22.2	H NOISE FLOOR	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

8.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

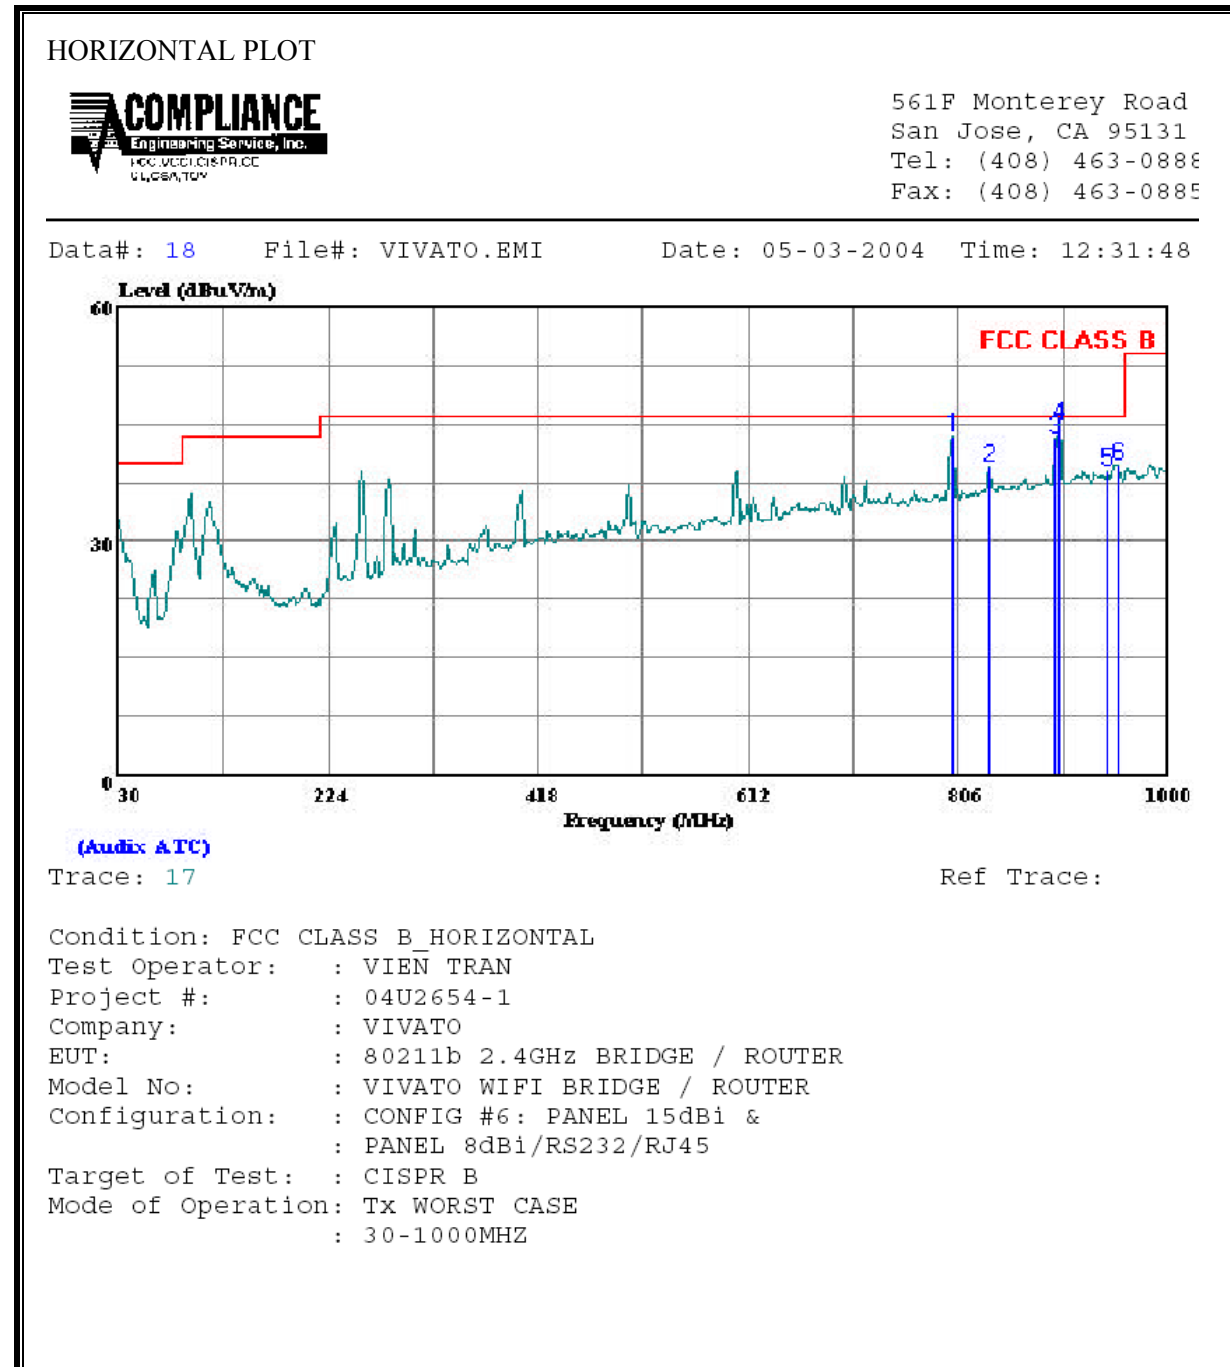

HORIZONTAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	800.180	Peak	18.39	25.02	43.41	46.00	-2.59
2	834.130	Peak	14.09	25.34	39.43	46.00	-6.57
3	895.240	Peak	16.87	26.12	42.99	46.00	-3.01
4	900.090	Peak	18.78	26.18	44.96	46.00	-1.04
5	943.740	Peak	12.16	26.88	39.04	46.00	-6.96
6	953.440	Peak	12.82	26.91	39.73	46.00	-6.27


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT _30-230MHz



561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 14 File#: VIVATO.EMI Date: 05-03-2004 Time: 12:16:29

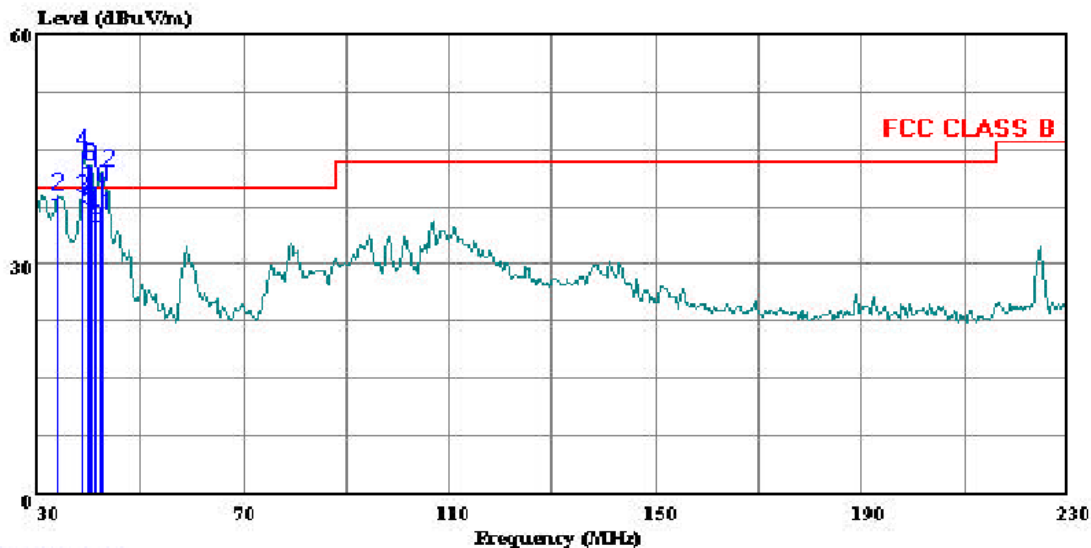

(Auxiliary ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS B_VERTICAL
Test Operator: : VIEN TRAN
Project #: : 04U2654-1
Company: : VIVATO
EUT: : 80211b 2.4GHz BRIDGE / ROUTER
Model No: : VIVATO WIFI BRIDGE / ROUTER
Configuration: : CONFIG #6: PANEL 15dBi &
: PANEL 8dBi/RS232/RJ45
Target of Test: : CISPR B
Mode of Operation: Tx WORST CASE

VERTICAL DATA_30-230MHz


	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	33.800	QP	15.60	20.15	35.75	40.00	-4.25
2	33.800	Peak	18.75	20.30	39.05	40.00	-0.95
3	38.800	QP	22.12	16.47	38.59	40.00	-1.41
4 *	38.800	Peak	28.09	16.63	44.72	40.00	4.72
5	40.000	QP	21.55	15.68	37.23	40.00	-2.77
6 *	40.000	Peak	27.11	15.73	42.84	40.00	2.84
7	40.400	QP	21.67	15.37	37.04	40.00	-2.96
8 *	40.400	Peak	27.48	15.37	42.85	40.00	2.85
9	41.200	QP	19.90	14.80	34.70	40.00	-5.30
10	41.200	Peak	25.05	14.87	39.92	40.00	-0.08
11	42.200	QP	22.35	14.05	36.40	40.00	-3.60
12 *	42.400	Peak	28.19	13.97	42.16	40.00	2.16

VERTICAL PLOT _230-1000MHz



561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0888

Data#: 16 File#: VIVATO.EMI Date: 05-03-2004 Time: 12:25:55

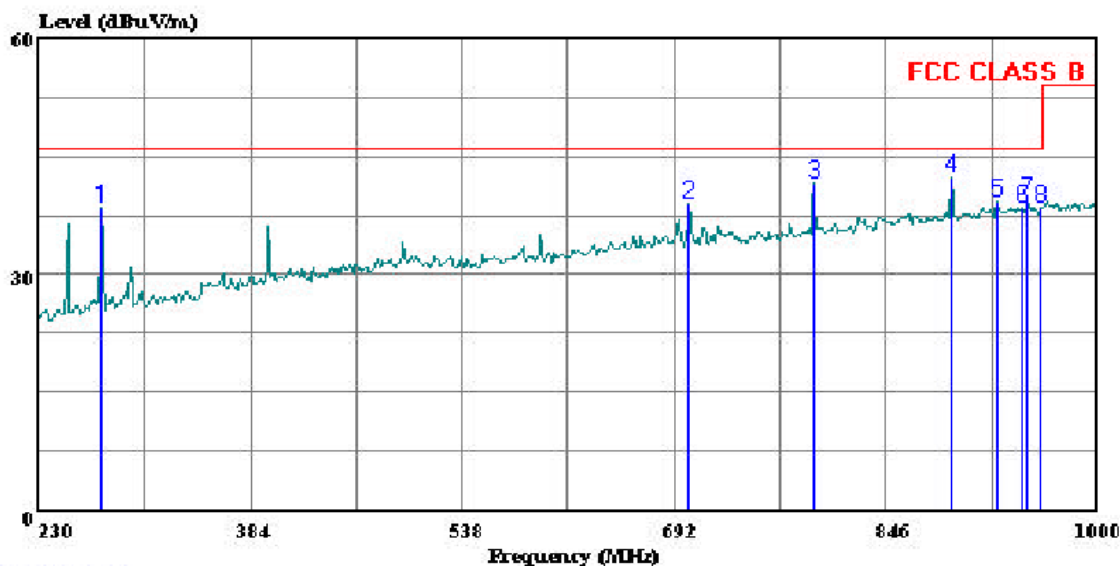

(Auxiliary ATC)

Trace: 15

Ref Trace:

Condition: FCC CLASS B_VERTICAL
Test Operator: : VIEN TRAN
Project #: : 04U2654-1
Company: : VIVATO
EUT: : 80211b 2.4GHz BRIDGE / ROUTER
Model No: : VIVATO WIFI BRIDGE / ROUTER
Configuration: : CONFIG #6: PANEL 15dBi &
: PANEL 8dBi/RS232/RJ45
Target of Test: : CISPR B
Mode of Operation: Tx WORST CASE
: 230-1000MHZ

VERTICAL DATA_230-1000MHz

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	275.430	Peak	23.21	15.29	38.50	46.00	-7.50
2	702.780	Peak	15.27	23.59	38.86	46.00	-7.14
3	793.640	Peak	16.57	24.90	41.47	46.00	-4.53
4	893.740	Peak	16.17	26.09	42.26	46.00	-3.75
5	926.080	Peak	12.59	26.75	39.34	46.00	-6.66
6	945.330	Peak	11.65	26.87	38.51	46.00	-7.49

8.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	47.60	--	18.40	0.00	66.00	56.00	-18.40	-37.60	L1
3.92	39.86	--	25.49	0.00	56.00	46.00	-16.14	-20.51	L1
14.75	43.80	--	36.00	0.00	60.00	50.00	-16.20	-14.00	L1
0.34	50.69	--	20.64	0.00	60.69	50.69	-10.00	-30.05	L2
0.81	44.04	--	29.91	0.00	56.00	46.00	-11.96	-16.09	L2
14.75	43.80	--	36.97	0.00	60.00	50.00	-16.20	-13.03	L2
6 Worst Data									

LINE 1 RESULTS

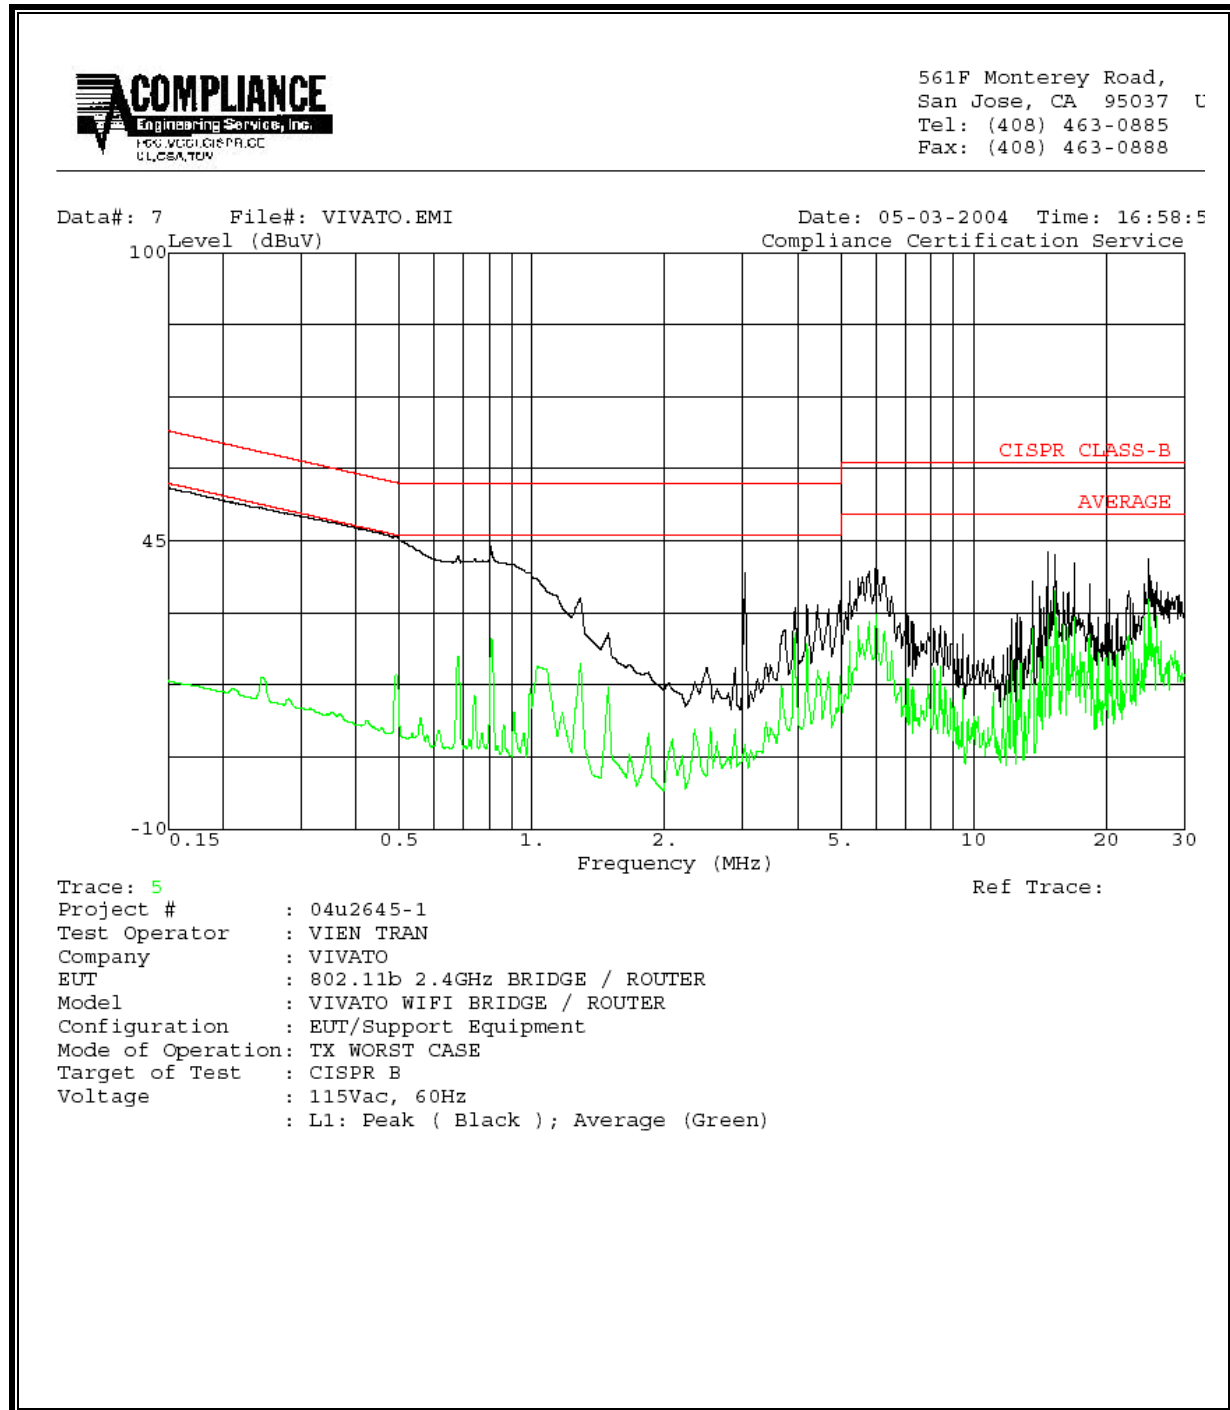

LINE 2 RESULTS

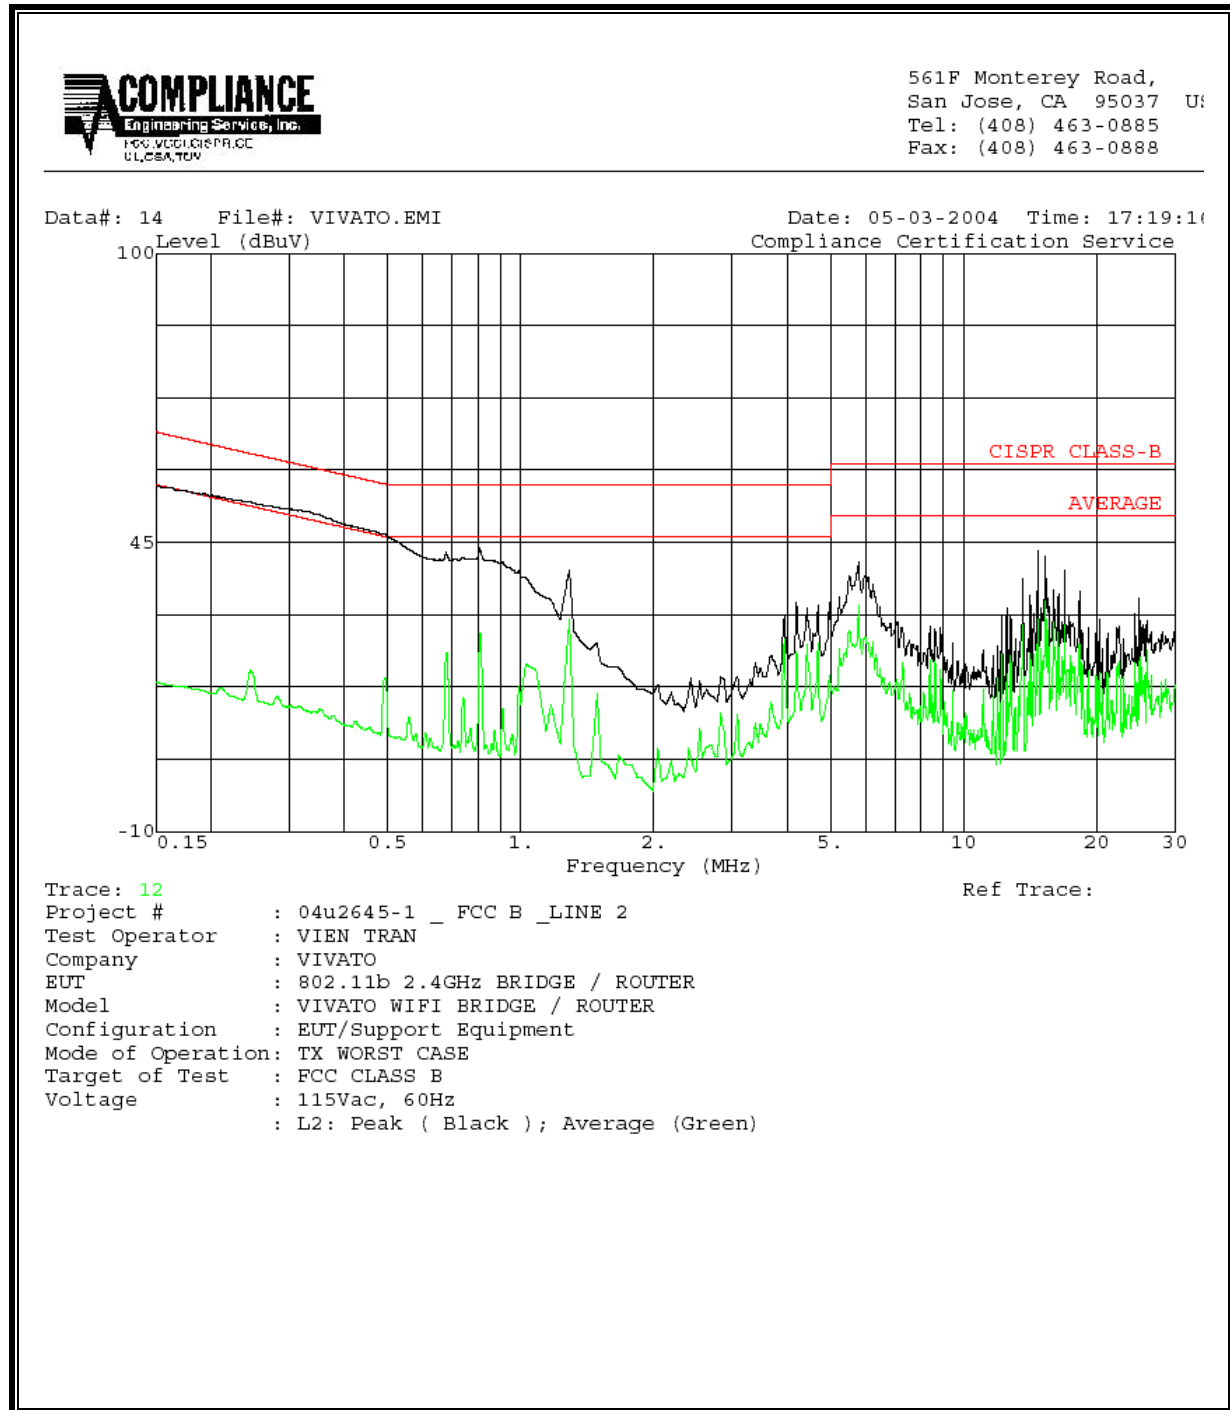

9. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP

CONFIG #1:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



CONFIG #2:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	MFB24011PTRPC	11	VERTICAL	YAGI	MYP24010PTRPC	10	HORIZONTAL
					MYP24010PTRPC	10	HORIZONTAL

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



CONFIG #3:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
PANEL	M24008XFTRPC	8	HORIZONTAL	OMNI	SPSHG60	8.5	HORIZONTAL

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



CONFIG #4:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	OMNI	MFB24011PTRPC	11	VERTICAL

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



CONFIG #5:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
OMNI	SPSHG60	8.5	HORIZONTAL	YAGI	MYP24010PTRPC	10	HORIZONTAL

RADIATED FRONT PHOTO



RADIATED BACK PHOTO



CONFIG #6:							
ANTENNA1	MODEL	GAIN 1 (dBi)	POLARIZATION	ANTENNA2	MODEL	GAIN 2 (dBi)	POLARIZATION
PANEL	M24008XFPTRPC	8	HORIZONTAL	PANEL	M24008XFPTRPC	8	HORIZONTAL


RADIATED BACK PHOTO



RADIATED FRONT PHOTO



DIGITAL DEVICE RADIATED EMISSIONS SETUP

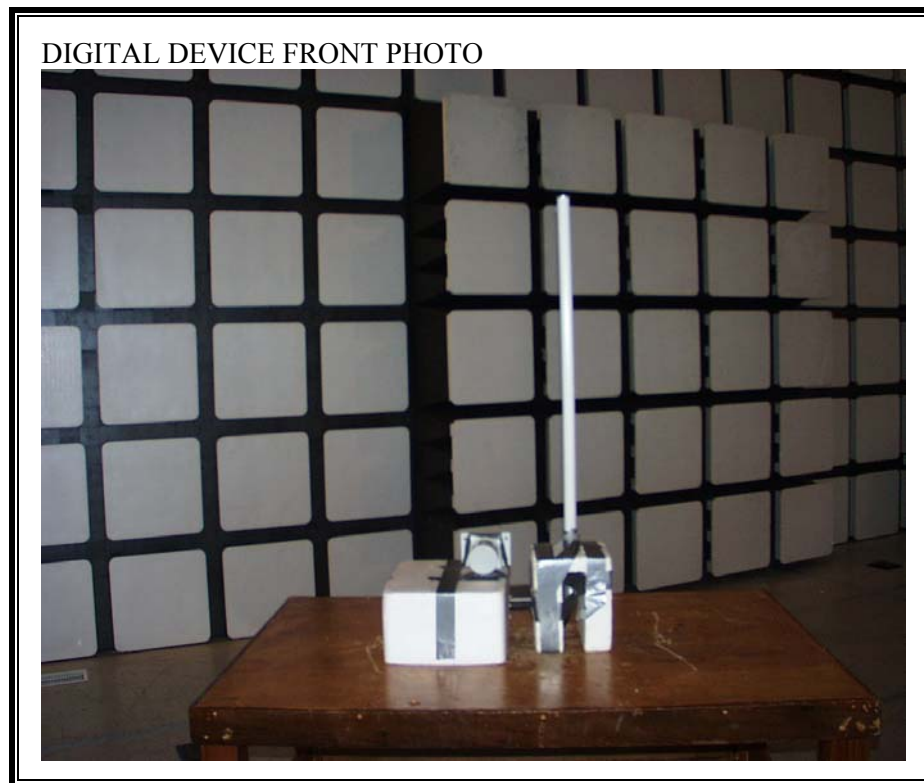

DIGITAL DEVICE BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT