

Annex 4: Measurement Diagrams to PARTIAL TEST REPORT No.: 3-0071-13-6-4a-C1

According to:
FCC Regulations
Part 15.109, Part15.247

IC-Regulations
RSS-Gen, Issue 3
RSS-210, Issue 8

for

Harman Becker Automotive Systems, Inc.

Automotive Infotainment Head Unit VP4 GT
(Bluetooth®)

FCC-ID: QNG-BE2810
IC: 6434C-BE2810

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 Reg. No.: 736496 MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 AUTHORIZED RF LABORATORY	 LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			

Table of contents

1. MEASUREMENT DIAGRAMS.....	3
1.1. 20dB bandwidth.....	3
1.2. 99% Occupied bandwidth.....	3
1.3. 20dBc conducted emissions.....	3
1.4. Maximum peak conducted power	3
1.5. Power spectral density	3
1.6. Conducted emissions on AC-mains	3
1.7. Radiated field strength (§15.109, Class B)	4
1.7.1. Radiated magnetic field strength measurements ($f < 30\text{MHz}$)	4
1.7.2. Radiated field strength ($30\text{MHz} < f < 1\text{GHz}$)	6
1.7.3. Radiated field strength in Tx Mode ($1\text{GHz} < f < 18\text{GHz}$)	9
1.7.4. Radiated field strength in receiving Mode ($1\text{GHz} < f < 16\text{GHz}$)	12
1.7.5. Band-edge compliance radiated (field strength in 3m distance)	13
1.7.6. Field strength of carrier (radiated in 3m distance)	15

1. Measurement diagrams

1.1. 20dB bandwidth

Not tested, see modular approval of the Bluetooth[®] module

1.2. 99% Occupied bandwidth

Not tested, see modular approval of the Bluetooth[®] module

1.3. 20dBc conducted emissions

Not tested, see modular approval of the Bluetooth[®] module

1.4. Maximum peak conducted power

Not tested, see modular approval of the Bluetooth[®] module

Below also some diagrams showing the maximum value for different modulation types:

1.5. Power spectral density

Not tested, see modular approval of the Bluetooth[®] module

1.6. Conducted emissions on AC-mains

Not applicable, car equipment powered by 12 V DC

1.7. Radiated field strength (§15.109, Class B)

1.7.1. Radiated magnetic field strength measurements (f<30MHz)

Diagram No. 2.01_BT_Ch0_DH5

Test description:	Magnetic Fieldstrength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	8.51.0
Distance correction:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Measured EUT sides:	front, right, left, rear
Operator:	dpa
Operating conditions:	Bluetooth Ch0 DH5
Comment 1:	-

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT
HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

FCC15.209_magn hor+vert

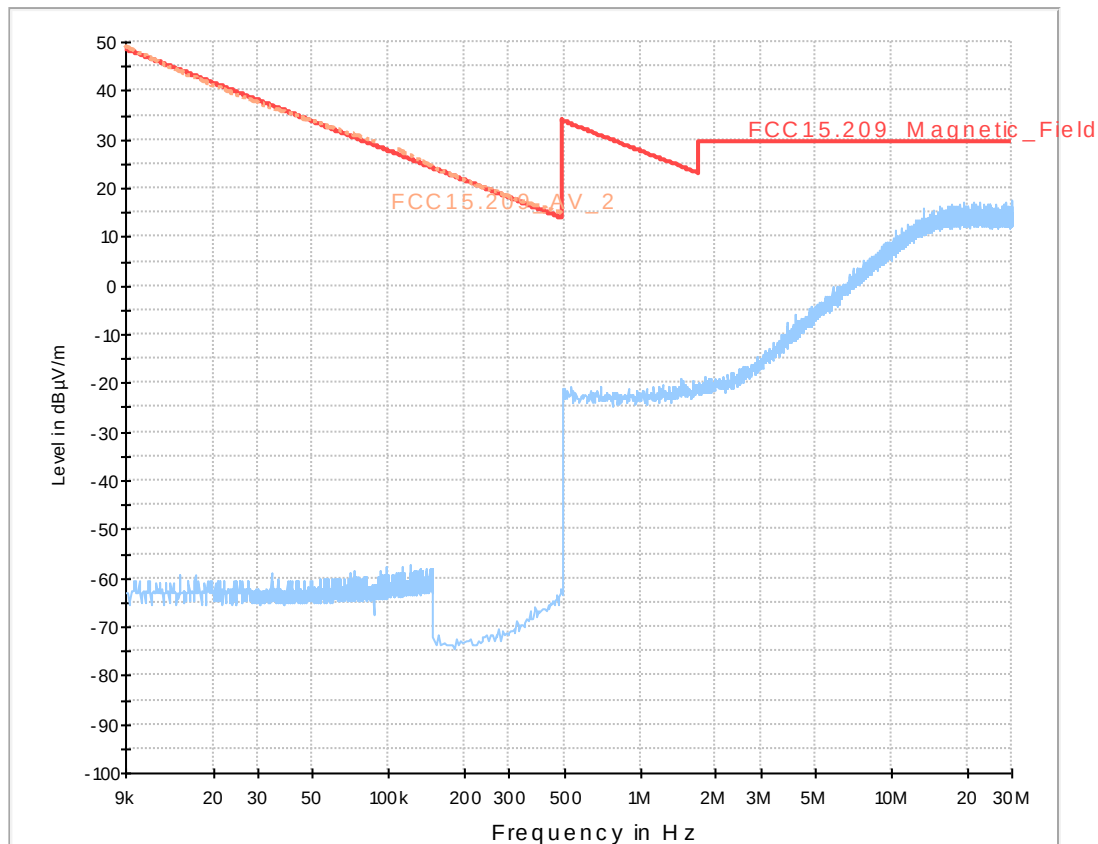


Diagram No. 2.02_BT_Ch78_3-DH5


Test description:	Magnetic Fieldstrength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	8.51.0
Distance correction:	used accord. table, pls. see test report
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Measured EUT sides:	front, right, left, rear
Operator:	dpa
Operating conditions:	Bluetooth TX-Mode Ch78; 3-DH5
Comment 1:	-

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT

HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

FCC15.209_magn hor+vert

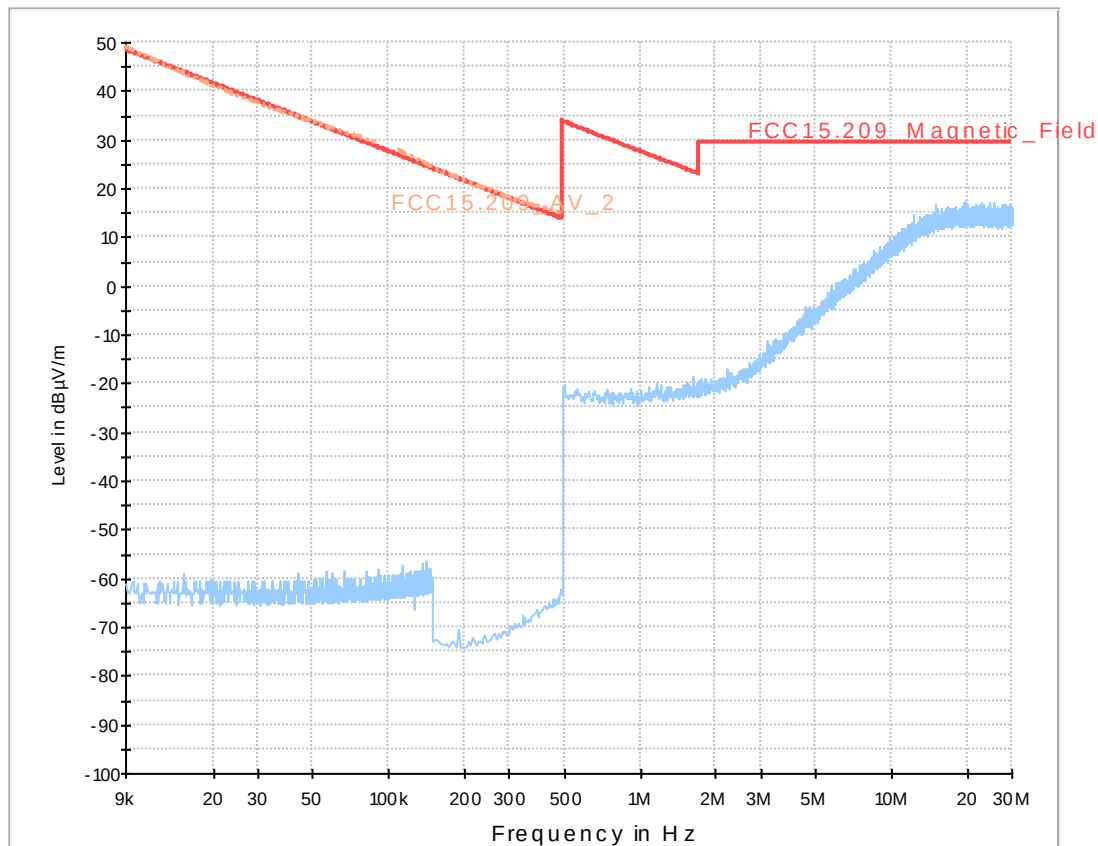

1.7.2. Radiated field strength (30MHz < f < 1GHz)

Diagram No. 3.01_BT_Ch0_DH5


Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V8.51.0
Distance correction:	not used
Used filter:	not used
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Measured EUT sides:	front, right, left, rear
Operator:	Dpa
Operating conditions:	Bluetooth TX-Mode, DH5, Channel 0
Comment 1:	--

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT

HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

01_FCC15.209_hor+vert_KP0

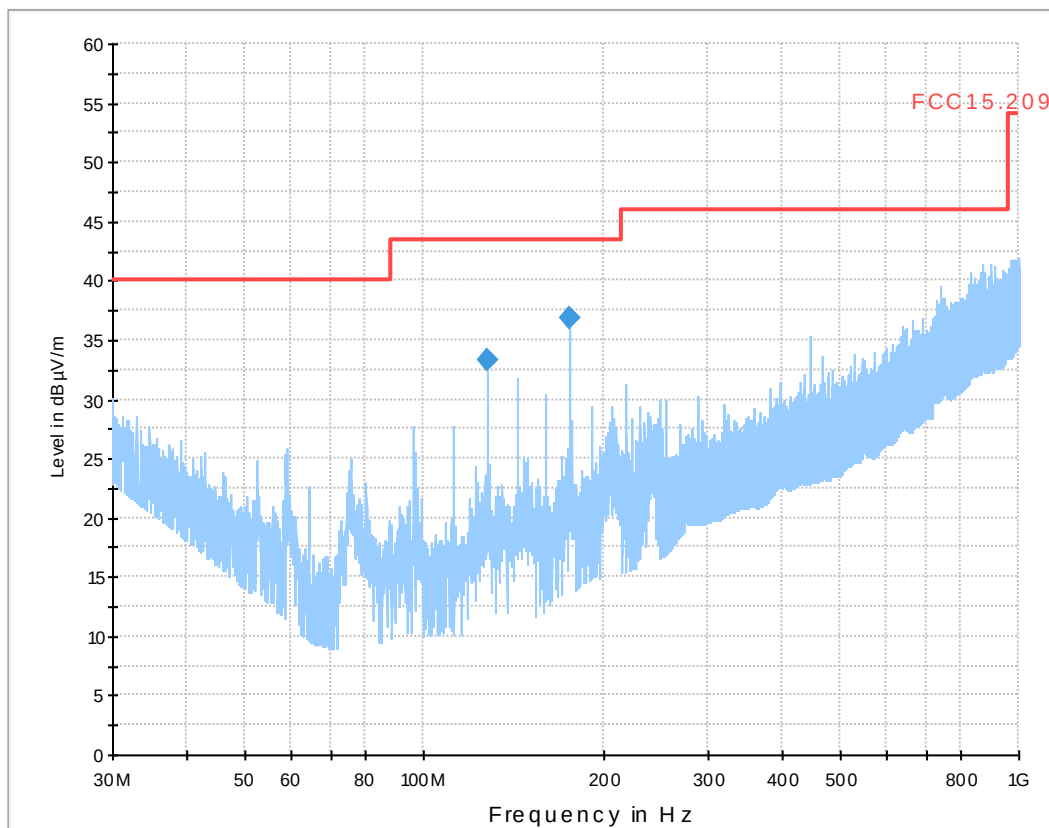

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Correction (dB)	Marginal (dB)	Limit (dBµV/m)
128.000000	33.2	1000.0	120.000	105.0	V	155.0	9.0	10.30	43.50
176.000000	36.8	1000.0	120.000	186.0	H	154.0	10.9	6.70	43.50

Diagram No. 3.02_BT_Ch39_2-DH5

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V8.51.0
 Distance correction: not used
 Used filter: not used
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Measured EUT sides: front, right, left, rear

Operator: Dpa
 Operating conditions: Bluetooth TX-Mode, 2-DH5, Channel 39
 Comment 1: --

EUT Information

Manufacturer: Harman Becker Automotive Systems
 EUT: VP4 GT

 HW version: F149M 6163USA
 SW version: tbd
 Config: --
 Serial number: SN-2
 Connected Interfaces: Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
 Power Supply: 12V DC
 Comments: --

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
176.010000	37.2	1000.0	120.000	190.0	H	166.0	10.9	6.30	43.50
843.520000	29.8	1000.0	120.000	199.0	H	267.0	26.0	16.20	46.00

01_FCC15.209_hor+vert_KP0

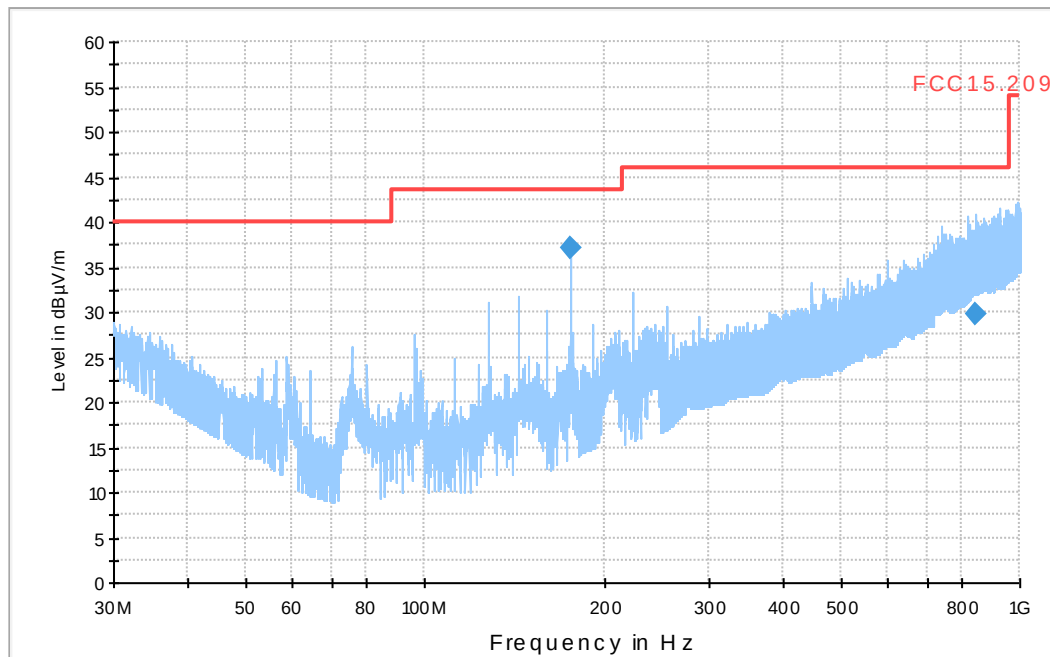


Diagram No. 3.03_BT_Ch78_3-DH5

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V8.51.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Measured EUT sides: front, right, left, rear
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: Dpa
 Operating conditions: Bluetooth TX-Mode, 3-DH5, Channel 78
 Comment 1: --

EUT Information


Manufacturer: Harman Becker Automotive Systems
 EUT: VP4 GT

 HW version: F149M 6163USA
 SW version: tbd
 Config: --
 Serial number: SN-2
 Connected Interfaces: Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
 Power Supply: 12V DC
 Comments: --

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
175.990000	36.2	1000.0	120.000	208.0	H	161.0	10.9	7.30	43.50

01_FCC15.209_hor+vert_KP0

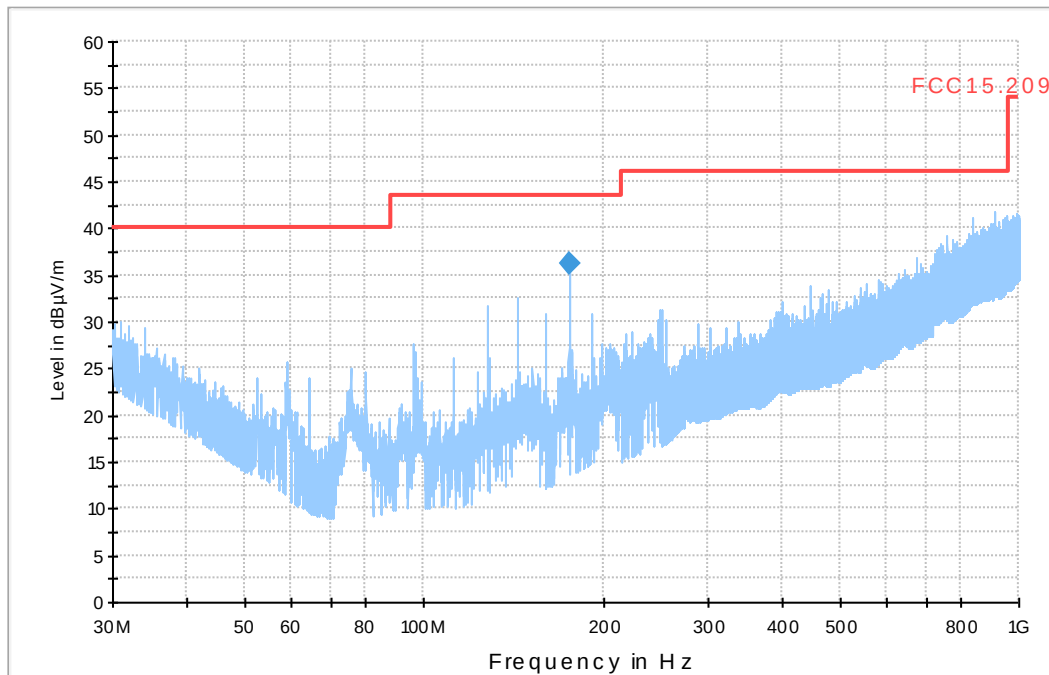

1.7.3. Radiated field strength in Tx Mode (1GHz < f < 18GHz)

Diagram No.: 4.01_ BT_DH5_Ch0_DH5

Common Information


Test Description:	Radiated field strength emission accord. §15.247 in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	§15.205 & §15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operator Name:	cta
Comment:	Bluetooth TX-Mode, DH5, Channel 0
Op. Mode:	Bluetooth

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT

HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

00431_SM1_KP1_BT_1.5ms

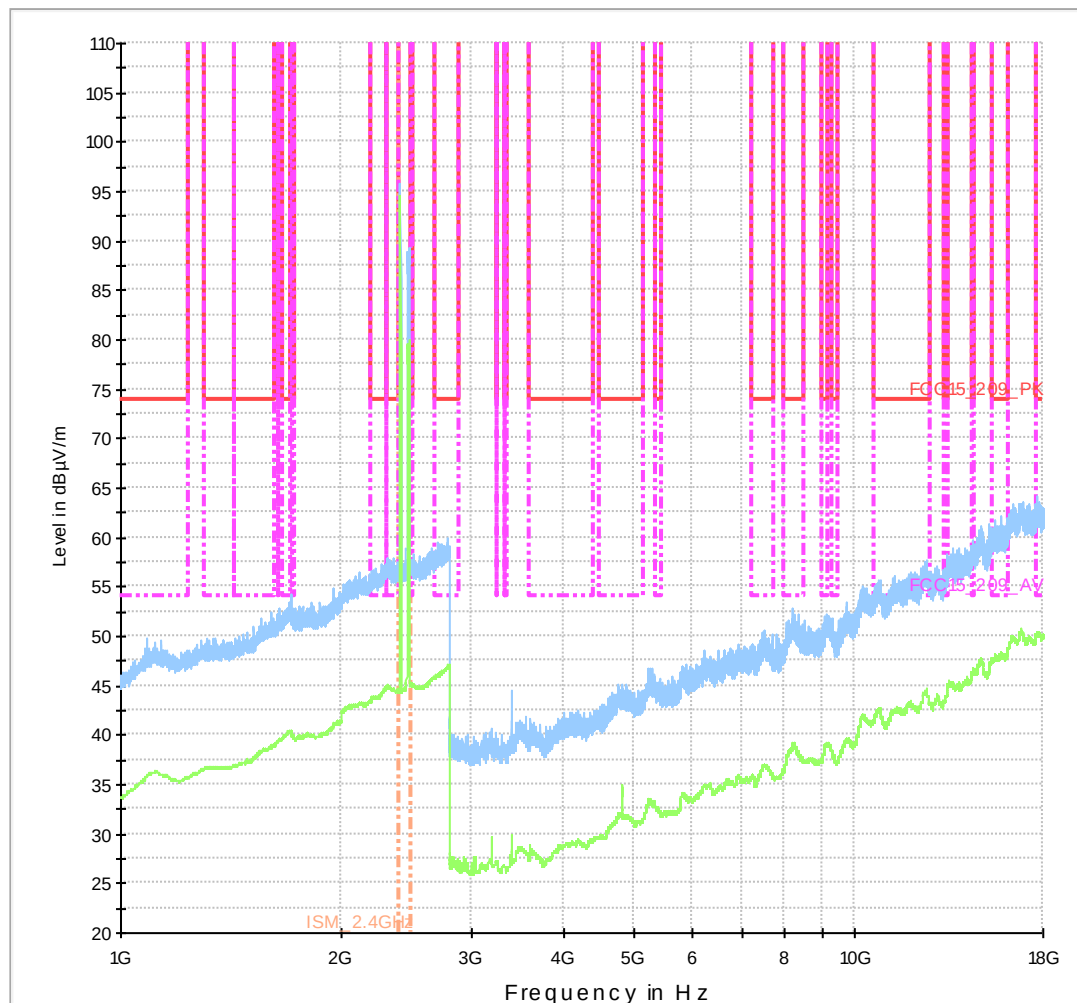

EMI Auto Test Template: 00431_SM1_KP1_BT_1.5ms

Diagram No.: 4.02_BT_Ch39_2-DH5


Common Information

Test Description:	Radiated field strength emission accord. §15.247 in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	§15.205 & §15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operator Name:	кта
Op. Mode:	Bluetooth TX-Mode, 2-DH5, Channel 39

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT
HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

00431_SM1_KP1_BT_1.5ms

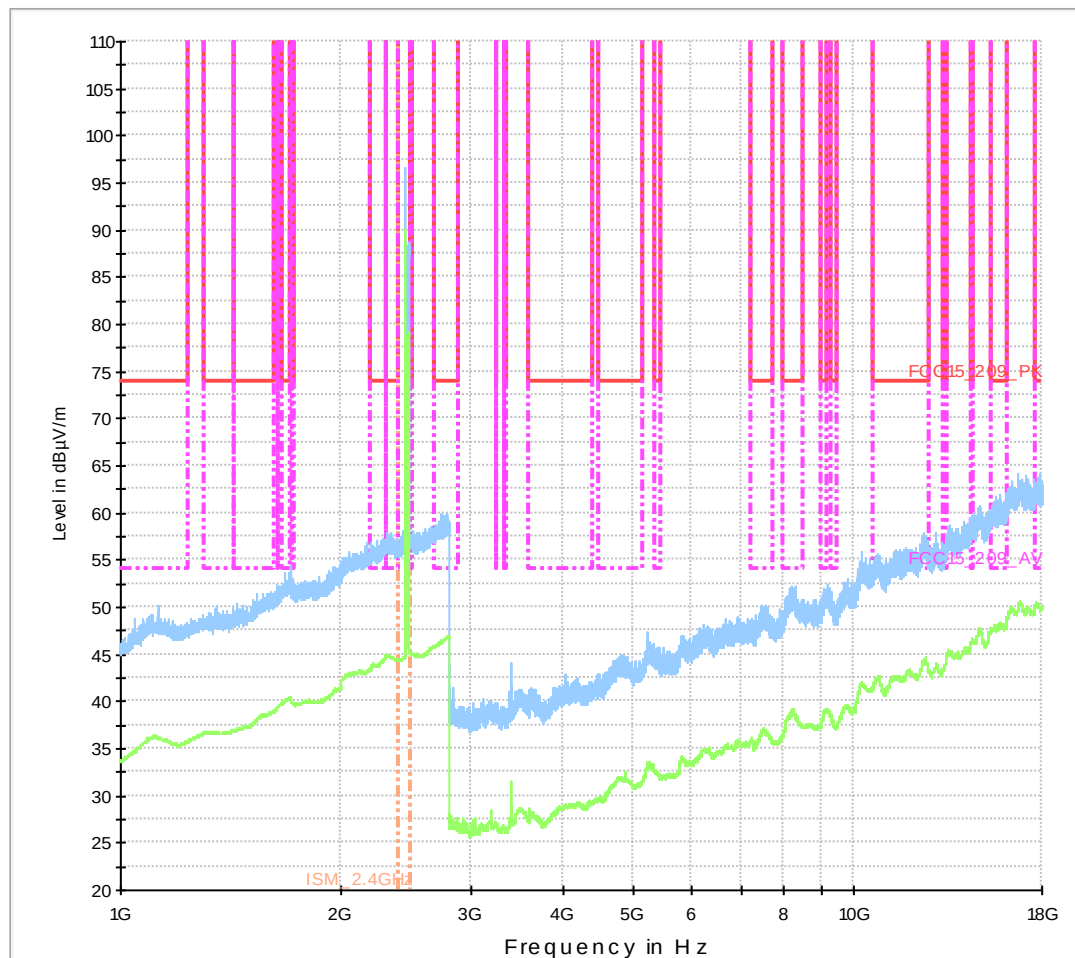

EMI Auto Test Template: 00431_SM1_KP1_BT_1.5ms

Diagram No.: 4.03_BT_Ch78_3-DH5


Common Information

Test Description:	Radiated field strength emission accord. §15.247 in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	§15.205 & §15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operator Name:	Lor
Op. Mode:	Bluetooth TX-Mode, 3-DH5, Channel 78

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT
HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

00431_SM1_KP1_BT_1.5ms

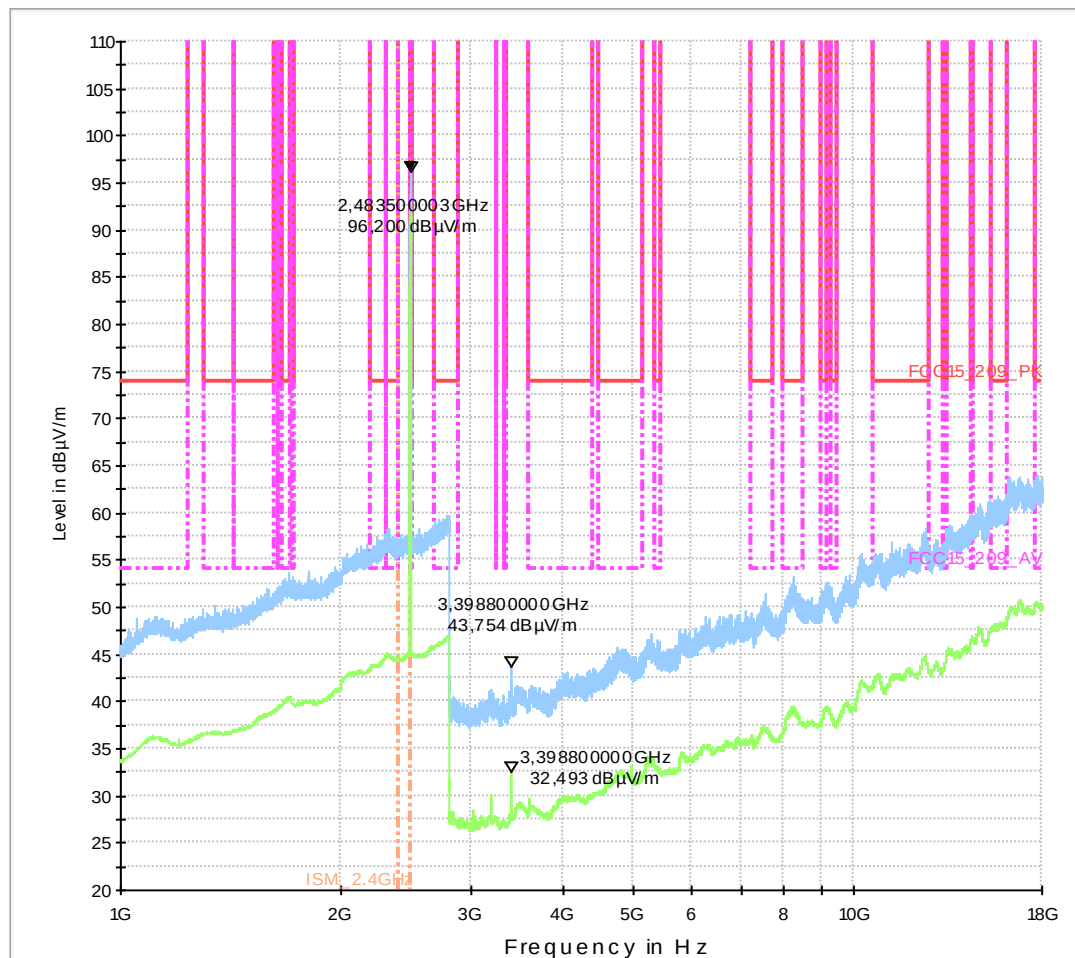

EMI Auto Test Template: 00431_SM1_KP1_BT_1.5ms

1.7.4. Radiated field strength in receiving Mode (1GHz < f < 16GHz)

4.04 BT Rx-Mode, Ch39

Common Information


Test Description:	Radiated Filed Strength Emission
Test Site Location:	CETECOM GmbH Essen
Test Site:	Fully Anechoic Room (FAR)
Test Standard:	FCC Part 15.109
Section	15.109
Operating Mode:	BT Rx-Mode, Ch39
Equipment Class:	Class B
Environmental Conditions:	Humidity: 29%rH; Temperature: 24°C
Operator:	Dpa

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT

HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

030442_FCC_Part15.109_Unint_Rad_Class_B_1G-20G_ESU40

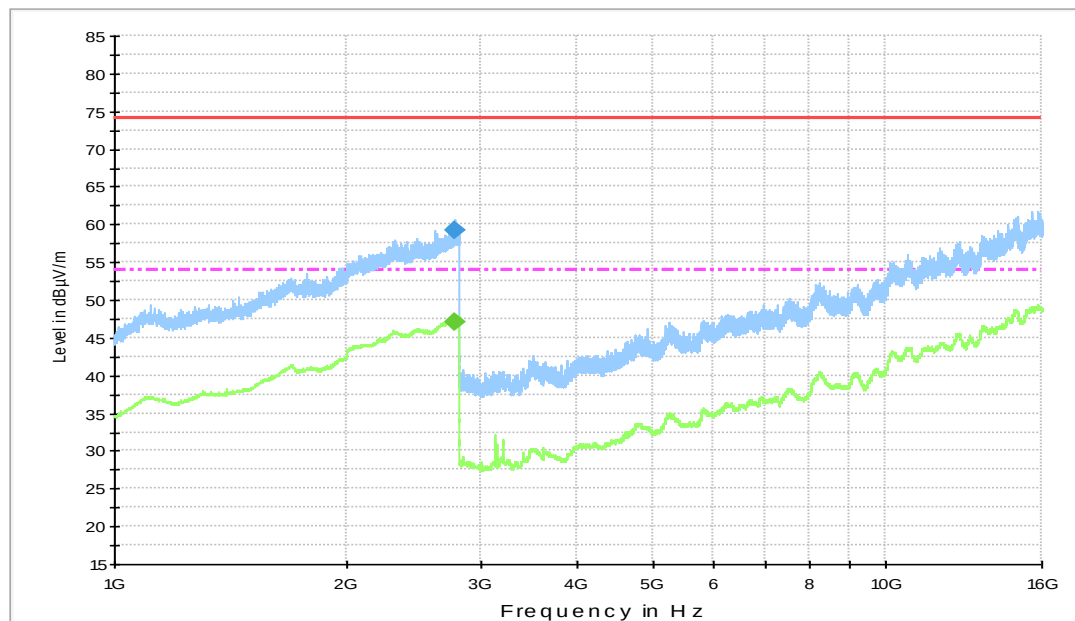

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2772.200000	59.1	100.0	1000.000	V	14.0	90.0	37.8	14.9	74.0

Final Result 2

Frequency (MHz)	RMS (dBµV/m)	Meas. Time	Bandwidth (kHz)	Polarization	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2772.200000	47.1	100.0	1000.000	V	14.0	90.0	37.8	6.9	54.0

1.7.5. Band-edge compliance radiated (field strength in 3m distance)

1.7.5.1 Channel low, DH5 packet type

Diagram No.: 9.01_ BT_DH5_Ch0_DH5


Common Information

Test Description:	Radiated Band-Edge Low-Channel, §15.247 in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	§15.205 & §15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operator Name:	Lor
Comment:	Channel no.0 low, DH5
Op. Mode:	Bluetooth

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT
HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

00431_BE_Low_SM1_KP1_BT_2ms

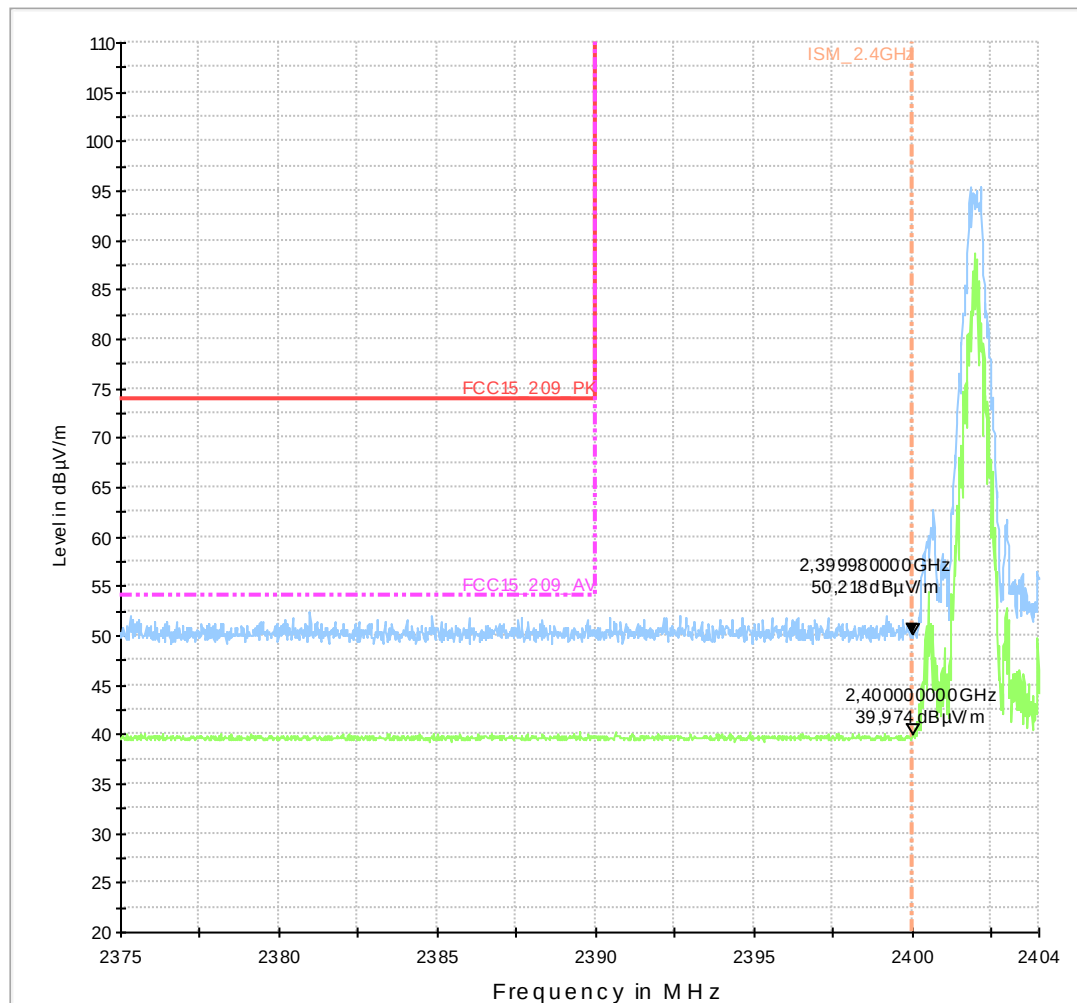

1.7.5.3 Channel High, 3DH5 packet type

Diagram No.: 9.03_BT_Ch78_3-DH5


Common Information

Test Description:	Radiated Band-Edge High-Channel, §15.247 in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	§15.205 & §15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operator Name:	Lor
Comment:	Channel no.78 high, DH5
Op. Mode:	Bluetooth

EUT Information

Manufacturer:	Harman Becker Automotive Systems
EUT:	VP4 GT
HW version:	F149M 6163USA
SW version:	tbd
Config:	--
Serial number:	SN-2
Connected Interfaces:	Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
Power Supply:	12V DC
Comments:	--

00431_BE_High_SM1_KP1_BT_2ms

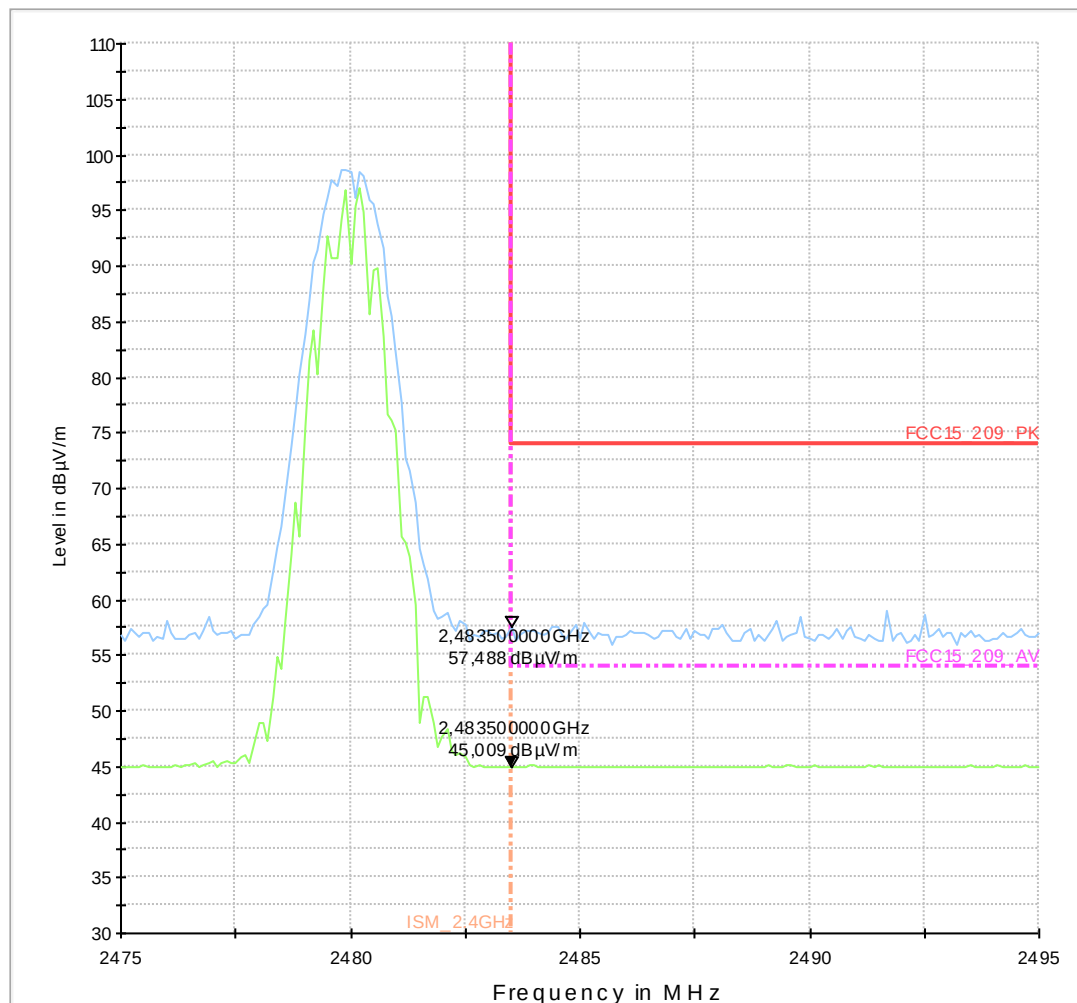

1.7.6. Field strength of carrier (radiated in 3m distance)

7.07_BT_Ch0_DH5

Common Information

Test Description: Radiated field strength emission accord. §15.247 in 3m distance
 Test Site: CETECOM GmbH Essen
 Test Standard: §15.205 & §15.209 Intentional Radiator
 Antenna polarisation: horizontal/vertical


Operator Name: GAR
 Comment: CH0, DH5
 Op. Mode: Bluetooth

EUT Information

Manufacturer: Harman Becker Automotive Systems
 EUT: VP4 GT

HW version: F149M 6163USA
 SW version: tbd
 Config: --
 Serial number: SN-1
 Connected Interfaces: Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
 Power Supply: 12V DC
 Comments: --

Carrier_measurement_SM1_PA0_KP1_BT

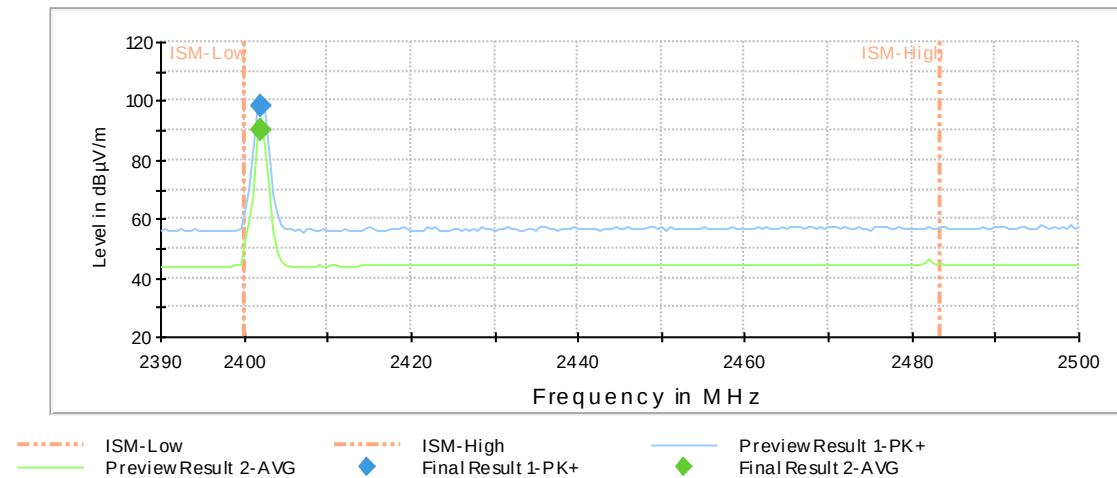

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Comment
2402.000000	98.5	100.0	1000.000	155.0	V	94.0	90.0	35.5	

Final Result 2

Frequency (MHz)	Average (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Corr. (dB)	Comment
2402.000000	90.4	100.0	1000.000	155.0	V	91.0	90.0	35.5	

7.08_BT_Ch39_2-DH5


Common Information

Test Description: Radiated field strength emission accord. §15.247 in 3m distance
 Test Site: CETECOM GmbH Essen
 Test Standard: §15.205 & §15.209 Intentional Radiator
 Antenna polarisation: horizontal/vertical
 Operator Name: GAR
 Comment: CH39, 2-DH5
 Op. Mode: Bluetooth

EUT Information

Manufacturer: Harman Becker Automotive Systems
 EUT: VP4 GT
 HW version: F149M 6163USA
 SW version: tbd
 Config: --
 Serial number: SN-1
 Connected Interfaces: Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
 Power Supply: 12V DC
 Comments: --

Carrier_measurement_SM1_PA0_KP1_BT

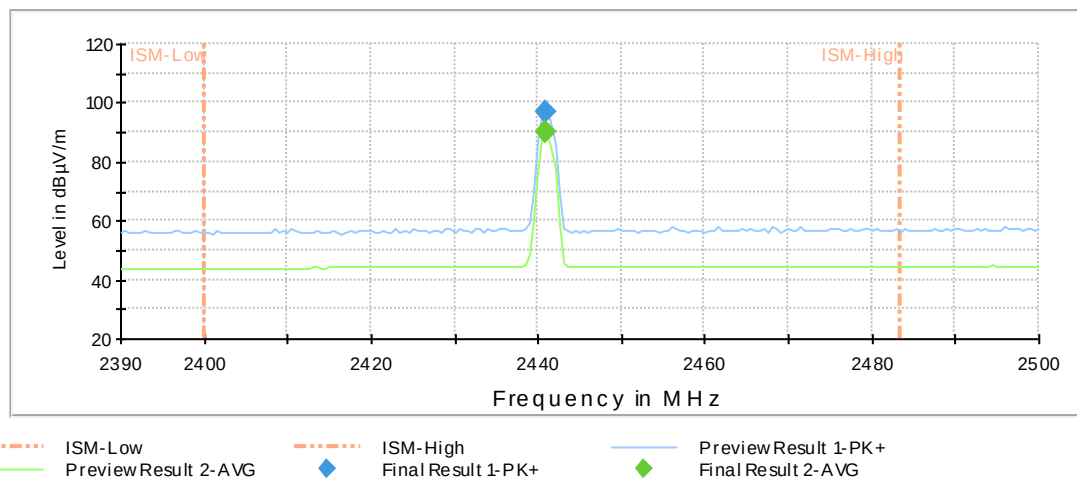

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Correction (dB)	Comment
2441.000000	97.1	100.0	1000.000	155.0	V	91.0	90.0	35.6	

Final Result 2

Frequency (MHz)	Average (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Correction (dB)	Comment
2441.000000	90.1	100.0	1000.000	155.0	V	91.0	90.0	35.6	

7.09_BT_Ch78_3-DH5


Common Information

Test Description: Radiated field strength emission accord. §15.247 in 3m distance
 Test Site: CETECOM GmbH Essen
 Test Standard: §15.205 & §15.209 Intentional Radiator
 Antenna polarisation: horizontal/vertical
 Operator Name: GAR
 Comment: CH78, 3-DH5
 Op. Mode: Bluetooth

EUT Information

Manufacturer: Harman Becker Automotive Systems
 EUT: VP4 GT
 HW version: F149M 6163USA
 SW version: tbd
 Config: --
 Serial number: SN-1
 Connected Interfaces: Main Wiring Harness, CAN Gateway Harness, Always On Module, Bluetooth Antenna, WLAN Antenna
 Power Supply: 12V DC
 Comments: --

Carrier_measurement_SM1_PA0_KP1_BT

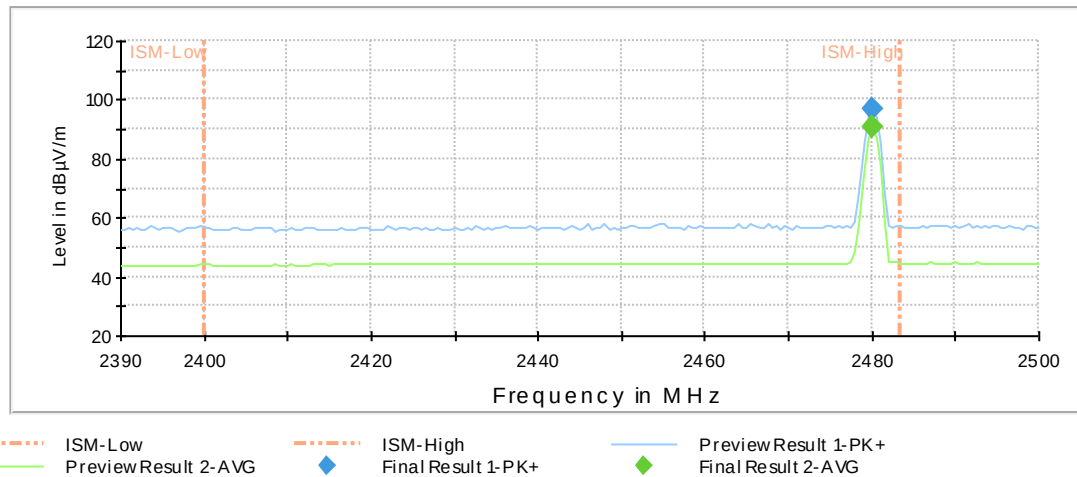

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Correction (dB)	Comment
2480.000000	96.9	100.0	1000.000	155.0	V	94.0	90.0	35.7	

Final Result 2

Frequency (MHz)	Average (dBµV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Elevation (deg)	Correction (dB)	Comment
2480.000000	91.0	100.0	1000.000	155.0	V	167.0	90.0	35.7	