




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 105 / 345
Rev.: 00


802.11ax 40MHz Chain0 5795MHz

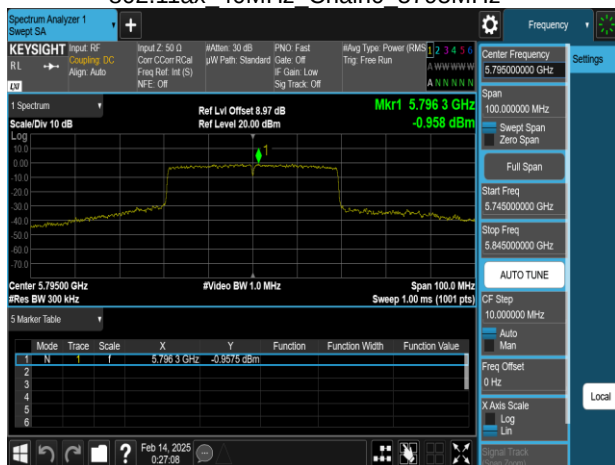

802.11ax 40MHz Chain1 5270MHz




802.11ax 40MHz Chain1 5190MHz

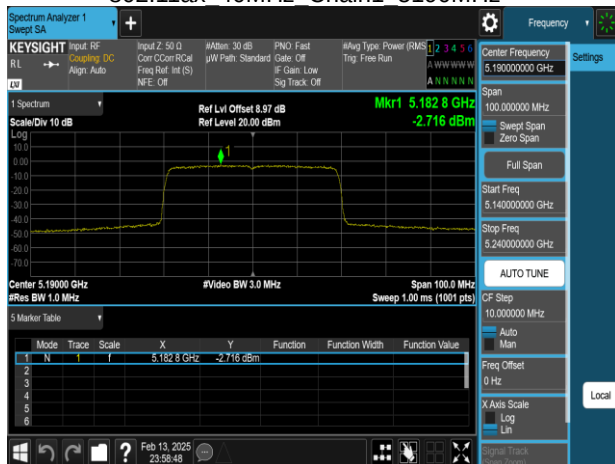

802.11ax 40MHz Chain1 5310MHz



802.11ax 40MHz Chain1 5230MHz

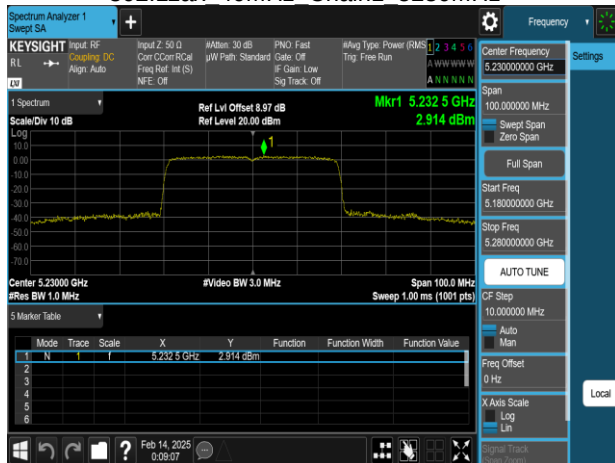

802.11ax 40MHz Chain1 5510MHz






Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 106 / 345
Rev.: 00


802.11ax 40MHz Chain1 5550MHz

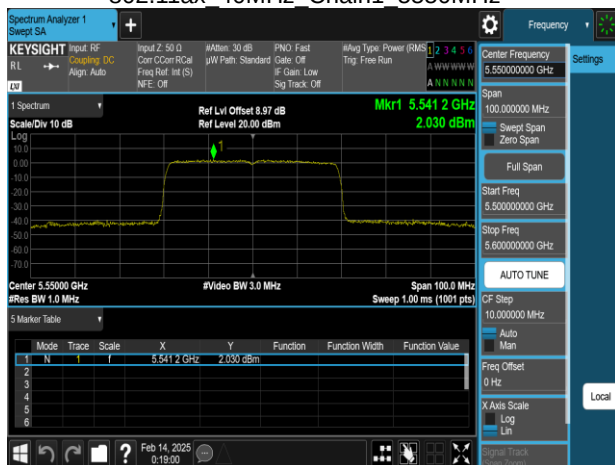

802.11ax 40MHz Chain1 5795MHz



802.11ax 40MHz Chain1 5670MHz

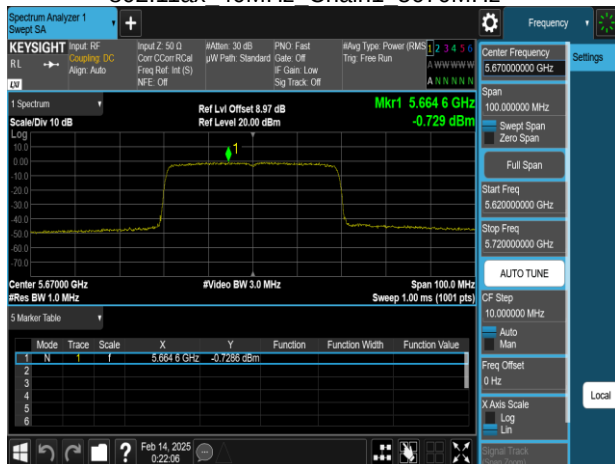

802.11ax 80MHz Chain0 5210MHz



802.11ax 40MHz Chain1 5755MHz



802.11ax 80MHz Chain0 5290MHz



802.11ax 80MHz Chain0 5530MHz




802.11ax 80MHz Chain1 5210MHz



802.11ax 80MHz Chain0 5610MHz



802.11ax 80MHz Chain1 5290MHz

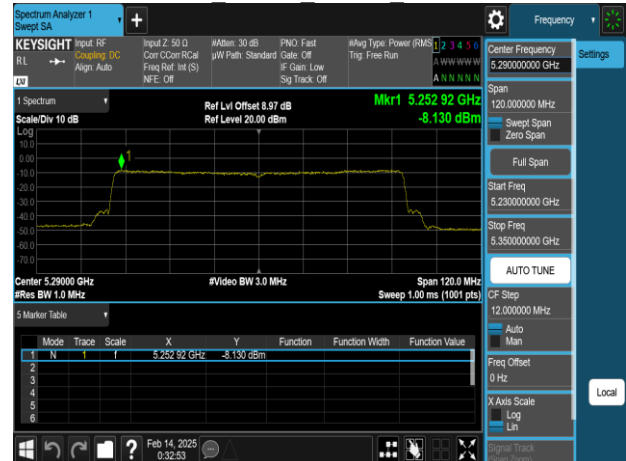

802.11ax 80MHz Chain0 5775MHz



802.11ax 80MHz Chain1 5530MHz





Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 108 / 345
Rev.: 00

802.11ax 80MHz Chain1 5610MHz



802.11ax 80MHz Chain1 5775MHz





Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 109 / 345
Rev.: 00

4.5 RADIATION Bandedge and Spurious Emission

4.5.1 Test Limit

FCC according to §15.407, §15.209 and §15.205,

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

UNII-1 :

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

UNII-2a and 2c :

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

UNII-3:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 110 / 345
Rev.: 00

4.5.2 Test Procedure

Test method Refer as KDB 789033 D02.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 40GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq 98\%$, VBW=10Hz.

·If Duty Cycle $< 98\%$, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.5.3 Test Setup


9kHz ~ 30MHz

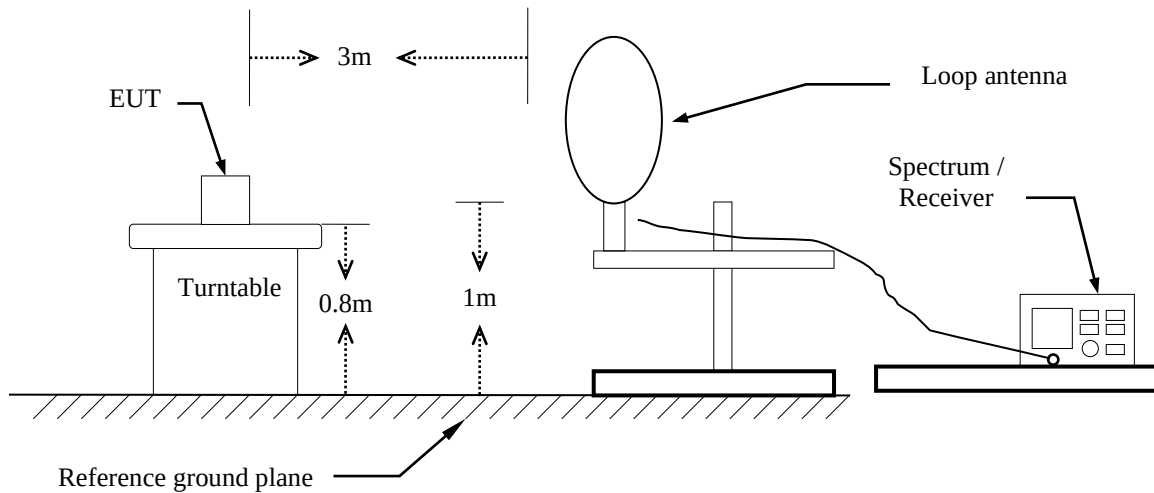

30MHz ~ 1GHz

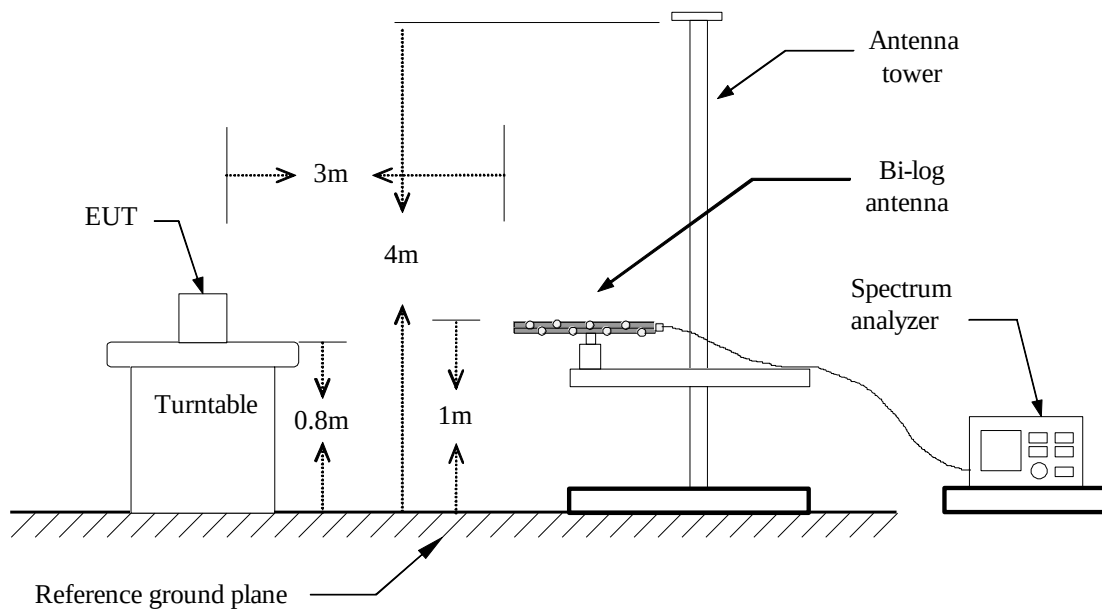

Above 1 GHz

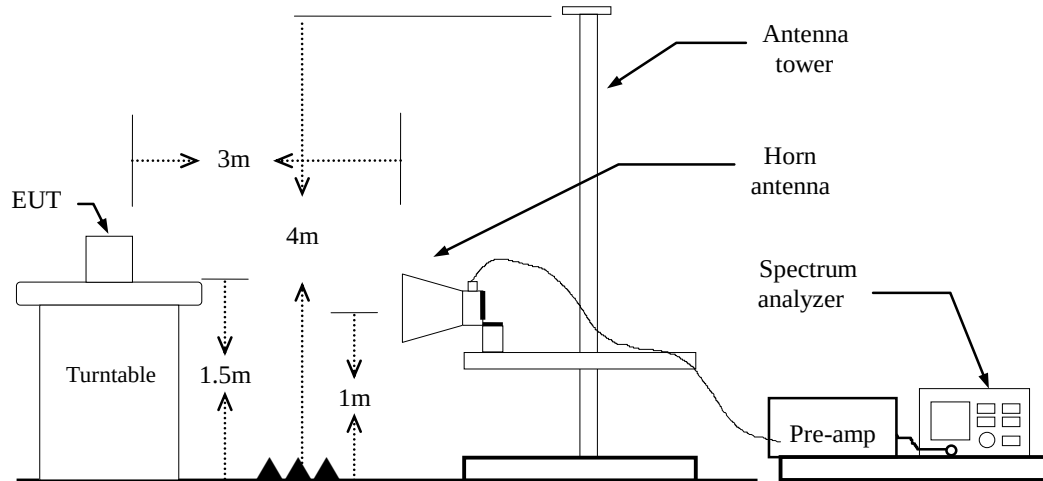



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 113 / 345
Rev.: 00


4.5.4 Test Result

Test Data

Band Edge

Project No : TM-2412000356P
Operation Band : 802.11a_Band1_CH0
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

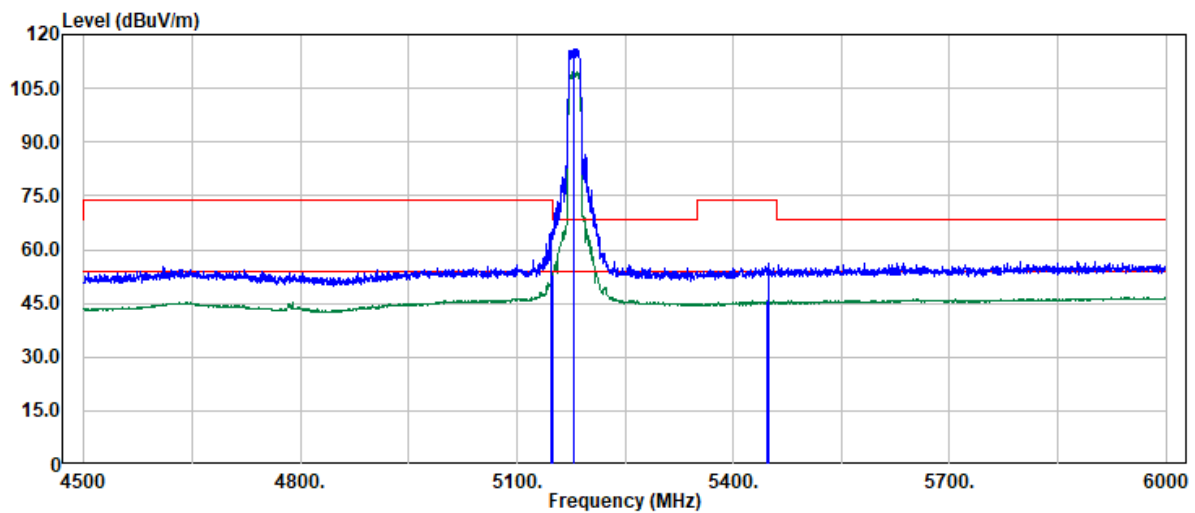

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5148.28	51.01	13.70	64.71	74.00	-9.29	Peak
5149.28	39.24	13.70	52.94	54.00	-1.06	Average
5180.00	102.19	13.81	116.00	--	--	Peak
5180.00	95.61	13.81	109.42	--	--	Average
5446.69	31.15	14.46	45.61	54.00	-8.39	Average
5450.18	41.81	14.48	56.29	74.00	-17.71	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 114 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band1_CH0
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

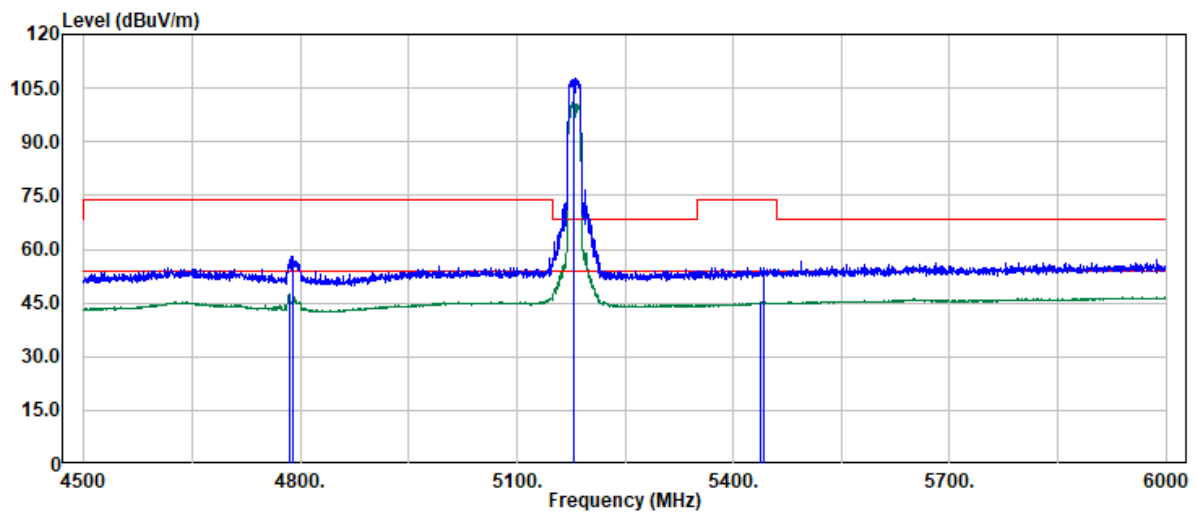


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4785.41	35.54	11.91	47.45	54.00	-6.55	Average
4788.90	46.07	11.88	57.95	74.00	-16.05	Peak
5180.00	93.90	13.81	107.71	--	--	Peak
5180.00	87.08	13.81	100.89	--	--	Average
5437.69	30.75	14.41	45.16	54.00	-8.84	Average
5443.19	40.36	14.44	54.80	74.00	-19.20	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 115 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.3/59
Frequency	: 5180 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

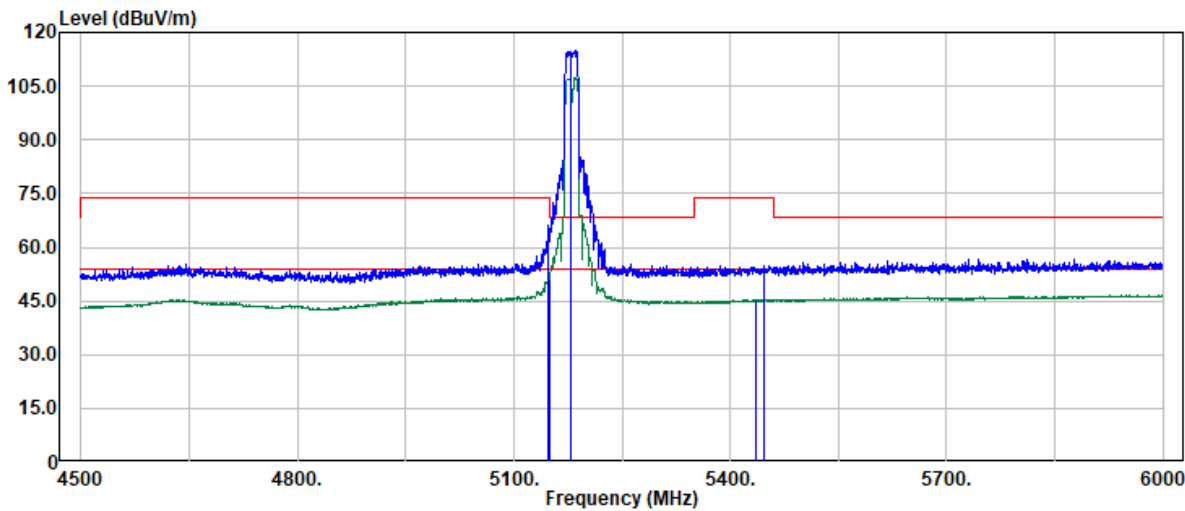

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5148.28	52.43	13.70	66.13	74.00	-7.87	Peak
5149.28	37.65	13.70	51.35	54.00	-2.65	Average
5180.00	101.12	13.81	114.93	--	--	Peak
5180.00	93.63	13.81	107.44	--	--	Average
5435.69	30.97	14.39	45.36	54.00	-8.64	Average
5447.18	40.38	14.46	54.84	74.00	-19.16	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 116 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band1
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 19

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

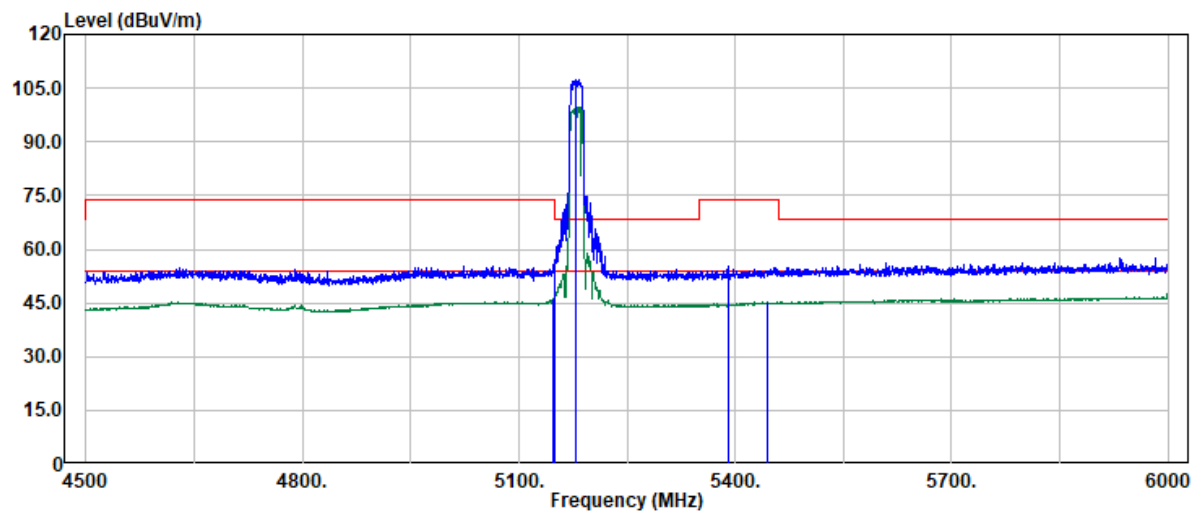

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5148.28	32.30	13.70	46.00	54.00	-8.00	Average
5148.78	42.85	13.70	56.55	74.00	-17.45	Peak
5180.00	93.36	13.81	107.17	--	--	Peak
5180.00	85.76	13.81	99.57	--	--	Average
5389.70	41.06	14.21	55.27	74.00	-18.73	Peak
5444.19	30.73	14.45	45.18	54.00	-8.82	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 117 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 16.5

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

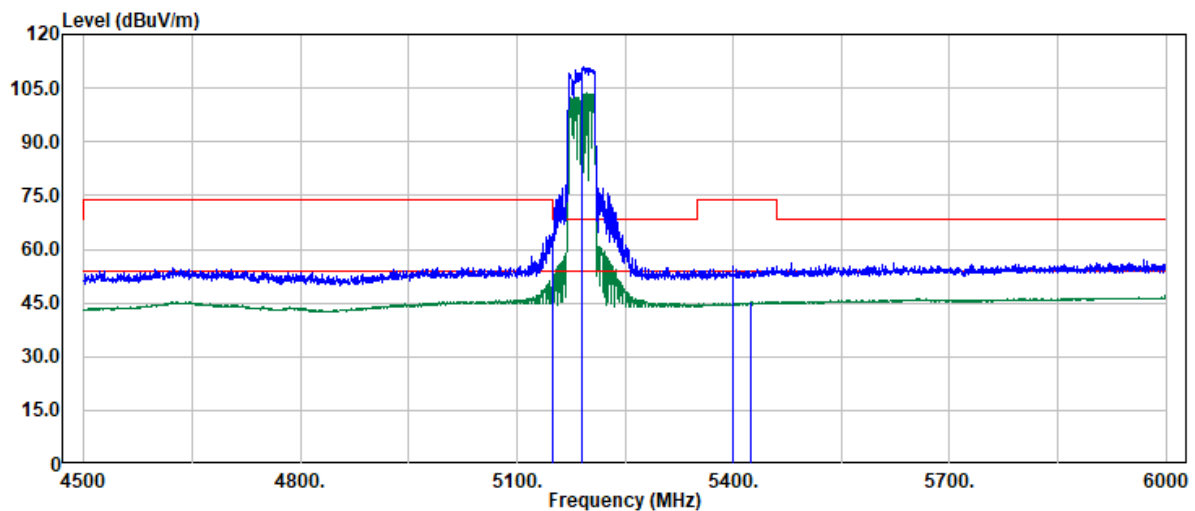


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5149.78	50.49	13.70	64.19	74.00	-9.81	Peak
5149.78	38.44	13.70	52.14	54.00	-1.86	Average
5190.00	97.00	13.84	110.84	--	--	Peak
5190.00	89.82	13.84	103.66	--	--	Average
5400.20	41.20	14.22	55.42	74.00	-18.58	Peak
5423.69	30.96	14.33	45.29	54.00	-8.71	Average

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 118 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 16.5

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

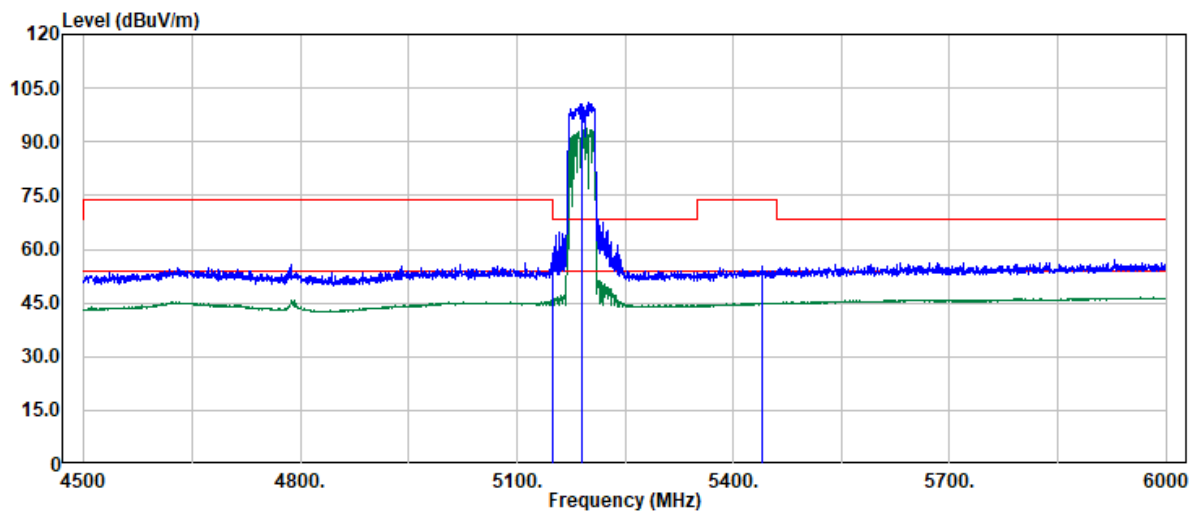

Trace: 1

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5149.28	45.23	13.70	58.93	74.00	-15.07	Peak
5149.78	32.30	13.70	46.00	54.00	-8.00	Average
5190.00	86.94	13.84	100.78	--	--	Peak
5190.00	79.90	13.84	93.74	--	--	Average
5440.69	40.74	14.42	55.16	74.00	-18.84	Peak
5441.19	30.62	14.42	45.04	54.00	-8.96	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 119 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band1
Frequency : 5210 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

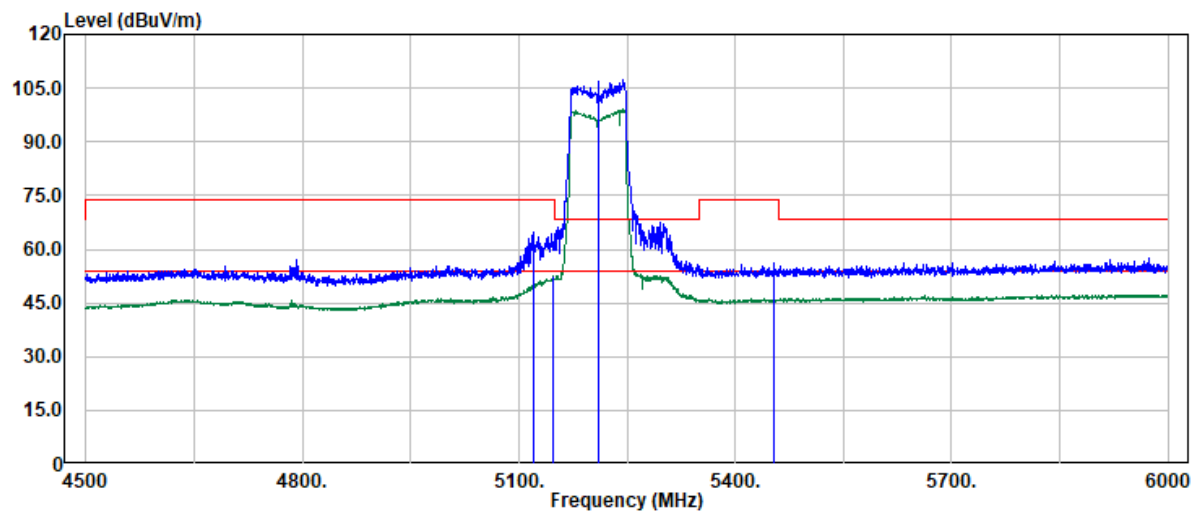


Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5120.29	51.10	13.70	64.80	74.00	-9.20	Peak
5147.28	38.67	13.70	52.37	54.00	-1.63	Average
5210.00	93.33	13.87	107.20	--	--	Peak
5210.00	85.09	13.87	98.96	--	--	Average
5453.68	41.50	14.48	55.98	74.00	-18.02	Peak
5453.68	31.61	14.48	46.09	54.00	-7.91	Average

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 120 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band1
Frequency : 5210 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

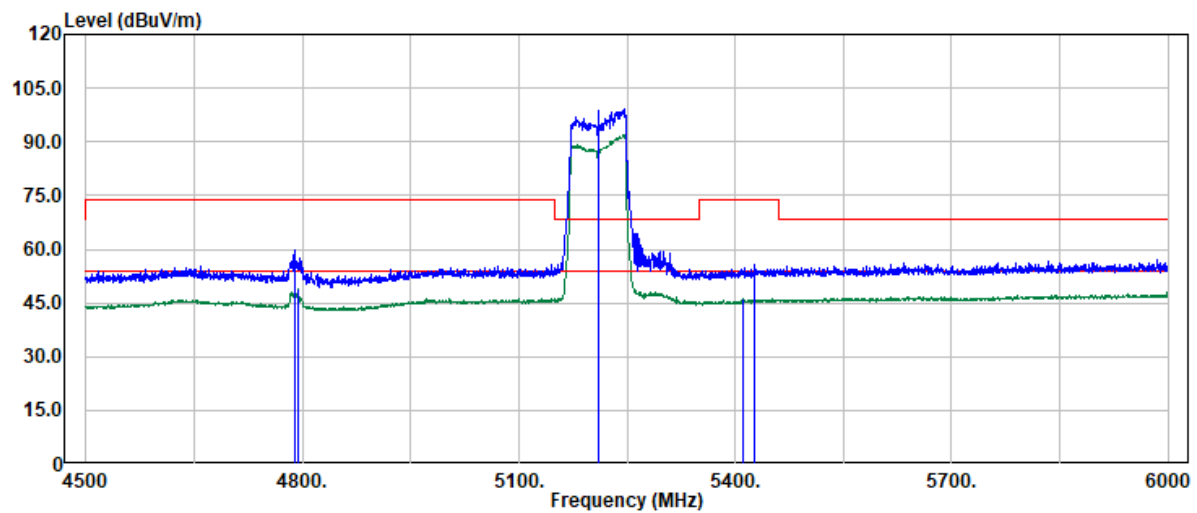

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4789.90	47.73	11.87	59.60	74.00	-14.40	Peak
4793.90	36.91	11.85	48.76	54.00	-5.24	Average
5210.00	85.48	13.87	99.35	--	--	Peak
5210.00	77.95	13.87	91.82	--	--	Average
5411.70	31.74	14.28	46.02	54.00	-7.98	Average
5427.19	41.16	14.36	55.52	74.00	-18.48	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 121 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band1
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

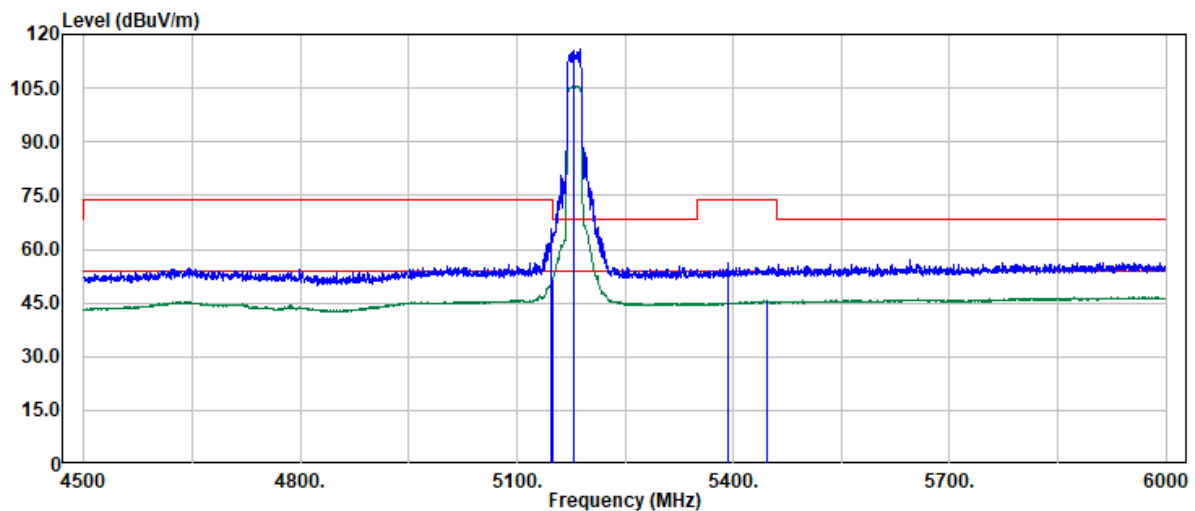

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.78	51.91	13.70	65.61	74.00	-8.39	Peak
5149.28	38.06	13.70	51.76	54.00	-2.24	Average
5180.00	102.15	13.81	115.96	--	--	Peak
5180.00	91.84	13.81	105.65	--	--	Average
5392.20	41.77	14.21	55.98	74.00	-18.02	Peak
5446.19	31.07	14.45	45.52	54.00	-8.48	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 122 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band1
Frequency : 5180 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

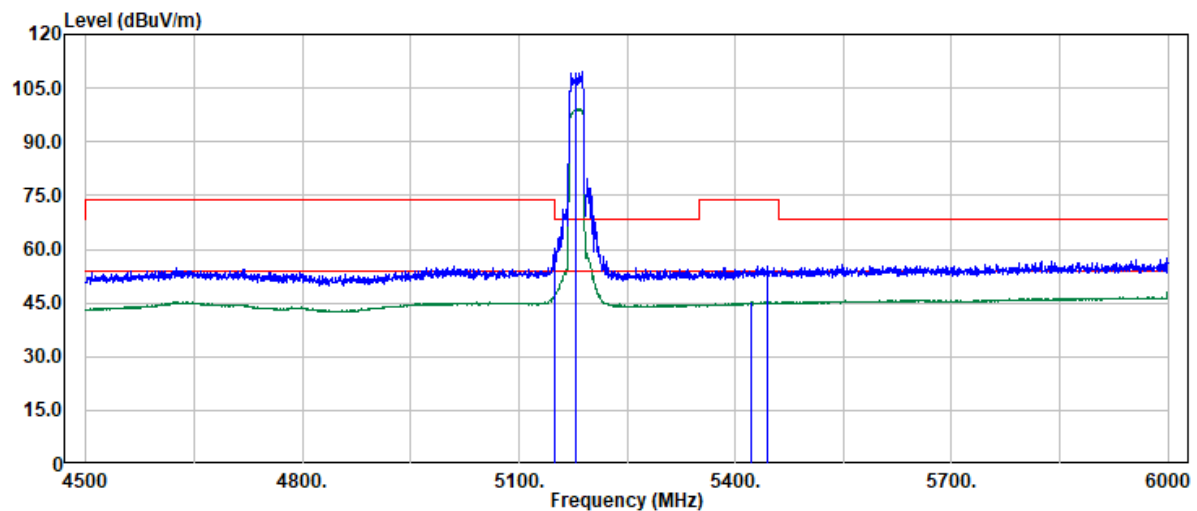

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5149.28	46.55	13.70	60.25	74.00	-13.75	Peak
5149.78	33.16	13.70	46.86	54.00	-7.14	Average
5180.00	95.91	13.81	109.72	--	--	Peak
5180.00	85.53	13.81	99.34	--	--	Average
5421.19	30.85	14.32	45.17	54.00	-8.83	Average
5445.19	40.98	14.45	55.43	74.00	-18.57	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 123 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

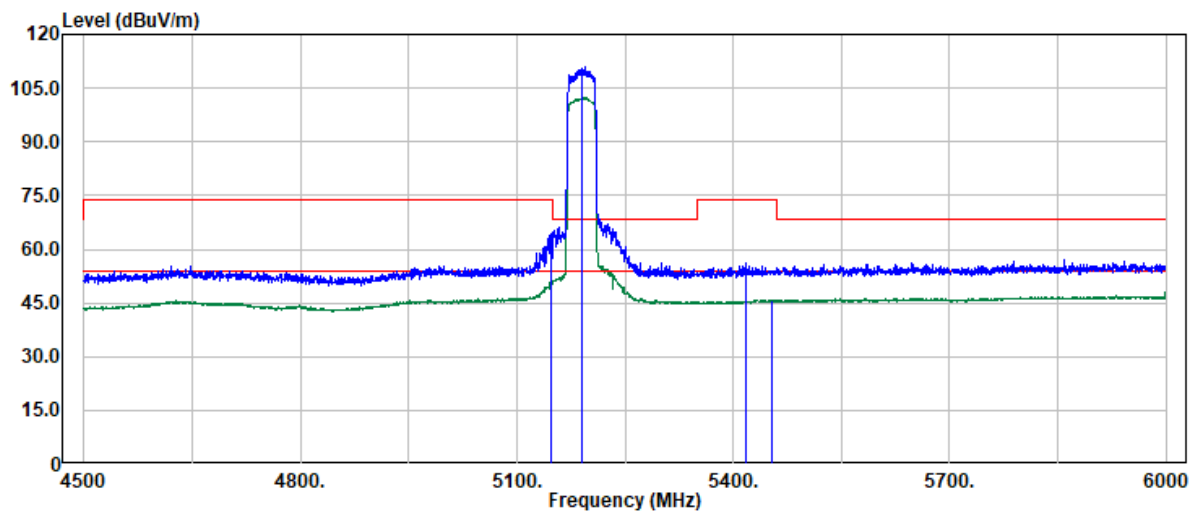

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5146.78	50.45	13.70	64.15	74.00	-9.85	Peak
5148.28	37.25	13.70	50.95	54.00	-3.05	Average
5190.00	96.89	13.84	110.73	--	--	Peak
5190.00	88.33	13.84	102.17	--	--	Average
5416.69	41.90	14.31	56.21	74.00	-17.79	Peak
5453.18	31.43	14.48	45.91	54.00	-8.09	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 124 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band1
Frequency : 5190 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

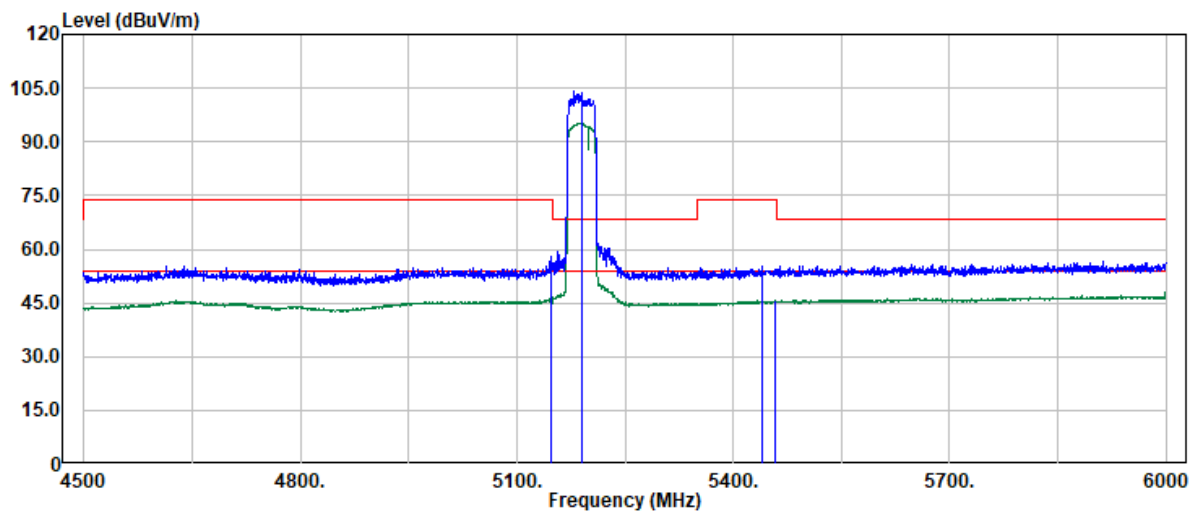


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5147.78	44.25	13.70	57.95	74.00	-16.05	Peak
5148.28	32.41	13.70	46.11	54.00	-7.89	Average
5190.00	90.40	13.84	104.24	--	--	Peak
5190.00	81.30	13.84	95.14	--	--	Average
5439.19	40.80	14.42	55.22	74.00	-18.78	Peak
5457.68	31.17	14.48	45.65	54.00	-8.35	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 125 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax80_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5210 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

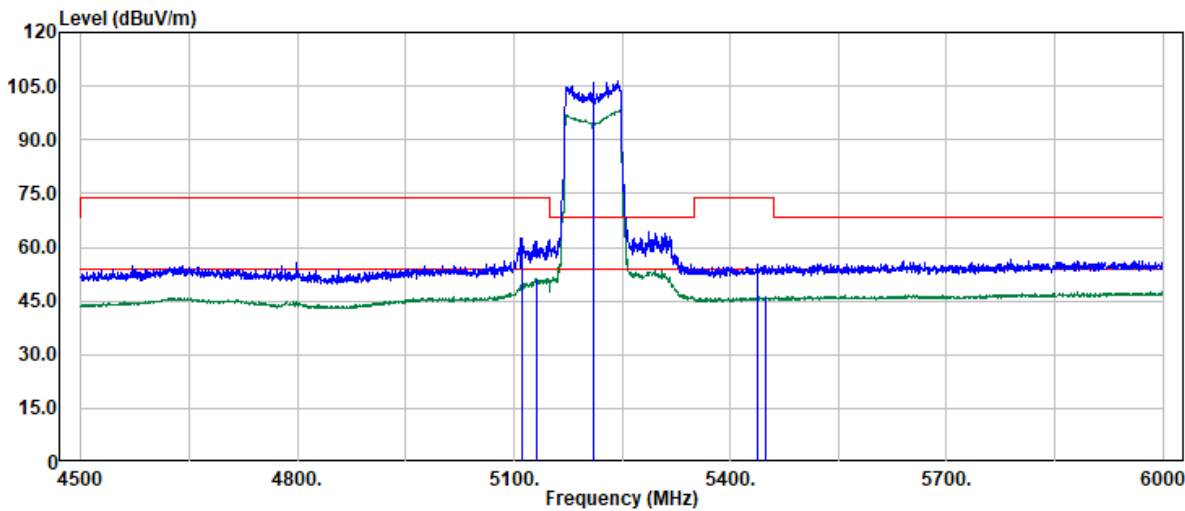

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5111.30	48.72	13.70	62.42	74.00	-11.58	Peak
5131.29	37.48	13.70	51.18	54.00	-2.82	Average
5210.00	92.47	13.87	106.34	--	--	Peak
5210.00	84.17	13.87	98.04	--	--	Average
5438.69	40.89	14.41	55.30	74.00	-18.70	Peak
5448.68	31.59	14.46	46.05	54.00	-7.95	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 126 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band1
Frequency : 5210 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

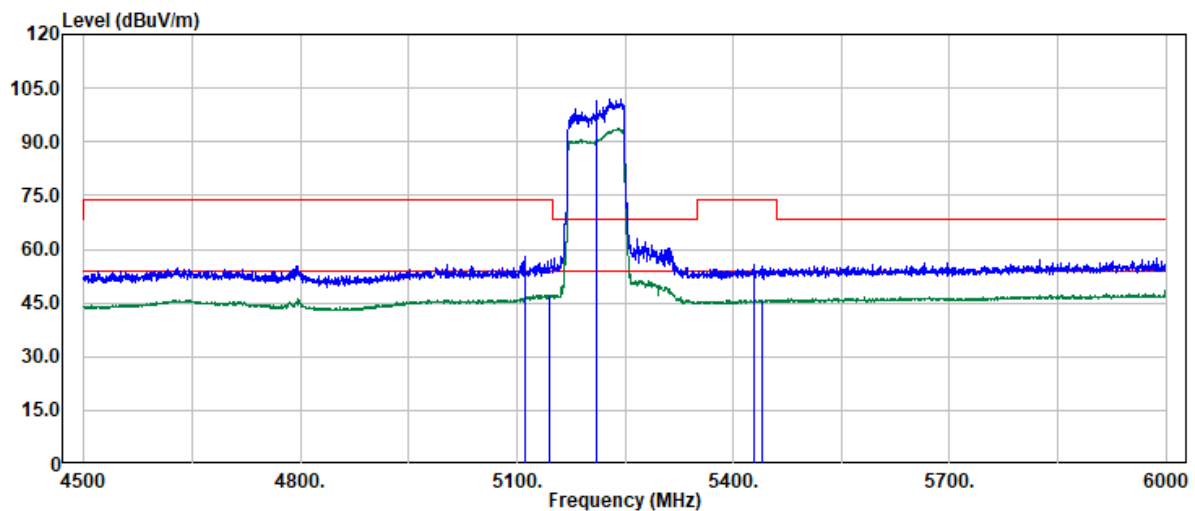


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5110.80	44.44	13.70	58.14	74.00	-15.86	Peak
5145.29	33.45	13.70	47.15	54.00	-6.85	Average
5210.00	88.19	13.87	102.06	--	--	Peak
5210.00	79.79	13.87	93.66	--	--	Average
5428.19	41.20	14.36	55.56	74.00	-18.44	Peak
5440.19	31.42	14.42	45.84	54.00	-8.16	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 127 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-03
Operation Band	: 802.11a_Band2_CH0	Temp./Humi.	: 24.3/59
Frequency	: 5320 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

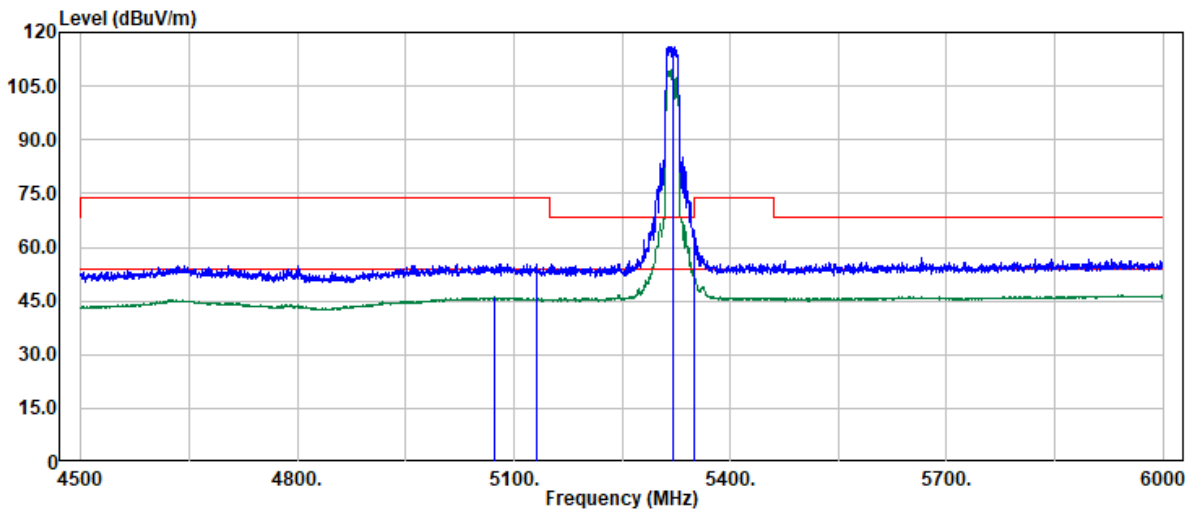

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5072.81	32.41	13.70	46.11	54.00	-7.89	Average
5132.29	41.58	13.70	55.28	74.00	-18.72	Peak
5320.00	101.97	14.16	116.13	--	--	Peak
5320.00	95.23	14.16	109.39	--	--	Average
5350.22	50.41	14.20	64.61	74.00	-9.39	Peak
5350.22	38.13	14.20	52.33	54.00	-1.67	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 128 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band2_CH0
Frequency : 5320 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

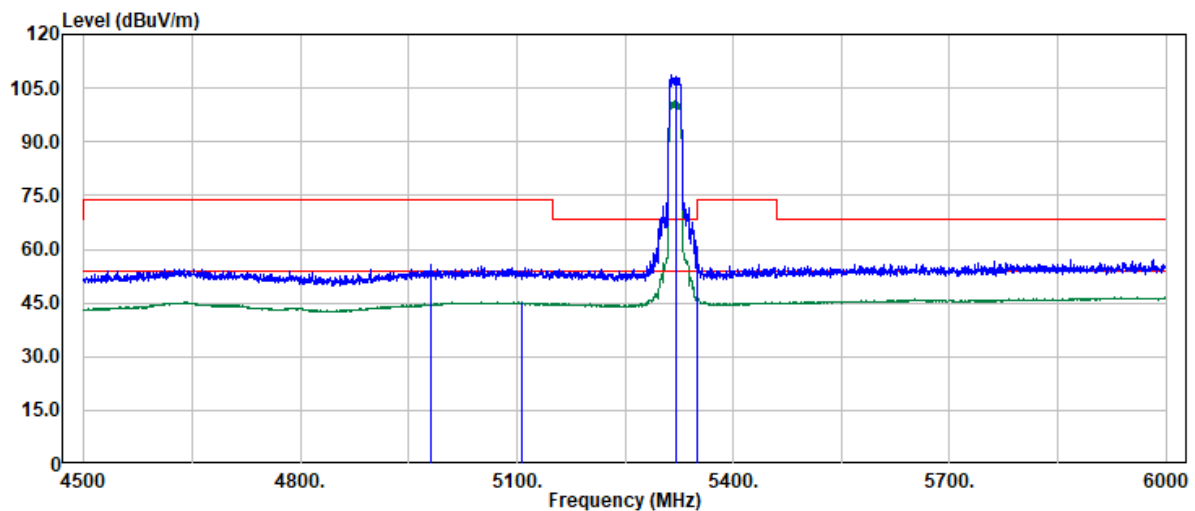


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4980.34	41.94	13.69	55.63	74.00	-18.37	Peak
5107.80	31.48	13.70	45.18	54.00	-8.82	Average
5320.00	94.49	14.16	108.65	--	--	Peak
5320.00	87.11	14.16	101.27	--	--	Average
5350.22	32.41	14.20	46.61	54.00	-7.39	Average
5350.72	42.21	14.20	56.41	74.00	-17.59	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 129 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.3/59
Frequency	: 5320 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19.5		

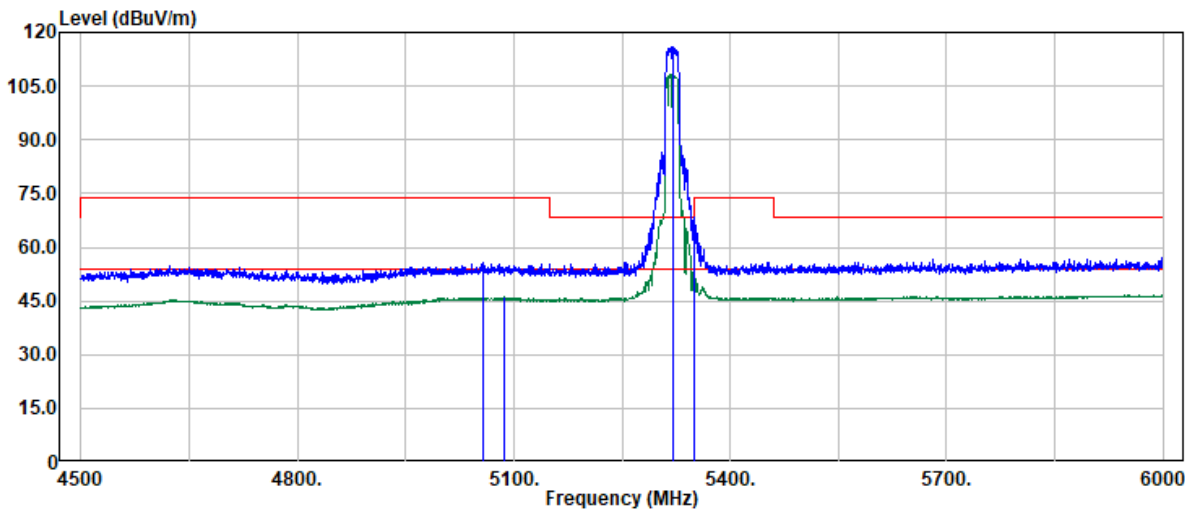

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5056.81	41.84	13.70	55.54	74.00	-18.46	Peak
5087.30	32.28	13.70	45.98	54.00	-8.02	Average
5320.00	101.76	14.16	115.92	--	--	Peak
5320.00	93.94	14.16	108.10	--	--	Average
5350.72	54.24	14.20	68.44	74.00	-5.56	Peak
5351.22	37.85	14.20	52.05	54.00	-1.95	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 130 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band2
Frequency : 5320 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 19.5

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

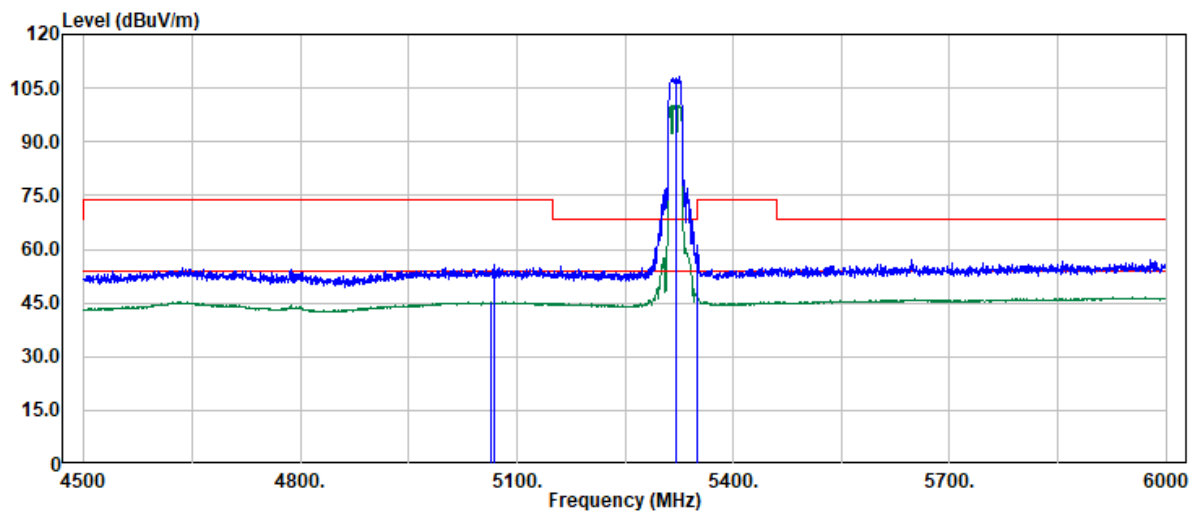

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5065.31	31.55	13.69	45.24	54.00	-8.76	Average
5069.81	42.16	13.70	55.86	74.00	-18.14	Peak
5320.00	93.86	14.16	108.02	--	--	Peak
5320.00	86.10	14.16	100.26	--	--	Average
5350.22	47.05	14.20	61.25	74.00	-12.75	Peak
5350.72	32.18	14.20	46.38	54.00	-7.62	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 131 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band2
Frequency : 5310 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

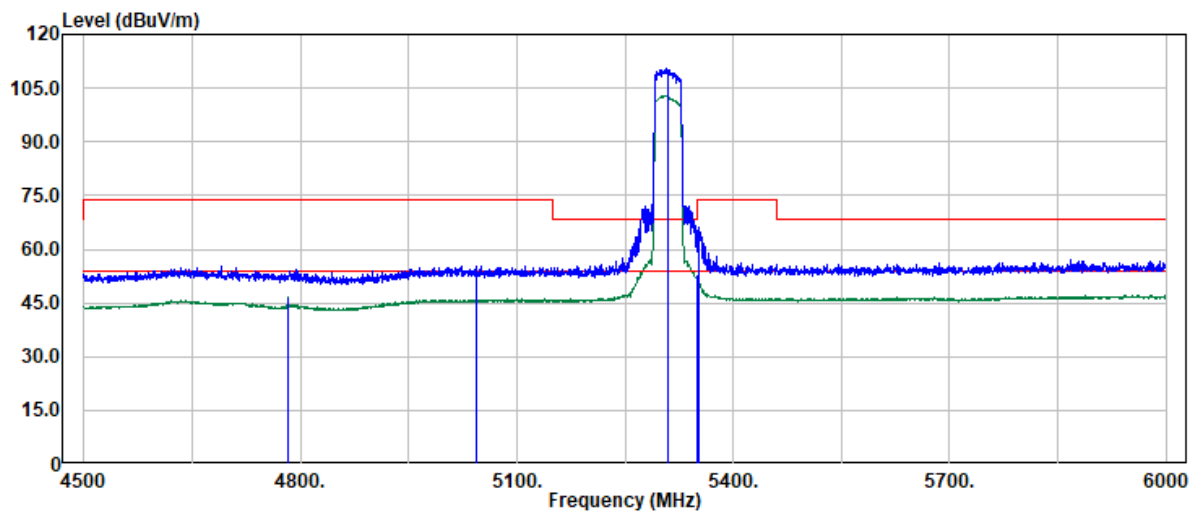

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4783.41	34.53	11.92	46.45	54.00	-7.55	Average
5043.82	41.70	13.72	55.42	74.00	-18.58	Peak
5310.00	96.24	14.16	110.40	--	--	Peak
5310.00	88.71	14.16	102.87	--	--	Average
5350.72	38.63	14.20	52.83	54.00	-1.17	Average
5352.22	51.69	14.20	65.89	74.00	-8.11	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 132 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band2
Frequency : 5310 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

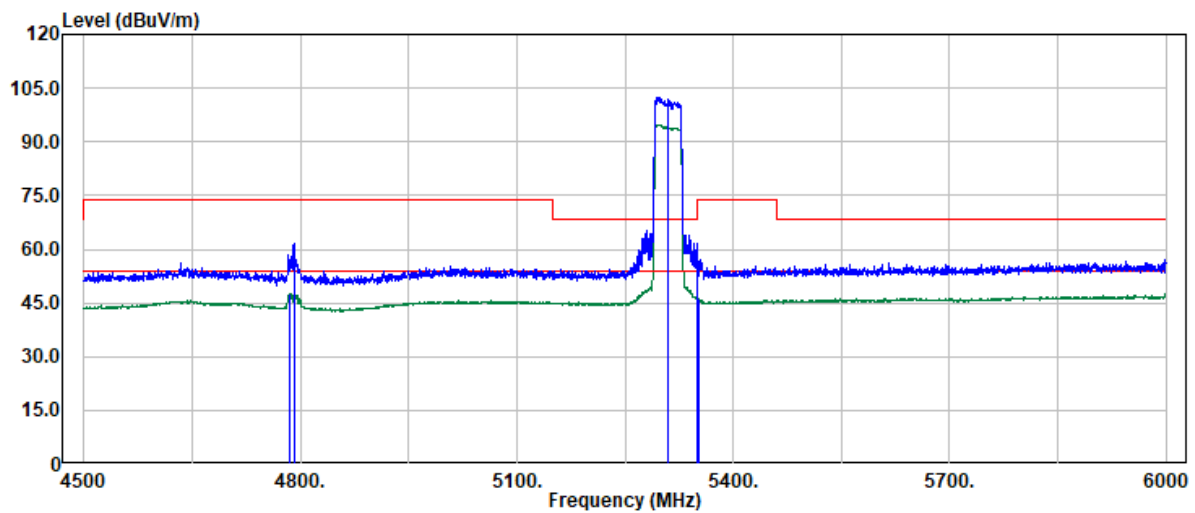


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4785.91	35.81	11.91	47.72	54.00	-6.28	Average
4792.40	49.94	11.87	61.81	74.00	-12.19	Peak
5310.00	88.36	14.16	102.52	--	--	Peak
5310.00	80.53	14.16	94.69	--	--	Average
5351.22	44.99	14.20	59.19	74.00	-14.81	Peak
5351.72	31.83	14.20	46.03	54.00	-7.97	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 133 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ac80_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5290 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

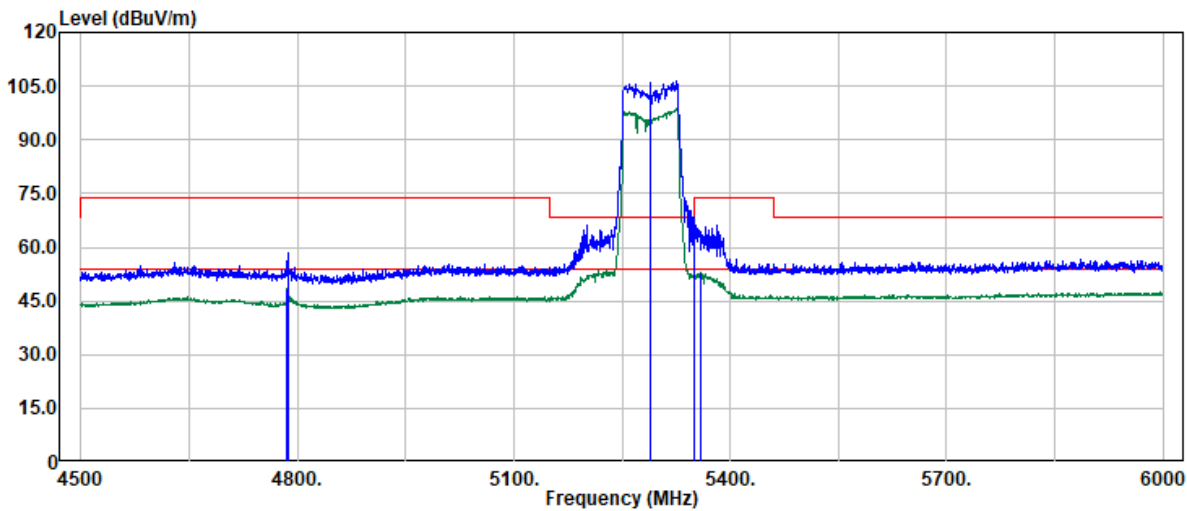

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4784.91	36.61	11.91	48.52	54.00	-5.48	Average
4786.90	46.43	11.89	58.32	74.00	-15.68	Peak
5290.00	92.53	14.09	106.62	--	--	Peak
5290.00	84.54	14.09	98.63	--	--	Average
5350.22	53.15	14.20	67.35	74.00	-6.65	Peak
5358.21	38.92	14.21	53.13	54.00	-0.87	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 134 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

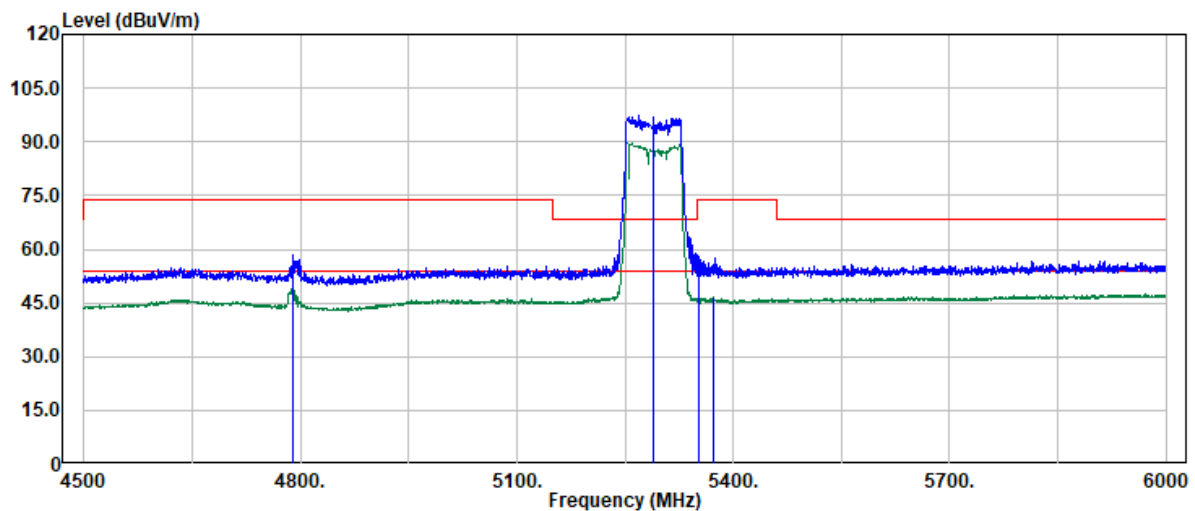

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4788.90	37.29	11.88	49.17	54.00	-4.83	Average
4789.90	46.59	11.87	58.46	74.00	-15.54	Peak
5290.00	83.12	14.09	97.21	--	--	Peak
5290.00	75.69	14.09	89.78	--	--	Average
5353.22	43.97	14.20	58.17	74.00	-15.83	Peak
5372.71	32.33	14.22	46.55	54.00	-7.45	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 135 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band2
Frequency : 5320 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

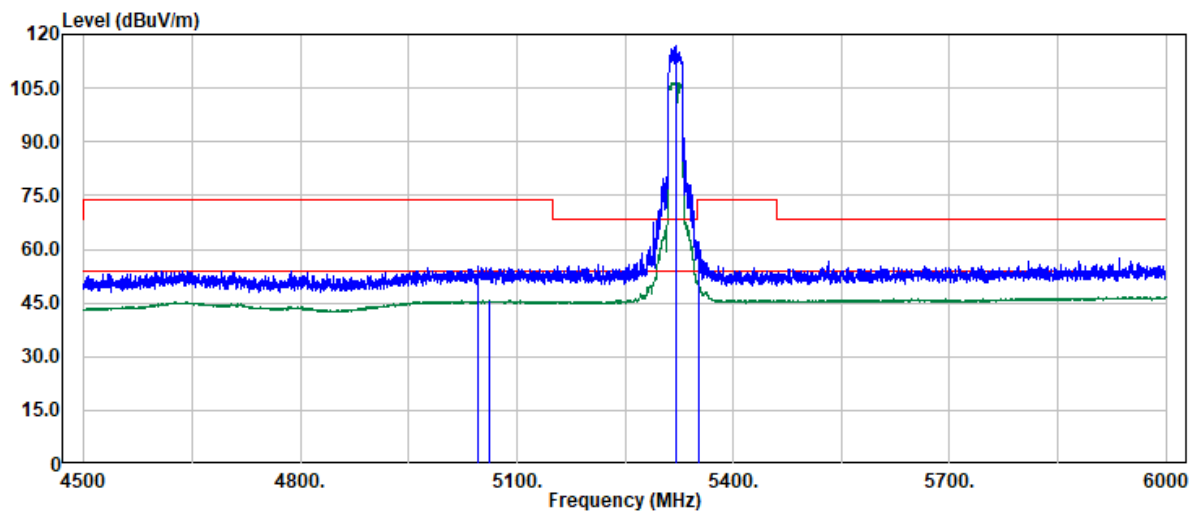


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5045.73	41.40	13.71	55.11	74.00	-18.89	Peak
5062.72	31.99	13.69	45.68	54.00	-8.32	Average
5320.00	102.69	14.16	116.85	--	--	Peak
5320.00	92.51	14.16	106.67	--	--	Average
5351.32	37.61	14.20	51.81	54.00	-2.19	Average
5352.07	47.74	14.20	61.94	74.00	-12.06	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 136 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5320 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

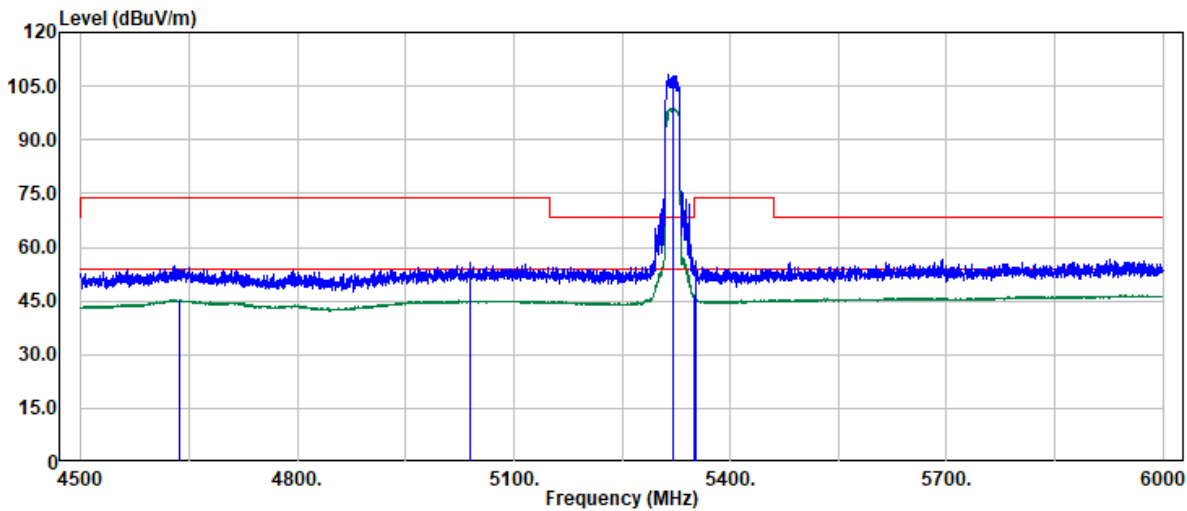

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4637.18	32.46	12.83	45.29	54.00	-8.71	Average
5040.23	42.05	13.72	55.77	74.00	-18.23	Peak
5320.00	94.23	14.16	108.39	--	--	Peak
5320.00	84.65	14.16	98.81	--	--	Average
5350.58	32.34	14.20	46.54	54.00	-7.46	Average
5352.57	41.87	14.20	56.07	74.00	-17.93	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 137 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band2
Frequency : 5310 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

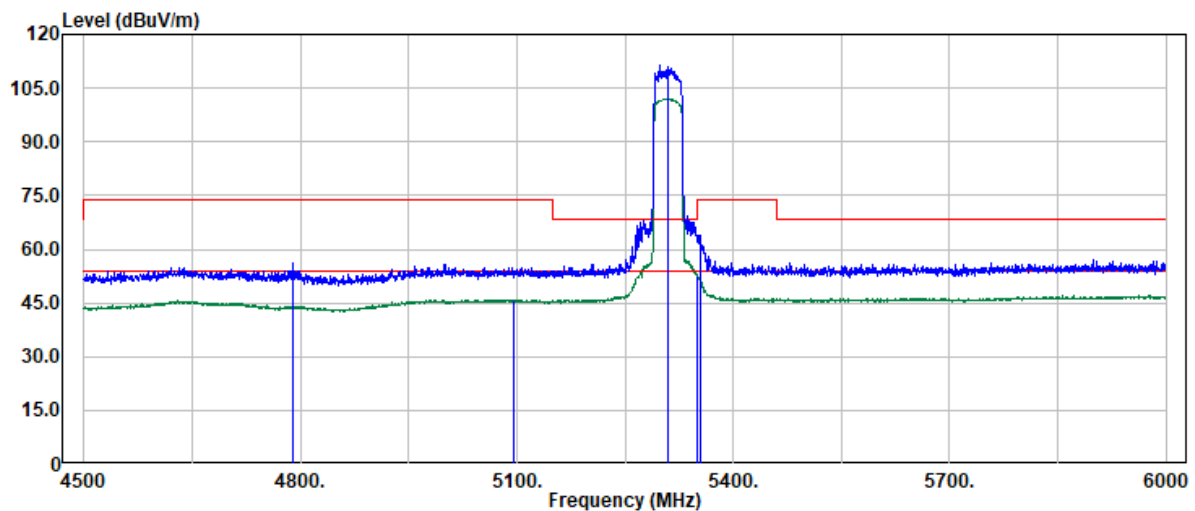


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4790.40	44.17	11.87	56.04	74.00	-17.96	Peak
5096.30	32.26	13.70	45.96	54.00	-8.04	Average
5310.00	97.36	14.16	111.52	--	--	Peak
5310.00	87.91	14.16	102.07	--	--	Average
5350.22	38.32	14.20	52.52	54.00	-1.48	Average
5354.22	49.72	14.20	63.92	74.00	-10.08	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 138 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax40_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5310 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

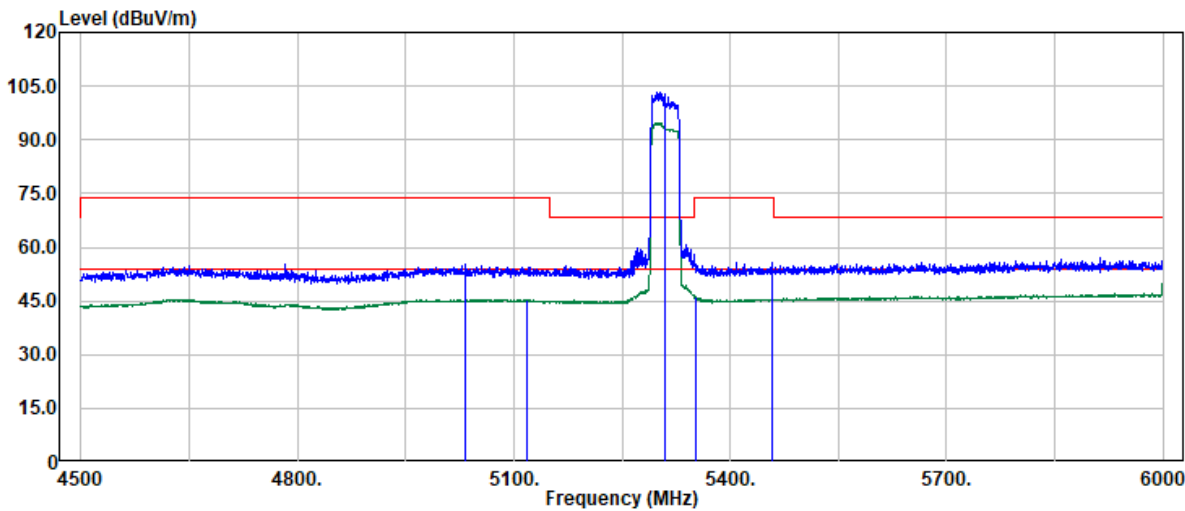


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5033.82	41.54	13.75	55.29	74.00	-18.71	Peak
5117.79	31.77	13.70	45.47	54.00	-8.53	Average
5310.00	88.94	14.16	103.10	--	--	Peak
5310.00	80.39	14.16	94.55	--	--	Average
5352.22	32.16	14.20	46.36	54.00	-7.64	Average
5457.18	41.40	14.48	55.88	74.00	-18.12	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 139 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax80_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5290 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 15.5		

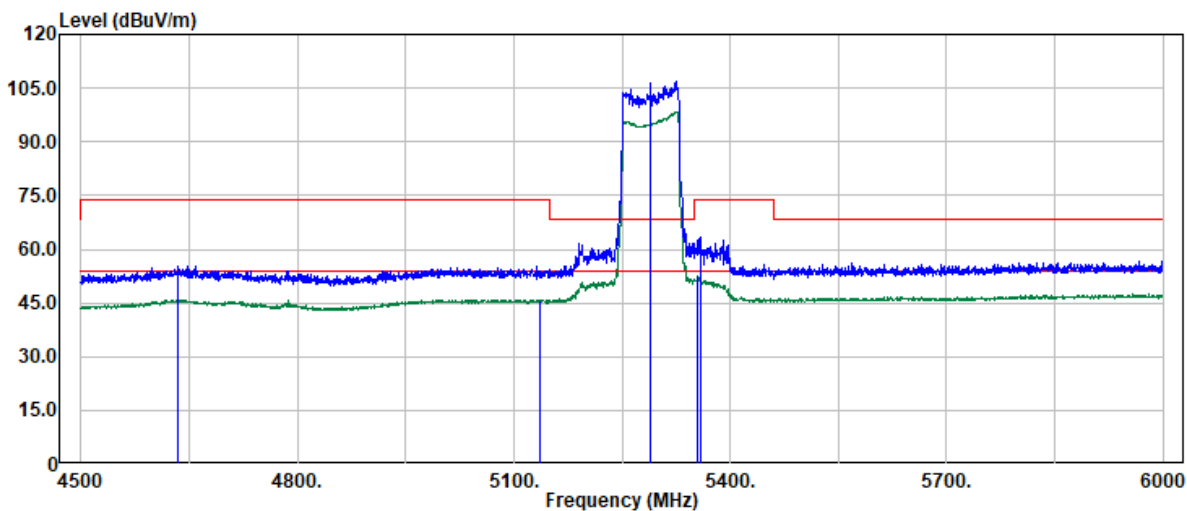


Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4633.96	42.55	12.83	55.38	74.00	-18.62	Peak
5135.79	32.24	13.70	45.94	54.00	-8.06	Average
5290.00	92.70	14.09	106.79	--	--	Peak
5290.00	84.24	14.09	98.33	--	--	Average
5354.72	38.45	14.20	52.65	54.00	-1.35	Average
5359.71	49.25	14.21	63.46	74.00	-10.54	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 140 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax80_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5290 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 15.5		

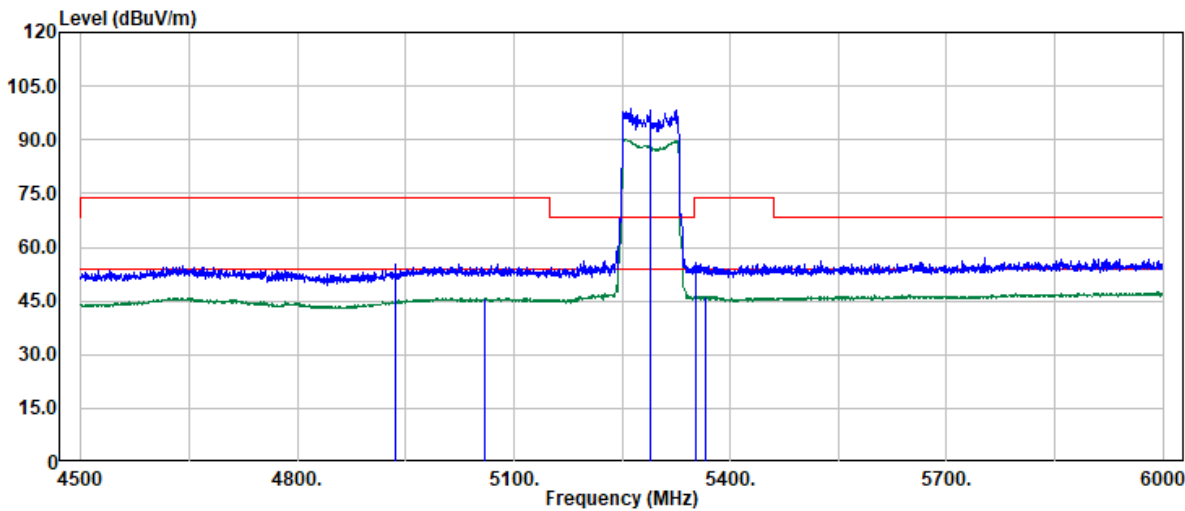

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4936.35	41.95	13.26	55.21	74.00	-18.79	Peak
5060.31	32.11	13.69	45.80	54.00	-8.20	Average
5290.00	84.60	14.09	98.69	--	--	Peak
5290.00	76.07	14.09	90.16	--	--	Average
5353.22	41.50	14.20	55.70	74.00	-18.30	Peak
5366.71	32.18	14.21	46.39	54.00	-7.61	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 141 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band3_CH0
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

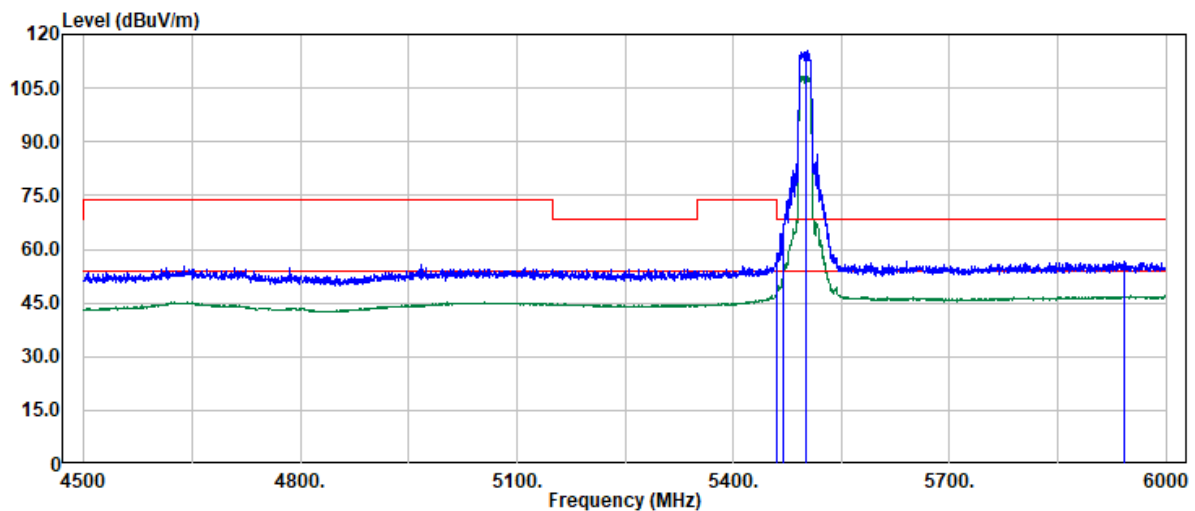

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5460.00	44.42	14.48	58.90	74.00	-15.10	Peak
5460.00	33.12	14.48	47.60	54.00	-6.40	Average
5470.00	52.39	14.48	66.87	68.20	-1.33	Peak
5500.00	100.81	14.48	115.29	--	--	Peak
5500.00	93.91	14.48	108.39	--	--	Average
5942.52	40.94	15.51	56.45	68.20	-11.75	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 142 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band3_CH0
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

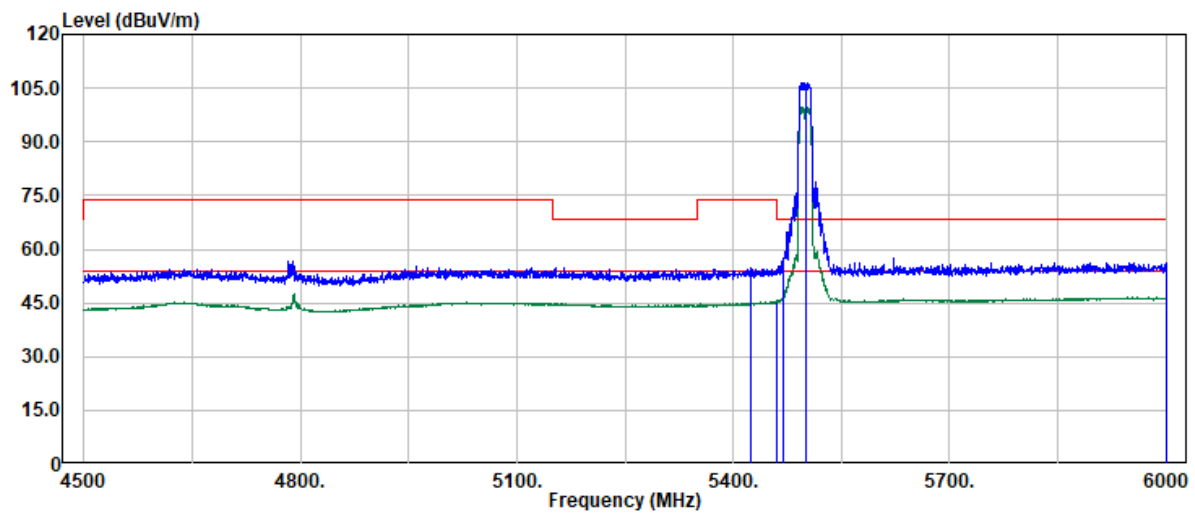


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5424.69	40.23	14.34	54.57	74.00	-19.43	Peak
5460.00	30.91	14.48	45.39	54.00	-8.61	Average
5470.00	43.18	14.48	57.66	68.20	-10.54	Peak
5500.00	92.00	14.48	106.48	--	--	Peak
5500.00	85.01	14.48	99.49	--	--	Average
6000.00	41.14	15.60	56.74	68.20	-11.46	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 143 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band3_CH0	Temp./Humi.	: 24.3/59
Frequency	: 5700 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 18		

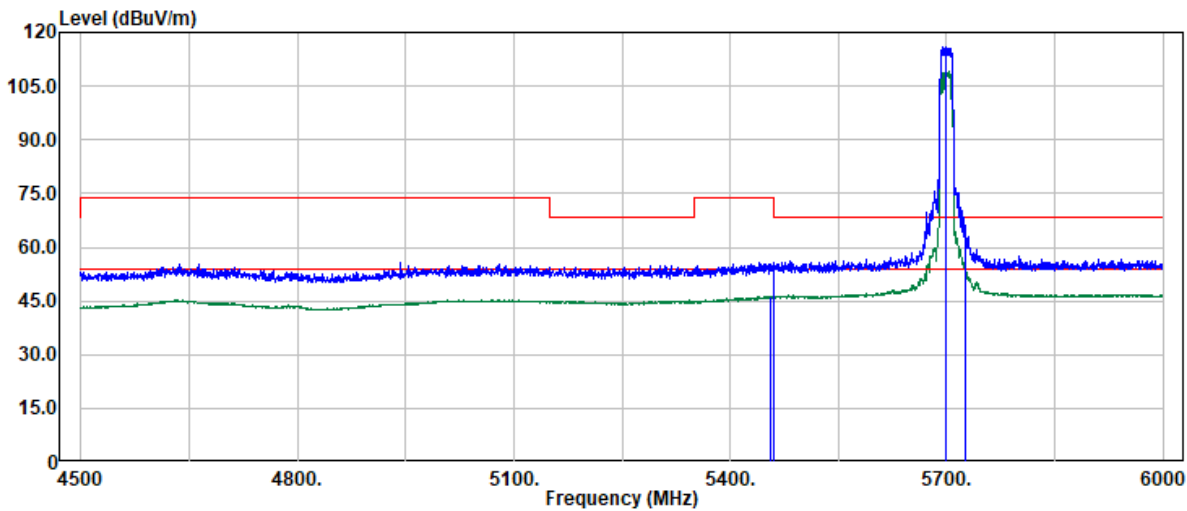


Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5455.18	31.83	14.48	46.31	54.00	-7.69	Average
5460.00	41.44	14.48	55.92	74.00	-18.08	Peak
5460.18	41.44	14.48	55.92	68.20	-12.28	Peak
5700.00	100.50	15.54	116.04	--	--	Peak
5700.00	93.55	15.54	109.09	--	--	Average
5725.59	50.56	15.61	66.17	68.20	-2.03	Peak

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 144 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band3_CH0
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 18

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

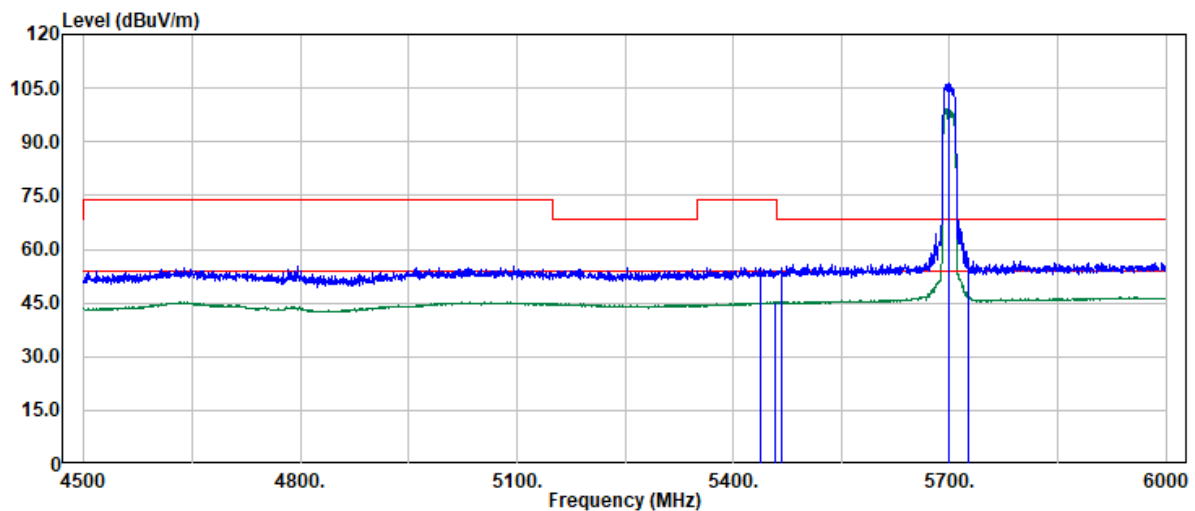

Trace: 1


Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5438.19	40.46	14.41	54.87	74.00	-19.13	Peak
5457.18	30.72	14.48	45.20	54.00	-8.80	Average
5466.18	40.27	14.48	54.75	68.20	-13.45	Peak
5700.00	90.65	15.54	106.19	--	--	Peak
5700.00	83.63	15.54	99.17	--	--	Average
5725.09	42.00	15.61	57.61	68.20	-10.59	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 145 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/59
Frequency	: 5500 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

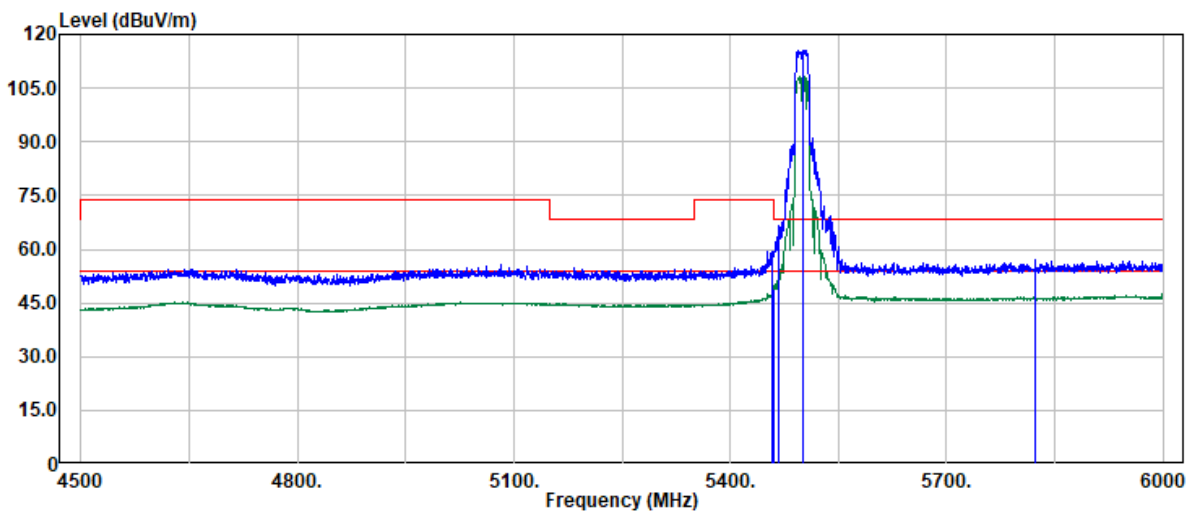


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5457.18	44.71	14.48	59.19	74.00	-14.81	Peak
5460.00	34.63	14.48	49.11	54.00	-4.89	Average
5467.18	52.05	14.48	66.53	68.20	-1.67	Peak
5500.00	101.11	14.48	115.59	--	--	Peak
5500.00	93.69	14.48	108.17	--	--	Average
5822.56	41.50	15.52	57.02	68.20	-11.18	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 146 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/59
Frequency	: 5500 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

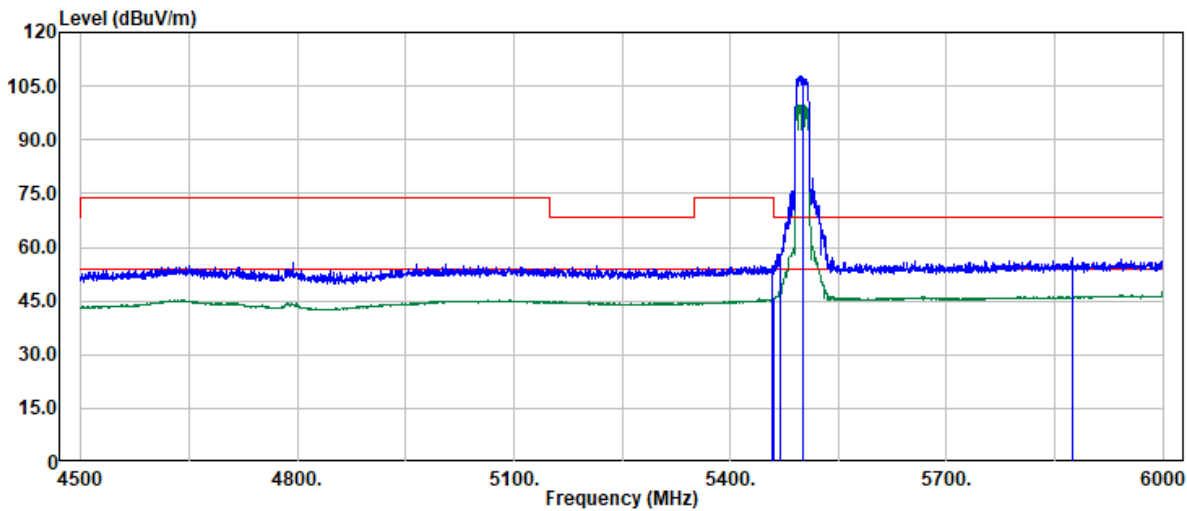

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5457.18	40.46	14.48	54.94	74.00	-19.06	Peak
5460.00	31.22	14.48	45.70	54.00	-8.30	Average
5469.18	43.65	14.48	58.13	68.20	-10.07	Peak
5500.00	93.35	14.48	107.83	--	--	Peak
5500.00	85.24	14.48	99.72	--	--	Average
5874.04	41.54	15.42	56.96	68.20	-11.24	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 147 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.25

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

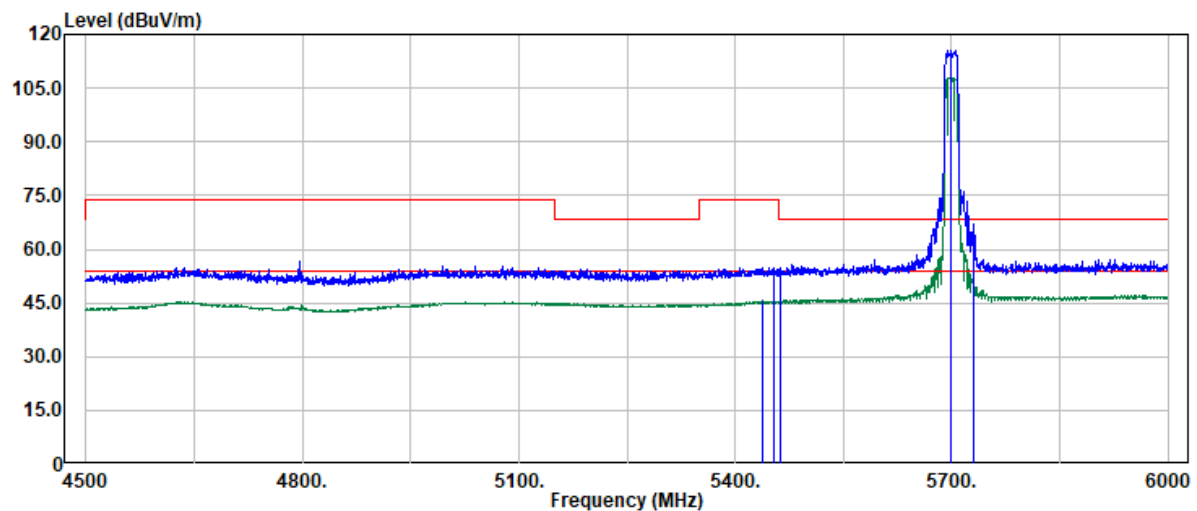

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5438.69	31.11	14.41	45.52	54.00	-8.48	Average
5453.18	40.45	14.48	54.93	74.00	-19.07	Peak
5461.68	40.28	14.48	54.76	68.20	-13.44	Peak
5700.00	100.14	15.54	115.68	--	--	Peak
5700.00	92.28	15.54	107.82	--	--	Average
5731.09	51.47	15.63	67.10	68.20	-1.10	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 148 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.25

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

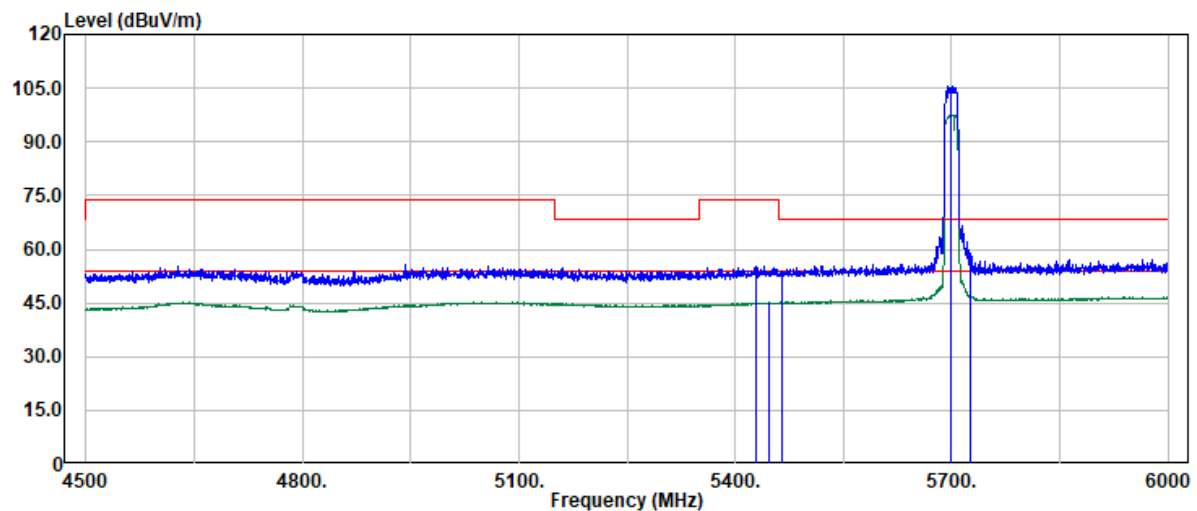

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5428.19	40.93	14.36	55.29	74.00	-18.71	Peak
5446.69	30.61	14.46	45.07	54.00	-8.93	Average
5465.18	39.32	14.48	53.80	68.20	-14.40	Peak
5700.00	89.88	15.54	105.42	--	--	Peak
5700.00	81.99	15.54	97.53	--	--	Average
5726.09	43.42	15.61	59.03	68.20	-9.17	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 149 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

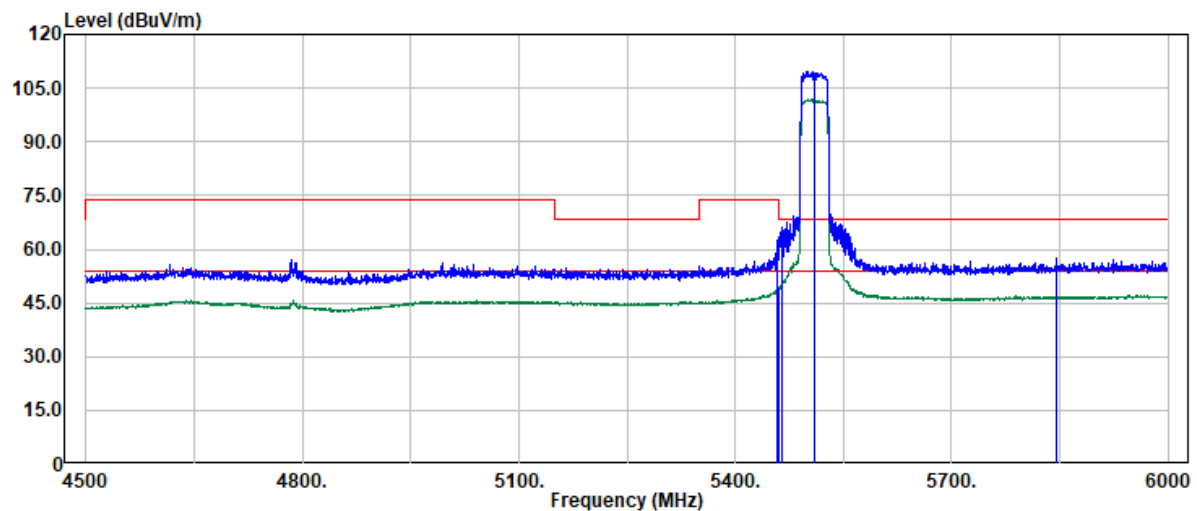

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5458.18	47.89	14.48	62.37	74.00	-11.63	Peak
5460.00	34.69	14.48	49.17	54.00	-4.83	Average
5465.68	51.64	14.48	66.12	68.20	-2.08	Peak
5510.00	95.20	14.54	109.74	--	--	Peak
5510.00	87.19	14.54	101.73	--	--	Average
5845.05	42.22	15.47	57.69	68.20	-10.51	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 150 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

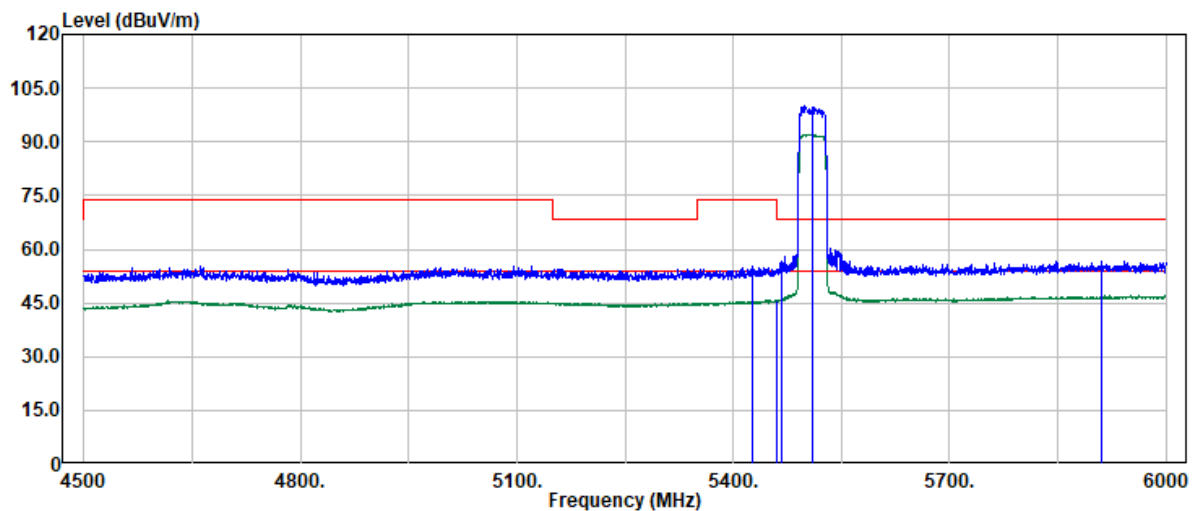

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5425.69	40.97	14.35	55.32	74.00	-18.68	Peak
5460.00	31.22	14.48	45.70	54.00	-8.30	Average
5466.18	42.32	14.48	56.80	68.20	-11.40	Peak
5510.00	85.36	14.54	99.90	--	--	Peak
5510.00	77.55	14.54	92.09	--	--	Average
5911.53	41.41	15.41	56.82	68.20	-11.38	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 151 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band3
Frequency : 5670 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

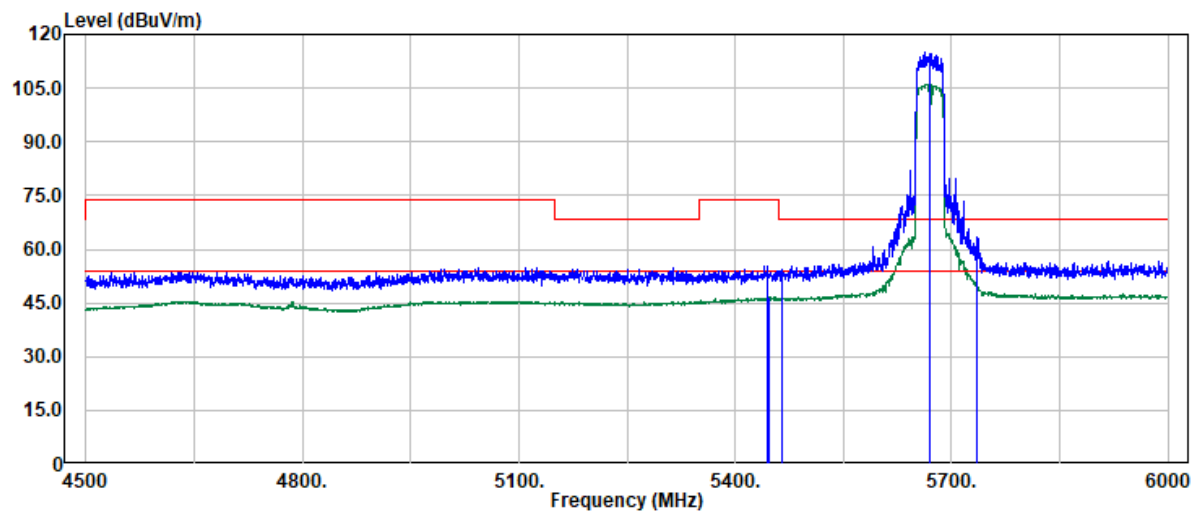

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5445.19	40.78	14.45	55.23	74.00	-18.77	Peak
5447.68	32.17	14.46	46.63	54.00	-7.37	Average
5464.18	40.07	14.48	54.55	68.20	-13.65	Peak
5670.00	99.56	15.49	115.05	--	--	Peak
5670.00	90.43	15.49	105.92	--	--	Average
5735.59	48.04	15.63	63.67	68.20	-4.53	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 152 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band3
Frequency : 5670 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 18.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

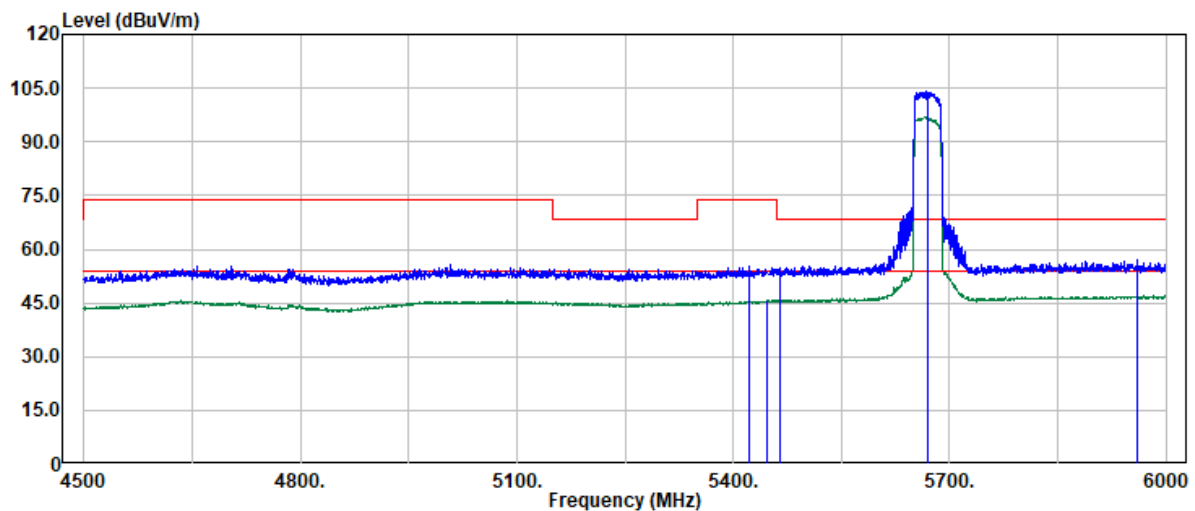


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5421.69	41.06	14.33	55.39	74.00	-18.61	Peak
5446.69	31.24	14.46	45.70	54.00	-8.30	Average
5464.18	40.54	14.48	55.02	68.20	-13.18	Peak
5670.00	88.51	15.49	104.00	--	--	Peak
5670.00	81.53	15.49	97.02	--	--	Average
5960.51	41.41	15.54	56.95	68.20	-11.25	Peak

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 153 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

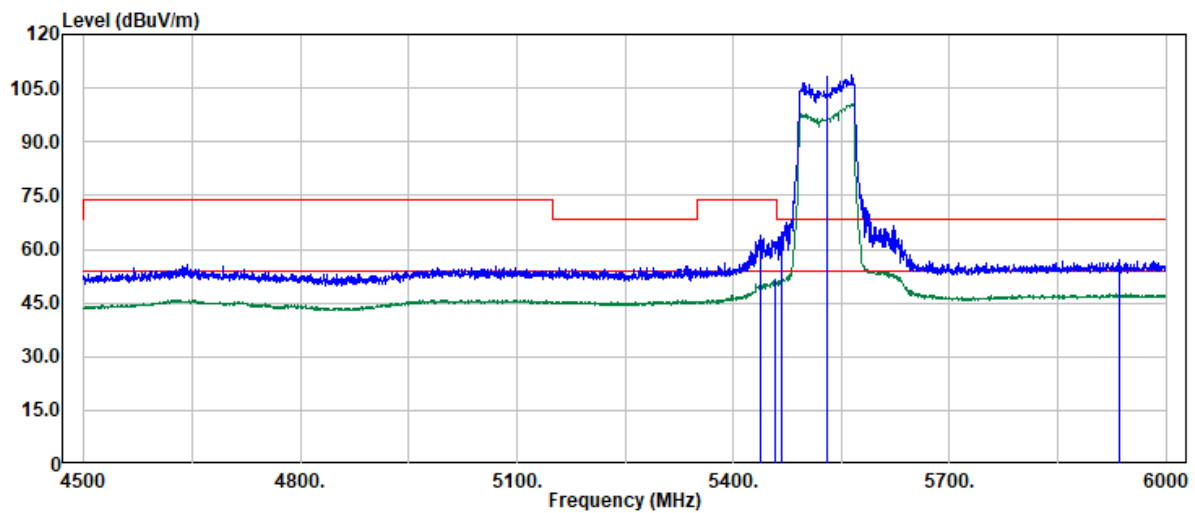

Trace: 1

Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5437.69	49.28	14.41	63.69	74.00	-10.31	Peak
5457.18	36.92	14.48	51.40	54.00	-2.60	Average
5466.68	50.22	14.48	64.70	68.20	-3.50	Peak
5530.00	94.00	14.67	108.67	--	--	Peak
5530.00	85.74	14.67	100.41	--	--	Average
5935.52	41.42	15.48	56.90	68.20	-11.30	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 154 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

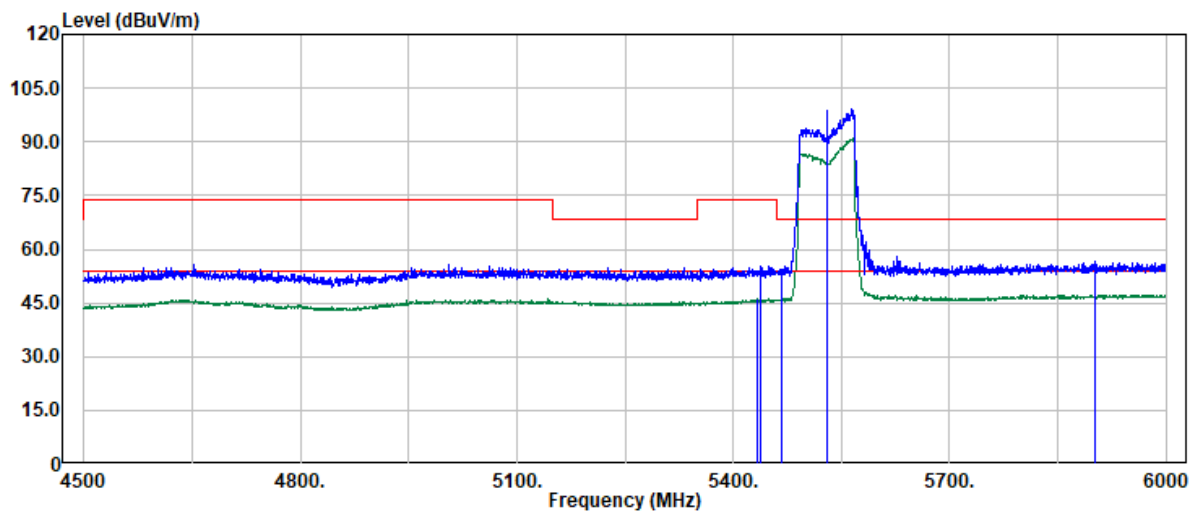

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5433.69	31.65	14.38	46.03	54.00	-7.97	Average
5437.19	40.76	14.40	55.16	74.00	-18.84	Peak
5468.18	39.94	14.48	54.42	68.20	-13.78	Peak
5530.00	84.50	14.67	99.17	--	--	Peak
5530.00	76.13	14.67	90.80	--	--	Average
5901.53	41.01	15.37	56.38	68.20	-11.82	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 155 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

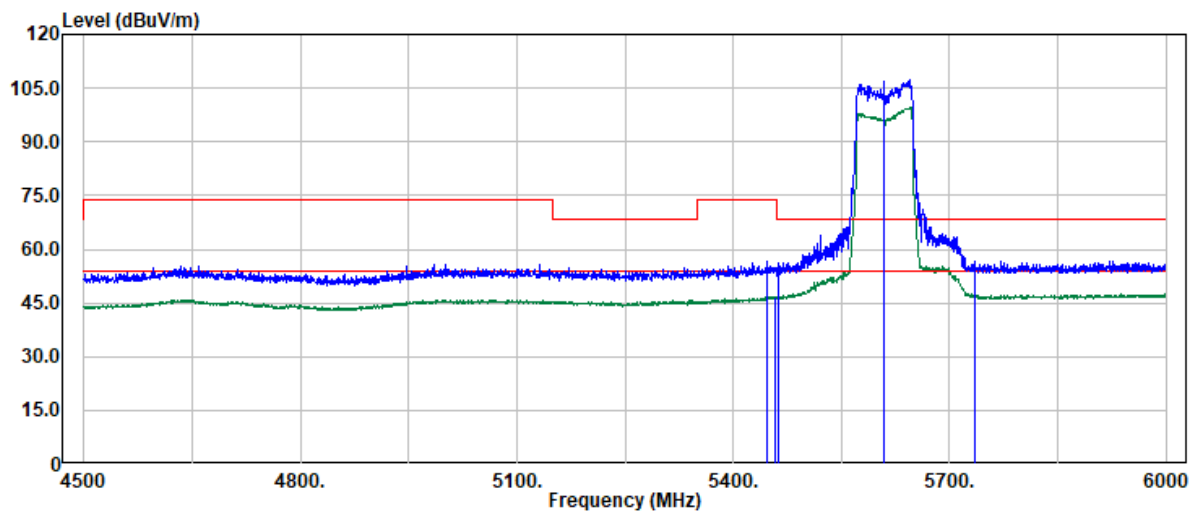

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5447.18	42.19	14.46	56.65	74.00	-17.35	Peak
5458.18	32.19	14.48	46.67	54.00	-7.33	Average
5463.68	41.62	14.48	56.10	68.20	-12.10	Peak
5610.00	92.26	15.04	107.30	--	--	Peak
5610.00	84.64	15.04	99.68	--	--	Average
5735.09	41.09	15.64	56.73	68.20	-11.47	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 156 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

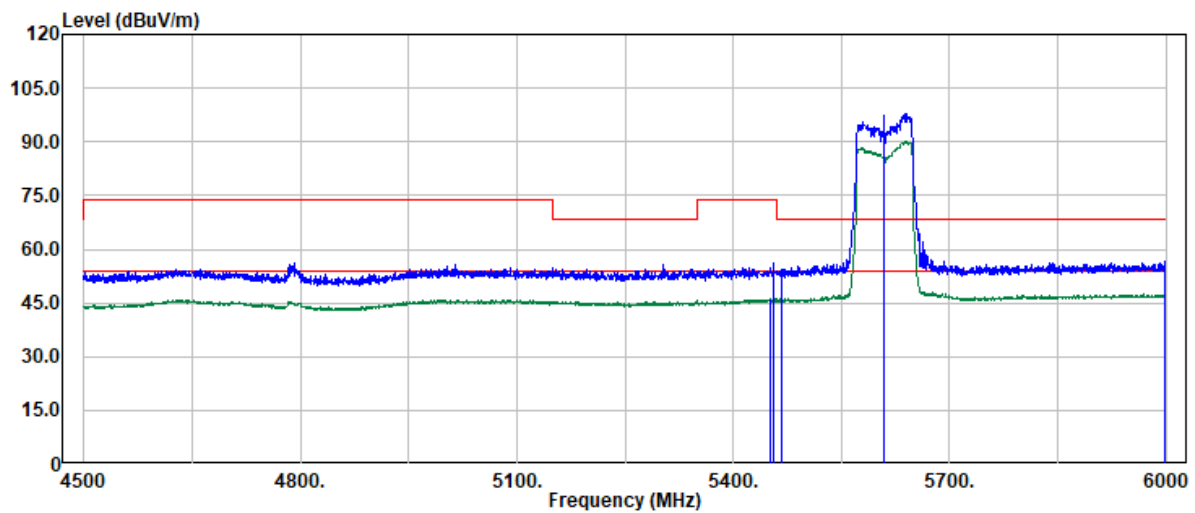

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5450.68	31.54	14.48	46.02	54.00	-7.98	Average
5455.68	41.75	14.48	56.23	74.00	-17.77	Peak
5467.18	39.77	14.48	54.25	68.20	-13.95	Peak
5610.00	82.84	15.04	97.88	--	--	Peak
5610.00	75.07	15.04	90.11	--	--	Average
5999.00	40.97	15.60	56.57	68.20	-11.63	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 157 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band3
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

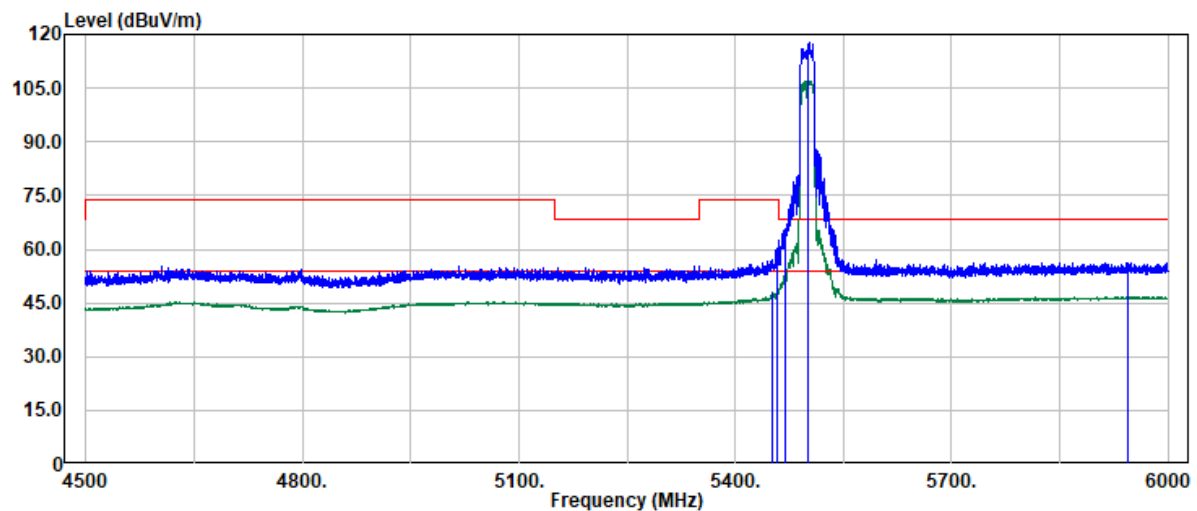


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5451.27	33.50	14.48	47.98	54.00	-6.02	Average
5459.27	45.93	14.48	60.41	74.00	-13.59	Peak
5470.00	51.38	14.48	65.86	68.20	-2.34	Peak
5500.00	103.45	14.48	117.93	--	--	Peak
5500.00	92.44	14.48	106.92	--	--	Average
5943.78	40.76	15.51	56.27	68.20	-11.93	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 158 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax20_Band3	Temp./Humi.	: 24.4/58
Frequency	: 5500 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

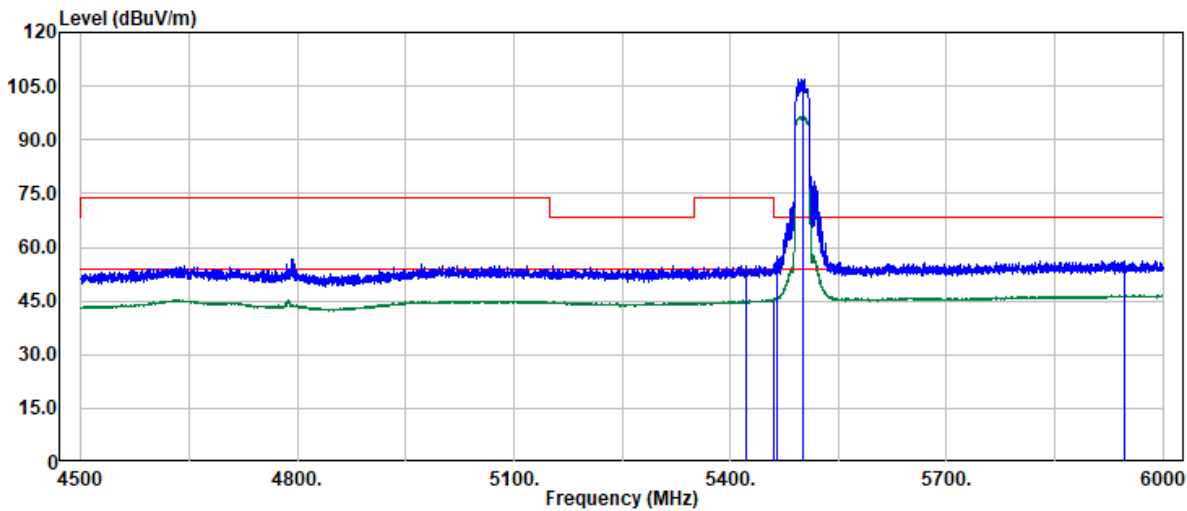

Trace: 1


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5421.79	40.37	14.33	54.70	74.00	-19.30	Peak
5460.00	30.97	14.48	45.45	54.00	-8.55	Average
5465.52	43.09	14.48	57.57	68.20	-10.63	Peak
5500.00	92.51	14.48	106.99	--	--	Peak
5500.00	82.00	14.48	96.48	--	--	Average
5945.78	40.72	15.52	56.24	68.20	-11.96	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 159 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax20_Band3	Temp./Humi.	: 24.4/58
Frequency	: 5700 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 18.5		

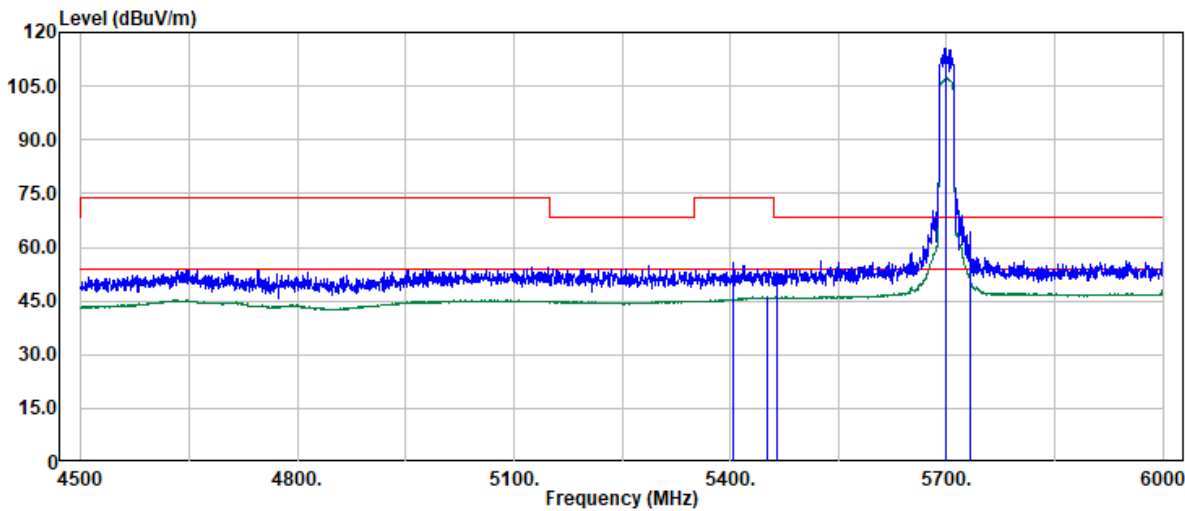

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5404.70	41.27	14.24	55.51	74.00	-18.49	Peak
5451.68	31.52	14.48	46.00	54.00	-8.00	Average
5465.68	38.35	14.48	52.83	68.20	-15.37	Peak
5700.00	100.14	15.54	115.68	--	--	Peak
5700.00	91.56	15.54	107.10	--	--	Average
5732.09	48.55	15.63	64.18	68.20	-4.02	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 160 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 18.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

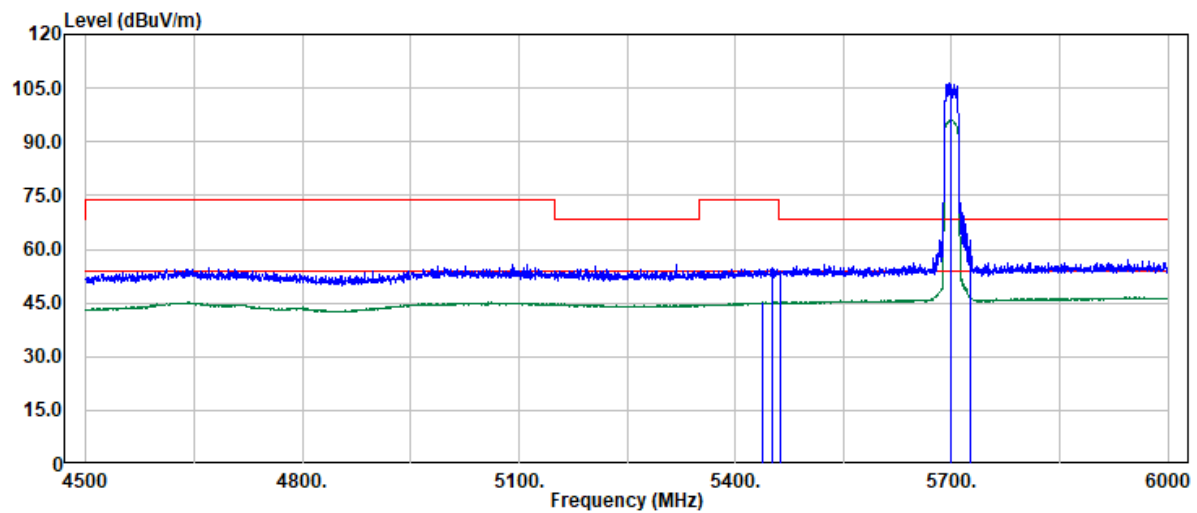

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5437.19	30.74	14.40	45.14	54.00	-8.86	Average
5451.68	40.43	14.48	54.91	74.00	-19.09	Peak
5463.68	39.60	14.48	54.08	68.20	-14.12	Peak
5700.00	90.68	15.54	106.22	--	--	Peak
5700.00	80.47	15.54	96.01	--	--	Average
5725.09	46.86	15.61	62.47	68.20	-5.73	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 161 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

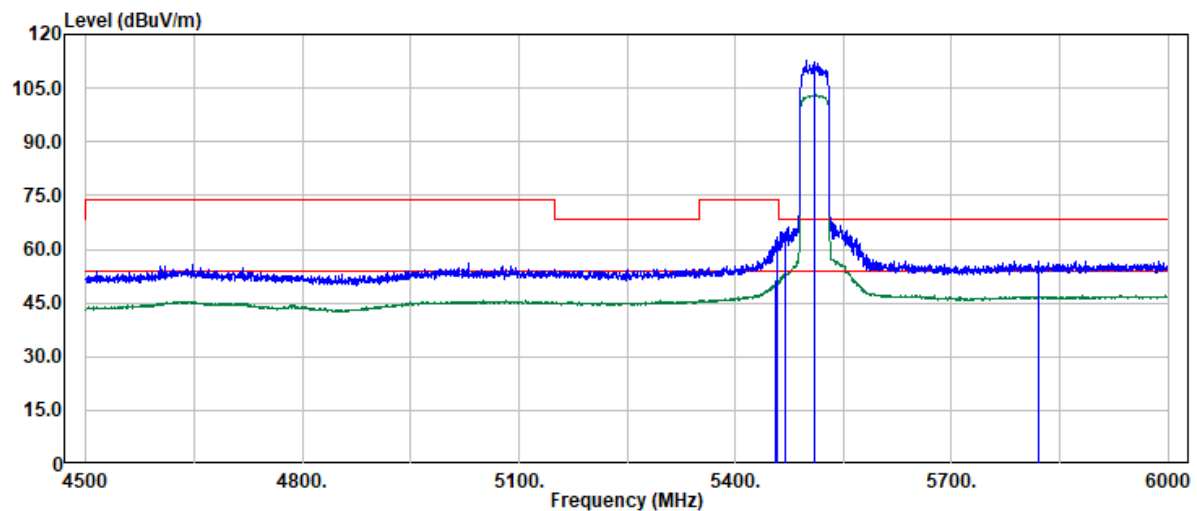


Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5456.18	36.91	14.48	51.39	54.00	-2.61	Average
5457.68	49.13	14.48	63.61	74.00	-10.39	Peak
5470.00	50.33	14.48	64.81	68.20	-3.39	Peak
5510.00	98.10	14.54	112.64	--	--	Peak
5510.00	88.53	14.54	103.07	--	--	Average
5820.06	40.99	15.53	56.52	68.20	-11.68	Peak

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 162 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

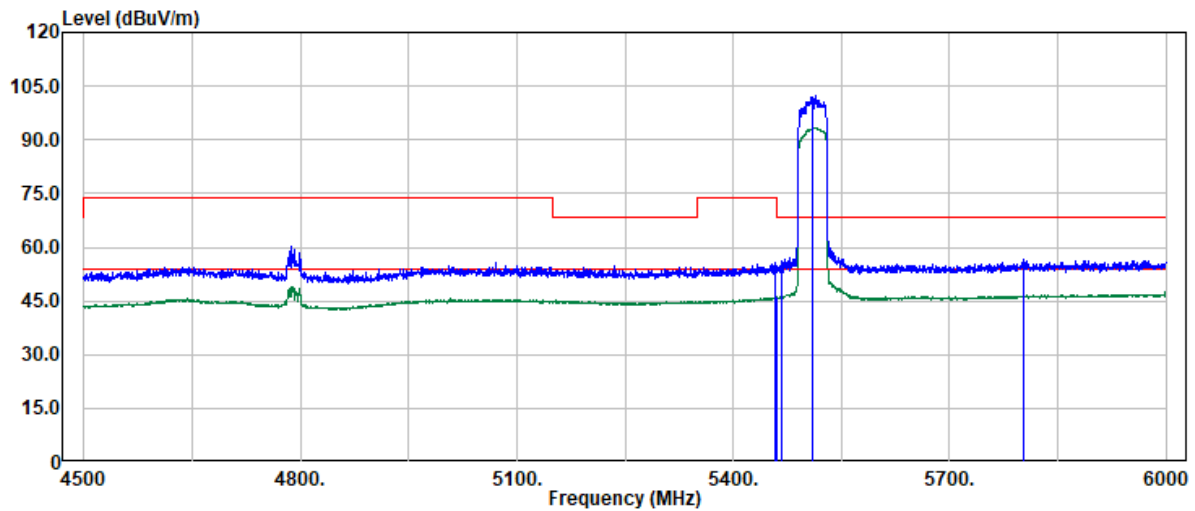


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5457.68	41.05	14.48	55.53	74.00	-18.47	Peak
5459.68	31.53	14.48	46.01	54.00	-7.99	Average
5466.18	41.83	14.48	56.31	68.20	-11.89	Peak
5510.00	87.64	14.54	102.18	--	--	Peak
5510.00	78.93	14.54	93.47	--	--	Average
5802.57	40.91	15.56	56.47	68.20	-11.73	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 163 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax40_Band3	Temp./Humi.	: 24.4/58
Frequency	: 5670 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

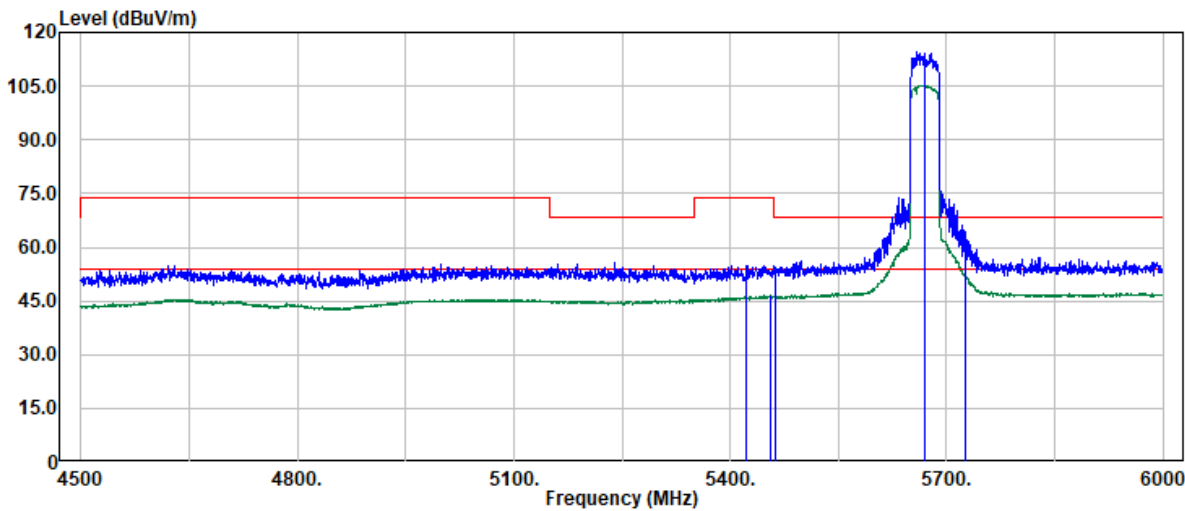

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5422.69	40.57	14.33	54.90	74.00	-19.10	Peak
5455.68	32.10	14.48	46.58	54.00	-7.42	Average
5463.68	39.87	14.48	54.35	68.20	-13.85	Peak
5670.00	99.27	15.49	114.76	--	--	Peak
5670.00	89.77	15.49	105.26	--	--	Average
5725.59	48.83	15.61	64.44	68.20	-3.76	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 164 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band3
Frequency : 5670 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

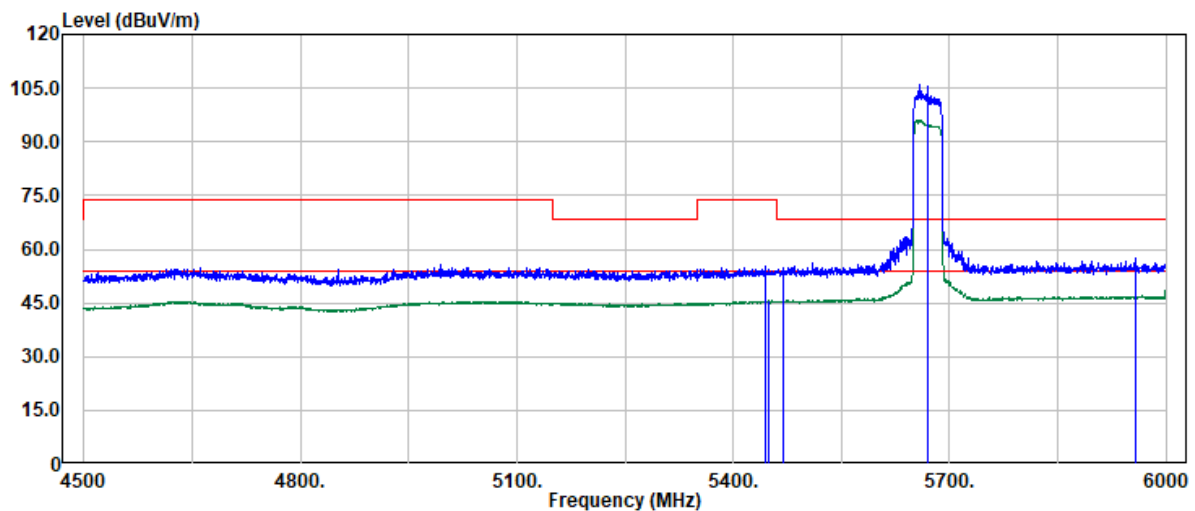

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5444.19	40.57	14.45	55.02	74.00	-18.98	Peak
5448.18	31.23	14.46	45.69	54.00	-8.31	Average
5468.68	40.30	14.48	54.78	68.20	-13.42	Peak
5670.00	90.62	15.49	106.11	--	--	Peak
5670.00	80.54	15.49	96.03	--	--	Average
5957.01	41.95	15.54	57.49	68.20	-10.71	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 165 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band3
Frequency : 5530 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

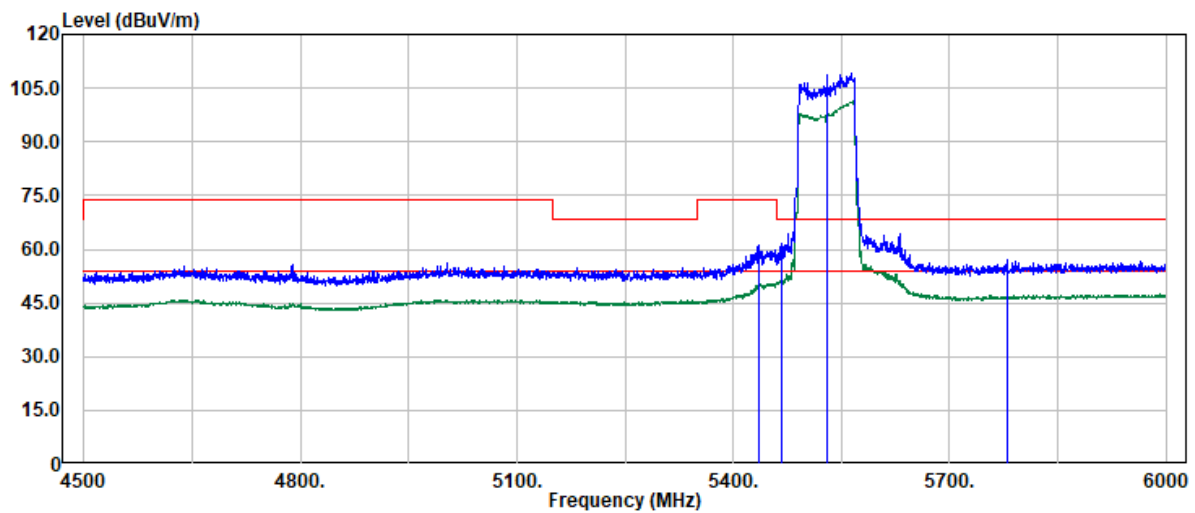

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5436.19	46.88	14.39	61.27	74.00	-12.73	Peak
5436.19	37.06	14.39	51.45	54.00	-2.55	Average
5467.18	46.93	14.48	61.41	68.20	-6.79	Peak
5530.00	94.60	14.67	109.27	--	--	Peak
5530.00	86.65	14.67	101.32	--	--	Average
5779.07	41.24	15.63	56.87	68.20	-11.33	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 166 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band3
Frequency : 5530 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

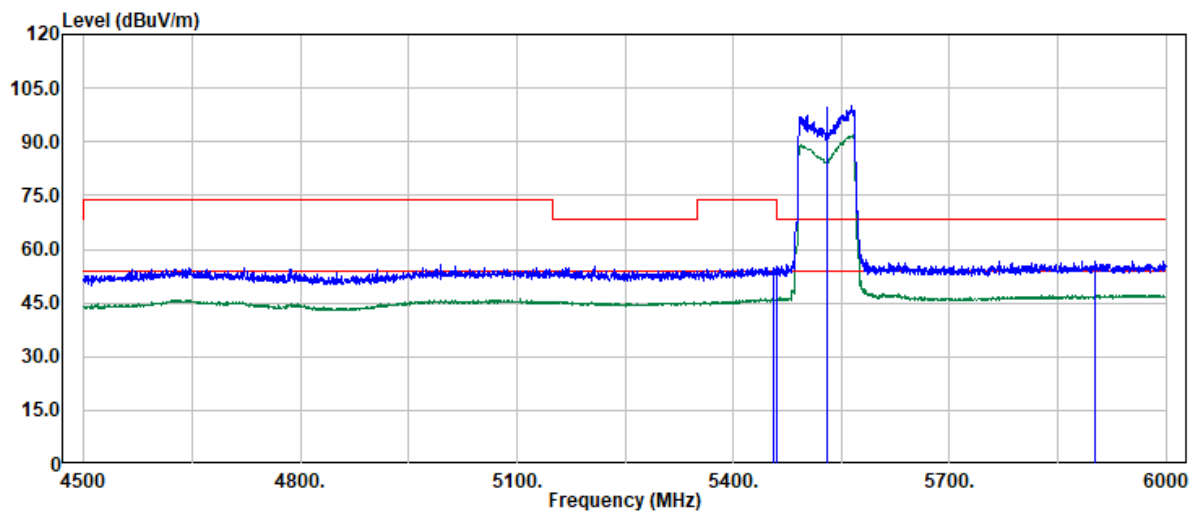


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5455.18	40.40	14.48	54.88	74.00	-19.12	Peak
5456.68	31.63	14.48	46.11	54.00	-7.89	Average
5461.18	40.97	14.48	55.45	68.20	-12.75	Peak
5530.00	85.57	14.67	100.24	--	--	Peak
5530.00	77.08	14.67	91.75	--	--	Average
5901.53	41.29	15.37	56.66	68.20	-11.54	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 167 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax80_Band3	Temp./Humi.	: 24.4/58
Frequency	: 5610 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

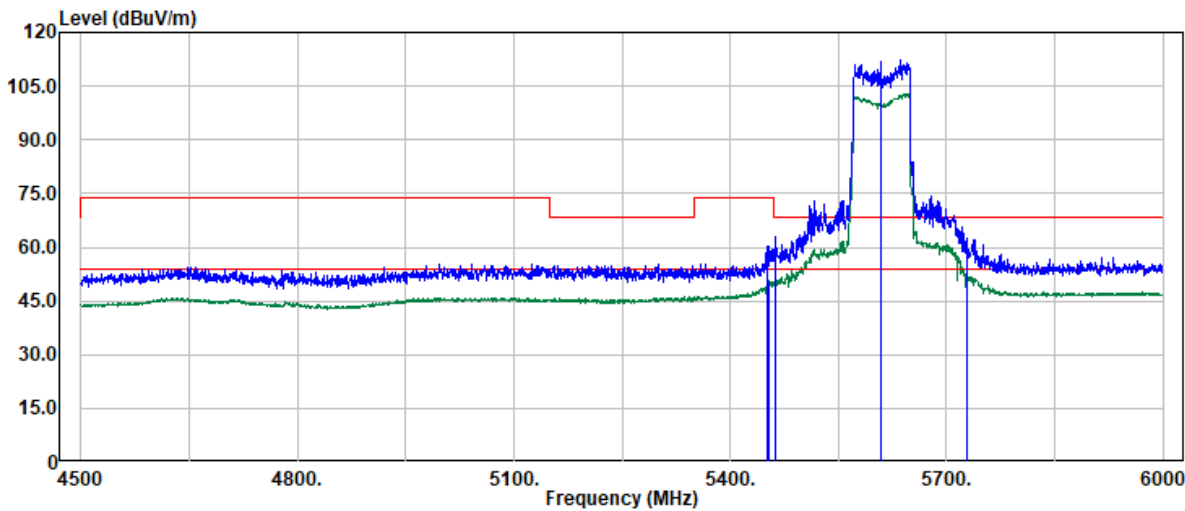

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5450.68	45.60	14.48	60.08	74.00	-13.92	Peak
5453.68	36.07	14.48	50.55	54.00	-3.45	Average
5462.18	48.43	14.48	62.91	68.20	-5.29	Peak
5610.00	97.04	15.04	112.08	--	--	Peak
5610.00	87.95	15.04	102.99	--	--	Average
5728.09	46.72	15.61	62.33	68.20	-5.87	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 168 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band3
Frequency : 5610 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 19

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

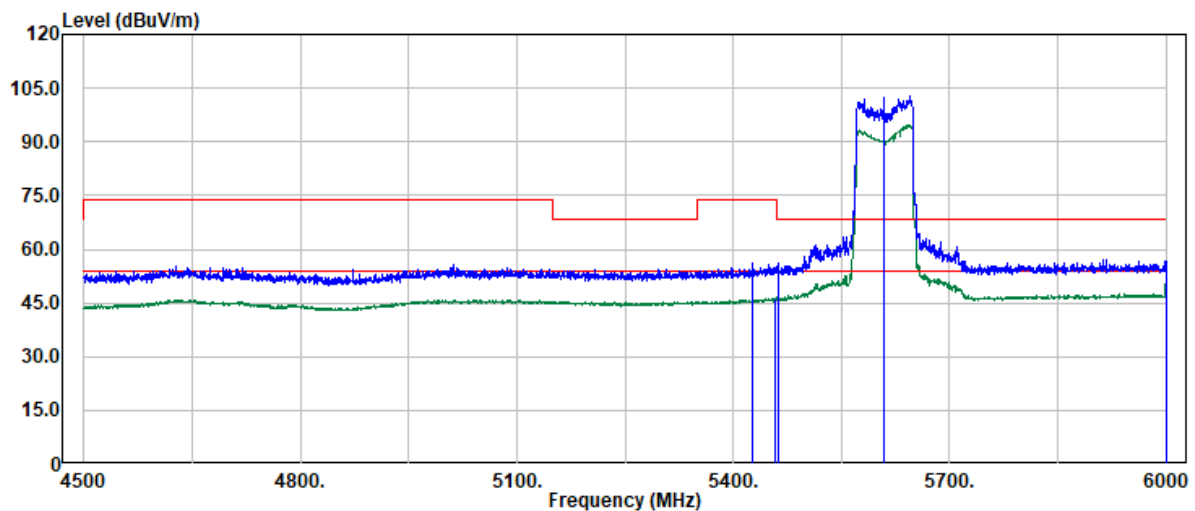


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5427.69	41.82	14.36	56.18	74.00	-17.82	Peak
5458.68	31.68	14.48	46.16	54.00	-7.84	Average
5461.68	41.84	14.48	56.32	68.20	-11.88	Peak
5610.00	87.88	15.04	102.92	--	--	Peak
5610.00	79.62	15.04	94.66	--	--	Average
6000.00	41.67	15.60	57.27	68.20	-10.93	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 169 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band4_CH0	Temp./Humi.	: 24.3/59
Frequency	: 5745 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

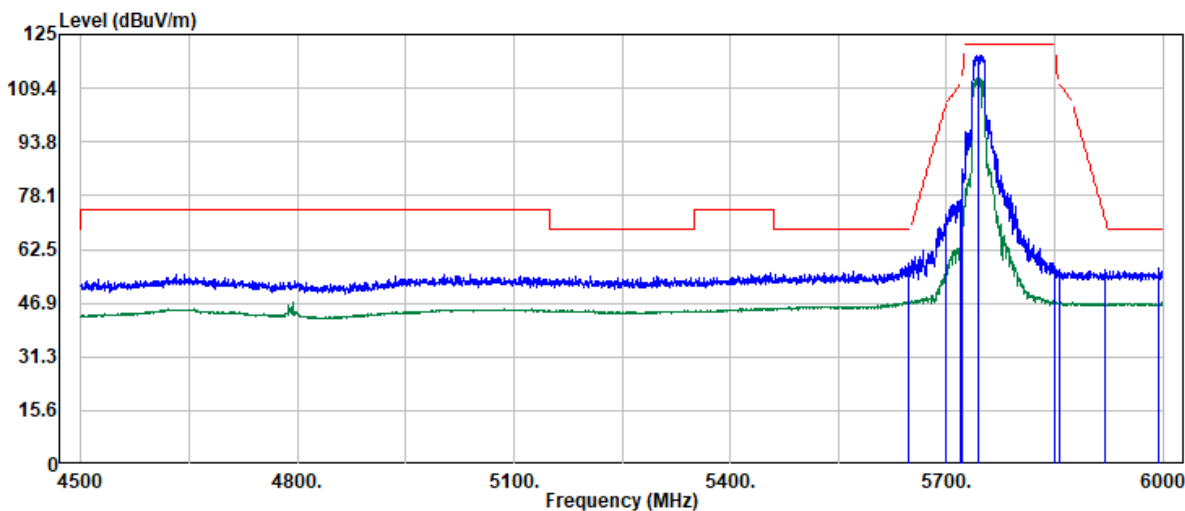

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	-----	-----	Mode
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5647.62	43.14	15.44	58.58	68.20	-9.62	Peak
5700.00	57.21	15.54	72.75	105.20	-32.45	Peak
5719.09	61.25	15.59	76.84	110.55	-33.71	Peak
5722.09	70.29	15.61	85.90	115.57	-29.67	Peak
5745.00	103.41	15.67	119.08	--	--	Peak
5745.00	96.55	15.67	112.22	--	--	Average
5850.05	42.16	15.46	57.62	122.09	-64.47	Peak
5855.55	41.06	15.45	56.51	110.65	-54.14	Peak
5919.03	41.15	15.43	56.58	72.60	-16.02	Peak
5995.00	41.36	15.59	56.95	68.20	-11.25	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 170 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band4_CH0
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

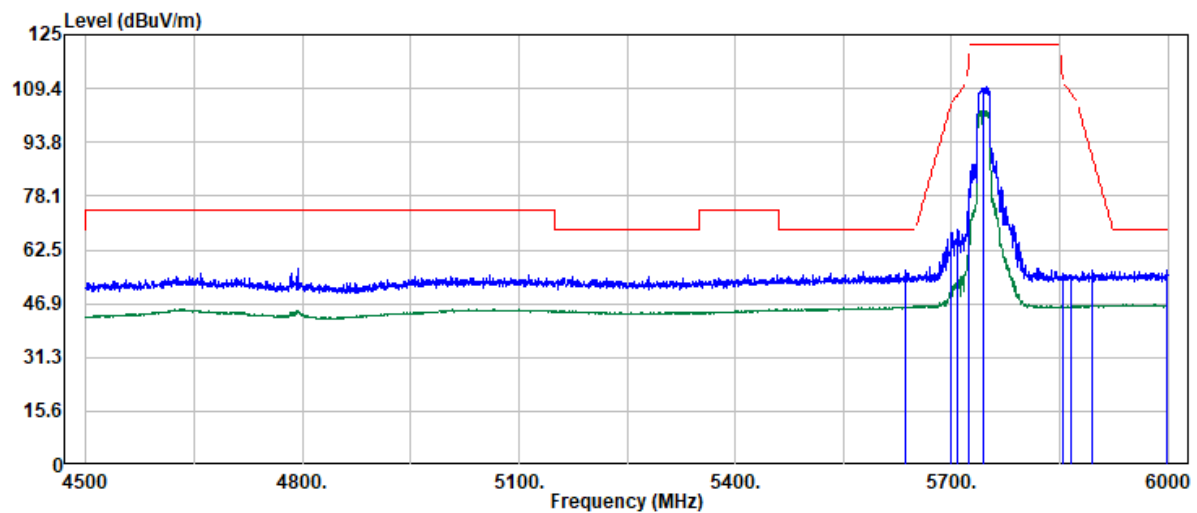

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5635.12	41.21	15.31	56.52	68.20	-11.68	Peak
5699.60	51.80	15.54	67.34	104.91	-37.57	Peak
5709.10	52.71	15.56	68.27	107.75	-39.48	Peak
5724.59	64.54	15.62	80.16	121.27	-41.11	Peak
5745.00	94.08	15.67	109.75	--	--	Peak
5745.00	87.31	15.67	102.98	--	--	Average
5854.05	40.27	15.45	55.72	112.97	-57.25	Peak
5866.54	39.79	15.43	55.22	107.57	-52.35	Peak
5896.04	41.08	15.38	56.46	89.60	-33.14	Peak
5999.50	40.89	15.60	56.49	68.20	-11.71	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 171 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band4_CH0
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

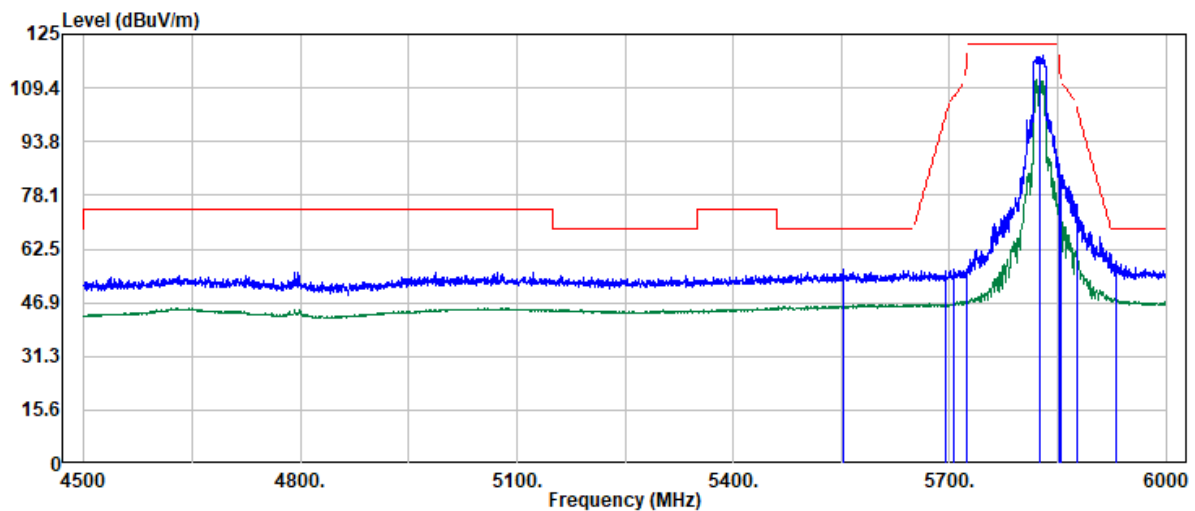

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5553.15	41.63	14.80	56.43	68.20	-11.77	Peak
5694.10	40.54	15.54	56.08	100.85	-44.77	Peak
5706.60	41.19	15.55	56.74	107.05	-50.31	Peak
5723.09	41.23	15.61	56.84	117.85	-61.01	Peak
5825.00	103.13	15.52	118.65	--	--	Peak
5825.00	96.05	15.52	111.57	--	--	Average
5852.05	71.90	15.46	87.36	117.53	-30.17	Peak
5855.05	68.50	15.45	83.95	110.79	-26.84	Peak
5876.54	60.26	15.41	75.67	104.05	-28.38	Peak
5932.02	43.51	15.47	58.98	68.20	-9.22	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 172 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band4_CH0
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

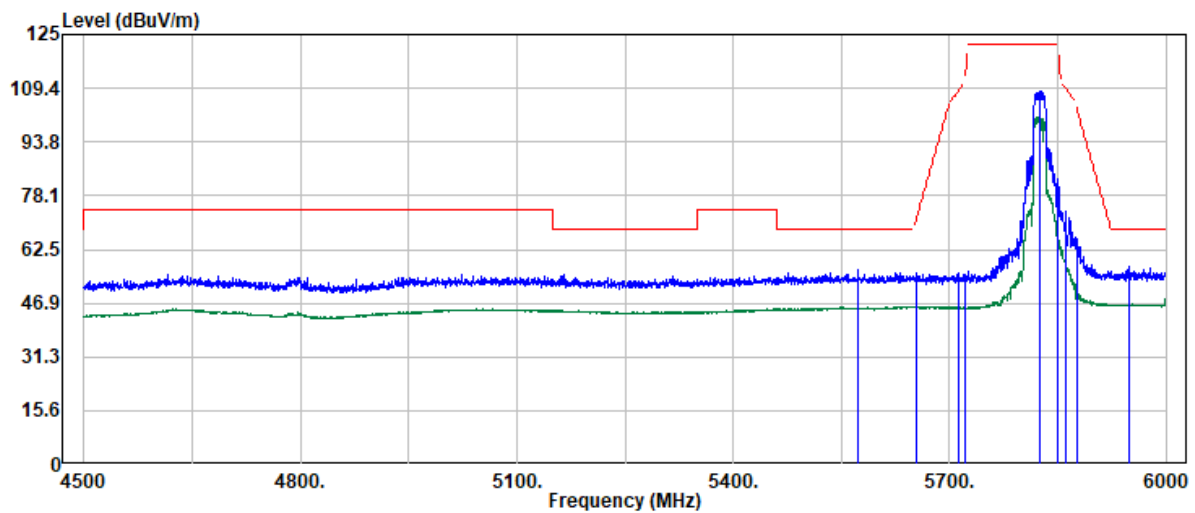


Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5573.14	41.93	14.86	56.79	68.20	-11.41	Peak
5654.12	40.34	15.48	55.82	71.26	-15.44	Peak
5713.60	39.92	15.58	55.50	109.01	-53.51	Peak
5722.09	39.54	15.61	55.15	115.57	-60.42	Peak
5825.00	93.14	15.52	108.66	--	--	Peak
5825.00	85.57	15.52	101.09	--	--	Average
5850.05	67.59	15.46	83.05	122.09	-39.04	Peak
5860.55	58.08	15.45	73.53	109.25	-35.72	Peak
5876.04	50.23	15.41	65.64	104.43	-38.79	Peak
5948.02	41.90	15.52	57.42	68.20	-10.78	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 173 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/59
Frequency	: 5825 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

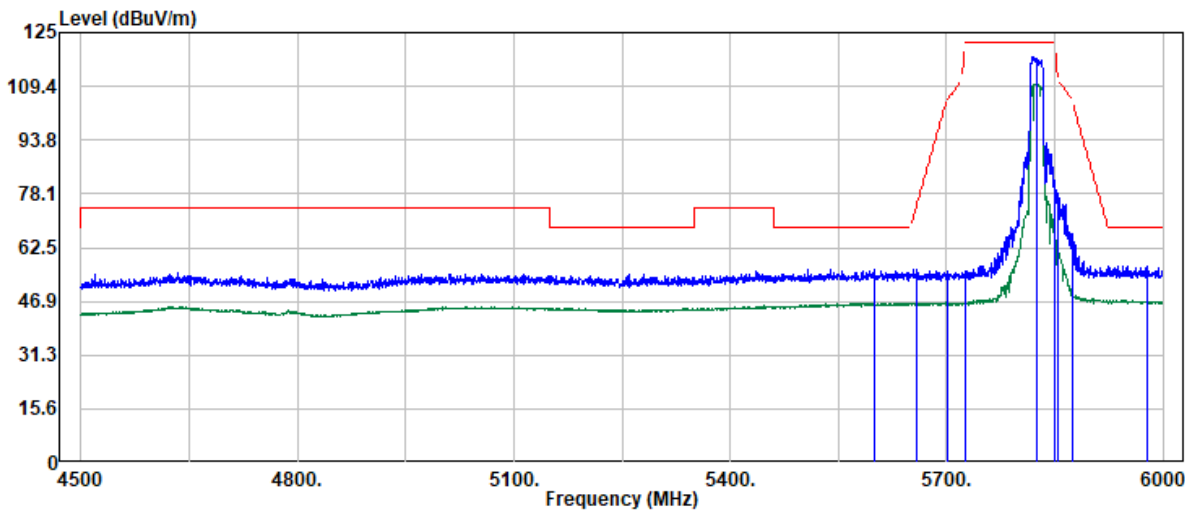

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5600.63	41.40	14.95	56.35	68.20	-11.85	Peak
5658.11	40.72	15.48	56.20	74.23	-18.03	Peak
5701.10	40.32	15.55	55.87	105.51	-49.64	Peak
5725.00	40.18	15.62	55.80	122.20	-66.40	Peak
5825.00	102.27	15.52	117.79	--	--	Peak
5825.00	94.51	15.52	110.03	--	--	Average
5850.05	64.49	15.46	79.95	122.09	-42.14	Peak
5855.05	61.97	15.45	77.42	110.79	-33.37	Peak
5875.54	50.87	15.41	66.28	104.80	-38.52	Peak
5978.51	41.74	15.57	57.31	68.20	-10.89	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 174 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-04
Temp./Humi. : 24.3/59
Antenna Pol. : Horizontal
Engineer : Ben.Yang
Test Chamber : 966A

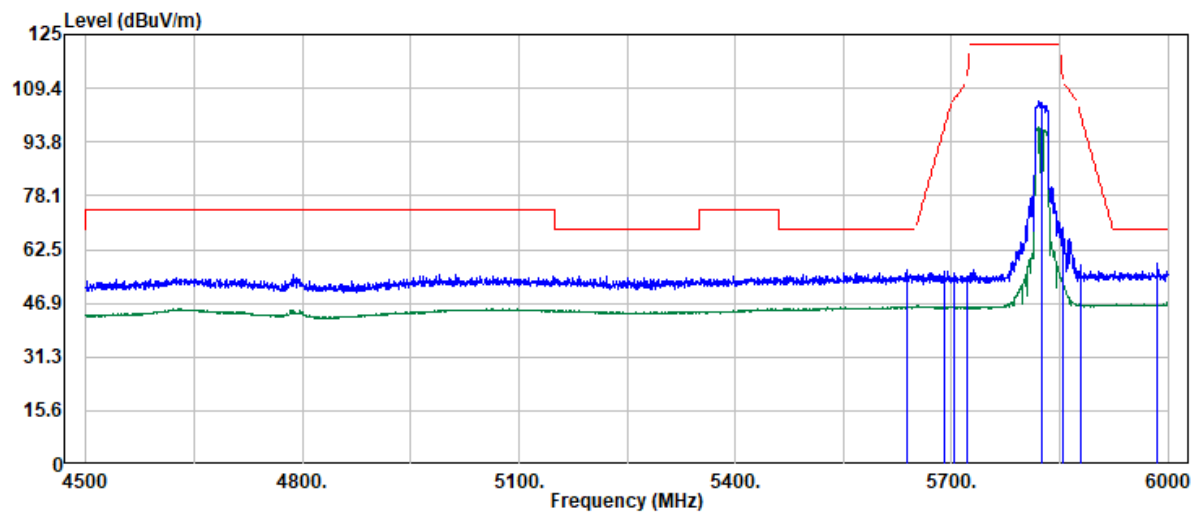


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	-----	-----	Mode
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5637.62	41.07	15.34	56.41	68.20	-11.79	Peak
5691.10	40.59	15.53	56.12	98.64	-42.52	Peak
5703.60	40.28	15.56	55.84	106.21	-50.37	Peak
5722.09	39.31	15.61	54.92	115.57	-60.65	Peak
5825.00	90.06	15.52	105.58	--	--	Peak
5825.00	82.70	15.52	98.22	--	--	Average
5853.55	53.56	15.45	69.01	114.11	-45.10	Peak
5855.05	50.47	15.45	65.92	110.79	-44.87	Peak
5878.54	42.45	15.40	57.85	102.57	-44.72	Peak
5984.51	42.73	15.58	58.31	68.20	-9.89	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 175 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/59
Frequency	: 5745 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

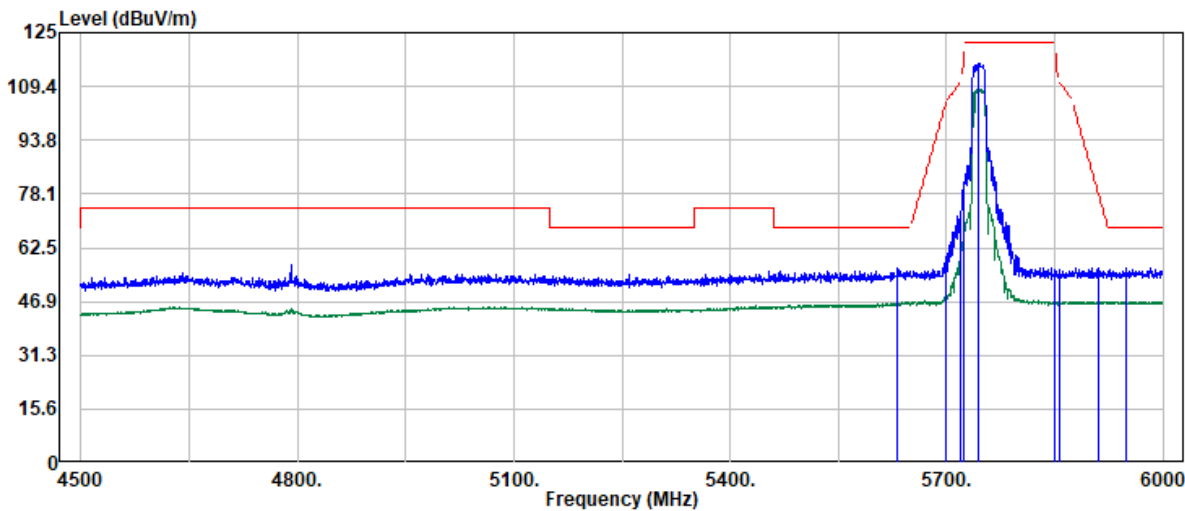


Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5632.62	41.42	15.29	56.71	68.20	-11.49	Peak
5699.10	44.56	15.54	60.10	104.54	-44.44	Peak
5720.00	56.28	15.60	71.88	110.80	-38.92	Peak
5724.59	66.07	15.62	81.69	121.27	-39.58	Peak
5745.00	100.51	15.67	116.18	--	--	Peak
5745.00	92.95	15.67	108.62	--	--	Average
5850.05	40.72	15.46	56.18	122.09	-65.91	Peak
5856.05	40.53	15.45	55.98	110.51	-54.53	Peak
5910.03	41.26	15.40	56.66	79.24	-22.58	Peak
5948.02	41.12	15.52	56.64	68.20	-11.56	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 176 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/59
Frequency	: 5745 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

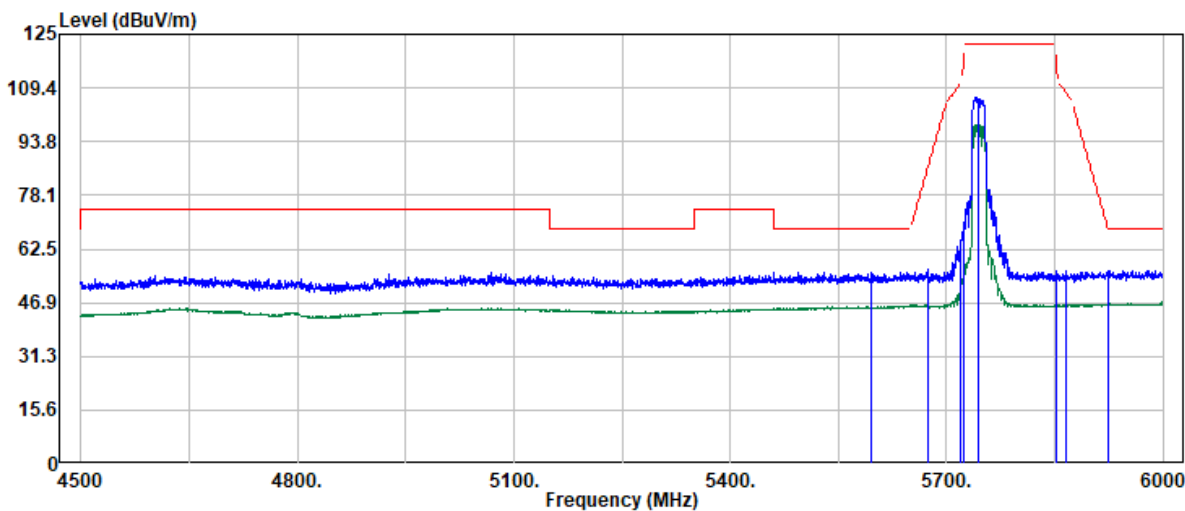

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5596.14	40.98	14.92	55.90	68.20	-12.30	Peak
5674.61	40.87	15.51	56.38	86.45	-30.07	Peak
5720.00	49.19	15.60	64.79	110.80	-46.01	Peak
5723.59	54.60	15.61	70.21	118.99	-48.78	Peak
5745.00	90.95	15.67	106.62	--	--	Peak
5745.00	83.10	15.67	98.77	--	--	Average
5853.05	40.79	15.45	56.24	115.25	-59.01	Peak
5866.04	40.66	15.43	56.09	107.71	-51.62	Peak
5925.03	40.72	15.45	56.17	68.20	-12.03	Peak
5925.03	40.72	15.45	56.17	68.20	-12.03	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 177 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

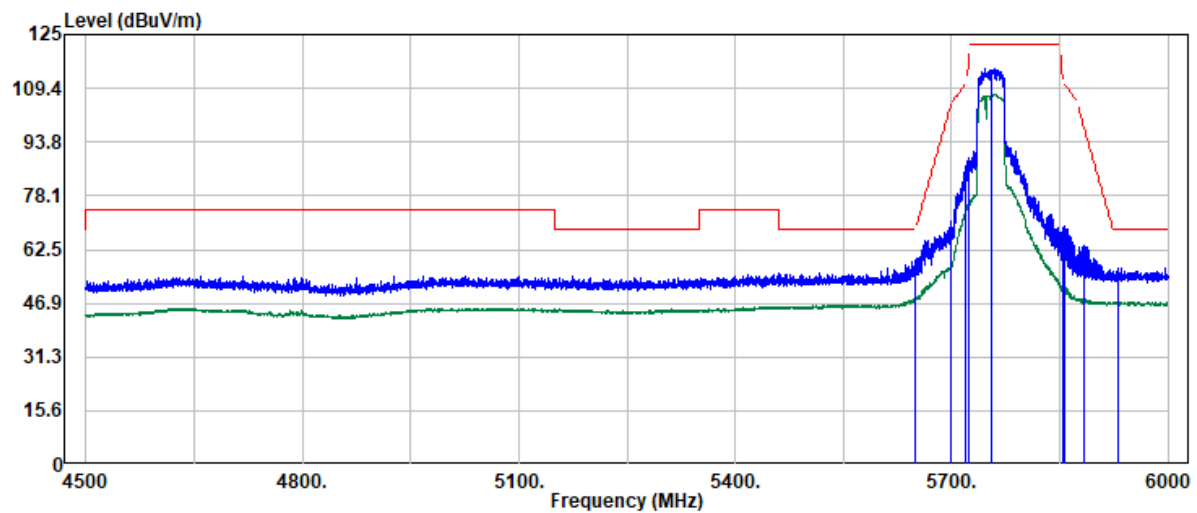

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5649.68	43.99	15.46	59.45	68.20	-8.75	Peak
5699.90	55.37	15.54	70.91	105.13	-34.22	Peak
5719.89	70.71	15.60	86.31	110.77	-24.46	Peak
5724.89	73.42	15.62	89.04	121.94	-32.90	Peak
5755.00	99.25	15.67	114.92	--	--	Peak
5755.00	91.80	15.67	107.47	--	--	Average
5853.82	53.29	15.45	68.74	113.48	-44.74	Peak
5856.32	53.78	15.46	69.24	110.43	-41.19	Peak
5884.31	48.16	15.40	63.56	98.29	-34.73	Peak
5931.78	41.80	15.47	57.27	68.20	-10.93	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 178 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

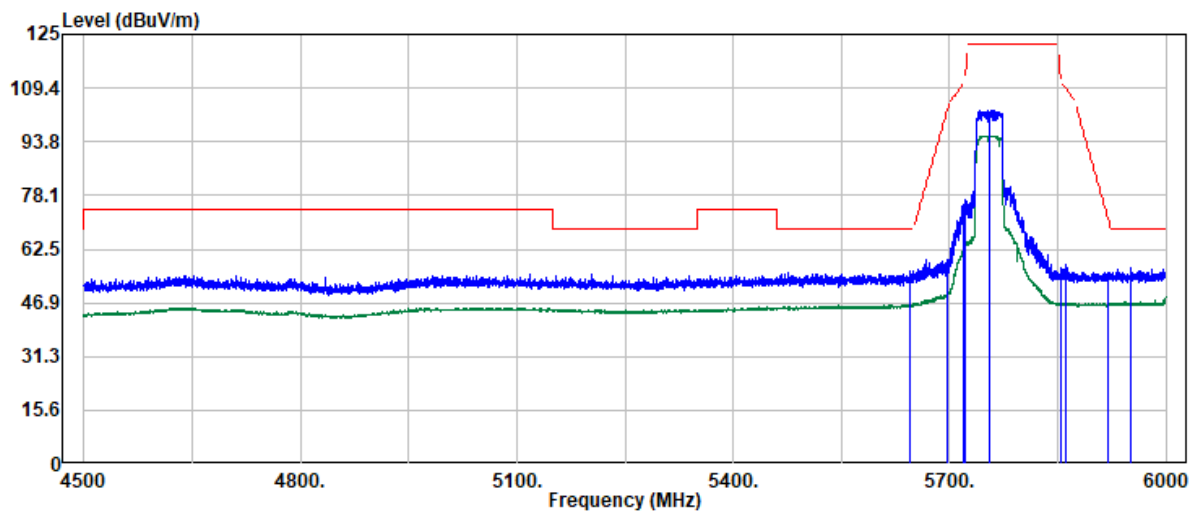


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	FS	-----	-----	Mode
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5645.93	40.50	15.42	55.92	68.20	-12.28	Peak
5697.90	43.89	15.53	59.42	103.65	-44.23	Peak
5719.89	59.77	15.60	75.37	110.77	-35.40	Peak
5722.39	61.17	15.61	76.78	116.25	-39.47	Peak
5755.00	87.35	15.67	103.02	--	--	Peak
5755.00	79.82	15.67	95.49	--	--	Average
5853.57	40.05	15.45	55.50	114.05	-58.55	Peak
5861.82	42.35	15.45	57.80	108.89	-51.09	Peak
5918.79	40.45	15.43	55.88	72.78	-16.90	Peak
5950.77	41.32	15.53	56.85	68.20	-11.35	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 179 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.4/58
Frequency	: 5795 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

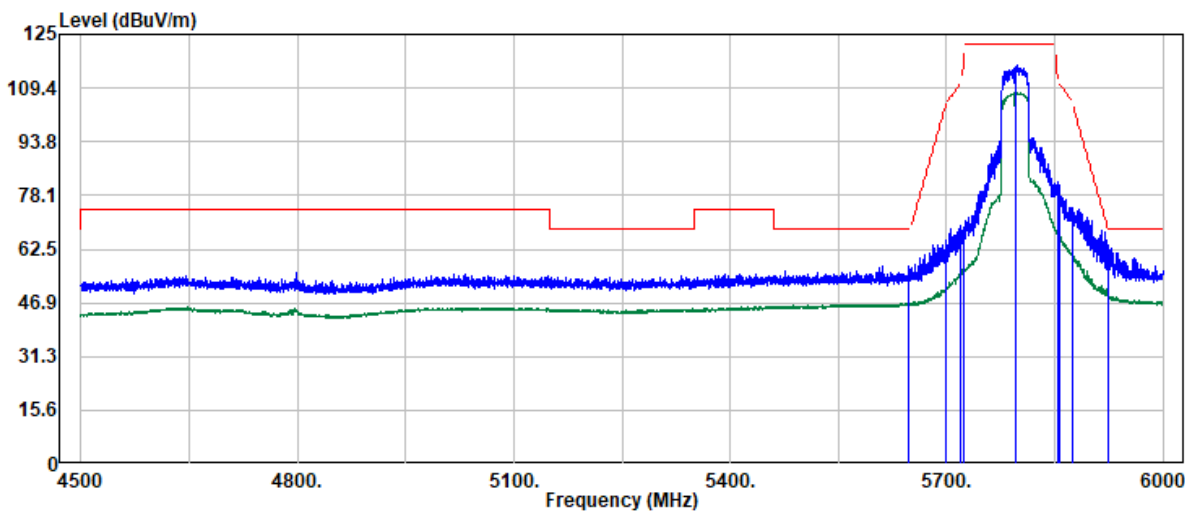


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5646.68	42.30	15.42	57.72	68.20	-10.48	Peak
5699.65	49.53	15.54	65.07	104.94	-39.87	Peak
5719.89	53.67	15.60	69.27	110.77	-41.50	Peak
5724.64	53.17	15.62	68.79	121.37	-52.58	Peak
5795.00	100.23	15.58	115.81	--	--	Peak
5795.00	92.23	15.58	107.81	--	--	Average
5854.07	66.64	15.45	82.09	112.91	-30.82	Peak
5856.57	65.66	15.46	81.12	110.36	-29.24	Peak
5875.06	59.08	15.41	74.49	105.15	-30.66	Peak
5925.04	48.27	15.45	63.72	68.20	-4.48	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 180 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.4/58
Frequency	: 5795 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

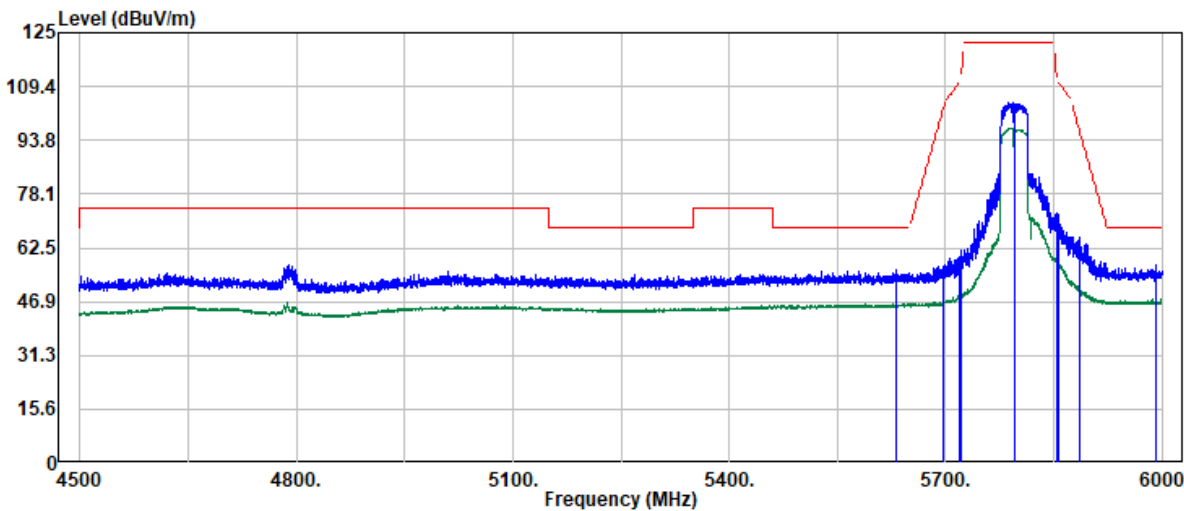

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5631.93	40.82	15.28	56.10	68.20	-12.10	Peak
5697.40	41.55	15.53	57.08	103.28	-46.20	Peak
5718.89	44.29	15.60	59.89	110.49	-50.60	Peak
5720.89	46.01	15.60	61.61	112.83	-51.22	Peak
5795.00	89.26	15.58	104.84	--	--	Peak
5795.00	81.71	15.58	97.29	--	--	Average
5853.82	57.38	15.45	72.83	113.48	-40.65	Peak
5856.57	56.81	15.46	72.27	110.36	-38.09	Peak
5886.81	50.31	15.40	65.71	96.43	-30.72	Peak
5992.25	41.78	15.60	57.38	68.20	-10.82	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 181 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 20

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

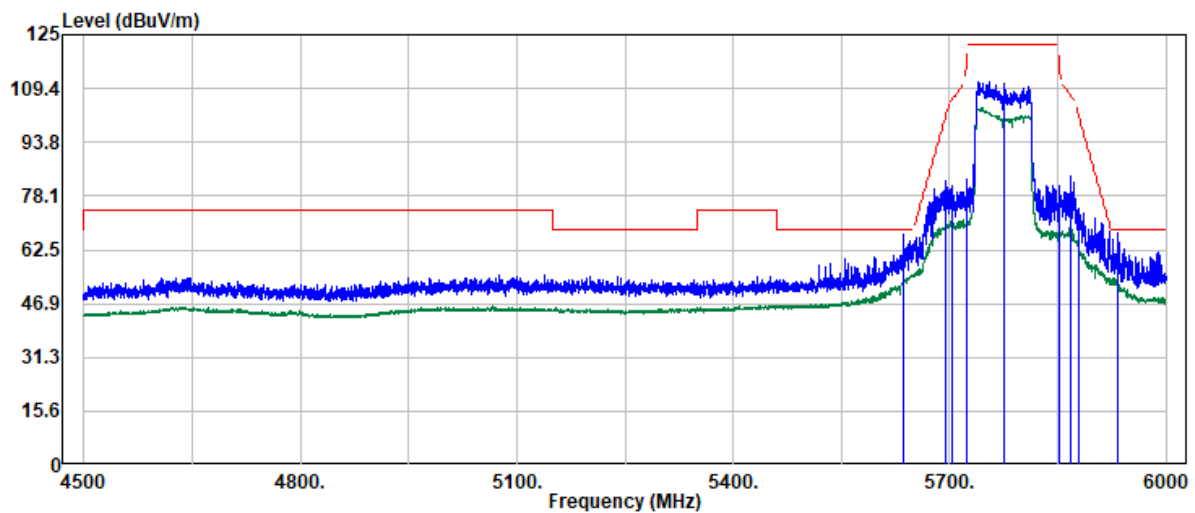

Trace: 1						
Freq	Read	Factor	Actual		Margin	Detector Mode
-----	-----		FS	Limit		
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5635.68	51.46	15.32	66.78	68.20	-1.42	Peak
5694.65	66.86	15.54	82.40	101.26	-18.86	Peak
5702.65	65.79	15.55	81.34	105.94	-24.60	Peak
5724.14	67.23	15.61	82.84	120.24	-37.40	Peak
5775.00	95.85	15.62	111.47	--	--	Peak
5775.00	88.03	15.62	103.65	--	--	Average
5852.57	65.82	15.45	81.27	116.33	-35.06	Peak
5868.32	68.67	15.42	84.09	107.07	-22.98	Peak
5878.06	59.18	15.40	74.58	102.93	-28.35	Peak
5932.78	52.05	15.47	67.52	68.20	-0.68	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 182 / 345
Rev.: 00

Project No : TM-2412000356P

Operation Band : 802.11ac80_Band4

Frequency : 5775 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 20


Test Date : 2025-02-04

Temp./Humi. : 24.4/58

Antenna Pol. : HORIZONTAL

Engineer : Tony.Chao

Test Chamber : 966A

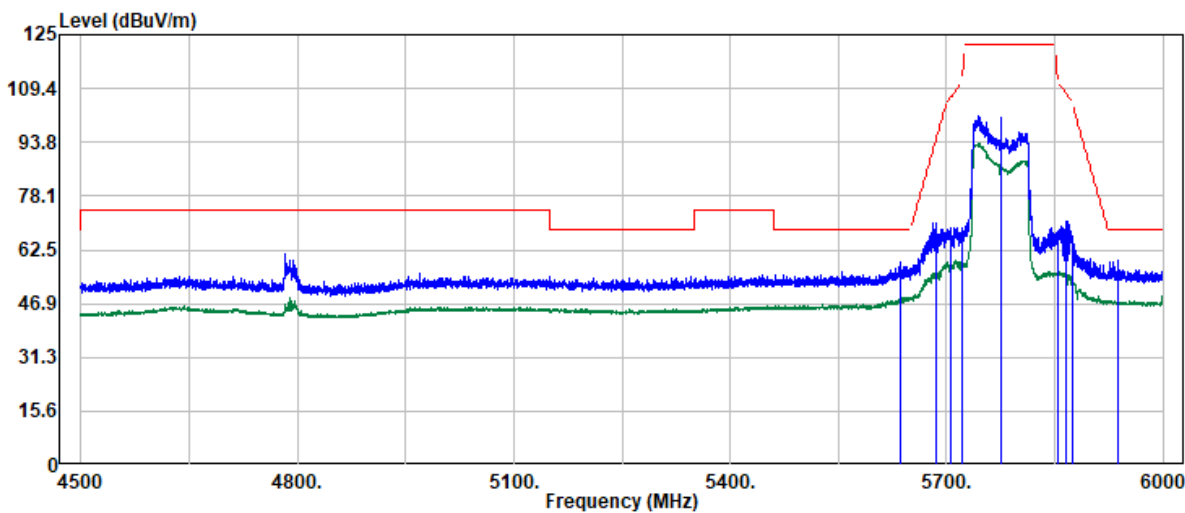

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5635.18	43.46	15.31	58.77	68.20	-9.43	Peak
5686.16	54.90	15.51	70.41	94.99	-24.58	Peak
5706.40	53.51	15.56	69.07	106.99	-37.92	Peak
5721.89	53.41	15.61	69.02	115.11	-46.09	Peak
5775.00	85.58	15.62	101.20	--	--	Peak
5775.00	77.87	15.62	93.49	--	--	Average
5853.82	52.03	15.45	67.48	113.48	-46.00	Peak
5866.57	55.56	15.43	70.99	107.56	-36.57	Peak
5875.56	49.98	15.41	65.39	104.78	-39.39	Peak
5937.78	43.84	15.49	59.33	68.20	-8.87	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 183 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

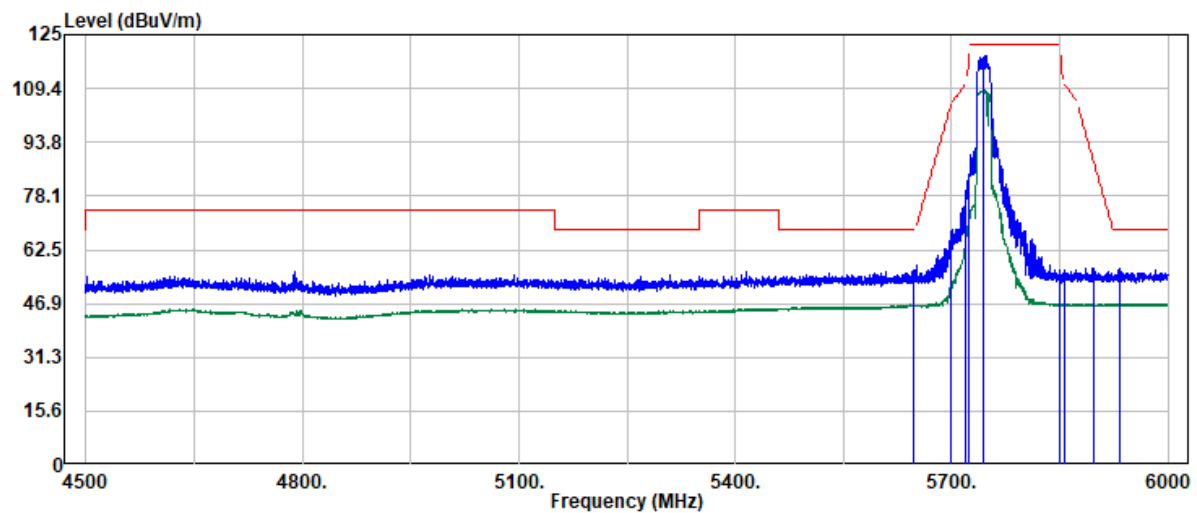

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5647.93	41.33	15.44	56.77	68.20	-11.43	Peak
5698.40	52.23	15.53	67.76	104.02	-36.26	Peak
5719.64	60.59	15.60	76.19	110.70	-34.51	Peak
5724.89	69.04	15.62	84.66	121.94	-37.28	Peak
5745.00	103.05	15.67	118.72	--	--	Peak
5745.00	93.09	15.67	108.76	--	--	Average
5850.58	40.68	15.46	56.14	120.89	-64.75	Peak
5856.32	41.20	15.46	56.66	110.43	-53.77	Peak
5896.30	41.81	15.38	57.19	89.40	-32.21	Peak
5933.53	41.38	15.48	56.86	68.20	-11.34	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 184 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

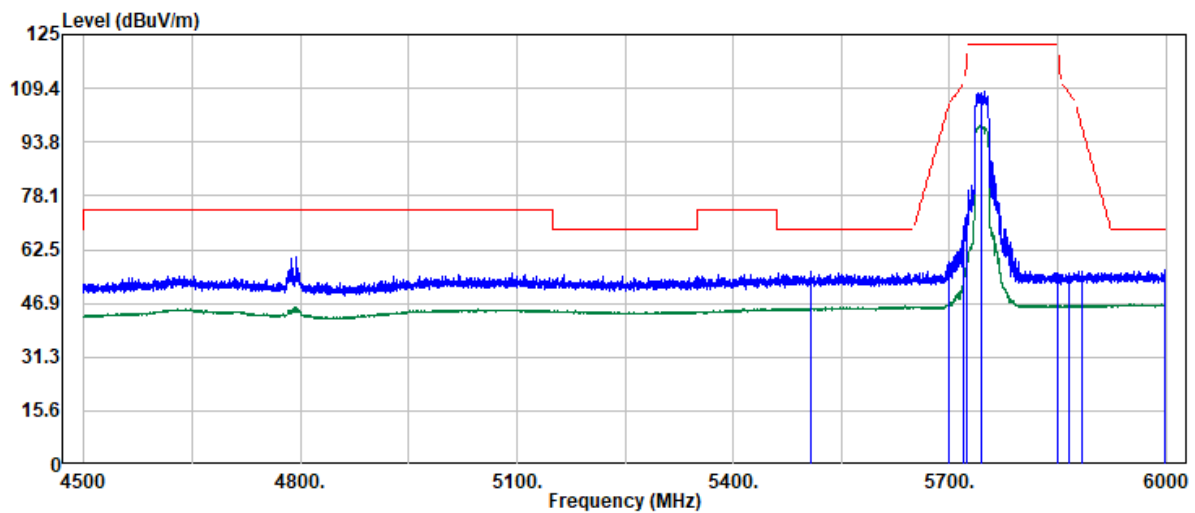

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5507.50	41.48	14.52	56.00	68.20	-12.20	Peak
5698.65	43.59	15.53	59.12	104.21	-45.09	Peak
5719.39	51.73	15.60	67.33	110.63	-43.30	Peak
5723.39	56.94	15.61	72.55	118.53	-45.98	Peak
5745.00	92.59	15.67	108.26	--	--	Peak
5745.00	82.75	15.67	98.42	--	--	Average
5850.33	40.28	15.46	55.74	121.46	-65.72	Peak
5865.07	40.24	15.43	55.67	107.98	-52.31	Peak
5883.06	40.82	15.40	56.22	99.22	-43.00	Peak
5999.50	40.88	15.60	56.48	68.20	-11.72	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 185 / 345
Rev.: 00

Project No : TM-2412000356P

Operation Band : 802.11ax20_Band4

Frequency : 5825 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 24


Test Date : 2025-02-04

Temp./Humi. : 24.4/58

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

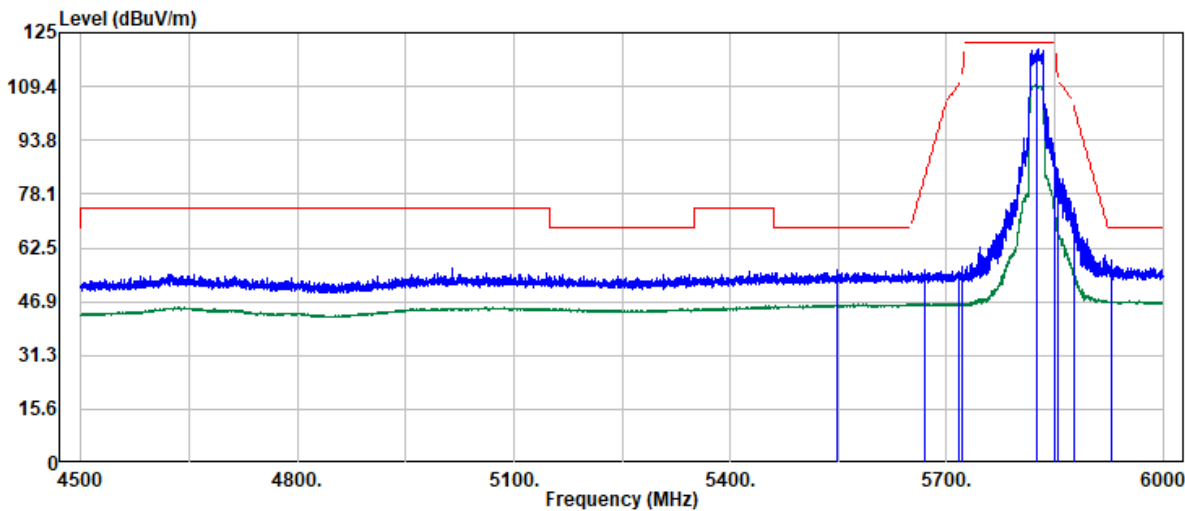


Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5548.98	41.49	14.78	56.27	68.20	-11.93	Peak
5670.92	40.85	15.49	56.34	83.72	-27.38	Peak
5716.64	40.16	15.59	55.75	109.86	-54.11	Peak
5722.14	41.42	15.61	57.03	115.68	-58.65	Peak
5825.00	104.59	15.52	120.11	--	--	Peak
5825.00	94.21	15.52	109.73	--	--	Average
5850.08	73.11	15.46	88.57	122.03	-33.46	Peak
5855.07	68.57	15.45	84.02	110.78	-26.76	Peak
5876.31	58.42	15.41	73.83	104.23	-30.40	Peak
5928.54	43.59	15.46	59.05	68.20	-9.15	Peak

Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 186 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

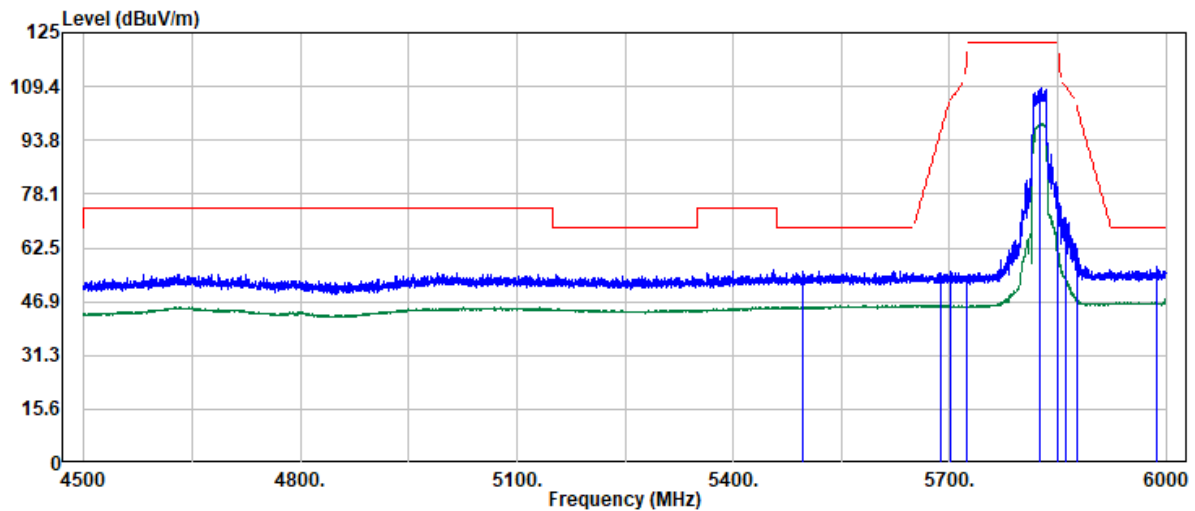

Trace: 1

Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	dBuV	dB	FS	dBm	dB	Mode
5497.00	41.08	14.48	55.56	68.20	-12.64	Peak
5688.66	39.56	15.52	55.08	96.83	-41.75	Peak
5701.15	39.90	15.55	55.45	105.52	-50.07	Peak
5723.39	38.87	15.61	54.48	118.53	-64.05	Peak
5825.00	93.33	15.52	108.85	--	--	Peak
5825.00	83.20	15.52	98.72	--	--	Average
5850.33	61.14	15.46	76.60	121.46	-44.86	Peak
5861.32	55.98	15.45	71.43	109.03	-37.60	Peak
5875.81	46.76	15.41	62.17	104.60	-42.43	Peak
5988.26	41.70	15.58	57.28	68.20	-10.92	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 187 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

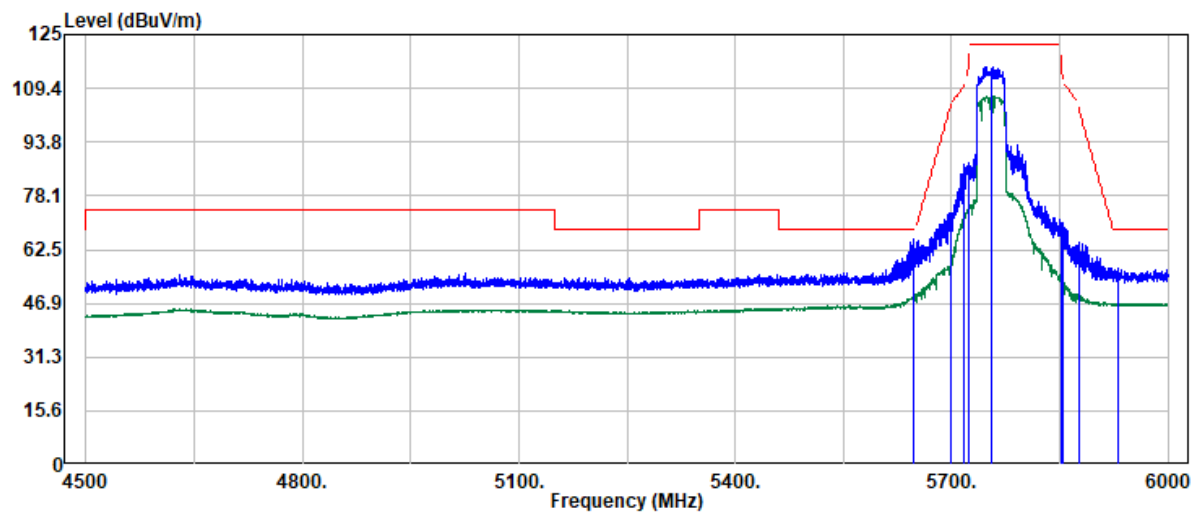


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5648.43	49.91	15.45	65.36	68.20	-2.84	Peak
5699.90	57.74	15.54	73.28	105.13	-31.85	Peak
5717.39	71.77	15.60	87.37	110.07	-22.70	Peak
5723.89	72.18	15.61	87.79	119.67	-31.88	Peak
5755.00	100.01	15.67	115.68	--	--	Peak
5755.00	91.33	15.67	107.00	--	--	Average
5852.32	54.75	15.46	70.21	116.90	-46.69	Peak
5855.32	54.73	15.45	70.18	110.71	-40.53	Peak
5876.56	49.22	15.41	64.63	104.04	-39.41	Peak
5930.79	41.69	15.47	57.16	68.20	-11.04	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 188 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax40_Band4	Temp./Humi.	: 24.4/58
Frequency	: 5755 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

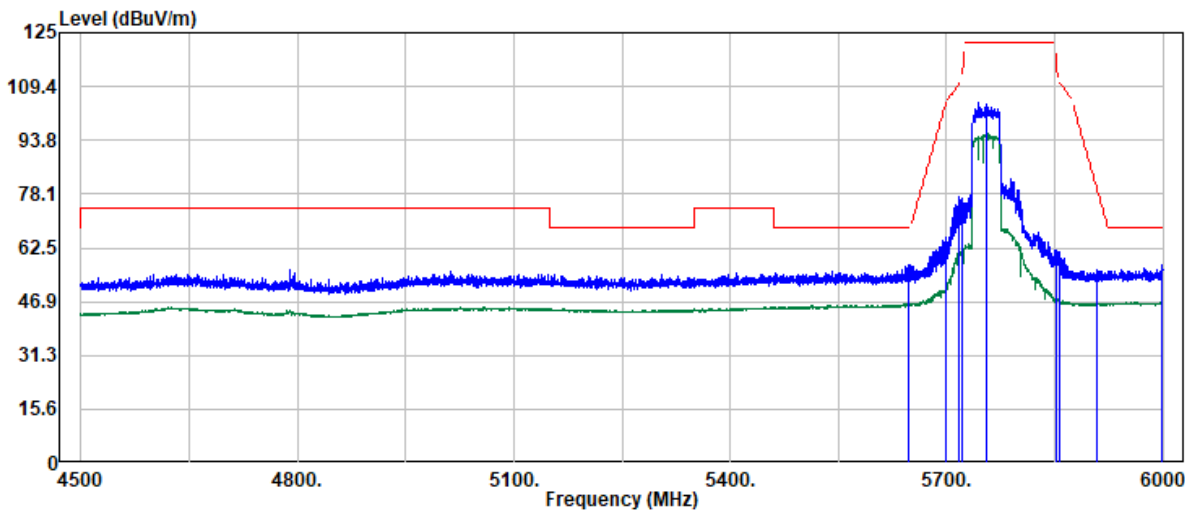


Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5647.18	42.04	15.43	57.47	68.20	-10.73	Peak
5698.90	49.88	15.54	65.42	104.39	-38.97	Peak
5717.14	61.85	15.60	77.45	110.00	-32.55	Peak
5720.64	61.08	15.61	76.69	112.26	-35.57	Peak
5755.00	89.24	15.67	104.91	--	--	Peak
5755.00	79.88	15.67	95.55	--	--	Average
5852.82	46.15	15.45	61.60	115.76	-54.16	Peak
5855.57	45.87	15.45	61.32	110.64	-49.32	Peak
5909.05	40.50	15.40	55.90	79.97	-24.07	Peak
5999.25	41.92	15.60	57.52	68.20	-10.68	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 189 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11ax40_Band4	Temp./Humi.	: 24.4/58
Frequency	: 5795 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

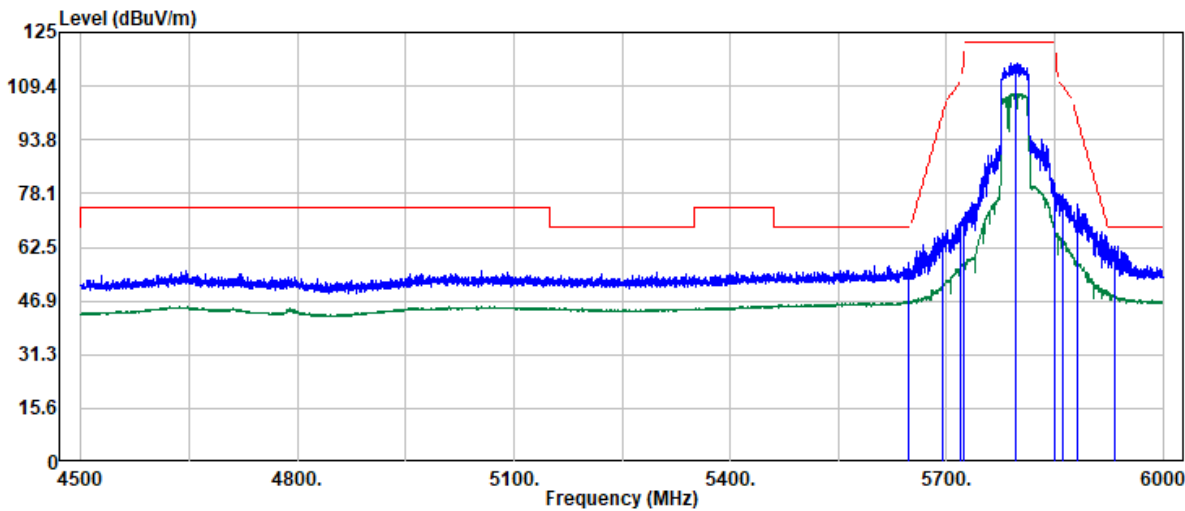

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5648.18	42.76	15.45	58.21	68.20	-9.99	Peak
5693.65	51.14	15.53	66.67	100.52	-33.85	Peak
5719.39	53.86	15.60	69.46	110.63	-41.17	Peak
5724.39	55.74	15.62	71.36	120.81	-49.45	Peak
5795.00	100.34	15.58	115.92	--	--	Peak
5795.00	91.72	15.58	107.30	--	--	Average
5850.33	63.37	15.46	78.83	121.46	-42.63	Peak
5861.32	62.43	15.45	77.88	109.03	-31.15	Peak
5881.81	59.53	15.41	74.94	100.14	-25.20	Peak
5932.28	47.15	15.47	62.62	68.20	-5.58	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 190 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

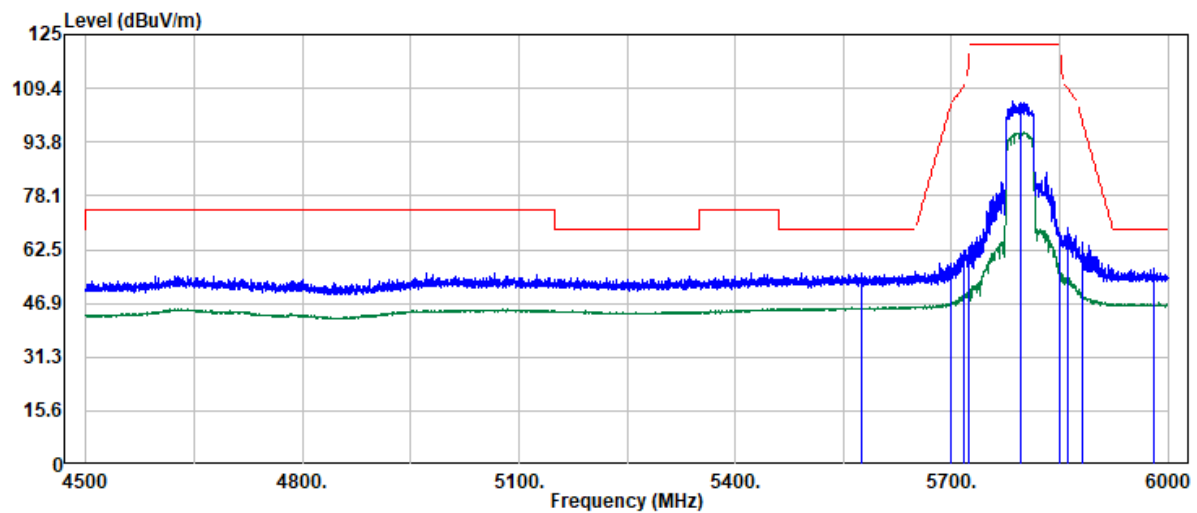

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5575.71	40.72	14.86	55.58	68.20	-12.62	Peak
5699.40	43.18	15.54	58.72	104.76	-46.04	Peak
5718.14	46.86	15.61	62.47	110.28	-47.81	Peak
5724.89	46.89	15.62	62.51	121.94	-59.43	Peak
5795.00	90.15	15.58	105.73	--	--	Peak
5795.00	80.92	15.58	96.50	--	--	Average
5850.58	51.74	15.46	67.20	120.89	-53.69	Peak
5861.07	53.39	15.45	68.84	109.10	-40.26	Peak
5881.31	49.18	15.41	64.59	100.51	-35.92	Peak
5980.26	41.54	15.58	57.12	68.20	-11.08	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 191 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 21

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

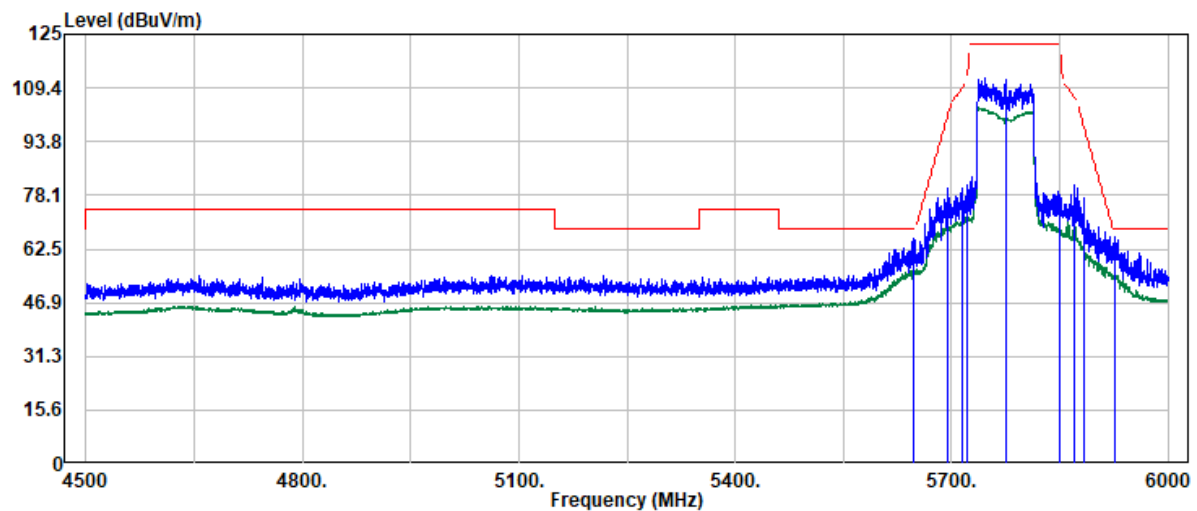

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5647.93	50.13	15.44	65.57	68.20	-2.63	Peak
5694.15	64.54	15.54	80.08	100.89	-20.81	Peak
5715.39	64.48	15.59	80.07	109.51	-29.44	Peak
5721.89	65.37	15.61	80.98	115.11	-34.13	Peak
5775.00	96.71	15.62	112.33	--	--	Peak
5775.00	87.97	15.62	103.59	--	--	Average
5850.83	62.76	15.46	78.22	120.32	-42.10	Peak
5870.07	65.64	15.43	81.07	106.58	-25.51	Peak
5882.81	61.99	15.40	77.39	99.40	-22.01	Peak
5926.04	50.39	15.45	65.84	68.20	-2.36	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 192 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 21

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

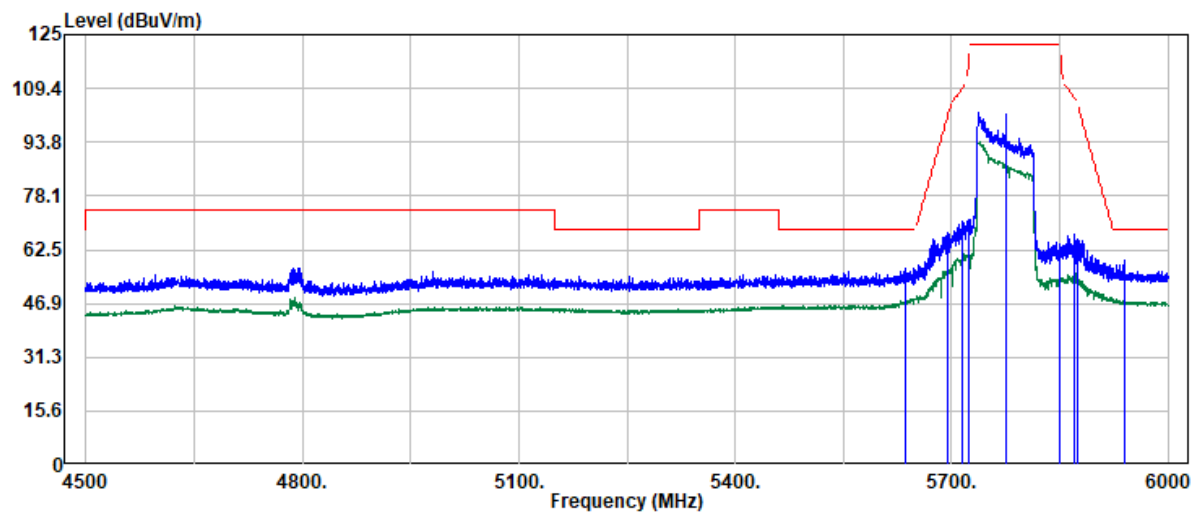

Trace: 1						
Freq	Read		Actual			Detector
-----	Level	Factor	FS	Limit	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBm	dBm	dB	PK/QP/AV
5637.18	41.90	15.33	57.23	68.20	-10.97	Peak
5694.65	52.00	15.54	67.54	101.26	-33.72	Peak
5715.64	55.00	15.60	70.60	109.58	-38.98	Peak
5724.64	55.40	15.62	71.02	121.37	-50.35	Peak
5775.00	86.60	15.62	102.22	--	--	Peak
5775.00	78.24	15.62	93.86	--	--	Average
5850.08	48.62	15.46	64.08	122.03	-57.95	Peak
5870.07	51.42	15.43	66.85	106.58	-39.73	Peak
5875.31	49.78	15.41	65.19	104.97	-39.78	Peak
5939.78	43.76	15.50	59.26	68.20	-8.94	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 193 / 345
Rev.: 00

TX Test Data

Project No : TM-2412000356P

Operation Band : 802.11a_Band1_CH0

Frequency : 5180 MHz

Operation Mode : TX

EUT Pol : H

Setting :


Test Date : 2025-02-18

Temp./Humi. : 24.5/57

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

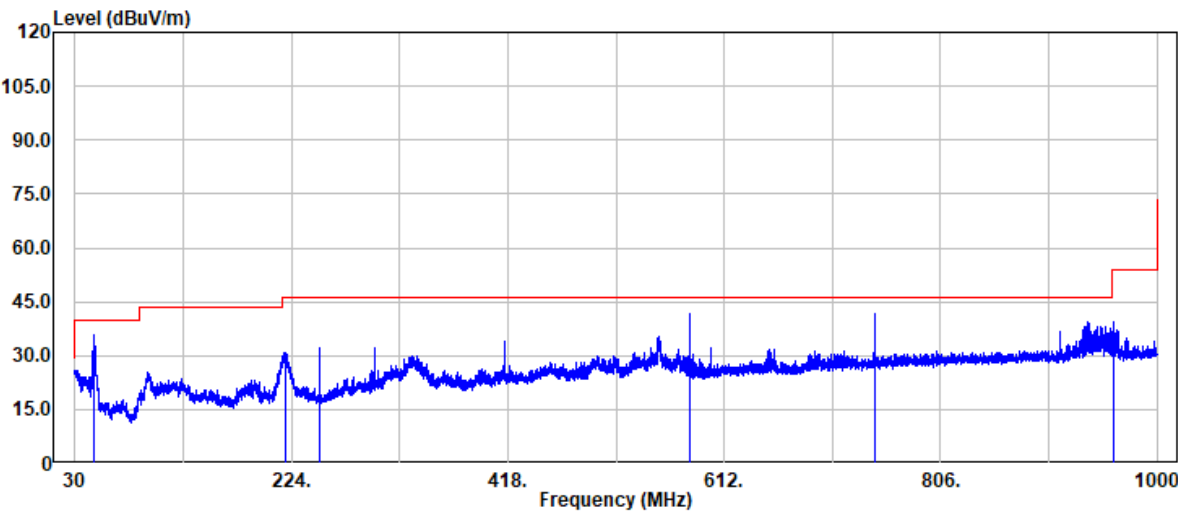


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
46.80	50.40	-14.67	35.73	40.00	-4.27	Peak
218.10	43.39	-12.57	30.82	46.00	-15.18	Peak
249.00	43.54	-11.40	32.14	46.00	-13.86	Peak
581.00	45.06	-3.24	41.82	46.00	-4.18	Peak
747.00	41.77	-0.33	41.44	46.00	-4.56	Peak
961.80	37.08	2.53	39.61	54.00	-14.39	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 194 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-18
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.5/57
Frequency	: 5180 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

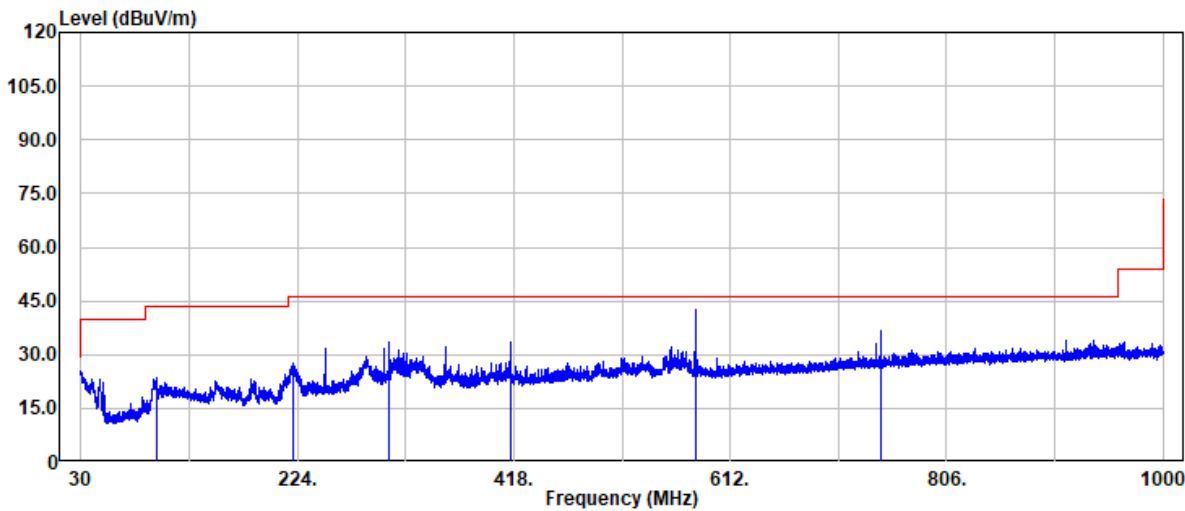


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
97.30	37.80	-14.23	23.57	43.50	-19.93	Peak
220.80	39.98	-12.48	27.50	46.00	-18.50	Peak
306.80	42.58	-9.20	33.38	46.00	-12.62	Peak
415.00	39.92	-6.31	33.61	46.00	-12.39	Peak
581.00	45.65	-3.24	42.41	46.00	-3.59	Peak
747.00	37.04	-0.33	36.71	46.00	-9.29	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 195 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5180 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

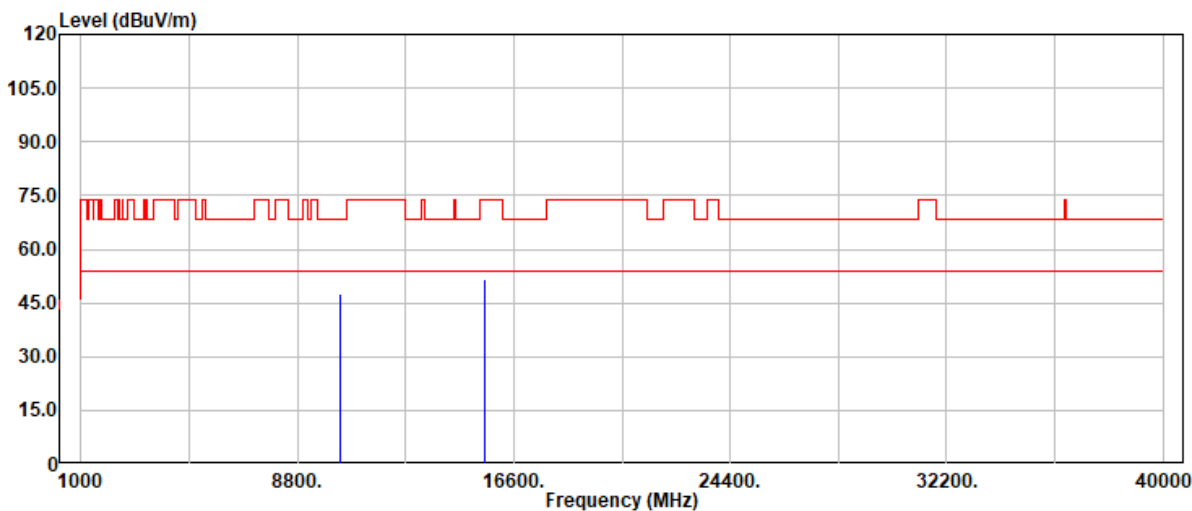


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	34.21	13.12	47.33	68.20	-20.87	Peak
15540.00	36.05	15.77	51.82	74.00	-22.18	Peak
15540.00	25.73	15.77	41.50	54.00	-12.50	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 196 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5180 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

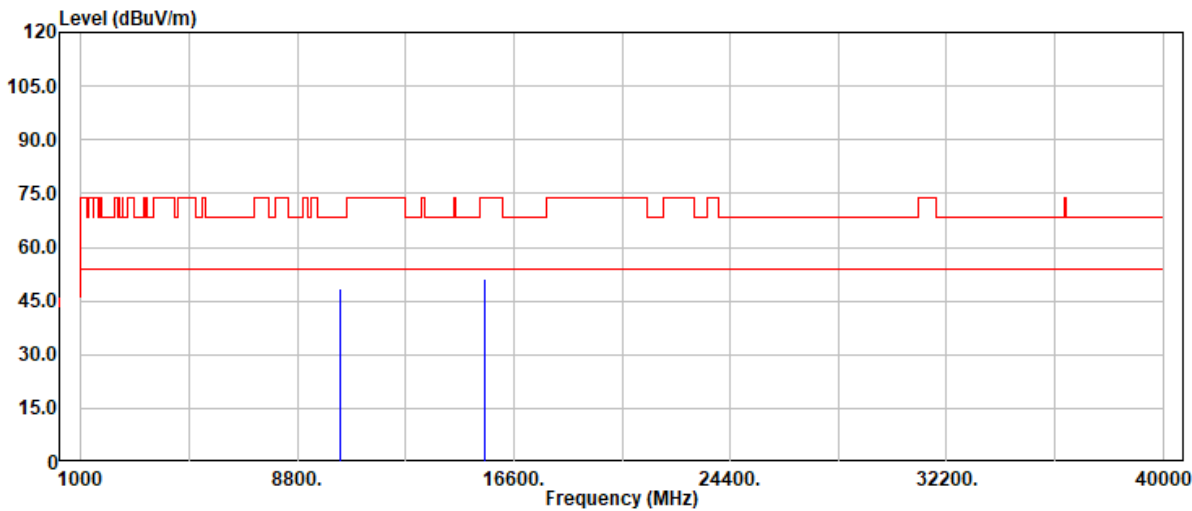


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.46	13.12	48.58	68.20	-19.62	Peak
15540.00	35.57	15.77	51.34	74.00	-22.66	Peak
15540.00	25.56	15.77	41.33	54.00	-12.67	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 197 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5220 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

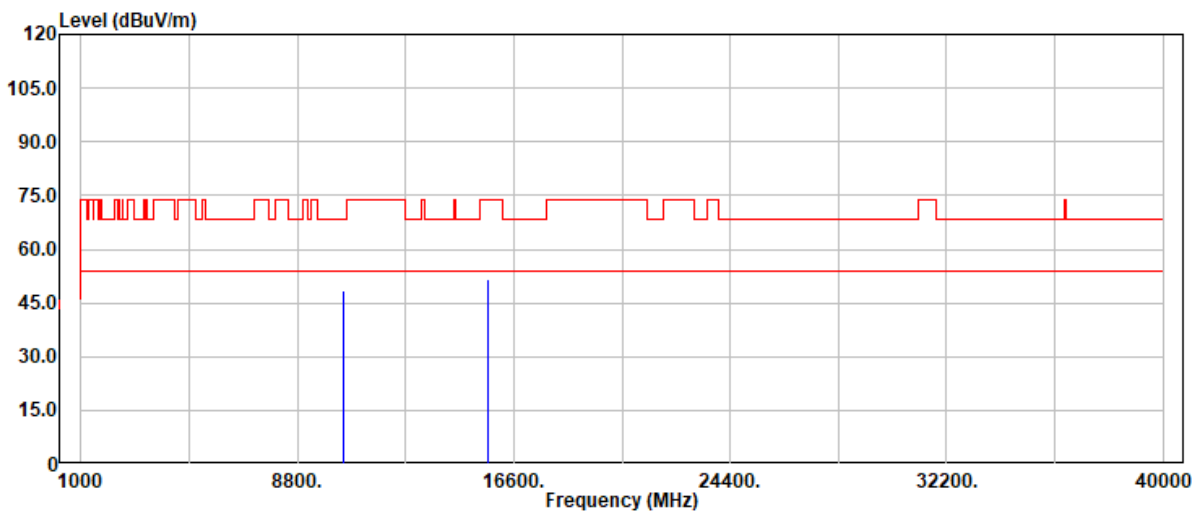


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.33	12.96	48.29	68.20	-19.91	Peak
15660.00	35.96	15.74	51.70	74.00	-22.30	Peak
15660.00	27.08	15.74	42.82	54.00	-11.18	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 198 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5220 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

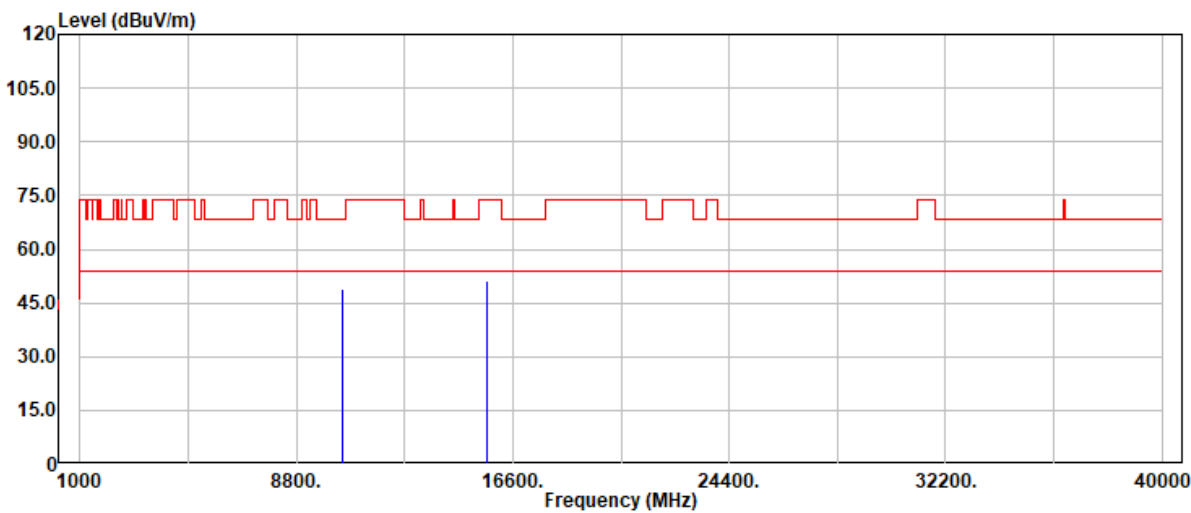

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.90	12.96	48.86	68.20	-19.34	Peak
15660.00	35.57	15.74	51.31	74.00	-22.69	Peak
15660.00	26.57	15.74	42.31	54.00	-11.69	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 199 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band1_CH0
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

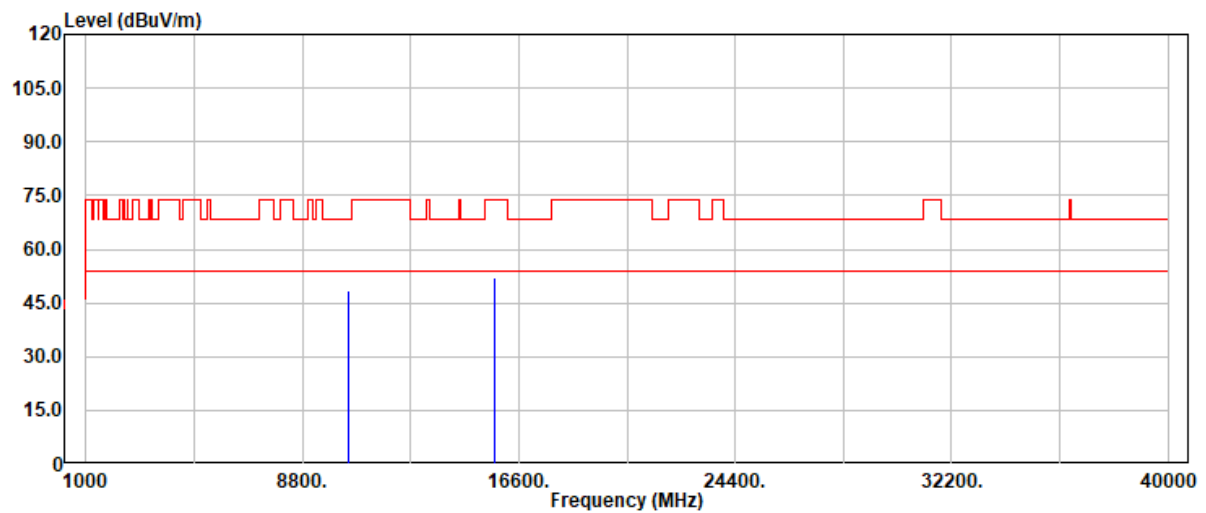


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	35.57	12.92	48.49	68.20	-19.71	Peak
15720.00	35.82	16.27	52.09	74.00	-21.91	Peak
15720.00	27.17	16.27	43.44	54.00	-10.56	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 200 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band1_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5240 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

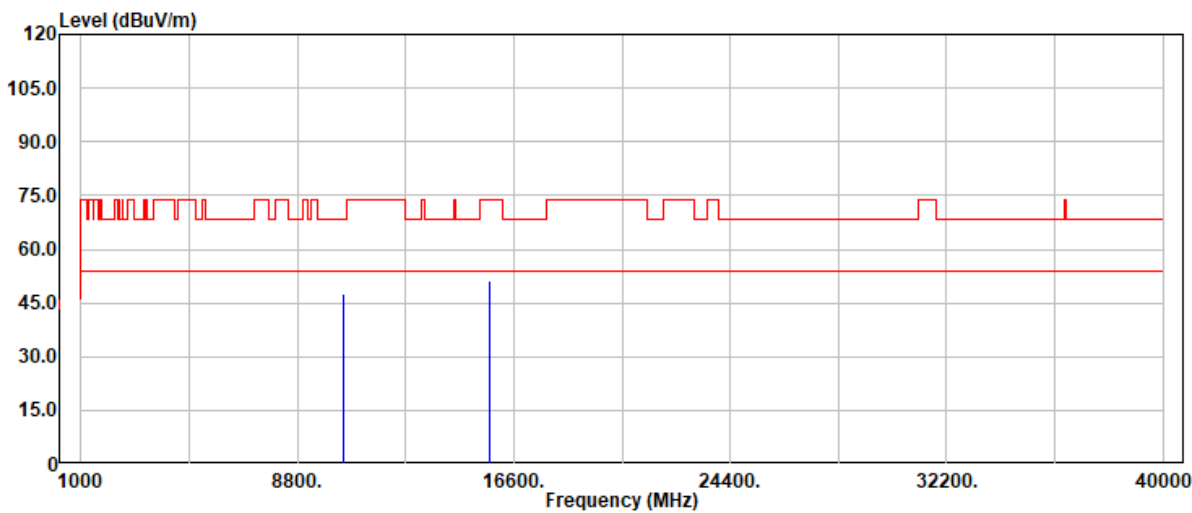


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.83	12.92	47.75	68.20	-20.45	Peak
15720.00	34.91	16.27	51.18	74.00	-22.82	Peak
15720.00	26.74	16.27	43.01	54.00	-10.99	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 201 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5180 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

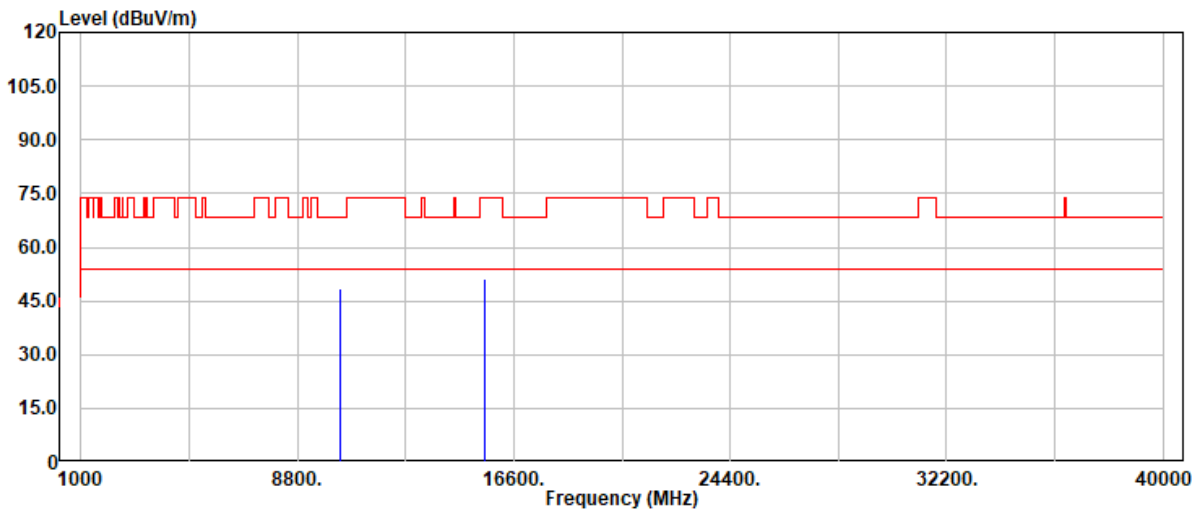


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.36	13.12	48.48	68.20	-19.72	Peak
15540.00	35.28	15.77	51.05	74.00	-22.95	Peak
15540.00	25.50	15.77	41.27	54.00	-12.73	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 202 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5180 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19		

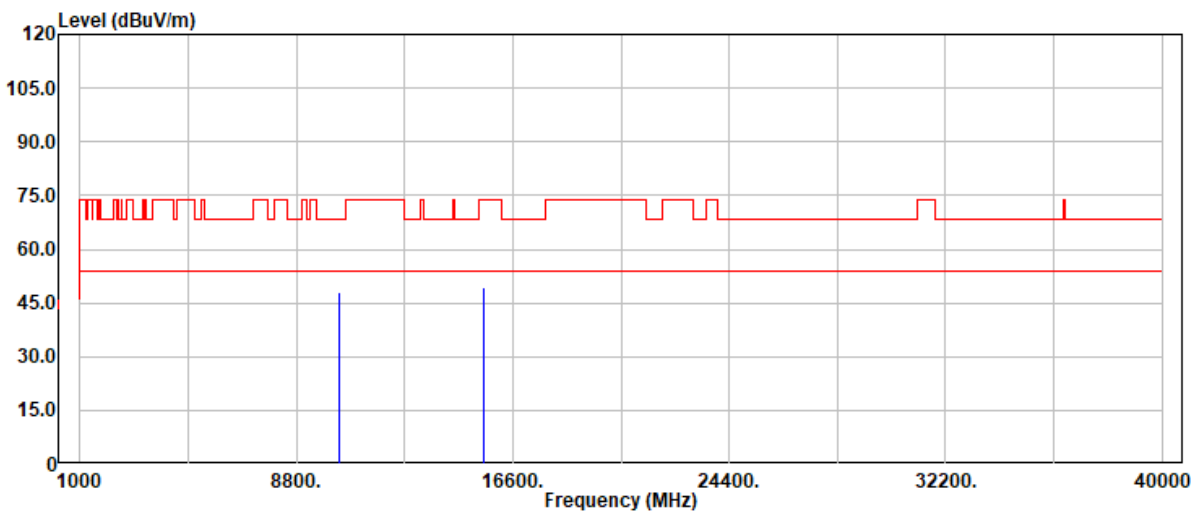

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	34.70	13.12	47.82	68.20	-20.38	Peak
15540.00	33.51	15.77	49.28	74.00	-24.72	Peak
15540.00	25.24	15.77	41.01	54.00	-12.99	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 203 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

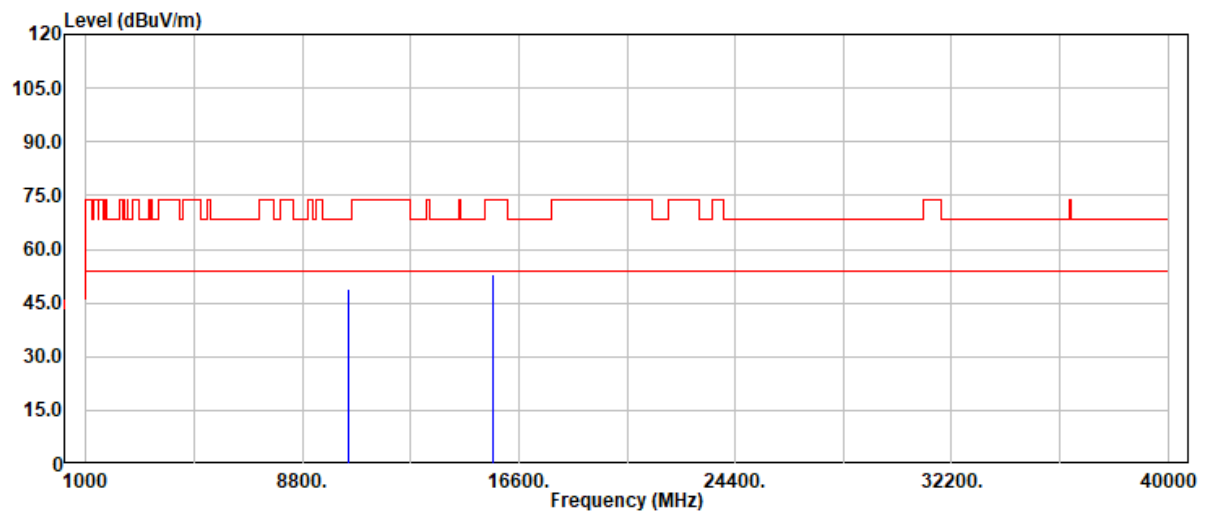


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.98	12.96	48.94	68.20	-19.26	Peak
15660.00	37.35	15.74	53.09	74.00	-20.91	Peak
15660.00	25.75	15.74	41.49	54.00	-12.51	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 204 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5220 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

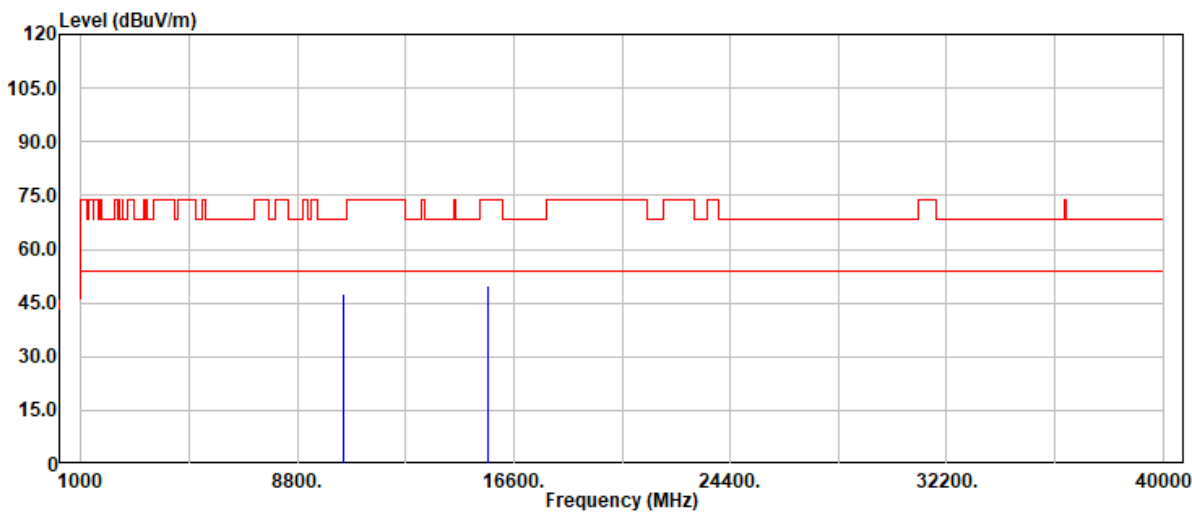


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.45	12.96	47.41	68.20	-20.79	Peak
15660.00	33.91	15.74	49.65	74.00	-24.35	Peak
15660.00	26.02	15.74	41.76	54.00	-12.24	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 205 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5240 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

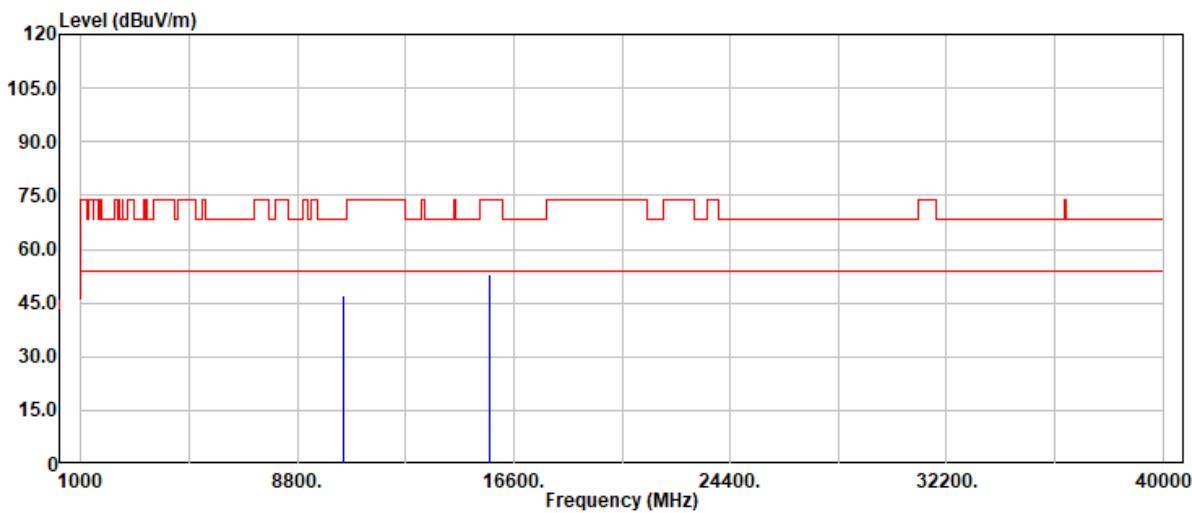


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.36	12.92	47.28	68.20	-20.92	Peak
15720.00	36.50	16.27	52.77	74.00	-21.23	Peak
15720.00	27.61	16.27	43.88	54.00	-10.12	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 206 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.4/58
Frequency	: 5240 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

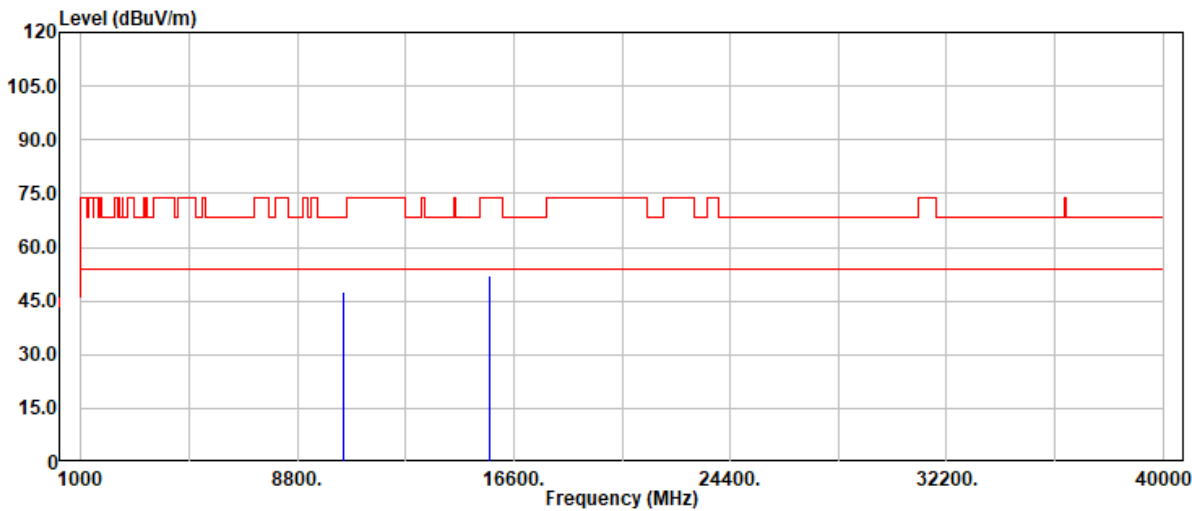


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	34.83	12.92	47.75	68.20	-20.45	Peak
15720.00	35.75	16.27	52.02	74.00	-21.98	Peak
15720.00	26.10	16.27	42.37	54.00	-11.63	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 207 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5190 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

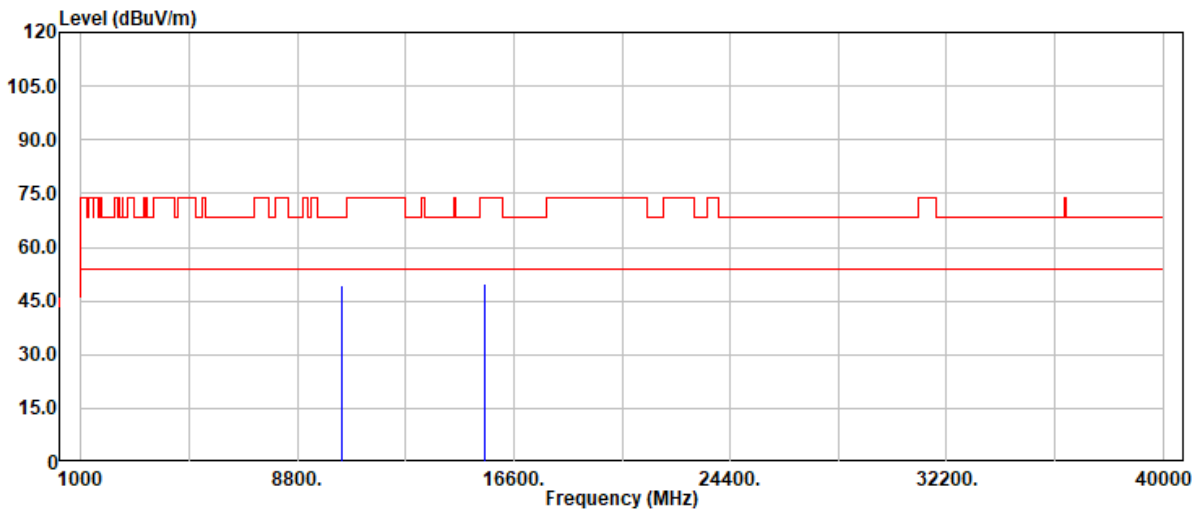


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	36.46	13.02	49.48	68.20	-18.72	Peak
15570.00	34.45	15.58	50.03	74.00	-23.97	Peak
15570.00	26.56	15.58	42.14	54.00	-11.86	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 208 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5190 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 16.5		

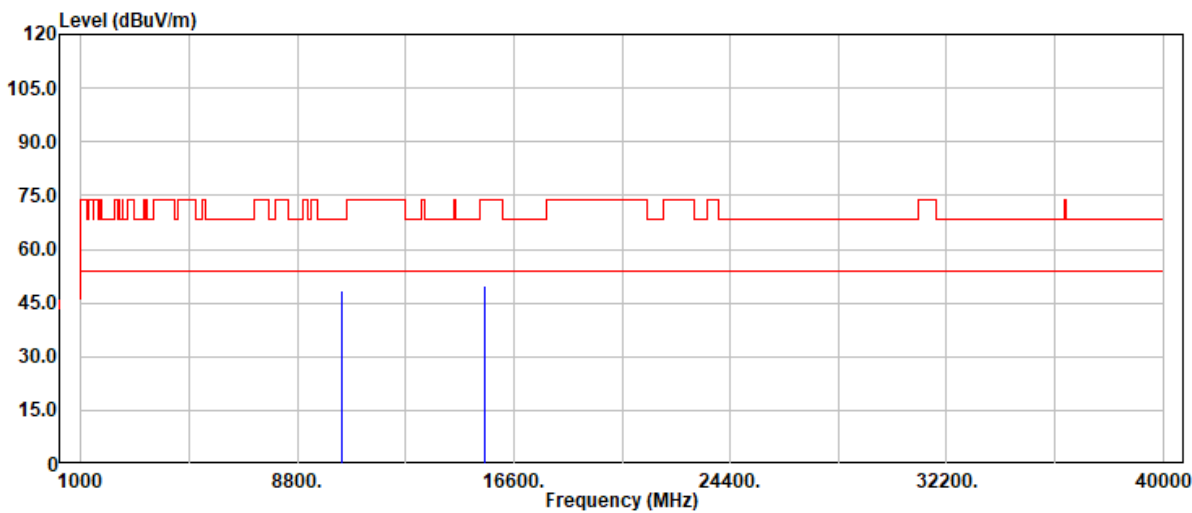

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	35.43	13.02	48.45	68.20	-19.75	Peak
15570.00	34.06	15.58	49.64	74.00	-24.36	Peak
15570.00	26.55	15.58	42.13	54.00	-11.87	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 209 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

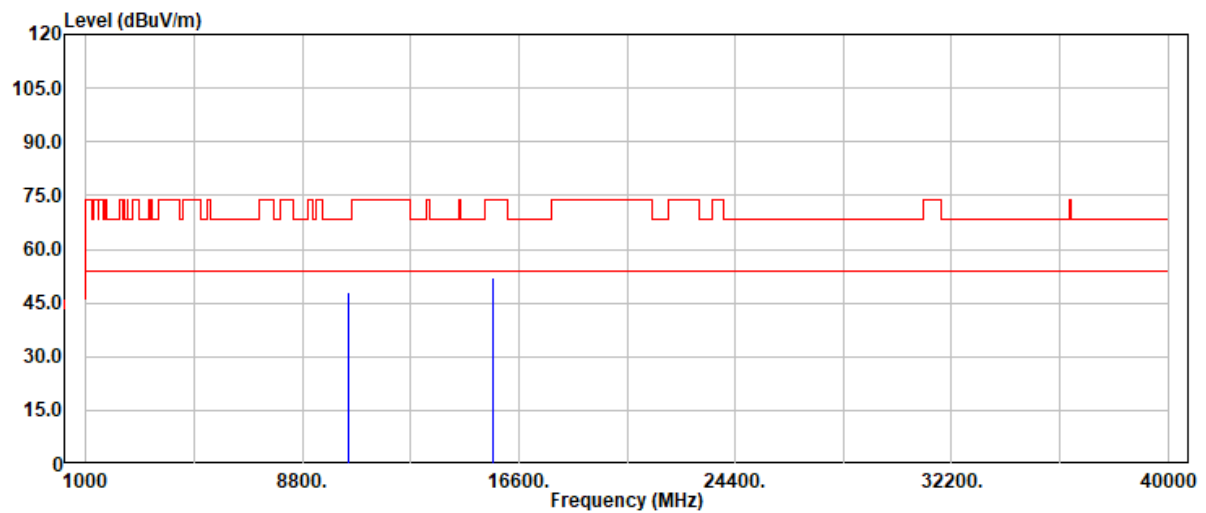

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	35.04	12.96	48.00	68.20	-20.20	Peak
15690.00	36.08	16.03	52.11	74.00	-21.89	Peak
15690.00	27.25	16.03	43.28	54.00	-10.72	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 210 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : Horizontal
Engineer : Tony.Chao
Test Chamber : 966A

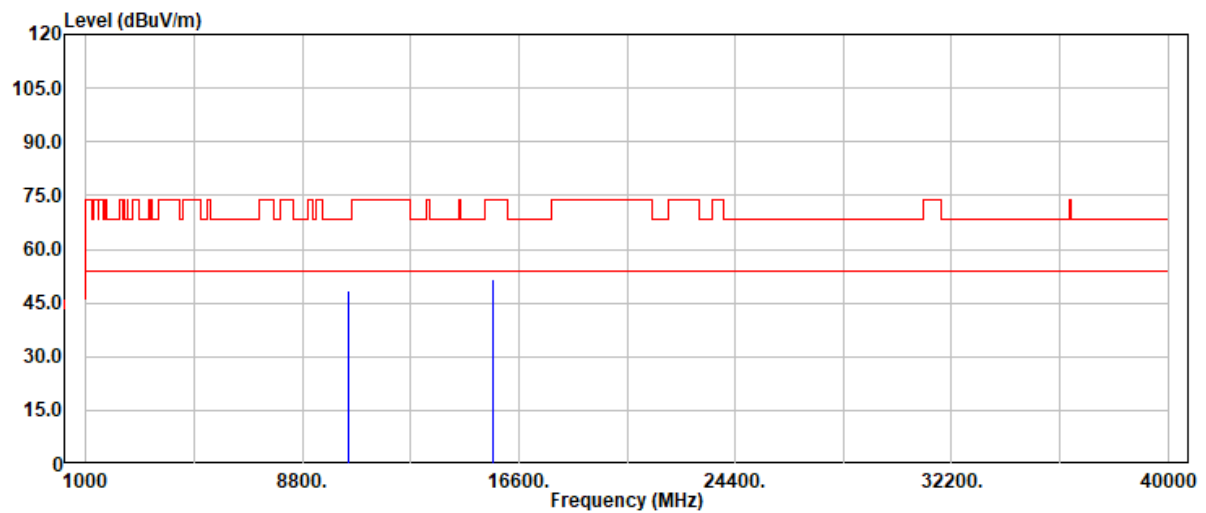


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	35.28	12.96	48.24	68.20	-19.96	Peak
15690.00	35.44	16.03	51.47	74.00	-22.53	Peak
15690.00	26.85	16.03	42.88	54.00	-11.12	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 211 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ac80_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5210 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 15		

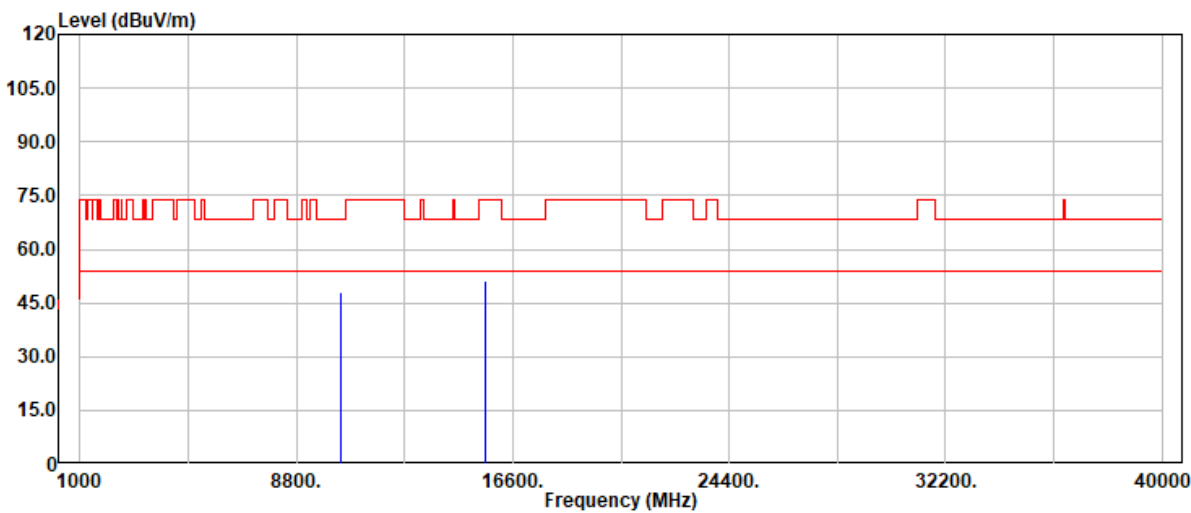


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	35.11	12.94	48.05	68.20	-20.15	Peak
15630.00	35.45	15.58	51.03	74.00	-22.97	Peak
15630.00	26.47	15.58	42.05	54.00	-11.95	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 212 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ac80_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5210 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 15		

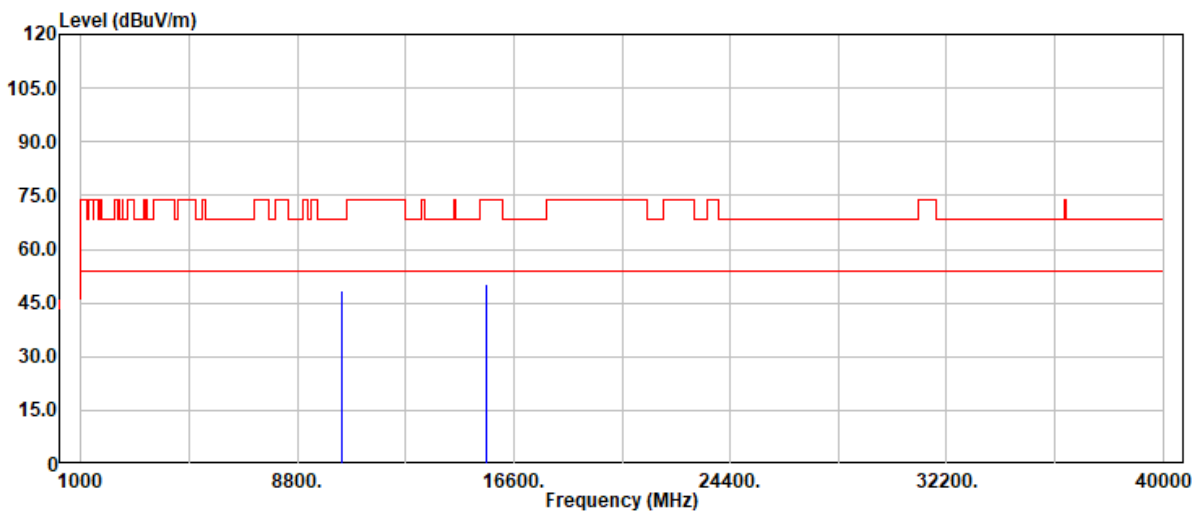


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	35.46	12.94	48.40	68.20	-19.80	Peak
15630.00	34.85	15.58	50.43	74.00	-23.57	Peak
15630.00	26.52	15.58	42.10	54.00	-11.90	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 213 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5180 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

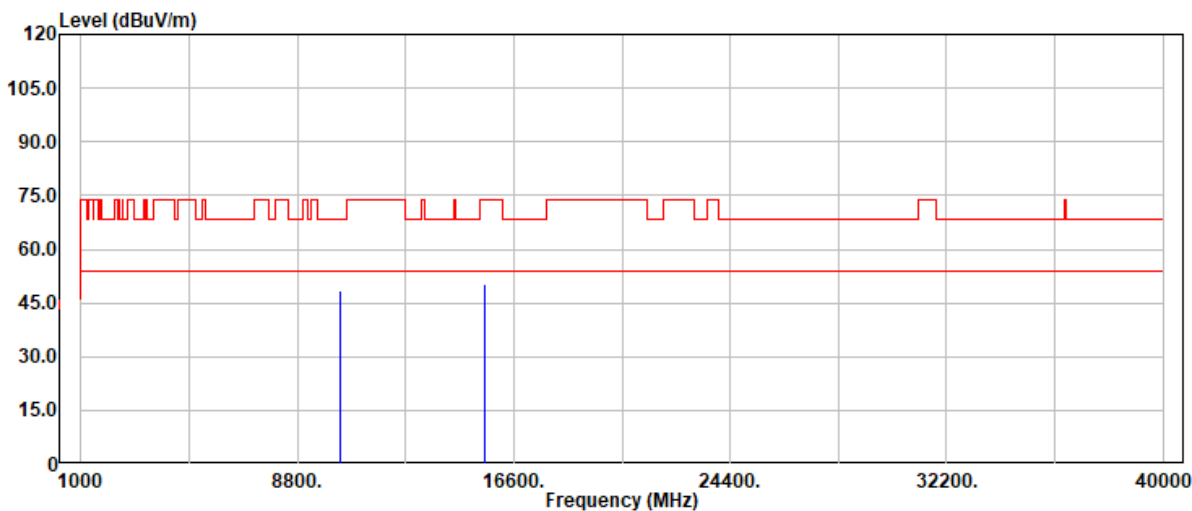


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.23	13.12	48.35	68.20	-19.85	Peak
15540.00	34.39	15.77	50.16	74.00	-23.84	Peak
15540.00	28.25	15.77	44.02	54.00	-9.98	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 214 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5180 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20		

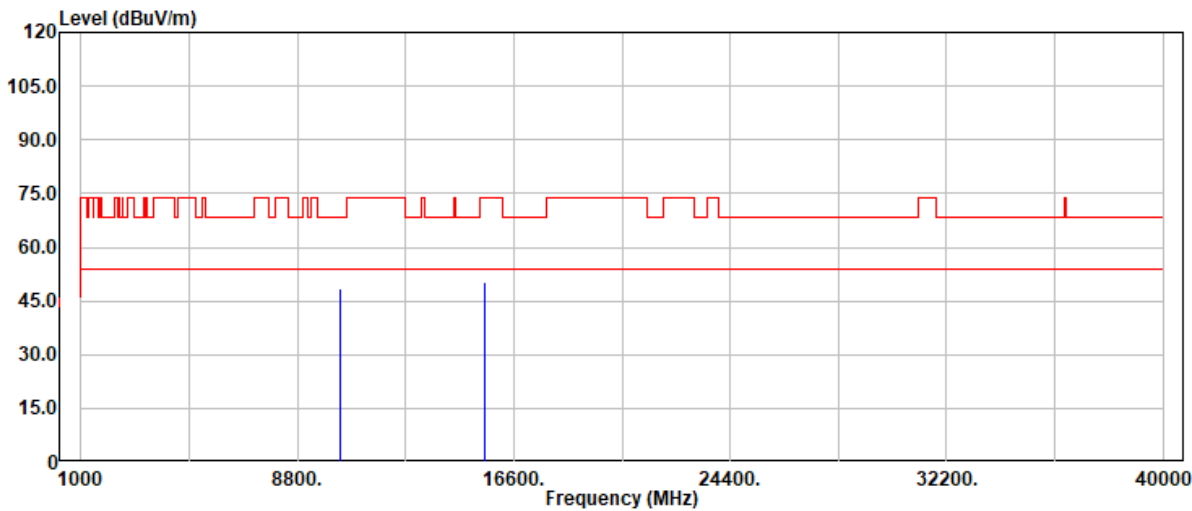

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.29	13.12	48.41	68.20	-19.79	Peak
15540.00	34.69	15.77	50.46	74.00	-23.54	Peak
15540.00	28.14	15.77	43.91	54.00	-10.09	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 215 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

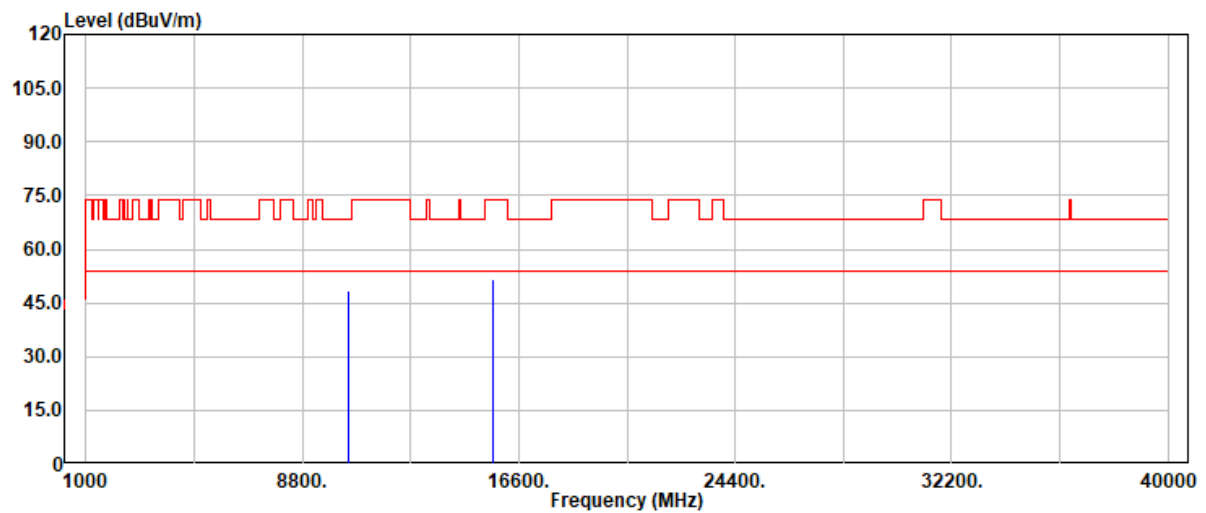


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	35.60	12.96	48.56	68.20	-19.64	Peak
15660.00	35.95	15.74	51.69	74.00	-22.31	Peak
15660.00	28.86	15.74	44.60	54.00	-9.40	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 216 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5220 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

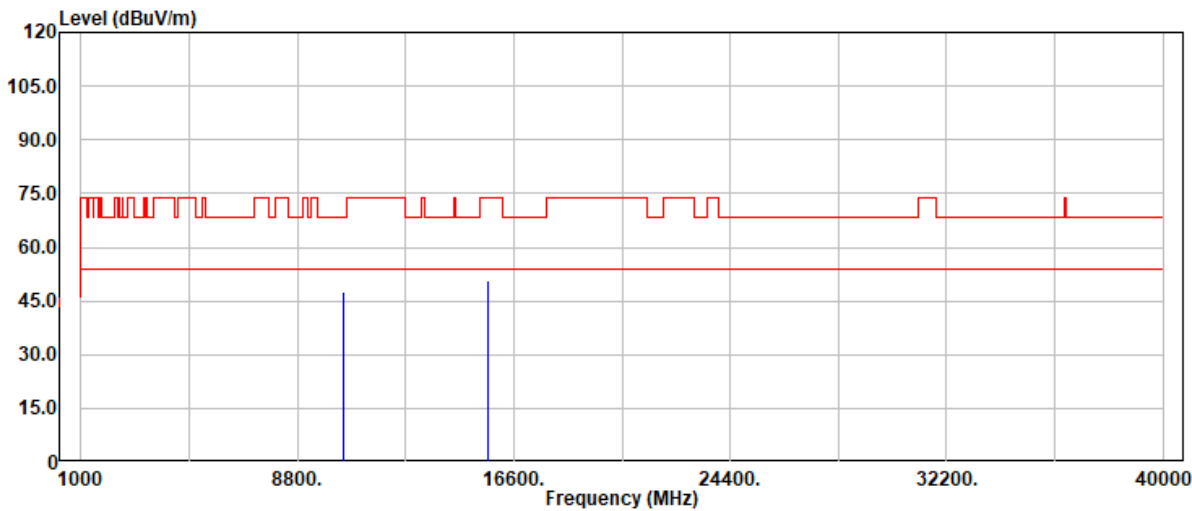


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	34.59	12.96	47.55	68.20	-20.65	Peak
15660.00	34.90	15.74	50.64	74.00	-23.36	Peak
15660.00	28.32	15.74	44.06	54.00	-9.94	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 217 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5240 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

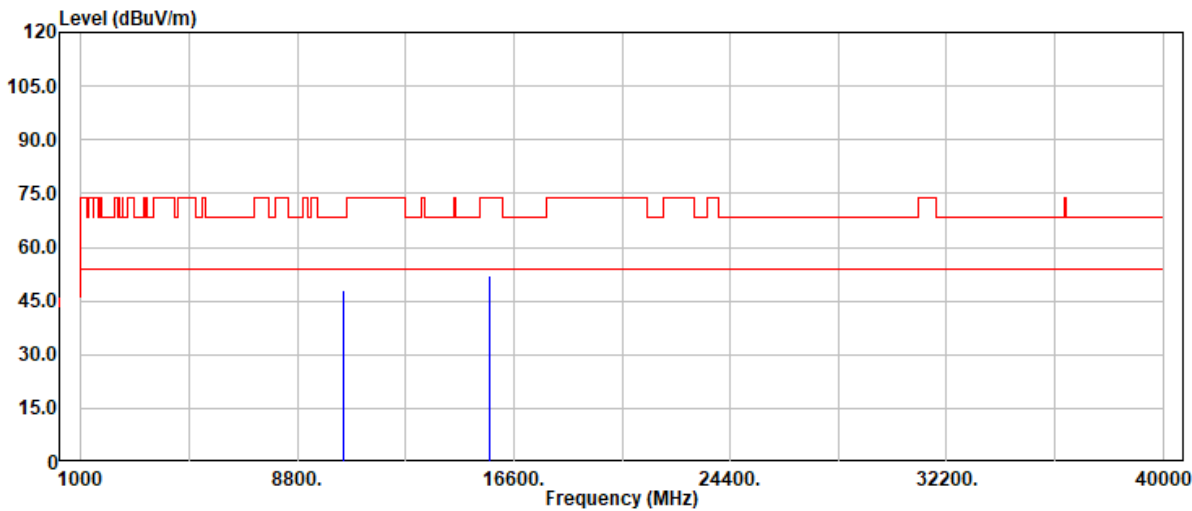


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	35.20	12.92	48.12	68.20	-20.08	Peak
15720.00	36.00	16.27	52.27	74.00	-21.73	Peak
15720.00	29.48	16.27	45.75	54.00	-8.25	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 218 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5240 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

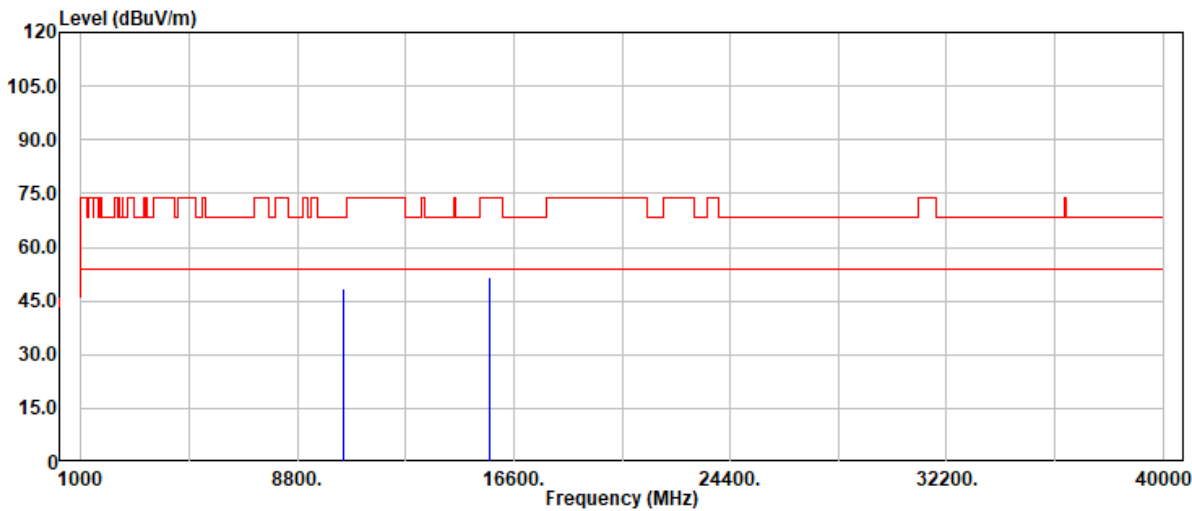

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	35.38	12.92	48.30	68.20	-19.90	Peak
15720.00	35.44	16.27	51.71	74.00	-22.29	Peak
15720.00	28.25	16.27	44.52	54.00	-9.48	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 219 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : Vertical
Engineer : Tony.Chao
Test Chamber : 966A

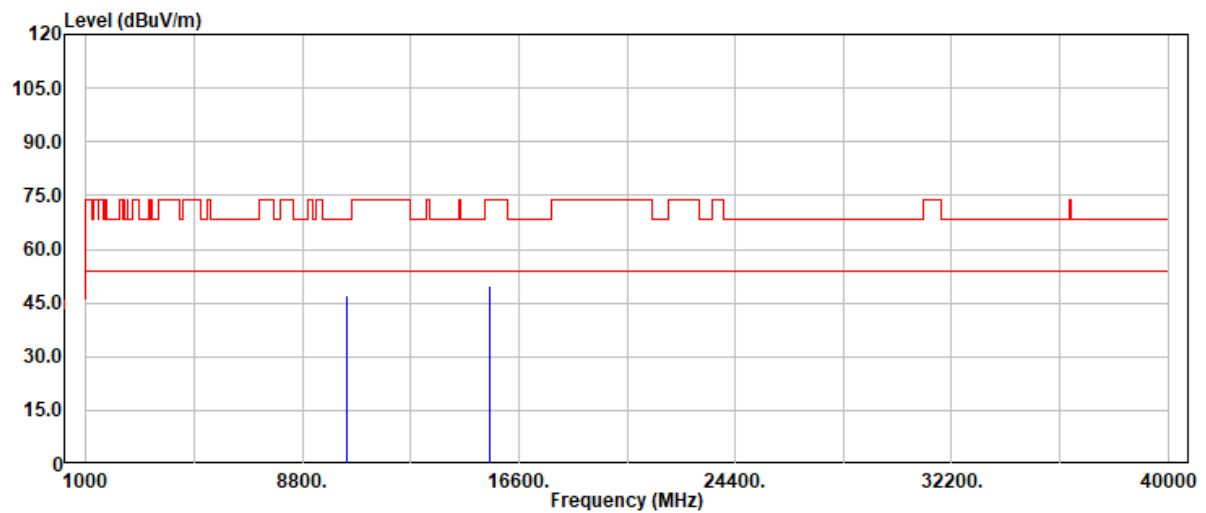

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	34.21	13.02	47.23	68.20	-20.97	Peak
15570.00	34.37	15.58	49.95	74.00	-24.05	Peak
15570.00	26.13	15.58	41.71	54.00	-12.29	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 220 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : Horizontal
Engineer : Tony.Chao
Test Chamber : 966A

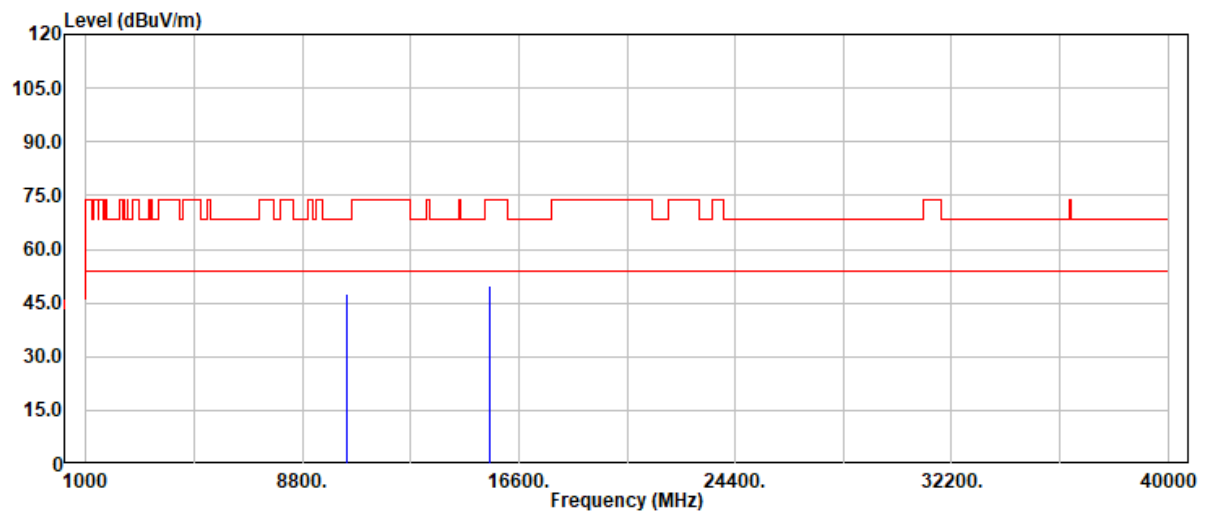


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	34.67	13.02	47.69	68.20	-20.51	Peak
15570.00	34.23	15.58	49.81	74.00	-24.19	Peak
15570.00	26.33	15.58	41.91	54.00	-12.09	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 221 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax40_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5230 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

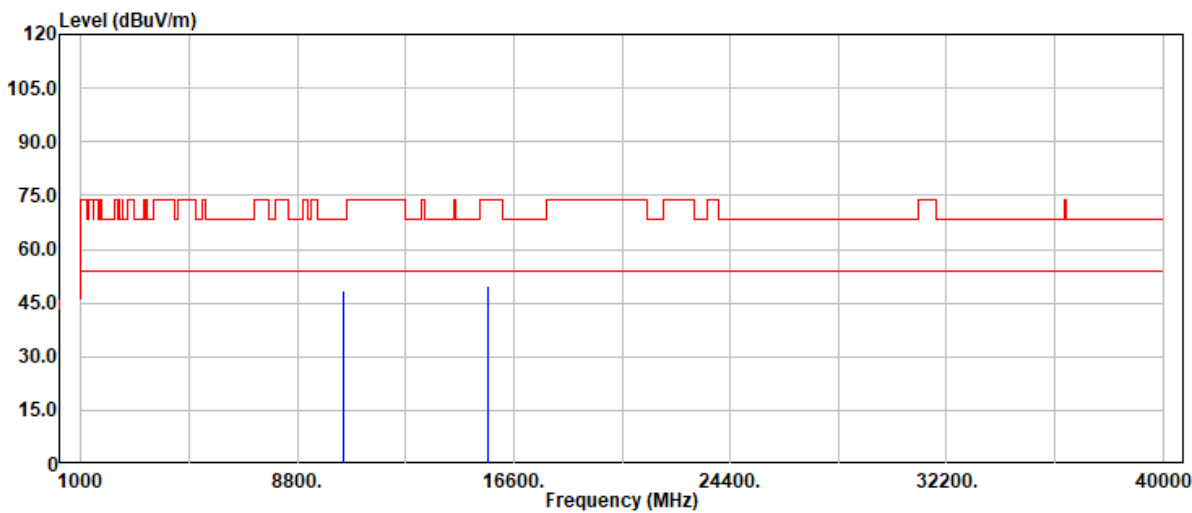


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	35.60	12.96	48.56	68.20	-19.64	Peak
15690.00	33.65	16.03	49.68	74.00	-24.32	Peak
15690.00	27.18	16.03	43.21	54.00	-10.79	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 222 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax40_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5230 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

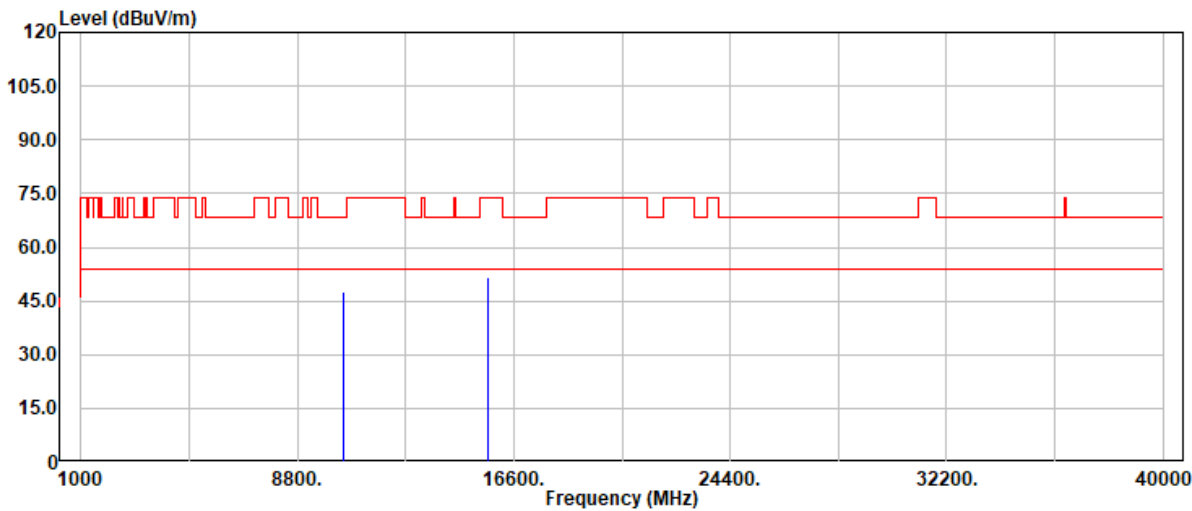

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	34.49	12.96	47.45	68.20	-20.75	Peak
15690.00	35.44	16.03	51.47	74.00	-22.53	Peak
15690.00	26.47	16.03	42.50	54.00	-11.50	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 223 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : H
Setting : 17.5

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

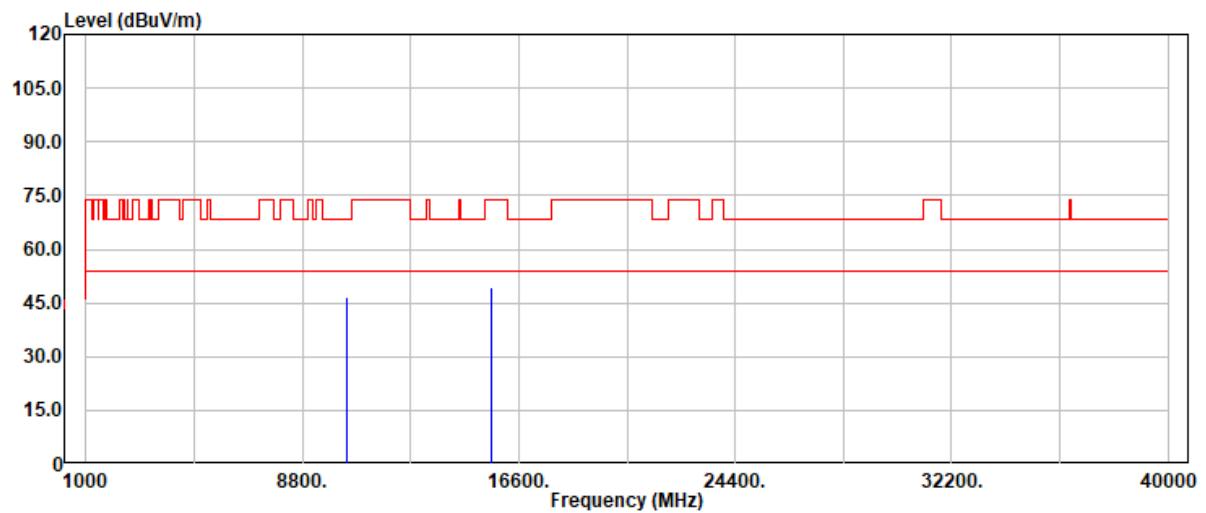


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	33.50	12.94	46.44	68.20	-21.76	Peak
15630.00	33.85	15.58	49.43	74.00	-24.57	Peak
15630.00	26.46	15.58	42.04	54.00	-11.96	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 224 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax80_Band1	Temp./Humi.	: 24.3/57
Frequency	: 5210 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

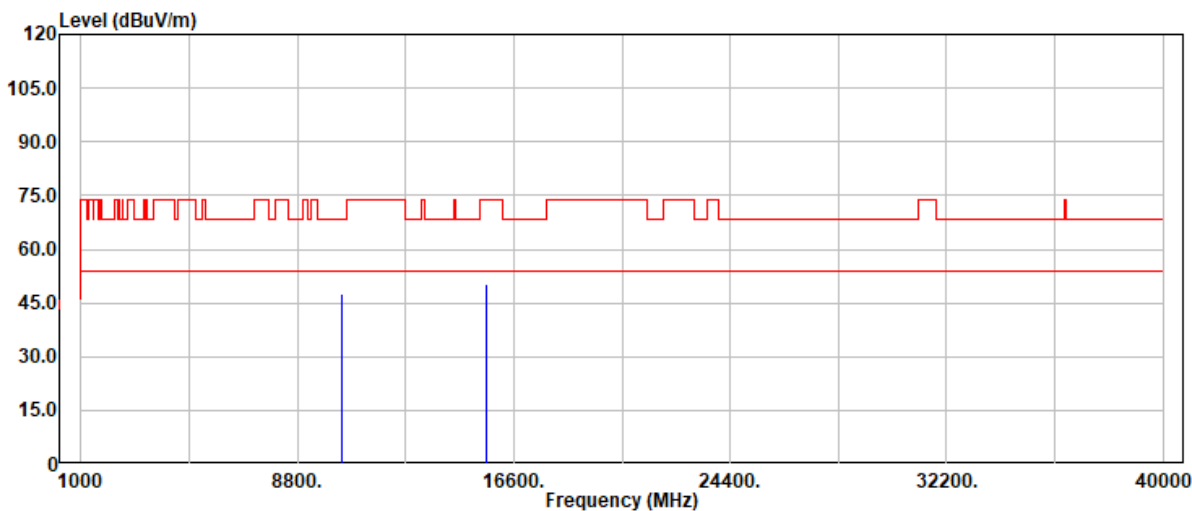

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.41	12.94	47.35	68.20	-20.85	Peak
15630.00	34.71	15.58	50.29	74.00	-23.71	Peak
15630.00	26.53	15.58	42.11	54.00	-11.89	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 225 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-18
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

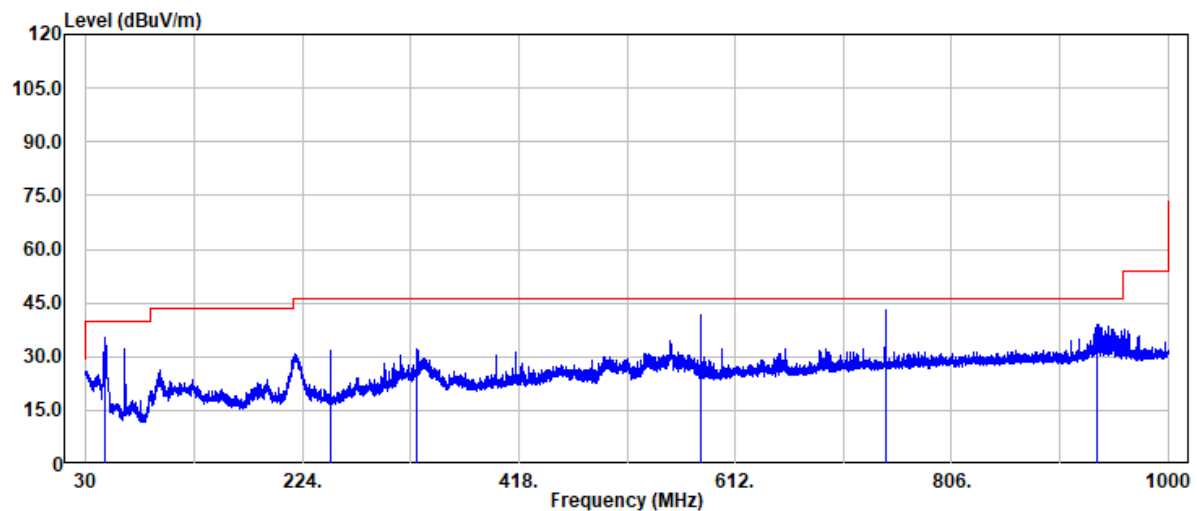

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
46.80	49.77	-14.67	35.10	40.00	-4.90	Peak
249.00	43.14	-11.40	31.74	46.00	-14.26	Peak
327.20	41.15	-8.81	32.34	46.00	-13.66	Peak
581.00	44.97	-3.24	41.73	46.00	-4.27	Peak
747.00	43.55	-0.33	43.22	46.00	-2.78	Peak
937.00	36.57	2.42	38.99	46.00	-7.01	Peak




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 226 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : TX
EUT Pol : H
Setting :

Test Date : 2025-02-18
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

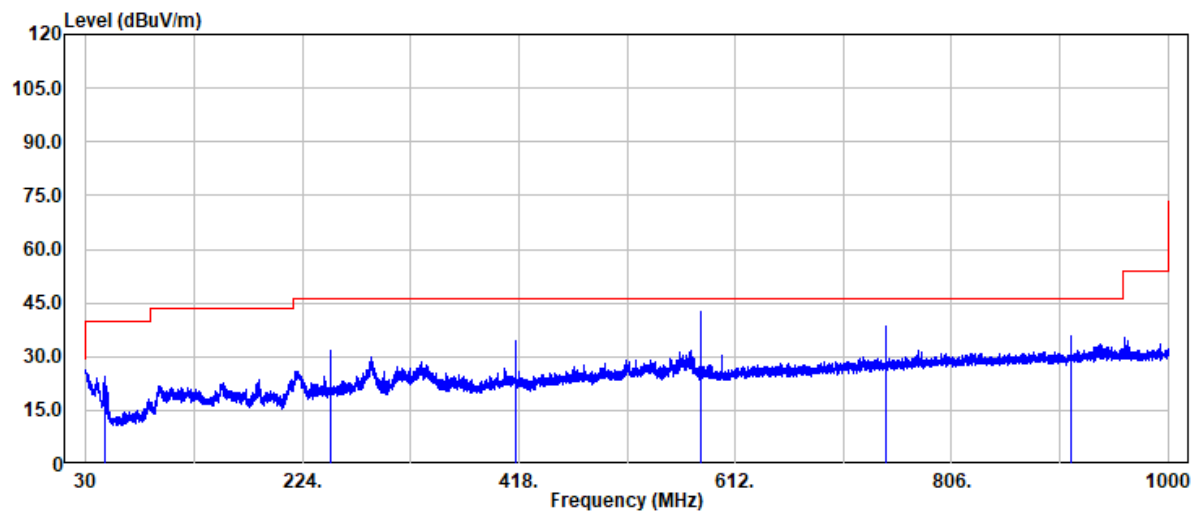


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
47.00	39.41	-14.81	24.60	40.00	-15.40	Peak
249.00	43.23	-11.40	31.83	46.00	-14.17	Peak
415.00	40.89	-6.31	34.58	46.00	-11.42	Peak
581.00	45.67	-3.24	42.43	46.00	-3.57	Peak
747.00	38.66	-0.33	38.33	46.00	-7.67	Peak
913.00	34.04	1.61	35.65	46.00	-10.35	Peak



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 227 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band2_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5260 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

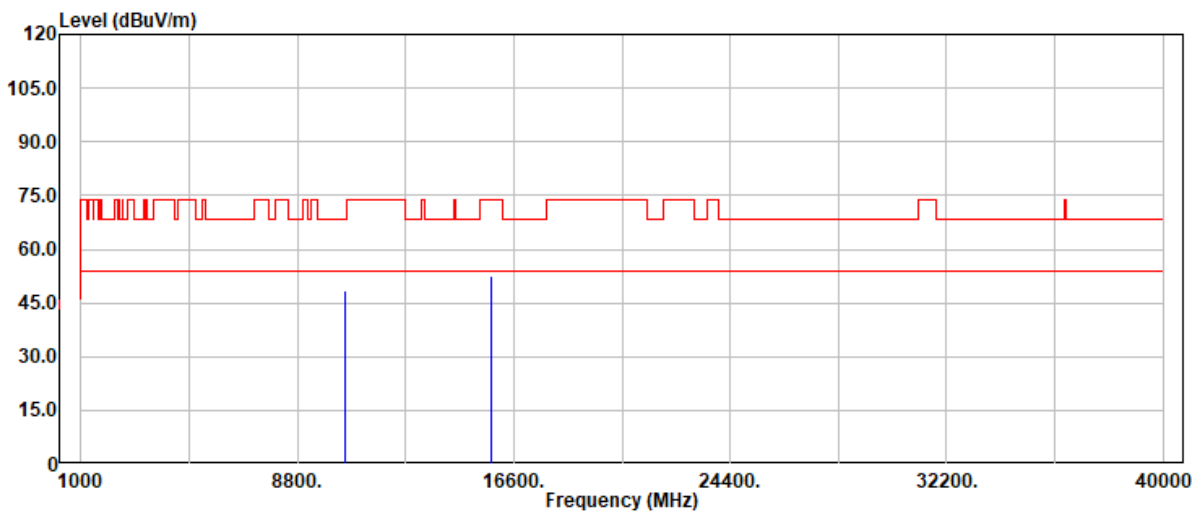

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	35.59	12.95	48.54	68.20	-19.66	Peak
15780.00	35.98	16.41	52.39	74.00	-21.61	Peak
15780.00	27.11	16.41	43.52	54.00	-10.48	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 228 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band2_CH0
Frequency : 5260 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

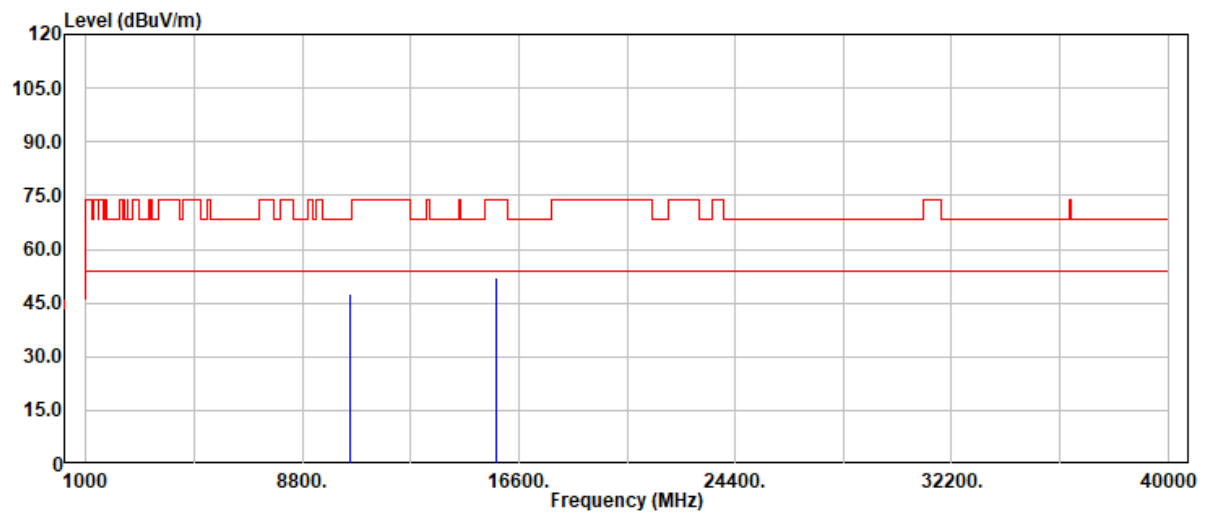


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	34.55	12.95	47.50	68.20	-20.70	Peak
15780.00	35.44	16.41	51.85	74.00	-22.15	Peak
15780.00	26.87	16.41	43.28	54.00	-10.72	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 229 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band2_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5300 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

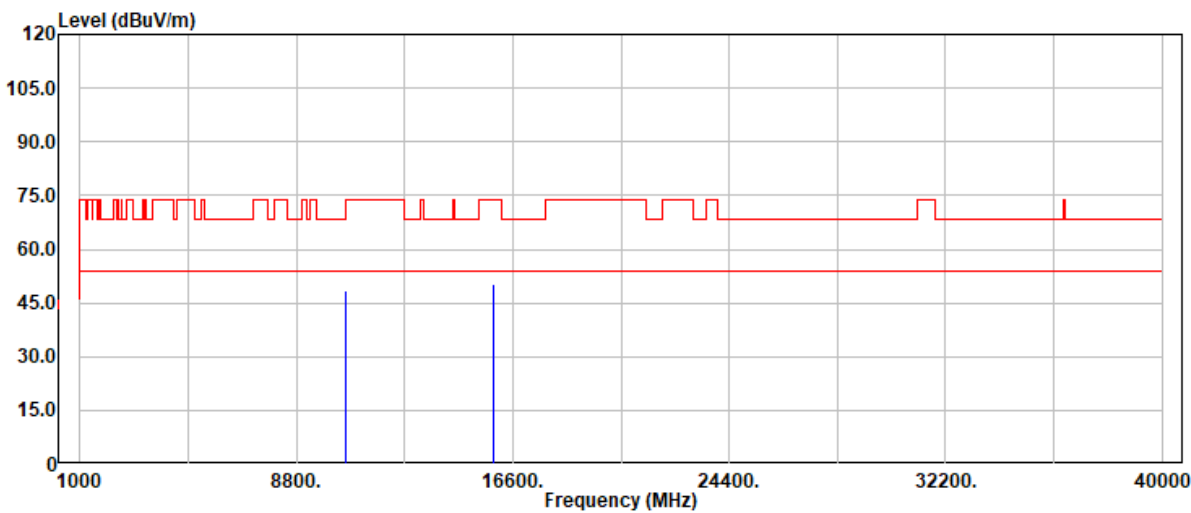

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	35.19	13.48	48.67	74.00	-25.33	Peak
10600.00	26.21	13.48	39.69	54.00	-14.31	Average
15900.00	33.89	16.23	50.12	74.00	-23.88	Peak
15900.00	26.37	16.23	42.60	54.00	-11.40	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 230 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band2_CH0
Frequency : 5300 MHz
Operation Mode : TX
EUT Pol : H
Setting : 24

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

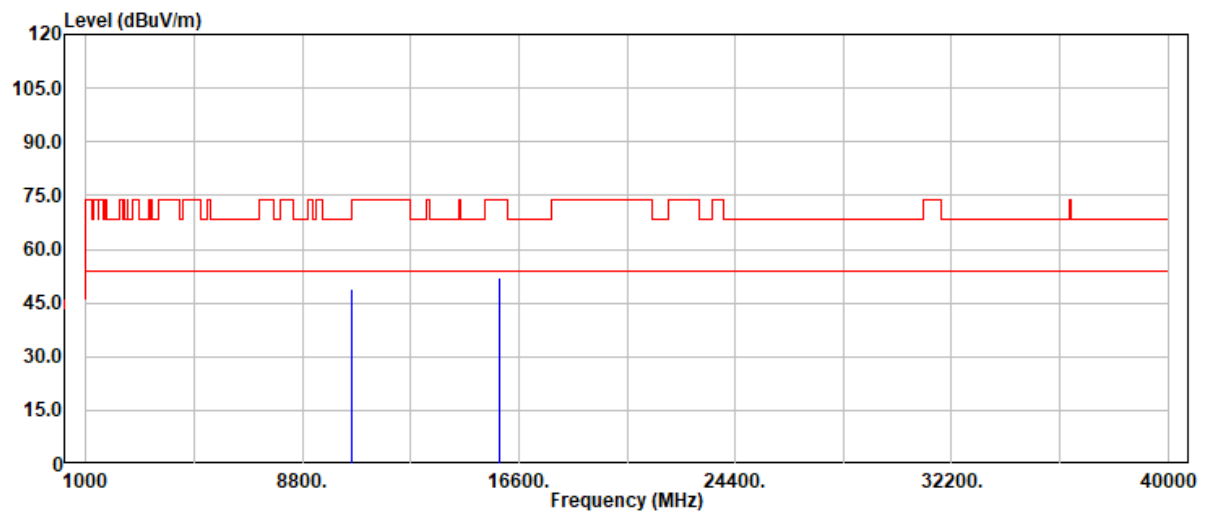

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	35.37	13.48	48.85	74.00	-25.15	Peak
10600.00	26.40	13.48	39.88	54.00	-14.12	Average
15900.00	35.83	16.23	52.06	74.00	-21.94	Peak
15900.00	26.12	16.23	42.35	54.00	-11.65	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 231 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11a_Band2_CH0
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : H
Setting : 20.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

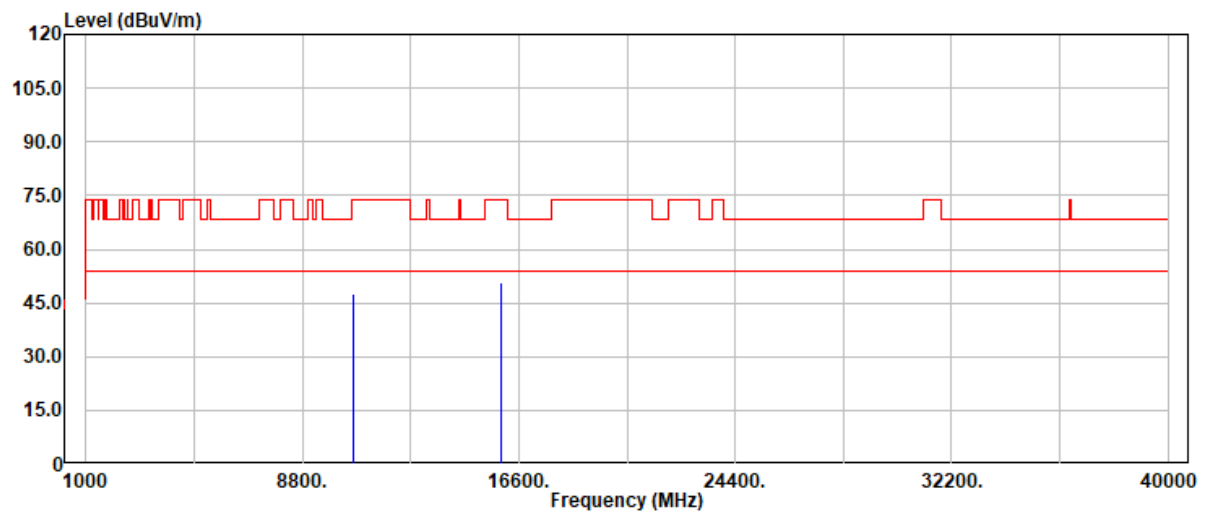


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	34.07	13.48	47.55	74.00	-26.45	Peak
10640.00	26.29	13.48	39.77	54.00	-14.23	Average
15960.00	34.33	16.43	50.76	74.00	-23.24	Peak
15960.00	27.25	16.43	43.68	54.00	-10.32	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 232 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11a_Band2_CH0	Temp./Humi.	: 24.4/58
Frequency	: 5320 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

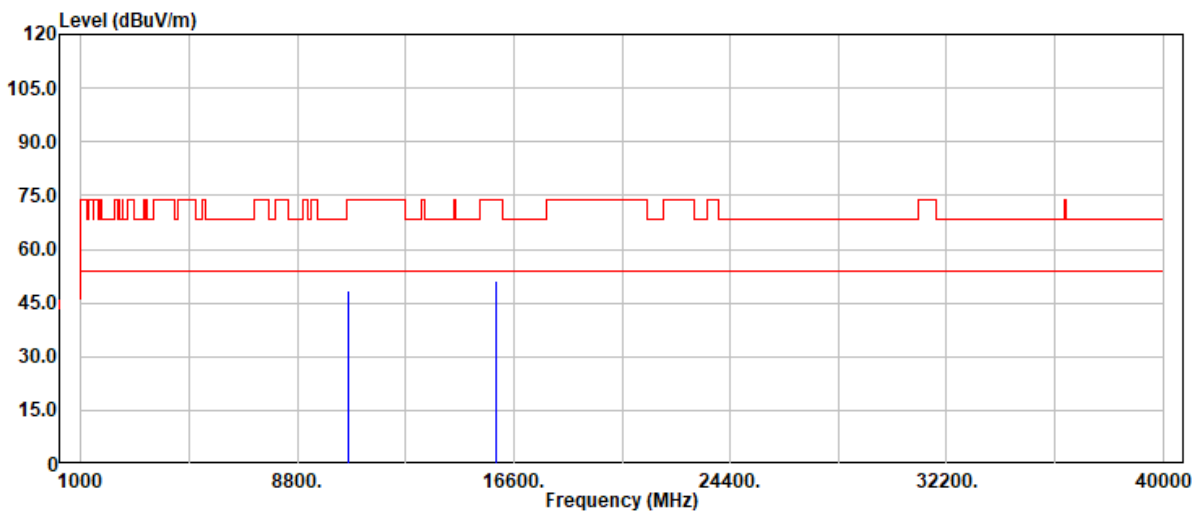


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	35.00	13.48	48.48	74.00	-25.52	Peak
10640.00	26.14	13.48	39.62	54.00	-14.38	Average
15960.00	34.72	16.43	51.15	74.00	-22.85	Peak
15960.00	25.38	16.43	41.81	54.00	-12.19	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 233 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5260 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

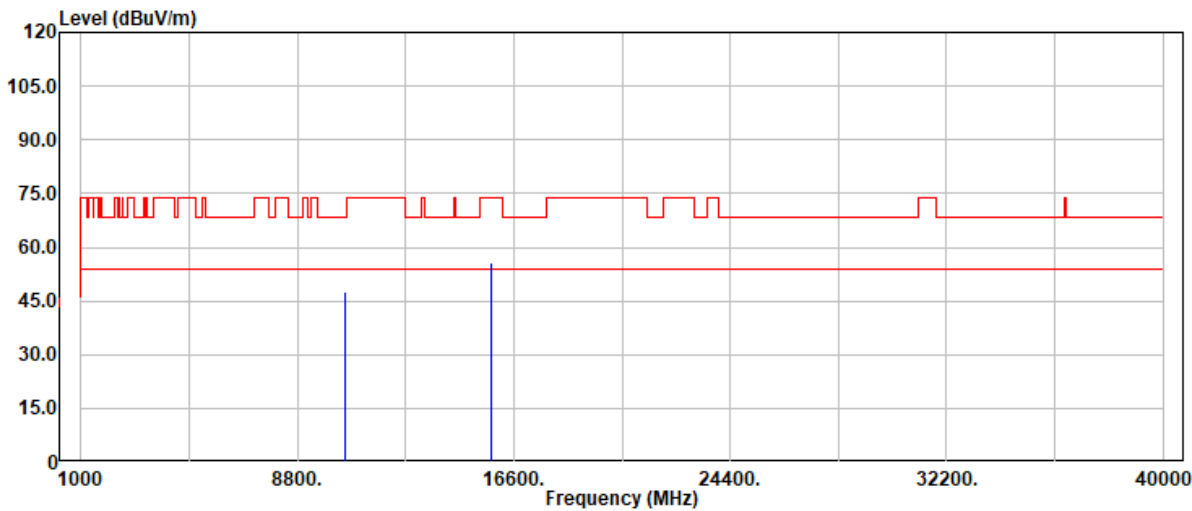

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	34.81	12.95	47.76	68.20	-20.44	Peak
15780.00	39.42	16.41	55.83	74.00	-18.17	Peak
15780.00	29.63	16.41	46.04	54.00	-7.96	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 234 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band2
Frequency : 5260 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

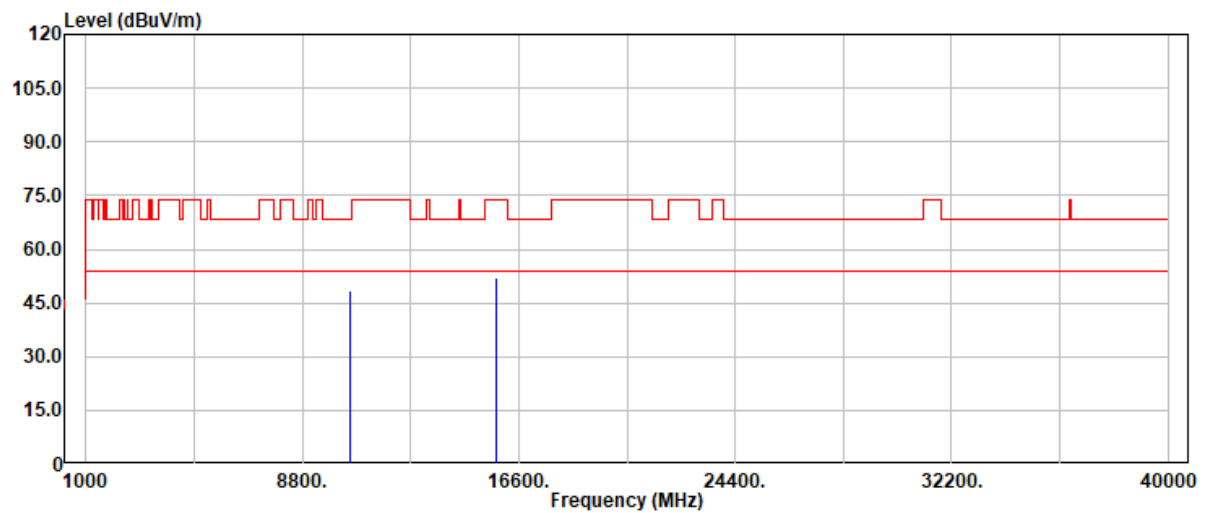


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	35.48	12.95	48.43	68.20	-19.77	Peak
15780.00	35.87	16.41	52.28	74.00	-21.72	Peak
15780.00	26.63	16.41	43.04	54.00	-10.96	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 235 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5300 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 25		

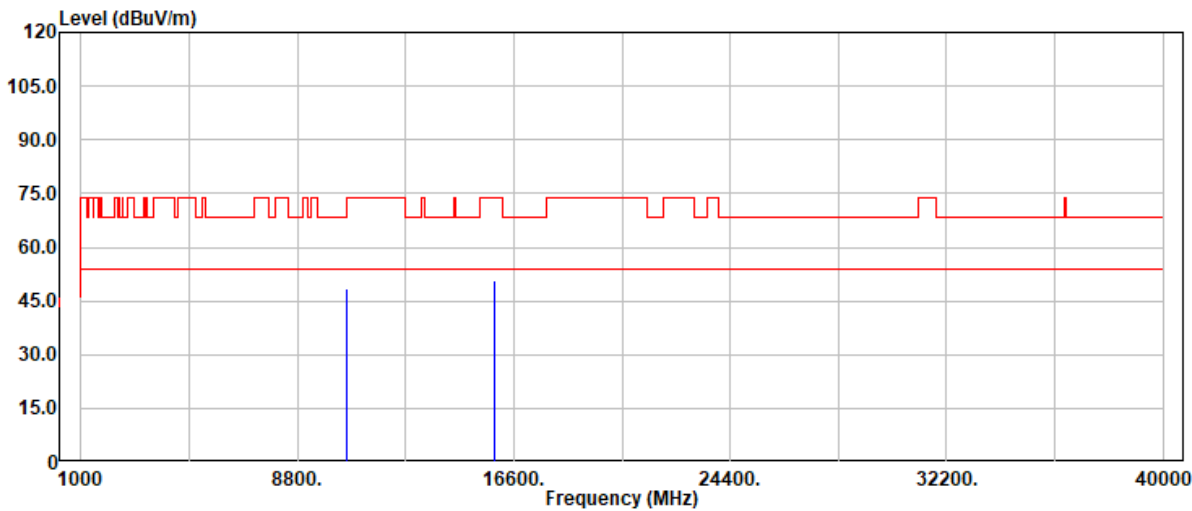

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	34.97	13.48	48.45	74.00	-25.55	Peak
10600.00	26.32	13.48	39.80	54.00	-14.20	Average
15900.00	34.53	16.23	50.76	74.00	-23.24	Peak
15900.00	29.55	16.23	45.78	54.00	-8.22	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 236 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band2
Frequency : 5300 MHz
Operation Mode : TX
EUT Pol : H
Setting : 25

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

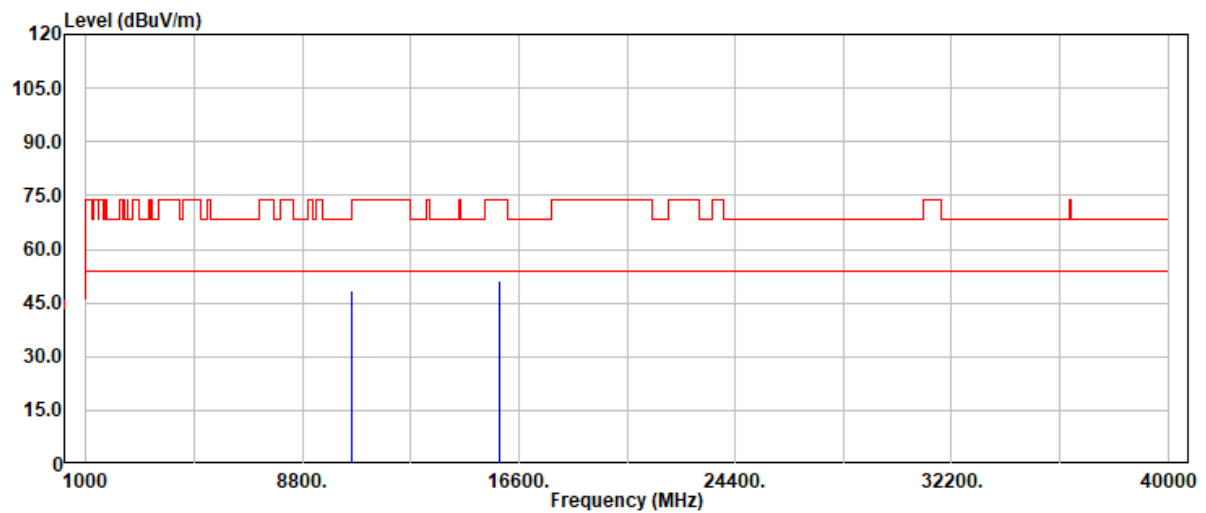

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	34.77	13.48	48.25	74.00	-25.75	Peak
10600.00	26.33	13.48	39.81	54.00	-14.19	Average
15900.00	34.97	16.23	51.20	74.00	-22.80	Peak
15900.00	26.96	16.23	43.19	54.00	-10.81	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 237 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20_Band2
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : H
Setting : 19.5

Test Date : 2025-02-04
Temp./Humi. : 24.4/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

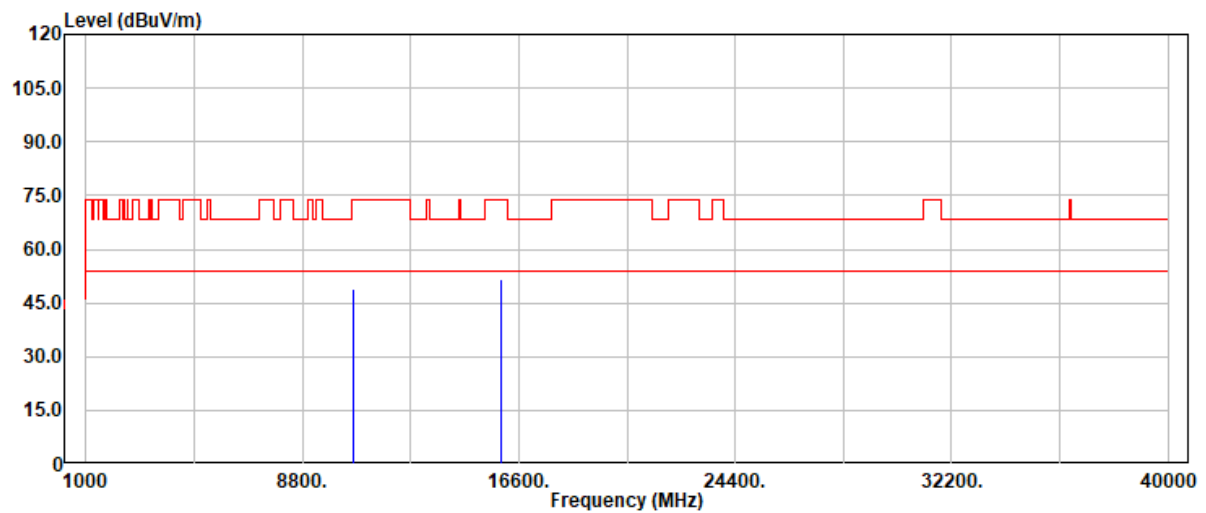


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	35.58	13.48	49.06	74.00	-24.94	Peak
10640.00	26.39	13.48	39.87	54.00	-14.13	Average
15960.00	35.34	16.43	51.77	74.00	-22.23	Peak
15960.00	25.62	16.43	42.05	54.00	-11.95	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 238 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-04
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.4/58
Frequency	: 5320 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 19.5		

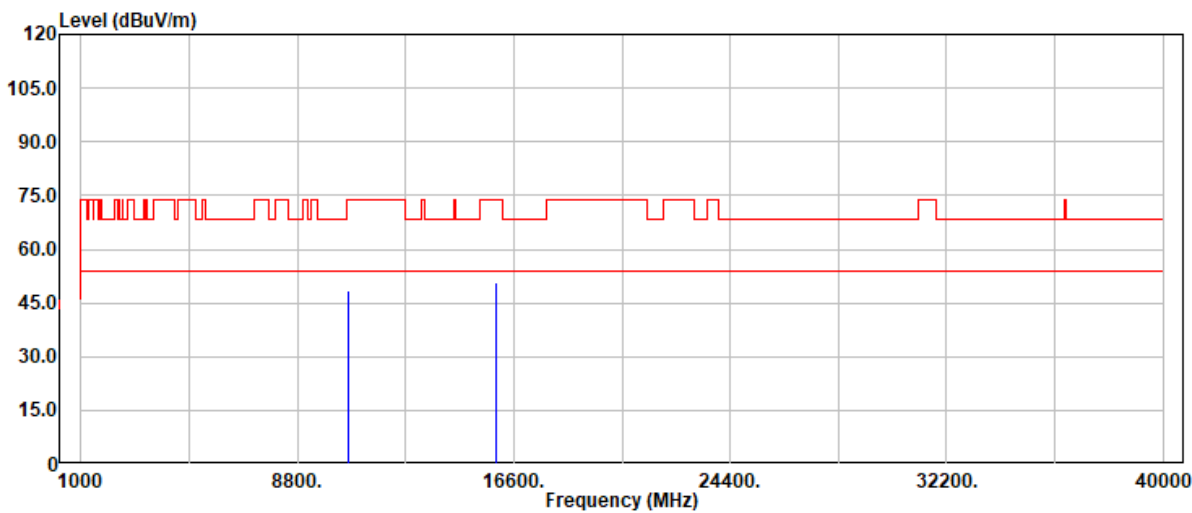


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	35.11	13.48	48.59	74.00	-25.41	Peak
10640.00	26.22	13.48	39.70	54.00	-14.30	Average
15960.00	34.40	16.43	50.83	74.00	-23.17	Peak
15960.00	25.27	16.43	41.70	54.00	-12.30	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 239 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5270 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

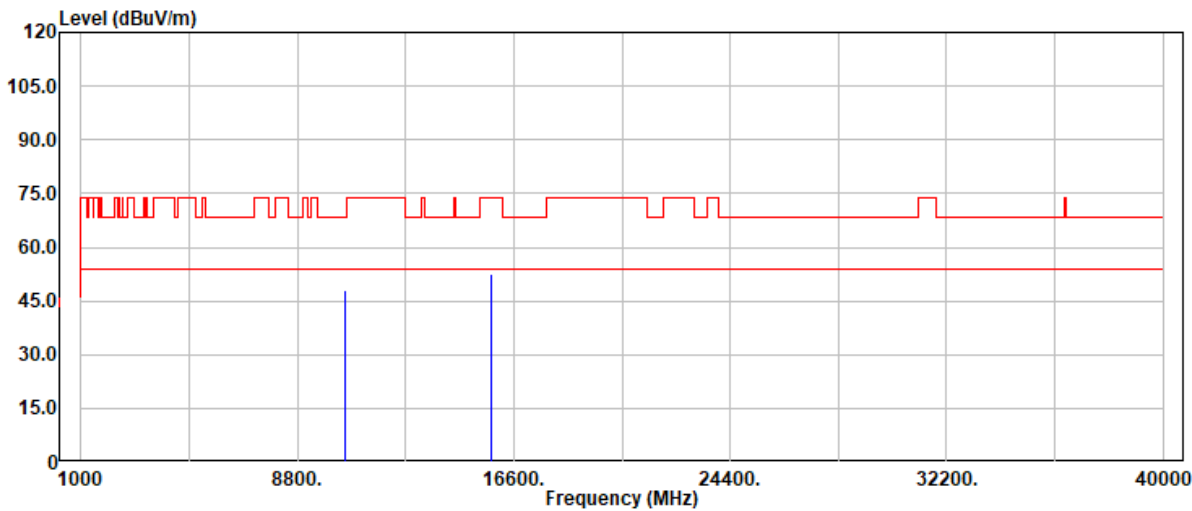


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10540.00	34.97	13.02	47.99	68.20	-20.21	Peak
15810.00	36.38	16.33	52.71	74.00	-21.29	Peak
15810.00	28.10	16.33	44.43	54.00	-9.57	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 240 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5270 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

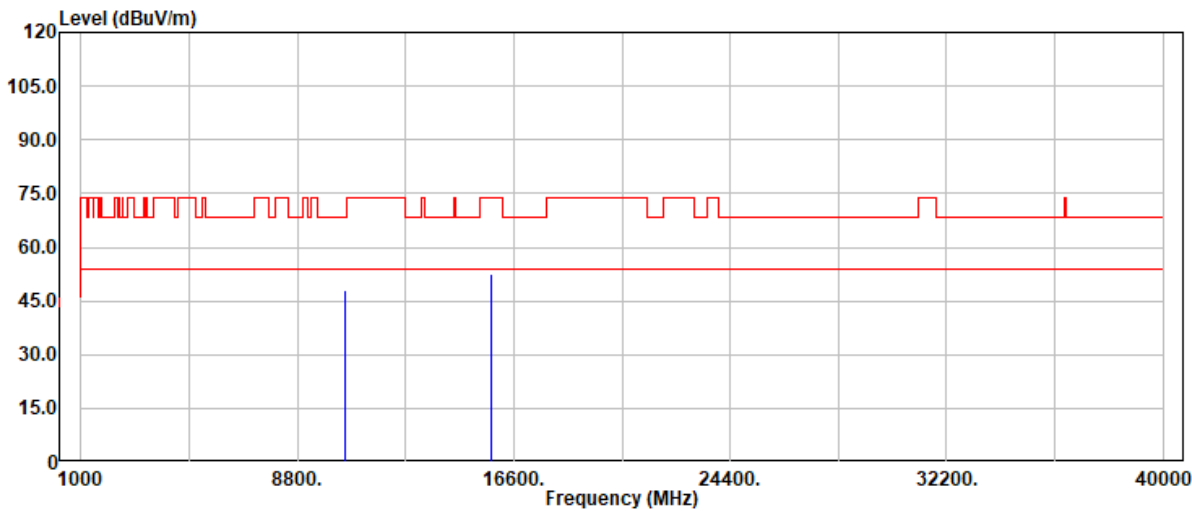


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10540.00	35.14	13.02	48.16	68.20	-20.04	Peak
15810.00	34.79	16.33	51.12	74.00	-22.88	Peak
15810.00	36.18	16.33	52.51	54.00	-1.49	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 241 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5310 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

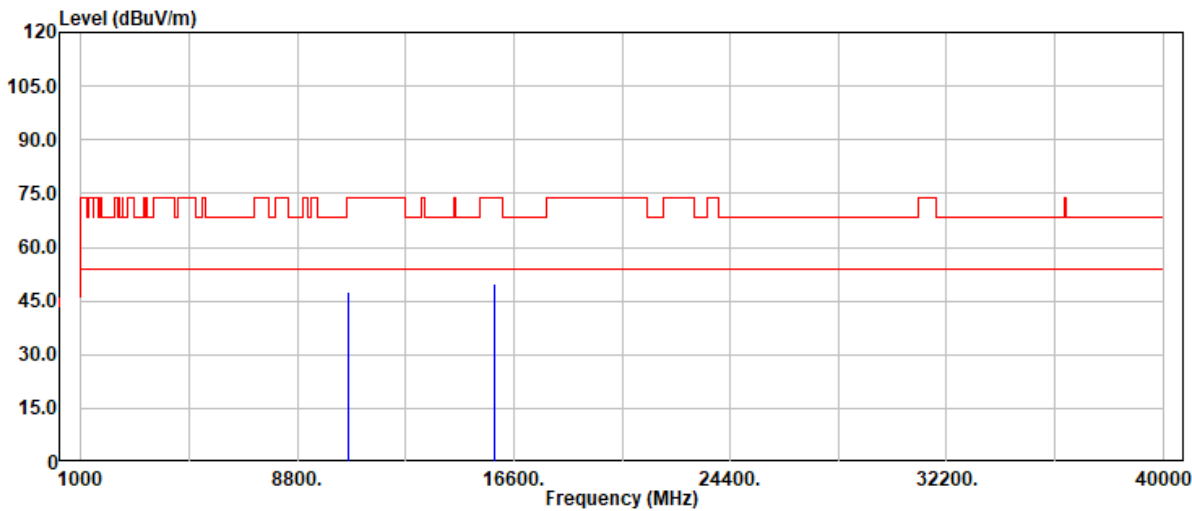


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10620.00	34.16	13.48	47.64	74.00	-26.36	Peak
10620.00	26.68	13.48	40.16	54.00	-13.84	Average
15930.00	33.61	16.32	49.93	74.00	-24.07	Peak
15930.00	25.99	16.32	42.31	54.00	-11.69	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 242 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5310 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 17.5		

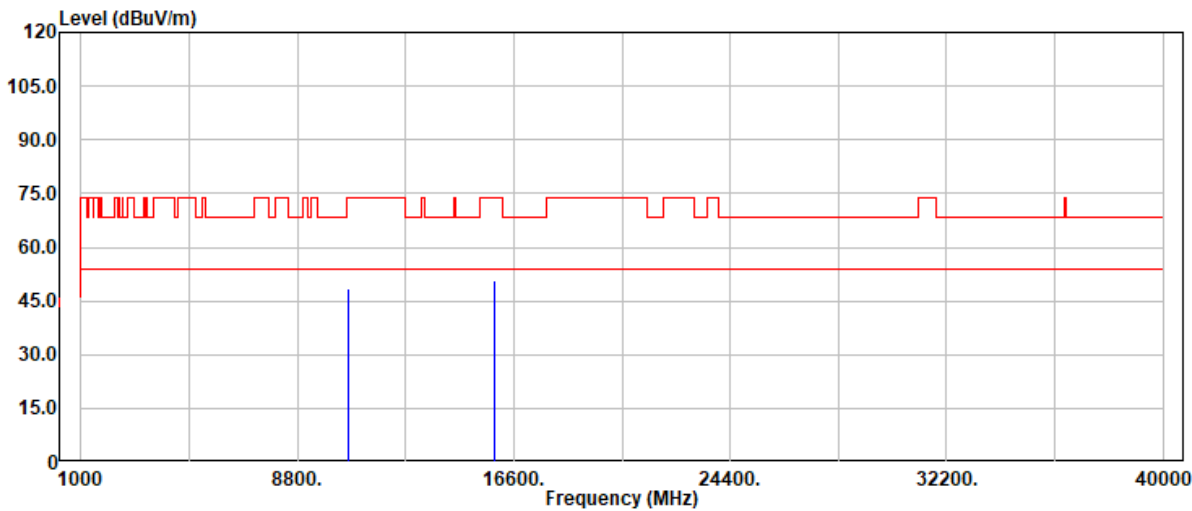

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10620.00	34.92	13.48	48.40	74.00	-25.60	Peak
10620.00	26.36	13.48	39.84	54.00	-14.16	Average
15930.00	34.29	16.32	50.61	74.00	-23.39	Peak
15930.00	25.98	16.32	42.30	54.00	-11.70	Average




Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 243 / 345
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-05
Temp./Humi. : 24.3/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

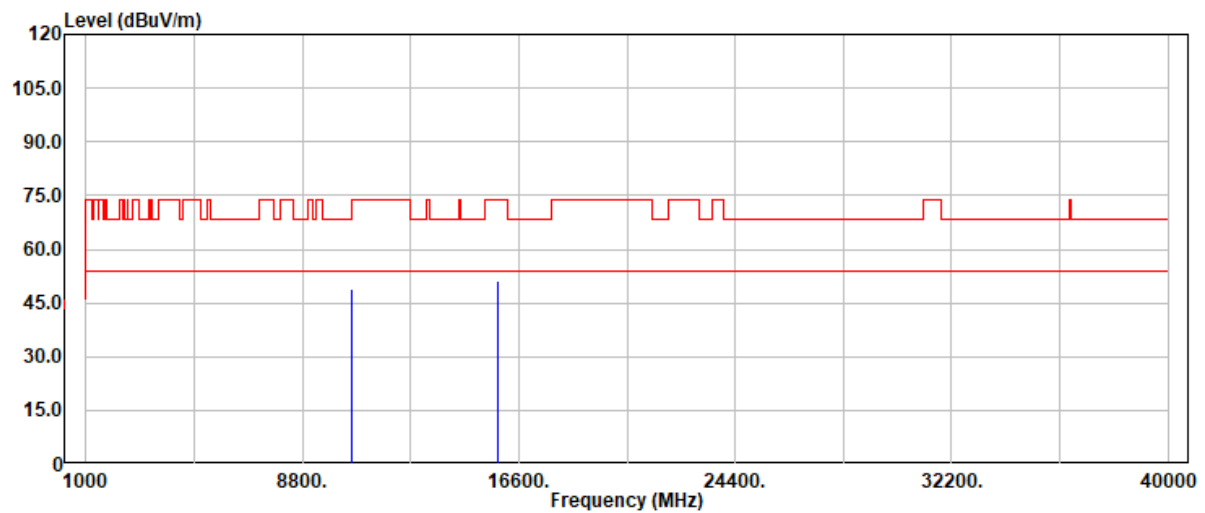


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10580.00	35.52	13.31	48.83	68.20	-19.37	Peak
15870.00	34.98	16.21	51.19	74.00	-22.81	Peak
15870.00	26.57	16.21	42.78	54.00	-11.22	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 244 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ac80_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5290 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14.5		

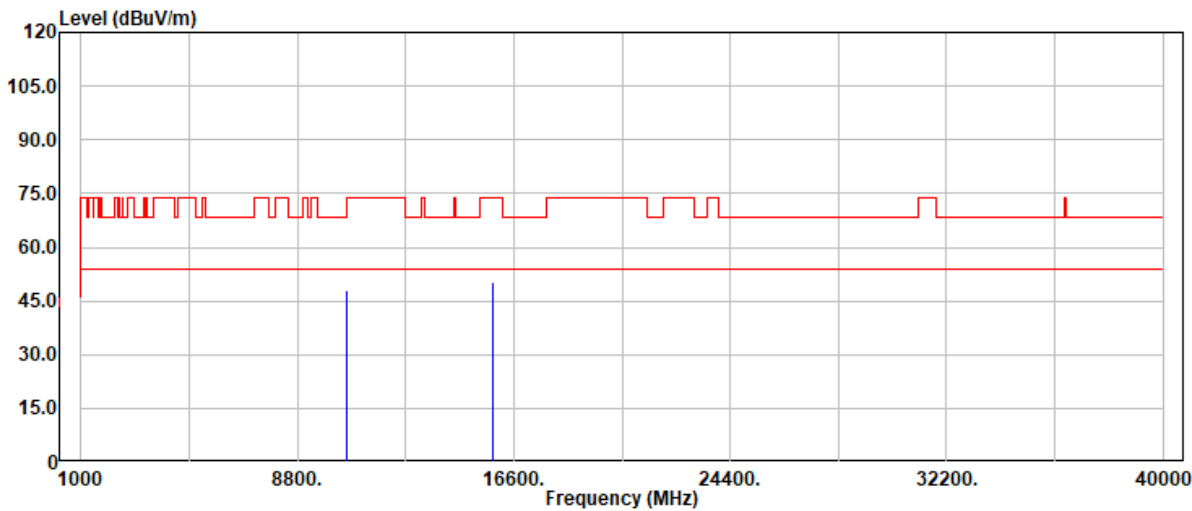


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10580.00	34.78	13.31	48.09	68.20	-20.11	Peak
15870.00	34.20	16.21	50.41	74.00	-23.59	Peak
15870.00	26.48	16.21	42.69	54.00	-11.31	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 245 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5260 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

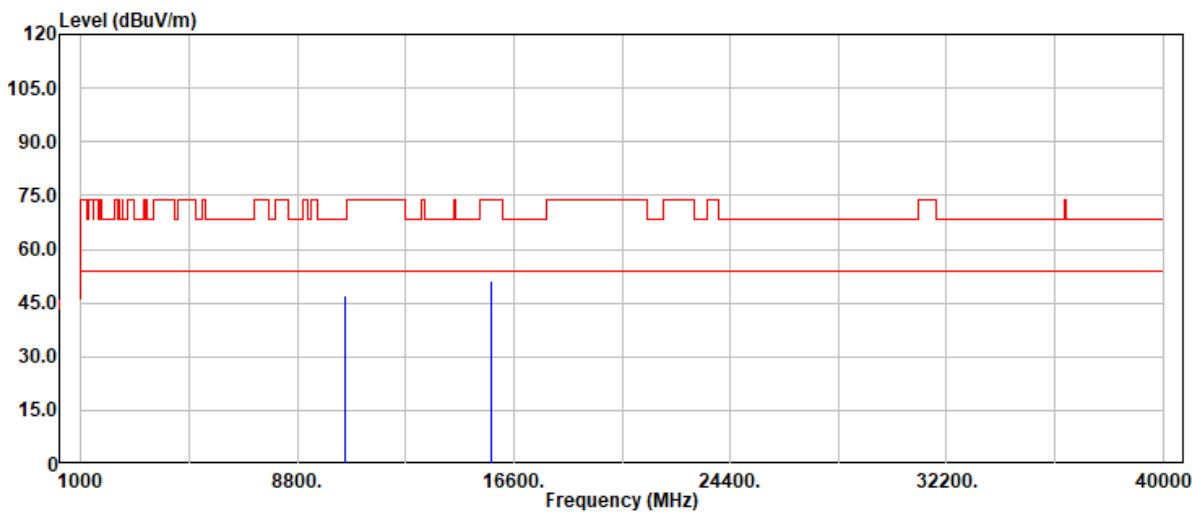


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	33.93	12.95	46.88	68.20	-21.32	Peak
15780.00	34.74	16.41	51.15	74.00	-22.85	Peak
15780.00	30.20	16.41	46.61	54.00	-7.39	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 246 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5260 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

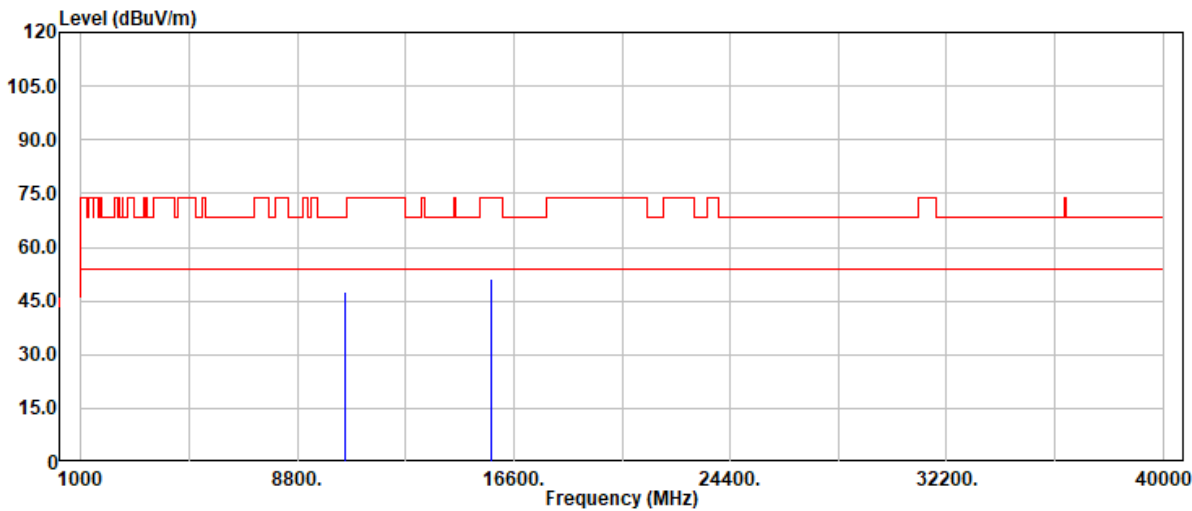


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	34.58	12.95	47.53	68.20	-20.67	Peak
15780.00	34.56	16.41	50.97	74.00	-23.03	Peak
15780.00	28.61	16.41	45.02	54.00	-8.98	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 247 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5300 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

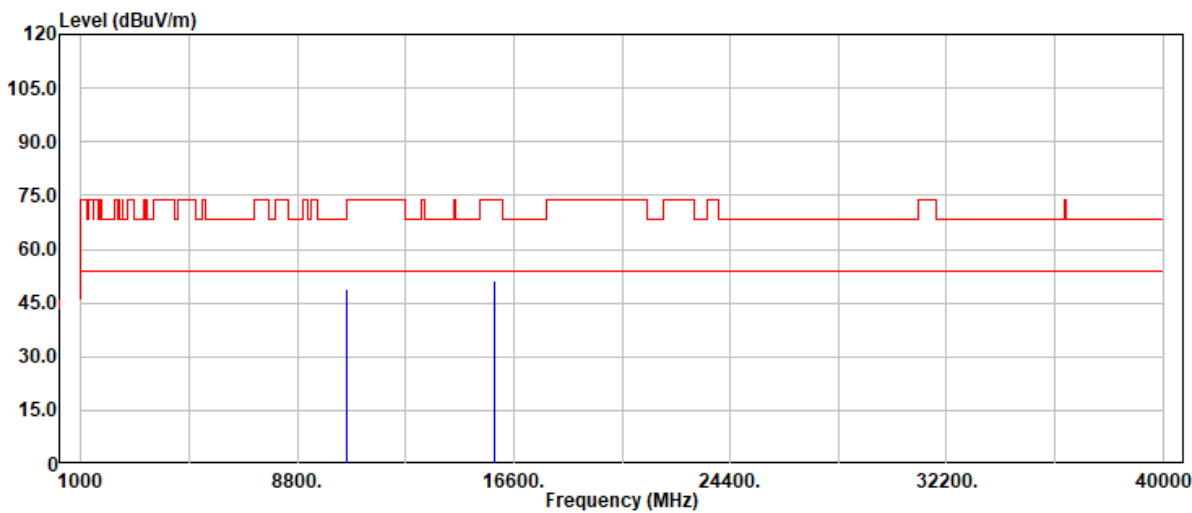


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	35.21	13.48	48.69	74.00	-25.31	Peak
15900.00	34.84	16.23	51.07	74.00	-22.93	Peak
15900.00	28.07	16.23	44.30	54.00	-9.70	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 248 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5300 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 24		

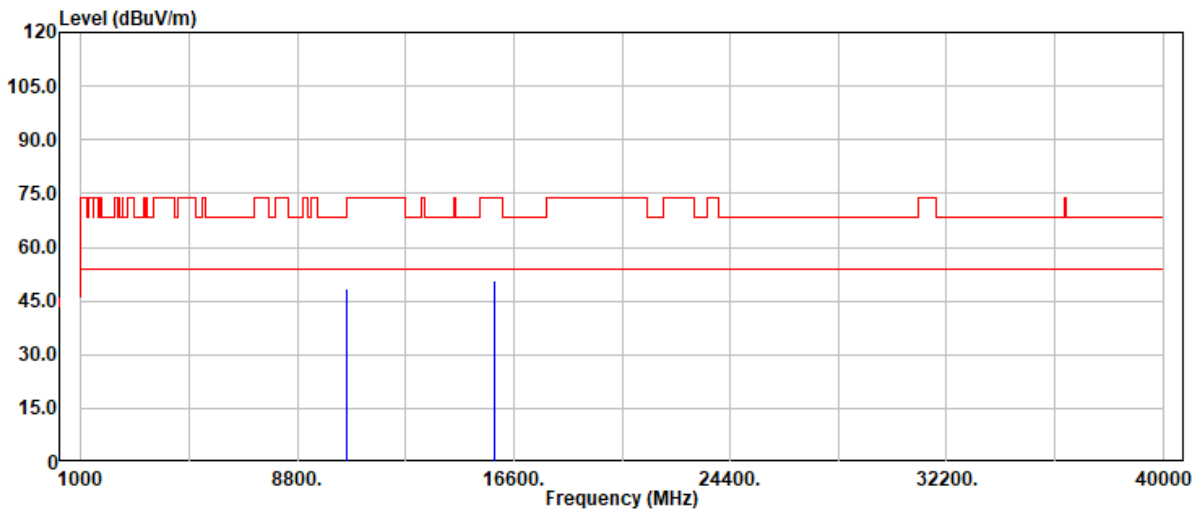


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	34.88	13.48	48.36	74.00	-25.64	Peak
15900.00	34.58	16.23	50.81	74.00	-23.19	Peak
15900.00	28.05	16.23	44.28	54.00	-9.72	Average



Project No: TM-2412000356P
Report No.: TMWK2412004718KR

Page: 249 / 345
Rev.: 00

Project No	: TM-2412000356P	Test Date	: 2025-02-05
Operation Band	: 802.11ax20_Band2	Temp./Humi.	: 24.3/57
Frequency	: 5320 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: H	Test Chamber	: 966A
Setting	: 20.5		

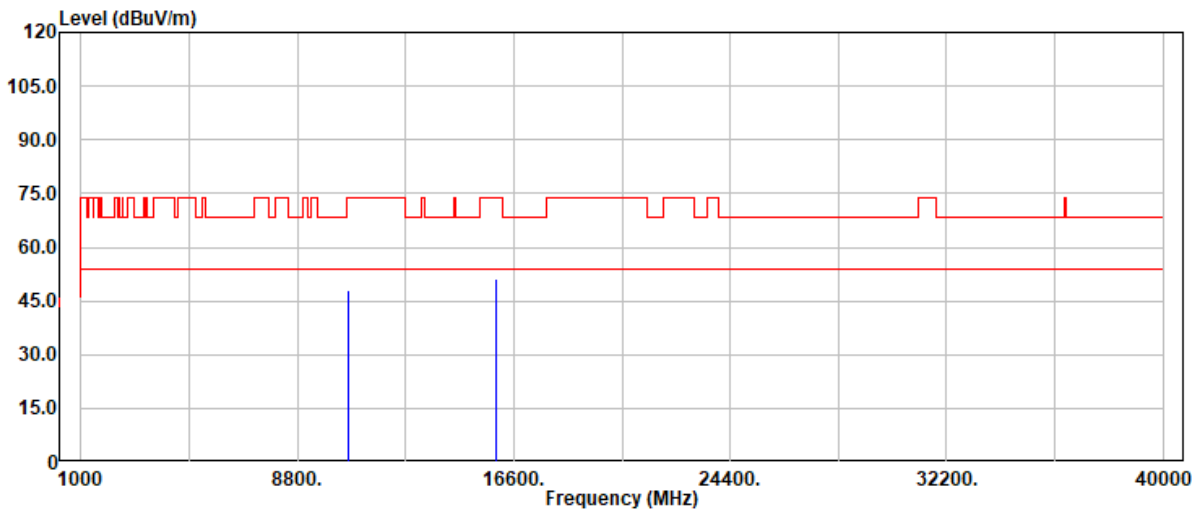

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	34.63	13.48	48.11	74.00	-25.89	Peak
10640.00	28.03	13.48	41.51	54.00	-12.49	Average
15960.00	34.75	16.43	51.18	74.00	-22.82	Peak
15960.00	28.70	16.43	45.13	54.00	-8.87	Average