


Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 107 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

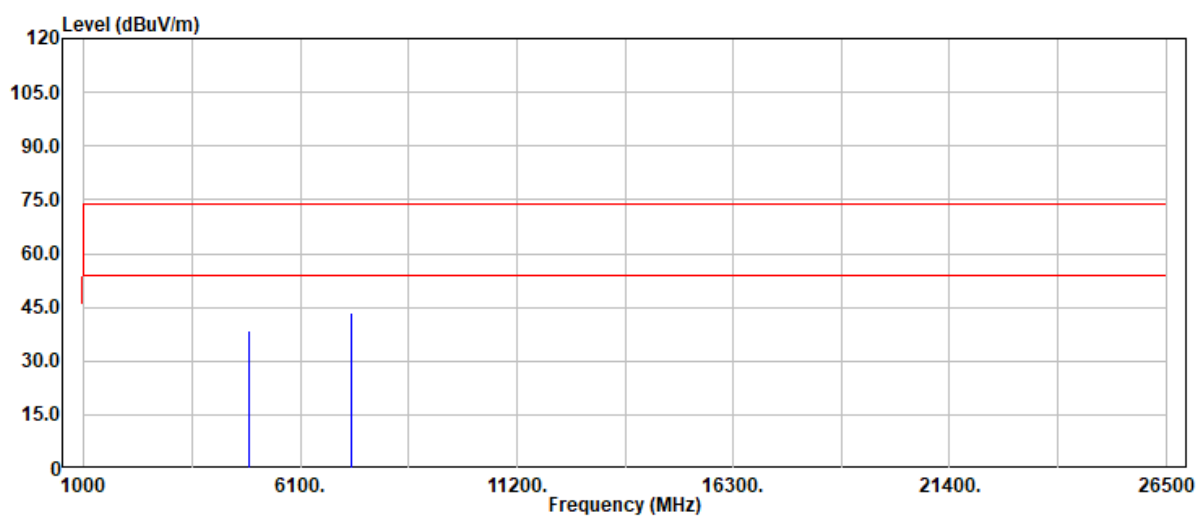


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.07	2.54	38.61	74.00	-35.39	Peak
4874.00	28.20	2.54	30.74	54.00	-23.26	Average
7311.00	34.26	9.17	43.43	74.00	-30.57	Peak
7311.00	26.54	9.17	35.71	54.00	-18.29	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 108 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 12

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

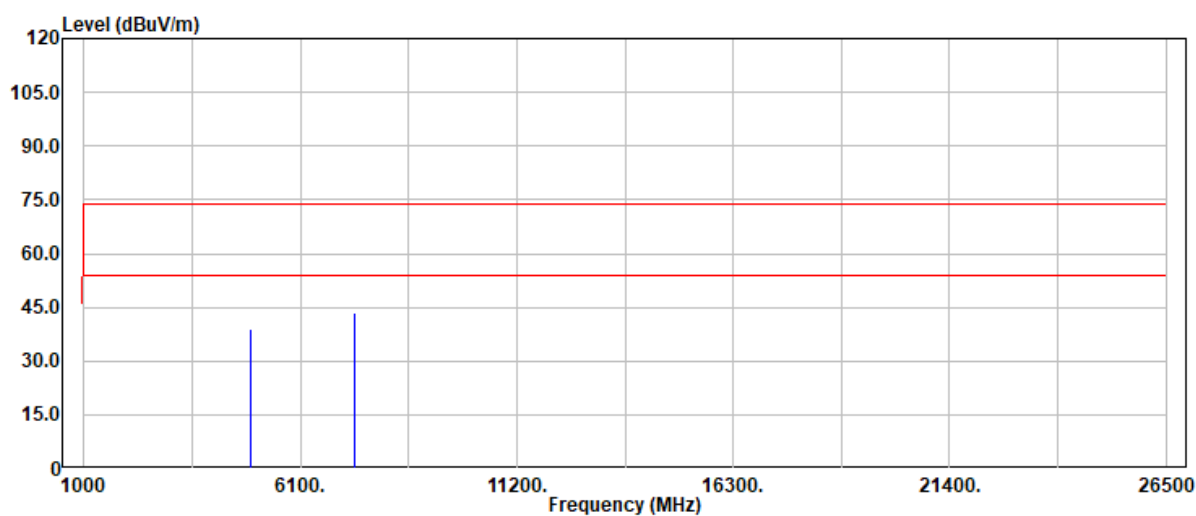


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.81	3.27	39.08	74.00	-34.92	Peak
4924.00	27.21	3.27	30.48	54.00	-23.52	Average
7386.00	34.10	9.46	43.56	74.00	-30.44	Peak
7386.00	26.15	9.46	35.61	54.00	-18.39	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 109 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 12

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

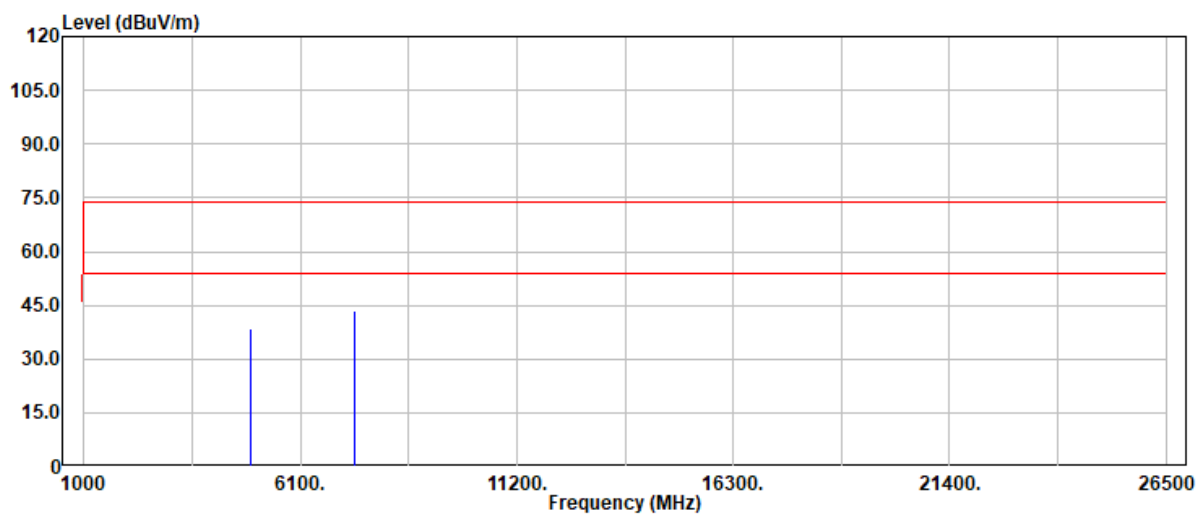


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.32	3.27	38.59	74.00	-35.41	Peak
4924.00	27.08	3.27	30.35	54.00	-23.65	Average
7386.00	33.89	9.46	43.35	74.00	-30.65	Peak
7386.00	26.27	9.46	35.73	54.00	-18.27	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 110 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

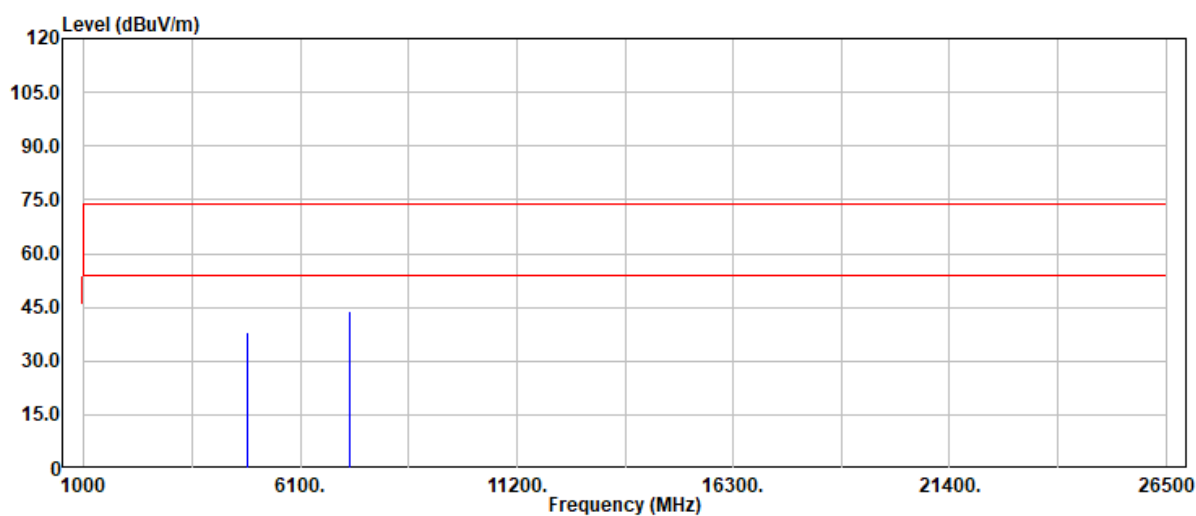


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.84	2.16	38.00	74.00	-36.00	Peak
4844.00	30.21	2.16	32.37	54.00	-21.63	Average
7266.00	34.81	9.08	43.89	74.00	-30.11	Peak
7266.00	26.70	9.08	35.78	54.00	-18.22	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 111 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

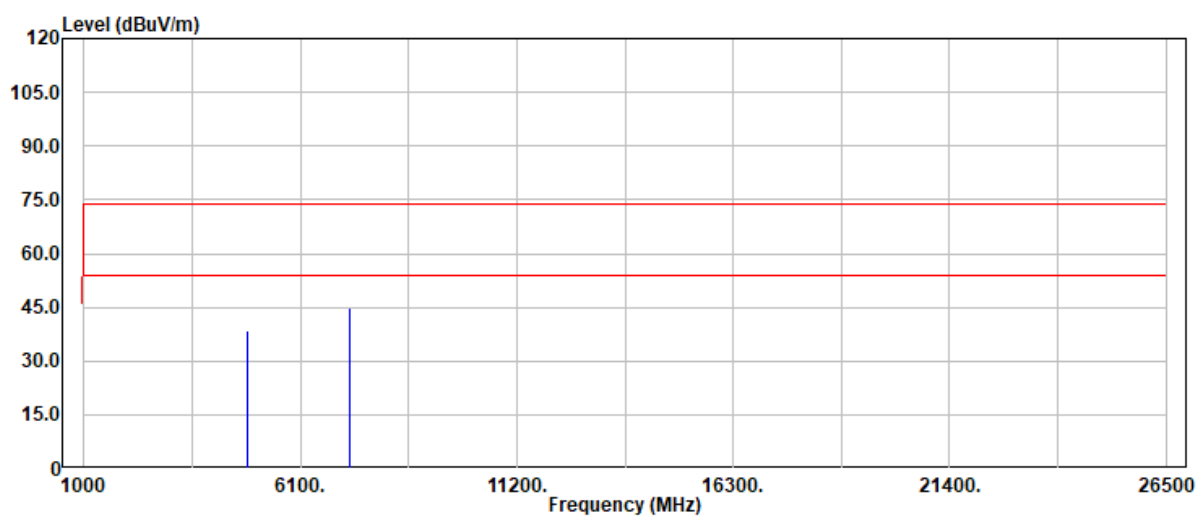


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	36.19	2.16	38.35	74.00	-35.65	Peak
4844.00	30.16	2.16	32.32	54.00	-21.68	Average
7266.00	35.95	9.08	45.03	74.00	-28.97	Peak
7266.00	26.67	9.08	35.75	54.00	-18.25	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 112 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

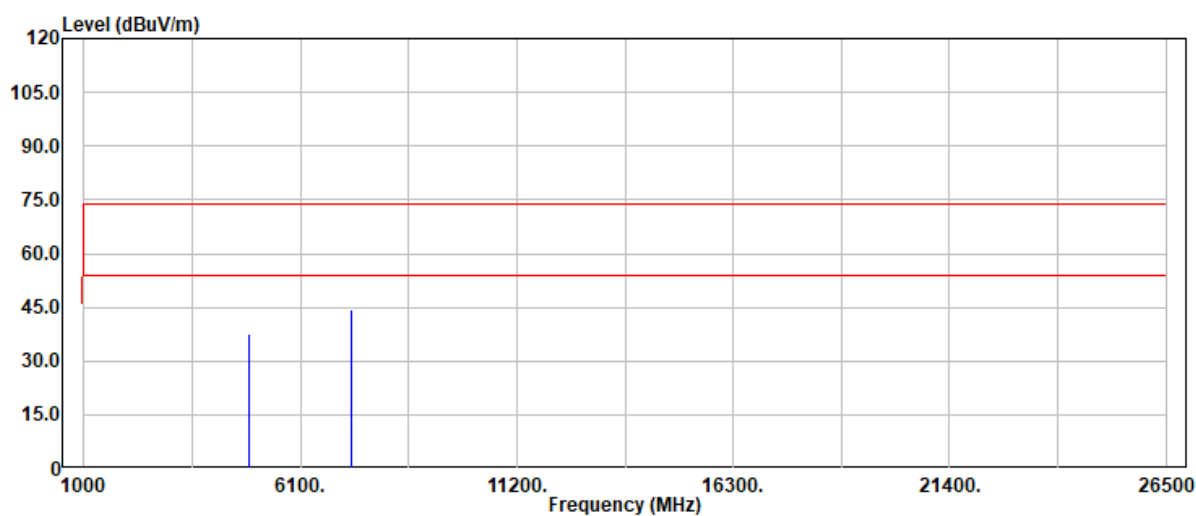


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.13	2.54	37.67	74.00	-36.33	Peak
4874.00	29.44	2.54	31.98	54.00	-22.02	Average
7311.00	35.28	9.17	44.45	74.00	-29.55	Peak
7311.00	26.72	9.17	35.89	54.00	-18.11	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 113 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

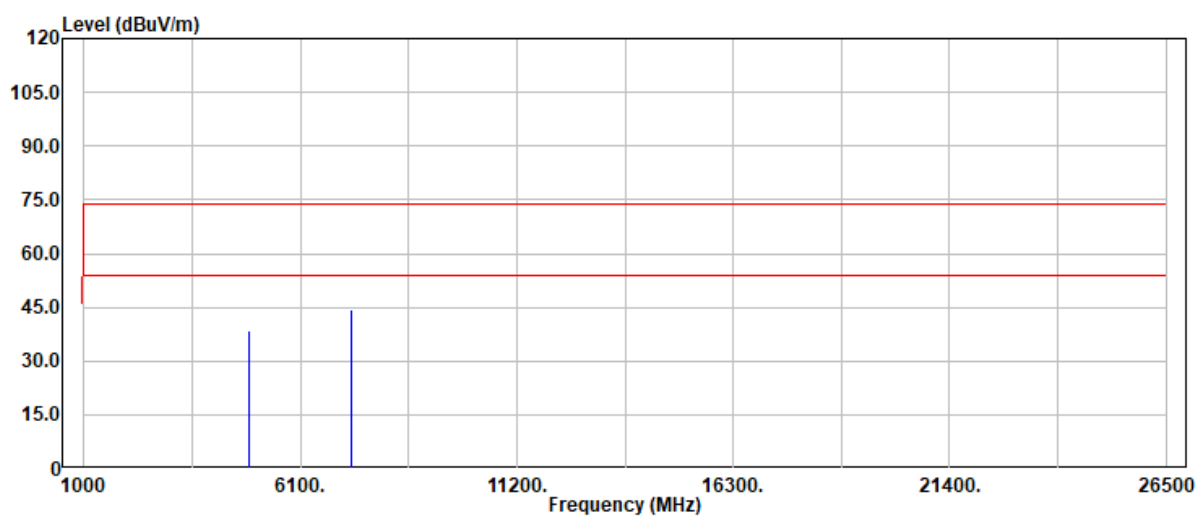


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.84	2.54	38.38	74.00	-35.62	Peak
4874.00	28.63	2.54	31.17	54.00	-22.83	Average
7311.00	35.03	9.17	44.20	74.00	-29.80	Peak
7311.00	26.67	9.17	35.84	54.00	-18.16	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 114 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 9

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

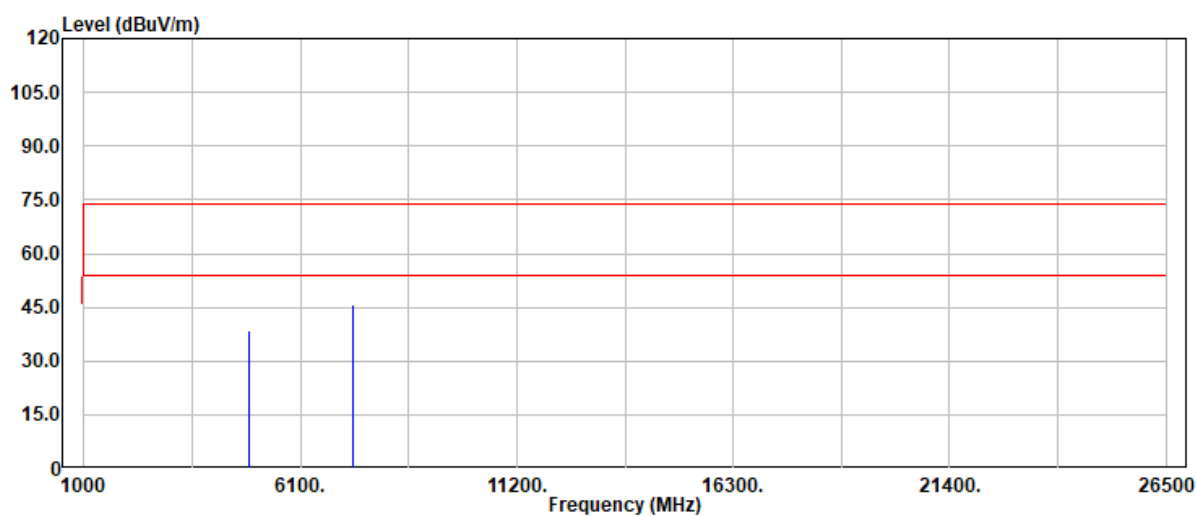


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	35.31	2.99	38.30	74.00	-35.70	Peak
4904.00	27.78	2.99	30.77	54.00	-23.23	Average
7356.00	36.16	9.42	45.58	74.00	-28.42	Peak
7356.00	26.51	9.42	35.93	54.00	-18.07	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 115 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11n40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 9

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

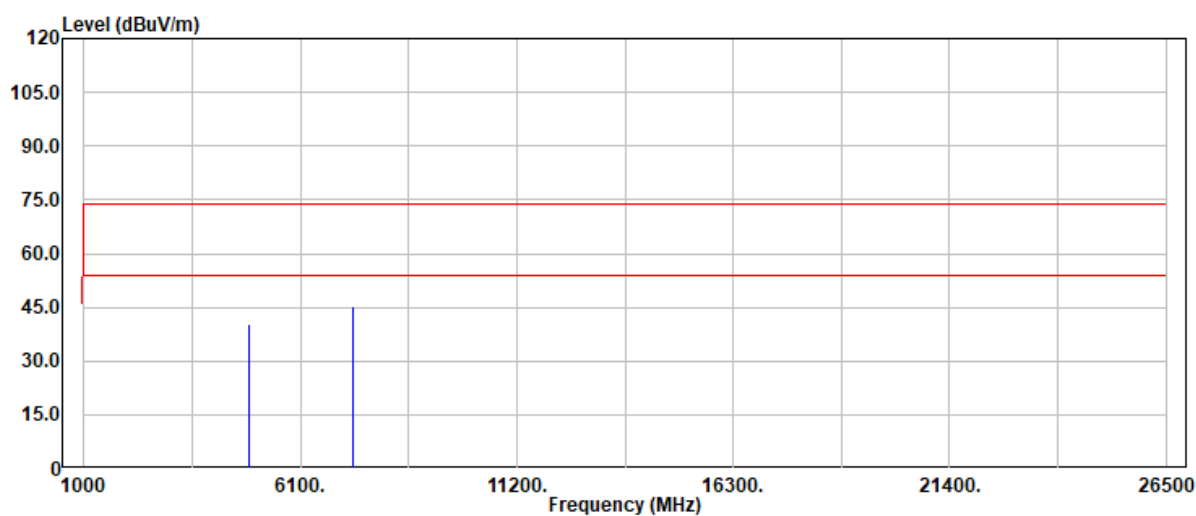


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	37.48	2.99	40.47	74.00	-33.53	Peak
4904.00	27.60	2.99	30.59	54.00	-23.41	Average
7356.00	35.69	9.42	45.11	74.00	-28.89	Peak
7356.00	26.62	9.42	36.04	54.00	-17.96	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 116 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 13.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : Vertical
Engineer : Ben.Yang
Test Chamber : 966A

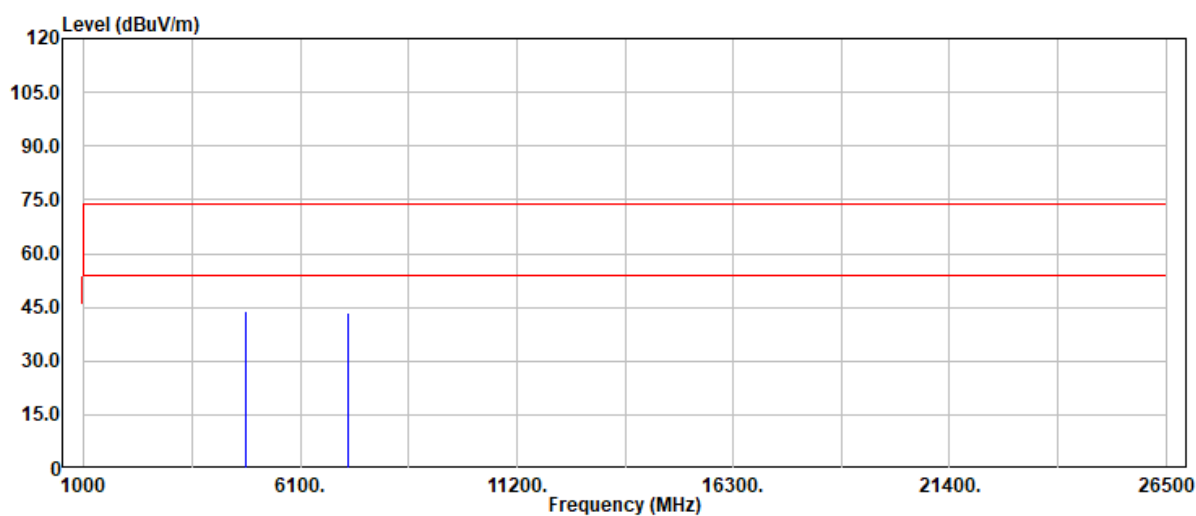


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	41.93	2.07	44.00	74.00	-30.00	Peak
4824.00	34.87	2.07	36.94	54.00	-17.06	Average
7236.00	34.69	8.98	43.67	74.00	-30.33	Peak
7236.00	26.77	8.98	35.75	54.00	-18.25	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 117 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2412 MHz
Operation Mode : TX
EUT Pol : H
Setting : 13.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

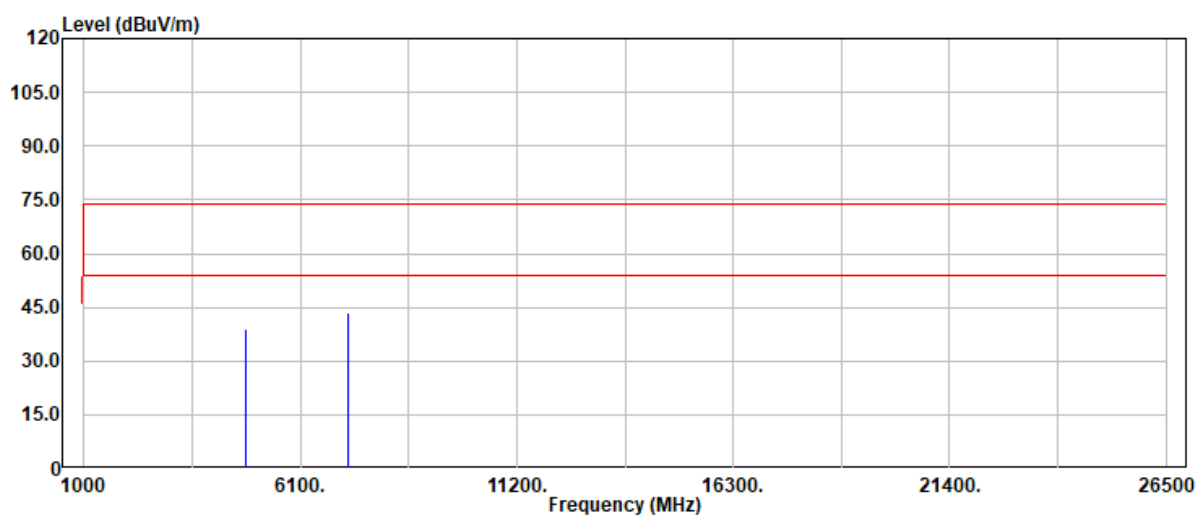


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4824.00	36.75	2.07	38.82	74.00	-35.18	Peak
4824.00	33.11	2.07	35.18	54.00	-18.82	Average
7236.00	34.38	8.98	43.36	74.00	-30.64	Peak
7236.00	26.68	8.98	35.66	54.00	-18.34	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 118 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 13.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

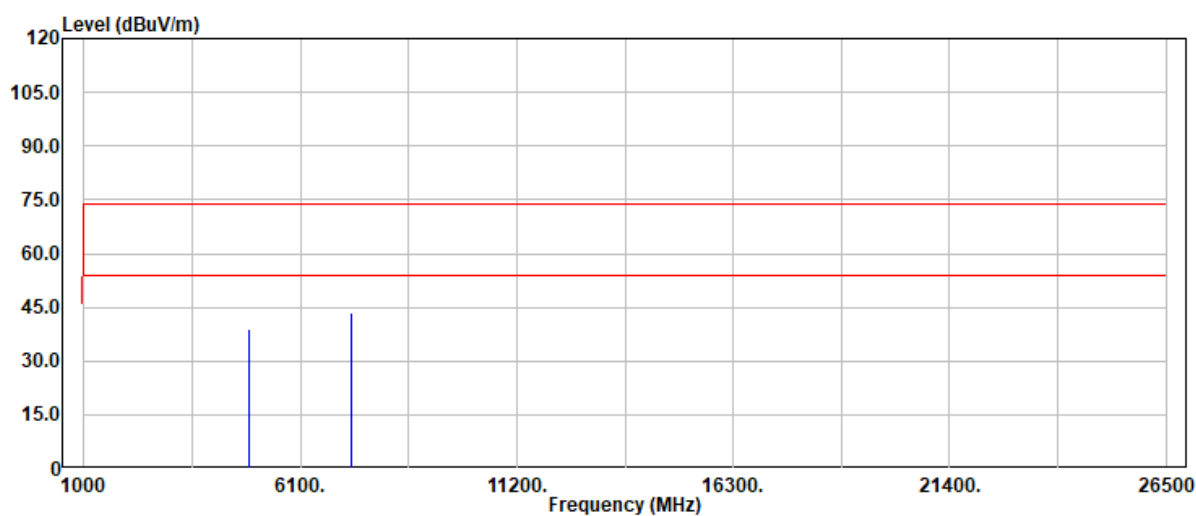


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.24	2.54	38.78	74.00	-35.22	Peak
4874.00	28.73	2.54	31.27	54.00	-22.73	Average
7311.00	34.39	9.17	43.56	74.00	-30.44	Peak
7311.00	26.57	9.17	35.74	54.00	-18.26	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 119 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 13.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

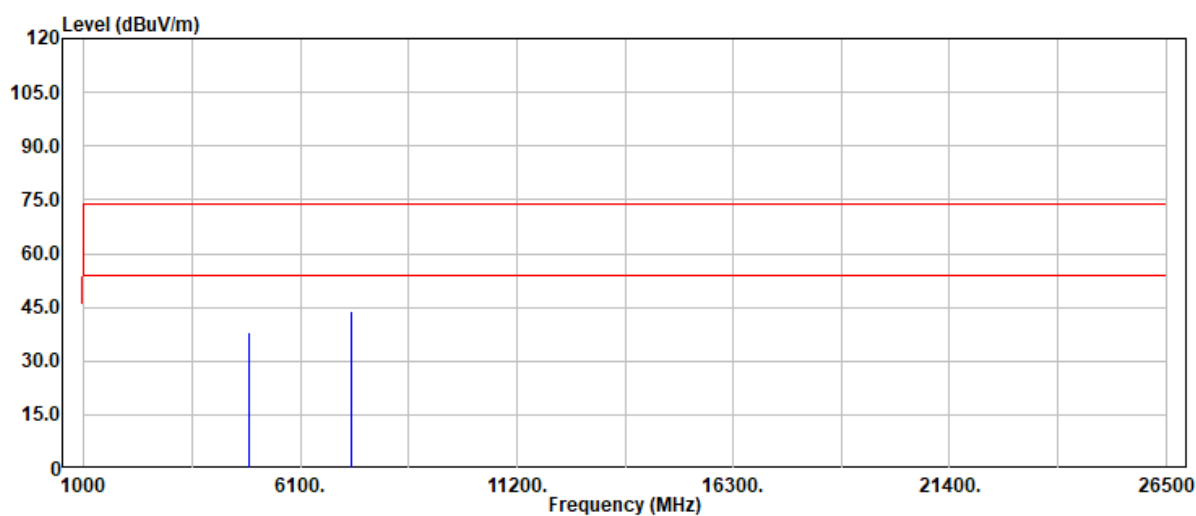


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	35.61	2.54	38.15	74.00	-35.85	Peak
4874.00	27.90	2.54	30.44	54.00	-23.56	Average
7311.00	34.80	9.17	43.97	74.00	-30.03	Peak
7311.00	26.48	9.17	35.65	54.00	-18.35	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 120 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

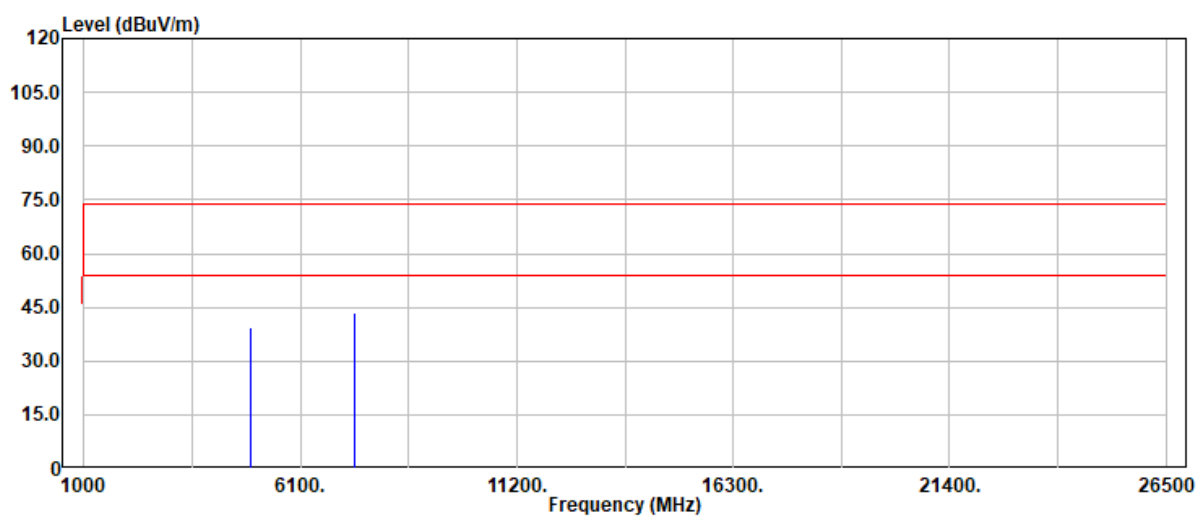


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	35.93	3.27	39.20	74.00	-34.80	Peak
4924.00	27.90	3.27	31.17	54.00	-22.83	Average
7386.00	34.17	9.46	43.63	74.00	-30.37	Peak
7386.00	26.60	9.46	36.06	54.00	-17.94	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 121 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax20
Frequency : 2462 MHz
Operation Mode : TX
EUT Pol : H
Setting : 11

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

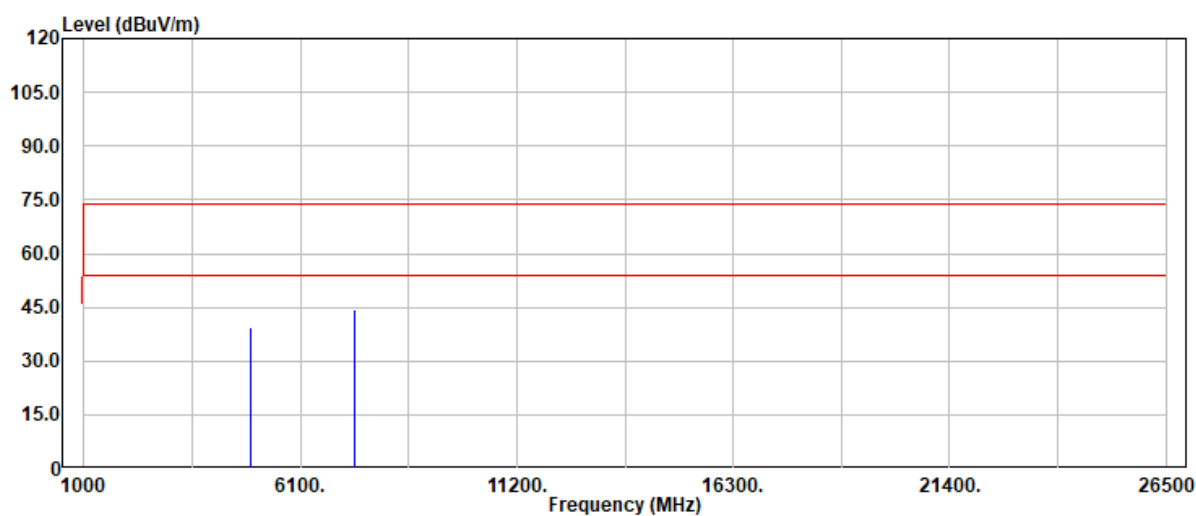


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4924.00	36.05	3.27	39.32	74.00	-34.68	Peak
4924.00	27.18	3.27	30.45	54.00	-23.55	Average
7386.00	34.71	9.46	44.17	74.00	-29.83	Peak
7386.00	26.57	9.46	36.03	54.00	-17.97	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 122 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 10.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

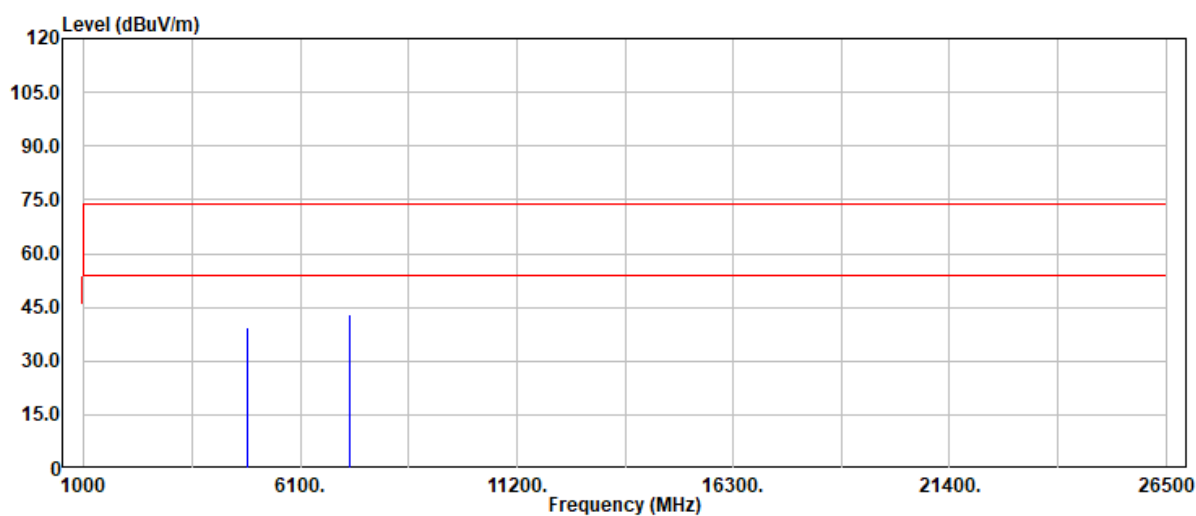


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	37.08	2.16	39.24	74.00	-34.76	Peak
4844.00	34.01	2.16	36.17	54.00	-17.83	Average
7266.00	33.96	9.08	43.04	74.00	-30.96	Peak
7266.00	26.75	9.08	35.83	54.00	-18.17	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 123 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2422 MHz
Operation Mode : TX
EUT Pol : H
Setting : 10.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

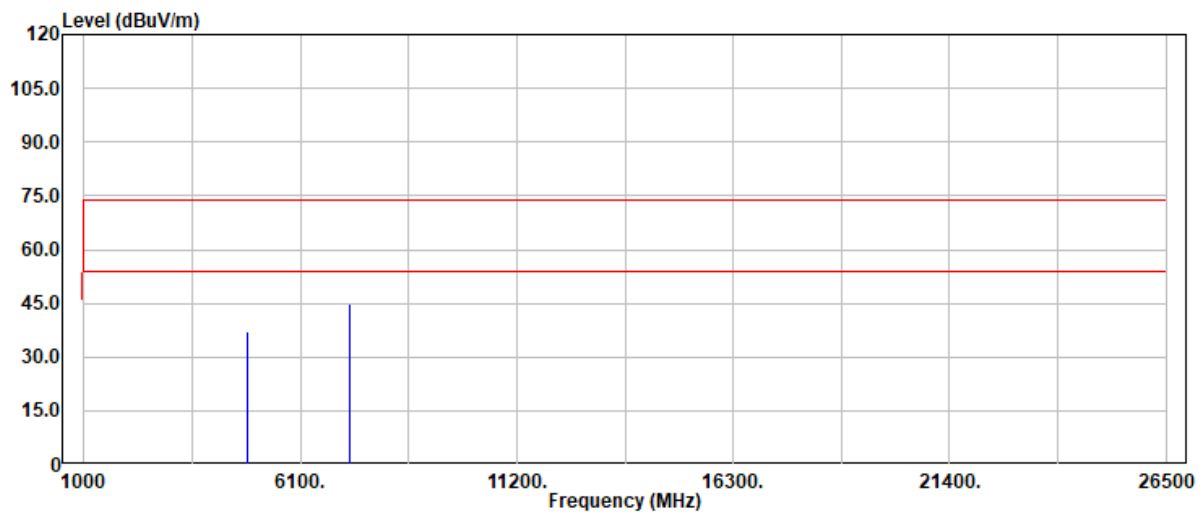


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4844.00	35.01	2.16	37.17	74.00	-36.83	Peak
4844.00	31.13	2.16	33.29	54.00	-20.71	Average
7266.00	35.57	9.08	44.65	74.00	-29.35	Peak
7266.00	26.68	9.08	35.76	54.00	-18.24	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 124 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 10.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

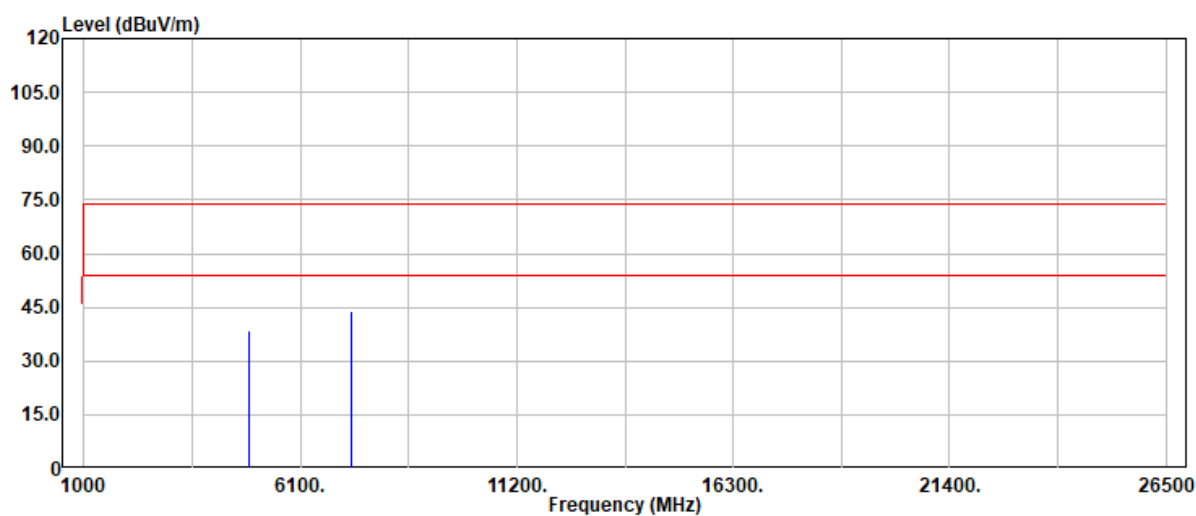


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	36.09	2.54	38.63	74.00	-35.37	Peak
4874.00	29.42	2.54	31.96	54.00	-22.04	Average
7311.00	34.86	9.17	44.03	74.00	-29.97	Peak
7311.00	26.68	9.17	35.85	54.00	-18.15	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 125 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2437 MHz
Operation Mode : TX
EUT Pol : H
Setting : 10.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

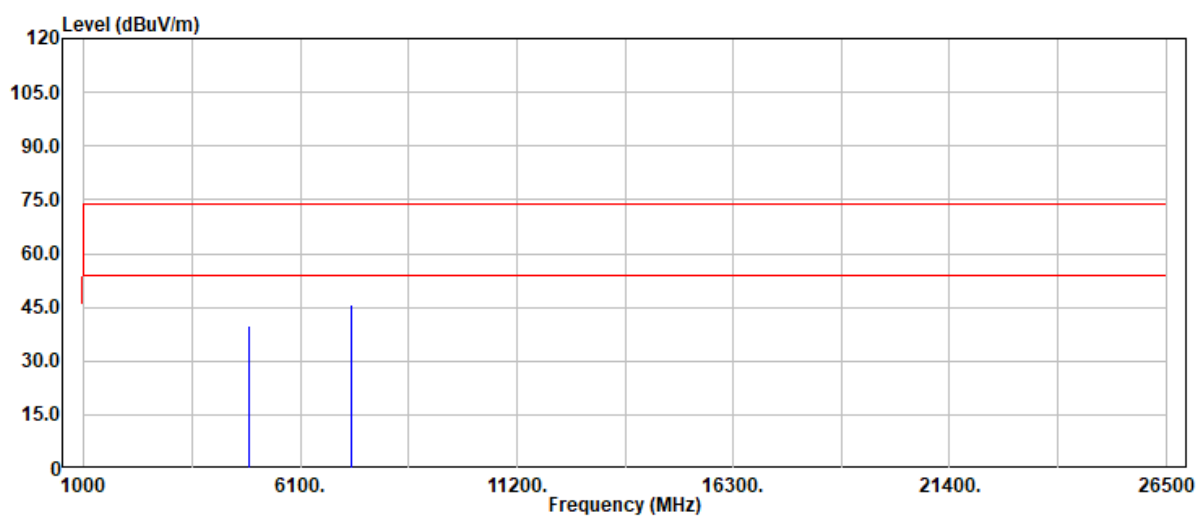


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4874.00	37.31	2.54	39.85	74.00	-34.15	Peak
4874.00	28.67	2.54	31.21	54.00	-22.79	Average
7311.00	36.50	9.17	45.67	74.00	-28.33	Peak
7311.00	26.64	9.17	35.81	54.00	-18.19	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 126 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 8.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

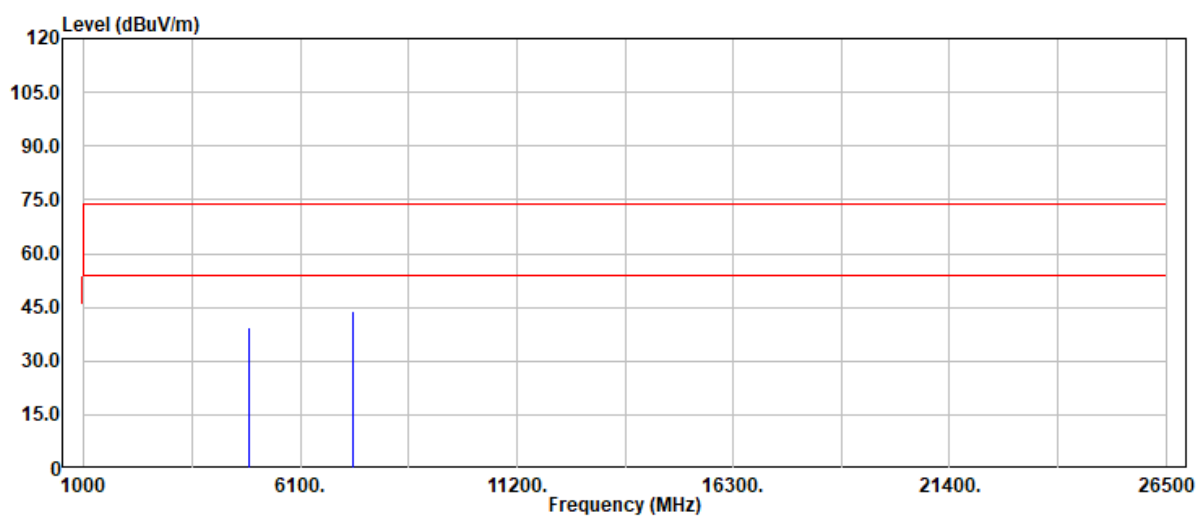


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	36.26	2.99	39.25	74.00	-34.75	Peak
4904.00	27.68	2.99	30.67	54.00	-23.33	Average
7356.00	34.59	9.42	44.01	74.00	-29.99	Peak
7356.00	26.52	9.42	35.94	54.00	-18.06	Average

Project No: TM-2412000356P
Report No.: TMWK2412004717KR

Page: 127 / 127
Rev.: 00

Project No : TM-2412000356P
Operation Band : 802.11ax40
Frequency : 2452 MHz
Operation Mode : TX
EUT Pol : H
Setting : 8.5

Test Date : 2025-02-03
Temp./Humi. : 24.3/59
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

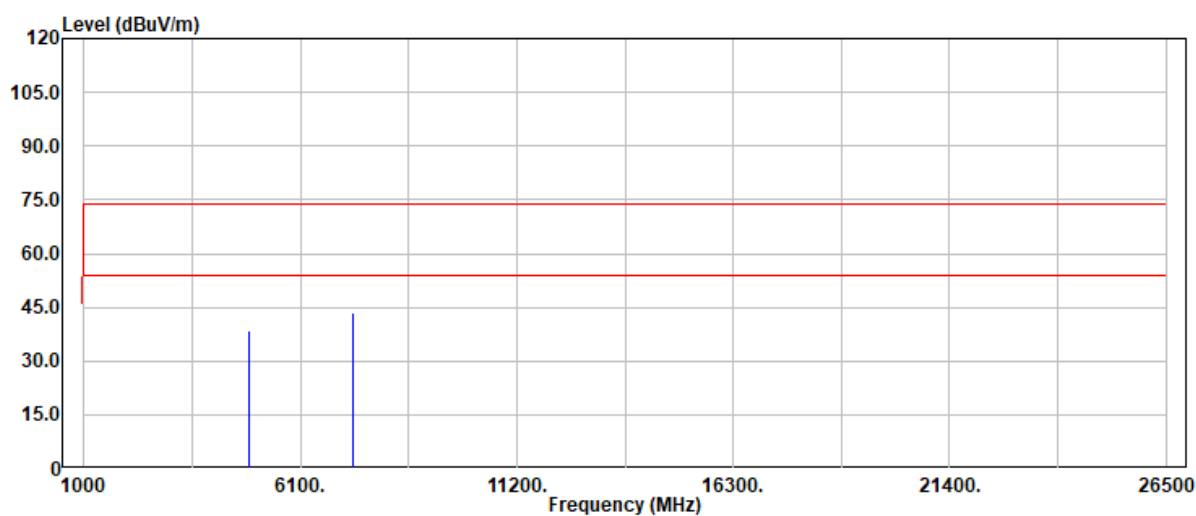

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4904.00	35.60	2.99	38.59	74.00	-35.41	Peak
4904.00	27.52	2.99	30.51	54.00	-23.49	Average
7356.00	34.23	9.42	43.65	74.00	-30.35	Peak
7356.00	26.69	9.42	36.11	54.00	-17.89	Average

- End of Test Report -