

[illegible]

MB-GX2421-BT-P Specification

1. Explanation of part number :

$$\frac{\text{MB}}{(1)} - \frac{\text{GX2421}}{(2)} - \frac{\text{LTE}}{(3)} - \frac{\text{P}}{(4)}$$

(1) Supplier : MB

(2) Model Name : GX2421

(3) Frequency : 2400-2500 Mhz

(4) Material :PCB

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
BT	2400-2500Mhz

2-2. Impedance

50 ohm nominal

2-3. VSWR ,Efficiency ,Matching and Active Data :

2-3.1 VSWR:

UNLESS OTHER SPECIFIED TOLERANCES ON : X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>MB-GX2421-BT-P</u> Specification		DOCUMENT NO.	PAGE REV. A0

Frequency Band	2402	2441	2480	2500		
2-3-1. Typical Value:	≤ 5.5	≤ 5.5	≤ 5.5	≤ 5.5		
2-3-2 Measuring Method	1. A 50 Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.					
2-3-3 Picture						


2-4. Measure and Chamber

2-4-1 Measure method

UNLESS OTHER SPECIFIED TOLERANCES ON : X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : MB-GX2421-BT-P Specification		DOCUMENT NO.	PAGE REV. A0

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

2-4-2 Chamber definition

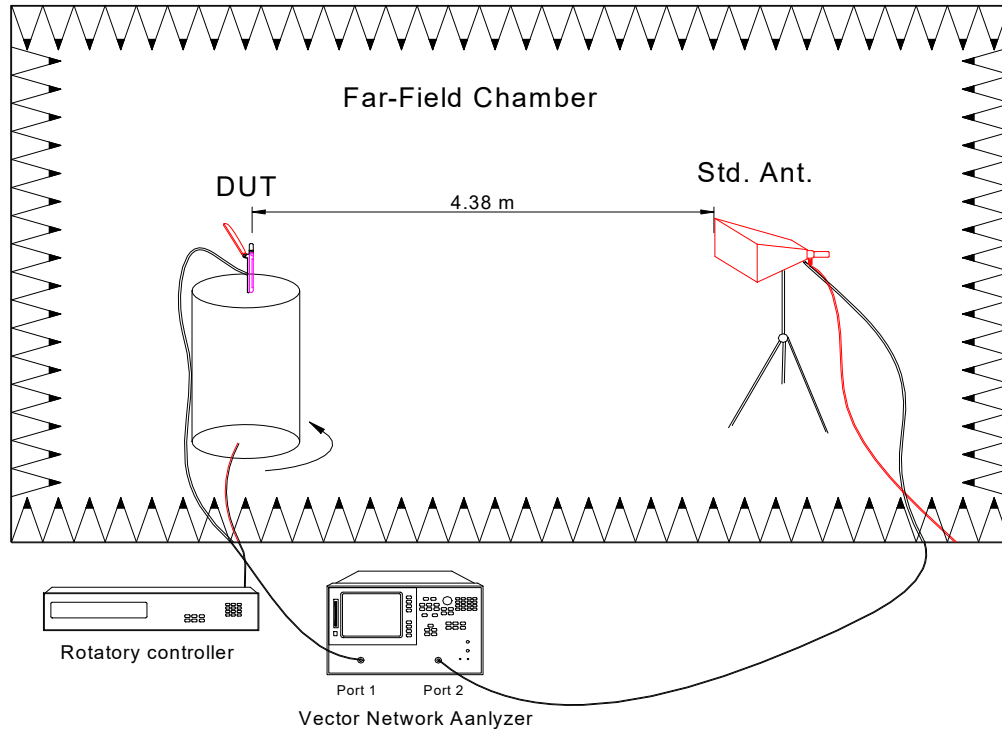


1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

2-4-3PCB BT Antenna Efficiency

UNLESS OTHER SPECIFIED TOLERANCES ON :		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
X=±2 X.X=±0.1 X.XX=±0.05			
ANGLES=±			

Frequency (MHz)	Peak Gain (dB)	Average Gain (dB)	Efficiency (%)
2400	-2.29	-5.90	25.72
2402	-1.83	-5.53	28.01
2410	-2.24	-5.76	26.54
2420	-2.03	-5.51	28.12
2430	-2.00	-5.55	27.86
2440	-2.17	-5.76	26.53
2441	-2.23	-5.77	26.48
2450	-2.02	-5.70	26.89
2460	-1.68	-5.33	29.29
2470	-1.52	-5.28	29.63
2480	-1.79	-5.62	27.42
2490	-1.75	-5.57	27.73
2500	-1.80	-5.61	27.48


3-3 PCB BT Antenna Dimensions (mm)

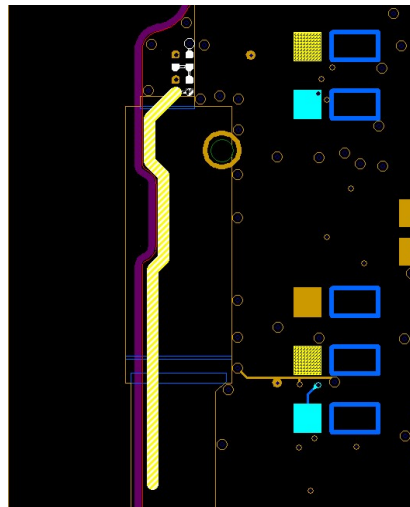


3-3 Testing Environment

Passive Test

UNLESS OTHER SPECIFIED TOLERANCES ON : X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>MB-GX2421-BT-P</u> Specification		DOCUMENT NO.	PAGE REV. A0

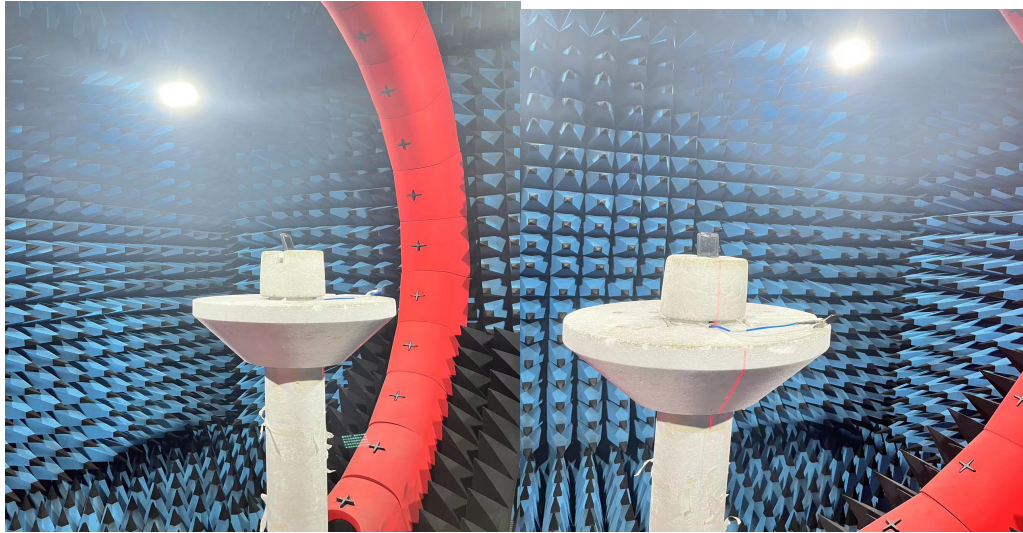

Active Test

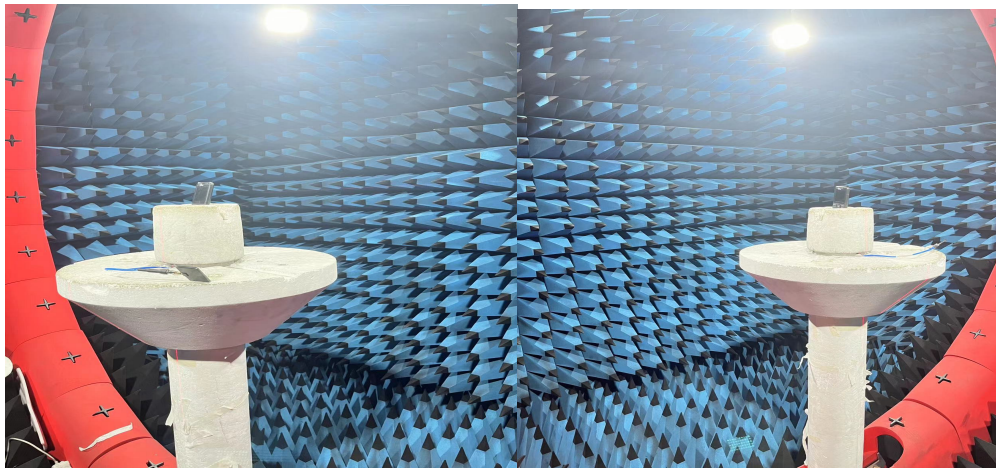


4.3D Radiation Pattern

- BT

[2441MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :			
X=±2 X.X=±0.1 X.XX=±0.05			
ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>MB-GX2421-BT-P</u> Specification		DOCUMENT NO.	PAGE REV.
			A0

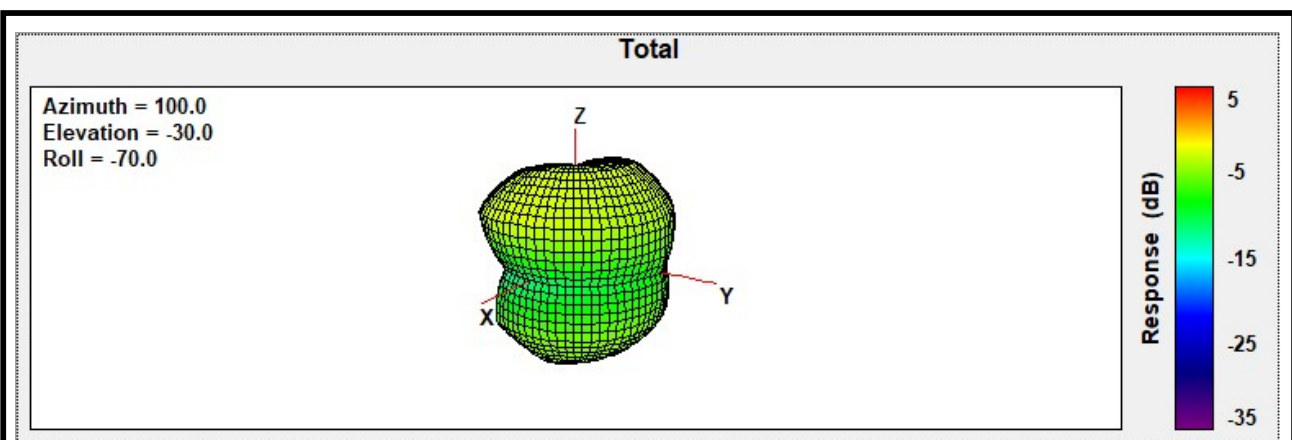

UNLESS OTHER SPECIFIED TOLERANCES ON :		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
X=±2	X.X=±0.1 X.XX=±0.05	
ANGLES=±	HOLEDIA=±	
SCALE :	UNIT : mm	
DRAWN BY :	CHECKED BY :	
DESIGNED BY :	APPROVED BY :	
TITLE : <u>MB-GX2421-BT-P</u> Specification		DOCUMENT NO.
		PAGE REV.
		A0