# SAR TEST REPORT

| | |
|---|---|
| **Applicant** | Mobiwire SAS |
| **FCC ID** | QPN-OGIMA |
| **Brand** | MobiWire |
| **Product** | 4G Smart Feature Phone |
| **Model** | MobiWire Ogima |
| **Marketing** | MobiWire Ogima |
| **Report No.** | R1903A0099-S1V2 |
| **Issue Date** | May 22, 2019 |

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992/IEEE C95.1: 1991.** The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Yu Wang　　Guangchang Fan

*Performed by: Yu Wang*　　*Approved by: Guangchang Fan*


## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

# Table of Contents

1 Test Laboratory ..... 4
1.1 Notes of the Test Report ..... 4
1.2 Test facility ..... 4
1.3 Testing Location ..... 5
1.4 Laboratory Environment ..... 5
2 Statement of Compliance ..... 6
3 Description of Equipment under Test ..... 7
4 Test Specification, Methods and Procedures ..... 10
5 Operational Conditions during Test ..... 11
5.1 Test Positions ..... 11
5.1.1 Against Phantom Head ..... 11
5.1.2 Body Worn Configuration ..... 11
5.2 Measurement Variability ..... 12
5.3 Test Configuration ..... 13
5.3.1 GSM Test Configuration ..... 13
5.3.2 UMTS Test Configuration ..... 13
5.3.3 LTE Test Configuration ..... 17
5.3.4 Wi-Fi Test Configuration ..... 19
5.3.5 BT Test Configuration ..... 20
6 SAR Measurements System Configuration ..... 21
6.1 SAR Measurement Set-up ..... 21
6.2 DASY5 E-field Probe System ..... 22
6.3 SAR Measurement Procedure ..... 23
7 Main Test Equipment ..... 25
8 Tissue Dielectric Parameter Measurements & System Verification ..... 26
8.1 Tissue Verification ..... 26
8.2 System Performance Check ..... 27
9 Normal and Maximum Output Power ..... 30
9.1 GSM Mode ..... 30
9.2 WCDMA Mode ..... 31
9.3 LTE Mode ..... 32
9.4 WLAN Mode ..... 34
9.5 Bluetooth Mode ..... 35
10 Measured and Reported (Scaled) SAR Results ..... 36
10.1 EUT Antenna Locations ..... 36
10.2 Standalone SAR test exclusion considerations ..... 37
10.3 Measured SAR Results ..... 38
10.4 Simultaneous Transmission Analysis ..... 46
11 Measurement Uncertainty ..... 50
ANNEX A: Test Layout ..... 51
ANNEX B: System Check Results ..... 53


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

ANNEX C: Highest Graph Results..... 61
ANNEX D: Probe Calibration Certificate..... 79
ANNEX E: D835V2 Dipole Calibration Certificate..... 90
ANNEX F: D1900V2 Dipole Calibration Certificate..... 98
ANNEX H: D2450V2 Dipole Calibration Certificate ..... 106
ANNEX I: D2600V2 Dipole Calibration Certificate.....114
ANNEX J:DAE4 Calibration Certificate..... 122
ANNEX K:The EUT Appearances and Test Configuration..... 127

*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2 Test facility

**CNAS (accreditation number:L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

**FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

**VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

**A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: xukai@ta-shanghai.com

## 1.4 Laboratory Environment

| | |
|---|---|
| Temperature | Min. = 18°C, Max. = 25 °C |
| Relative humidity | Min. = 30%, Max. = 70% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:
Table 1: Highest Reported SAR

| Mode | Highest Reported SAR (W/kg) | | |
|---|---|---|---|
| | 1g SAR Head | 1g SAR Body-worn (Separation 15mm) | 1g SAR Hotspot (Separation 10mm) |
| GSM 850 | **1.214** | **1.278** | **1.490** |
| GSM 1900 | 0.382 | 0.328 | 0.737 |
| WCDMA Band II | 0.636 | 0.427 | 0.729 |
| WCDMA Band V | 0.619 | 0.726 | 0.938 |
| LTE FDD 7 | 0.302 | 0.271 | 0.444 |
| Wi-Fi (2.4G) | 0.355 | 0.160 | 0.160 |
| BT | NA | NA | NA |
| Date of Testing: | March 26, 2019 ~ March 28, 2019 | | |

Note: 1) The highest Reported SAR for head, body-worn, hotspot and simultaneous transmission exposure conditions are 1.214W/kg, 1.278W/kg, 1.490W/kg, and 1.650W/kg.
2) Sand-alone SAR evaluation is not required for BT, more details information see section 10.2
3) For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Table 2: Highest Simultaneous Transmission SAR

| Exposure Configuration | 1g SAR Head | 1g SAR Body-worn (Separation 15mm) | 1g SAR Hotspot (Separation 10mm) |
|---|---|---|---|
| Highest Simultaneous Transmission SAR (W/kg) | 1.457 | 1.438 | 1.650 |
| Note: 1. The detail for simultaneous transmission consideration is described in chapter 10.4. | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 3 Description of Equipment under Test

**Client Information**

| | |
|---|---|
| **Applicant** | Mobiwire SAS |
| **Applicant address** | 79 avenue Francois Arago, 92000 NANTERRE France |
| **Manufacturer** | Mobiwire SAS |
| **Manufacturer address** | 79 avenue Francois Arago, 92000 NANTERRE France |

**General Technologies**

| | |
|---|---|
| Application Purpose: | Original Grant |
| EUT Stage: | Identical Prototype |
| Model: | MobiWire Ogima |
| IMEI: | IMEI 1: 354426100003564<br>IMEI 2: 354426100003572 |
| Hardware Version: | V01 |
| Software Version: | V01 |
| Antenna Type: | Internal Antenna |
| Device Class: | B |
| Wi-Fi Hotspot: | Wi-Fi 2.4G |
| Power Class: | GSM 850:4<br>GSM 1900:1<br>UMTS Band II/V:3<br>LTE FDD 7:3 |
| Power Level: | GSM 850:level 5<br>GSM 1900:level 0<br>UMTS Band II/V:all up bits<br>LTE FDD 7:max power |
| EUT Accessory | |
| Adapter 1 | Manufacturer: HUIZHOU BYD ELECTRONIC CO.,LTD<br>Model: WAU550mA5V00-02 |
| Adapter 2 | Manufacturer: HUIZHOU BYD ELECTRONIC CO.,LTD<br>Model: WUK550mA5V00-02 |
| Adapter 3 | Manufacturer: Dongguan Aohai Power Technology Co.,Ltd<br>Model: A31A-050055U-EU1 |
| Battery | Manufacturer: NINGBO VEKEN BATTERY CO., LTD<br>Model: 178151250 |
| Earphone | Manufacturer: JIUJIANG JUWEI ELECTRONICS CO.,LTD<br>Model: JWEP0957-M01R |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

| Difference Configuration Statement | | |
|---|---|---|
| **Configuration** | **Configuration 1** | **Configuration 2** |
| SIM Card Slot | SIM 1 | SIM 1, SIM 2 |
| Others | The same | The same |
| The difference between the two EUT is only the quantity of SIM Card Slot, however, only the EUT with 2 SIM Card Slots is refer to this report. | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Wireless Technology and Frequency Range**

| Wireless Technology | | Modulation | Operating mode | Tx (MHz) |
|---|---|---|---|---|
| GSM | 850 | Voice(GMSK)<br>GPRS(GMSK)<br>EGPRS(GMSK,8PSK) | ☐Multi-slot Class:8-1UP<br>☐Multi-slot Class:10-2UP<br>☒Multi-slot Class:12-4UP<br>☐Multi-slot Class:33-4UP | 824 ~ 849 |
| | 1900 | | | 1850 ~ 1910 |
| | Does this device support DTM (Dual Transfer Mode)? ☐Yes ☒No | | | |
| UMTS | Band II | QPSK, 16QAM | HSDPA UE Category:24<br>HSUPA UE Category:7<br>DC-HSDPA UE Category:24<br>HSPA+ Category:7 | 1850 ~ 1910 |
| | Band V | | | 824 ~ 849 |
| LTE | FDD 7 | QPSK, 16QAM | Rel.9 /Category 4 | 2500 ~ 2570 |
| | Does this device support Carrier Aggregation (CA) ☐Yes ☒No | | | |
| | Does this device support SV-LTE (1xRTT-LTE)? ☐Yes ☒No | | | |
| BT | 2.4G | Version 4.2 LE | | 2402 ~2480 |
| Wi-Fi | 2.4G | DSSS,OFDM | 802.11b/g/n HT20 | 2412 ~ 2462 |
| | | OFDM | 802.11n HT40 | 2422 ~ 2452 |
| | Does this device support MIMO ☐Yes☒No | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992/IEEE C95.1: 1991, the following FCC Published RF exposure KDB procedures:

248227 D01 802.11Wi-Fi SAR v02r02
447498 D01 General RF Exposure Guidance v06
648474 D04 Handset SAR v01r03
690783 D01 SAR Listings on Grants v01r03
865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
865664 D02 RF Exposure Reporting v01r02
941225 D01 3G SAR Procedures v03r01
941225 D05 SAR for LTE Devices v02r05
941225 D06 Hotspot Mode v02r01


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 5 Operational Conditions during Test

## 5.1 Test Positions

### 5.1.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

### 5.1.2 Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 5.2 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:
1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 5.3 Test Configuration

### 5.3.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

**Table 3: The allowed power reduction in the multi-slot configuration**

| Number of timeslots in uplink assignment | Permissible nominal reduction of maximum output power,(dB) |
|---|---|
| 1 | 0 |
| 2 | 0 to 3,0 |
| 3 | 1,8 to 4,8 |
| 4 | 3,0 to 6,0 |

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

### 5.3.2 UMTS Test Configuration

#### 5.3.2.1 3G SAR Test Reduction Procedure

The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations modes according to output power, exposure conditions and device operating capabilities. Maximum output power is verified by applying the applicable versions of 3GPP TS 34.121.

#### 5.3.2.2 Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest SAR configuration in 12.2 kbps RMC for head exposure.

#### 5.3.2.3 Body-worn accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the EUT with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the EUT, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC

#### 5.3.2.4 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest SAR body-worn accessory exposure configuration in 12.2 kbps RMC. EUT with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device.The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(βc, βd), and HS-DPCCH power offset parameters (ΔACK, ΔNACK, ΔCQI) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 4: Subtests for UMTS Release 5 HSDPA**

| Sub-set | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c/\beta_d$ | $\beta_{hs}$ (note 1, note 2) | CM(dB) (note 3) | MPR(dB) |
|---|---|---|---|---|---|---|---|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 | 15/15 | 64 | 12/15 | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note1: $\Delta_{ACK}$, $\Delta_{NACK}$ and $\Delta_{CQI}$= 8$\Leftrightarrow$$A_{hs}$ = $\beta_{hs}/\beta_c$=30/15$\Leftrightarrow$$\beta_{hs}$=30/15*$\beta_c$

Note2: CM=1 for $\beta_c/\beta_d$ =12/15, $\beta_{hs}/\beta_c$=24/15.

Note3: For subtest 2 the $\beta_c\beta_d$ ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c$=11/15 and $\beta_d$=15/15.

#### 5.3.2.5 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA EUT and 'Release 5 HSDPA Data Devices' sections of this document

**Table 5: Sub-Test 5 Setup for Release 6 HSUPA**

| Sub-set | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c/\beta_d$ | $\beta_{hs}$ (1) | $\beta_{ec}$ | $\beta_{ed}$ | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM (2) (dB) | MPR (dB) | AG (4) Index | E-TFCI |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 11/15 (3) | 15/15 (3) | 64 | 11/15 (3) | 22/15 | 209/225 | 1039/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}$:47/15<br>$\beta_{ed2}$:47/15 | 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 (4) | 15/15 (4) | 64 | 15/15 (4) | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Note 1: $\Delta_{ACK}$, ΔNACK and $\Delta_{CQI}$ = 8 ⇔ $A_{hs} = \underline{\beta}_{hs}/\underline{\beta}_c$ = 30/15 ⇔$\underline{\beta}_{hs}$= 30/15 *$\beta_c$.

Note 2: CM = 1 for βc/βd =12/15, $\underline{\beta}_{hs}/\underline{\beta}_c$ =24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the βc/βd ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to βc = 10/15 and βd = 15/15.

Note 4: For subtest 5 the βc/βd ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to βc = 14/15 and βd = 15/15.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: βed can not be set directly; it is set by Absolute Grant Value.

**Table 6: HSUPA UE category**

| UE E-DCH Category | Maximum E-DCH Codes Transmitted | Number of HARQ Processes | E-DCH TTI (ms) | Minimum Spreading Factor | Maximum E-DCH Transport Block Bits | Max Rate (Mbps) |
|---|---|---|---|---|---|---|
| 1 | 1 | 4 | 10 | 4 | 7110 | 0.7296 |
| 2 | 2 | 8 | 2 | 4 | 2798 | 1.4592 |
| | 2 | 4 | 10 | 4 | 14484 | |
| 3 | 2 | 4 | 10 | 4 | 14484 | 1.4592 |
| 4 | 2 | 8 | 2 | 2 | 5772 | 2.9185 |
| | 2 | 4 | 10 | 2 | 20000 | 2.00 |
| 5 | 2 | 4 | 10 | 2 | 20000 | 2.00 |
| 6 | 4 | 8 | 2 | 2 SF2 & 2 SF4 | 11484 | 5.76 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

| | | | | | | |
|---|---|---|---|---|---|---|
| (No DPDCH) | 4 | 4 | 10 | | 20000 | 2.00 |
| 7 (No DPDCH) | 4 | 8 | 2 | 2 SF2 & 2 SF4 | 22996 | ? |
| | 4 | 4 | 10 | | 20000 | ? |
| NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0) | | | | | | |

### 5.3.2.6 HSPA, HSPA+ and DC-HSDPA Test Configuration

SAR test exclusion may apply to 3GPP Rel. 6 HSPA and Rel. 8 DC-HSDPA. When SAR measurement is required for HSPA or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements. Without prior KDB confirmation to determine the SAR results are acceptable, a PAG is required for equipment approval.

SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.

2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode.36 Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA: a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.

i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.

b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.

c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GGPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.

5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

**Table 7: HS-DSCH UE category**


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Table 5.1a: FDD HS-DSCH physical layer categories

| HS-DSCH category | Maximum number of HS-DSCH codes received | Minimum inter-TTI interval | Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1 | Total number of soft channel bits | Supported modulations without MIMO operation or dual cell operation | Supported modulations with MIMO operation and without dual cell operation | Supported modulations with dual cell operation |
|---|---|---|---|---|---|---|---|
| Category 1 | 5 | 3 | 7298 | 19200 | QPSK, 16QAM | Not applicable (MIMO not supported) | Not applicable (dual cell operation not supported) |
| Category 2 | 5 | 3 | 7298 | 28800 | | | |
| Category 3 | 5 | 2 | 7298 | 28800 | | | |
| Category 4 | 5 | 2 | 7298 | 38400 | | | |
| Category 5 | 5 | 1 | 7298 | 57600 | | | |
| Category 6 | 5 | 1 | 7298 | 67200 | | | |
| Category 7 | 10 | 1 | 14411 | 115200 | | | |
| Category 8 | 10 | 1 | 14411 | 134400 | | | |
| Category 9 | 15 | 1 | 20251 | 172800 | | | |
| Category 10 | 15 | 1 | 27952 | 172800 | | | |
| Category 11 | 5 | 2 | 3630 | 14400 | QPSK | | |
| Category 12 | 5 | 1 | 3630 | 28800 | | | |
| Category 13 | 15 | 1 | 35280 | 259200 | QPSK, 16QAM, 64QAM | | |
| Category 14 | 15 | 1 | 42192 | 259200 | | | |
| Category 15 | 15 | 1 | 23370 | 345600 | QPSK, 16QAM | | |
| Category 16 | 15 | 1 | 27952 | 345600 | | | |
| Category 17 NOTE 2 | 15 | 1 | 35280 | 259200 | QPSK, 16QAM, 64QAM | – | |
| | | | 23370 | 345600 | – | QPSK, 16QAM | |
| Category 18 NOTE 3 | 15 | 1 | 42192 | 259200 | QPSK, 16QAM, 64QAM | – | |
| | | | 27952 | 345600 | – | QPSK, 16QAM | |
| Category 19 | 15 | 1 | 35280 | 518400 | QPSK, 16QAM, 64QAM | | |
| Category 20 | 15 | 1 | 42192 | 518400 | | | |
| Category 21 | 15 | 1 | 23370 | 345600 | - | - | QPSK, 16QAM |
| Category 22 | 15 | 1 | 27952 | 345600 | | | |
| Category 23 | 15 | 1 | 35280 | 518400 | | | QPSK, 16QAM, 64QAM |
| Category 24 | 15 | 1 | 42192 | 518400 | | | |

### 5.3.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

**A) Spectrum Plots for RB Configurations**

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

**B) MPR**

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

**C)A-MPR**

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

**D) Largest channel bandwidth standalone SAR test requirements**

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

**E) Other channel bandwidth standalone SAR test requirements**

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

### 5.3.4 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported* SAR for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions are tested.
    - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
    - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required test channels are considered.
    - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

### 5.3.5 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. And the CBT control the EUT operating with hoping off and data rate set for DH5.

The SAR measurement takes full account of the BT duty cycle and is reflected in the report, and the duty factor of the device is as follow:

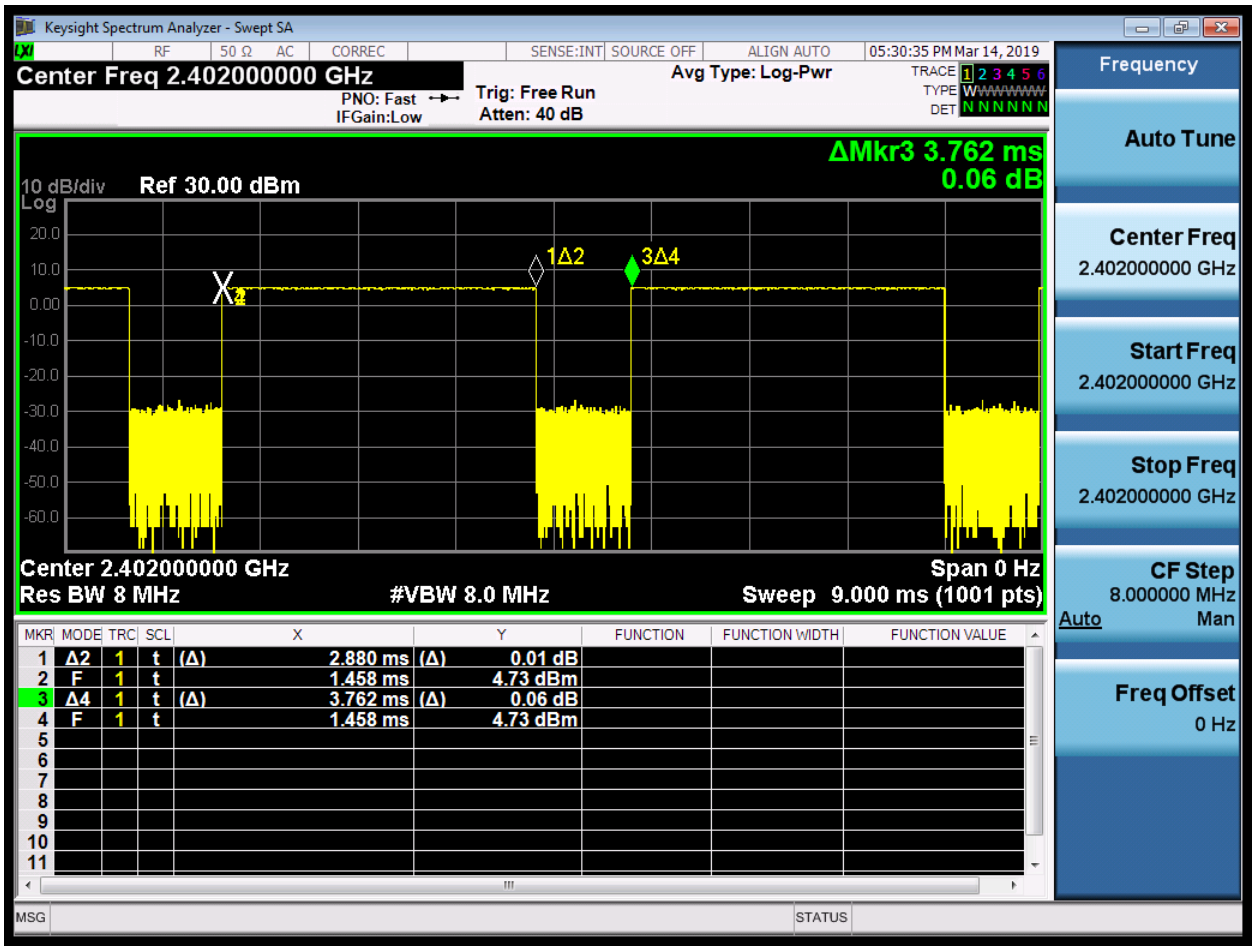


Note: Duty factor= Ton (ms)/ T(on+off) (ms)=2.880/3.762=76.6%


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 6 SAR Measurements System Configuration

## 6.1 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

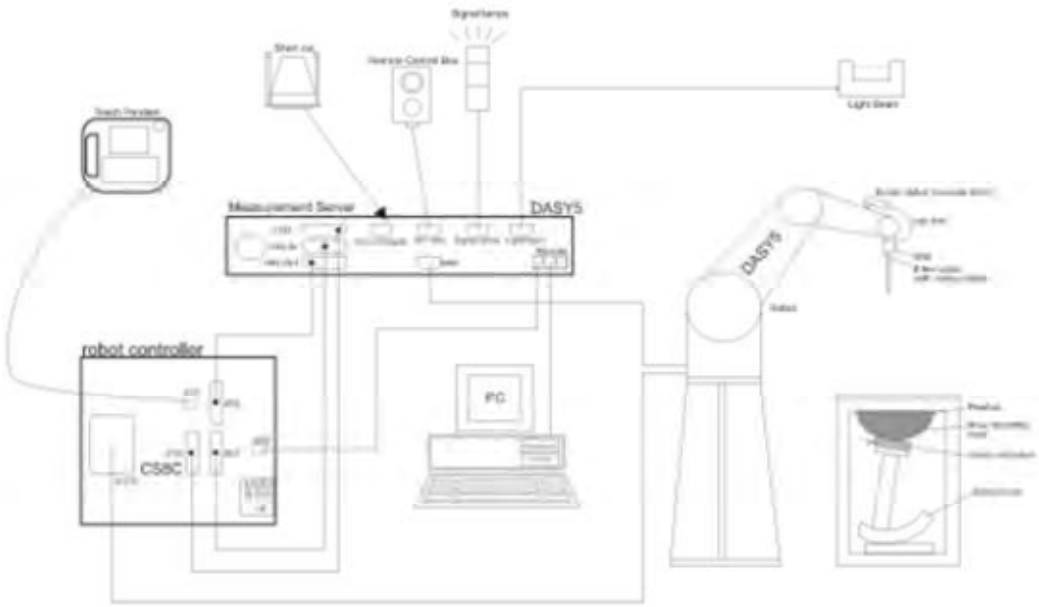


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4(manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

**EX3DV4 Probe Specification**

| | |
|---|---|
| Construction | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration | ISO/IEC 17025 calibration service available |
| Frequency | 10 MHz to > 6 GHz<br>Linearity: ± 0.2 dB<br>(30 MHz to 6 GHz) |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range | 10 µW/g to > 100 mW/g Linearity: ± 0.2dB (noise: typically < 1 µW/g) |
| Dimensions | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm |
| Application | High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |

**E-field Probe Calibration**

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy was evaluated and found to be better than ± 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**SAR=C∆T/∆t**

Where: ∆t = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

∆T = Temperature increase due to RF exposure.

Or

**SAR=$|E|^2\sigma/\rho$**

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m$^3$).

## 6.3 SAR Measurement Procedure

**Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

| | ≤3 GHz | > 3 GHz |
|---|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | ½·δ·ln(2) ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: ΔxArea, ΔyArea | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

### Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

| | | | ≤3GHz | > 3 GHz |
|---|---|---|---|---|
| Maximum zoom scan spatial resolution: $\triangle x_{zoom} \triangle y_{zoom}$ | | | ≤2GHz: ≤8mm<br>2 – 3GHz: ≤5mm* | 3 – 4GHz: ≤5mm*<br>4 – 6GHz: ≤4mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | Uniform grid: $\triangle z_{zoom}(n)$ | | ≤5mm | 3 – 4GHz: ≤4mm<br>4 – 5GHz: ≤3mm<br>5 – 6GHz: ≤2mm |
| | Graded grid | $\triangle z_{zoom}(1)$: between 1st two points closest to phantom surface | ≤4mm | 3 – 4GHz: ≤3mm<br>4 – 5GHz: ≤2.5mm<br>5 – 6GHz: ≤2mm |
| | | $\triangle z_{zoom}(n>1)$: between subsequent points | $\leq 1.5 \bullet \triangle z_{zoom}(n-1)$ | |
| Minimum zoom scan volume | X, y, z | | ≥30mm | 3 – 4GHz: ≥28mm<br>4 – 5GHz: ≥25mm<br>5 – 6GHz: ≥22mm |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.<br>* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4W/kg, ≤8mm, ≤7mm and ≤5mm zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz. | | | | |

### Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 7 Main Test Equipment

| Name of Equipment | Manufacturer | Type/Model | Serial Number | Last Cal. | Cal. Due Date |
|---|---|---|---|---|---|
| Network analyzer | Agilent | E5071B | MY42404014 | 2018-05-20 | 2019-05-19 |
| Dielectric Probe Kit | HP | 85070E | US44020115 | 2018-05-20 | 2019-05-19 |
| Power meter | Agilent | E4417A | GB41291714 | 2018-05-21 | 2019-05-20 |
| Power sensor | Agilent | N8481H | MY50350004 | 2018-05-21 | 2019-05-20 |
| Power sensor | Agilent | E9327A | US40441622 | 2018-05-20 | 2019-05-19 |
| Dual directional coupler | Agilent | 778D-012 | 50519 | 2018-05-21 | 2019-05-20 |
| Dual directional coupler | Agilent | 777D | 50146 | 2018-05-20 | 2019-05-19 |
| Amplifier | INDEXSAR | IXA-020 | 0401 | 2018-05-20 | 2019-05-19 |
| Wideband radio communication tester | R&S | CMW 500 | 113645 | 2018-05-20 | 2019-05-19 |
| E-field Probe | SPEAG | EX3DV4 | 3677 | 2018-05-29 | 2019-05-28 |
| DAE | SPEAG | DAE4 | 1291 | 2018-12-04 | 2019-12-03 |
| Validation Kit 835MHz | SPEAG | D835V2 | 4d020 | 2017-08-28 | 2020-08-27 |
| Validation Kit 1900MHz | SPEAG | D1900V2 | 5d060 | 2017-08-26 | 2020-08-25 |
| Validation Kit 2450MHz | SPEAG | D2450V2 | 786 | 2017-08-29 | 2020-08-28 |
| Validation Kit 2600MHz | SPEAG | D2600V2 | 1025 | 2018-05-02 | 2021-05-01 |
| Temperature Probe | Tianjin jinming | JM222 | AA1009129 | 2018-05-17 | 2019-05-16 |
| Hygrothermograph | Anymetr | NT-311 | 20150731 | 2018-05-17 | 2019-05-16 |
| Software for Test | Speag | DASY5 | 52.8.8.1222 | / | / |
| Softwarefor Tissue | Agilent | 85070 | E06.01.36 | / | / |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 8 Tissue Dielectric Parameter Measurements & System Verification

## 8.1 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance.

**Target values**

| Frequency (MHz) | | Water (%) | Salt (%) | Sugar (%) | Glycol (%) | Preventol (%) | Cellulose (%) | $\varepsilon_r$ | σ(s/m) |
|---|---|---|---|---|---|---|---|---|---|
| Head | 835 | 41.45 | 1.45 | 56 | 0 | 0.1 | 1.0 | 41.5 | 0.90 |
| | 1900 | 55.242 | 0.306 | 0 | 44.452 | 0 | 0 | 40.0 | 1.40 |
| | 2450 | 62.7 | 0.5 | 0 | 36.8 | 0 | 0 | 39.2 | 1.80 |
| | 2600 | 55.242 | 0.306 | 0 | 44.452 | 0 | 0 | 39.0 | 1.96 |
| Body | 835 | 52.5 | 1.4 | 45 | 0 | 0.1 | 1.0 | 55.2 | 0.97 |
| | 1900 | 69.91 | 0.13 | 0 | 29.96 | 0 | 0 | 53.3 | 1.52 |
| | 2450 | 73.2 | 0.1 | 0 | 26.7 | 0 | 0 | 52.7 | 1.95 |
| | 2600 | 72.6 | 0.1 | 0 | 27.3 | 0 | 0 | 52.5 | 2.16 |

**Measurements results**

| Frequency (MHz) | | Test Date | Temp ℃ | Measured Dielectric Parameters | | Target Dielectric Parameters | | Limit (Within ±5%) | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | $\varepsilon_r$ | σ(s/m) | $\varepsilon_r$ | σ(s/m) | Dev $\varepsilon_r$(%) | Dev σ(%) |
| 835 | Head | 3/26/2019 | 21.5 | 41.4 | 0.88 | 41.5 | 0.90 | -0.24 | -2.22 |
| | Body | 3/26/2019 | 21.5 | 54.2 | 0.96 | 55.2 | 0.97 | -1.81 | -1.03 |
| 1900 | Head | 3/28/2019 | 21.5 | 40.1 | 1.41 | 40.0 | 1.40 | 0.25 | 0.71 |
| | Body | 3/28/2019 | 21.5 | 52.6 | 1.51 | 53.3 | 1.52 | -1.31 | -0.66 |
| 2450 | Head | 3/27/2019 | 21.5 | 38.6 | 1.81 | 39.2 | 1.80 | -1.53 | 0.56 |
| | Body | 3/27/2019 | 21.5 | 52.5 | 1.98 | 52.7 | 1.95 | -0.38 | 1.54 |
| 2600 | Head | 3/27/2019 | 21.5 | 38.2 | 2.01 | 39.0 | 1.96 | -2.05 | 2.55 |
| | Body | 3/27/2019 | 21.5 | 51.5 | 2.23 | 52.5 | 2.16 | -1.90 | 3.24 |
| Note: The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz. | | | | | | | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 8.2 System Performance Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

System check is performed regularly on all frequency bands where tests are performed with the DASY system.

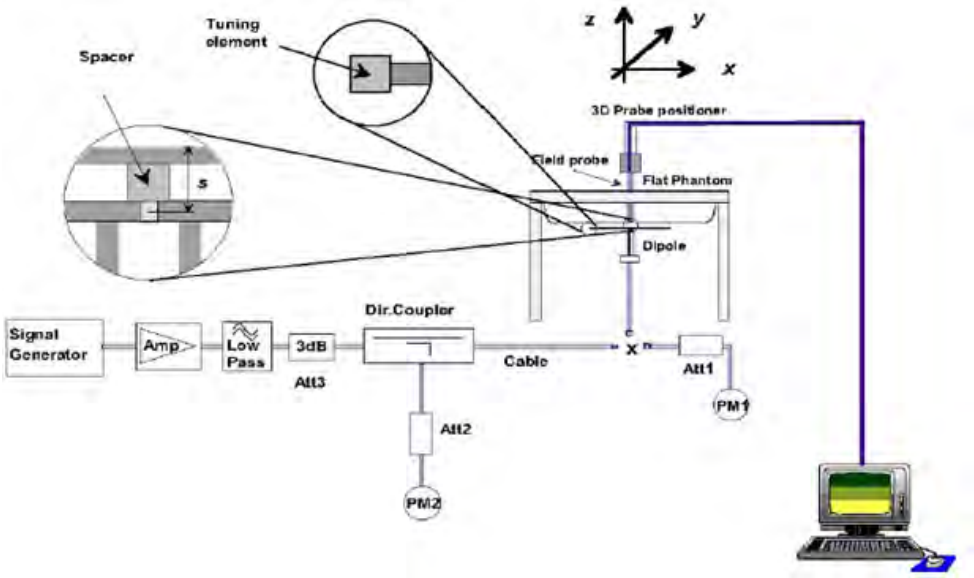


**Picture 1System Performance Check setup**

**Picture 2 Setup Photo**


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< - 20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

| Dipole | | Date of Measurement | Return Loss(dB) | Δ % | Impedance (Ω) | ΔΩ |
|---|---|---|---|---|---|---|
| Dipole D835V2 SN: 4d020 | Head Liquid | 8/28/2017 | -31.9 | / | 50.3 | / |
| | | 8/27/2018 | -29.0 | 9.09 | 46.6 | -3.7 |
| | Body Liquid | 8/28/2017 | -24.8 | / | 46.8 | / |
| | | 8/27/2018 | -27.4 | -10.48 | 48.1 | 1.3 |
| Dipole D1900V2 SN: 5d060 | Head Liquid | 8/26/2017 | -23.4 | / | 52.0 | / |
| | | 8/25/2018 | -24.7 | -5.56 | 54.4 | 2.4 |
| | Body Liquid | 8/26/2017 | -21.4 | / | 52.7 | / |
| | | 8/25/2018 | -24.6 | -14.95 | 55.6 | 2.9 |
| Dipole D2450V2 SN: 786 | Head Liquid | 8/29/2017 | -25.5 | / | 53.4 | / |
| | | 8/28/2018 | -23.0 | 9.80 | 57.2 | 3.8 |
| | Body Liquid | 8/29/2017 | -23.6 | / | 51.0 | / |
| | | 8/28/2018 | -23.7 | -0.42 | 55.2 | 4.2 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**System Check results**

| Frequency (MHz) | | Test Date | Temp ℃ | 250mW Measured $SAR_{1g}$ (W/kg) | 1W Normalized $SAR_{1g}$ (W/kg) | 1W Target $SAR_{1g}$ (W/kg) | Δ % (Limit ±10%) | Plot No. |
|---|---|---|---|---|---|---|---|---|
| 835 | Head | 3/26/2019 | 21.5 | 2.44 | 9.76 | 9.45 | 3.28 | 1 |
| | Body | 3/26/2019 | 21.5 | 2.41 | 9.64 | 9.75 | -1.13 | 2 |
| 1900 | Head | 3/28/2019 | 21.5 | 9.88 | 39.52 | 40.10 | -1.45 | 3 |
| | Body | 3/28/2019 | 21.5 | 9.93 | 39.72 | 39.50 | 0.56 | 4 |
| 2450 | Head | 3/27/2019 | 21.5 | 13.70 | 54.80 | 52.60 | 4.18 | 5 |
| | Body | 3/27/2019 | 21.5 | 12.50 | 50.00 | 50.80 | -1.57 | 6 |
| 2600 | Head | 3/27/2019 | 21.5 | 13.90 | 55.60 | 54.10 | 2.77 | 7 |
| | Body | 3/27/2019 | 21.5 | 13.50 | 54.00 | 54.50 | -0.92 | 8 |
| Note：Target Values used derive from the calibration certificate Data Storage and Evaluation. | | | | | | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

## 9.1 GSM Mode

| GSM 850 | | Burst-Averaged output power(dBm) | | | | Division Factors | Frame-Averaged output power(dBm) | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Tune-up | Channel/Frenqucy(MHz) | | | | Tune-up | Channel/Frenqucy(MHz) | | |
| | | MAX | 128 /824.2 | 190 /836.6 | 251 /848.8 | | MAX | 128 /824.2 | 190 /836.6 | 251 /848.8 |
| GSM | CS | 33.00 | 32.46 | 32.54 | 32.57 | 9.03 | 23.97 | 23.43 | 23.51 | 23.54 |
| GPRS/ EGPRS (GMSK) | 1 Tx Slot | 33.00 | 32.45 | 32.51 | 32.55 | 9.03 | 23.97 | 23.42 | 23.48 | 23.52 |
| | 2 Tx Slots | 30.10 | 30.01 | 30.02 | 30.00 | 6.02 | 24.08 | 23.99 | 24.00 | 23.98 |
| | 3 Tx Slots | 28.50 | 28.02 | 28.03 | 28.04 | 4.26 | 24.24 | 23.76 | 23.77 | 23.78 |
| | 4 Tx Slots | 27.30 | 27.01 | 27.03 | 27.22 | 3.01 | **24.29** | **24.00** | **24.02** | **24.21** |
| EGPRS (8PSK) | 1 Tx Slot | 28.00 | 26.80 | 27.02 | 27.52 | 9.03 | 18.97 | 17.77 | 17.99 | 18.49 |
| | 2 Tx Slots | 27.00 | 25.62 | 25.86 | 26.30 | 6.02 | 20.98 | 19.60 | 19.84 | 20.28 |
| | 3 Tx Slots | 25.00 | 23.54 | 23.88 | 24.02 | 4.26 | 20.74 | 19.28 | 19.62 | 19.76 |
| | 4 Tx Slots | 24.00 | 22.81 | 22.85 | 23.26 | 3.01 | 20.99 | 19.80 | 19.84 | 20.25 |
| GSM 1900 | | Burst-Averaged output power(dBm) | | | | Division Factors | Frame-Averaged output power(dBm) | | | |
| | | Tune-up | Channel/Frenqucy(MHz) | | | | Tune-up | Channel/Frenqucy(MHz) | | |
| | | MAX | 512/ 1850.2 | 661/ 1880 | 810/ 1909.8 | | MAX | 512/ 1850.2 | 661/ 1880 | 810/ 1909.8 |
| GSM | CS | 30.00 | 29.67 | 29.69 | 29.85 | 9.03 | 20.97 | 20.64 | 20.66 | 20.82 |
| GPRS/ EGPRS (GMSK) | 1 Tx Slot | 30.00 | 29.66 | 29.70 | 29.83 | 9.03 | 20.97 | 20.63 | 20.67 | 20.80 |
| | 2 Tx Slots | 29.50 | 28.91 | 28.95 | 29.13 | 6.02 | 23.48 | 22.89 | 22.93 | 23.11 |
| | 3 Tx Slots | 27.50 | 27.15 | 27.17 | 27.40 | 4.26 | 23.24 | 22.89 | 22.91 | 23.14 |
| | 4 Tx Slots | 26.50 | 26.09 | 26.11 | 26.37 | 3.01 | **23.49** | **23.08** | **23.10** | **23.36** |
| EGPRS (8PSK) | 1 Tx Slot | 27.00 | 26.05 | 26.43 | 26.63 | 9.03 | 17.97 | 17.02 | 17.40 | 17.60 |
| | 2 Tx Slots | 26.00 | 24.87 | 25.13 | 25.54 | 6.02 | 19.98 | 18.85 | 19.11 | 19.52 |
| | 3 Tx Slots | 24.00 | 23.66 | 23.21 | 23.58 | 4.26 | 19.74 | 19.40 | 18.95 | 19.32 |
| | 4 Tx Slots | 23.00 | 22.03 | 22.12 | 22.50 | 3.01 | 19.99 | 19.02 | 19.11 | 19.49 |

Notes: The worst-case configuration and mode for SAR testing is determined to be as follows:
1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, GSM 1900 GMSK (GPRS) mode with 4 time slots for Max power, based on the output power measurements above..


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 9.2 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

| WCDMA | | Band II(dBm) | | | | Band V(dBm) | | | |
|---|---|---|---|---|---|---|---|---|---|
| Tx Channel | | 9262 | 9400 | 9538 | Tune-up Limit | 4132 | 4183 | 4233 | Tune-up Limit |
| Frequency(MHz) | | 1852.4 | 1880 | 1907.6 | | 826.4 | 836.6 | 846.6 | |
| RMC | 12.2kbps | 22.76 | 22.81 | 22.68 | 23.00 | 22.29 | 22.41 | 22.30 | 23.00 |
| AMR | 12.2kbps | 22.66 | 22.72 | 22.55 | 23.00 | 22.19 | 22.32 | 22.17 | 23.00 |
| HSDPA | Sub 1 | 22.18 | 22.23 | 22.10 | 23.00 | 21.71 | 21.83 | 21.72 | 22.00 |
| | Sub 2 | 22.17 | 22.22 | 22.09 | 23.00 | 21.70 | 21.82 | 21.71 | 22.00 |
| | Sub 3 | 21.66 | 21.71 | 21.58 | 22.00 | 21.19 | 21.31 | 21.20 | 22.00 |
| | Sub 4 | 21.65 | 21.70 | 21.57 | 22.00 | 21.18 | 21.30 | 21.19 | 22.00 |
| HSUPA | Sub 1 | 22.14 | 22.19 | 22.06 | 23.00 | 21.67 | 21.79 | 21.68 | 22.00 |
| | Sub 2 | 21.13 | 21.18 | 21.05 | 22.00 | 20.66 | 20.78 | 20.67 | 21.00 |
| | Sub 3 | 21.61 | 21.67 | 21.54 | 22.00 | 21.14 | 21.27 | 21.16 | 22.00 |
| | Sub 4 | 21.10 | 21.16 | 21.03 | 22.00 | 20.63 | 20.76 | 20.65 | 21.00 |
| | Sub 5 | 22.09 | 22.15 | 22.02 | 23.00 | 21.62 | 21.75 | 21.64 | 22.00 |
| DC-HSDPA | Sub 1 | 21.90 | 21.93 | 21.82 | 22.00 | 21.43 | 21.57 | 21.44 | 22.00 |
| | Sub 2 | 21.89 | 21.90 | 21.81 | 22.00 | 21.42 | 21.56 | 21.43 | 22.00 |
| | Sub 3 | 21.47 | 21.45 | 21.32 | 22.00 | 21.00 | 21.05 | 20.94 | 22.00 |
| | Sub 4 | 21.46 | 21.44 | 21.31 | 22.00 | 20.99 | 21.04 | 20.93 | 22.00 |
| HSPA+ | 16QAM | 21.95 | 22.02 | 21.89 | 23.00 | 21.48 | 21.62 | 21.51 | 22.00 |
| Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. | | | | | | | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 9.3 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

| Modulation | Channel bandwidth / Transmission bandwidth ($N_{RB}$) | | | | | | MPR (dB) |
|---|---|---|---|---|---|---|---|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |

| LTE FDD Band 7 | | | | Conducted Power(dBm) | | | Tune-up Limit |
|---|---|---|---|---|---|---|---|
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | | |
| | | | | 20775/2502.5 | 21100/2535 | 21425/2567.5 | |
| 5MHz | QPSK | 1 | 0 | 22.23 | 22.26 | 22.27 | 23.00 |
| | | 1 | 13 | 22.53 | 22.58 | 22.66 | 23.00 |
| | | 1 | 24 | 22.34 | 22.33 | 22.42 | 23.00 |
| | | 12 | 0 | 21.63 | 21.53 | 21.63 | 22.00 |
| | | 12 | 6 | 21.71 | 21.67 | 21.73 | 22.00 |
| | | 12 | 13 | 21.71 | 21.62 | 21.67 | 22.00 |
| | | 25 | 0 | 21.62 | 21.62 | 21.68 | 22.00 |
| | 16QAM | 1 | 0 | 21.95 | 21.82 | 21.57 | 22.00 |
| | | 1 | 13 | 21.93 | 21.87 | 21.94 | 22.00 |
| | | 1 | 24 | 21.87 | 21.81 | 21.81 | 22.00 |
| | | 12 | 0 | 20.58 | 20.46 | 20.56 | 21.00 |
| | | 12 | 6 | 20.66 | 20.71 | 20.76 | 21.00 |
| | | 12 | 13 | 20.63 | 20.60 | 20.70 | 21.00 |
| | | 25 | 0 | 20.59 | 20.58 | 20.68 | 21.00 |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | | Tune-up Limit |
| | | | | 20800/2505 | 21100/2535 | 21400/2565 | |
| 10MHz | QPSK | 1 | 0 | 22.25 | 22.27 | 22.30 | 23.00 |
| | | 1 | 25 | 22.56 | 22.63 | 22.70 | 23.00 |
| | | 1 | 49 | 22.36 | 22.37 | 22.45 | 23.00 |
| | | 25 | 0 | 21.66 | 21.58 | 21.67 | 22.00 |
| | | 25 | 13 | 21.74 | 21.72 | 21.77 | 22.00 |
| | | 25 | 25 | 21.73 | 21.66 | 21.72 | 22.00 |
| | | 50 | 0 | 21.66 | 21.64 | 21.72 | 22.00 |
| | 16QAM | 1 | 0 | 21.97 | 21.85 | 21.59 | 22.00 |
| | | 1 | 25 | 21.96 | 21.91 | 21.97 | 22.00 |
| | | 1 | 49 | 21.90 | 21.83 | 21.84 | 22.00 |
| | | 25 | 0 | 20.61 | 20.51 | 20.60 | 21.00 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | 25 | 13 | 20.68 | 20.75 | 20.79 | 21.00 |
| | | 25 | 25 | 20.66 | 20.65 | 20.74 | 21.00 |
| | | 50 | 0 | 20.62 | 20.63 | 20.72 | 21.00 |
| **Bandwidth** | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | | Tune-up Limit |
| | | | | 20825/2507.5 | 21100/2535 | 21375/2562.5 | |
| **15MHz** | QPSK | 1 | 0 | 22.24 | 22.23 | 22.28 | 23.00 |
| | | 1 | 38 | 22.54 | 22.62 | 22.67 | 23.00 |
| | | 1 | 74 | 22.33 | 22.32 | 22.41 | 23.00 |
| | | 36 | 0 | 21.64 | 21.54 | 21.64 | 22.00 |
| | | 36 | 18 | 21.71 | 21.67 | 21.73 | 22.00 |
| | | 36 | 39 | 21.70 | 21.63 | 21.68 | 22.00 |
| | | 75 | 0 | 21.64 | 21.60 | 21.67 | 22.00 |
| | 16QAM | 1 | 0 | 21.92 | 21.83 | 21.57 | 22.00 |
| | | 1 | 38 | 21.94 | 21.88 | 21.95 | 22.00 |
| | | 1 | 74 | 21.87 | 21.79 | 21.81 | 22.00 |
| | | 36 | 0 | 20.58 | 20.49 | 20.57 | 21.00 |
| | | 36 | 18 | 20.65 | 20.70 | 20.75 | 21.00 |
| | | 36 | 39 | 20.64 | 20.61 | 20.71 | 21.00 |
| | | 75 | 0 | 20.59 | 20.58 | 20.68 | 21.00 |
| **Bandwidth** | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | | Tune-up Limit |
| | | | | 20850/2510 | 21100/2535 | 21350/2560 | |
| **20MHz** | QPSK | 1 | 0 | 22.21 | 22.19 | 22.25 | 23.00 |
| | | 1 | 50 | 22.53 | 22.58 | 22.65 | 23.00 |
| | | 1 | 99 | 22.31 | 22.31 | 22.38 | 23.00 |
| | | 50 | 0 | 21.61 | 21.49 | 21.60 | 22.00 |
| | | 50 | 25 | 21.69 | 21.63 | 21.70 | 22.00 |
| | | 50 | 50 | 21.67 | 21.58 | 21.64 | 22.00 |
| | | 100 | 0 | 21.61 | 21.55 | 21.63 | 22.00 |
| | 16QAM | 1 | 0 | 21.66 | 21.79 | 21.52 | 22.00 |
| | | 1 | 50 | 21.90 | 21.86 | 21.91 | 22.00 |
| | | 1 | 99 | 21.85 | 21.76 | 21.79 | 22.00 |
| | | 50 | 0 | 20.55 | 20.45 | 20.54 | 21.00 |
| | | 50 | 25 | 20.62 | 20.68 | 20.72 | 21.00 |
| | | 50 | 50 | 20.61 | 20.56 | 20.67 | 21.00 |
| | | 100 | 0 | 20.57 | 20.54 | 20.65 | 21.00 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 9.4 WLAN Mode

| Wi-Fi 2.4G<br>Mode | Channel /Frequency(MHz) | Maximum Output Power (dBm) | | |
|---|---|---|---|---|
| | | Tune-up | Meas. | TP Set Level |
| 802.11b (1M) | 1/2412 | 18.00 | 17.54 | 19 |
| | 6/2437 | 18.00 | 17.06 | 19 |
| | 11/2462 | 18.00 | 17.78 | 19 |
| 802.11g (6M) | 1/2412 | 14.50 | 13.68 | 17 |
| | 6/2437 | 16.00 | 15.13 | 17 |
| | 11/2462 | 14.50 | 13.86 | 17 |
| 802.11n-HT20 (MCS0) | 1/2412 | 14.00 | 13.71 | 17 |
| | 6/2437 | 16.00 | 15.25 | 17 |
| | 11/2462 | 14.00 | 13.65 | 17 |
| 802.11n-HT40 (MCS0) | 3/2422 | 13.00 | 11.74 | 16.5 |
| | 6/2437 | 15.00 | 14.69 | 16.5 |
| | 9/2452 | 13.00 | 11.86 | 16.5 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 9.5 Bluetooth Mode

| BT | Conducted Power(dBm) | | | Tune-up Limit (dBm) |
|---|---|---|---|---|
| | Channel/Frequency(MHz) | | | |
| | Ch 0/2402 MHz | Ch 39/2441 MHz | Ch 78/2480 MHz | |
| GFSK | 4.25 | 3.39 | 5.64 | 6.00 |
| π/4DQPSK | 1.95 | 1.33 | 2.95 | 3.00 |
| 8DPSK | 1.95 | 1.33 | 2.94 | 3.00 |
| **BLE** | **Ch 0/2402 MHz** | **Ch 19/2440 MHz** | **Ch 39/2480 MHz** | **Tune-up Limit (dBm)** |
| GFSK | 2.14 | 1.61 | 3.34 | 4.00 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 10 Measured and Reported (Scaled) SAR Results

## 10.1 EUT Antenna Locations

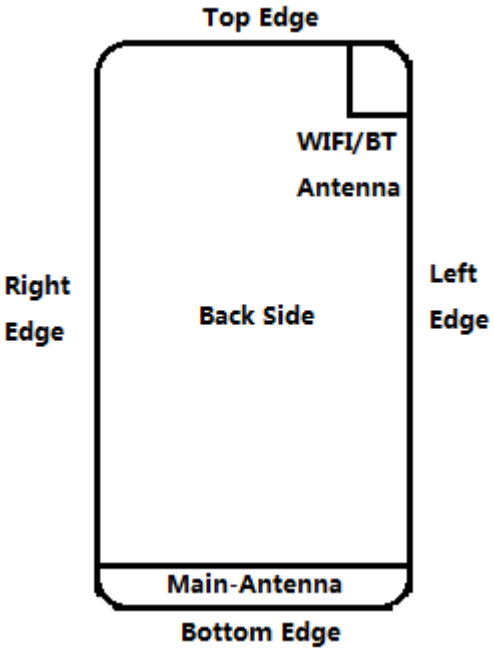


| Overall (Length x Width): 142 mm x 67mm<br>Overall Diagonal: 145 mm/Display Diagonal:73mm | | | | | | |
|---|---|---|---|---|---|---|
| Distance of the Antenna to the EUT surface/edge | | | | | | |
| Antenna | Back Side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
| Main-Antenna | ＜25mm | ＜25mm | ＜25mm | ＜25mm | ＞25mm | ＜25mm |
| BT/Wi-Fi Antenna | ＜25mm | ＜25mm | ＜25mm | ＞25mm | ＜25mm | ＞25mm |
| Hotspot mode, Positions for SAR tests | | | | | | |
| Mode | Back Side | Front side | Left Edge | Right Edge | Top Edge | Bottom Edge |
| Main-Antenna | Yes | Yes | Yes | Yes | N/A | Yes |
| BT/Wi-Fi Antenna | Yes | Yes | Yes | N/A | Yes | N/A |

Note: 1. Per KDB 941225 D06, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

2. Per FCC KDB 447498 D01,

for each exposure position, testing of other requised channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

a) ≤0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100MHz

b) ≤0.6 W/kg or 1.5 W/kg, for1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.

c) ≤ 0.4 W/kg or 1.0 Wkg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

3.When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

4. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 10.2 Standalone SAR test exclusion considerations

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] ·[√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for product specific 10-g SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Bluetooth | Distance (mm) | MAXPower (dBm) | Frequency (MHz) | Ratio | Evaluation |
|---|---|---|---|---|---|
| Head | 5 | 6 | 2480 | 1.25 | No |
| Body-worn | 15 | 6 | 2480 | 0.42 | No |
| Hotspot SAR | 10 | 6 | 2480 | 0.63 | No |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 10.3 Measured SAR Results

**Table 8: GSM 850**

| Test Position | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg/4W/kg(mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Head SAR** | | | | | | | | | | | |
| Left Cheek | Standard | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.770 | -0.141 | 1.13 | 0.872 | / |
| | | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 1.070 | -0.070 | 1.11 | 1.190 | / |
| | | GSM | 1:8.3 | 251/848.8 | 33.00 | 32.57 | 1.100 | -0.140 | 1.10 | 1.214 | 9 |
| Left Tilt | Standard | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 0.601 | -0.020 | 1.11 | 0.668 | / |
| Right Cheek | Standard | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.747 | 0.031 | 1.13 | 0.846 | / |
| | | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 0.767 | -0.040 | 1.11 | 0.853 | / |
| | | GSM | 1:8.3 | 251/848.8 | 33.00 | 32.57 | 0.998 | 0.020 | 1.10 | 1.102 | / |
| Right Tilt | Standard | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 0.598 | -0.010 | 1.11 | 0.665 | / |
| Left Cheek | SIM2 | GSM | 1:8.3 | 251/848.8 | 33.00 | 32.57 | 1.010 | -0.020 | 1.10 | 1.115 | / |
| **Body-worn SAR (Distance 15mm)** | | | | | | | | | | | |
| Back Side | Standard | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.835 | -0.040 | 1.13 | 0.946 | / |
| | | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 1.150 | -0.021 | 1.11 | 1.278 | 10 |
| | | GSM | 1:8.3 | 251/848.8 | 33.00 | 32.57 | 0.856 | 0.010 | 1.10 | 0.945 | / |
| Front Side | Standard | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.653 | 0.040 | 1.13 | 0.739 | / |
| | | GSM | 1:8.3 | 190/836.6 | 33.00 | 32.54 | 0.736 | -0.170 | 1.11 | 0.818 | / |
| | | GSM | 1:8.3 | 251/848.8 | 33.00 | 32.57 | 0.743 | -0.010 | 1.10 | 0.820 | / |
| Back Side | SIM2 | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.802 | 0.013 | 1.13 | 0.908 | / |
| Back Side | Earphone | GSM | 1:8.3 | 128/824.2 | 33.00 | 32.46 | 0.672 | -0.100 | 1.13 | 0.761 | / |
| **Hotspot SAR(Distance 10mm)** | | | | | | | | | | | |
| Back Side | Standard | 4Txslots | 1:2.07 | 128/824.2 | 27.30 | 27.01 | 1.390 | 0.120 | 1.07 | 1.486 | / |
| | | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 1.270 | -0.080 | 1.06 | 1.351 | / |
| | | 4Txslots | 1:2.07 | 251/848.8 | 27.30 | 27.22 | 1.460 | 0.060 | 1.02 | 1.490 | 11 |
| Front Side | Standard | 4Txslots | 1:2.07 | 128/824.2 | 27.30 | 27.01 | 0.878 | 0.100 | 1.07 | 0.939 | / |
| | | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 0.900 | 0.040 | 1.06 | 0.958 | / |
| | | 4Txslots | 1:2.07 | 251/848.8 | 27.30 | 27.22 | 1.120 | 0.060 | 1.02 | 1.140 | / |
| Left Edge | Standard | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 0.540 | -0.120 | 1.06 | 0.575 | / |
| Right Edge | Standard | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 0.515 | 0.020 | 1.06 | 0.548 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | Standard | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 0.059 | -0.090 | 1.06 | 0.063 | / |
| Back Side | SIM2 | 4Txslots | 1:2.07 | 128/824.2 | 27.30 | 27.01 | 1.370 | 0.080 | 1.07 | 1.465 | / |
| | | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 1.380 | 0.020 | 1.06 | 1.469 | / |
| | | 4Txslots | 1:2.07 | 251/848.8 | 27.30 | 27.22 | 0.906 | -0.060 | 1.02 | 0.920 | / |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Back Side | Earphone | 4Txslots | 1:2.07 | 128/824.2 | 27.30 | 27.01 | 1.080 | 0.070 | 1.07 | 1.155 | / |
| | | 4Txslots | 1:2.07 | 190/836.6 | 27.30 | 27.03 | 1.210 | 0.020 | 1.06 | 1.288 | / |
| | | 4Txslots | 1:2.07 | 251/848.8 | 27.30 | 27.22 | 0.786 | -0.026 | 1.02 | 1.000 | / |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.

3. Accessories that do not contain RF transmitters and have been proven to increase the peak SAR by less than 5 %, such as hands-free kits, do not need SAR tests separate from the SAR tests attached to a main EUT configuration


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 9: GSM 1900**

| Test Position | Cover Type | Time slot | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Head SAR** | | | | | | | | | | | |
| Left Cheek | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.285 | 0.130 | 1.07 | 0.306 | / |
| Left Tilt | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.093 | 0.010 | 1.07 | 0.100 | / |
| Right Cheek | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.356 | -0.010 | 1.07 | 0.382 | 12 |
| Right Tilt | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.093 | 0.026 | 1.07 | 0.100 | / |
| **Body-worn SAR (Distance 15mm)** | | | | | | | | | | | |
| Back Side | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.243 | 0.030 | 1.07 | 0.261 | / |
| Front Side | standard | GSM | 1:8.3 | 661/1880 | 30.00 | 29.69 | 0.305 | 0.040 | 1.07 | 0.328 | 13 |
| **Hotspot SARSAR (Distance 10mm)** | | | | | | | | | | | |
| Back Side | standard | 4Txslots | 1:2.07 | 661/1880 | 26.50 | 26.11 | 0.674 | 0.070 | 1.09 | 0.737 | 14 |
| Front Side | standard | 4Txslots | 1:2.07 | 661/1880 | 26.50 | 26.11 | 0.599 | -0.010 | 1.09 | 0.655 | / |
| Left Edge | standard | 4Txslots | 1:2.07 | 661/1880 | 26.50 | 26.11 | 0.126 | -0.020 | 1.09 | 0.138 | / |
| Right Edge | standard | 4Txslots | 1:2.07 | 661/1880 | 26.50 | 26.11 | 0.211 | 0.020 | 1.09 | 0.231 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | standard | 4Txslots | 1:2.07 | 661/1880 | 26.50 | 26.11 | 0.472 | -0.050 | 1.09 | 0.516 | / |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 10: UMTS Band II**

| Test Position | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Head SAR** | | | | | | | | | | | |
| Left Cheek | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.474 | 0.080 | 1.04 | 0.495 | / |
| Left Tilt | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.162 | 0.020 | 1.04 | 0.169 | / |
| Right Cheek | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.609 | 0.030 | 1.04 | 0.636 | 15 |
| Right Tilt | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.174 | 0.040 | 1.04 | 0.182 | / |
| **Body-worn SAR (Distance 15mm)** | | | | | | | | | | | |
| Back Side | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.400 | -0.140 | 1.04 | 0.418 | / |
| Front Side | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.409 | 0.010 | 1.04 | 0.427 | 16 |
| **Hotspot SAR(Distance 10mm)** | | | | | | | | | | | |
| Back Side | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.698 | -0.026 | 1.04 | 0.729 | 17 |
| Front Side | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.684 | -0.140 | 1.04 | 0.715 | / |
| Left Edge | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.132 | 0.110 | 1.04 | 0.138 | / |
| Right Edge | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.167 | 0.070 | 1.04 | 0.174 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | standard | RMC 12.2K | 1:1 | 9400/1880 | 23.00 | 22.81 | 0.461 | -0.070 | 1.04 | 0.482 | / |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 11: UMTS Band V (Main-antenna)**

| Test Position | Cover Type | Channel Type | Duty Cycle | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Head SAR** | | | | | | | | | | | |
| Left Cheek | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.540 | 0.020 | 1.15 | 0.619 | 18 |
| Left Tilt | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.304 | 0.060 | 1.15 | 0.348 | / |
| Right Cheek | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.521 | 0.050 | 1.15 | 0.597 | / |
| Right Tilt | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.357 | 0.021 | 1.15 | 0.409 | / |
| **Body-worn SAR (Distance 15mm)** | | | | | | | | | | | |
| Back Side | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.634 | 0.030 | 1.15 | 0.726 | 19 |
| Front Side | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.525 | 0.040 | 1.15 | 0.601 | / |
| **Hotspot SAR(Distance 10mm)** | | | | | | | | | | | |
| Back Side | standard | RMC 12.2K | 1:1 | 4132/826.4 | 23.00 | 22.29 | 0.766 | 0.090 | 1.18 | 0.902 | / |
| | | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.819 | 0.060 | 1.15 | 0.938 | 20 |
| | | RMC 12.2K | 1:1 | 4233/846.6 | 23.00 | 22.30 | 0.789 | 0.050 | 1.17 | 0.927 | / |
| Front Side | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.579 | 0.040 | 1.15 | 0.663 | / |
| Left Edge | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.390 | -0.010 | 1.15 | 0.447 | / |
| Right Edge | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.353 | 0.060 | 1.15 | 0.404 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | standard | RMC 12.2K | 1:1 | 4183/836.6 | 23.00 | 22.41 | 0.041 | -0.090 | 1.15 | 0.046 | / |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 12: LTE Band 7**

| Test Position | Cover Type | Duty Cycle | RB allocation | RB offset | Channel/ Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Head SAR (QPSK)** | | | | | | | | | | | | |
| Left Cheek | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.193 | 0.082 | 1.08 | 0.209 | / |
| Left Tilt | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.087 | 0.043 | 1.08 | 0.094 | / |
| Right Cheek | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.279 | 0.164 | 1.08 | 0.302 | 21 |
| Right Tilt | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.079 | 0.059 | 1.08 | 0.085 | / |
| Left Cheek | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.145 | 0.082 | 1.07 | 0.155 | / |
| Left Tilt | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.072 | 0.120 | 1.07 | 0.078 | / |
| Right Cheek | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.211 | 0.010 | 1.07 | 0.226 | / |
| Right Tilt | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.051 | 0.022 | 1.07 | 0.055 | / |
| **Body-worn SAR (QPSK, Distance 15mm)** | | | | | | | | | | | | |
| Back Side | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.250 | 0.028 | 1.08 | 0.271 | 22 |
| Front Side | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.198 | 0.051 | 1.08 | 0.215 | / |
| Back Side | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.183 | -0.170 | 1.07 | 0.196 | / |
| Front Side | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.159 | 0.051 | 1.07 | 0.170 | / |
| **Hotspot SAR(QPSK, Distance 10mm)** | | | | | | | | | | | | |
| Back Side | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.329 | 0.047 | 1.08 | 0.357 | / |
| Front Side | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.152 | -0.023 | 1.08 | 0.165 | / |
| Left Edge | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.035 | 0.059 | 1.08 | 0.038 | / |
| Right Edge | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.060 | 0.117 | 1.08 | 0.065 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | standard | 1:1 | 1 | 50 | 21350/2560 | 23.00 | 22.65 | 0.410 | 0.100 | 1.08 | 0.444 | 23 |
| Back Side | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.144 | 0.065 | 1.07 | 0.154 | / |
| Front Side | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.124 | 0.090 | 1.07 | 0.133 | / |
| Left Edge | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.029 | 0.077 | 1.07 | 0.031 | / |
| Right Edge | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.041 | 0.074 | 1.07 | 0.044 | / |
| Top Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Bottom Edge | standard | 1:1 | 50% | 25 | 21350/2560 | 22.00 | 21.70 | 0.329 | 0.110 | 1.07 | 0.353 | / |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are ⩾ 50% limit(10g).


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 13: Wi-Fi (2.4G)**

| Test Position | Cover Type | Mode 802.11b | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Area Scan SAR 1g | Zoom Scan SAR 1g | Power Drift (dB) | Scaling Factor | Report SAR 1g | |
| **Head SAR** | | | | | | | | | | | | |
| Left Cheek | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.187 | 0.184 | 0.130 | 1.06 | 0.194 | / |
| Left Tilt | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.159 | 0.164 | 0.120 | 1.06 | 0.173 | / |
| Right Cheek | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.348 | 0.336 | -0.170 | 1.06 | 0.355 | 24 |
| Right Tilt | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.189 | 0.185 | 0.020 | 1.06 | 0.196 | / |
| **Body-worn/ Hotspot SAR (Distance 10mm)** | | | | | | | | | | | | |
| Back Side | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.150 | 0.151 | 0.070 | 1.06 | 0.160 | 25 |
| Front Side | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.087 | 0.090 | 0.045 | 1.06 | 0.095 | / |
| Left Edge | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.096 | 0.099 | 0.023 | 1.06 | 0.105 | / |
| Right Edge | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.021 | 0.014 | 0.016 | 1.06 | 0.015 | / |
| Top Edge | standard | 802.11b | 99.52% | 11/2462 | 18.00 | 17.78 | 0.052 | 0.051 | 0.130 | 1.06 | 0.054 | / |
| Bottom Edge | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

| MAX Adjusted SAR | | | | | | | |
|---|---|---|---|---|---|---|---|
| Mode | Test Position | Channel/ Frequency (MHz) | MAX Reported $SAR_{1g}$ (W/kg) | 802.11b Tune-up limit (dBm) | Tune-up limit (dBm) | Scaling Factor | Adjusted $SAR_{1g}$ (W/kg) |
| 802.11g | Right Cheek | 11/2462 | 0.355 | 18.00 | 16.00 | 0.63 | 0.225 |
| 802.11n HT20 | Right Cheek | 11/2462 | 0.355 | 18.00 | 16.00 | 0.63 | 0.225 |
| 802.11n HT40 | Right Cheek | 11/2462 | 0.355 | 18.00 | 15.00 | 0.50 | 0.179 |

Note: SAR is not required for OFDM when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Table 14: BT**

| Test Position | Cover Type | Mode 802.11b | Duty Cycle | Channel/ Frequency (MHz) | Tune-up dBm) | Measured power (dBm) | Limit of SAR 1.6 W/kg (mW/g) | | | | Plot No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | Measured SAR1g | Power Drift (dB) | Scaling Factor | Report SAR1g | |
| **Body-worn SAR (Distance 10mm)** | | | | | | | | | | | |
| Back Side | standard | DH5 | 76.56% | 78/2480 | 6.00 | 5.64 | 0.006 | 0.033 | 1.42 | 0.008 | 26 |
| Note: 1. The value with blue color is the maximum SAR Value of each test band. | | | | | | | | | | | |

| Band | Configuration | Frequency (MHz) | Maximum Power (dBm) | Separation Distance (mm) | Estimated SAR (W/kg) |
|---|---|---|---|---|---|
| Bluetooth | Head SAR | 2480 | 6 | 5 | 0.167 |
| For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below.<br>(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg<br>for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR. | | | | | |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 10.4 Simultaneous Transmission Analysis

| Simultaneous Transmission Configurations | Head | Body-worn | Hotspot |
|---|---|---|---|
| GSM + Bluetooth | N/A | Yes | N/A |
| WCDMA + Bluetooth | N/A | Yes | N/A |
| LTE + Bluetooth | N/A | Yes | N/A |
| GSM + Wi-Fi-2.4GHz | Yes | Yes | N/A |
| WCDMA + Wi-Fi-2.4GHz | Yes | Yes | N/A |
| LTE + Wi-Fi-2.4GHz | Yes | Yes | Yes |
| Wi-Fi-2.4GHz + Bluetooth | N/A | N/A | N/A |

**General Note:**

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

i) Scalar SAR summation < 1.6W/kg, simultaneously transmission SAR measurement is not necessary.

ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.

iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## The maximum $SAR_{1g}$ Value for Main-Antenna

| Test Position \ $SAR_{1g}$ (W/kg) | | GSM 850 | GSM 1900 | WCDMA Band II | WCDMA Band V | LTE FDD 7 | MAX. $SAR_{1g}$ |
|---|---|---|---|---|---|---|---|
| Left Cheek | | 1.214 | 0.306 | 0.495 | 0.619 | 0.209 | 1.214 |
| Left Tilt | | 0.668 | 0.100 | 0.169 | 0.348 | 0.094 | 0.668 |
| Right Cheek | | 1.102 | 0.382 | 0.636 | 0.597 | 0.302 | 1.102 |
| Right Tilt | | 0.665 | 0.100 | 0.182 | 0.409 | 0.085 | 0.665 |
| Body worn | Back Side | 1.278 | 0.261 | 0.418 | 0.726 | 0.271 | 1.278 |
| | Front Side | 0.820 | 0.328 | 0.427 | 0.601 | 0.215 | 0.820 |
| Hotspot | Back Side | 1.490 | 0.737 | 0.729 | 0.938 | 0.357 | 1.490 |
| | Front Side | 1.200 | 0.655 | 0.715 | 0.663 | 0.165 | 1.200 |
| | Left Edge | 0.602 | 0.138 | 0.138 | 0.447 | 0.038 | 0.602 |
| | Right Edge | 0.574 | 0.231 | 0.174 | 0.404 | 0.065 | 0.574 |
| | Top Edge | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bottom Edge | 0.066 | 0.516 | 0.482 | 0.046 | 0.444 | 0.516 |


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**About BT and Main- Antenna**

| Test Position \ $SAR_{1g}$ (W/kg) | | Main-antenna | BT | MAX. $\Sigma SAR_{1g}$ |
|---|---|---|---|---|
| Left Cheek | | 1.214 | 0.167 | 1.381 |
| Left Tilt | | 0.668 | 0.167 | 0.835 |
| Right Cheek | | 1.102 | 0.167 | 1.269 |
| Right Tilt | | 0.665 | 0.167 | 0.832 |
| Body worn | Back Side | 1.278 | 0.008 | 1.286 |
| | Front Side | 0.820 | 0.008 | 0.828 |
| Hotspot | Back Side | 1.490 | 0.008 | 1.498 |
| | Front Side | 1.200 | 0.008 | 1.208 |
| | Left Edge | 0.602 | 0.008 | 0.610 |
| | Right Edge | 0.574 | 0.008 | 0.582 |
| | Top Edge | 0 | 0.008 | 0.008 |
| | Bottom Edge | 0.516 | 0.008 | 0.524 |

Note: 1.The value with blue color is the maximum ΣSAR1gValue.
2.MAX. $\Sigma SAR_{1g}$ =Unlicensed $SAR_{MAX}$ +Licensed $SAR_{MAX}$

MAX. $\Sigma SAR_{1g}$ =1.498W/kg<1.6W/kg, so the Simultaneous transimition SAR with volum scan are not required for BT and Main-Antenna.

**About Wi-Fi and Main-Antenna**

| Test Position \ $SAR_{1g}$ (W/kg) | | Main-antenna | Wi-Fi 2.4G | MAX. $\Sigma SAR_{1g}$ |
|---|---|---|---|---|
| Left, Cheek | | 1.214 | 0.194 | 1.408 |
| Left, Tilt | | 0.668 | 0.173 | 0.841 |
| Right, Cheek | | 1.102 | 0.355 | 1.457 |
| Right, Tilt | | 0.665 | 0.196 | 0.861 |
| Body worn1g | Back Side | 1.278 | 0.160 | 1.438 |
| | Front Side | 0.820 | 0.095 | 0.915 |
| Hotspot 1g | Back Side | 1.490 | 0.160 | 1.650 |
| | Front Side | 1.200 | 0.095 | 1.295 |
| | Left Edge | 0.602 | 0.105 | 0.707 |
| | Right Edge | 0.574 | 0.015 | 0.589 |
| | Top Edge | 0 | 0.054 | 0.054 |
| | Bottom Edge | 0.516 | 0 | 0.516 |

Note: 1.The value with blue color is the maximum $\Sigma SAR_{1g}$ Value.
2.MAX. $\Sigma SAR_{1g}$ =Unlicensed $SAR_{MAX}$ +Licensed $SAR_{MAX}$

MAX. $\Sigma SAR_{1g}$ =1.650W/kg>1.6W/kg, so the SAR to peak location separation ratio should be considered.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

($SAR_{Max}$ =1.650W/Kg)

The position SAR $_{GSM\ 850}$ is ($x_1$= -32, $y_1$= -18, $z_1$= -206.1),

The position SAR $_{Wi\text{-}Fi\ 2.4G}$ is ($x_2$= 18, $y_2$=33, $z_2$= -179.6)

so the distance is 76.18mm.

PSLS=Peak SAR Location Separation

Ratio =[(Reported $SAR_{Max.GSM/UMTS/LTE}$) 1.490W/kg +(Reported $SAR_{Max.WIFI}$) 0.160W/kg]$^{3/2}$ /PSLS =0.03 <0.04

so the Simultaneous transimition SAR with volum scan are not required for Wi-Fi and Main-Antenna.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# 11 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528- 2013 is not required in SAR reports submitted for equipment approval. This also applies to the 10-g SAR required for phablets in KDB Publication 648474.


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX A: Test Layout

*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Tissue Simulating Liquids**

For the measurement of the field distribution inside the flat phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For Head and Body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Picture 3 and Picture 4.

Picture 3: liquid depth in the head Phantom

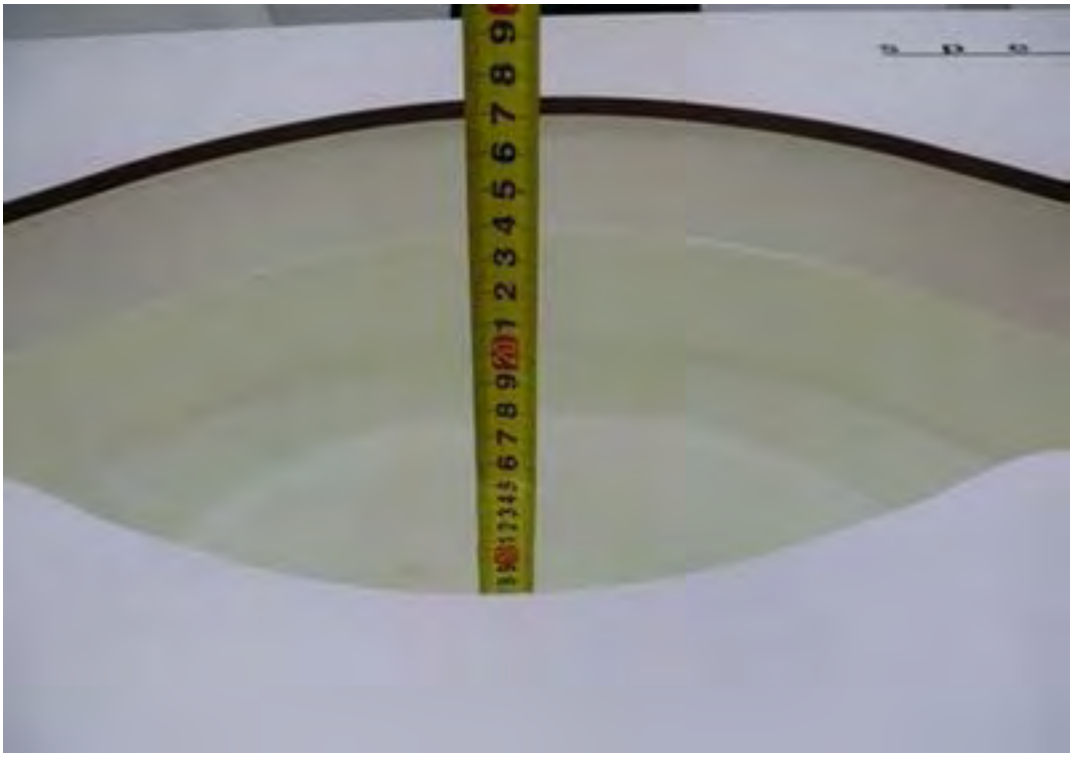

Picture 4: Liquid depth in the flat Phantom


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX B: System Check Results

## Plot 1 System Performance Check at 835 MHz Head TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2**

Date: 3/26/2019

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; σ = 0.88 S/m; $\varepsilon_r$ = 41.4; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.10, 9.10, 9.10); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.64 mW/g

**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.64 mW/g

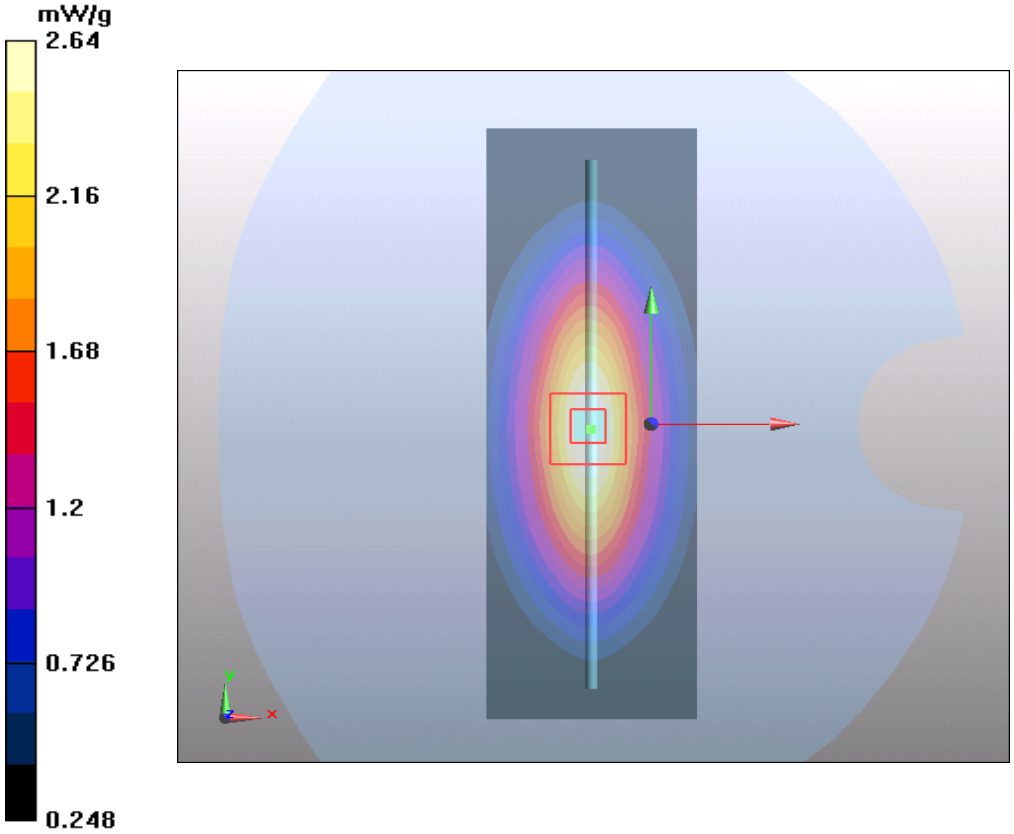



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 2 System Performance Check at 835 MHz Body TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2**

Date: 3/26/2019

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; σ = 0.96 S/m; $\varepsilon_r$ = 54.2; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.32, 9.32, 9.32); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.58 mW/g

**d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.9 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 3.5 W/kg

**SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.6 mW/g

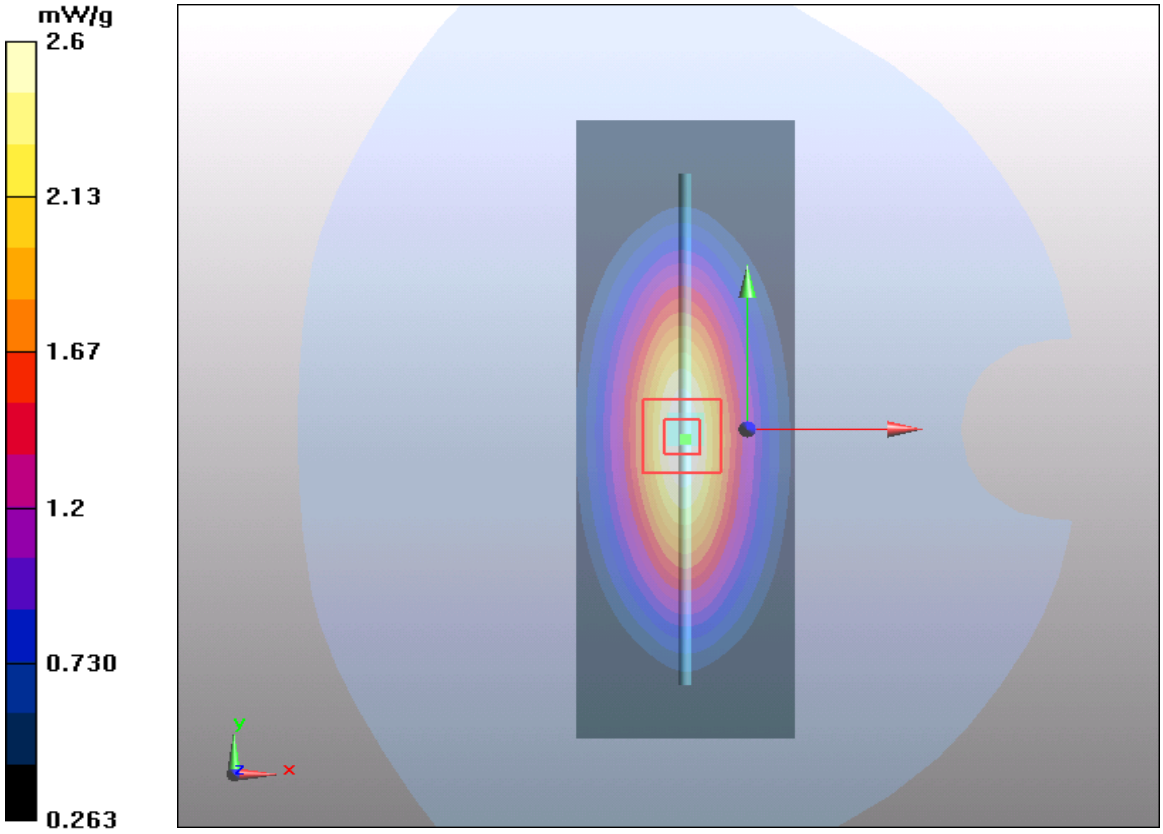



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 3 System Performance Check at 1900 MHz Head TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2**

Date: 3/28/2019

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; σ = 1.41 S/m; $\varepsilon_r$ = 40.1; ρ = 1000 kg/$m^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.96, 7.96, 7.96); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.3 mW/g

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.88 mW/g; SAR(10 g) = 4.9 mW/g**

Maximum value of SAR (measured) = 10.7 mW/g

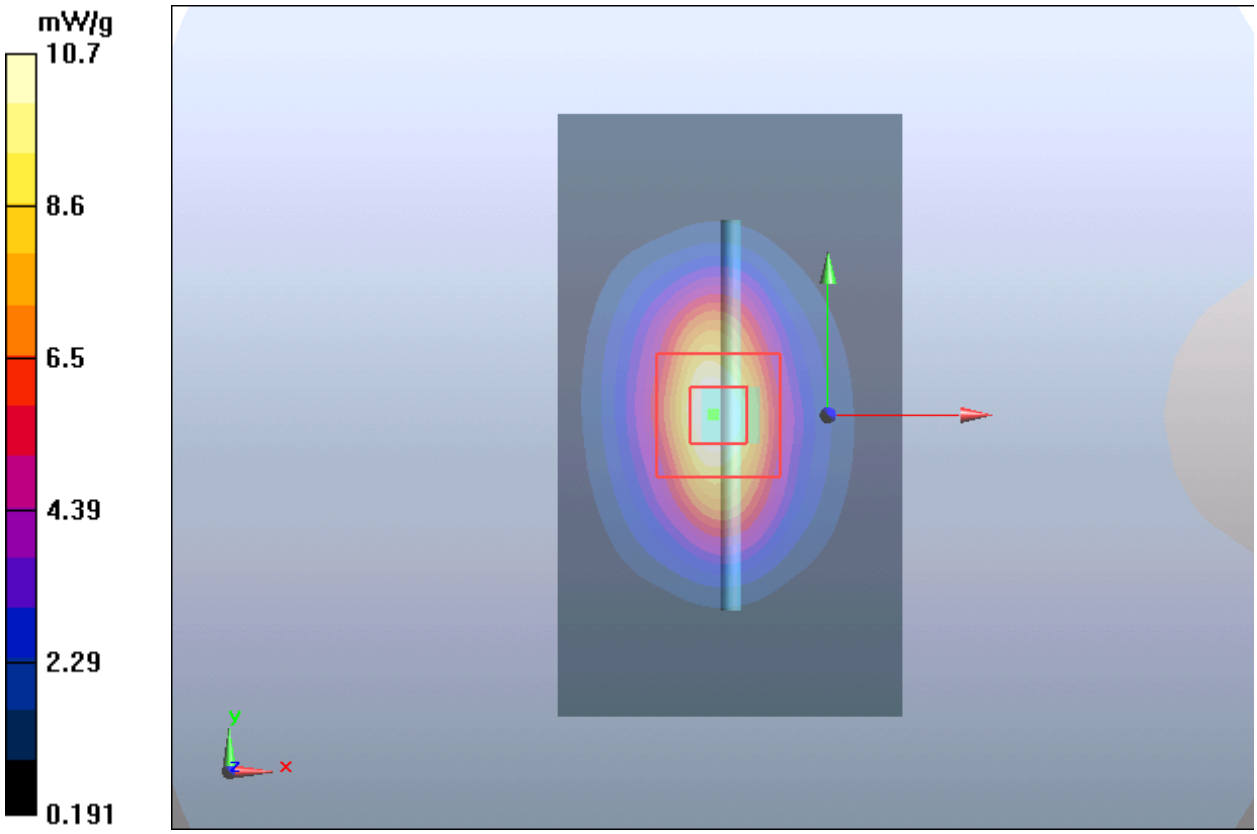



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 4 System Performance Check at 1900 MHz Body TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2**

Date: 3/28/2019

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; σ = 1.51 S/m; $\varepsilon_r$ = 52.6; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.70, 7.70, 7.70); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 mW/g

**d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.3 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.25 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

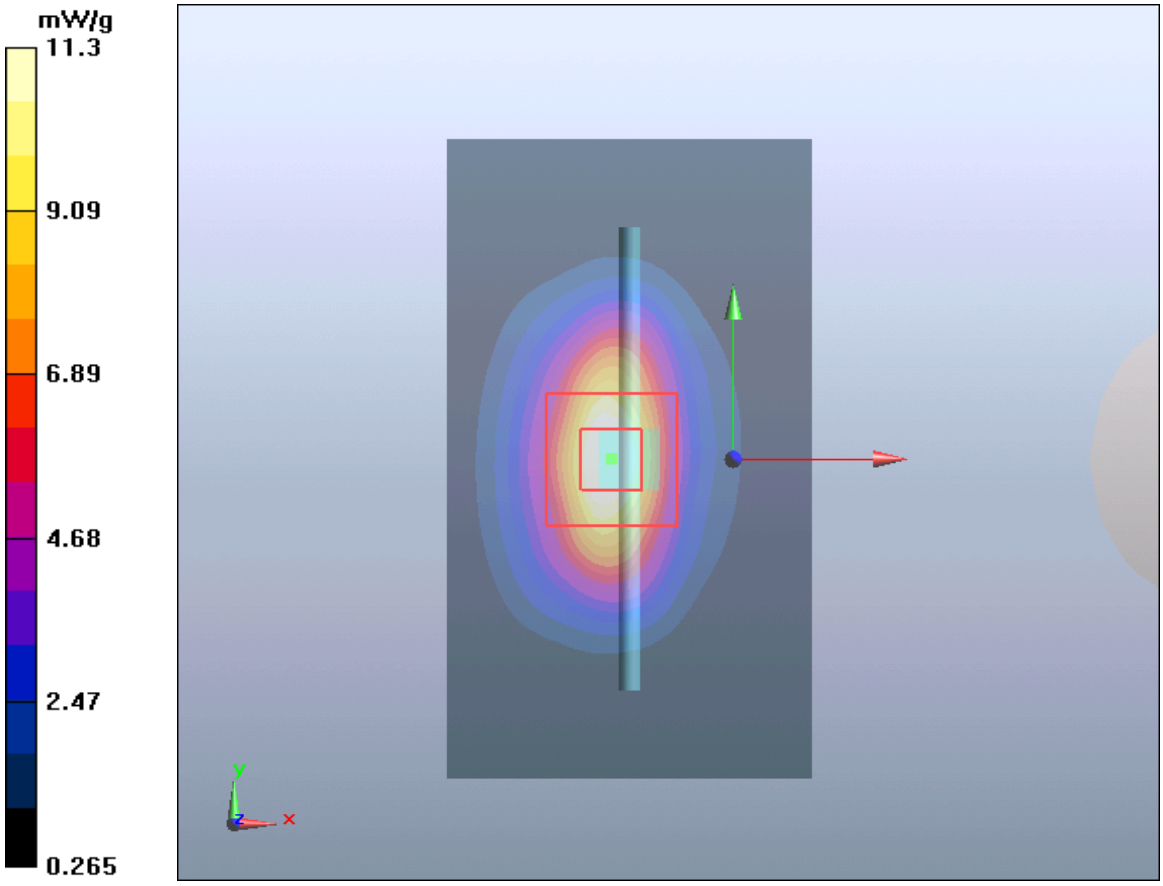



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 5 System Performance Check at 2450 MHz Head TSL

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2**

Date: 3/27/2019

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; σ = 1.81 S/m; $\varepsilon_r$ = 38.6; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 18.2 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g**

Maximum value of SAR (measured) = 15.9 mW/g

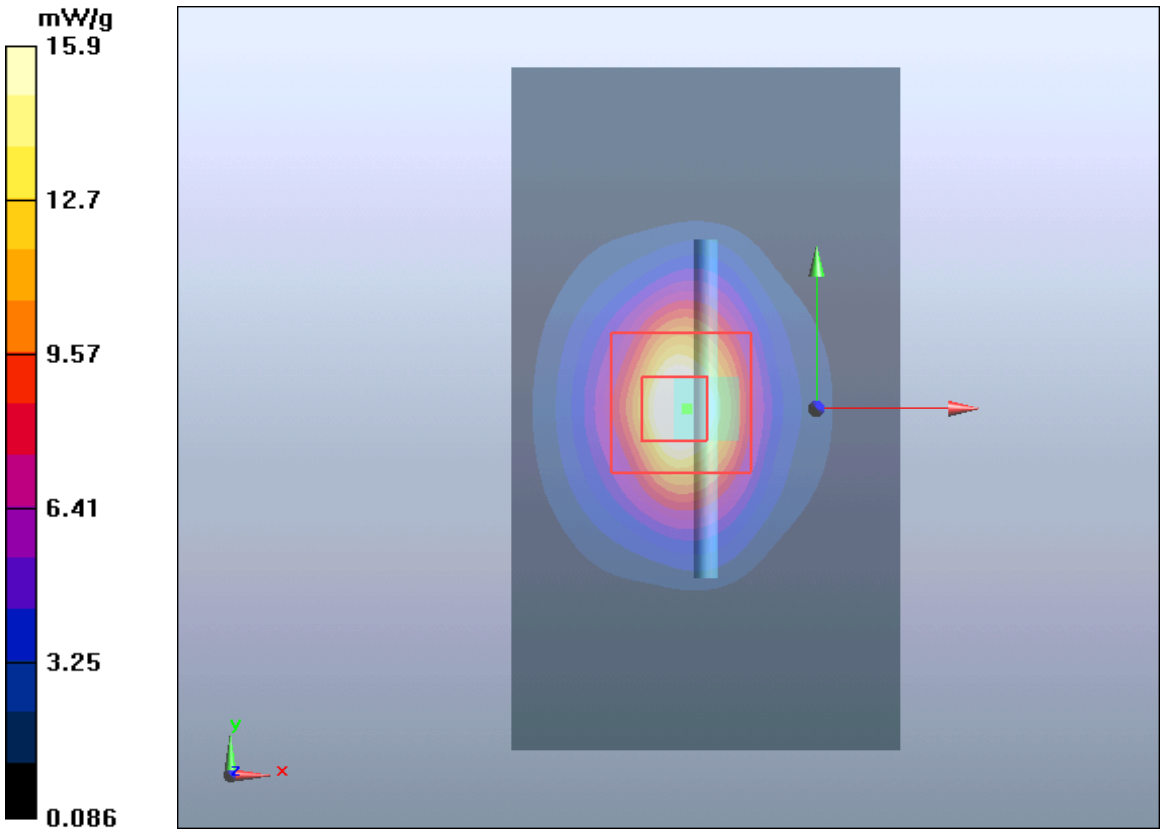



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 6 System Performance Check at 2450 MHz Body TSL

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2**

Date: 3/27/2019

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; σ = 1.98 S/m; $\varepsilon_r$ = 52.5; ρ = 1000 kg/$m^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 16 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.2 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 25.4 W/kg

**SAR(1 g) = 12.5 mW/g; SAR(10 g) = 6.20 mW/g**

Maximum value of SAR (measured) = 14.4 mW/g

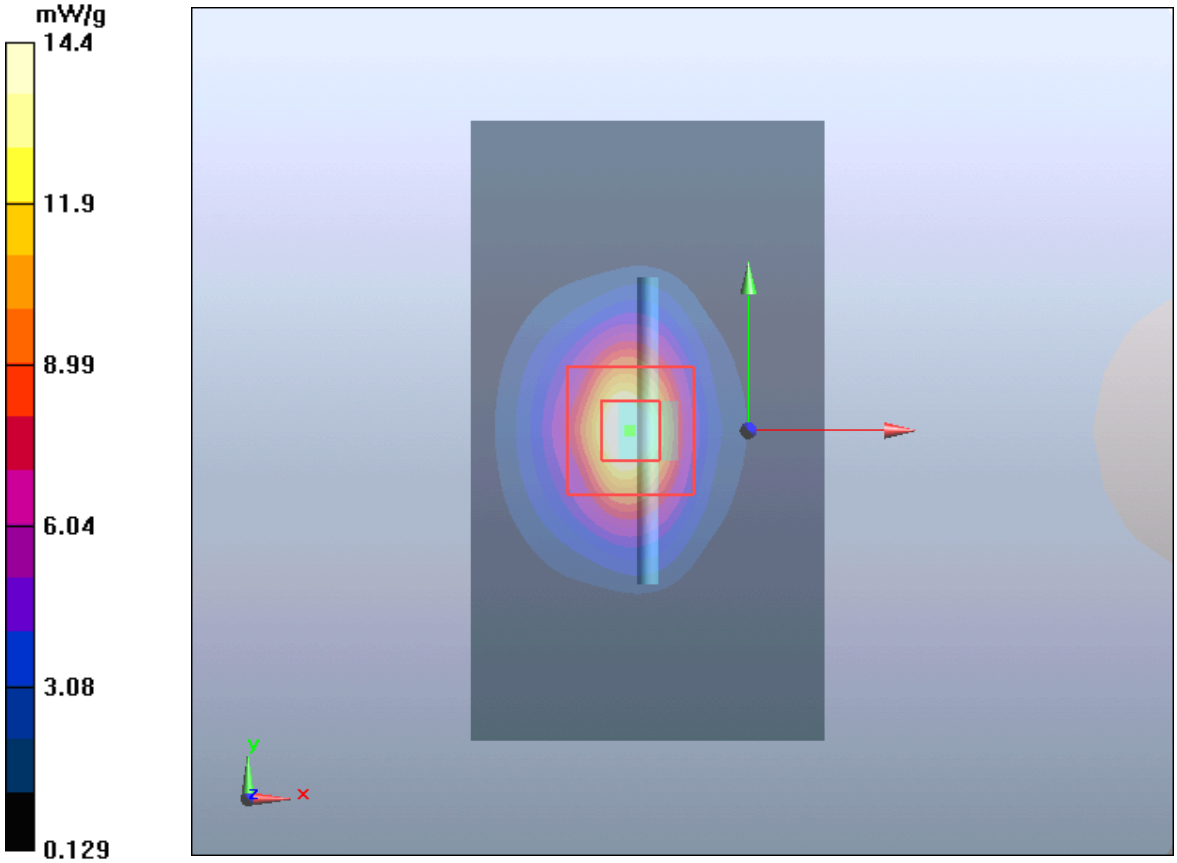



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 7 System Performance Check at 2600 MHz Head TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 3/27/2019

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; σ = 2.01 S/m; $\varepsilon_r$ = 38.2; ρ = 1000 kg/m$^3$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.28, 7.28, 7.28); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid:dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 17.439 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

**SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.07 mW/g**

Maximum value of SAR (measured) = 15.617 mW/g

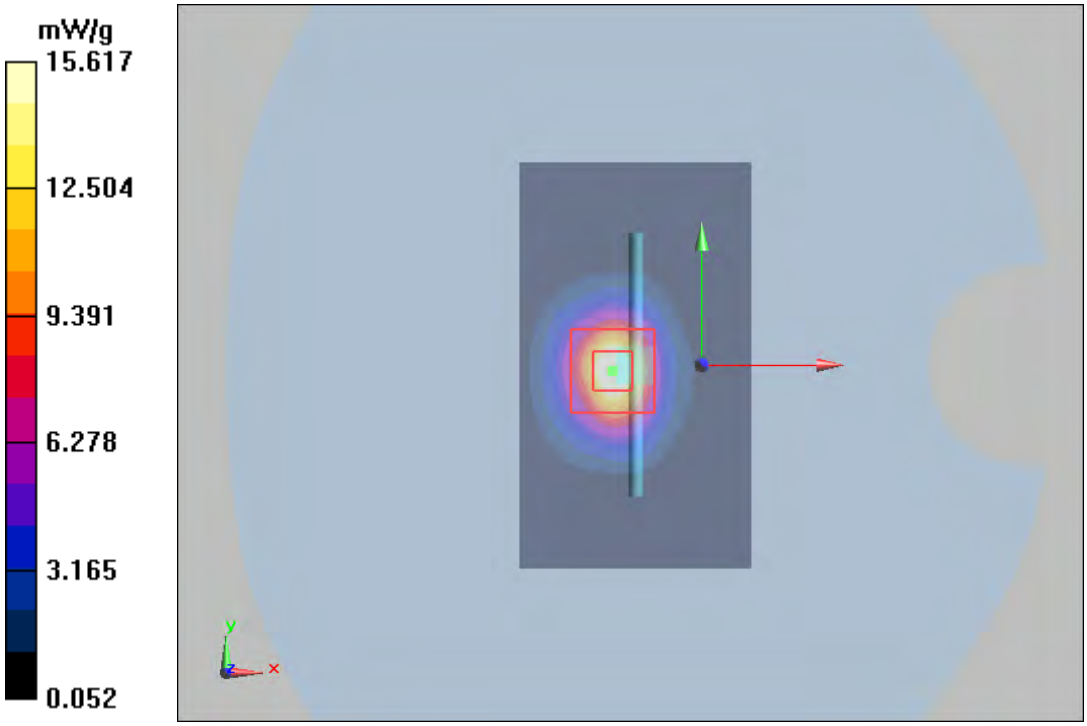



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 8 System Performance Check at 2600 MHz Body TSL

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2**

Date: 3/27/2019

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; σ = 2.23 S/m; $\varepsilon_r$ = 51.5; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.16, 7.16, 7.16); Calibrated: 5/29/2018;

Electronics: DAE4 SN1291; Calibrated: 12/4/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**d=10mm, Pin=250mW /Area Scan (41x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 17.7 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 74 V/m; Power Drift = -0.0027 dB

Peak SAR (extrapolated) = 28.5 W/kg

**SAR(1 g) = 13.5 mW/g; SAR(10 g) = 5.99 mW/g**

Maximum value of SAR (measured) = 15.7 mW/g

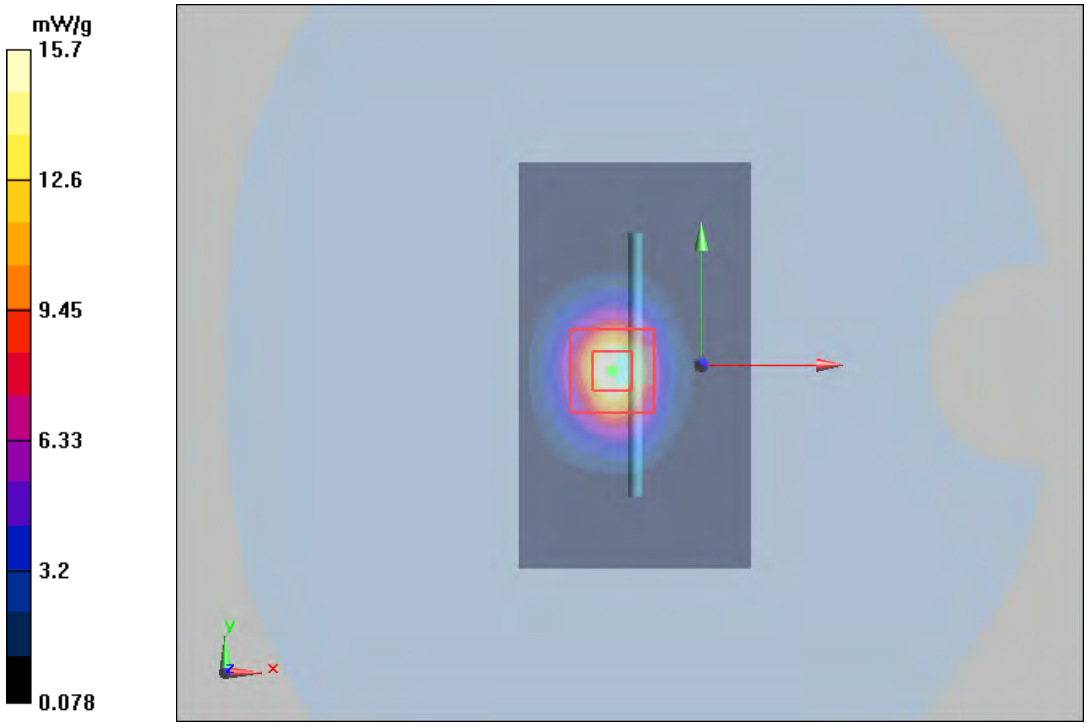



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX C: Highest Graph Results

## Plot 9 GSM 850 Left Cheek High

Date: 3/26/2019

Communication System: UID 0, GSM (0); Frequency: 848.8 MHz;Duty Cycle: 1:8.30042

Medium parameters used: f = 849 MHz; σ = 0.926 S/m; $\varepsilon_r$ = 41.873; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.10, 9.10, 9.10); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek High/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.69 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.782 W/kg**

Maximum value of SAR (measured) = 1.460 W/kg

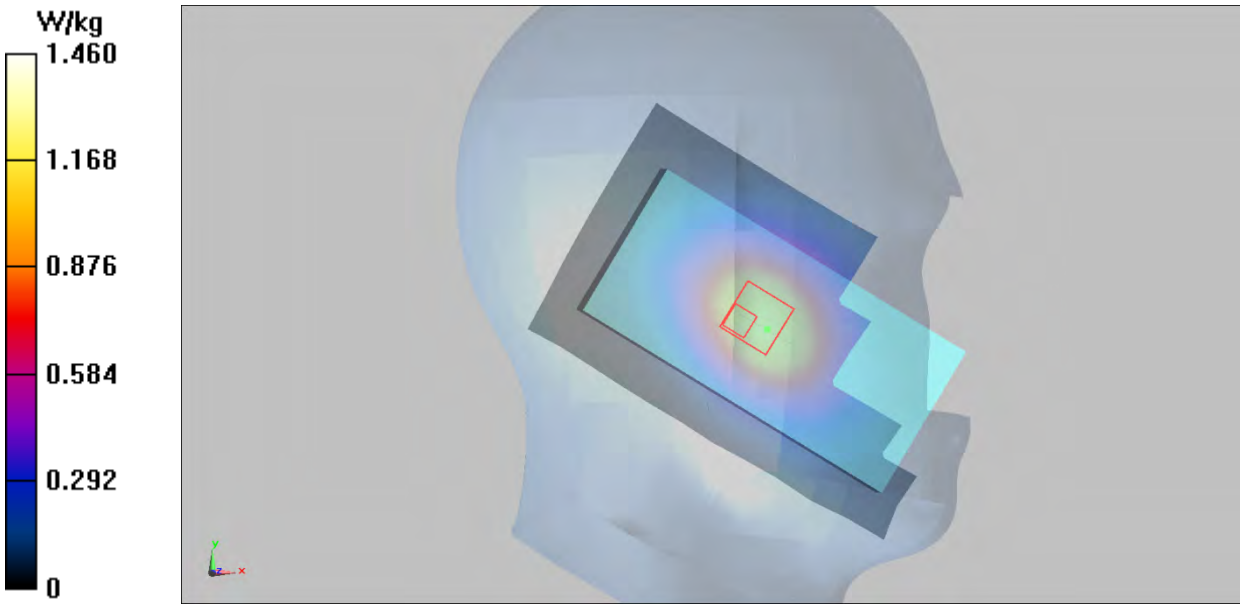



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 10 GSM 850 Back Side Middle (Distance 15mm)

Date: 3/26/2019

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042

Medium parameters used: f = 836.6 MHz; σ = 0.974 S/m; $\varepsilon_r$ = 53.795; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.32, 9.32, 9.32); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.28 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 1.150 W/kg; SAR(10 g) = 0.846 W/kg**

Maximum value of SAR (measured) = 1.220 W/kg

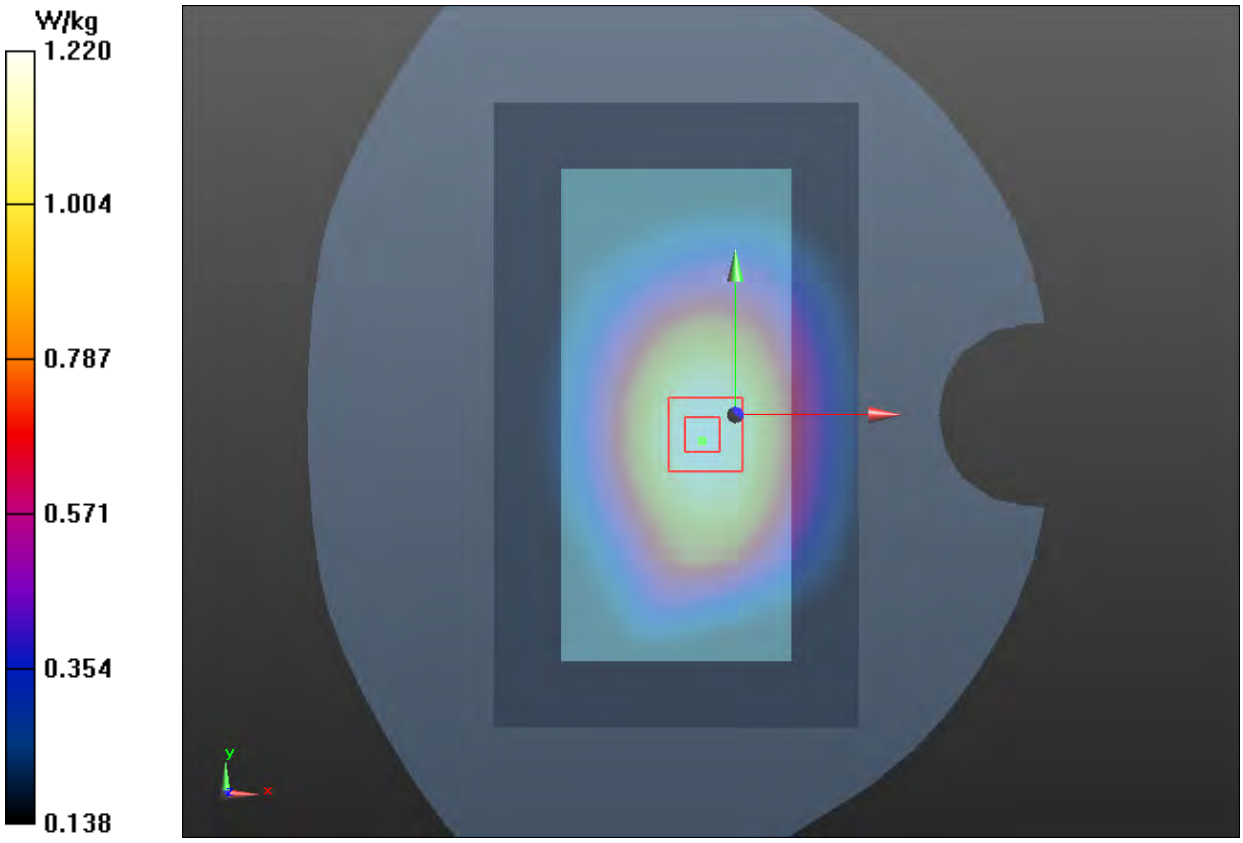



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 11 GSM 850 GPRS (4Txslots) Back Side High (Distance 10mm)

Date: 3/26/2019

Communication System: UID 0, GSM 850 (0); Frequency: 848.8 MHz;Duty Cycle: 1:8.30042

Medium parameters used: f = 848.8 MHz; σ = 0.985 S/m; $\varepsilon_r$ = 53.673; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.32, 9.32, 9.32); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.51 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 1.460 W/kg; SAR(10 g) = 1.04 W/kg**

Maximum value of SAR (measured) = 1.540 W/kg

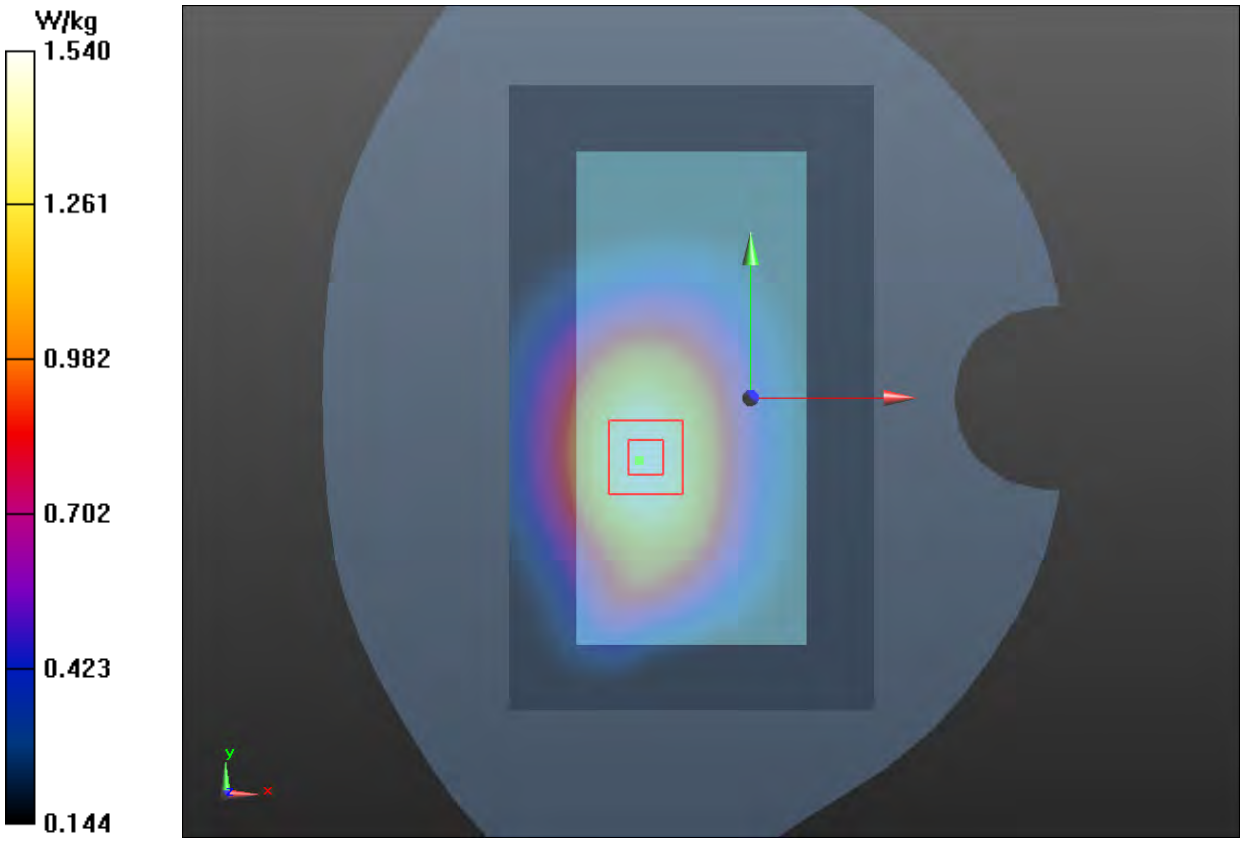



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 12 GSM 1900 Right Cheek Middle

Date: 3/28/2019

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: f = 1880 MHz; $\sigma$ = 1.393 S/m; $\varepsilon_r$ = 38.344; $\rho$ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.96, 7.96, 7.96); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.398 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.161 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.547 W/kg

**SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.219 W/kg**

Maximum value of SAR (measured) = 0.388 W/kg

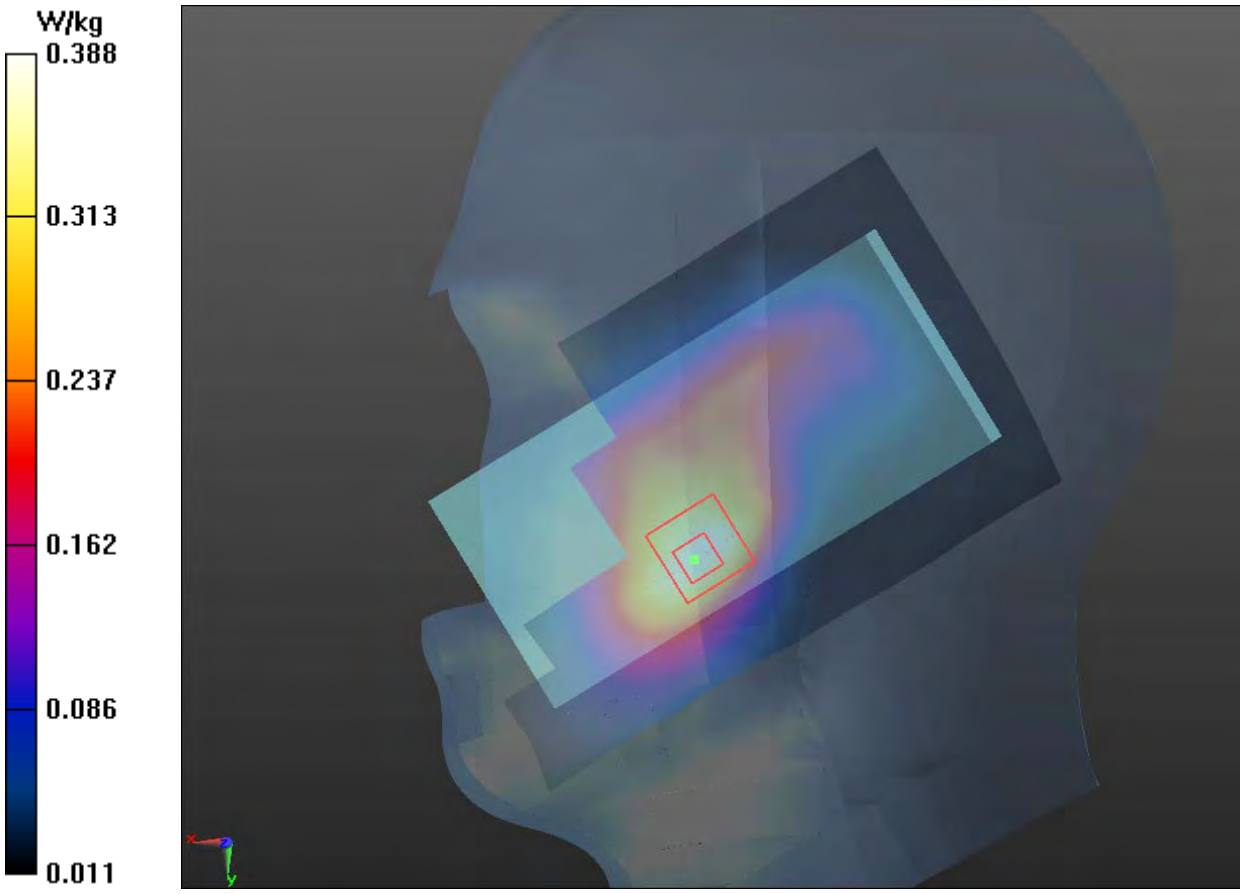



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 13 GSM 1900 Front Side Middle (Distance 15mm)

Date: 3/28/2019

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: f = 1880 MHz; $\sigma$ = 1.489 S/m; $\varepsilon_r$ = 52.896; $\rho$ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.70, 7.70, 7.70); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.332 W/kg

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.480 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.488 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.193 W/kg**

Maximum value of SAR (measured) = 0.327 W/kg

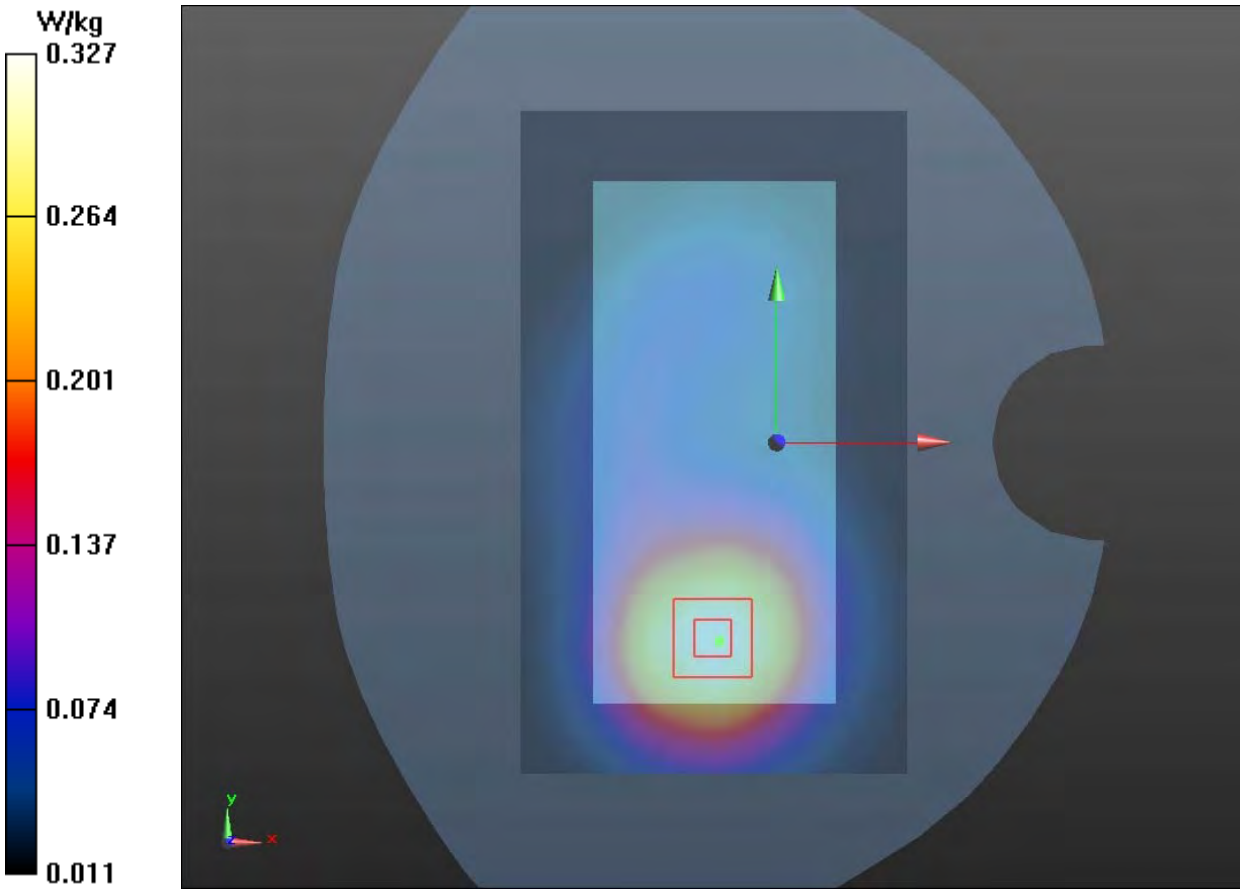



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 14 GSM 1900 GPRS (4Txslots) Back Side Middle (Distance 10mm)

Date: 3/28/2019

Communication System: UID 0, WCDMA II (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz; σ = 1.489 S/m; $\varepsilon_r$ = 52.896; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.70, 7.70, 7.70); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.720 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.59 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.417 W/kg**

Maximum value of SAR (measured) = 0.724 W/kg

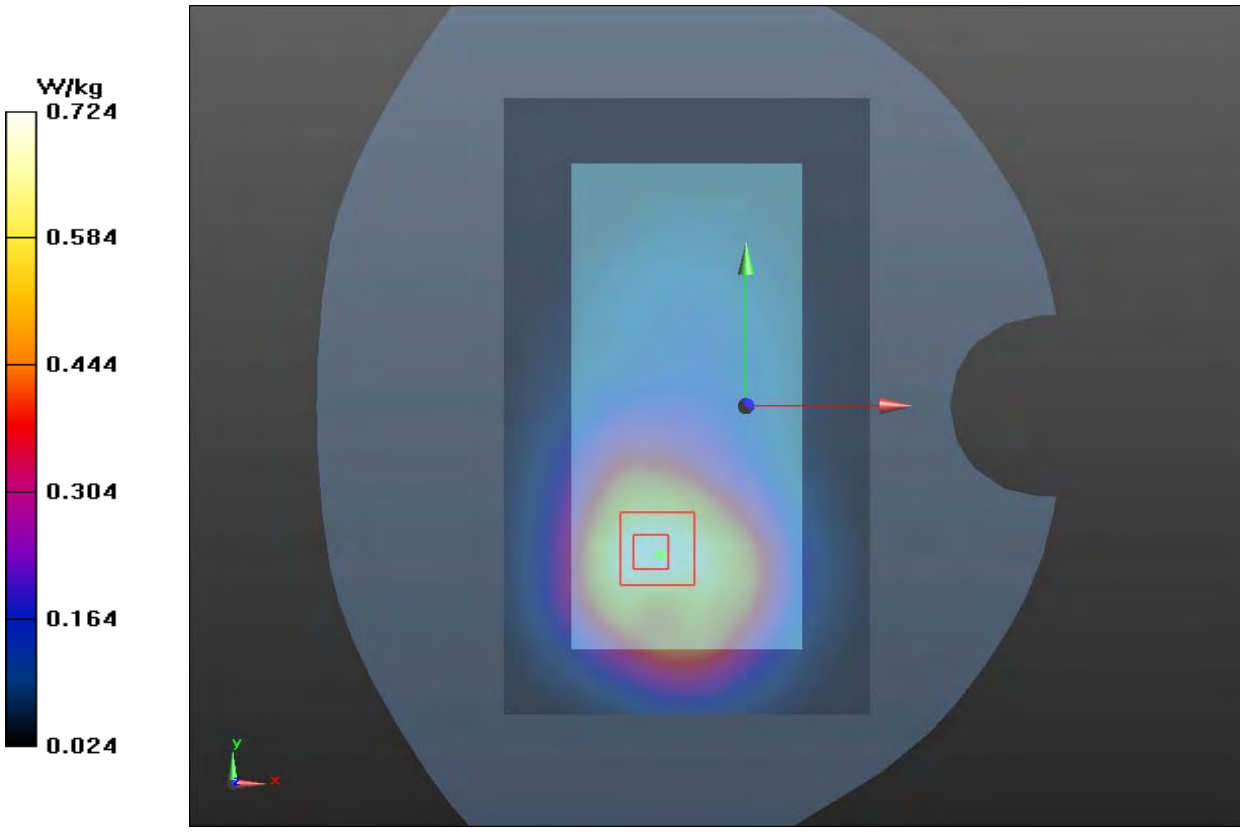



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 15 UMTS Band II Right Cheek Middle

Date: 3/28/2019

Communication System: UID 0, WCDMA II (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz; σ = 1.393 S/m; $\varepsilon_r$ = 38.344; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.96, 7.96, 7.96); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.686 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.936 W/kg

**SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.376 W/kg**

Maximum value of SAR (measured) = 0.657 W/kg

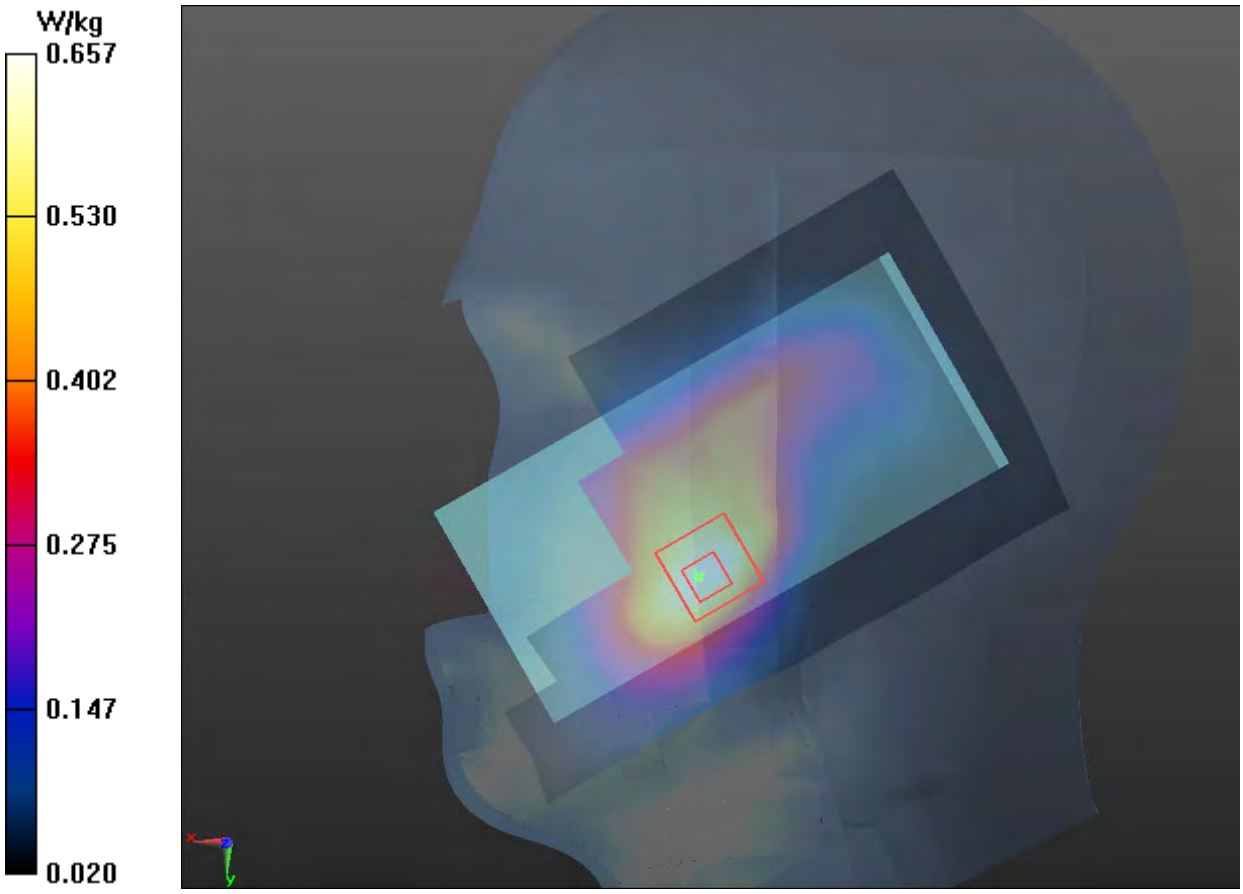



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 16 UMTS Band II Front Side Middle (Distance 15mm)

Date: 3/28/2019

Communication System: UID 0, WCDMA II (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz; σ = 1.489 S/m; $\varepsilon_r$ = 52.896; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.70, 7.70, 7.70); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.448 W/kg

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.472 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.656 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.443 W/kg

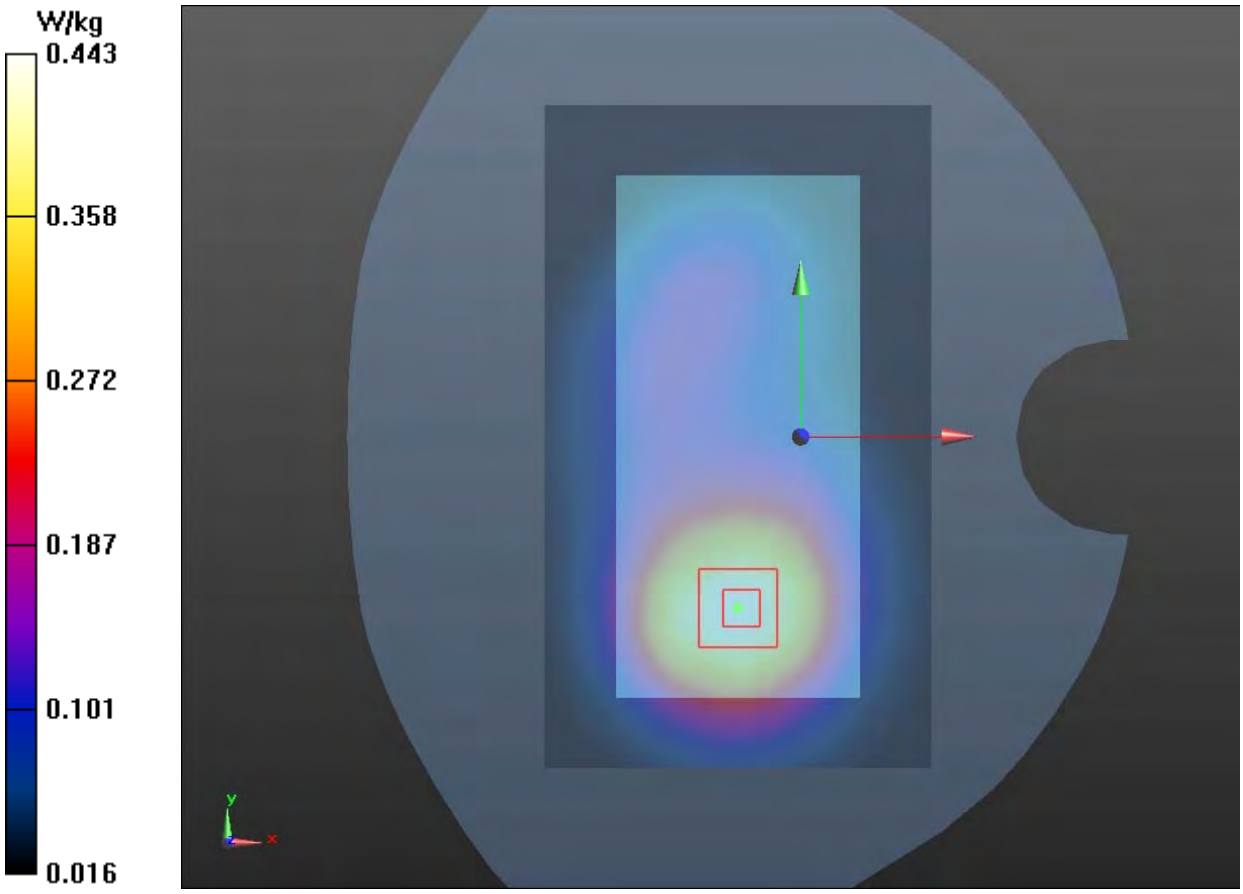



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 17 UMTS Band II Back Side Middle (Distance 10mm)

Date: 3/28/2019

Communication System: UID 0, WCDMA II (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz; σ = 1.489 S/m; $\varepsilon_r$ = 52.896; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.70, 7.70, 7.70); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.760 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.64 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.424 W/kg**

Maximum value of SAR (measured) = 0.732 W/kg

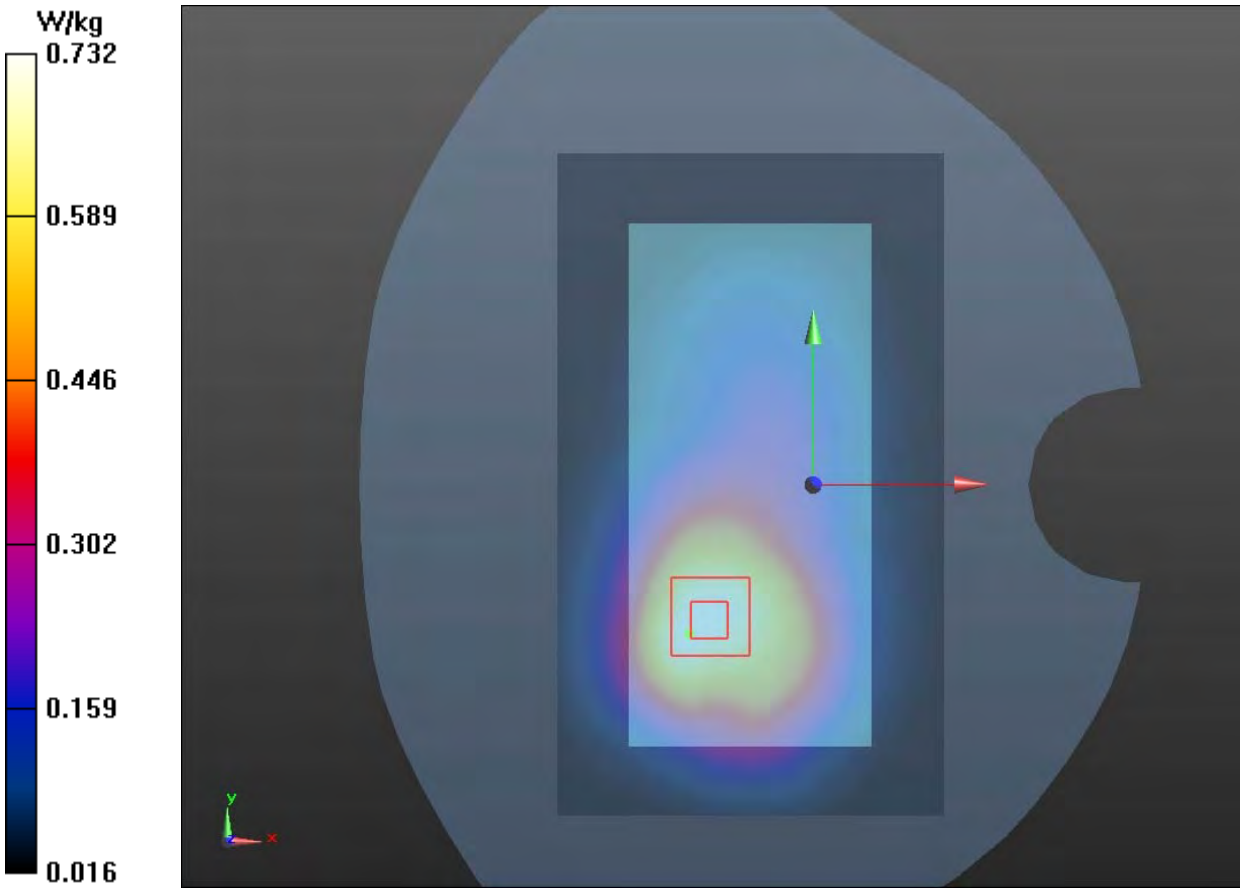



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 18 UMTS Band V Left Cheek Middle

Date: 3/26/2019

Communication System: UID 0, WCDMA V (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: f = 837 MHz; σ = 0.916 S/m; $\varepsilon_r$ = 41.951; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.10, 9.10, 9.10); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.571 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.390 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.694 W/kg

**SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.401 W/kg**

Maximum value of SAR (measured) = 0.567 W/kg

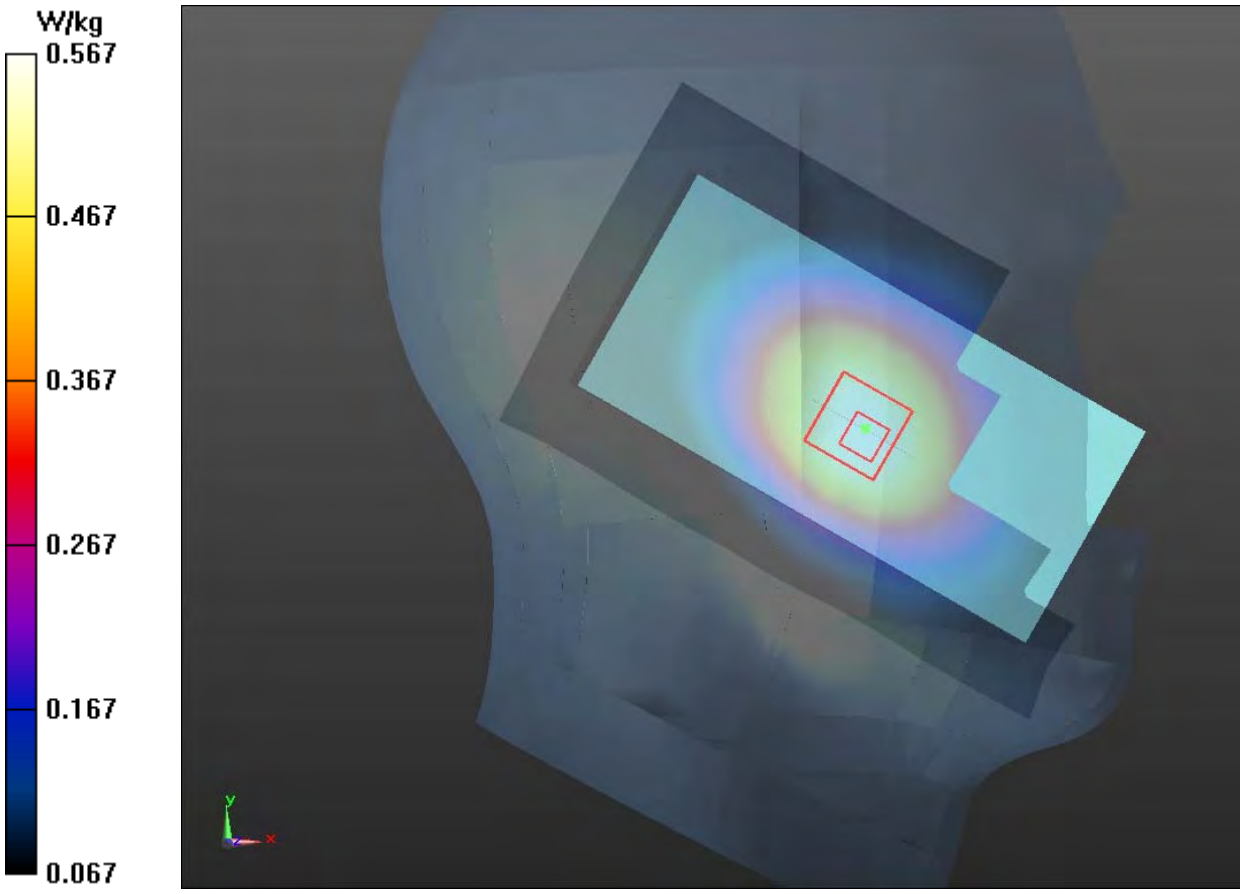



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 19 UMTS Band V Back Side Middle(Distance 15mm)

Date: 3/26/2019

Communication System: UID 0, WCDMA V (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz; σ = 0.974 S/m; $\varepsilon_r$ = 53.795; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.32, 9.32, 9.32); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.668 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.05 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.803 W/kg

**SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.468 W/kg**

Maximum value of SAR (measured) = 0.669 W/kg

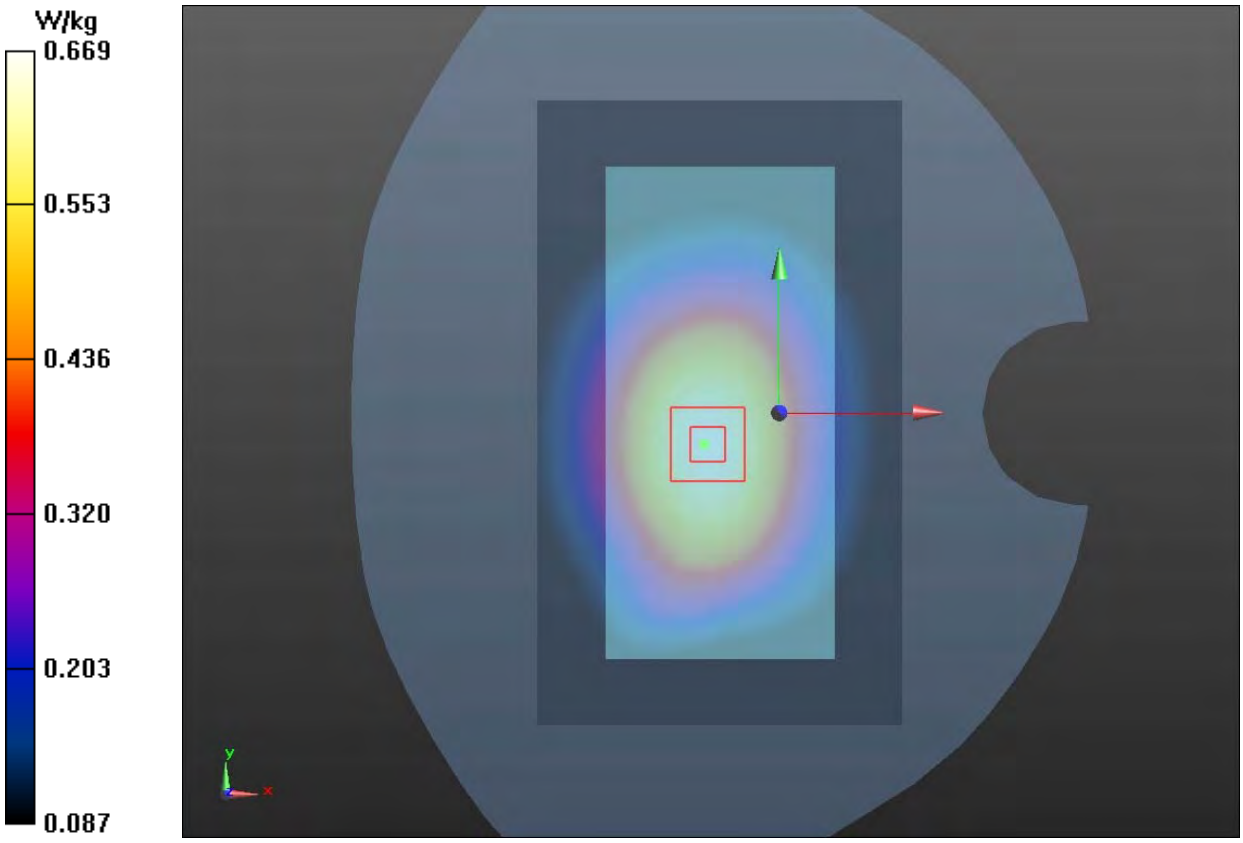



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 20 UMTS Band V Back Side Middle (Distance 10mm)

Date: 3/26/2019

Communication System: UID 0, WCDMA V (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz; σ = 0.974 S/m; $\varepsilon_r$ = 53.795; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.32, 9.32, 9.32); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.864 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.32 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.604 W/kg**

Maximum value of SAR (measured) = 0.865 W/kg

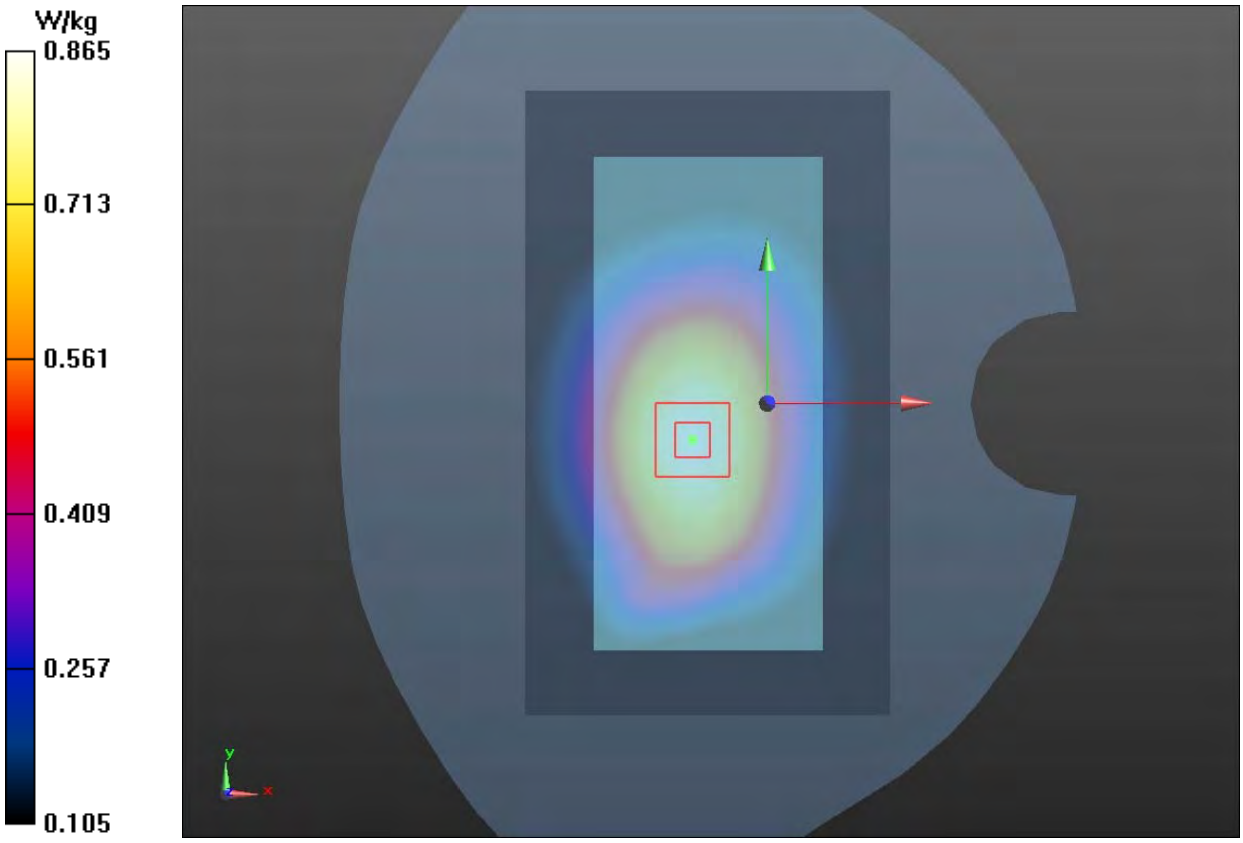



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 21 LTE Band 7 1RB Right Cheek High

Date: 3/27/2019

Communication System: UID 0, LTE (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2560 MHz; σ = 1.974 S/m; $\varepsilon_r$ = 38.306; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.28, 7.28, 7.28); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek High/Area Scan (91x151x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.303 W/kg

**Right Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.457 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.554 W/kg

**SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.145 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

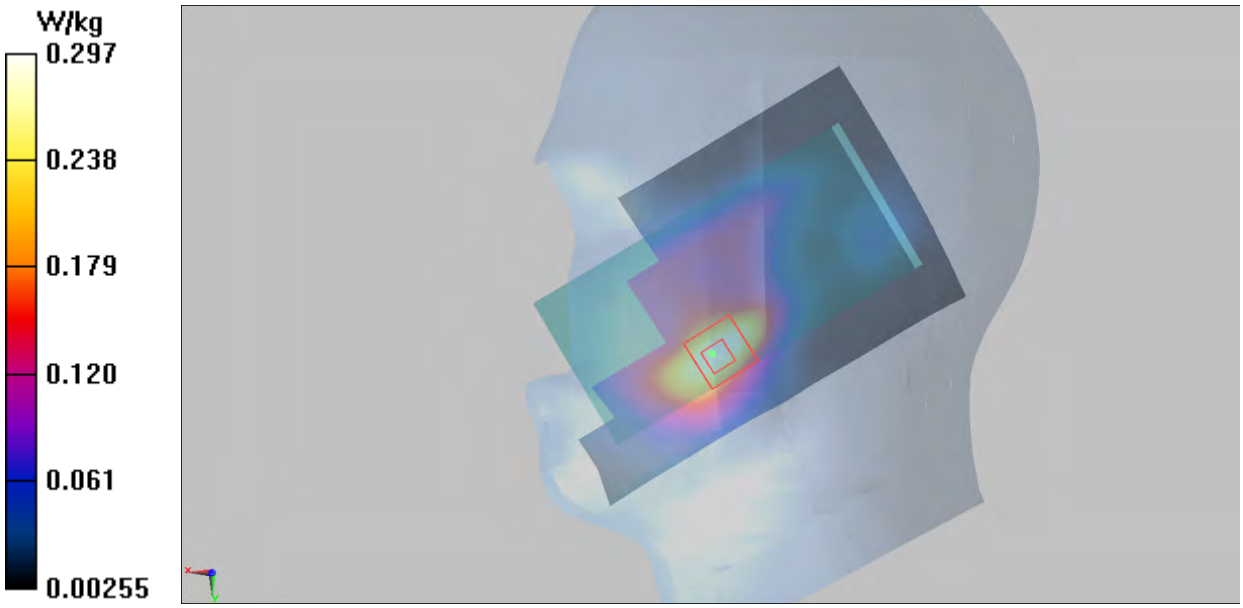



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 22 LTE Band 7 1RB Back Side High (Distance 15mm)

Date: 3/27/2019

Communication System: UID 0, LTE (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2560 MHz; σ = 2.105 S/m; $\varepsilon_r$ = 50.784; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.16, 7.16, 7.16); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (71x111x1):** Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.261 W/kg

**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.868 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.465 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.142 W/kg**

Maximum value of SAR (measured) = 0.265 W/kg

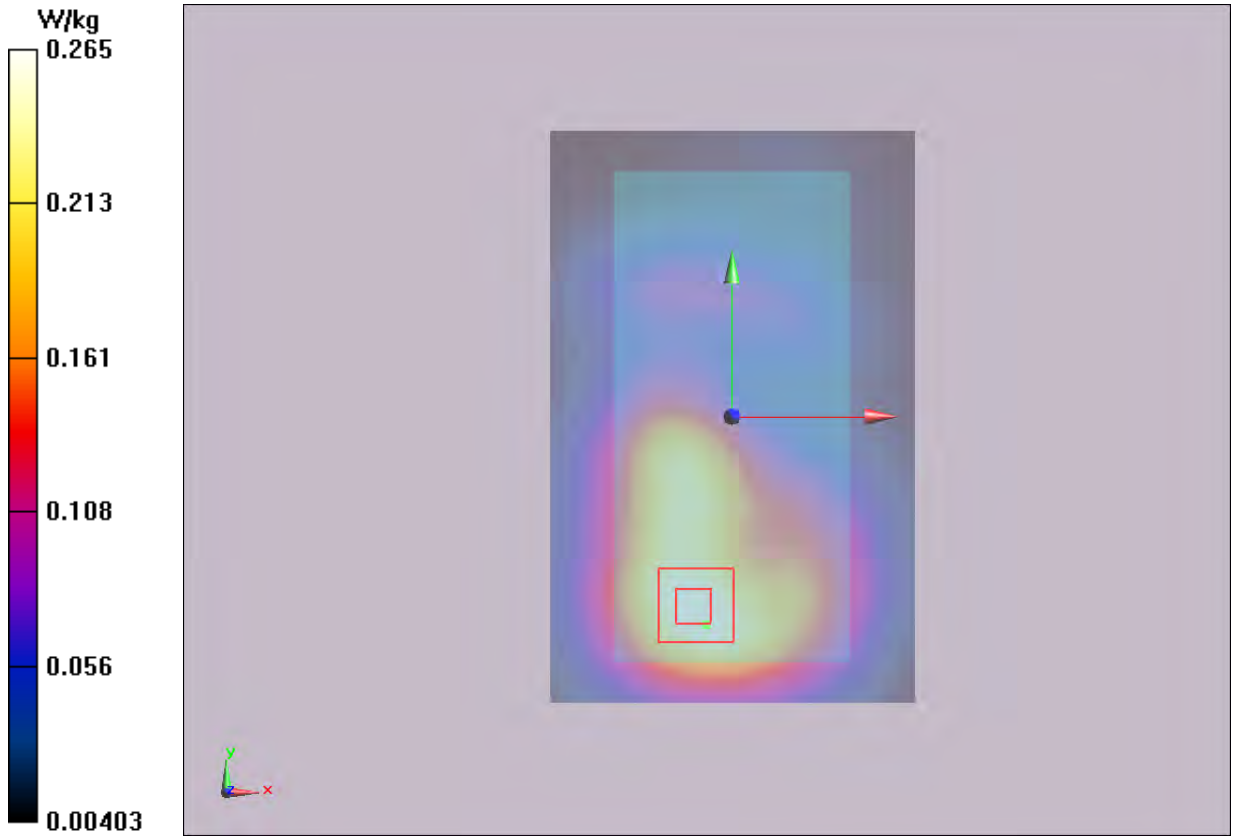



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 23 LTE Band 7 1RB Bottom Edge High (Distance 10mm)

Date: 3/27/2019

Communication System: UID 0, LTE (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: f = 2560 MHz; σ = 2.105 S/m; $\varepsilon_r$ = 50.784; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.16, 7.16, 7.16); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Bottom Edge High/Area Scan (51x91x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.476 W/kg

**Bottom Edge High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.31 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.760 W/kg

**SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.454 W/kg

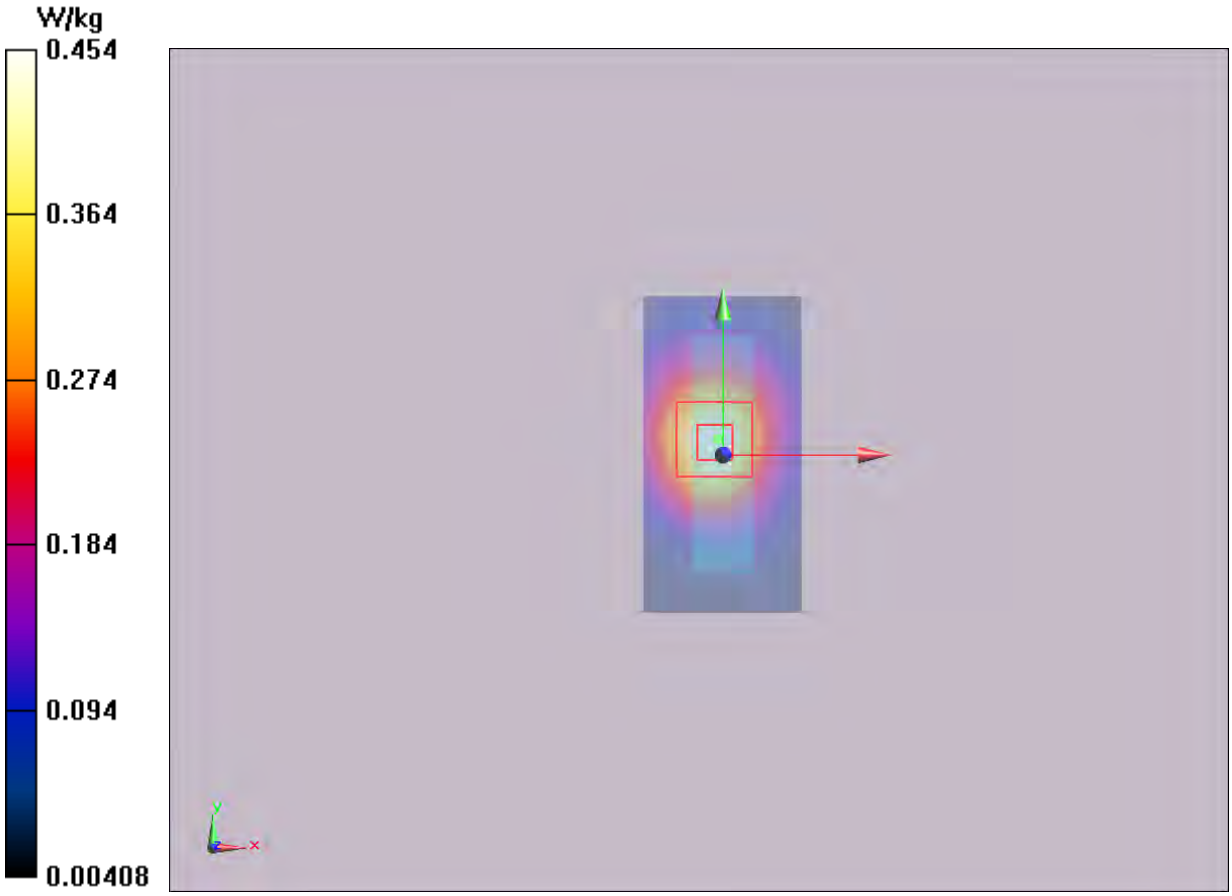



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 24 802.11b Right Cheek High

Date: 3/27/2019

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz;Duty Cycle: 1:1.004

Medium parameters used: f = 2462 MHz; σ = 1.87 S/m; $\varepsilon_r$ = 38.65; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek High/Area Scan (91x141x1):** Interpolated grid: dx=12 mm, dy=12mm

Maximum value of SAR (interpolated) = 0.392 W/kg

**Right Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.83 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.679 W/kg

**SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.369 W/kg

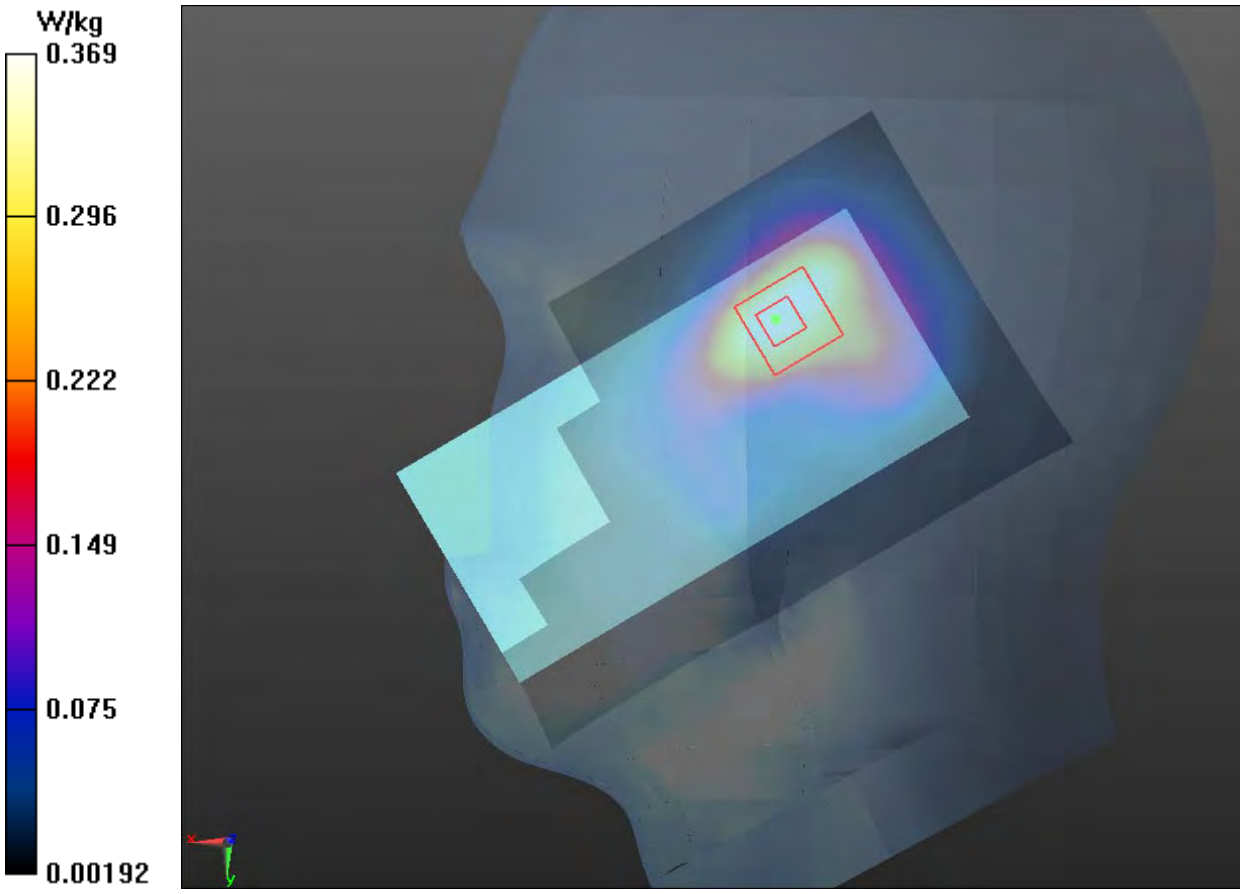



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 25 802.11b Back Side High (Distance 10mm)

Date: 3/27/2019

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz;Duty Cycle: 1:1.0048

Medium parameters used: f = 2462 MHz; σ = 1.99 S/m; $\varepsilon_r$ = 51.059; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (91x141x1):** Interpolated grid: dx=12 mm, dy=12mm

Maximum value of SAR (interpolated) = 0.160 W/kg

**Back Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.428 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.163 W/kg

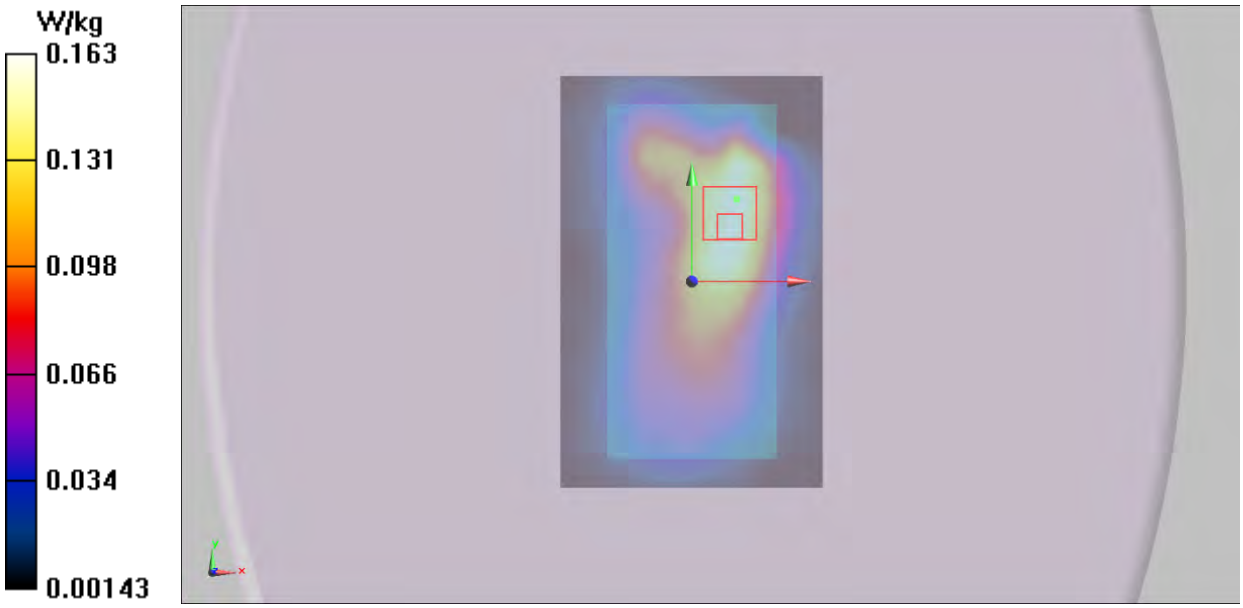



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Plot 26 BT Back Side High (Distance 10mm)

Date: 3/27/2019

Communication System: UID 0, BT (0); Frequency: 2480 MHz;Duty Cycle: 1:1.306

Medium parameters used: f = 2480 MHz; σ = 2.011 S/m; $\varepsilon_r$ = 51.009; ρ = 1000 kg/m$^3$

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 5/29/2018;

Electronics: DAE4 SN1317; Calibrated: 3/23/2018

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (91x141x1):** Interpolated grid: dx=12 mm, dy=12mm

Maximum value of SAR (interpolated) = 0.007 W/kg

**Back Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.031 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.020 W/kg

**SAR(1 g) = 0.006 W/kg; SAR(10 g) = 0.003 W/kg**

Maximum value of SAR (measured) = 0.0066 W/kg

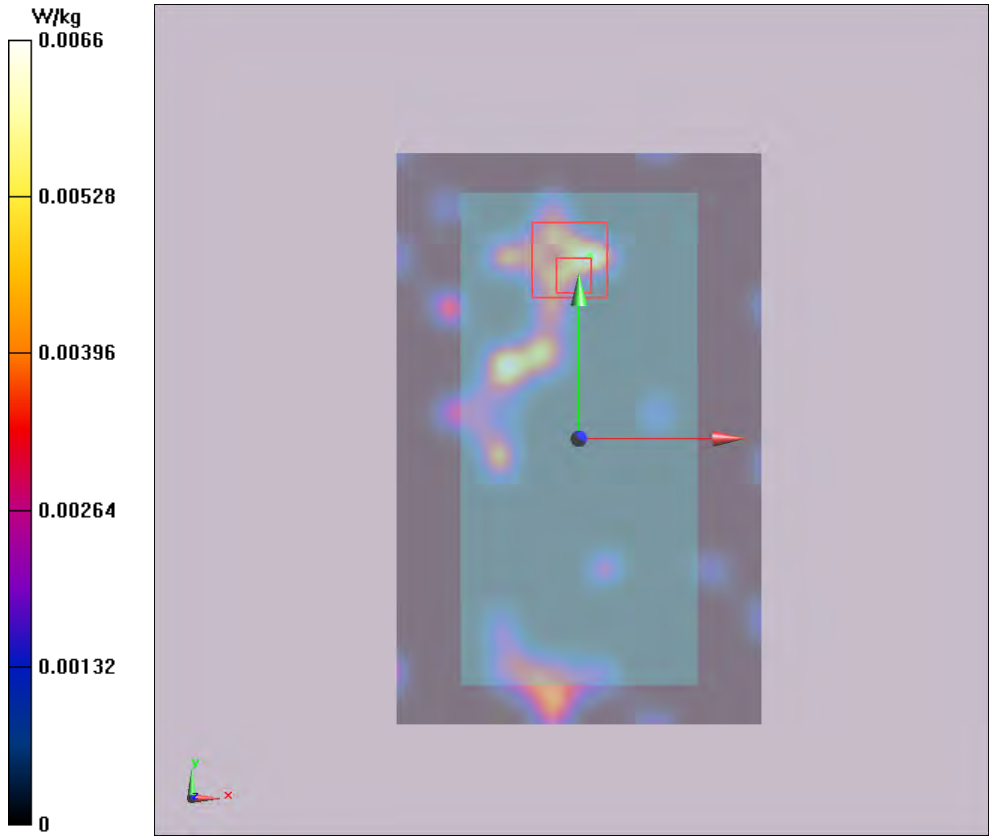



*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX D: Probe Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client TA(shanghai) Certificate No: Z18-60093

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | EX3DV4 - SN:3677 |
| Calibration Procedure(s) | FF-Z11-004-01<br>Calibration Procedures for Dosimetric E-field Probes |
| Calibration date: | May 29, 2018 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power Meter NRP2 | 101919 | 27-Jun-17 (CTTL, No.J17X05857) | Jun-18 |
| Power sensor NRP-Z91 | 101547 | 27-Jun-17 (CTTL, No.J17X05857) | Jun-18 |
| Power sensor NRP-Z91 | 101548 | 27-Jun-17 (CTTL, No.J17X05857) | Jun-18 |
| Reference10dBAttenuator | 18N50W-10dB | 09-Feb-18(CTTL, No.J18X01133) | Feb-20 |
| Reference20dBAttenuator | 18N50W-20dB | 09-Feb-18(CTTL, No.J18X01132) | Feb-20 |
| Reference Probe EX3DV4 | SN 3846 | 25-Jan-18(SPEAG,No.EX3-3846_Jan18) | Jan-19 |
| DAE4 | SN 777 | 15-Dec-17(SPEAG, No.DAE4-777_Dec17) | Dec -18 |
| **Secondary Standards** | **ID #** | **Cal Date(Calibrated by, Certificate No.)** | **Scheduled Calibration** |
| SignalGeneratorMG3700A | 6201052605 | 27-Jun-17 (CTTL, No.J17X05858) | Jun-18 |
| Network Analyzer E5071C | MY46110673 | 14-Jan-18 (CTTL, No.J18X00561) | Jan -19 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Yu Zongying | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: May 31, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z18-60093 Page 1 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| NORMx,y,z | sensitivity in free space |
| ConvF | sensitivity in TSL / NORMx,y,z |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A,B,C,D | modulation dependent linearization parameters |
| Polarization Φ | Φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i θ=0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016

c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- *NORMx,y,z:* Assessed for E-field polarization θ=0 (f≤900MHz in TEM-cell; f>1800MHz: waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not effect the $E^2$-field uncertainty inside TSL (see below ConvF).
- *NORM(f)x,y,z = NORMx,y,z* frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- *Ax,y,z; Bx,y,z; Cx,y,z;VRx,y,z:*A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f≤800MHz) and inside waveguide using analytical field distributions based on power measurements for f >800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from±50MHz to±100MHz.
- *Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle:* The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL speag
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# Probe EX3DV4

# SN: 3677

Calibrated: May 29, 2018

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: Z18-60093 Page 3 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

## Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|---|---|---|---|
| Norm(μV/(V/m)²)[A] | 0.41 | 0.46 | 0.41 | ±10.0% |
| DCP(mV)[B] | 99.9 | 102.7 | 102.1 | |

## Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Unc[E] (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 152.4 | ±2.4% |
| | | Y | 0.0 | 0.0 | 1.0 | | 161.7 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 152.2 | |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of Norm X, Y, Z do not affect the $E^2$-field uncertainty inside TSL (see Page 5 and Page 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainly is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

## Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz][C] | Relative Permittivity[F] | Conductivity (S/m)[F] | ConvF X | ConvF Y | ConvF Z | Alpha[G] | Depth[G] (mm) | Unct. (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 41.9 | 0.89 | 9.40 | 9.40 | 9.40 | 0.40 | 0.80 | ±12.1% |
| 835 | 41.5 | 0.90 | 9.10 | 9.10 | 9.10 | 0.15 | 1.41 | ±12.1% |
| 1750 | 40.1 | 1.37 | 8.19 | 8.19 | 8.19 | 0.21 | 1.15 | ±12.1% |
| 1900 | 40.0 | 1.40 | 7.96 | 7.96 | 7.96 | 0.25 | 1.01 | ±12.1% |
| 2300 | 39.5 | 1.67 | 7.91 | 7.91 | 7.91 | 0.40 | 0.78 | ±12.1% |
| 2450 | 39.2 | 1.80 | 7.57 | 7.57 | 7.57 | 0.53 | 0.76 | ±12.1% |
| 2600 | 39.0 | 1.96 | 7.28 | 7.28 | 7.28 | 0.64 | 0.70 | ±12.1% |
| 5250 | 35.9 | 4.71 | 5.60 | 5.60 | 5.60 | 0.40 | 1.15 | ±13.3% |
| 5600 | 35.5 | 5.07 | 4.87 | 4.87 | 4.87 | 0.45 | 1.05 | ±13.3% |
| 5750 | 35.4 | 5.22 | 4.99 | 4.99 | 4.99 | 0.45 | 1.35 | ±13.3% |

[C] Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

## Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz][C] | Relative Permittivity[F] | Conductivity (S/m)[F] | ConvF X | ConvF Y | ConvF Z | Alpha[G] | Depth[G] (mm) | Unct. (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 55.5 | 0.96 | 9.79 | 9.79 | 9.79 | 0.40 | 0.80 | ±12.1% |
| 835 | 55.2 | 0.97 | 9.32 | 9.32 | 9.32 | 0.15 | 1.51 | ±12.1% |
| 1750 | 53.4 | 1.49 | 7.91 | 7.91 | 7.91 | 0.23 | 1.09 | ±12.1% |
| 1900 | 53.3 | 1.52 | 7.70 | 7.70 | 7.70 | 0.20 | 1.18 | ±12.1% |
| 2300 | 52.9 | 1.81 | 7.65 | 7.65 | 7.65 | 0.53 | 0.82 | ±12.1% |
| 2450 | 52.7 | 1.95 | 7.53 | 7.53 | 7.53 | 0.37 | 1.10 | ±12.1% |
| 2600 | 52.5 | 2.16 | 7.16 | 7.16 | 7.16 | 0.55 | 0.80 | ±12.1% |
| 5250 | 48.9 | 5.36 | 5.04 | 5.04 | 5.04 | 0.50 | 1.55 | ±13.3% |
| 5600 | 48.5 | 5.77 | 4.27 | 4.27 | 4.27 | 0.51 | 1.66 | ±13.3% |
| 5750 | 48.3 | 5.94 | 4.43 | 4.43 | 4.43 | 0.50 | 1.81 | ±13.3% |

[C] Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# Frequency Response of E-Field
## (TEM-Cell: ifi110 EXX, Waveguide: R22)

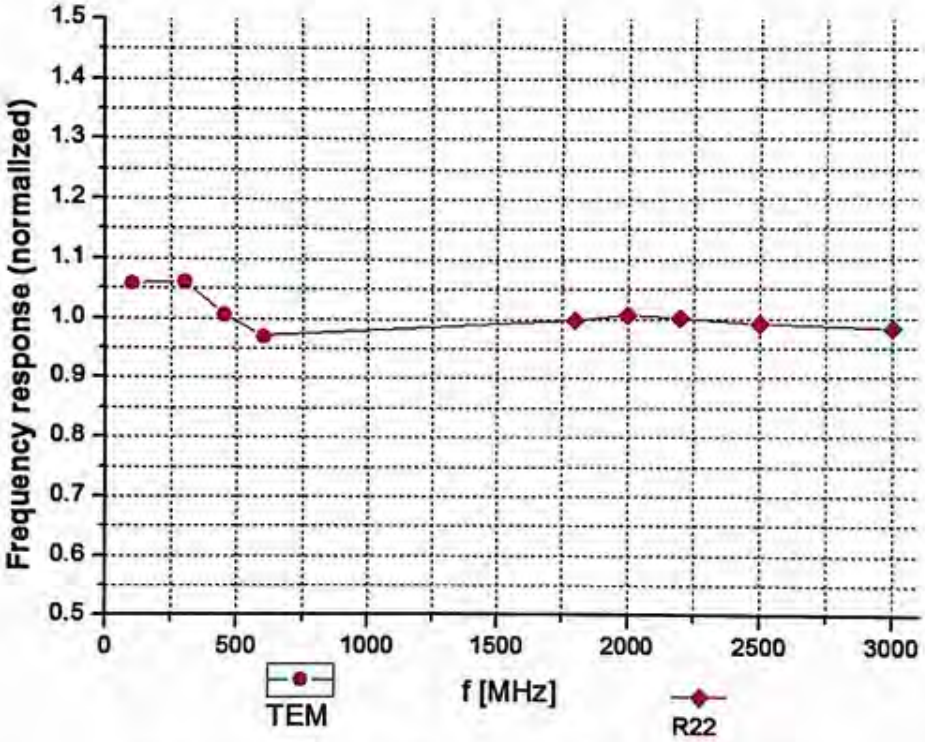


**Uncertainty of Frequency Response of E-field: ±7.4% (k=2)**

Certificate No: Z18-60093 Page 7 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# Receiving Pattern (Φ), θ=0°

## f=600 MHz, TEM

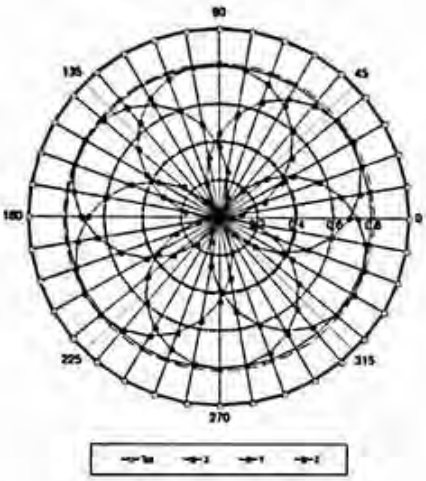


## f=1800 MHz, R22

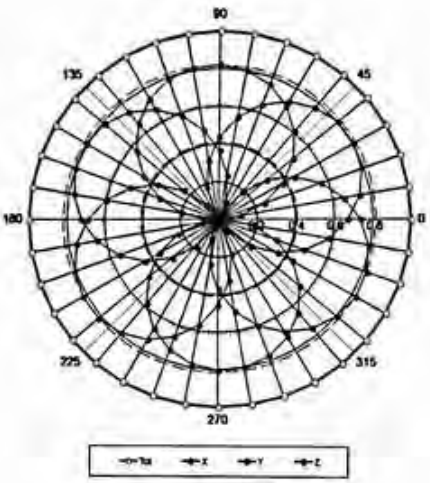


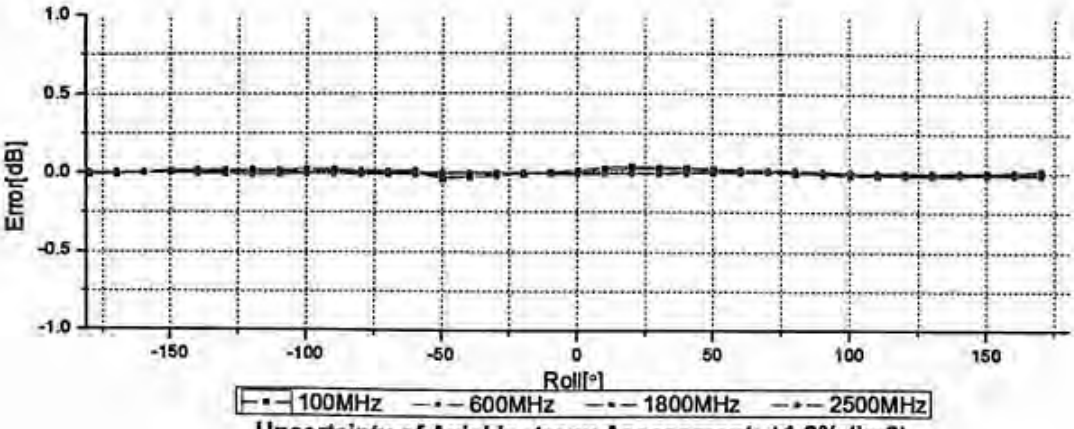


**Uncertainty of Axial Isotropy Assessment: ±1.2% (k=2)**

Certificate No: Z18-60093 Page 8 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## Dynamic Range f(SAR$_{head}$)
## (TEM cell, f = 900 MHz)

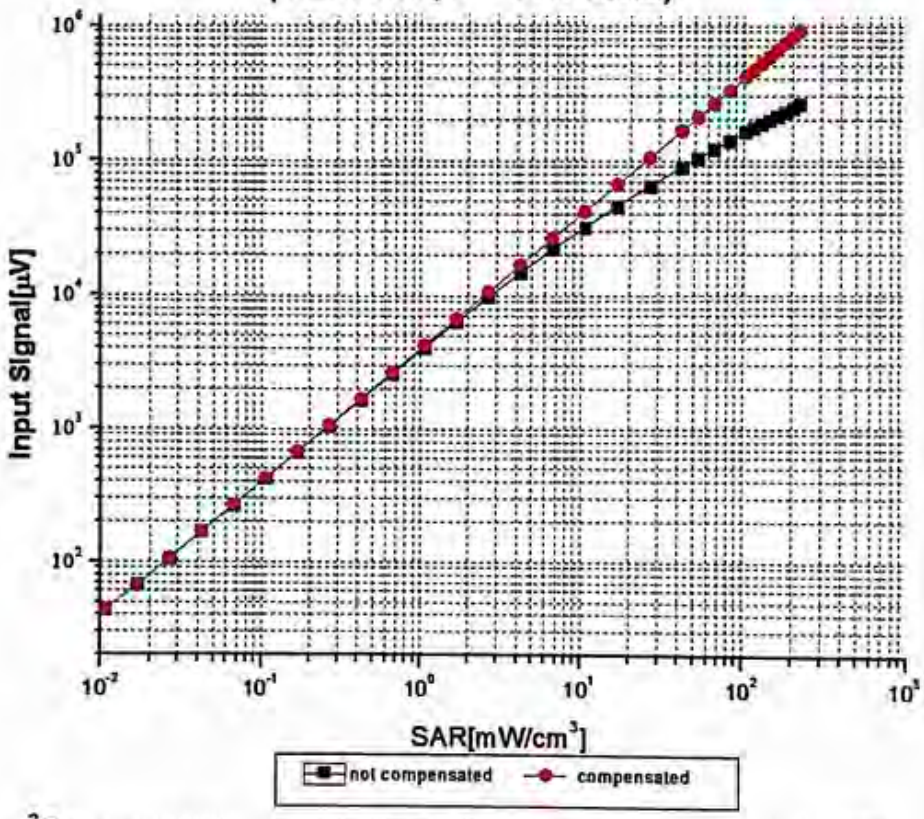


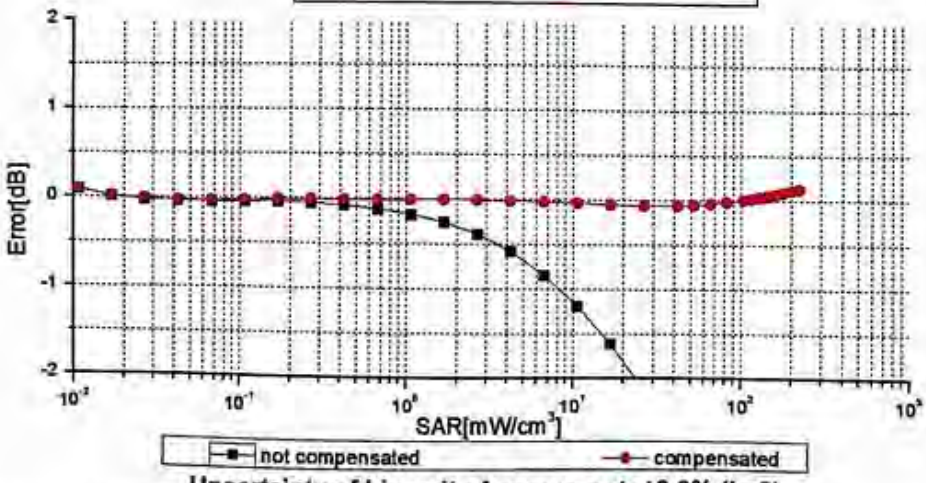


**Uncertainty of Linearity Assessment: ±0.9% (k=2)**

Certificate No: Z18-60093 Page 9 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL speag
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# Conversion Factor Assessment

f=750 MHz, WGLS R9(H_convF)

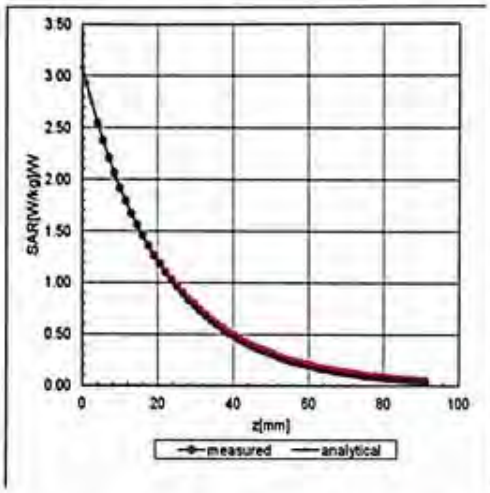


f=1750 MHz, WGLS R22(H_convF)

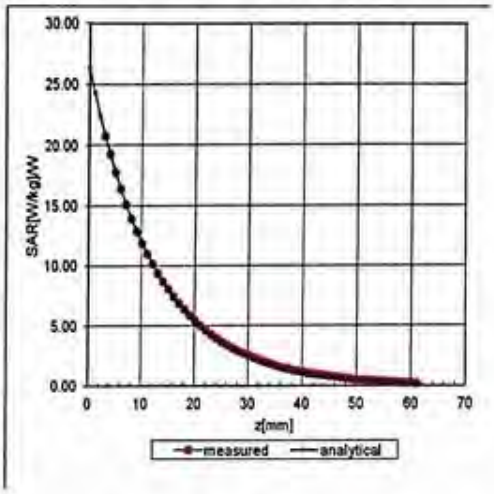


# Deviation from Isotropy in Liquid

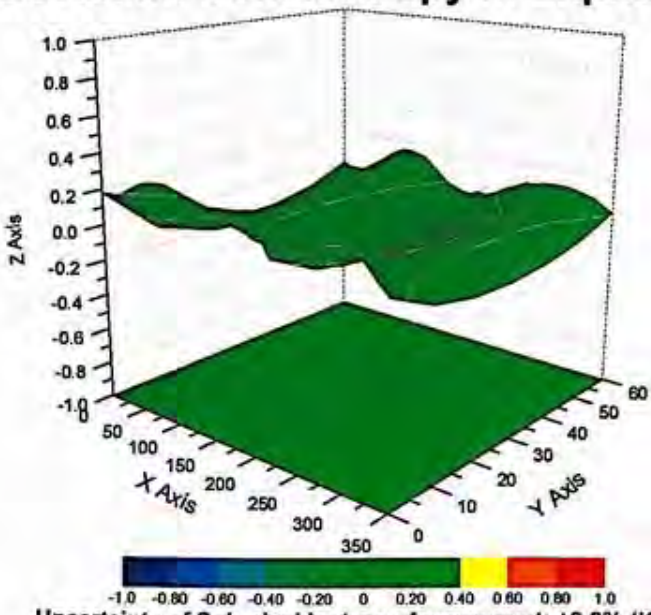


Uncertainty of Spherical Isotropy Assessment: ±3.2% (K=2)

Certificate No: Z18-60093 Page 10 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

## Other Probe Parameters

| | |
|---|---|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 118.3 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disable |
| Probe Overall Length | 337mm |
| Probe Body Diameter | 10mm |
| Tip Length | 9mm |
| Tip Diameter | 2.5mm |
| Probe Tip to Sensor X Calibration Point | 1mm |
| Probe Tip to Sensor Y Calibration Point | 1mm |
| Probe Tip to Sensor Z Calibration Point | 1mm |
| Recommended Measurement Distance from Surface | 1.4mm |

Certificate No: Z18-60093 Page 11 of 11


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX E: D835V2 Dipole Calibration Certificate

In Collaboration with speag CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

中国认可 国际互认 校准 CALIBRATION CNAS L0570

Client TA(Shanghai) Certificate No: Z17-97114

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | D835V2 - SN: 4d020 |
| Calibration Procedure(s) | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |
| Calibration date: | August 28, 2017 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power Meter NRVD | 102083 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Power sensor NRV-Z5 | 100595 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Reference Probe EX3DV4 | SN 3617 | 23-Jan-17(SPEAG,No.EX3-3617_Jan17) | Jan-18 |
| DAE4 | SN 1331 | 19-Jan-17(CTTL-SPEAG,No.Z17-97015) | Jan-18 |
| **Secondary Standards** | **ID #** | **Cal Date(Calibrated by, Certificate No.)** | **Scheduled Calibration** |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286) | Jan-18 |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285) | Jan-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: August 31, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97114 Page 1 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORMx,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY52 | 52.10.0.1446 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Triple Flat Phantom 5.1C | |
| **Distance Dipole Center - TSL** | 15 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 835 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 41.5 | 0.90 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 41.2 ± 6 % | 0.89 mho/m ± 6 % |
| **Head TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Head TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.34 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **9.45 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Head TSL** | Condition | |
| SAR measured | 250 mW input power | 1.51 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **6.09 mW /g ± 18.7 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 55.2 | 0.97 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 55.6 ± 6 % | 0.98 mho/m ± 6 % |
| **Body TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Body TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.46 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **9.75 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Body TSL** | Condition | |
| SAR measured | 250 mW input power | 1.63 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **6.47 mW /g ± 18.7 % (k=2)** |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
speag
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 50.3Ω- 2.54jΩ |
| Return Loss | - 31.9dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 46.8Ω- 4.57jΩ |
| Return Loss | - 24.8dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.495 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL** Date: 08.28.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma$ = 0.887 S/m; $\varepsilon_r$ = 41.22; $\rho$ = 1000 kg/m$^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.73, 9.73, 9.73); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.74V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.60 W/kg

**SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.51 W/kg**

Maximum value of SAR (measured) = 3.16 W/kg

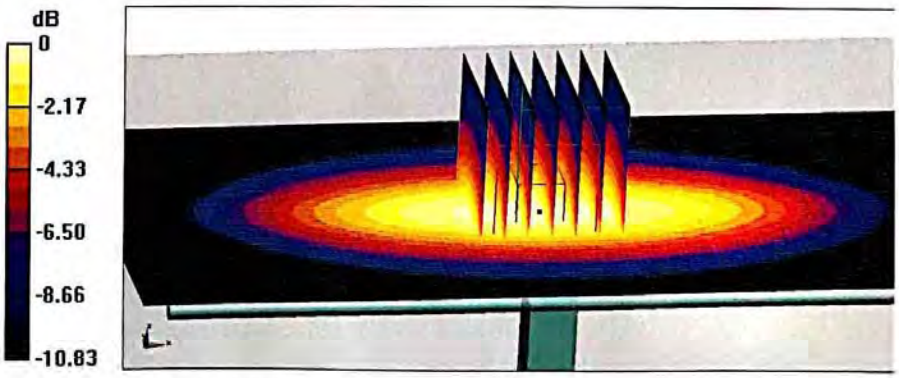


**0 dB = 3.16 W/kg = 5.00 dBW/kg**

Certificate No: Z17-97114 Page 5 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

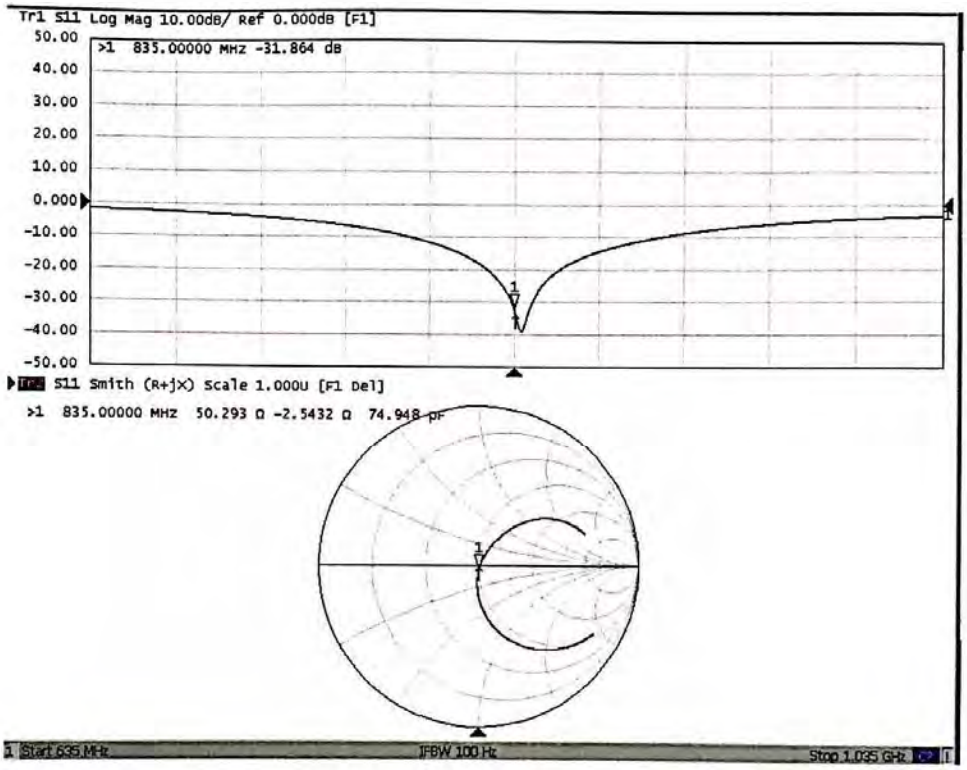


Certificate No: Z17-97114 Page 6 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL** Date: 08.27.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma$ = 0.984 S/m; $\varepsilon_r$ = 55.62; $\rho$ = 1000 kg/m$^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.64,9.64, 9.64); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.55 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.71 W/kg

**SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.63 W/kg**

Maximum value of SAR (measured) = 3.29 W/kg

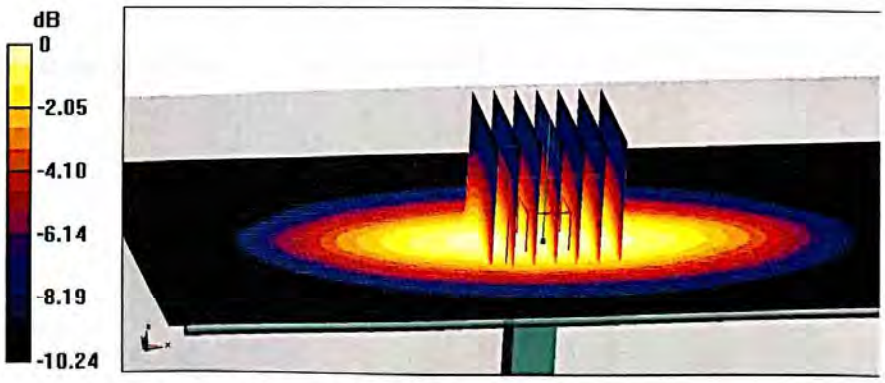


**0 dB = 3.29 W/kg = 5.17 dBW/kg**

Certificate No: Z17-97114 Page 7 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
speag
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

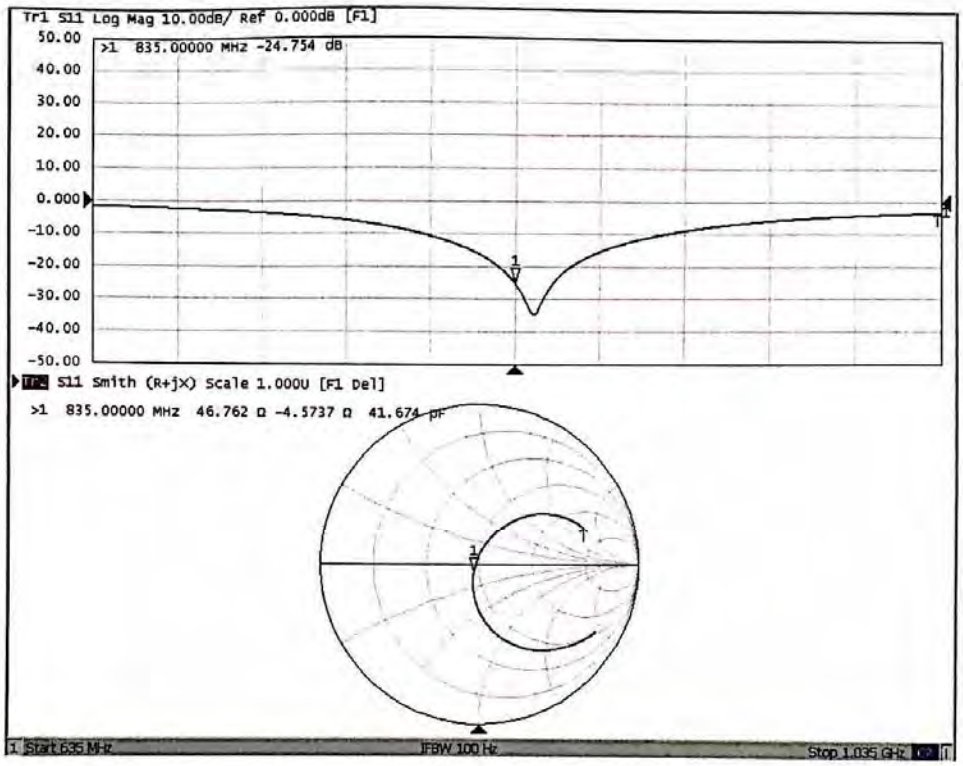


Certificate No: Z17-97114 Page 8 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX F: D1900V2 Dipole Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY

中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client TA(Shanghai) Certificate No: Z17-97115

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | D1900V2 - SN: 5d060 |
| Calibration Procedure(s) | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |
| Calibration date: | August 26, 2017 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power Meter NRVD | 102083 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Power sensor NRV-Z5 | 100595 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Reference Probe EX3DV4 | SN 3617 | 23-Jan-17(SPEAG,No.EX3-3617_Jan17) | Jan-18 |
| DAE4 | SN 1331 | 19-Jan-17(CTTL-SPEAG,No.Z17-97015) | Jan-18 |
| **Secondary Standards** | **ID #** | **Cal Date(Calibrated by, Certificate No.)** | **Scheduled Calibration** |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286) | Jan-18 |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285) | Jan-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: August 30, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97115 Page 1 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORMx,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016

c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010

d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY52 | 52.10.0.1446 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Triple Flat Phantom 5.1C | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 1900 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 40.0 | 1.40 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 39.9 ± 6 % | 1.41 mho/m ± 6 % |
| **Head TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Head TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 10.1 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **40.1 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Head TSL** | Condition | |
| SAR measured | 250 mW input power | 5.19 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **20.7 mW /g ± 18.7 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 53.3 | 1.52 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 53.6 ± 6 % | 1.53 mho/m ± 6 % |
| **Body TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Body TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 9.90 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **39.5 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Body TSL** | Condition | |
| SAR measured | 250 mW input power | 5.21 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **20.8 mW /g ± 18.7 % (k=2)** |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 52.0Ω+ 6.59jΩ |
| Return Loss | - 23.4dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 52.7Ω+ 8.35jΩ |
| Return Loss | - 21.4dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.302 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL** Date: 08.26.2017
Test Laboratory: CTTL, Beijing, China
**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060**
Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; σ = 1.413 S/m; εr = 39.85; ρ = 1000 kg/m3
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(8.26, 8.26, 8.26); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.94 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 19.5 W/kg
**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.19 W/kg**
Maximum value of SAR (measured) = 15.9 W/kg

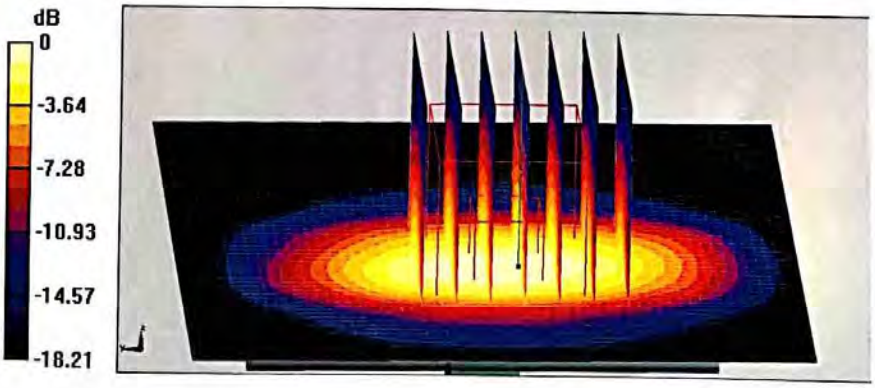


**0 dB = 15.9 W/kg = 12.01 dBW/kg**

Certificate No: Z17-97115 Page 5 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
CTTL Speag CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

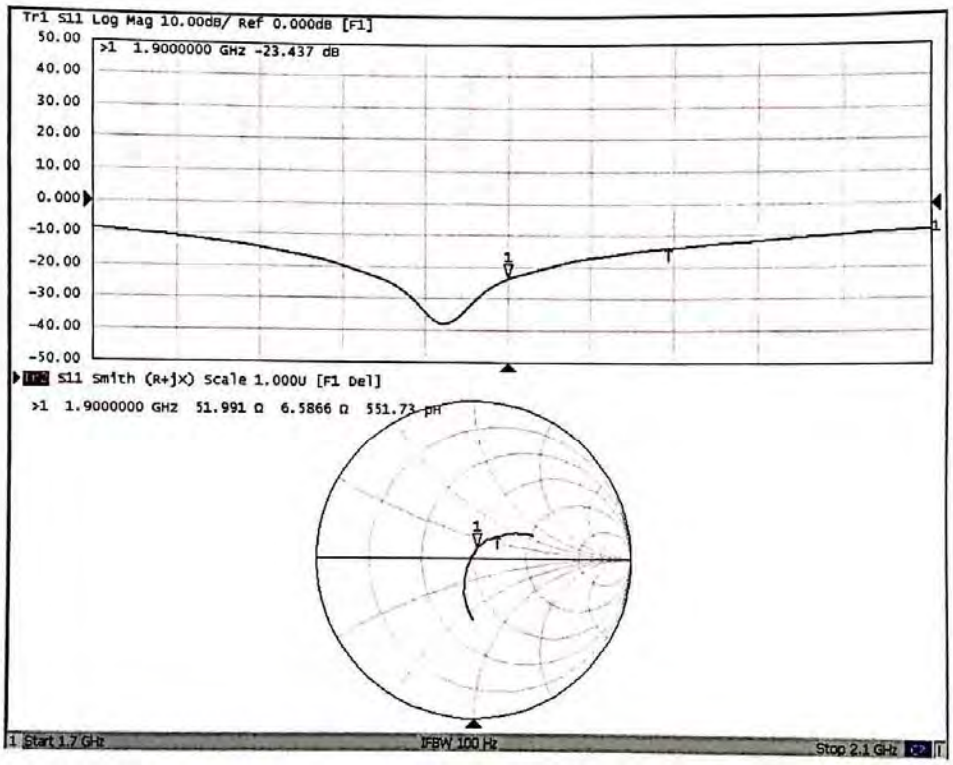


Certificate No: Z17-97115 Page 6 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL** Date: 08.26.2017
Test Laboratory: CTTL, Beijing, China
**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060**
Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.528 S/m; $\varepsilon_r$ = 53.55; $\rho$ = 1000 kg/m$^3$
Phantom section: Center Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.95, 7.95, 7.95); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 91.19 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 18.1 W/kg
**SAR(1 g) = 9.9 W/kg; SAR(10 g) = 5.21 W/kg**
Maximum value of SAR (measured) = 15.3 W/kg

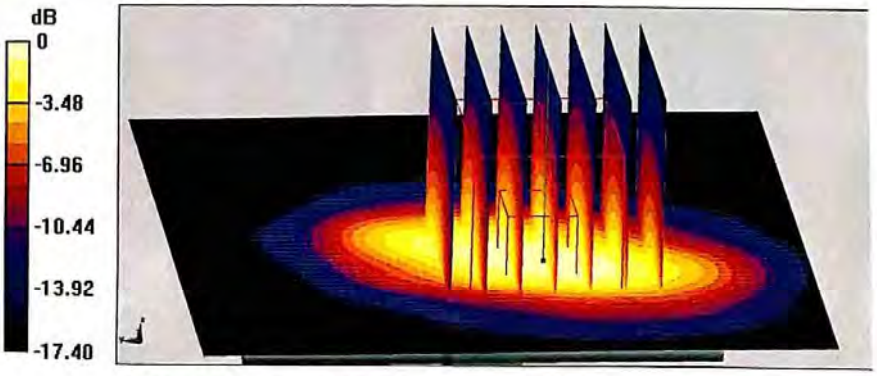


**0 dB = 15.3 W/kg = 11.85 dBW/kg**

Certificate No: Z17-97115 Page 7 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

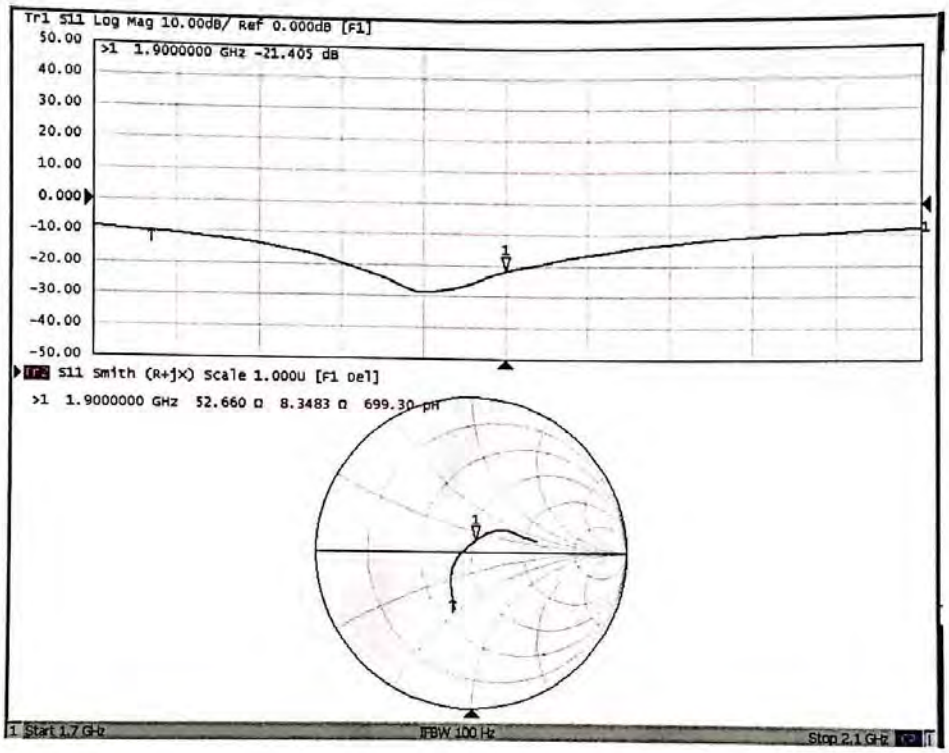


Certificate No: Z17-97115 Page 8 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX H: D2450V2 Dipole Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client TA(Shanghai) Certificate No: Z17-97116

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | D2450V2 - SN: 786 |
| Calibration Procedure(s) | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |
| Calibration date: | August 29, 2017 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power Meter NRVD | 102083 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Power sensor NRV-Z5 | 100595 | 22-Sep-16 (CTTL, No.J16X06809) | Sep-17 |
| Reference Probe EX3DV4 | SN 3617 | 23-Jan-17(SPEAG,No.EX3-3617_Jan17) | Jan-18 |
| DAE4 | SN 1331 | 19-Jan-17(CTTL-SPEAG,No.Z17-97015) | Jan-18 |
| **Secondary Standards** | **ID #** | **Cal Date(Calibrated by, Certificate No.)** | **Scheduled Calibration** |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286) | Jan-18 |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285) | Jan-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: September 1, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97116 Page 1 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORMx,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY52 | 52.10.0.1446 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Triple Flat Phantom 5.1C | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 2450 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 39.2 | 1.80 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 39.7 ± 6 % | 1.82 mho/m ± 6 % |
| **Head TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Head TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.2 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **52.6 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Head TSL** | Condition | |
| SAR measured | 250 mW input power | 6.16 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **24.6 mW /g ± 18.7 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 52.7 | 1.95 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 52.5 ± 6 % | 1.94 mho/m ± 6 % |
| **Body TSL temperature change during test** | <1.0 °C | ---- | ---- |

## SAR result with Body TSL

| **SAR averaged over 1 $cm^3$ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 12.7 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **50.8 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Body TSL** | Condition | |
| SAR measured | 250 mW input power | 5.87 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **23.5 mW /g ± 18.7 % (k=2)** |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 53.4Ω+ 4.29jΩ |
| Return Loss | - 25.5dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 51.0Ω+ 6.61jΩ |
| Return Loss | - 23.6dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.265 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL** Date: 08.29.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; σ = 1.822 S/m; εr = 39.65; ρ = 1000 kg/m3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.74, 7.74, 7.74); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration**/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.1 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.16 W/kg**

Maximum value of SAR (measured) = 22.2 W/kg

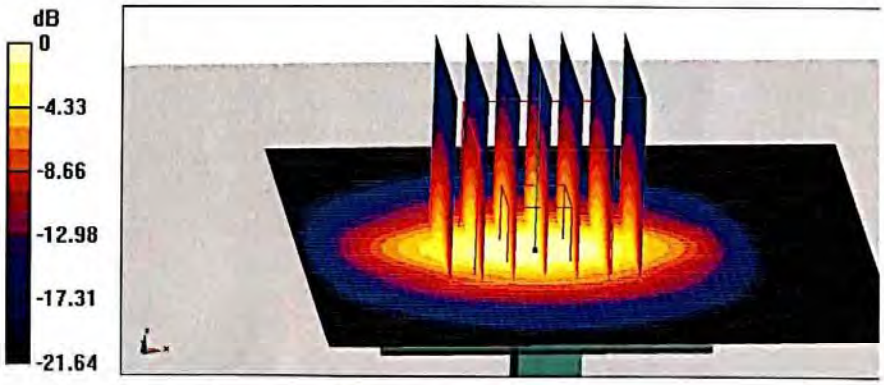


**0 dB = 22.2 W/kg = 13.46 dBW/kg**

Certificate No: Z17-97116 Page 5 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

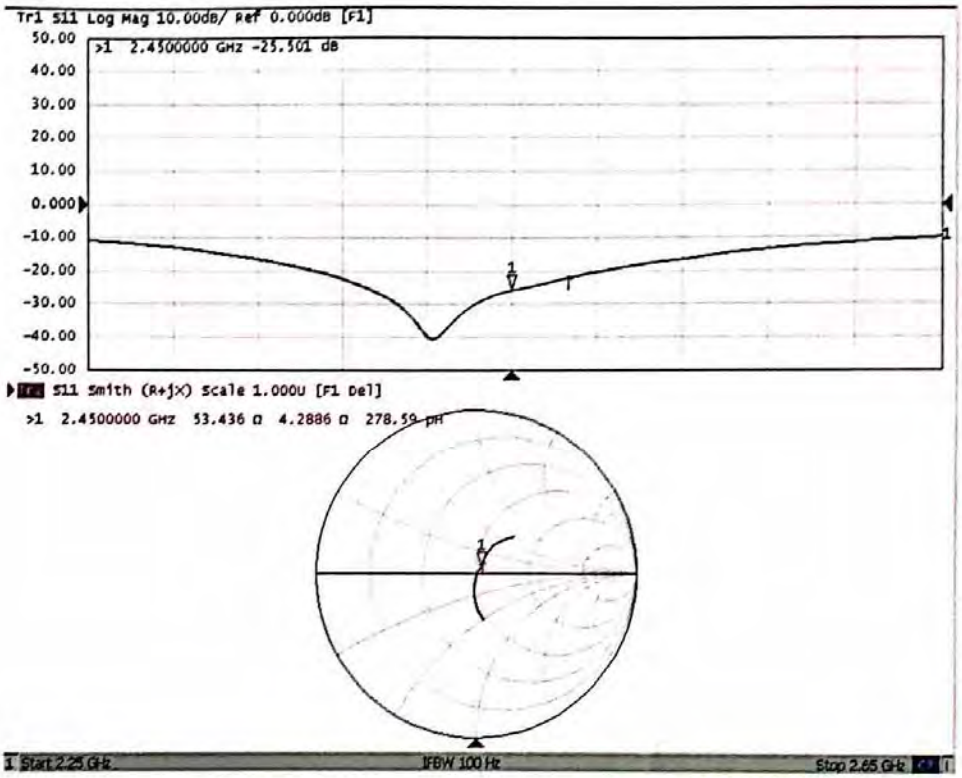


Certificate No: Z17-97116 Page 6 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL** Date: 08.29.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma$ = 1.943 S/m; $\varepsilon_r$ = 52.45; $\rho$ = 1000 kg/m$^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.8, 7.8, 7.8); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration**/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.0 W/kg

**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.87 W/kg**

Maximum value of SAR (measured) = 21.5 W/kg

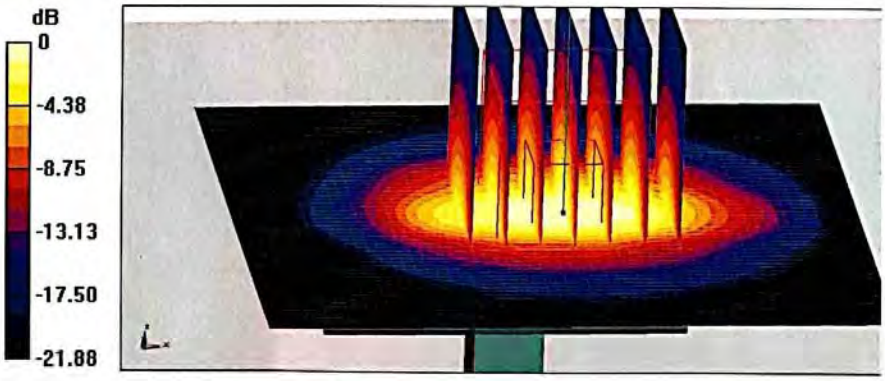


**0 dB = 21.5 W/kg = 13.32 dBW/kg**

Certificate No: Z17-97116 Page 7 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

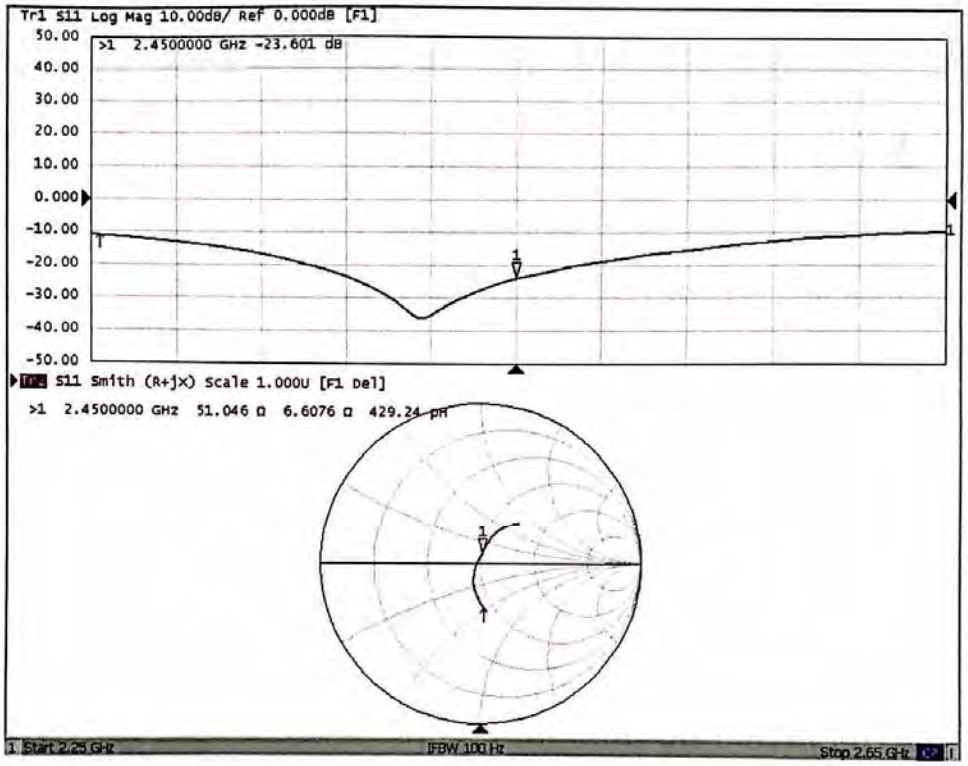


Certificate No: Z17-97116 Page 8 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX I: D2600V2 Dipole Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctt1@chinattl.com http://www.chinattl.cn

中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client TA(Shanghai) Certificate No: Z18-60094

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | D2600V2 - SN: 1025 |
| Calibration Procedure(s) | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |
| Calibration date: | May 2, 2018 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power Meter NRVD | 102083 | 01-Nov-17 (CTTL, No.J17X08756) | Oct-18 |
| Power sensor NRV-Z5 | 100542 | 01-Nov-17 (CTTL, No.J17X08756) | Oct-18 |
| Reference Probe EX3DV4 | SN 7464 | 12-Sep-17(SPEAG,No.EX3-7464_Sep17) | Sep-18 |
| DAE4 | SN 1525 | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17) | Oct-18 |
| **Secondary Standards** | **ID #** | **Cal Date(Calibrated by, Certificate No.)** | **Scheduled Calibration** |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560) | Jan-19 |
| Network Analyzer E5071C | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561) | Jan-19 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: May 5, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z18-60094 Page 1 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctt1@chinattl.com http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORMx,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016

c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010

d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctt@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| DASY Version | DASY52 | 52.10.0.1446 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Triple Flat Phantom 5.1C | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2600 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 39.0 | 1.96 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.1 ± 6 % | 2.01 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C | — | — |

## SAR result with Head TSL

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.6 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **54.1 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Head TSL** | Condition | |
| SAR measured | 250 mW input power | 6.03 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | **24.1 mW /g ± 18.7 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 52.5 | 2.16 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 52.1 ± 6 % | 2.15 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C | — | — |

## SAR result with Body TSL

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.6 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **54.5 mW /g ± 18.8 % (k=2)** |
| **SAR averaged over 10 $cm^3$ (10 g) of Body TSL** | Condition | |
| SAR measured | 250 mW input power | 6.06 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | **24.3 mW /g ± 18.7 % (k=2)** |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix(Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 48.1Ω- 7.55jΩ |
| Return Loss | - 22.0dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 46.6Ω- 7.06jΩ |
| Return Loss | - 21.9dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.014 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL** Date: 05.02.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1025**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; σ = 2.014 S/m; εr = 40.09; ρ = 1000 kg/m3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.76, 7.76, 7.76); Calibrated: 9/12/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration**/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.50 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.6 W/kg

**SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.03 W/kg**

Maximum value of SAR (measured) = 23.5 W/kg

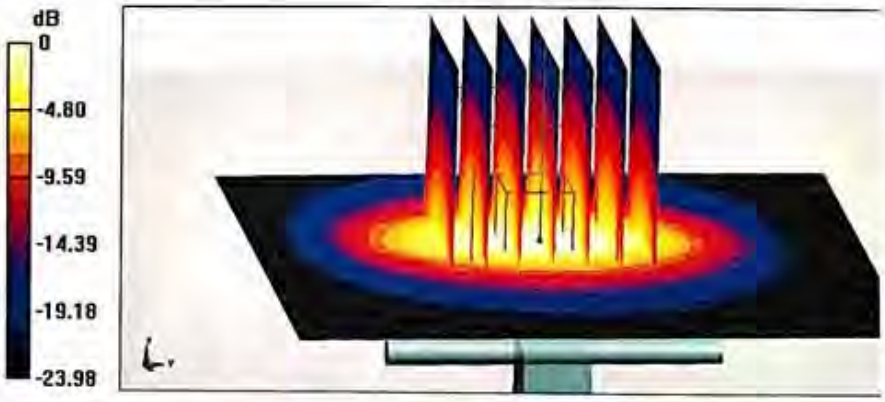


**0 dB = 23.5 W/kg = 13.71 dBW/kg**

Certificate No: Z18-60094 Page 5 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

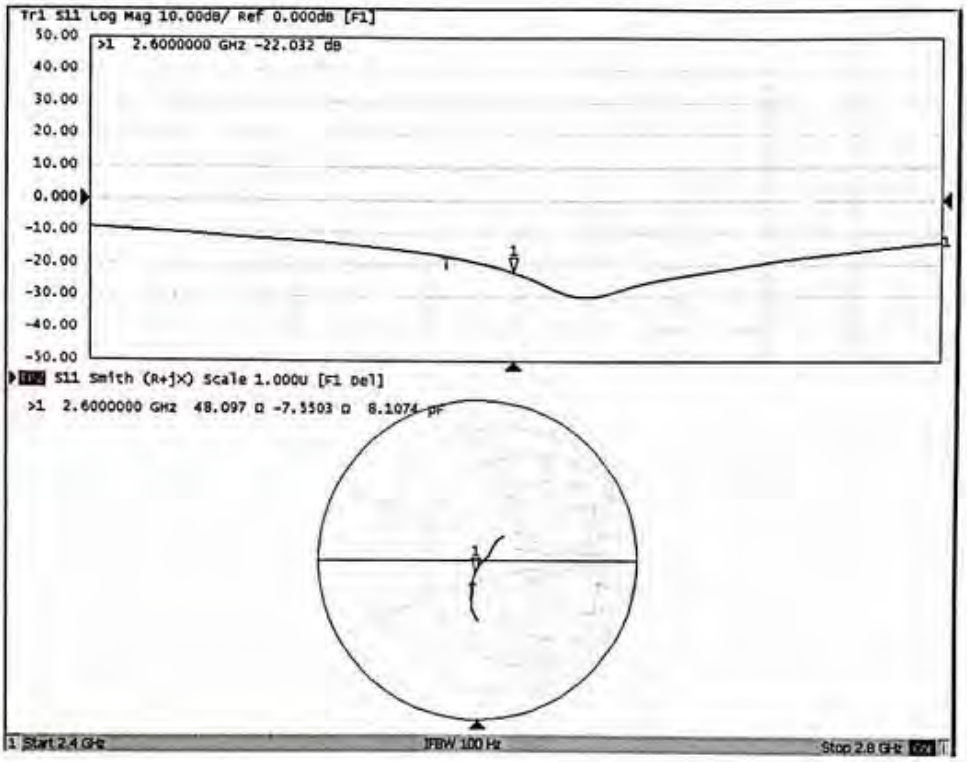


Certificate No: Z18-60094 Page 6 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL** Date: 05.02.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1025**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma$ = 2.146 S/m; $\varepsilon_r$ = 52.09; $\rho$ = 1000 kg/m$^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.84, 7.84, 7.84); Calibrated: 9/12/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration**/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.7 W/kg

**SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.06 W/kg**

Maximum value of SAR (measured) = 23.6 W/kg

**0 dB = 23.6 W/kg = 13.73 dBW/kg**

Certificate No: Z18-60094 Page 7 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

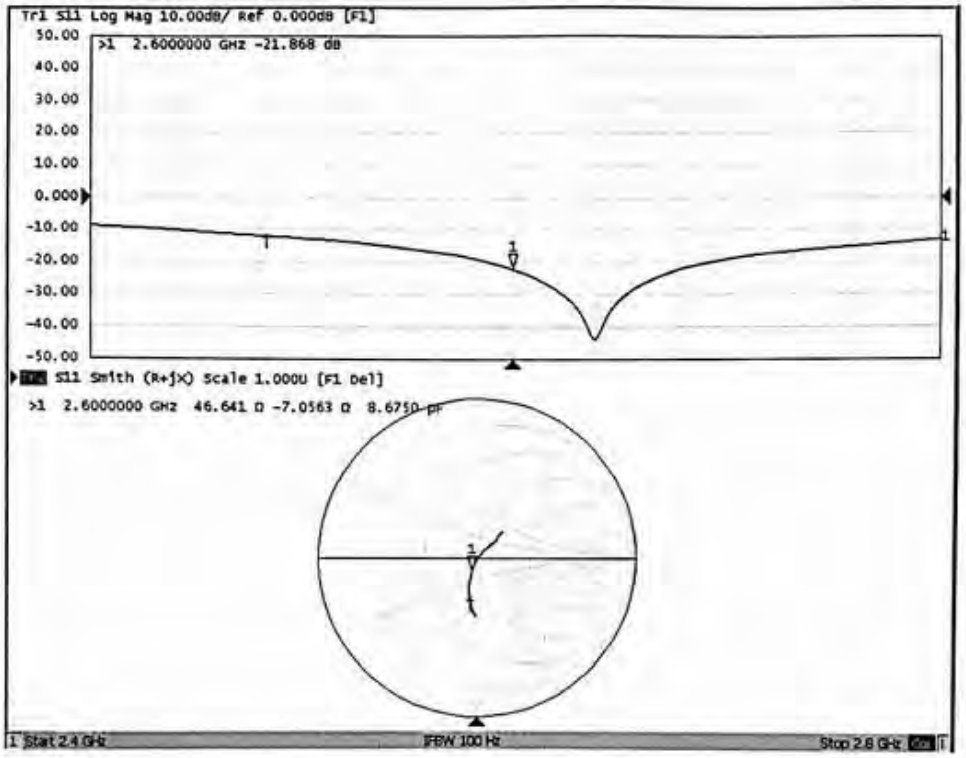


Certificate No: Z18-60094 Page 8 of 8


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX J:DAE4 Calibration Certificate

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client **TA-SH (Auden)**

Certificate No: **DAE4-1291_Dec18**

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | DAE4 - SD 000 D04 BM - SN: 1291 |
| Calibration procedure(s) | QA CAL-06.v29<br>Calibration procedure for the data acquisition electronics (DAE) |
| Calibration date: | December 04, 2018 |

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Keithley Multimeter Type 2001 | SN: 0810278 | 03-Sep-18 (No:23488) | Sep-19 |
| **Secondary Standards** | **ID #** | **Check Date (in house)** | **Scheduled Check** |
| Auto DAE Calibration Unit | SE UWS 053 AA 1001 | 04-Jan-18 (in house check) | In house check: Jan-19 |
| Calibrator Box V2.1 | SE UMS 006 AA 1002 | 04-Jan-18 (in house check) | In house check: Jan-19 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Dominique Steffen | Laboratory Technician | |
| Approved by: | Sven Kühn | Deputy Manager | i.v. |

Issued: December 4, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1291_Dec18 Page 1 of 5


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

## Glossary

| | |
|---|---|
| DAE | data acquisition electronics |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---|---|---|---|
| High Range | 402.580 ± 0.02% (k=2) | 403.249 ± 0.02% (k=2) | 403.163 ± 0.02% (k=2) |
| Low Range | 3.97560 ± 1.50% (k=2) | 3.97886 ± 1.50% (k=2) | 3.97558 ± 1.50% (k=2) |

## Connector Angle

| | |
|---|---|
| Connector Angle to be used in DASY system | 164.5 ° ± 1 ° |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

| High Range | | Reading (µV) | Difference (µV) | Error (%) |
|---|---|---|---|---|
| Channel X | + Input | 200038.51 | 1.95 | 0.00 |
| Channel X | + Input | 20006.61 | 1.29 | 0.01 |
| Channel X | - Input | -20003.34 | 2.94 | -0.01 |
| Channel Y | + Input | 200036.77 | 0.05 | 0.00 |
| Channel Y | + Input | 20003.65 | -1.54 | -0.01 |
| Channel Y | - Input | -20006.11 | 0.22 | -0.00 |
| Channel Z | + Input | 200035.08 | -1.41 | -0.00 |
| Channel Z | + Input | 20002.62 | -2.58 | -0.01 |
| Channel Z | - Input | -20006.40 | -0.06 | 0.00 |

| Low Range | | Reading (µV) | Difference (µV) | Error (%) |
|---|---|---|---|---|
| Channel X | + Input | 2001.29 | 0.31 | 0.02 |
| Channel X | + Input | 201.13 | 0.32 | 0.16 |
| Channel X | - Input | -198.59 | 0.30 | -0.15 |
| Channel Y | + Input | 2000.40 | -0.49 | -0.02 |
| Channel Y | + Input | 200.21 | -0.66 | -0.33 |
| Channel Y | - Input | -199.89 | -0.99 | 0.50 |
| Channel Z | + Input | 2000.44 | -0.41 | -0.02 |
| Channel Z | + Input | 199.70 | -1.05 | -0.52 |
| Channel Z | - Input | -200.88 | -1.78 | 0.89 |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (µV) | Low Range Average Reading (µV) |
|---|---|---|---|
| Channel X | 200 | 10.02 | 7.91 |
| | - 200 | -6.52 | -8.20 |
| Channel Y | 200 | 14.18 | 13.58 |
| | - 200 | -15.10 | -15.62 |
| Channel Z | 200 | -17.07 | -17.23 |
| | - 200 | 14.74 | 14.83 |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (µV) | Channel Y (µV) | Channel Z (µV) |
|---|---|---|---|---|
| Channel X | 200 | - | -0.01 | -4.47 |
| Channel Y | 200 | 7.58 | - | 0.48 |
| Channel Z | 200 | 11.17 | 4.87 | - |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

## 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|---|---|---|
| Channel X | 16117 | 16241 |
| Channel Y | 15930 | 16718 |
| Channel Z | 16177 | 17128 |

## 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10MΩ

| | Average (µV) | min. Offset (µV) | max. Offset (µV) | Std. Deviation (µV) |
|---|---|---|---|---|
| Channel X | -0.59 | -1.81 | 0.89 | 0.47 |
| Channel Y | 1.17 | -0.04 | 2.05 | 0.45 |
| Channel Z | -1.12 | -2.70 | 0.51 | 0.57 |

## 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

## 7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|---|---|---|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

## 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|---|---|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

## 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|---|---|---|---|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | –0.01 | -8 | -9 |




*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

# ANNEX K:The EUT Appearances and Test Configuration

Front Side

Back Side

a: EUT


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Adapter 1

Adapter 2


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Adapter 3

b: Adapter

c: Earphone

Picture 5: Constituents of EUT


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Picture 6:Left Hand Touch Cheek Position

Picture 7: Left Hand Tilt 15 Degree Position


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Picture 8: Right Hand Touch Cheek Position

Picture 9: Right Hand Tilt 15 Degree Position


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

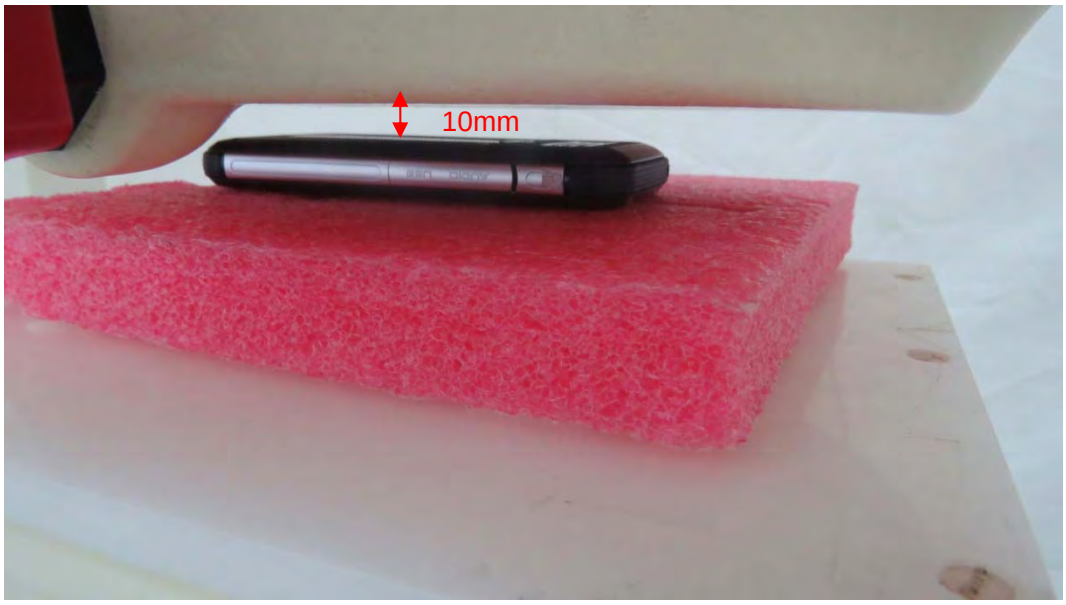


Picture 10: Back Side, the distance from handset to the bottom of the Phantom is 10mm

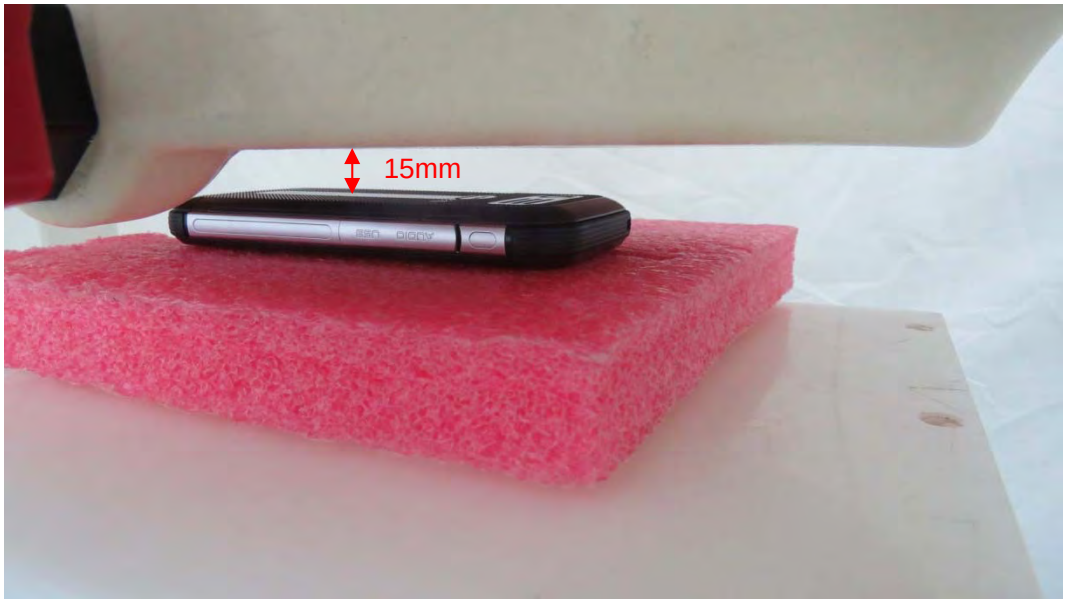


Picture 11: Back Side, the distance from handset to the bottom of the Phantom is 15mm


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

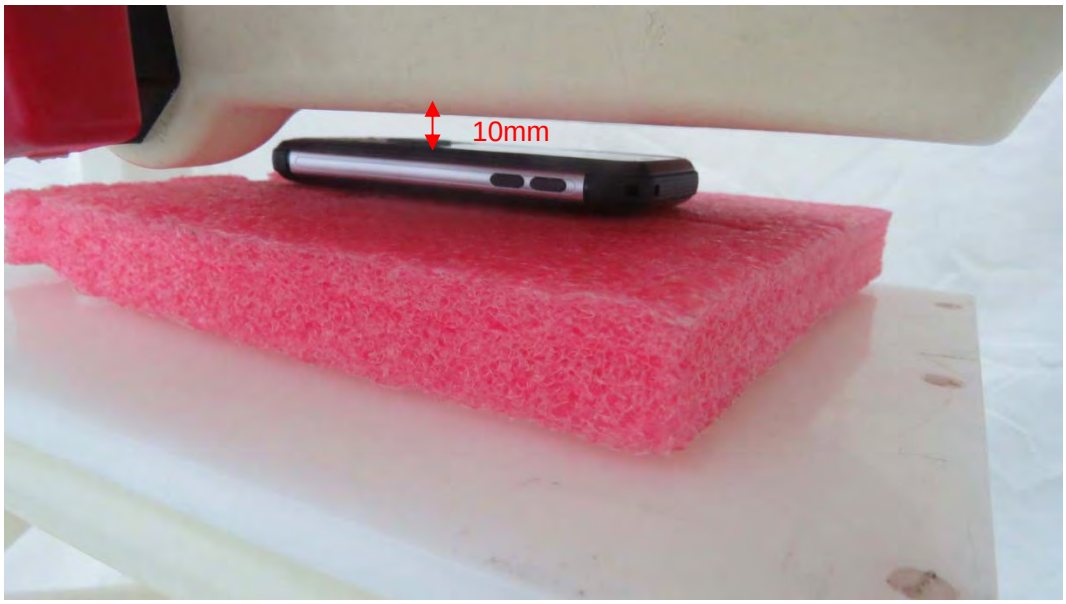


Picture 12: Front Side, the distance from handset to the bottom of the Phantom is 10mm

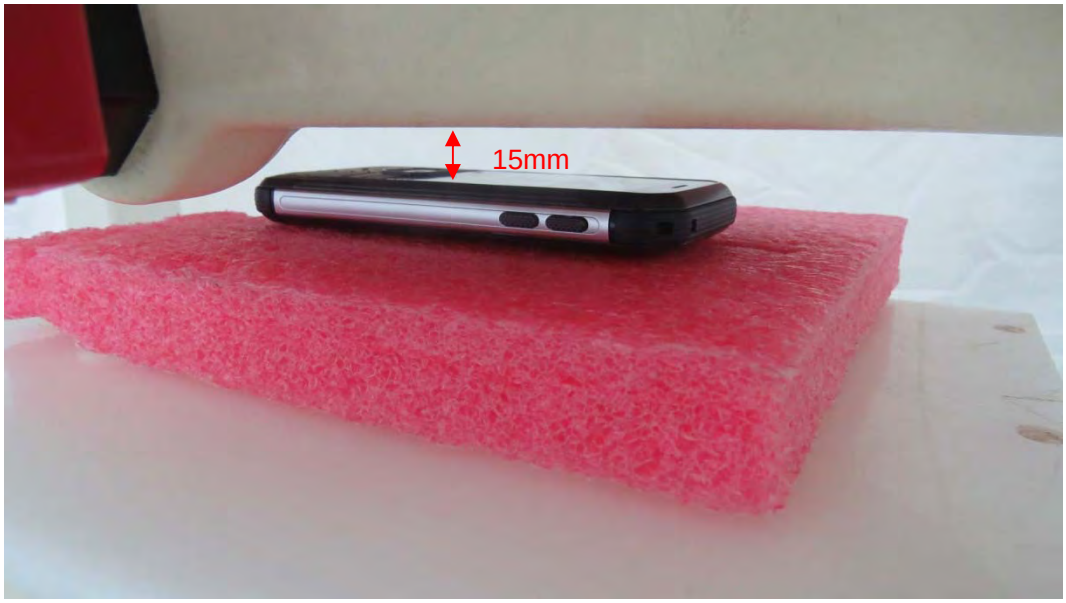


Picture 13: Front Side, the distance from handset to the bottom of the Phantom is 15mm


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

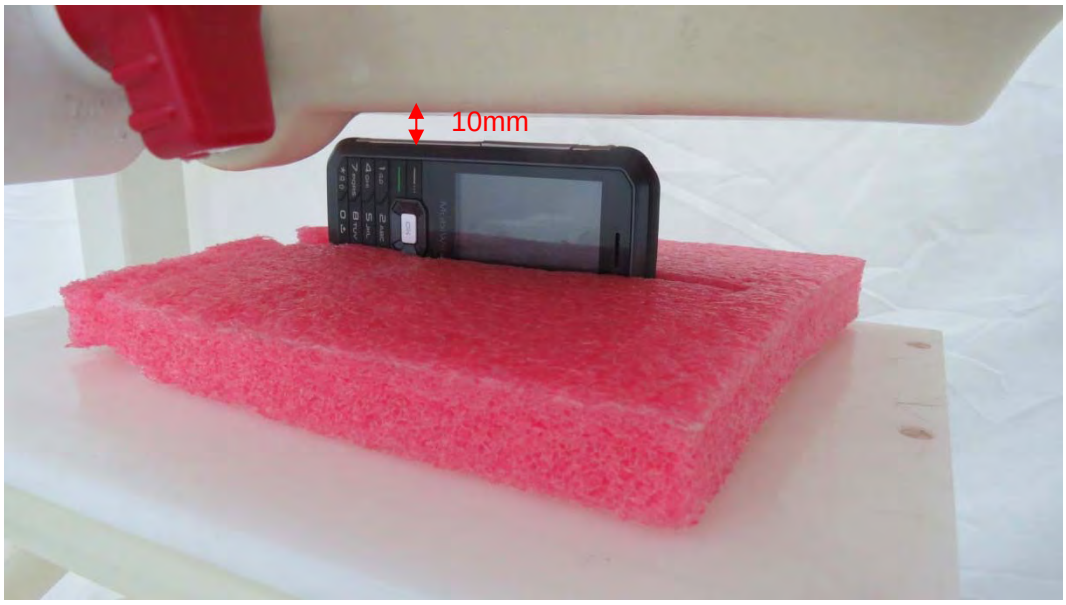


Picture 14: Left Side, the distance from handset to the bottom of the Phantom is 10mm

Picture 15: Right Side, the distance from handset to the bottom of the Phantom is 10mm


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

Picture 16: Top Side, the distance from handset to the bottom of the Phantom is 10mm

Picture 17: Bottom Side, the distance from handset to the bottom of the Phantom is 10mm


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*

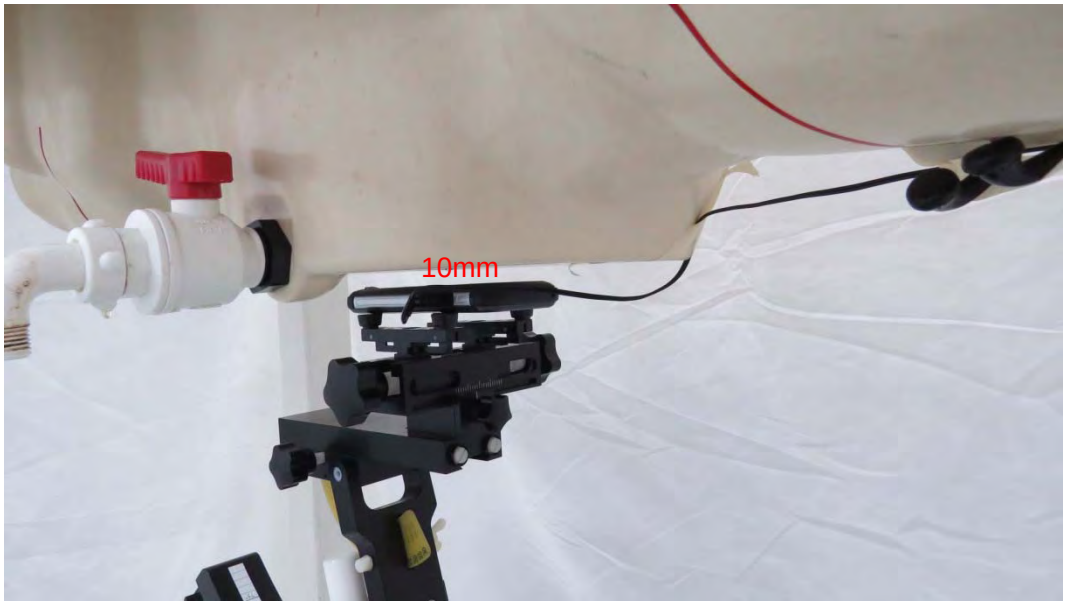


Picture 18: Back Side, the distance from handset to the bottom of the Phantom is 10mm

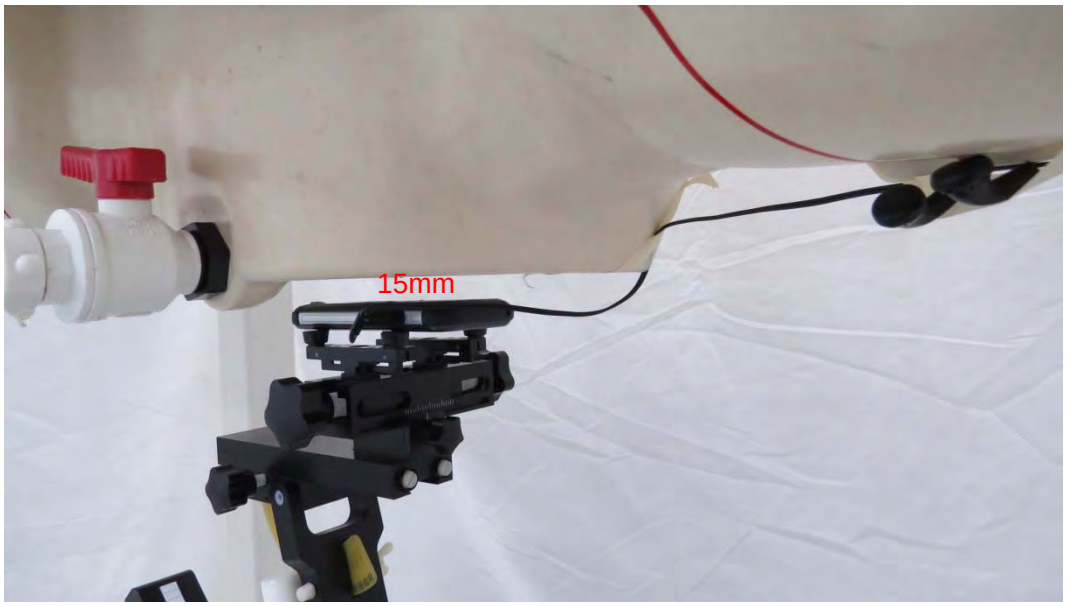


Picture 19: Back Side, the distance from handset to the bottom of the Phantom is 15mm


*This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.*