

Nemko-CCL, Inc.
1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report

Certification

Test Of: BTHDG-M3-R0-CX

FCC ID: QQ6-XML02

Test Specifications:

FCC PART 15, Subpart C

Test Report Serial No: 256267-4.1

Applicant:
Code Corporation
12393 South Gateway Park Place, Suite 600
Draper, UT 84020
U.S.A

Dates of Test: March 17 and 25, 2014

Report Issue Date: April 10, 2014

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Nemko-CCL, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Code Corporation
- Manufacturer: Code Corporation
- Brand Name: Code
- Model Number: BTHDG-M3-R0-CX
- FCC ID: QQ6-XML02


On this 10th day of April 2014, I, individually and for Nemko-CCL, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Nemko-CCL, Inc. EMC testing facilities are in good standing, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Nemko-CCL, Inc.



Tested by: Norman P. Hansen
Test Technician



Reviewed by: Thomas C. Jackson
General Manager

TABLE OF CONTENTS

	PAGE
<u>SECTION 1.0 CLIENT INFORMATION</u>	4
<u>SECTION 2.0 EQUIPMENT UNDER TEST (EUT)</u>	5
<u>SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES</u>	9
<u>SECTION 4.0 OPERATION OF EUT DURING TESTING</u>	15
<u>SECTION 5.0 SUMMARY OF TEST RESULTS</u>	16
<u>SECTION 6.0 MEASUREMENTS AND RESULTS</u>	17
<u>APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT</u>	33
<u>APPENDIX 2 PHOTOGRAPHS</u>	38

SECTION 1.0 CLIENT INFORMATION

1.1 Applicant:

Company Name: Code Corporation
12393 South Gateway Park Place, Suite 600
Draper, UT 84020
U.S.A

Contact Name: Ryan Hoobler
Title: Director of Engineering

1.2 Manufacturer:

Company Name: Code Corporation
12393 South Gateway Park Place, Suite 600
Draper, UT 84020
U.S.A

Contact Name: Ryan Hoobler
Title: Director of Engineering


SECTION 2.0 EQUIPMENT UNDER TEST (EUT)

2.1 Identification of EUT:


Brand Name:	Code
Model Number:	BTHDG-M3-R0-CX
Serial Number:	None
Dimensions:	8.13 cm x 7.0 cm x 2.5cm

2.2 Description of EUT:


The BTHDG-M3-R0-CX is a device to transfer data between a barcode scanner with Bluetooth transceiver and a host system USB port. The BTHDG-M3-R0-CX receives power over the USB port. The antenna is a Tyco 100902-101 (1513153-1), 0 dBi antenna soldered to the PCB. The Bluetooth transceiver uses 79 channels, spaced 1 MHz apart in the frequency range of 2400 MHz to 2483.5 MHz.

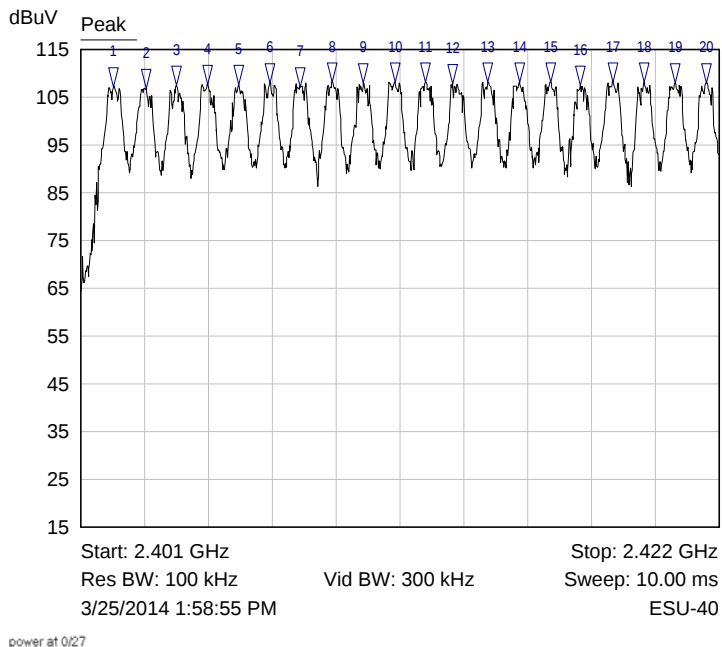


Mkr	Trace	X-Axis	Value
1	Peak	2.402 GHz	107.18 dBuV
2	Peak	2.403 GHz	106.91 dBuV
3	Peak	2.404 GHz	107.50 dBuV
4	Peak	2.405 GHz	107.62 dBuV
5	Peak	2.406 GHz	107.73 dBuV
6	Peak	2.407 GHz	107.96 dBuV
7	Peak	2.408 GHz	107.24 dBuV
8	Peak	2.409 GHz	108.20 dBuV
9	Peak	2.410 GHz	108.06 dBuV
10	Peak	2.411 GHz	108.23 dBuV
11	Peak	2.412 GHz	108.16 dBuV
12	Peak	2.413 GHz	107.75 dBuV
13	Peak	2.414 GHz	108.19 dBuV
14	Peak	2.415 GHz	108.14 dBuV
15	Peak	2.416 GHz	108.16 dBuV
16	Peak	2.417 GHz	107.56 dBuV
17	Peak	2.418 GHz	108.14 dBuV
18	Peak	2.419 GHz	108.08 dBuV
19	Peak	2.420 GHz	107.94 dBuV
20	Peak	2.421 GHz	108.07 dBuV

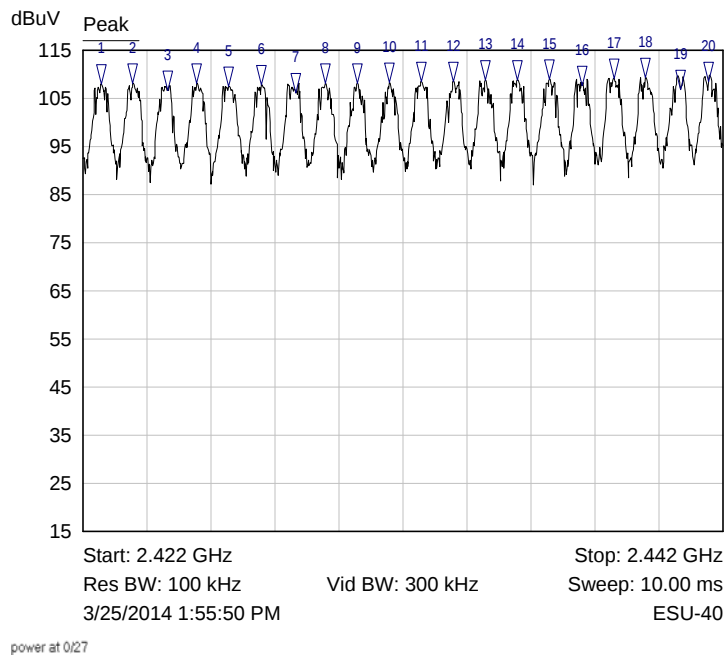

Mkr	Trace	X-Axis	Value
1	Peak	2.422 GHz	108.07 dBuV
2	Peak	2.423 GHz	108.21 dBuV
3	Peak	2.424 GHz	106.62 dBuV
4	Peak	2.425 GHz	108.11 dBuV
5	Peak	2.426 GHz	107.51 dBuV
6	Peak	2.427 GHz	107.88 dBuV
7	Peak	2.428 GHz	106.18 dBuV
8	Peak	2.429 GHz	108.17 dBuV
9	Peak	2.430 GHz	108.15 dBuV
10	Peak	2.431 GHz	108.28 dBuV
11	Peak	2.432 GHz	108.51 dBuV
12	Peak	2.433 GHz	108.58 dBuV
13	Peak	2.434 GHz	108.75 dBuV
14	Peak	2.435 GHz	108.90 dBuV
15	Peak	2.436 GHz	109.05 dBuV
16	Peak	2.437 GHz	107.66 dBuV
17	Peak	2.438 GHz	109.14 dBuV
18	Peak	2.439 GHz	109.25 dBuV
19	Peak	2.440 GHz	106.87 dBuV
20	Peak	2.441 GHz	108.46 dBuV

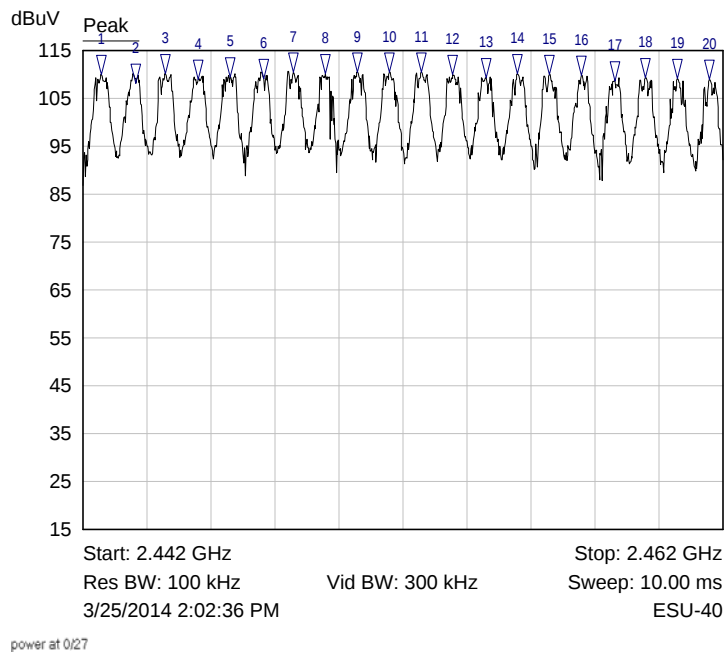

Mkr	Trace	X-Axis	Value
1	Peak	2.442 GHz	110.01 dBuV
2	Peak	2.443 GHz	108.15 dBuV
3	Peak	2.444 GHz	110.20 dBuV
4	Peak	2.445 GHz	108.98 dBuV
5	Peak	2.446 GHz	109.46 dBuV
6	Peak	2.447 GHz	109.11 dBuV
7	Peak	2.448 GHz	110.56 dBuV
8	Peak	2.449 GHz	110.15 dBuV
9	Peak	2.450 GHz	110.57 dBuV
10	Peak	2.451 GHz	110.56 dBuV
11	Peak	2.452 GHz	110.43 dBuV
12	Peak	2.453 GHz	109.94 dBuV
13	Peak	2.454 GHz	109.27 dBuV
14	Peak	2.455 GHz	110.11 dBuV
15	Peak	2.456 GHz	109.94 dBuV
16	Peak	2.457 GHz	109.83 dBuV
17	Peak	2.458 GHz	108.66 dBuV
18	Peak	2.459 GHz	109.40 dBuV
19	Peak	2.460 GHz	109.13 dBuV
20	Peak	2.461 GHz	108.92 dBuV

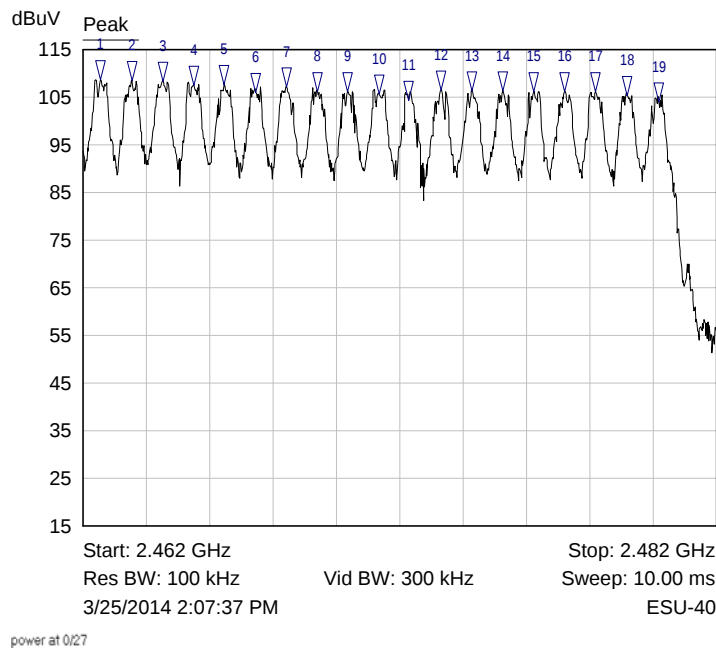

Mkr	Trace	X-Axis	Value
1 ▽	Peak	2.462 GHz	108.70 dBuV
2 ▽	Peak	2.463 GHz	108.50 dBuV
3 ▽	Peak	2.464 GHz	108.35 dBuV
4 ▽	Peak	2.465 GHz	107.53 dBuV
5 ▽	Peak	2.466 GHz	107.71 dBuV
6 ▽	Peak	2.467 GHz	106.03 dBuV
7 ▽	Peak	2.468 GHz	107.19 dBuV
8 ▽	Peak	2.469 GHz	106.25 dBuV
9 ▽	Peak	2.470 GHz	106.16 dBuV
10 ▽	Peak	2.471 GHz	105.64 dBuV
11 ▽	Peak	2.472 GHz	104.42 dBuV
12 ▽	Peak	2.473 GHz	106.58 dBuV
13 ▽	Peak	2.474 GHz	106.39 dBuV
14 ▽	Peak	2.475 GHz	106.28 dBuV
15 ▽	Peak	2.476 GHz	106.21 dBuV
16 ▽	Peak	2.477 GHz	106.17 dBuV
17 ▽	Peak	2.478 GHz	106.10 dBuV
18 ▽	Peak	2.479 GHz	105.33 dBuV
19 ▽	Peak	2.480 GHz	103.94 dBuV

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in Nemko-CCL, Inc. report 256267-3.

2.3 EUT and Support Equipment:

The FCC ID numbers for all the EUT and support equipment used during the test are listed below:

Brand Name Model Number Serial Number	FCC ID Number or Compliance	Description	Name of Interface Ports / Interface Cables
BN: Code MN: BTHDG-M3-R0-CX (Note 1) SN: None	QQ6-XML02	Bluetooth to USB Adapter	See Section 2.4
BN: Dell MN: Latitude SN: None	DoC	Computer	USB/USB to DIN cable (Note 2)

Note: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT:

Name of Ports	No. of Ports Fitted to EUT	Cable Descriptions/Length
Interface	1	Cable with USB and DIN connector/1.5 meters

2.5 Modification Incorporated/Special Accessories on EUT:

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation, that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

- 1) The power settings for the transmitter and amplifier were set to 0/27 in firmware.

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)
15.203, 15.207, and 15.247

Limits and methods of measurement of radio interference
characteristics of radio frequency devices.

Purpose of Test: The tests were performed to demonstrate initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.203 Antenna Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5*	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	60	50

*Decreases with the logarithm of the frequency.

3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many

of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

3.3 Test Procedure

The testing was performed according to the procedures in ANSI C63.4: 2003 and 47 CFR Part 15. Testing was performed at the Nemko-CCL, Inc. Wanship open area test site #2, located at 29145 Old Lincoln Highway, Wanship, UT. This site has been registered with the FCC, and was renewed February 15, 2012 (90504). This registration is valid for three years.

Nemko-CCL, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2014.

SECTION 4.0 OPERATION OF EUT DURING TESTING

4.1 Operating Environment:

Power Supply: 5 VDC from USB port of Host
Host at 120 VAC/60 Hz

4.2 Operating Modes:

The transmitter was tested on 3 orthogonal axes while in a constant transmit mode at the upper, middle, and lower channels or while hopping in a pseudorandom sequence using all channels.

4.3 EUT Exercise Software:

Code Corporation test software was used to exercise the transmitter.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC Part 15, Subpart C**

The EUT transceiver was subjected to each of the tests shown in the summary table below.

5.1.1 Summary of Tests:

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Channel Separation	2400 to 2483.5	Complied
15.247(a)	20 dB Bandwidth	2400 to 2483.5	Complied
15.247(a)	Time of Occupancy	2400 to 2483.5	Complied
15.247(b)	Peak Output Power	2400 to 2483.5	Complied
15.247(d)	Spurious Emissions	0.009 - 25000	Complied
15.247(g)	Channel Usage	2400 to 2483.5	Complied (Note 1)
15.247(h)	Channel Intelligence/Avoidance	2400 to 2483.5	Complied (Note 1)
15.247(i)	RF Exposure	2400 to 2483.5	Complied (Note 1)
Note 1: Compliance with these requirements is shown in documents filed with the FCC at the time of Certification.			

5.2 Result

In the configuration tested, the transceiver complied with the requirements of the specification.

SECTION 6.0 MEASUREMENTS AND RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 §15.203 Antenna Requirements**

The EUT uses a Tyco 1513153-1 (100902-101), 0 dBi antenna that is soldered to the PCB.

RESULT

The EUT complied with the specification.

6.2.2 §15.207 Conducted Disturbance at the AC Mains Ports

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dBμV)	Limit (dBμV)	Margin (dB)
0.16	Hot Lead	Quasi-Peak (Note 2)	53.7	65.7	-12.0
0.16	Hot Lead	Average (Note 2)	34.5	55.7	-21.2
0.19	Hot Lead	Quasi-Peak (Note 1)	49.5	54.1	-4.6
0.21	Hot Lead	Peak (Note 1)	48.2	53.1	-4.9
0.23	Hot Lead	Peak (Note 1)	44.9	52.4	-7.5
0.32	Hot Lead	Peak (Note 1)	39.0	49.8	-10.8
0.51	Hot Lead	Peak (Note 1)	33.6	46.0	-12.4
2.42	Hot Lead	Peak (Note 1)	34.5	46.0	-11.5
0.15	Neutral Lead	Quasi-Peak (Note 2)	57.3	66.0	-8.7
0.15	Neutral Lead	Average (Note 2)	38.8	56.0	-17.2
0.17	Neutral Lead	Quasi-Peak (Note 2)	53.4	64.8	-11.4
0.17	Neutral Lead	Average (Note 2)	37.1	54.8	-17.7
0.20	Neutral Lead	Peak (Note 1)	49.6	53.5	-3.9
0.23	Neutral Lead	Peak (Note 1)	45.3	52.4	-7.1

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dBμV)	Limit (dBμV)	Margin (dB)
0.29	Neutral Lead	Peak (Note 1)	42.1	50.5	-8.4
0.51	Neutral Lead	Peak (Note 1)	33.7	46.0	-12.3
1.80	Neutral Lead	Peak (Note 1)	34.9	46.0	-11.1
2.09	Neutral Lead	Peak (Note 1)	35.1	46.0	-10.9
Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.					
Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.					


RESULT

In the configuration tested, the EUT complied with the specification by 3.9 dB.

6.2.3 §15.247(a) Channel Separation

The EUT must have the hopping channel carrier frequencies separated by 25 kHz or the 20 dB bandwidth, whichever is greater. Alternately, FHSS systems operating in the 2400 – 2483.5 MHz band may have channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. A plot showing a 1.0 MHz channel separation is shown below. The 20 dB bandwidth is 1125 kHz and is shown in section 6.2.4.

Channel Separation Plot

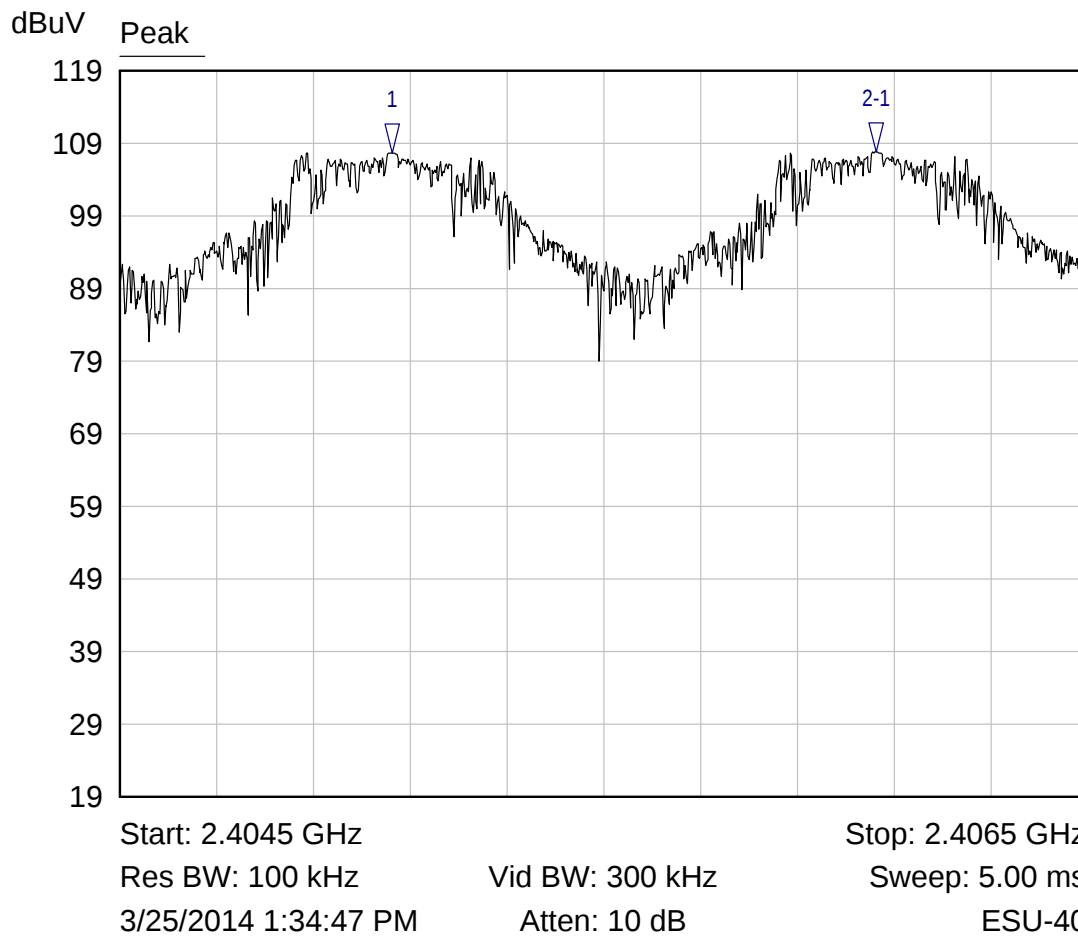

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4051 GHz	107.63 dBuV	
2-1 ▽	Peak	1.0000 MHz	0.16 dB	

power at 0/27

RESULT


The channel carrier frequency separation is 1.0 MHz, which is greater than two-thirds of the 20 dB bandwidth; therefore, the EUT complies with the specification.

6.2.4 §15.247(a) Channel Bandwidth

The 20 dB bandwidth of the hopping channels is shown in the table and plots below.

Frequency (MHz)	Emission 20 dB bandwidth (kHz)
2402	1122.0
2441	1125.0
2480	1125.0


Lowest Channel 20 dB Bandwidth

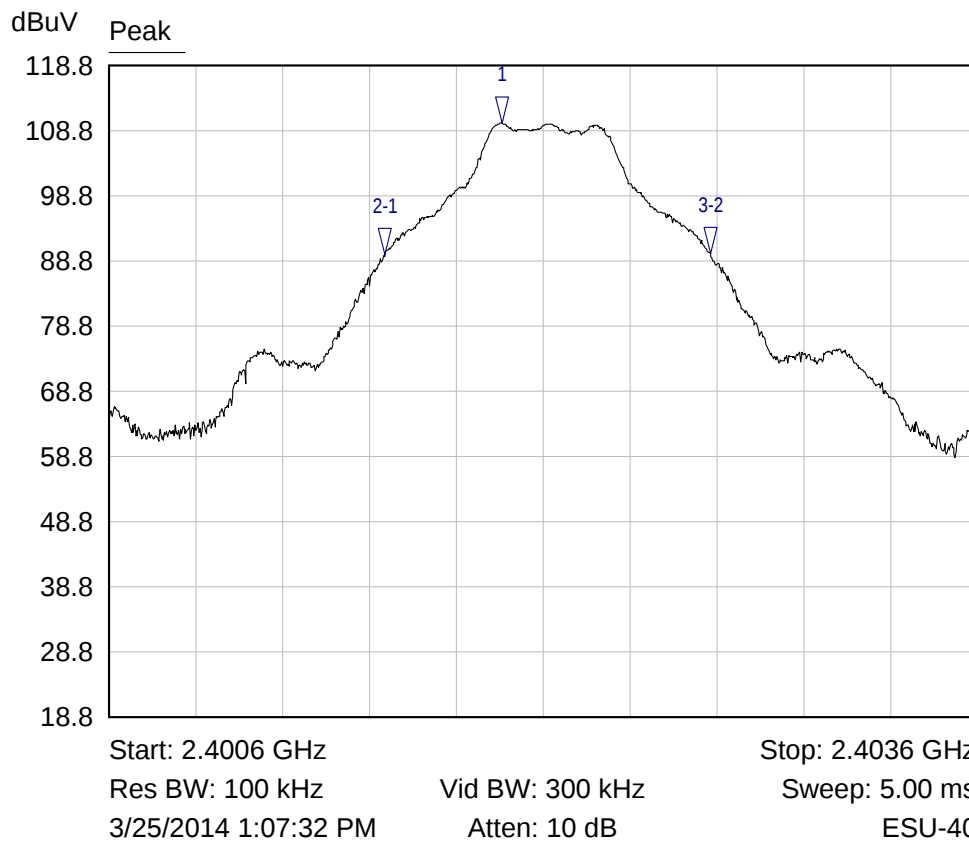

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4019 GHz	109.92 dBuV	
2-1 ▽	Peak	-405.0000 kHz	-20.06 dB	
3-2 ▽	Peak	1.1220 MHz	0.04 dB	

power at 0/27


Middle Channel 20 dB Bandwidth

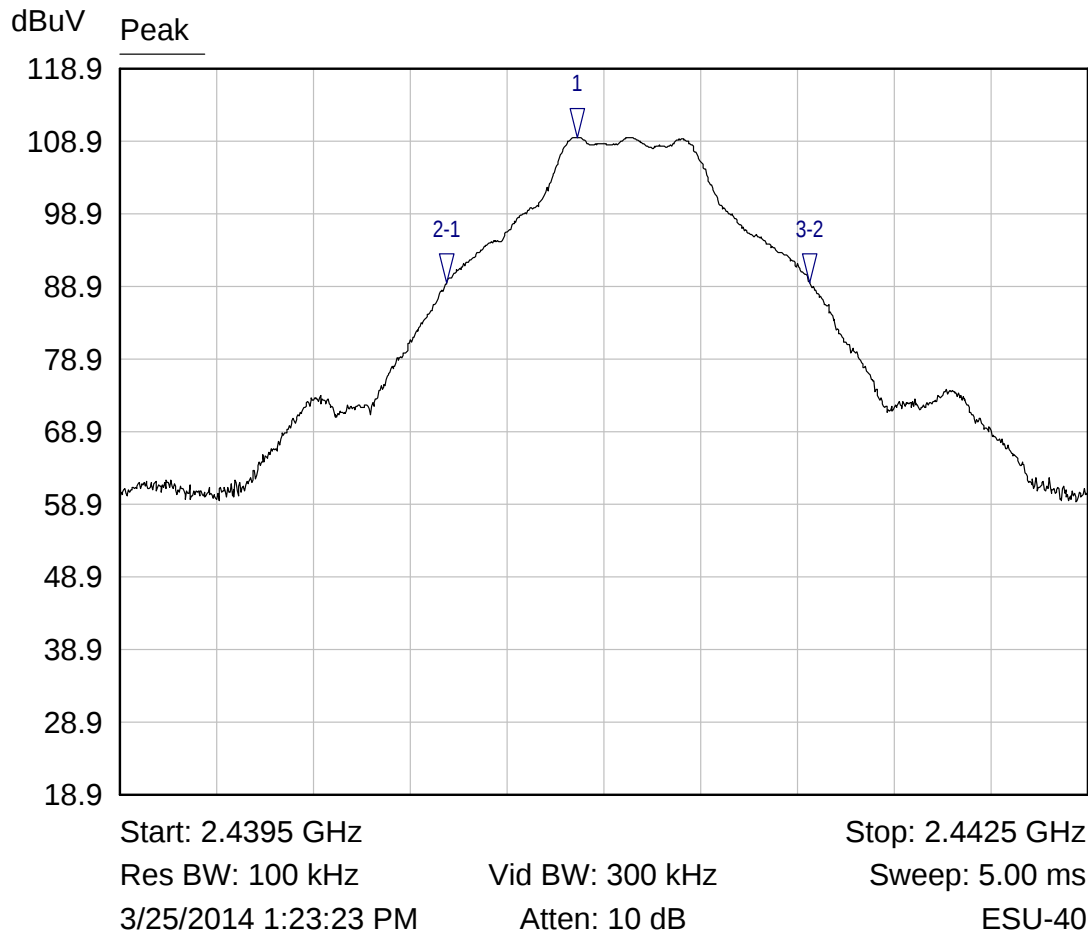

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4409 GHz	109.46 dBuV	
2-1 ▽	Peak	-402.0000 kHz	-20.08 dB	
3-2 ▽	Peak	1.1250 MHz	-0.05 dB	

power at 0/27

Highest Channel 20 dB Bandwidth

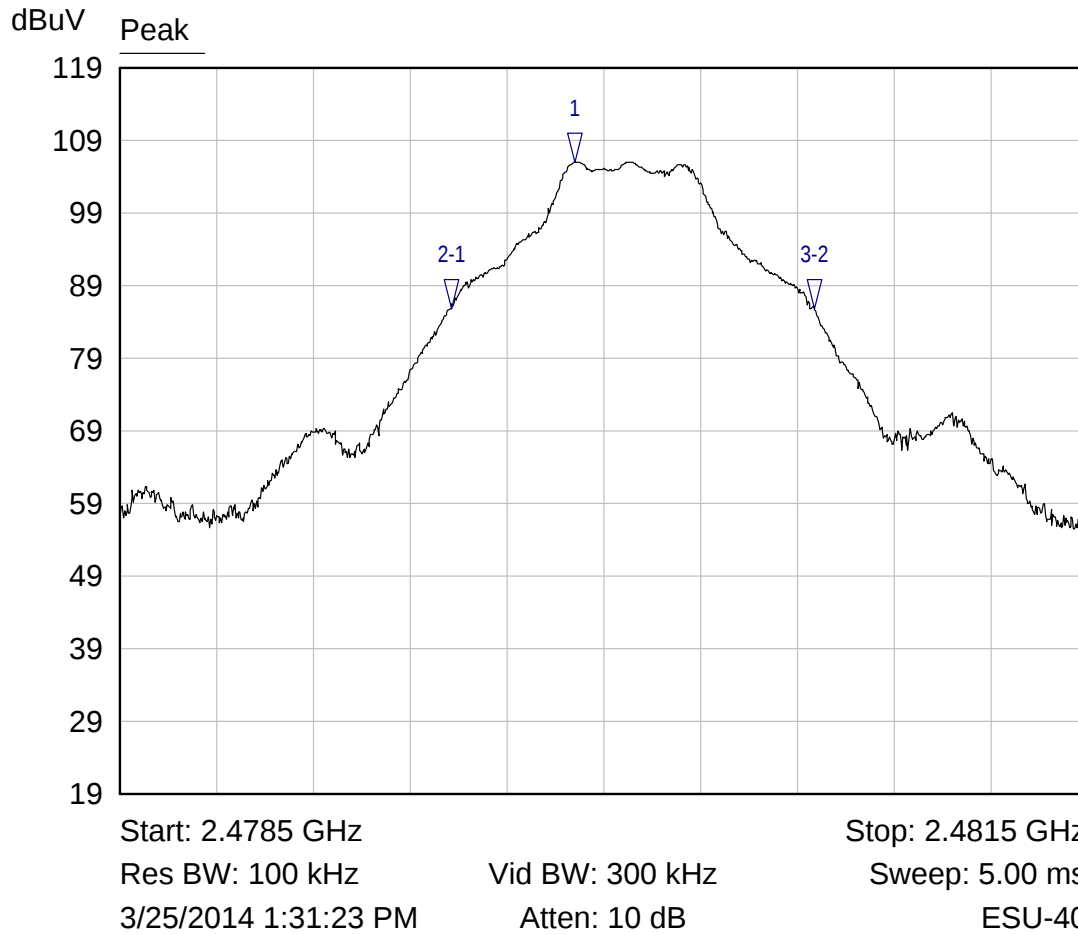

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4799 GHz	106.00 dBuV	
2-1 ▽	Peak	-384.0000 kHz	-20.10 dB	
3-2 ▽	Peak	1.1250 MHz	-0.11 dB	


power at 0/27

RESULT

In the configuration tested, the channel bandwidth allows the channel separation of 1 MHz to be compliant; therefore, the EUT complied with the requirements of the specification.


6.2.5 §15.247(a) Channel Occupancy

The EUT uses 79 channels that have a bandwidth greater than 250 kHz; therefore, the EUT must have an average time of occupancy on any frequency that is no greater than 0.4 seconds in a period of 31.6 seconds (0.4 seconds x 79 channels). See the plots and calculations below.

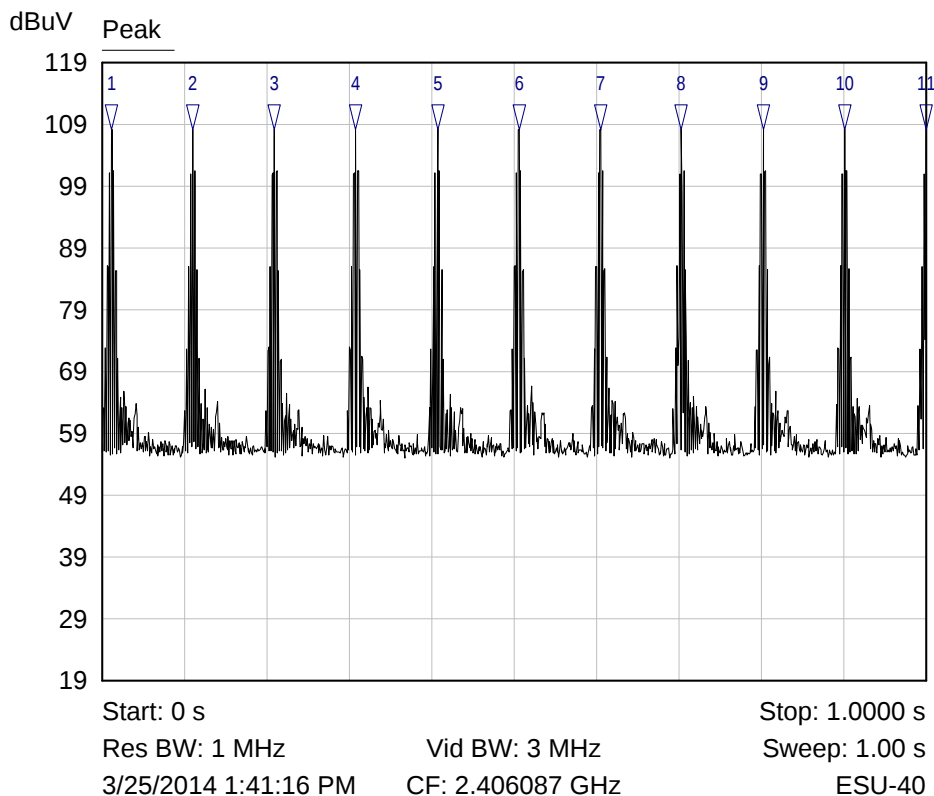

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	11.0000 ms	108.17 dBuV	
2 ▽	Peak	110.0000 ms	108.17 dBuV	
3 ▽	Peak	209.0000 ms	108.18 dBuV	
4 ▽	Peak	308.0000 ms	108.17 dBuV	
5 ▽	Peak	407.0000 ms	108.16 dBuV	
6 ▽	Peak	506.0000 ms	108.16 dBuV	
7 ▽	Peak	605.0000 ms	108.14 dBuV	
8 ▽	Peak	703.0000 ms	108.16 dBuV	
9 ▽	Peak	802.0000 ms	108.18 dBuV	
10 ▽	Peak	901.0000 ms	108.16 dBuV	
11 ▽	Peak	1.0000 s	108.17 dBuV	

power at 0/27

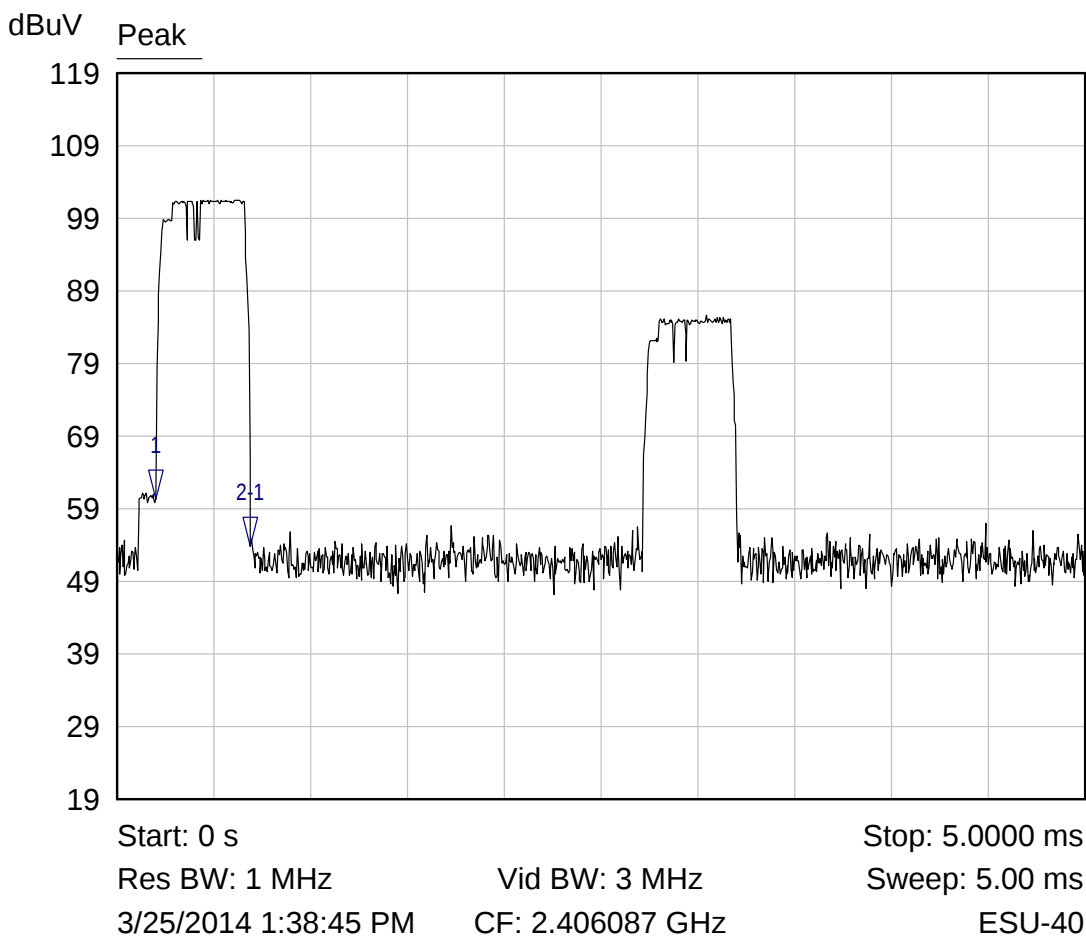

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	200.0000 us	60.29 dBuV	
2-1 ▽	Peak	490.0000 us	-6.54 dB	

power at 0/27

From the plot, the EUT transmits up to 11 times per second for 490 μ sec at each transmission.

$$\text{Dwell time} = 31.6 \text{ seconds} \times 11 \text{ hits/second} \times .49 = 170.324 \text{ ms}$$

RESULT


The EUT complies with the specification as the EUT transmits on an individual channel for a maximum of 170.324 milliseconds in 31.6 seconds, less than the 0.4 seconds allowed by the specification.

6.2.6 §15.247(b) Peak Output Power

The antenna used with the EUT has a gain of 0 dBi. The EUT uses 79 hopping channels that are spaced greater than 2/3 of the channel 20 dB bandwidth. The limit for this device is 0.125 Watt. Radiated measurements were taken as the EUT has an integral antenna. The radiated field strengths were converted to conducted power using the alternate test procedure and equation found in DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. Plots are shown below and the results of this testing are summarized in the table.


Frequency (MHz)	Measurement (dBμV/m at 3 m)	Calculated Output Power (mW)
2402	110.45	33.28
2441	109.83	28.85
2480	106.35	12.95

Lowest Channel Fundamental Field Strength

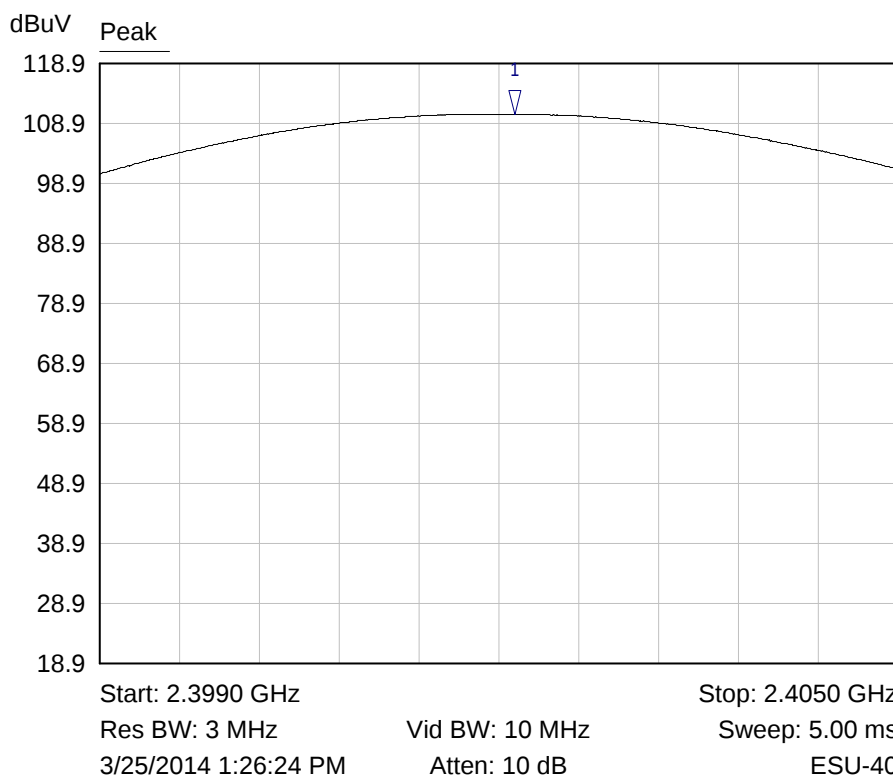

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4021 GHz	110.45 dBuV	


Middle Channel Fundamental Field Strength

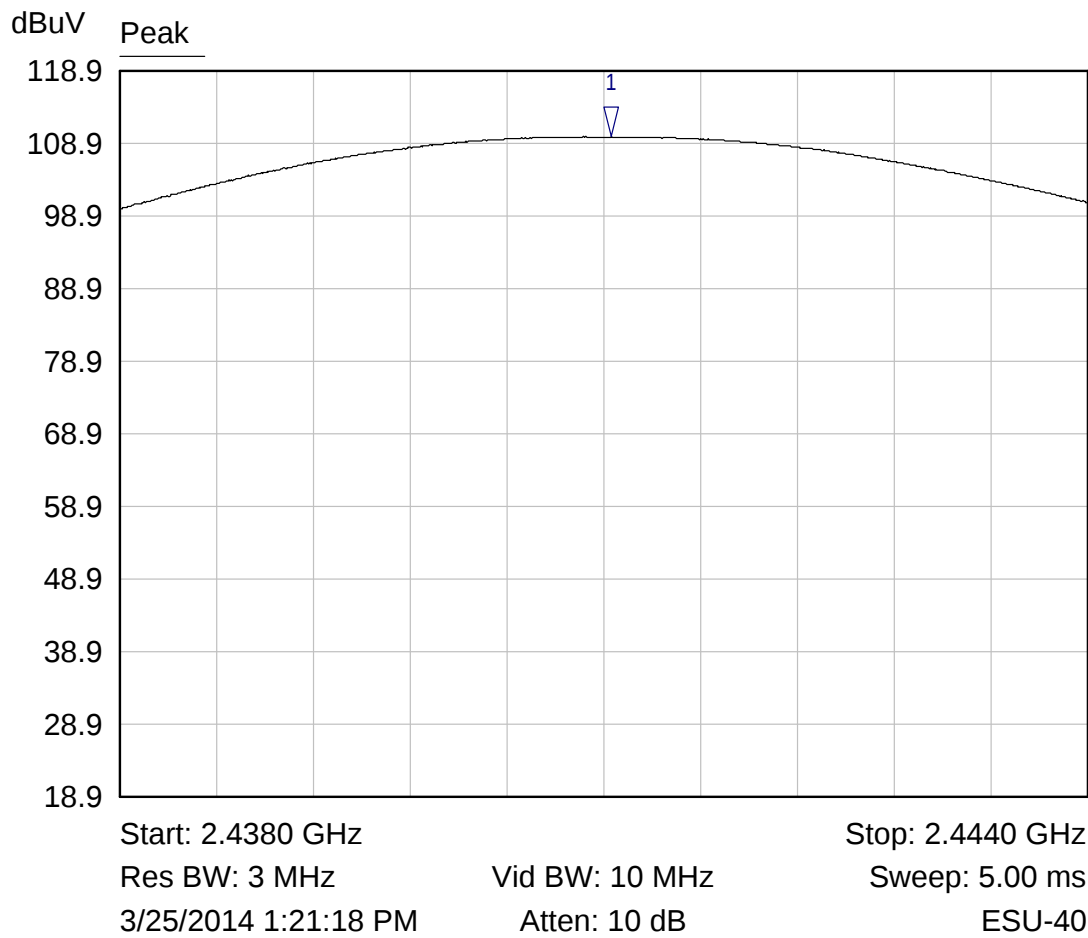

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4410 GHz	109.83 dBuV	

power at 0/27

Highest Channel Fundamental Field Strength

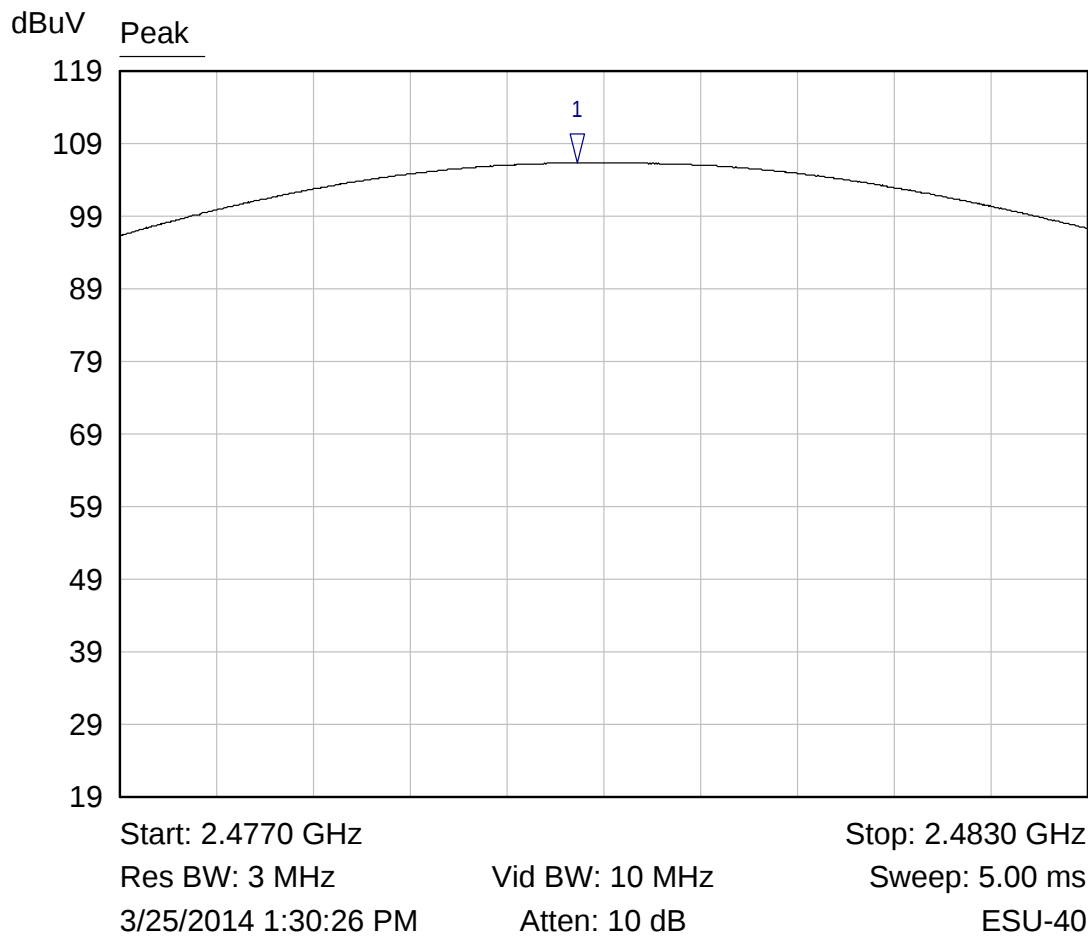

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.4798 GHz	106.35 dBuV	

power at 0/27

RESULT

In the configuration tested, the RF peak output power was less than 0.125 Watt; therefore, the EUT complied with the requirements of the specification.

6.2.7 §15.247(c) Spurious Emissions

The frequency range from lowest frequency generated or used in the device to the 10th harmonic of the fundamental frequency was investigated to measure any radiated emissions. Any emissions in the restricted bands must meet the limits specified in §15.209. Emissions outside the restricted bands must be attenuated 20 db from the fundamental. No averaging factor was applied. The tables below show the emission measurements for any emission seen and the plots show the band edges of the lower and upper channel fundamental emission.

AVERAGE FACTOR

There was no average factor applied.

Transmitting at the Lowest Frequency

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Duty Cycle Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804.0	Peak	Vertical	11.8	37.6	0.0	49.4	74.0	-24.6
4804.0	Average	Vertical	8.2	37.6	0.0	45.8	54.0	-8.2
4804.0	Peak	Horizontal	6.8	37.6	0.0	44.4	74.0	-29.6
4804.0	Average	Horizontal	3.2	37.6	0.0	40.8	54.0	-13.2
7206.0	Peak	Vertical	9.2	41.7	0.0	50.9	74.0	-23.1
7206.0	Average	Vertical	-2.7	41.7	0.0	39.0	54.0	-15.0
7206.0	Peak	Horizontal	7.9	41.7	0.0	49.6	74.0	-24.4
7206.0	Average	Horizontal	-4.3	41.7	0.0	37.4	54.0	-16.6
9608.0	Peak	Vertical	4.8	44.6	0.0	49.4	74.0	-24.6
9608.0	Average	Vertical	-0.7	44.6	0.0	43.9	54.0	-10.1
9608.0	Peak	Horizontal	2.3	44.6	0.0	46.9	74.0	-27.1
9608.0	Average	Horizontal	-4.1	44.6	0.0	40.5	54.0	-13.5
12010.0	Peak	Vertical	1.4	46.8	0.0	48.2	74.0	-25.8
12010.0	Average	Vertical	-7.6	46.8	0.0	39.2	54.0	-14.8
12010.0	Peak	Horizontal	0.6	46.8	0.0	47.4	74.0	-26.6
12010.0	Average	Horizontal	-10.9	46.8	0.0	35.9	54.0	-18.1

Transmitting at the Middle Frequency

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Duty Cycle Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882.0	Peak	Vertical	10.1	37.8	0.0	47.9	74.0	-26.1
4882.0	Average	Vertical	7.0	37.8	0.0	44.8	54.0	-9.2
4882.0	Peak	Horizontal	2.9	37.8	0.0	40.7	74.0	-33.3
4882.0	Average	Horizontal	-0.4	37.8	0.0	37.4	54.0	-16.6
7323.0	Peak	Vertical	9.3	42.1	0.0	51.4	74.0	-22.6
7323.0	Average	Vertical	2.7	42.1	0.0	44.8	54.0	-9.2
7323.0	Peak	Horizontal	7.0	42.1	0.0	49.1	74.0	-24.9
7323.0	Average	Horizontal	3.0	42.1	0.0	45.1	54.0	-8.9
9764.0	Peak	Vertical	3.8	44.8	0.0	48.6	74.0	-25.4
9764.0	Average	Vertical	-1.3	44.8	0.0	43.5	54.0	-10.5
9764.0	Peak	Horizontal	4.3	44.8	0.0	49.1	74.0	-24.9
9764.0	Average	Horizontal	-0.8	44.8	0.0	44.0	54.0	-10.0
12205.0	Peak	Vertical	1.0	46.8	0.0	47.8	74.0	-26.2
12205.0	Average	Vertical	-8.5	46.8	0.0	38.3	54.0	-15.7
12205.0	Peak	Horizontal	0.8	46.8	0.0	47.6	74.0	-26.4
12205.0	Average	Horizontal	-11.1	46.8	0.0	35.7	54.0	-18.3


Transmitting at the Highest Frequency

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Duty Cycle Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960.0	Peak	Vertical	9.7	37.9	0.0	47.6	74.0	-26.4
4960.0	Average	Vertical	4.4	37.9	0.0	42.3	54.0	-11.7
4960.0	Peak	Horizontal	6.9	37.9	0.0	44.8	74.0	-29.2
4960.0	Average	Horizontal	2.6	37.9	0.0	40.5	54.0	-13.5
7440.0	Peak	Vertical	5.7	42.4	0.0	48.1	74.0	-25.9
7440.0	Average	Vertical	-0.7	42.4	0.0	41.7	54.0	-12.3
7440.0	Peak	Horizontal	2.6	42.4	0.0	45.0	74.0	-29.0
7440.0	Average	Horizontal	-6.9	42.4	0.0	35.5	54.0	-18.5
9920.0	Peak	Vertical	1.5	44.9	0.0	46.4	74.0	-27.6
9920.0	Average	Vertical	-11.0	44.9	0.0	33.9	54.0	-20.1
9920.0	Peak	Horizontal	0.6	44.9	0.0	45.5	74.0	-28.5
9920.0	Average	Horizontal	-11.4	44.9	0.0	33.5	54.0	-20.5

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Duty Cycle Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
12400.0	Peak	Vertical	0.5	46.7	0.0	47.2	74.0	-26.8
12400.0	Average	Vertical	-9.2	46.7	0.0	37.5	54.0	-16.5
12400.0	Peak	Horizontal	0.2	46.7	0.0	46.9	74.0	-27.1
12400.0	Average	Horizontal	-13.1	46.7	0.0	33.6	54.0	-20.4

No other emissions were seen.

Lower Band Edge Plot

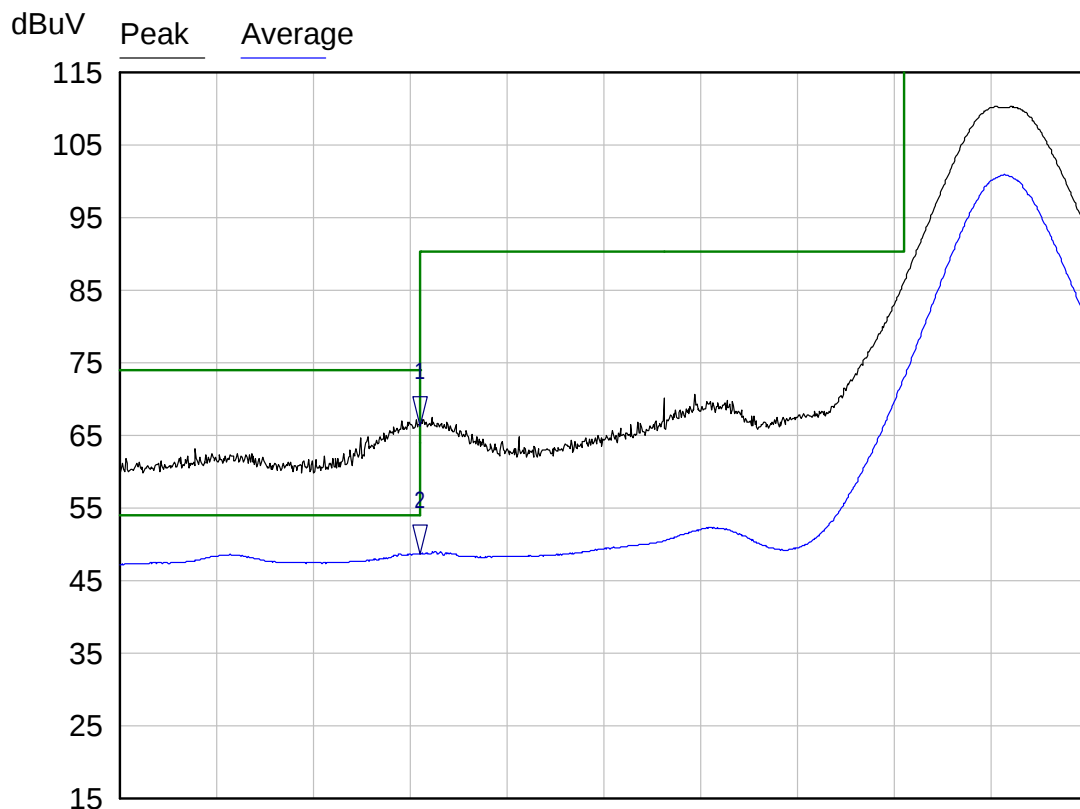

Start: 2.3838 GHz

Stop: 2.4038 GHz

Res BW: 1 MHz

Vid BW: 10 MHz

Sweep: 10.00 s

3/25/2014 1:13:11 PM

Atten: 15 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Peak	2.3900 GHz	66.38 dBuV	
2 ▽	Average	2.3900 GHz	48.71 dBuV	

dBuV

Peak Average

119

109

99

89

79

69

59

49

39

29

19

Start: 2.4735 GHz

Res BW: 1 MHz

3/25/2014 9:21:11 AM

Stop: 2.4935 GHz

Sweep: 10.00 s

Vid BW: 3 MHz

ESU-40

Atten: 15 dB


1

2

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.4835 GHz	66.48 dBuV	
2 ▾	Average	2.4835 GHz	51.93 dBuV	

TRF-15.247 FHSS SUBC Issue 1 Jan 2014

Plot of the Emission in the 2400 – 2483.5 MHz Band While Hopping

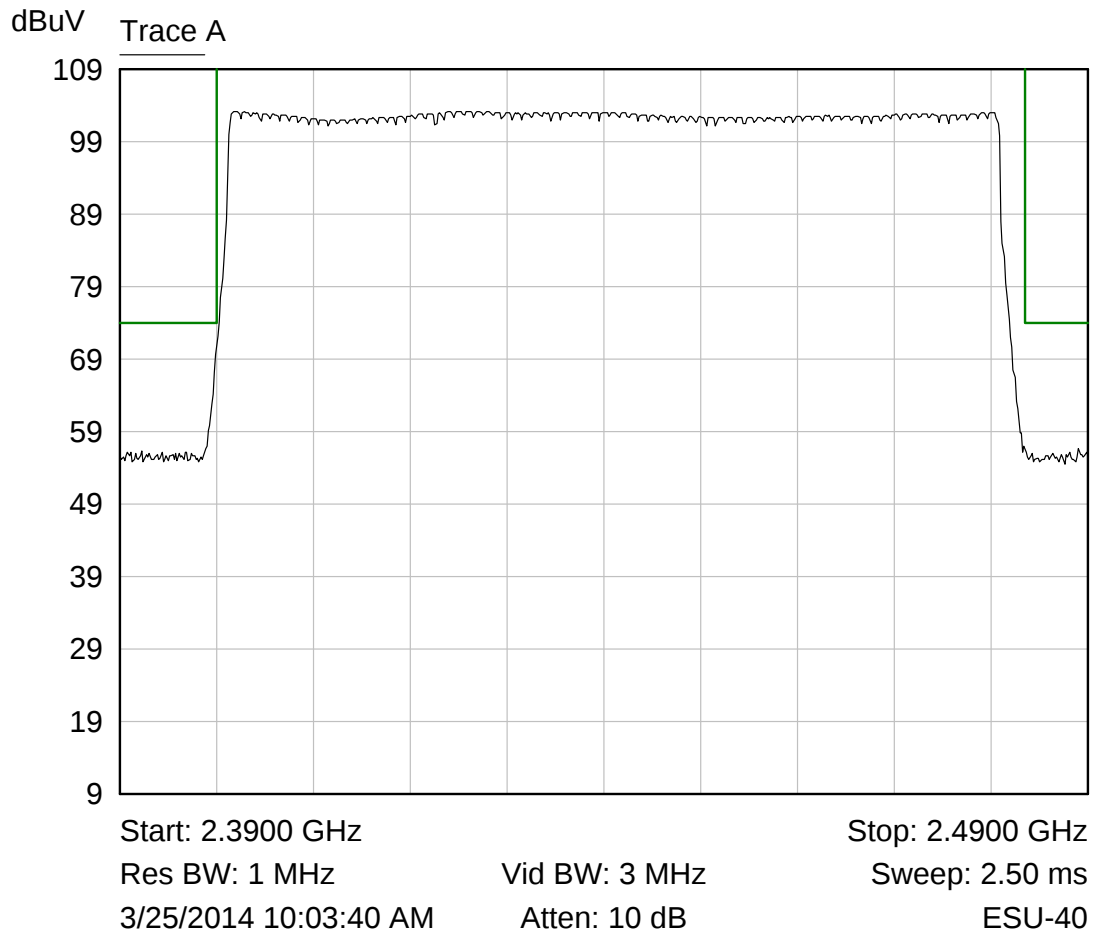

Operating band - hopping

RESULT

The spurious emissions, even those not in the restricted bands of §15.205, met the limits specified in §15.209; therefore, the EUT complies with the specification

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT**A1.1 Conducted Disturbance at the AC Mains**

The conducted disturbance at mains ports from the EUT was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted disturbance at mains ports measurements are performed in a screen room using a (50 Ω /50 μ H) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of equipment with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- (a) Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- (b) Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- (c) Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- (d) Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- (e) When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.


For AC mains port testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	12/10/2013	12/10/2014
Test Software	Nemko-CCL, Inc.	Conducted Emissions	Revision 1.2	N/A	N/A
Spectrum Analyzer	Hewlett Packard	8566B	2410A00224	06/26/2013	06/26/2014
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	03/10/2014	03/10/2015
LISN	EMCO	3825/2	9305-2099	03/03/2014	03/03/2015

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Conductance Cable Wanship Site #2	Nemko-CCL, Inc.	Cable J	N/A	12/19/2013	12/19/2014
Transient Limiter	Hewlett Packard	11947A	3107A02266	12/19/2013	12/19/2014

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Conducted Emissions Test Setup

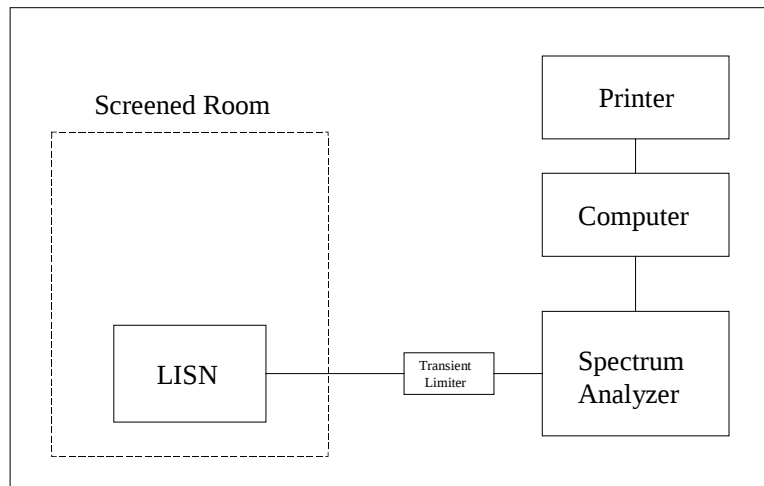

A1.2 Radiated Emissions

The radiated emissions from the intentional radiator were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A loop antenna was used to measure emissions below 30 MHz. Emission readings more than 20 dB below the limit at any frequency may not be listed in the reported data. For frequencies between 9 kHz and 30 MHz, or the lowest frequency generated or used in the device greater than 9 kHz, and less than 30 MHz, the spectrum analyzer resolution bandwidth was set to 9 kHz and the video bandwidth was set to 30 kHz. For average measurements, the spectrum analyzer average detector was used.

For frequencies above 30 MHz, an amplifier and preamplifier were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average measurements above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the average detector of the analyzer was used.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters and/or 1 meter from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated disturbance. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emission testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	12/10/2013	12/10/2014
Test Software	Nemko-CCL, Inc.	Radiated Emissions	Revision 1.3	N/A	N/A
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	100064	07/24/2013	07/24/2014
Spectrum Analyzer	Hewlett Packard	8566B	2410A00224	06/26/2013	06/26/2014
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	03/10/2014	03/10/2015
Loop Antenna	EMCO	6502	9111-2675	03/04/2013	03/04/2015
Biconilog Antenna	EMCO	3142	9601-1008	10/10/2012	10/10/2014
Double Ridged Guide Antenna	EMCO	3115	9409-4355	06/06/2012	06/06/2014
2.4 GHz Filter	Microtronics	HPM50111-03	001	05/17/2013	05/17/2014
Pyramidal Standard Gain Horn	EMC Test System	3160-09	0003-1197	04/10/2009	ICO
High Frequency Amplifier	Miteq	AFS4-01001800-43-10P-4	1096455	05/06/2013	05/06/2014
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	1297	05/02/2013	05/02/2014
3 Meter Radiated Emissions Cable Wanship Site #2	Microcoax	UFB205A-0-4700-000000	1295	05/02/2013	05/02/2014
Pre/Power-Amplifier	Hewlett Packard	8447F	3113A05161	08/26/2013	08/26/2014
6 dB Attenuator	Hewlett Packard	8491A	32835	12/23/2013	12/23/2014

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

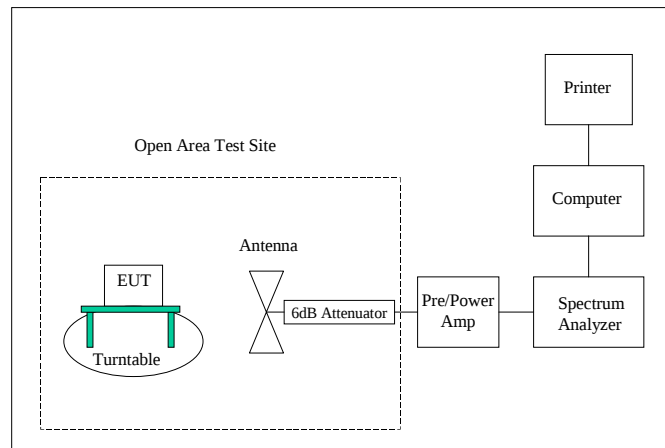

APPENDIX 2 PHOTOGRAPHS


Photograph 1 – Front View Radiated Disturbance Worst Case Configuration – Horizontal




Photograph 2 – Back View Radiated Disturbance Worst Case Configuration – Horizontal



Photograph 3 – Back View Radiated Disturbance Configuration – On Edge

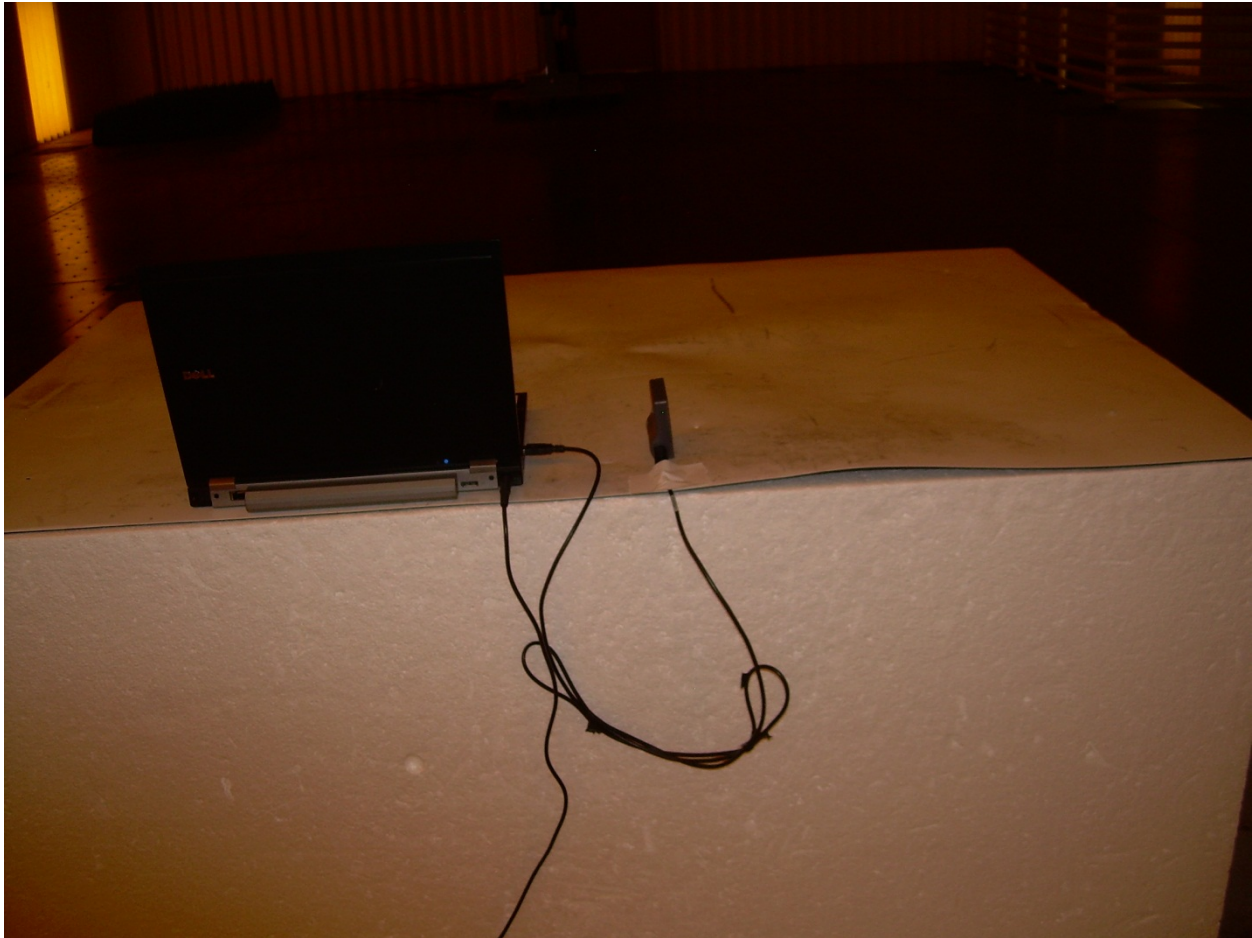

Photograph 4 – Back View Radiated Disturbance Configuration – Vertical

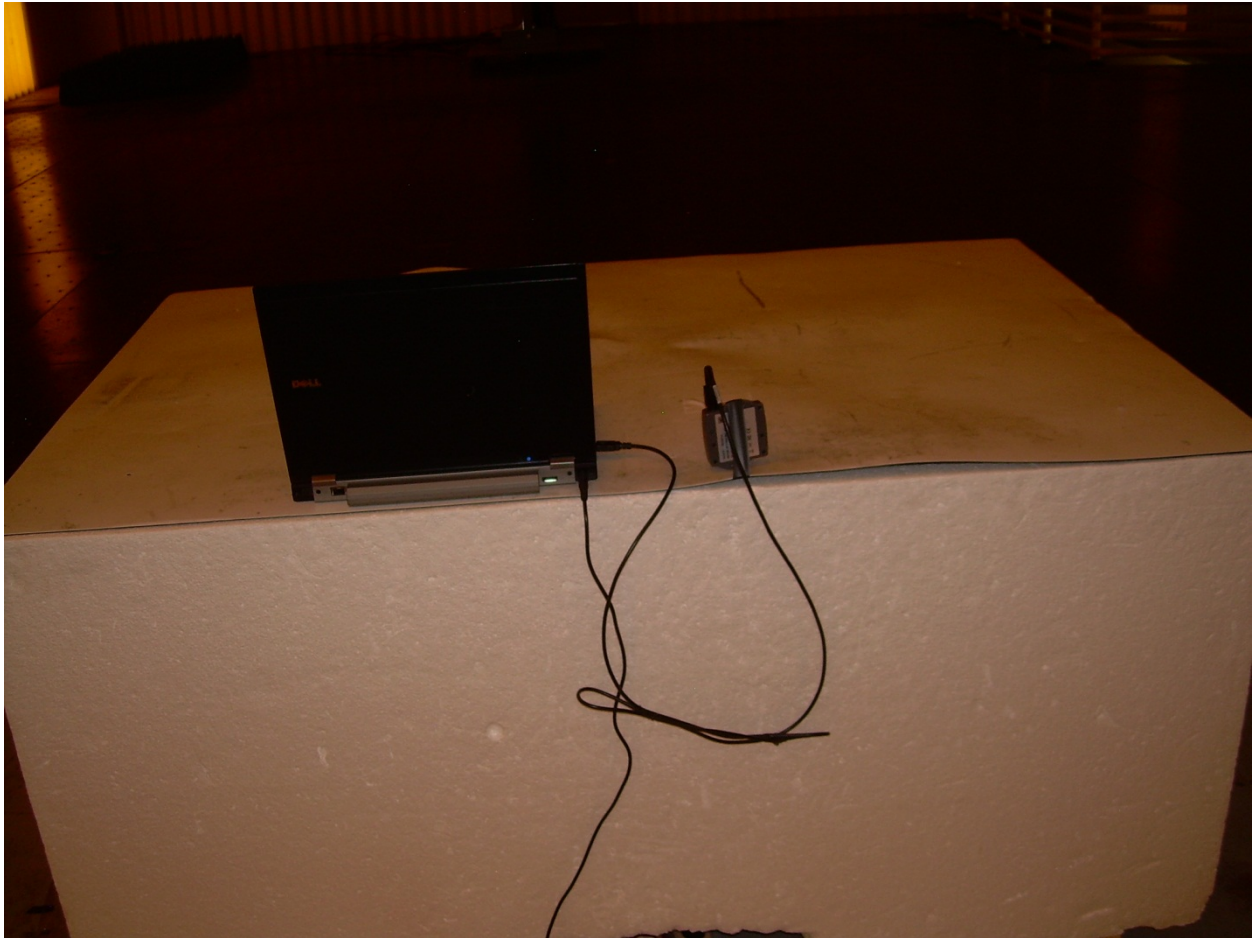

Photograph 5 – Front View Conducted Disturbance Worst Case Configuration



A photograph of a laptop on a desk. The laptop is open and has several cables connected to it. A power cord is plugged into the back of the laptop. A USB drive is plugged into the front of the laptop. A black cable is plugged into the side of the laptop. The desk is light-colored and has a wooden frame. The background is a plain wall.

Photograph 7 – Top View of the EUT




Photograph 8 – Bottom View of the EUT




Photograph 9 – View of the Interface Connector



Photograph 10 – View of the Top Side of the PCB with RF Shield In Place

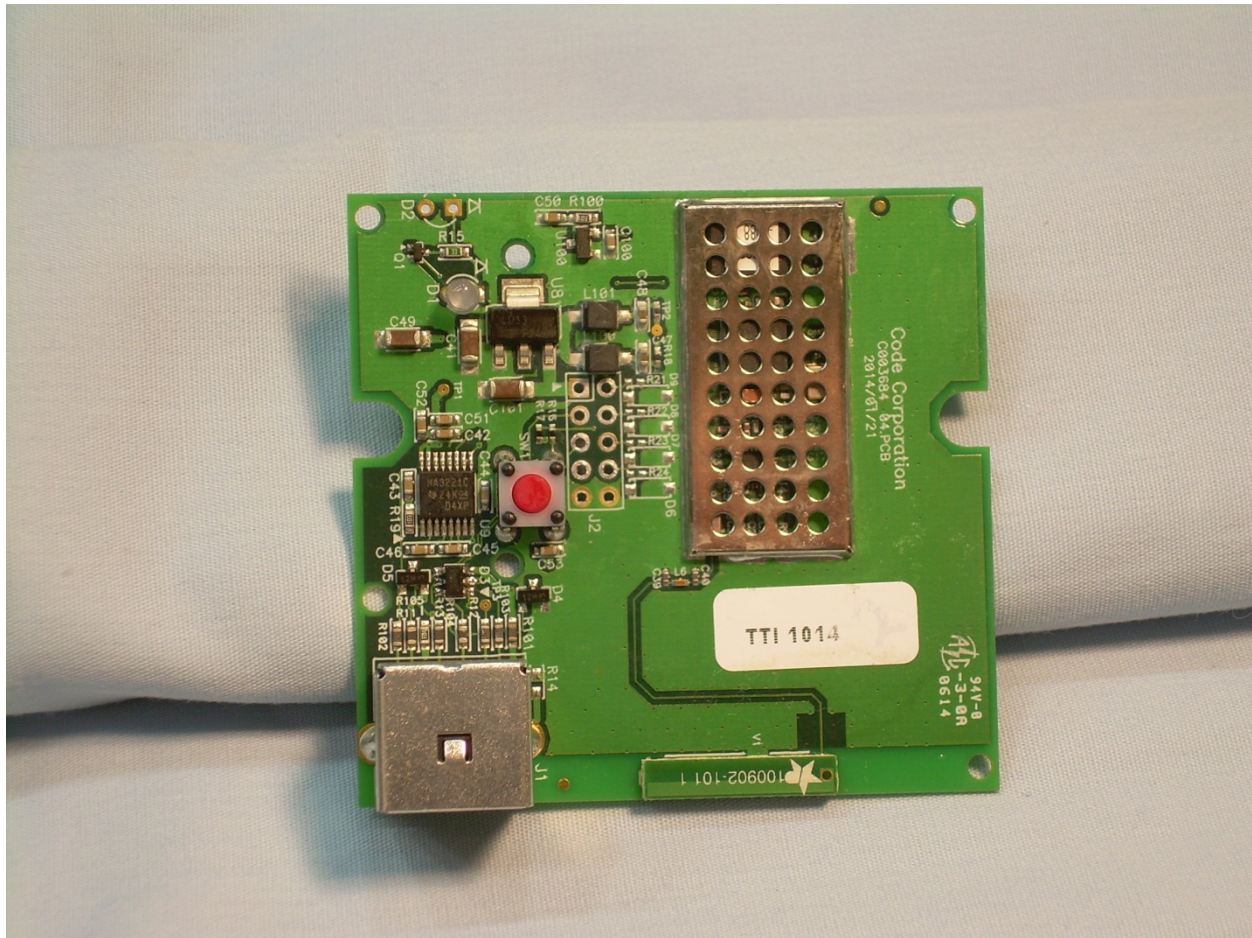

Photograph 11 – View of the Top Side of the PCB with RF Shield Removed

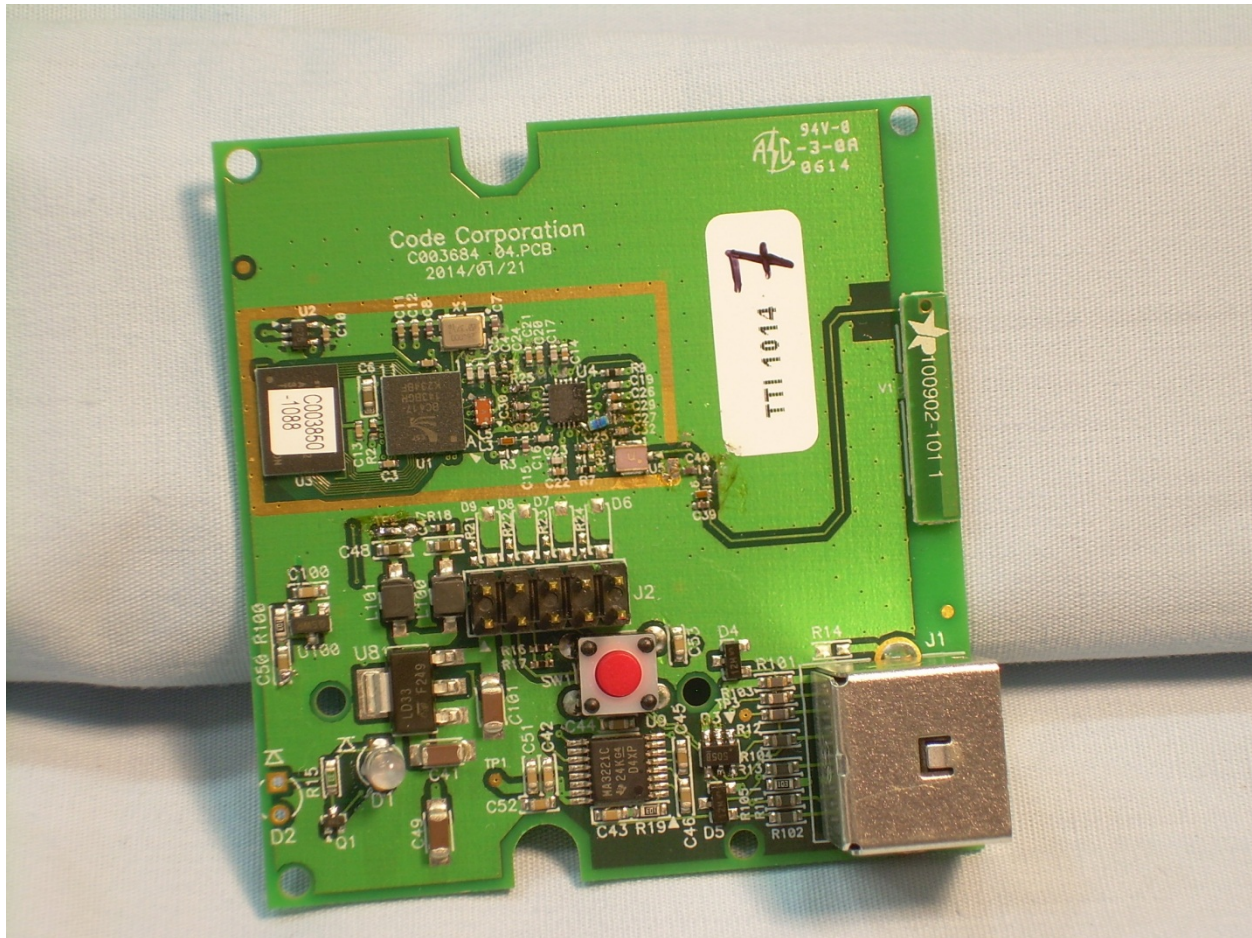

Photograph 12 – View of the Bottom Side of the PCB

