





- Test Mode : Mode 2
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

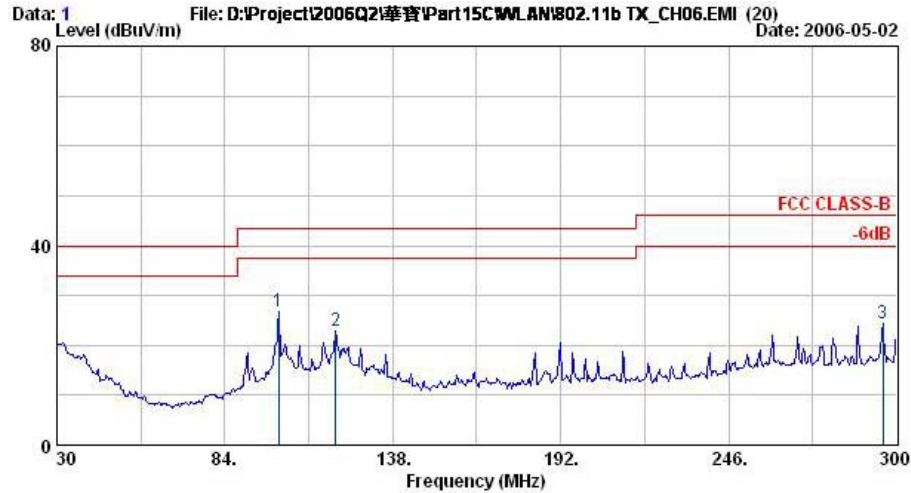


Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane :

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
		dBuV/m	dB	dBuV/m	dBuV		dB
1 @	101.28	26.89	-16.61	43.50	45.95	QP	-19.07
2 @	119.64	23.01	-20.49	43.50	39.99	QP	-16.98
3 @	295.68	24.29	-21.71	46.00	39.19	QP	-14.90

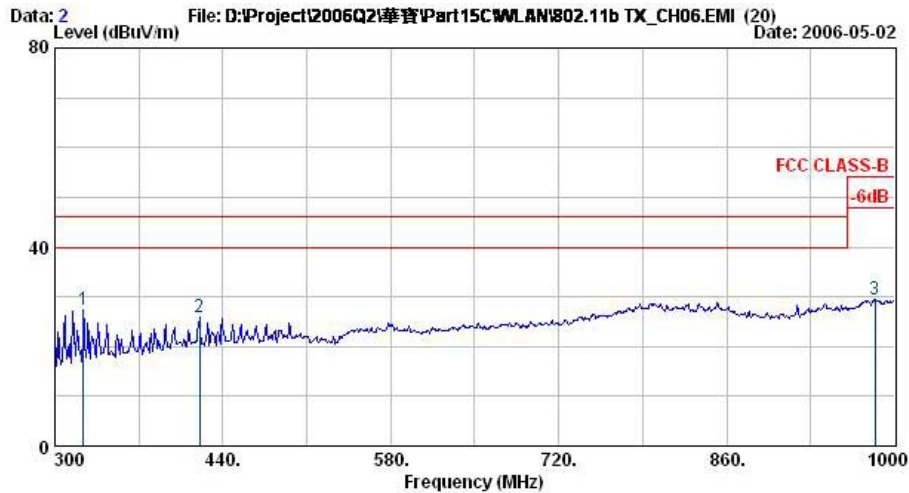

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane :


	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	323.80	27.30	-18.70	46.00	41.22	QP	-13.92
2 @	420.40	25.93	-20.07	46.00	36.61	QP	-10.69
3 @	983.90	29.48	-24.52	54.00	31.21	QP	-1.73

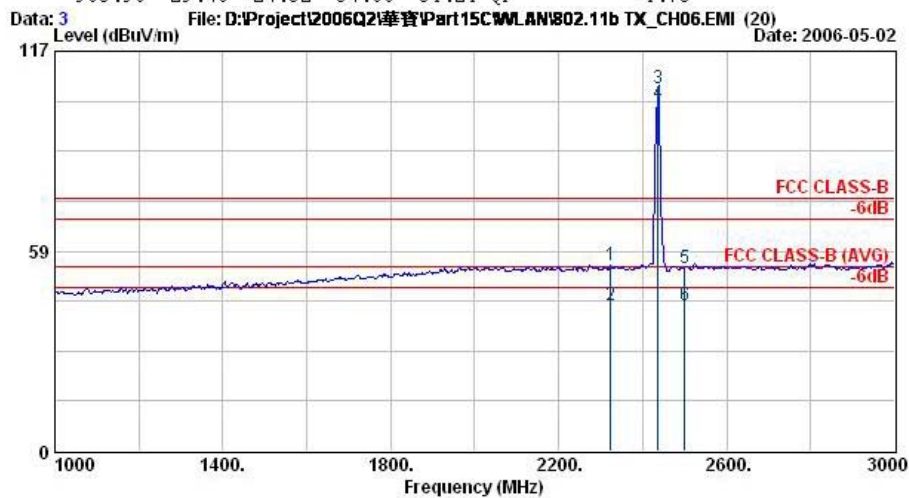


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	2324.00	54.28	-19.72	74.00	55.28	Peak	-1.00
2 @	2324.00	42.51	-11.49	54.00	43.51	Average	-1.00
3 @	2437.00	106.16			107.07	Peak	-0.91
4 @	2437.00	101.69			102.60	Average	-0.91
5 @	2500.00	53.58	-20.42	74.00	54.42	Peak	-0.84
6 @	2500.00	42.58	-11.42	54.00	43.42	Average	-0.84

Remark: #3 and #4 Fundamental Signal

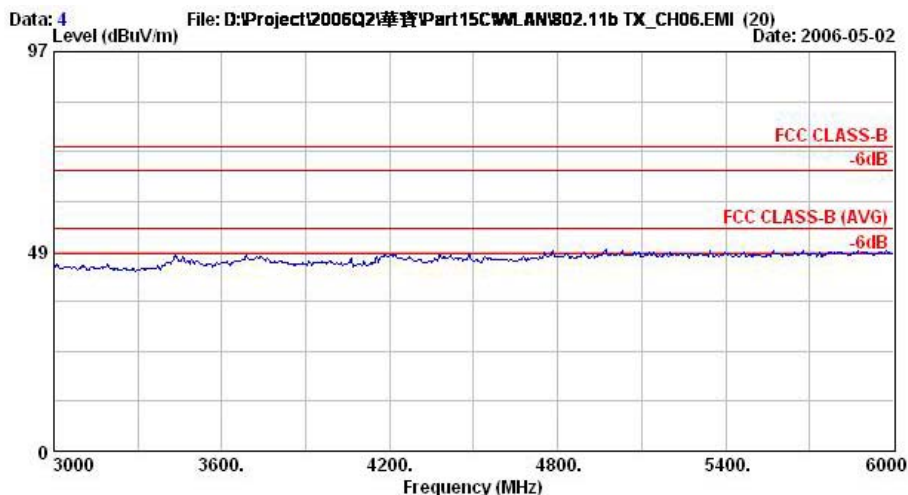


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1

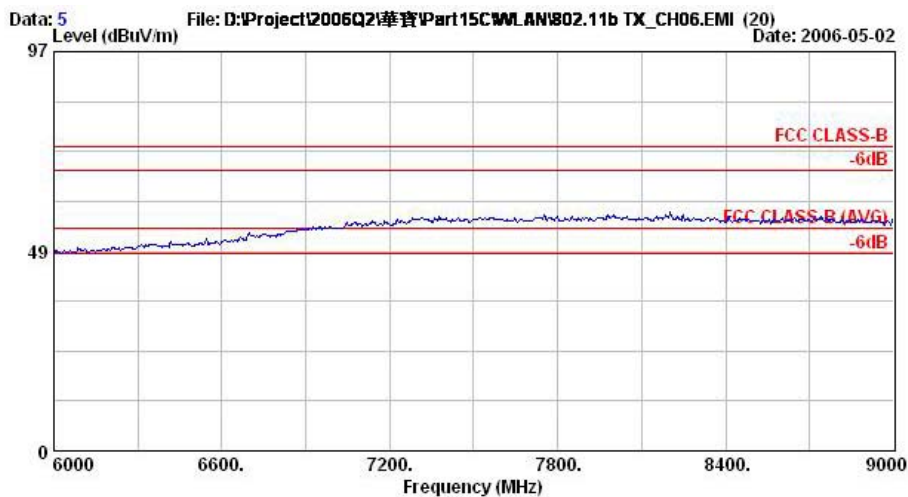

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1


▪ Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

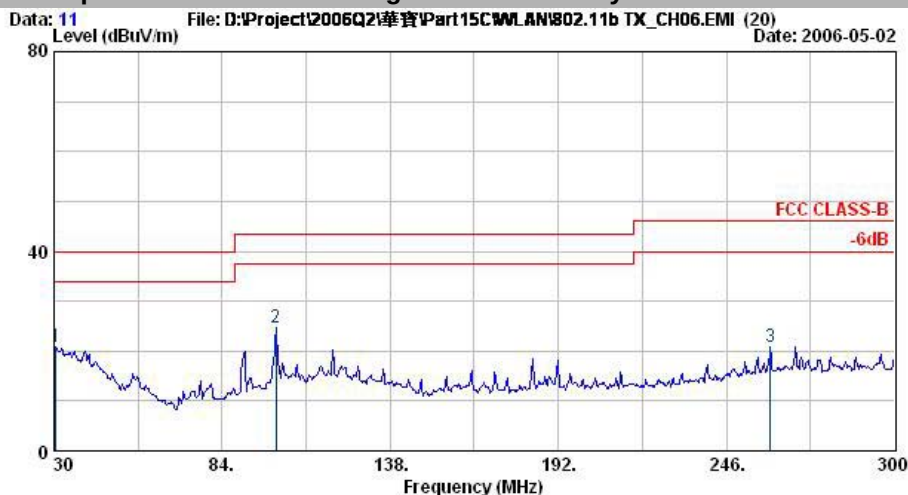

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane :

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	30.54	20.68	-19.32	40.00	32.87	QP	-12.19
2 @	101.28	24.72	-18.78	43.50	43.78	QP	-19.07
3 @	260.04	20.94	-25.06	46.00	36.23	QP	-15.28

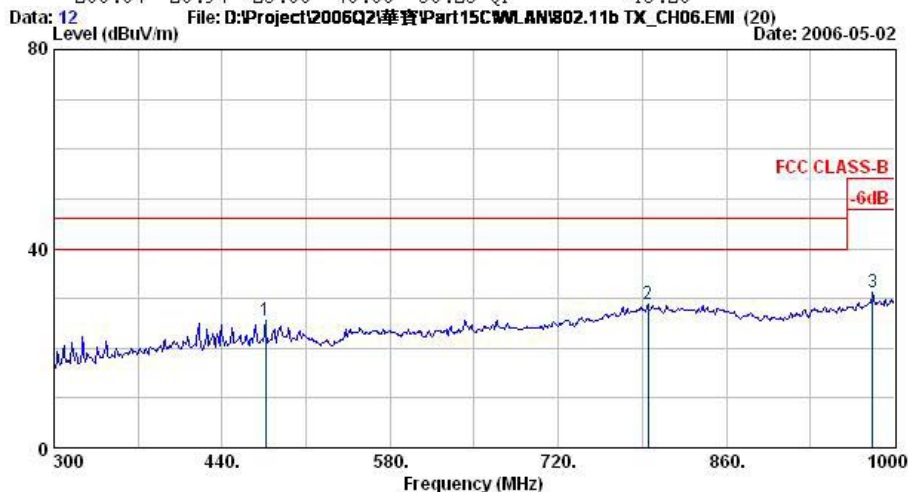

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane :


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	476.40	25.43	-20.57	46.00	35.25	QP	-9.82
2 @	794.90	28.78	-17.22	46.00	31.61	QP	-2.83
3 @	981.80	31.26	-22.74	54.00	33.06	QP	-1.80



FCC/IC TEST REPORT

Report No. : FR650602

Data: 13 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11b TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

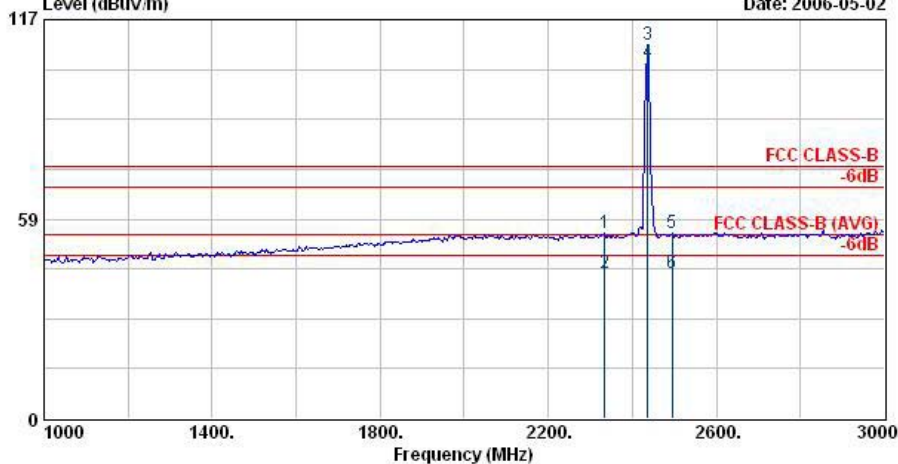


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1

	Freq	Level	Over	Limit	Read		Factor
	MHz	dBuV/m	Limit	Line	Level	Remark	dB
1 @	2334.00	54.30	-19.70	74.00	55.30	Peak	-1.00
2 @	2334.00	42.53	-11.47	54.00	43.53	Average	-1.00
3 @	2437.00	109.69			110.60	Peak	-0.91
4 @	2437.00	104.49			105.40	Average	-0.91
5 @	2494.00	54.17	-19.83	74.00	55.00	Peak	-0.84
6 @	2494.00	42.63	-11.37	54.00	43.47	Average	-0.84

Remark: #3 and #4 Fundamental Signal

Data: 14 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11b TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

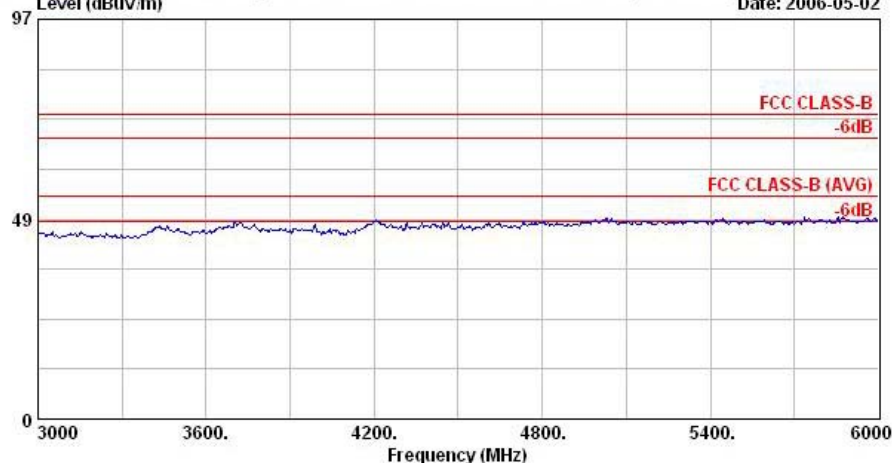


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1



FCC/IC TEST REPORT

Report No. : FR650602

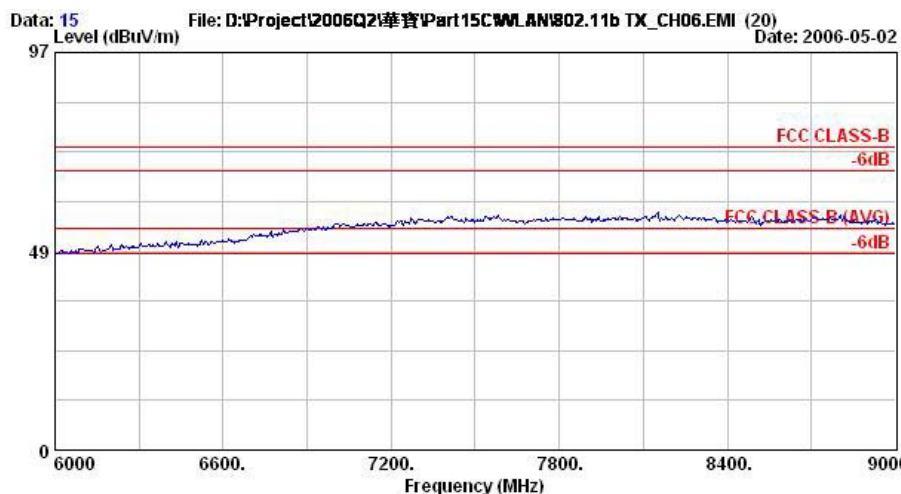


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH06_2437MHz
Plane : E1



- Test Mode : Mode 3
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

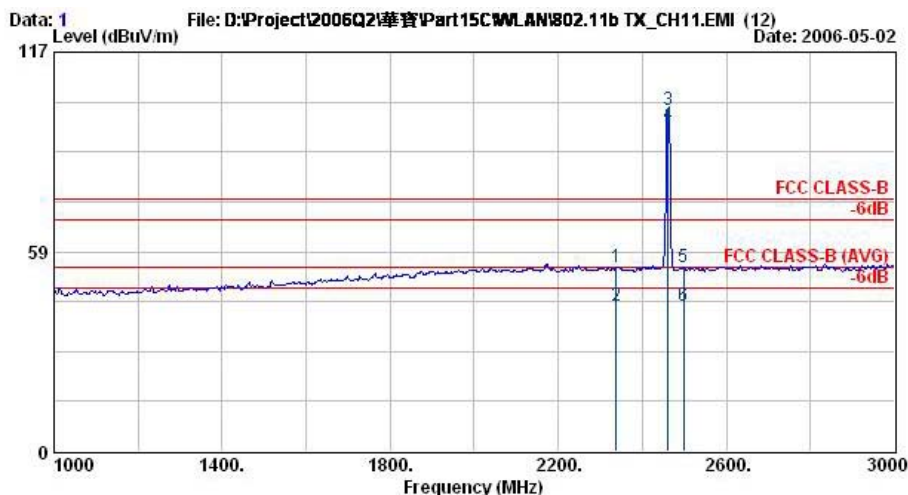


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	2338.00	53.98	-20.02	74.00	54.98	Peak	-1.00
2 @	2338.00	42.53	-11.47	54.00	43.53	Average	-1.00
3 @	2462.00	100.09			100.97	Peak	-0.88
4 @	2462.00	95.73			96.61	Average	-0.88
5 @	2498.00	53.85	-20.15	74.00	54.69	Peak	-0.84
6 @	2498.00	42.68	-11.32	54.00	43.52	Average	-0.84

Remark: #3 and #4 Fundamental Signal

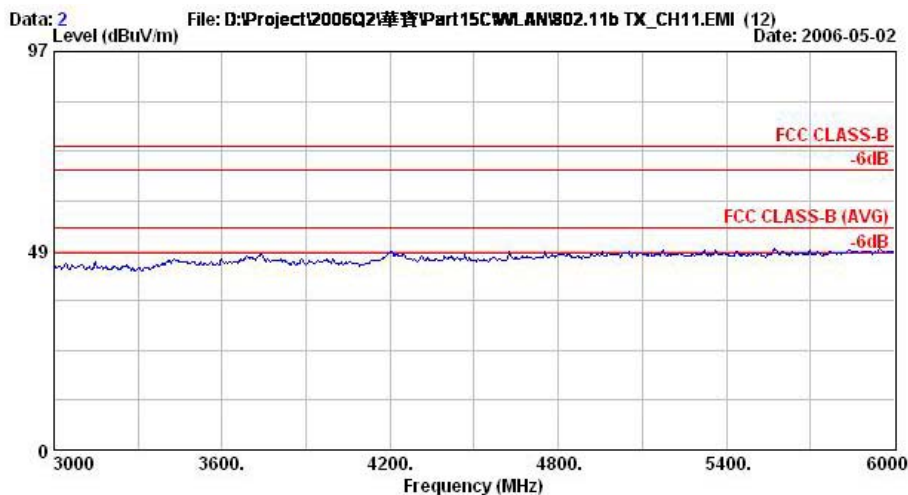

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1

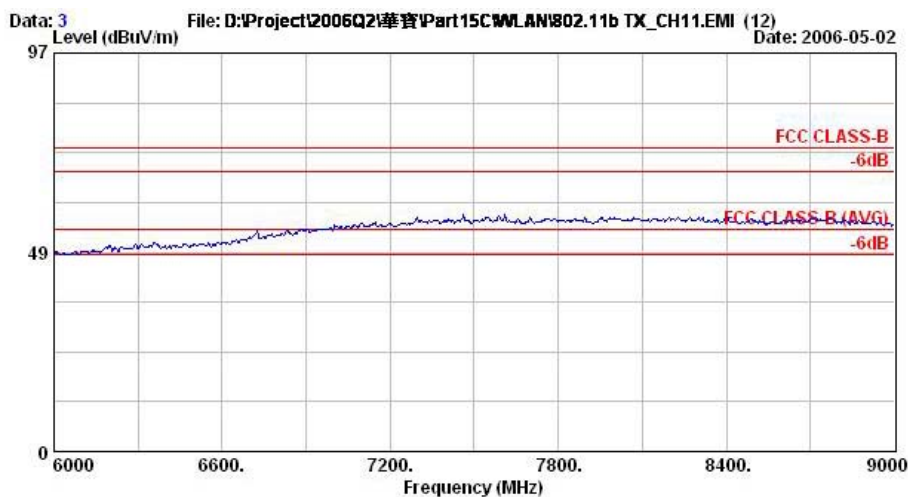


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

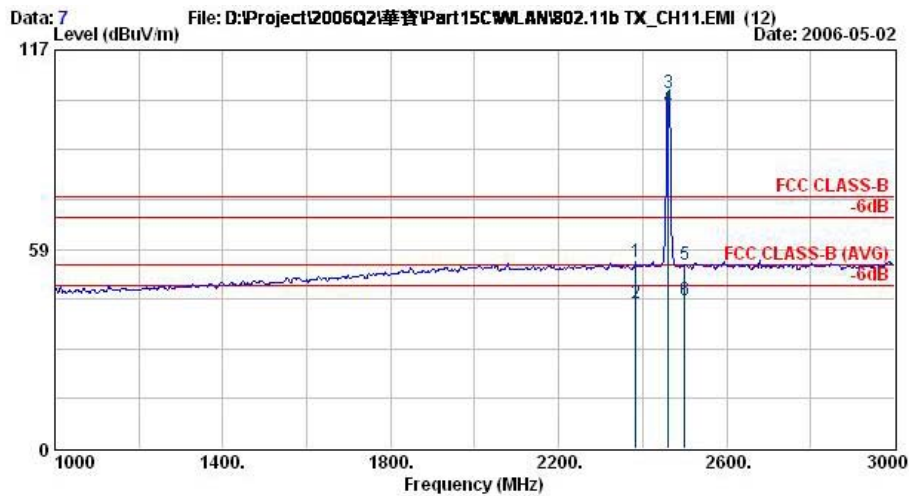

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2384.00	54.59	-19.41	74.00	55.55	Peak	-0.96
2 @	2384.00	42.49	-11.51	54.00	43.45	Average	-0.96
3 @	2462.00	104.59			105.47	Peak	-0.88
4 @	2462.00	100.02			100.90	Average	-0.88
5 @	2500.00	53.74	-20.26	74.00	54.58	Peak	-0.84
6 @	2500.00	43.45	-10.55	54.00	44.29	Average	-0.84


Remark: #3 and #4 Fundamental Signal

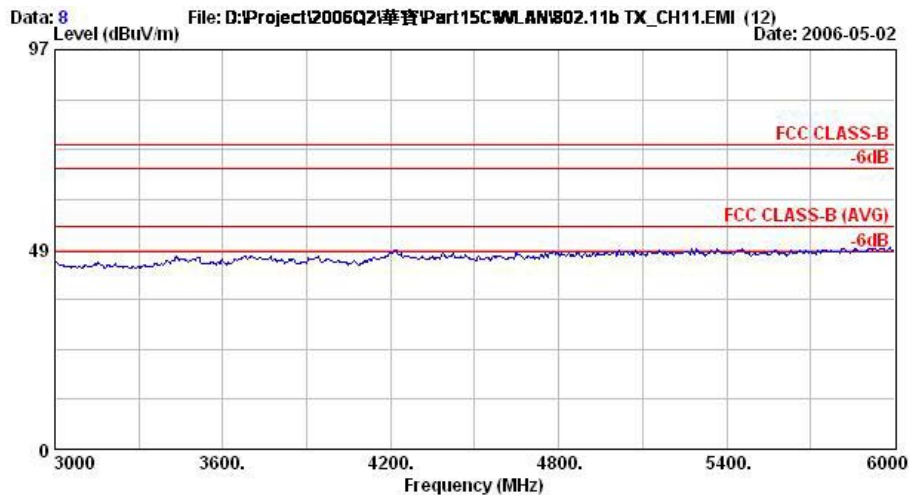

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1



Data: 9 File: D:\Project\2006Q2\華寶\Part15C\WLAN\802.11b TX_CH11.EMI (12) Date: 2006-05-02
Level (dBuV/m)

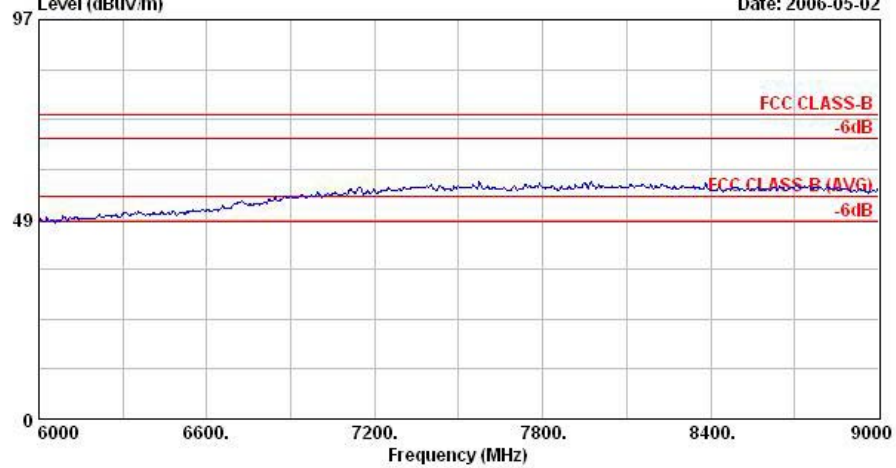


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11b TX CH11_2462MHz
Plane : E1



- Test Mode : Mode 4
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

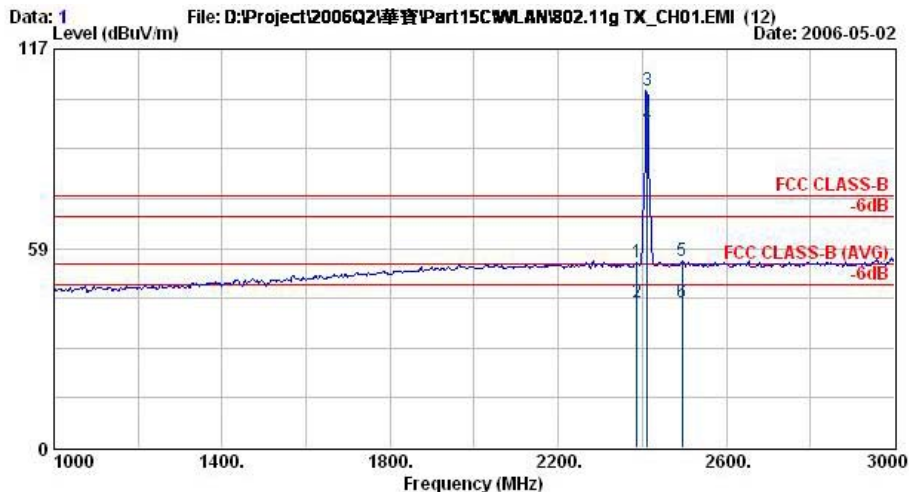

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1


	Freq	Level	Over	Limit	Read		Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2388.00	54.20	-19.80	74.00	55.14	Peak	-0.95
2 @	2388.00	42.72	-11.28	54.00	43.67	Average	-0.95
3 @	2412.00	104.92			105.85	Peak	-0.93
4 @	2412.00	94.97			95.90	Average	-0.93
5 @	2494.00	54.66	-19.34	74.00	55.50	Peak	-0.84
6 @	2494.00	42.67	-11.33	54.00	43.51	Average	-0.84

Remark: #3 and #4 Fundamental Signal




FCC/IC TEST REPORT

Report No. : FR650602

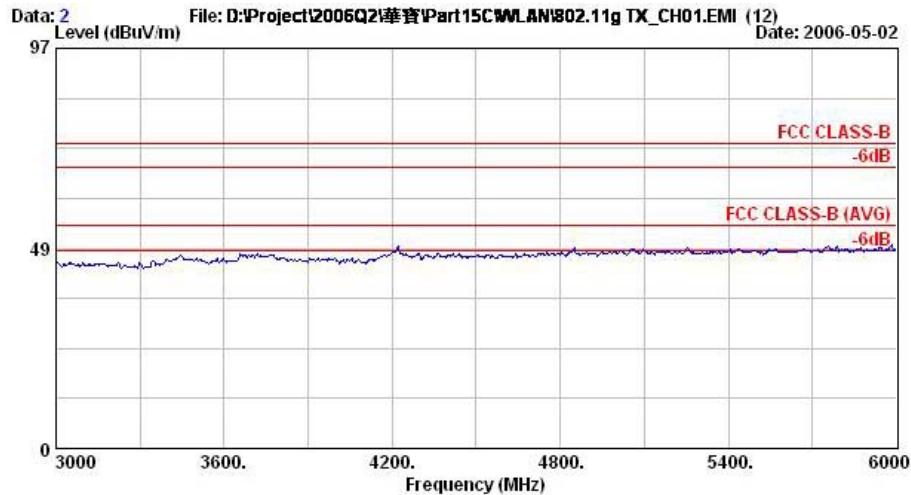

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1

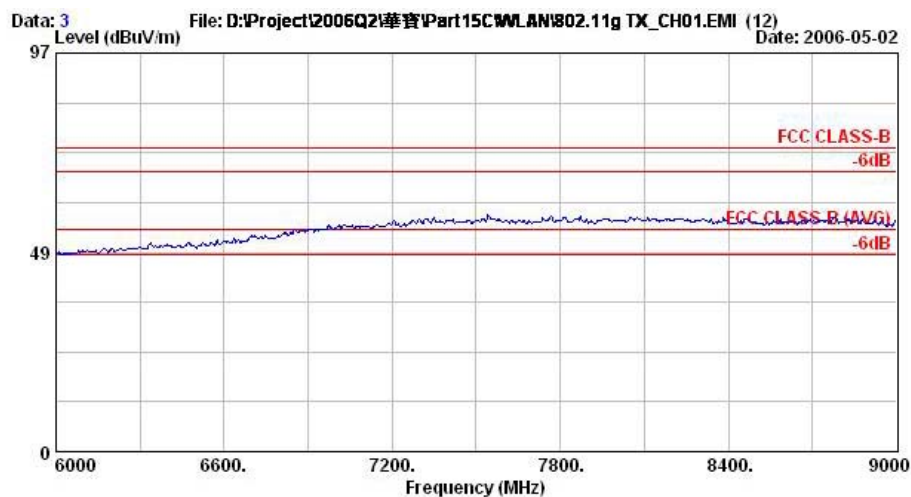


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

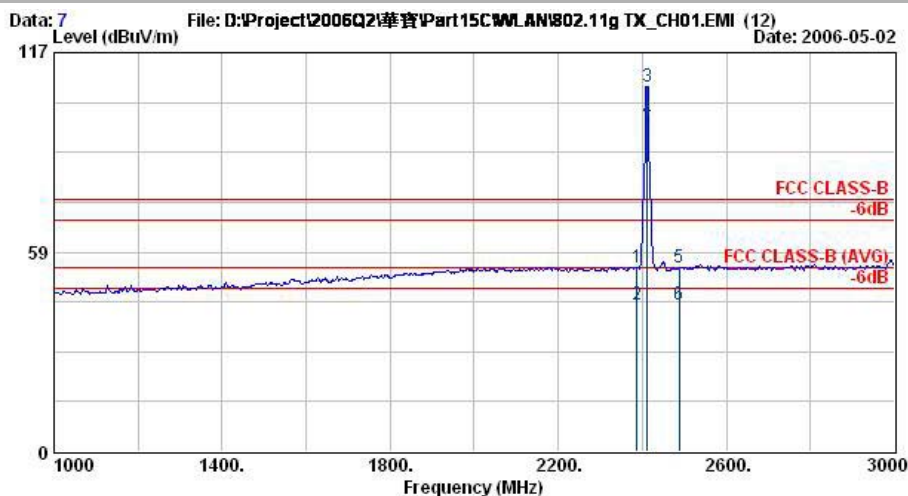

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	dBuV/m	Level	Remark	Factor
			dB		dBuV		dB
1 @	2388.00	54.06	-19.94	74.00	55.01	Peak	-0.95
2 @	2388.00	42.94	-11.06	54.00	43.89	Average	-0.95
3 @	2412.00	106.91			107.83	Peak	-0.93
4 @	2412.00	97.41			98.34	Average	-0.93
5 @	2488.00	53.97	-20.03	74.00	54.82	Peak	-0.85
6 @	2488.00	42.97	-11.03	54.00	43.82	Average	-0.85

Remark: #3 and #4 Fundamental Signal

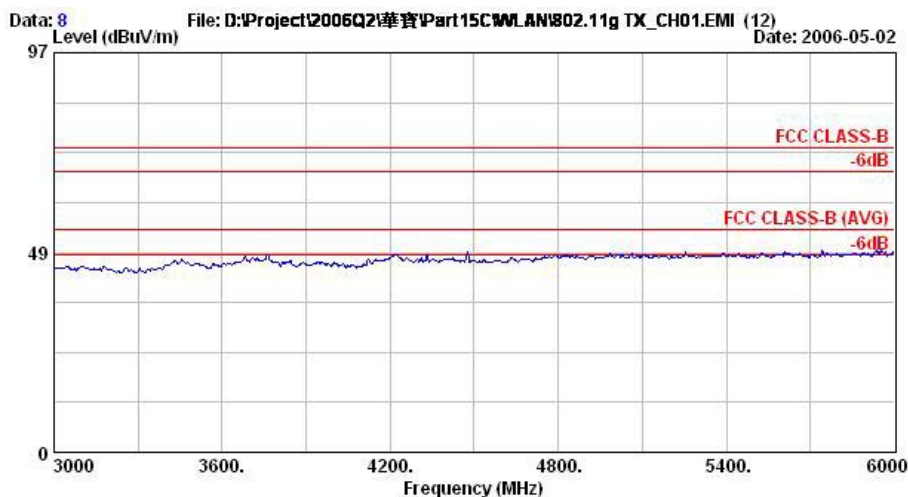


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1



FCC/IC TEST REPORT

Report No. : FR650602

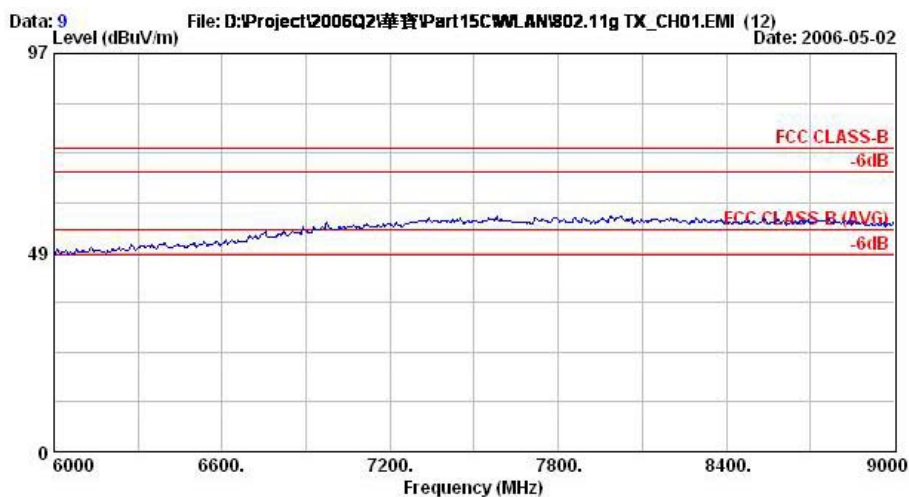


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH01_2412MHz
Plane : E1



- Test Mode : Mode 5
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.


Data: 1 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g_TX_CH06.EMI (20) Date: 2006-05-02

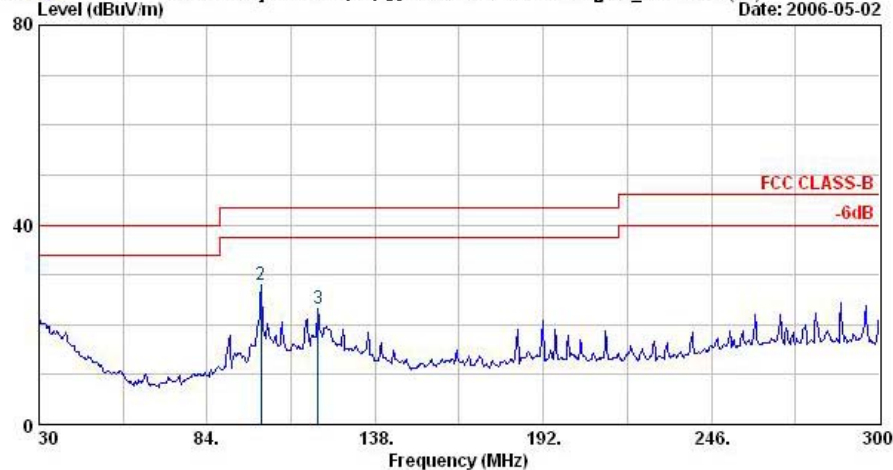

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	30.00	21.13	-18.87	40.00	32.99	QP	-11.86
2 @	101.28	28.07	-15.43	43.50	47.14	QP	-19.07
3 @	119.64	23.28	-20.22	43.50	40.26	QP	-16.98

Data: 2 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g_TX_CH06.EMI (20) Date: 2006-05-02

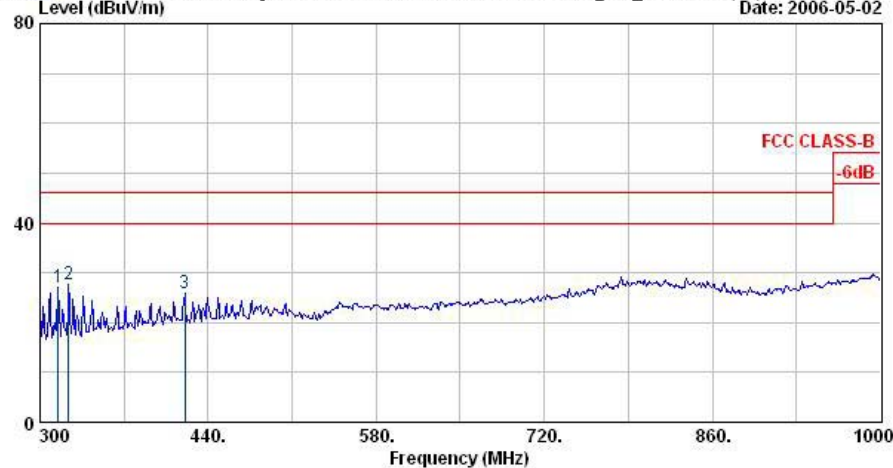

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	315.40	27.07	-18.93	46.00	41.18	QP	-14.11
2 @	323.80	27.57	-18.43	46.00	41.49	QP	-13.92
3 @	420.40	25.77	-20.23	46.00	36.46	QP	-10.69



FCC/IC TEST REPORT

Report No. : FR650602

Data: 3 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

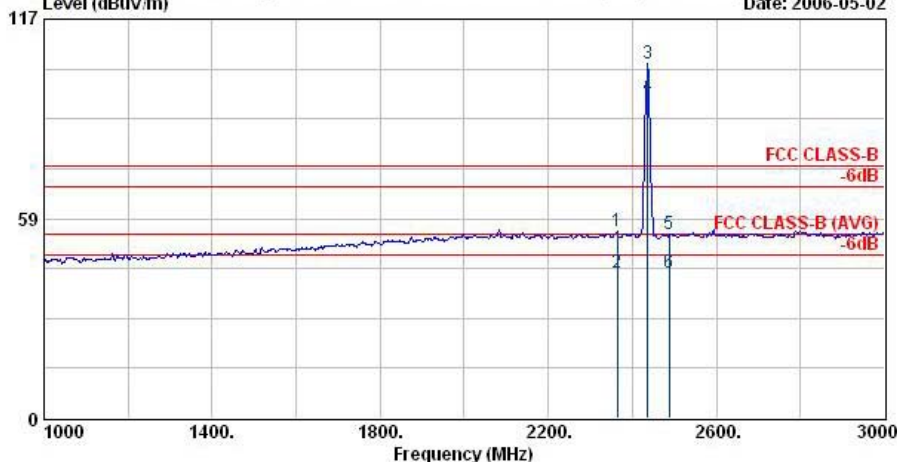


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2364.00	54.63	-19.37	74.00	55.61	Peak	-0.98
2 @	2364.00	42.46	-11.54	54.00	43.44	Average	-0.98
3 @	2437.00	103.77			104.68	Peak	-0.91
4 @	2437.00	94.44			95.35	Average	-0.91
5 @	2488.00	53.80	-20.20	74.00	54.65	Peak	-0.85
6 @	2488.00	42.60	-11.40	54.00	43.45	Average	-0.85

Remark: #3 and #4 Fundamental Signal

Data: 4 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

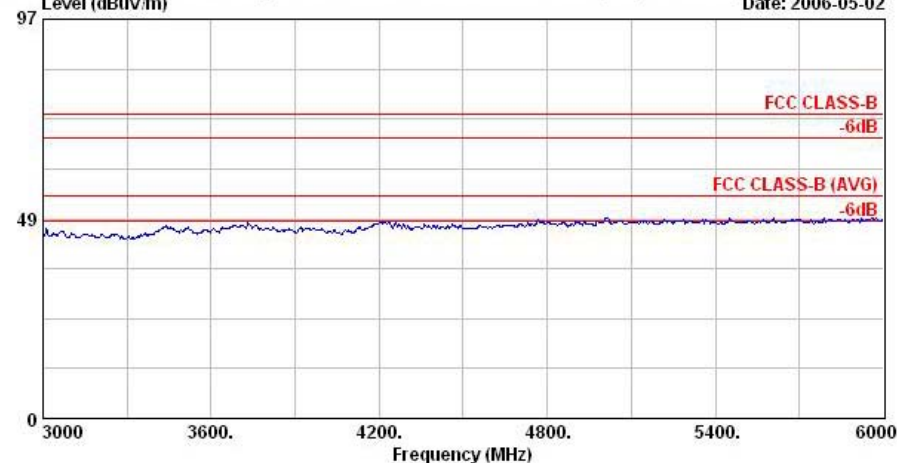


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz



FCC/IC TEST REPORT

Report No. : FR650602

Data: 5 File: D:\Project\2006Q2\華寶\Part15C\MLAN\802.11g TX_CH06.EMI (20) Level (dBuV/m) Date: 2006-05-02

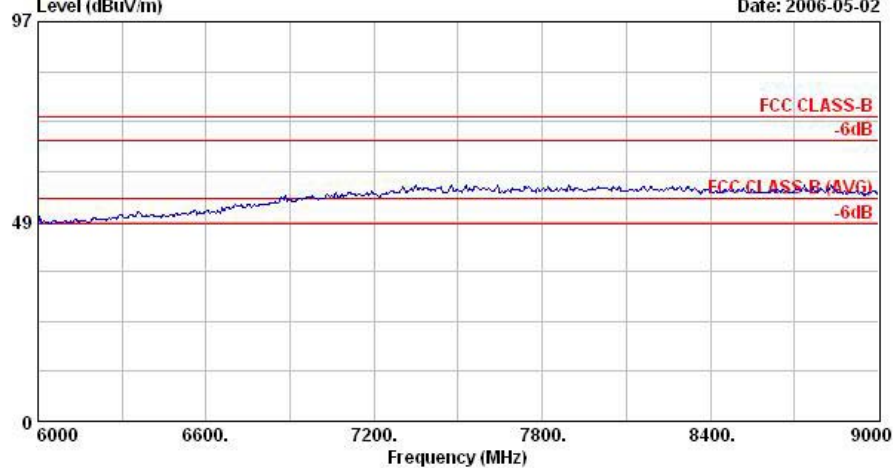


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

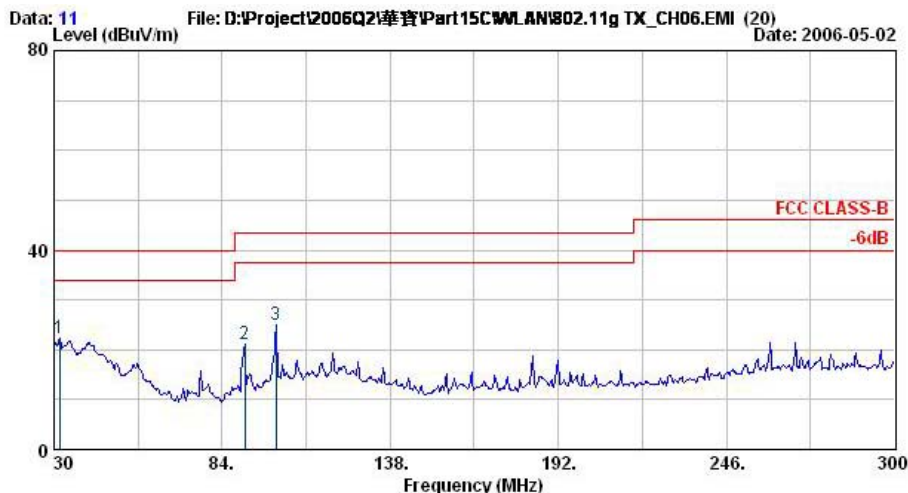

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	31.89	22.16	-17.84	40.00	34.67	QP	-12.51
2 @	91.29	21.02	-22.48	43.50	41.68	QP	-20.65
3 @	101.28	24.96	-18.54	43.50	44.02	QP	-19.07

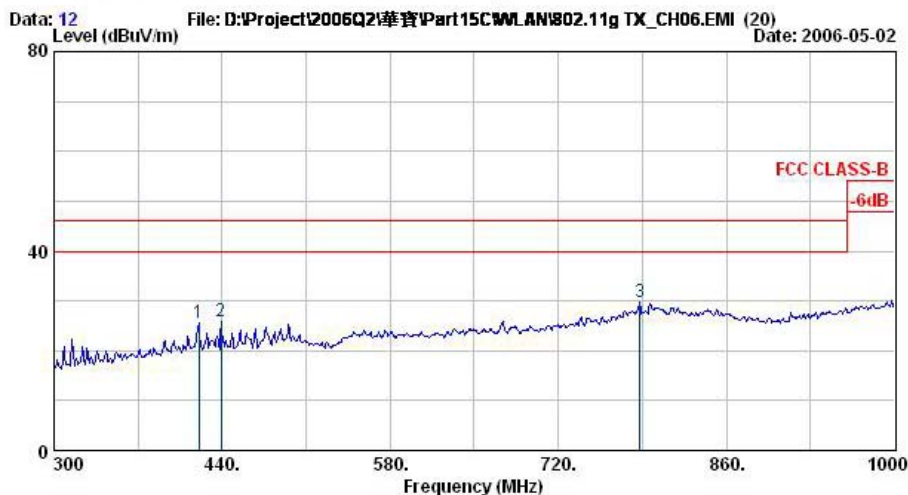

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	420.40	25.58	-20.42	46.00	36.27	QP	-10.69
2 @	439.30	25.76	-20.24	46.00	35.99	QP	-10.23
3 @	787.90	29.67	-16.33	46.00	32.81	QP	-3.14



FCC/IC TEST REPORT

Report No. : FR650602

Data: 13 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

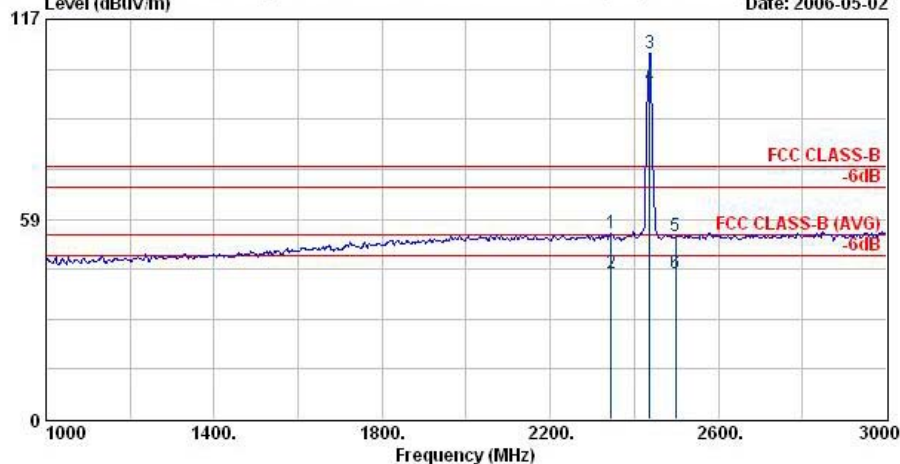


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		
			dB	dBuV/m	dBuV		dB
1 @	2344.00	54.40	-19.60	74.00	55.38	Peak	-0.98
2 @	2344.00	42.59	-11.41	54.00	43.57	Average	-0.98
3 @	2437.00	106.93			107.83	Peak	-0.90
4 @	2437.00	97.28			98.18	Average	-0.90
5 @	2498.00	53.50	-20.50	74.00	54.34	Peak	-0.84
6 @	2498.00	42.68	-11.32	54.00	43.52	Average	-0.84

Remark: #3 and #4 Fundamental Signal

Data: 14 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX_CH06.EMI (20) Date: 2006-05-02
Level (dBuV/m)

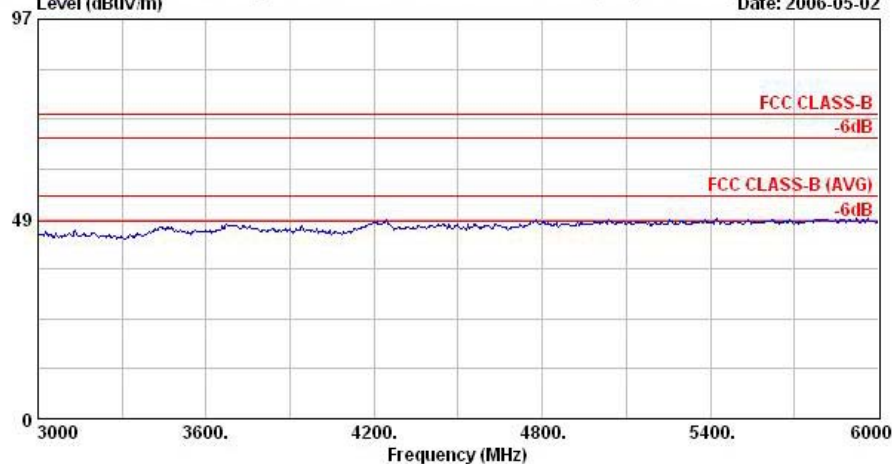


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz



FCC/IC TEST REPORT

Report No. : FR650602

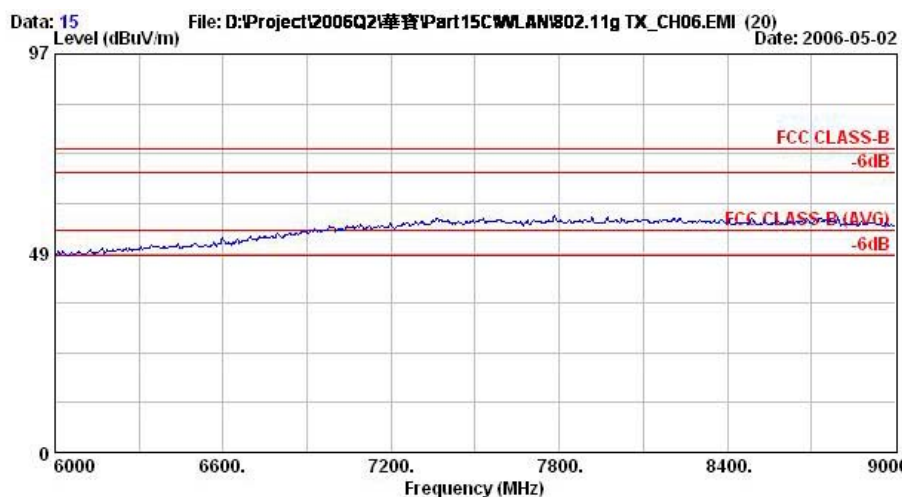


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W/1A)
Model : UPA2
Memo : 802.11g TX CH06_2437MHz



- Test Mode : Mode 6
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

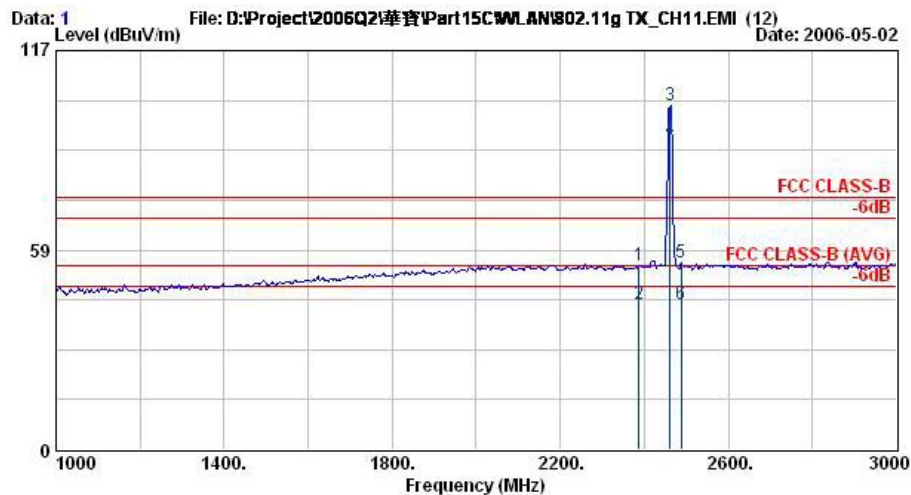

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1


	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	2388.00	53.94	-20.06	74.00	54.89	Peak	-0.95
2 @	2388.00	42.56	-11.44	54.00	43.51	Average	-0.95
3 @	2462.00	100.74			101.62	Peak	-0.88
4 @	2462.00	90.83			91.71	Average	-0.88
5 @	2488.00	54.73	-19.27	74.00	55.58	Peak	-0.85
6 @	2488.00	42.59	-11.41	54.00	43.44	Average	-0.85

Remark: #3 and #4 Fundamental Signal




FCC/IC TEST REPORT

Report No. : FR650602

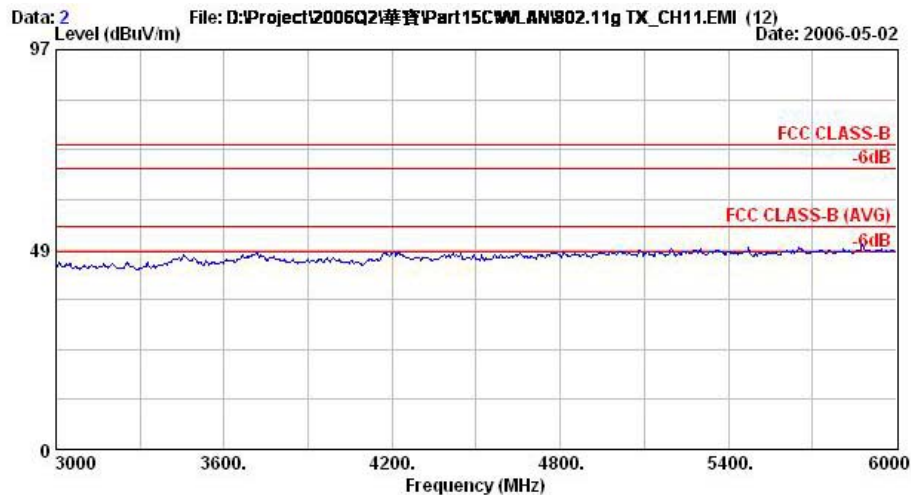

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1

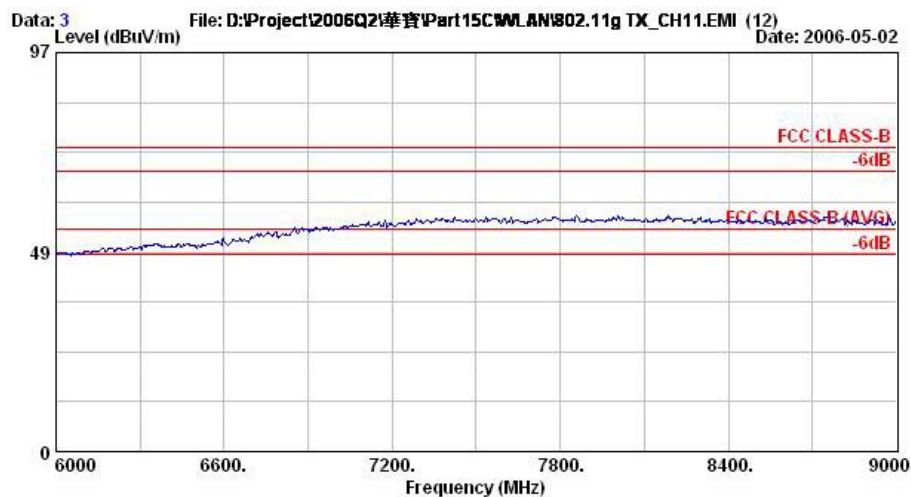


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

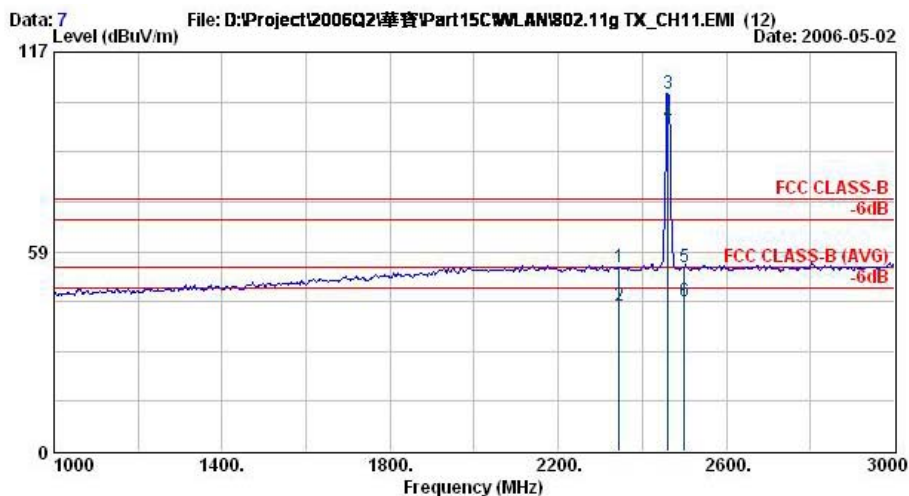

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2344.00	54.10	-19.90	74.00	55.08	Peak	-0.98
2 @	2344.00	42.62	-11.38	54.00	43.60	Average	-0.98
3 @	2462.00	105.02			105.90	Peak	-0.88
4 @	2462.00	96.04			96.92	Average	-0.88
5 @	2500.00	54.02	-19.98	74.00	54.86	Peak	-0.84
6 @	2500.00	43.75	-10.25	54.00	44.59	Average	-0.84

Remark: #3 and #4 Fundamental Signal

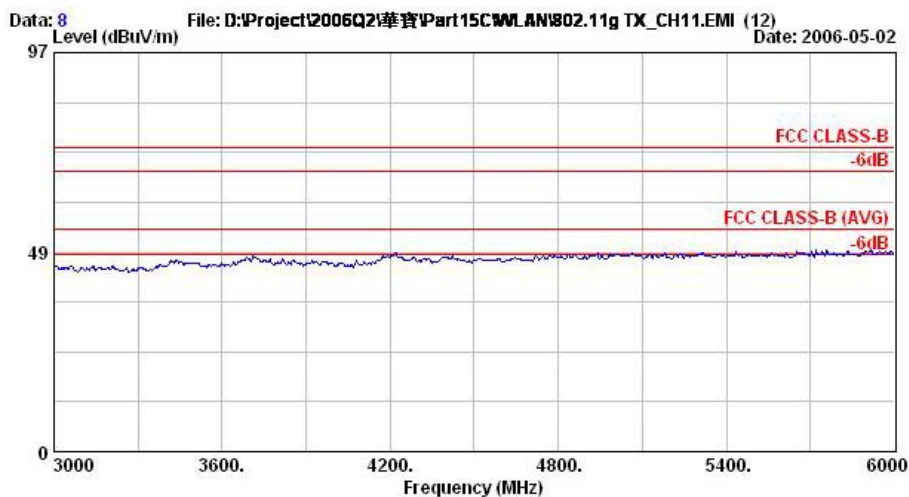


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1



FCC/IC TEST REPORT

Report No. : FR650602

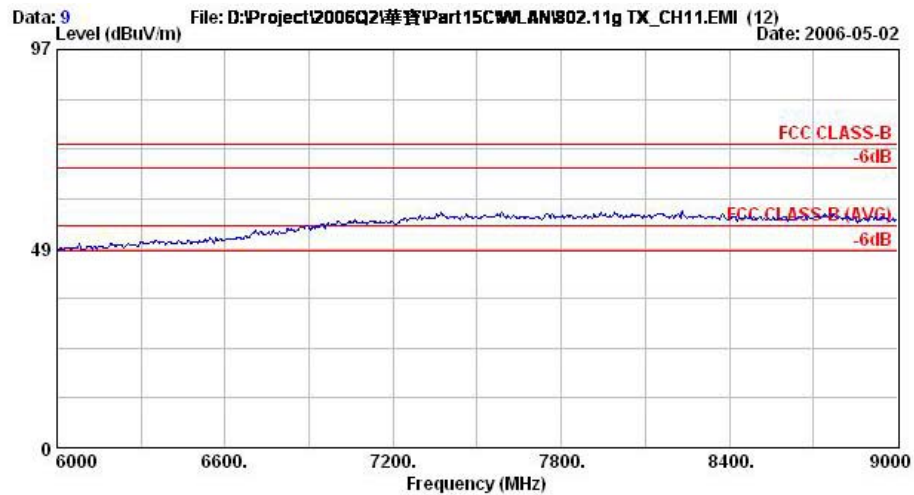


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : 802.11g TX CH11_2462MHz
Plane : E1



- Test Mode : Mode 7
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

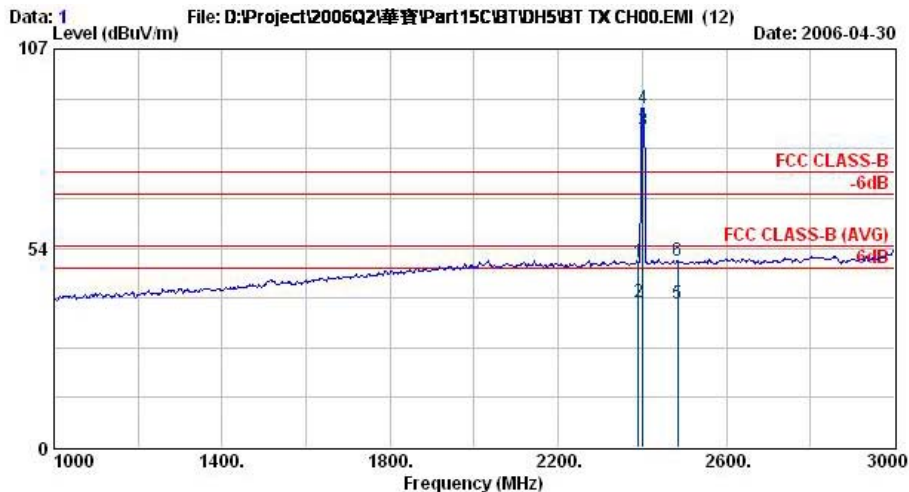

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH00_2402MHz


	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1	2390.00	49.84	-24.16	74.00	50.78	Peak	-0.94
2 @	2390.00	38.85	-15.15	54.00	39.79	Average	-0.94
3 @	2402.00	85.30			86.24	Average	-0.94
4 @	2402.00	91.21			92.14	Peak	-0.93
5 @	2483.50	38.63	-15.37	54.00	39.49	Average	-0.86
6	2484.00	50.29	-23.71	74.00	51.15	Peak	-0.86

Remark: #3 and #4 Fundamental Signal




FCC/IC TEST REPORT

Report No. : FR650602

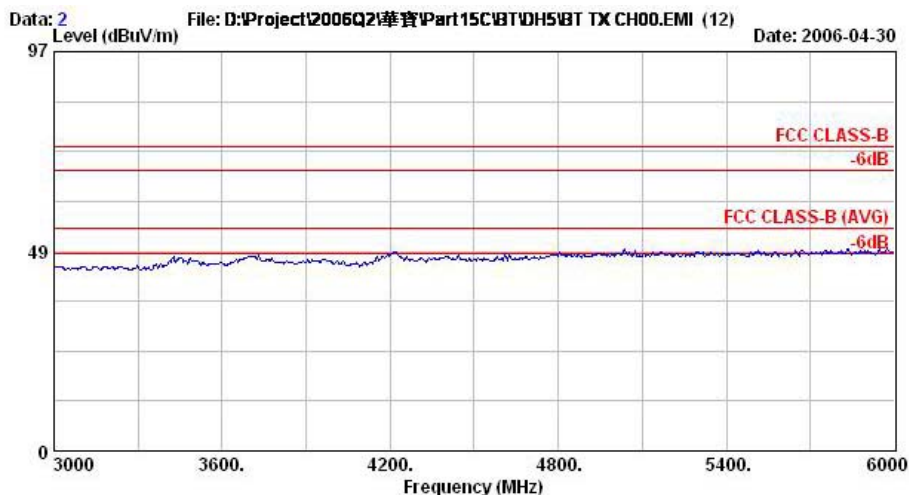

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH00_2402MHz

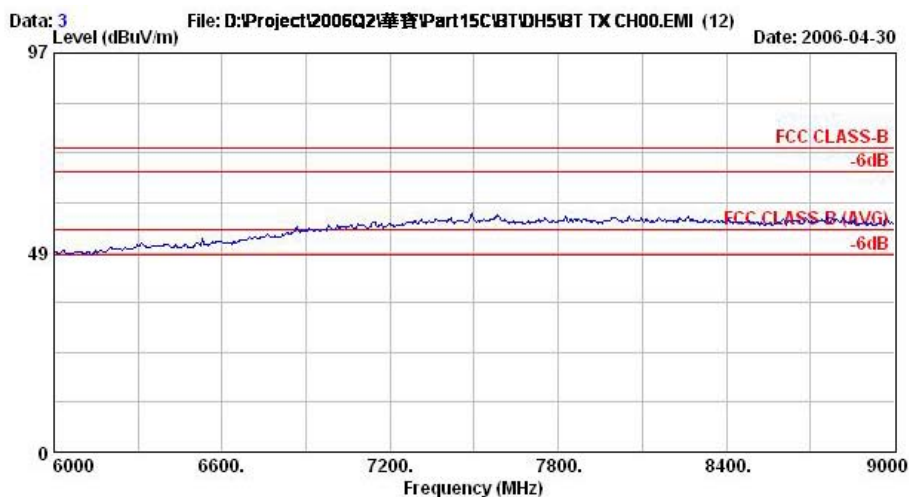


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH00_2402MHz



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

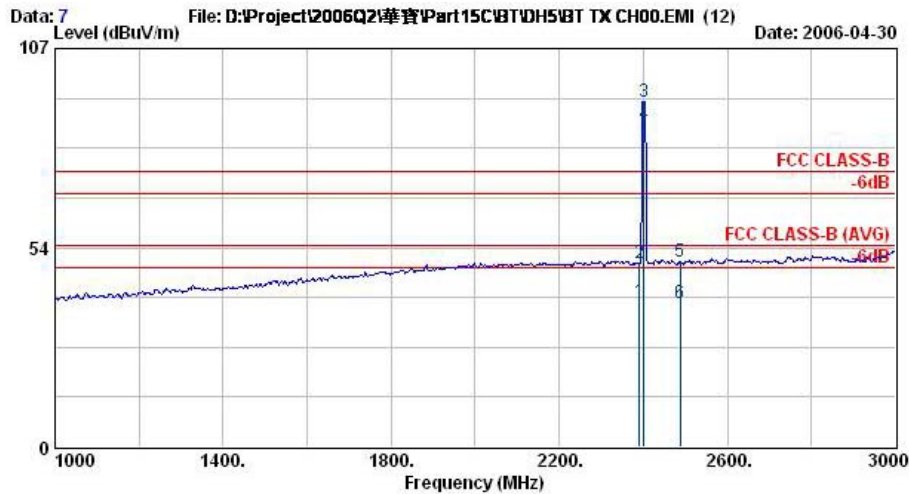

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH00_2402MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		
			dB	dBuV/m	dBuV		dB
1 @	2390.00	39.10	-14.90	54.00	40.04	Average	-0.94
2	2390.00	49.33	-24.67	74.00	50.27	Peak	-0.94
3 @	2402.00	92.53			93.46	Peak	-0.94
4 @	2402.00	86.82			87.76	Average	-0.94
5	2488.00	49.74	-24.26	74.00	50.59	Peak	-0.85
6 @	2488.00	38.69	-15.31	54.00	39.54	Average	-0.85

Remark: #3 and #4 Fundamental Signal

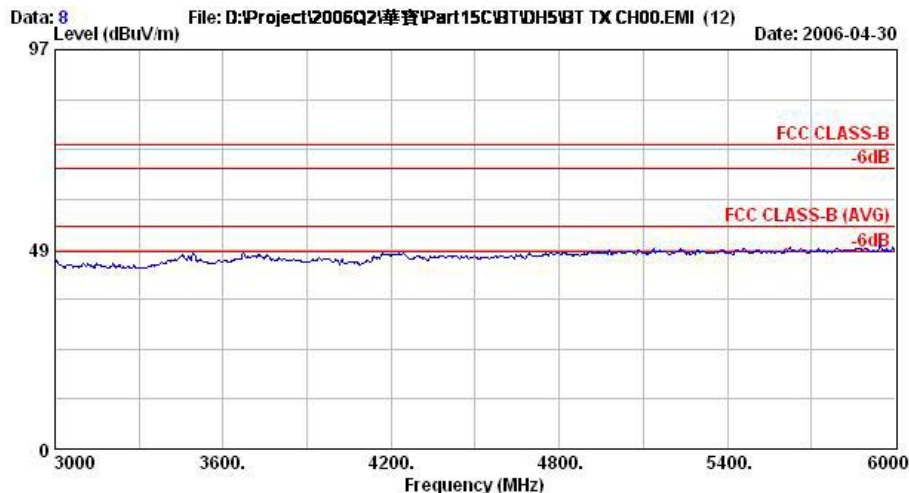


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH00_2402MHz



FCC/IC TEST REPORT

Report No. : FR650602

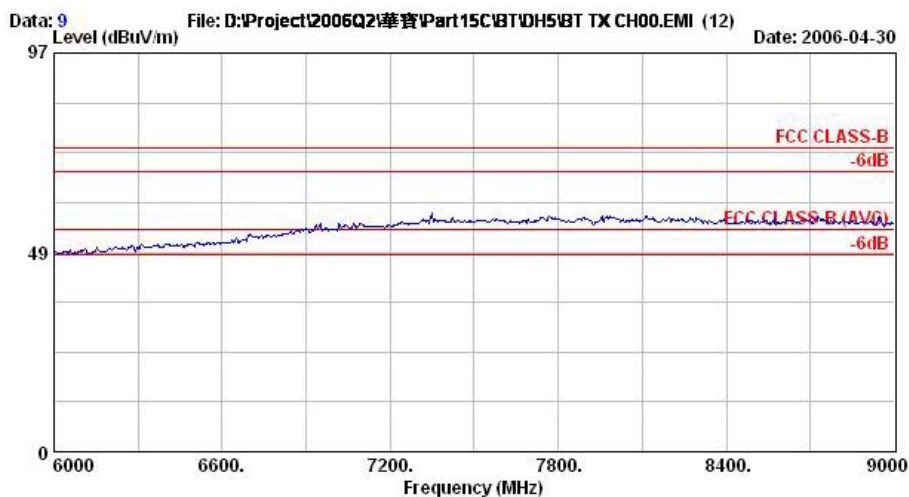


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH00_2402MHz




- Test Mode : Mode 8
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

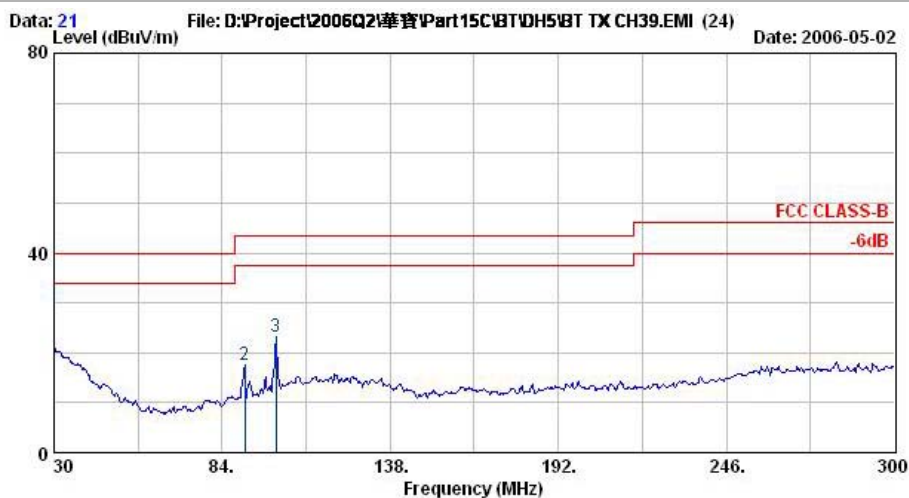

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	30.00	21.19	-18.81	40.00	33.05	QP	-11.86
2 @	91.29	17.59	-25.91	43.50	38.24	QP	-20.65
3 @	101.28	23.23	-20.27	43.50	42.30	QP	-19.07

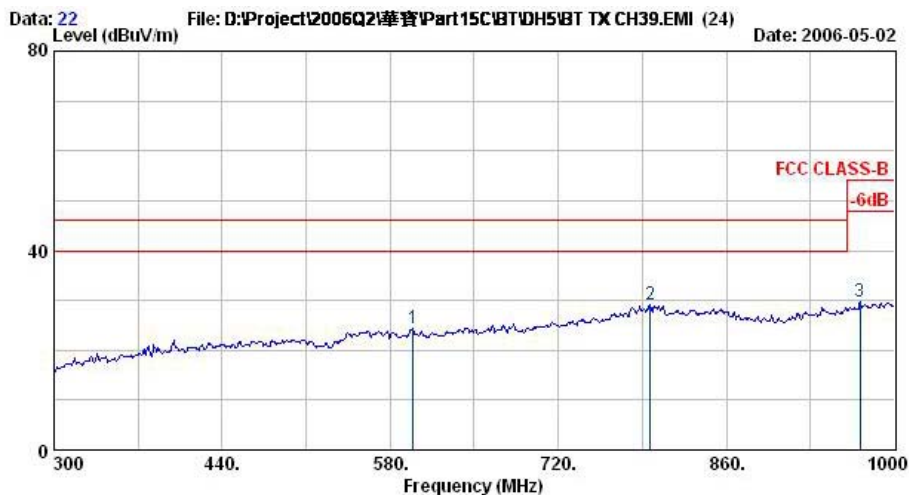


Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	598.90	24.37	-21.63	46.00	32.40	QP	-8.02
2 @	796.30	29.06	-16.94	46.00	31.84	QP	-2.78
3 @	971.30	29.66	-24.34	54.00	32.05	QP	-2.39




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

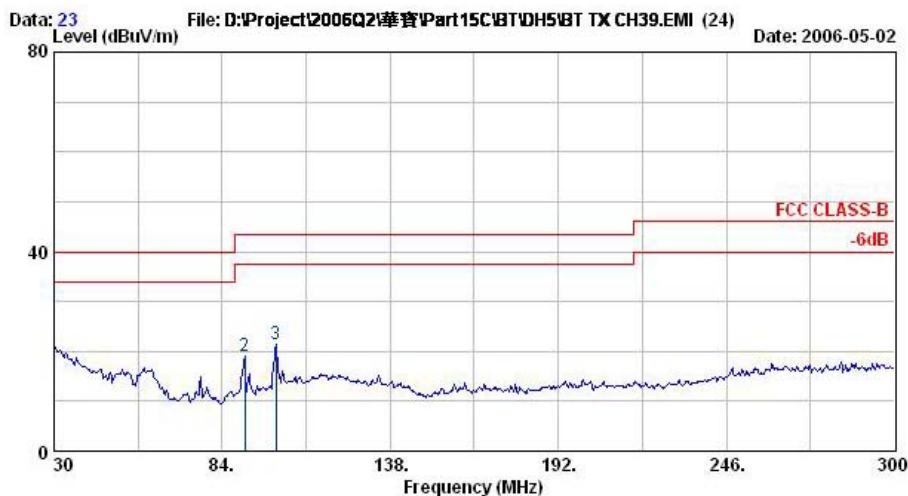

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	30.00	21.18	-18.82	40.00	33.04	QP	-11.86
2 @	91.29	19.08	-24.42	43.50	39.73	QP	-20.65
3 @	101.28	21.44	-22.06	43.50	40.50	QP	-19.07

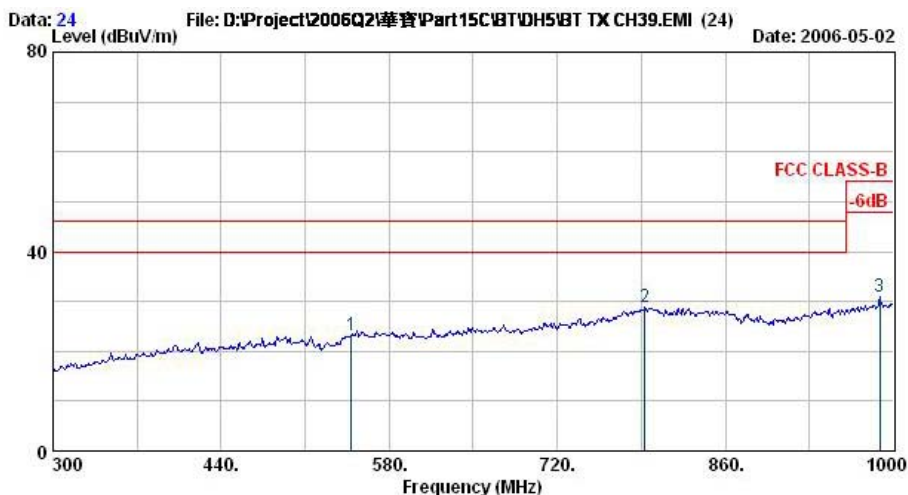


Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	548.50	23.07	-22.93	46.00	30.77	QP	-7.70
2 @	792.80	28.89	-17.11	46.00	31.85	QP	-2.96
3 @	988.80	30.98	-23.02	54.00	32.53	QP	-1.56




- Test Mode : Mode 9
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

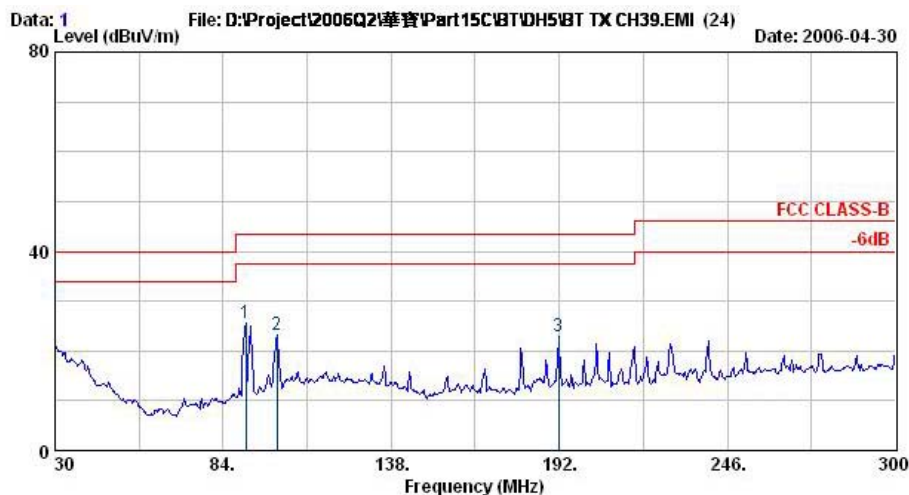

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	91.29	25.69	-17.81	43.50	46.35	QP	-20.65
2 @	101.28	23.14	-20.36	43.50	42.20	QP	-19.07
3 @	191.73	22.75	-20.75	43.50	41.75	QP	-19.00

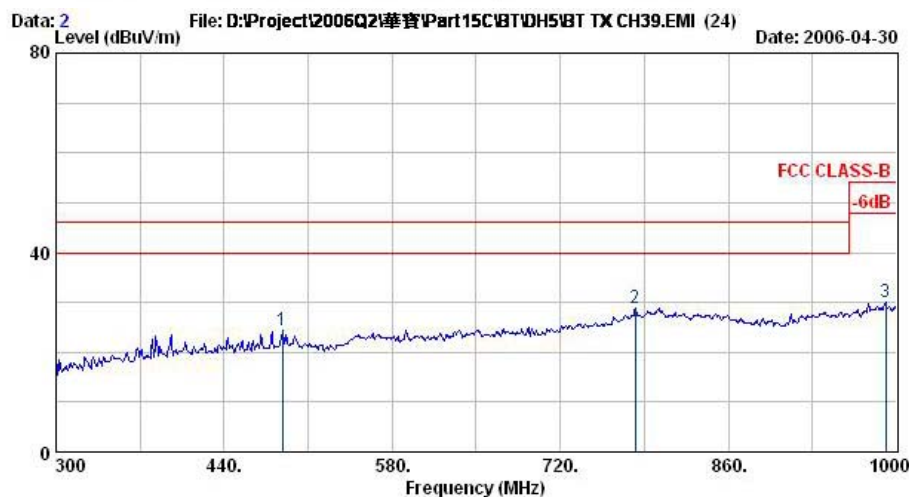

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH39_2441MHz


	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Remark	Factor
			dB	dBuV/m	dBuV		dB
1 @	488.30	24.36	-21.64	46.00	33.65	QP	-9.29
2 @	782.30	28.95	-17.05	46.00	32.25	QP	-3.30
3 @	990.90	29.93	-24.07	54.00	31.43	QP	-1.50



FCC/IC TEST REPORT

Report No. : FR650602

Data: 3 File: D:\Project\2006Q2\華寶\Part15C\BT\DH5\BT TX CH39.EMI (24) Date: 2006-04-30
Level (dBuV/m)

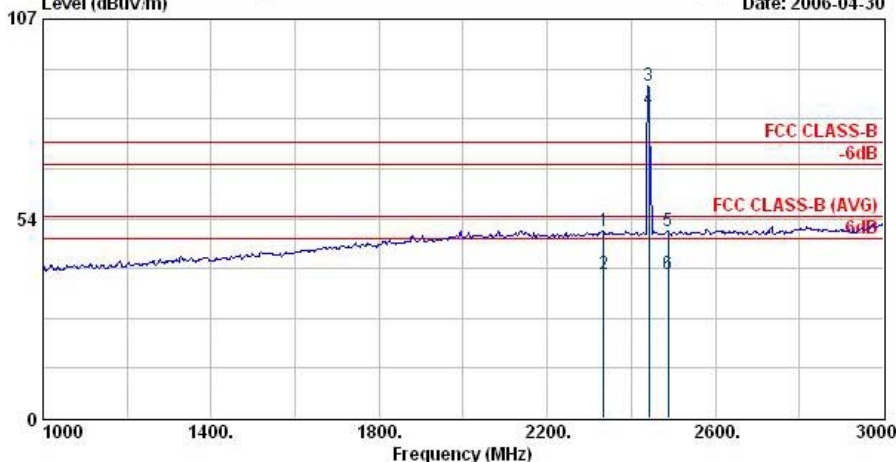


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2334.00	50.24	-23.76	74.00	51.25	Peak	-1.00
2 @	2334.00	38.70	-15.30	54.00	39.70	Average	-1.00
3 @	2441.00	89.11			90.01	Peak	-0.90
4 @	2441.00	82.90			83.79	Average	-0.89
5 @	2488.00	50.11	-23.89	74.00	50.97	Peak	-0.85
6 @	2488.00	38.73	-15.27	54.00	39.58	Average	-0.85

Remark: #3 and #4 Fundamental Signal

Data: 4 File: D:\Project\2006Q2\華寶\Part15C\BT\DH5\BT TX CH39.EMI (24) Date: 2006-04-30
Level (dBuV/m)

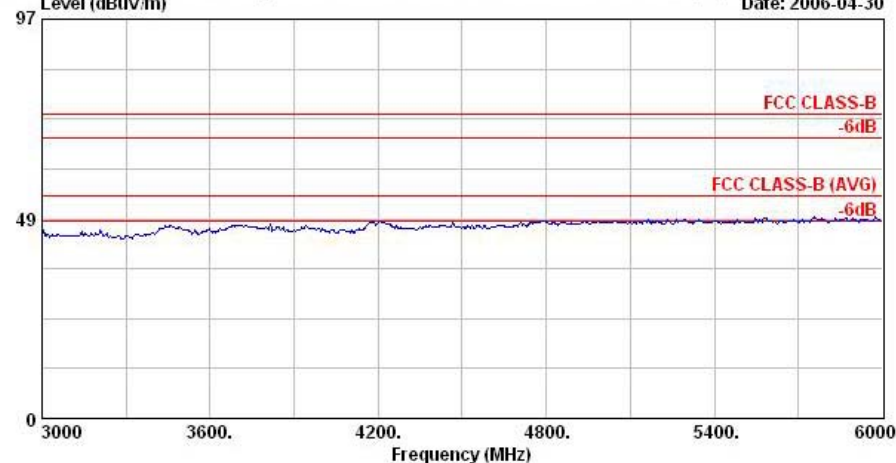


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH39_2441MHz



FCC/IC TEST REPORT

Report No. : FR650602

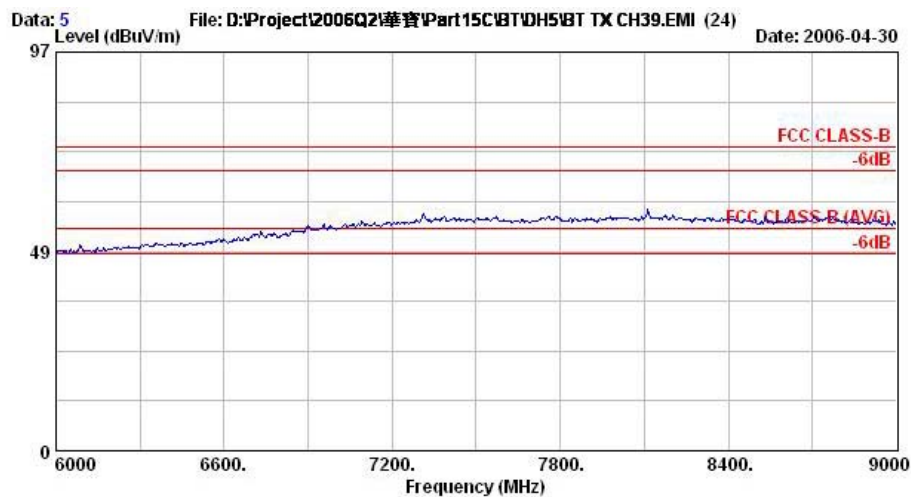


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH39_2441MHz




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

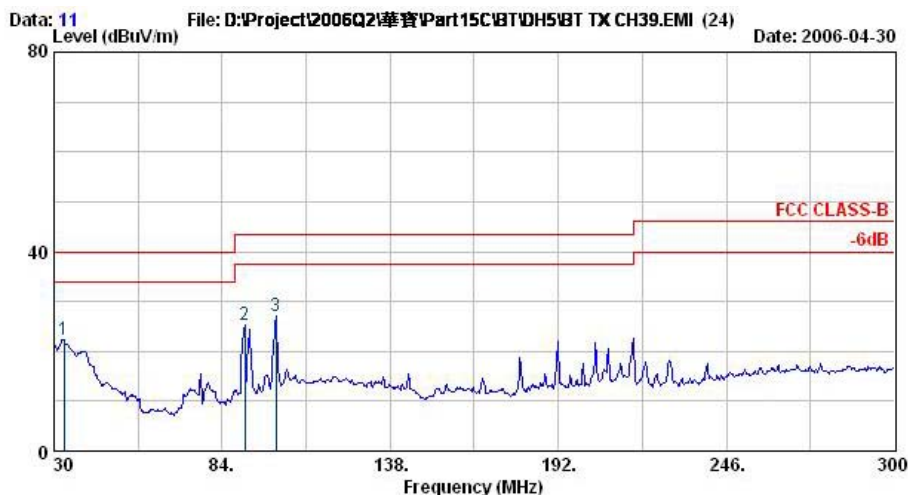

Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	33.24	22.27	-17.73	40.00	35.10	QP	-12.84
2 @	91.29	25.38	-18.12	43.50	46.03	QP	-20.65
3 @	101.28	27.17	-16.33	43.50	46.23	QP	-19.07

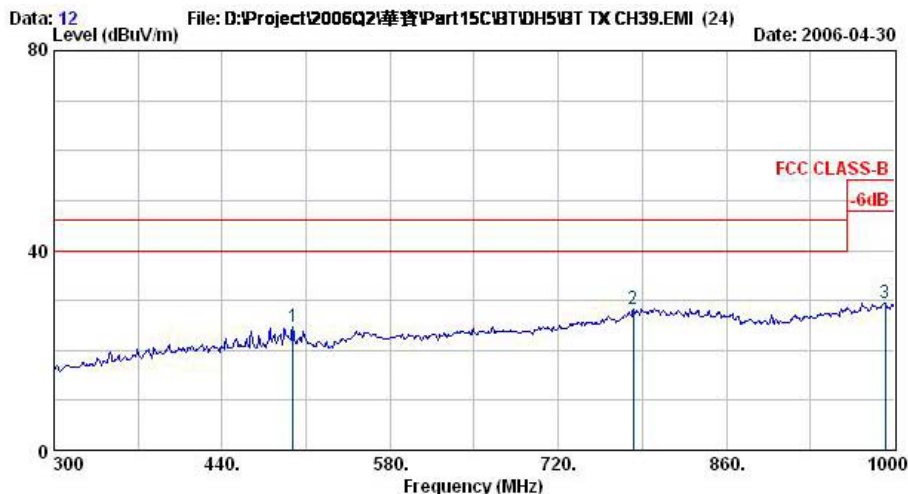


Site : 03CH06-HY
Condition : BI-LOG-2004-1122 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	498.80	24.83	-21.17	46.00	34.05	QP	-9.23
2 @	782.30	28.37	-17.63	46.00	31.67	QP	-3.30
3 @	992.30	29.50	-24.50	54.00	30.99	QP	-1.49



FCC/IC TEST REPORT


Report No. : FR650602

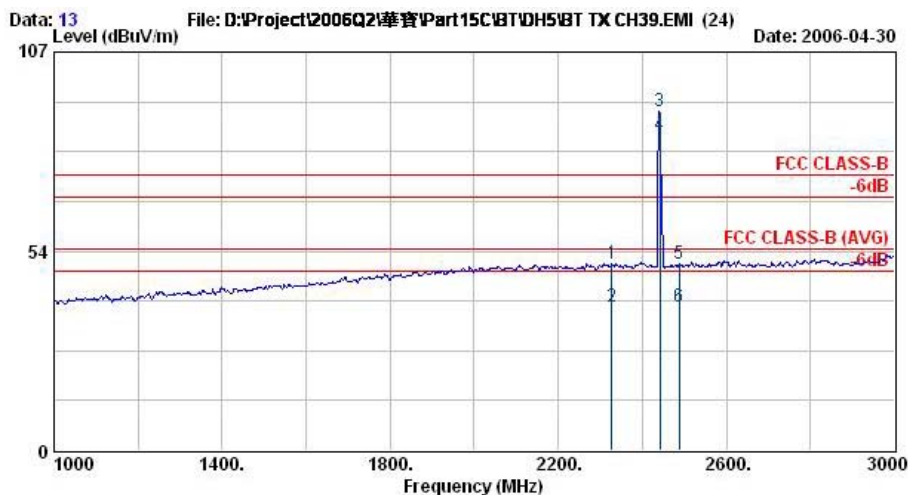

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH39_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	2328.00	50.06	-23.94	74.00	51.06	Peak	-1.00
2 @	2328.00	38.50	-15.50	54.00	39.50	Average	-1.00
3 @	2441.00	90.97			91.87	Peak	-0.90
4 @	2441.00	84.89			85.78	Average	-0.89
5 @	2488.00	50.05	-23.95	74.00	50.91	Peak	-0.85
6 @	2488.00	38.75	-15.25	54.00	39.60	Average	-0.85

Remark: #3 and #4 Fundamental Signal

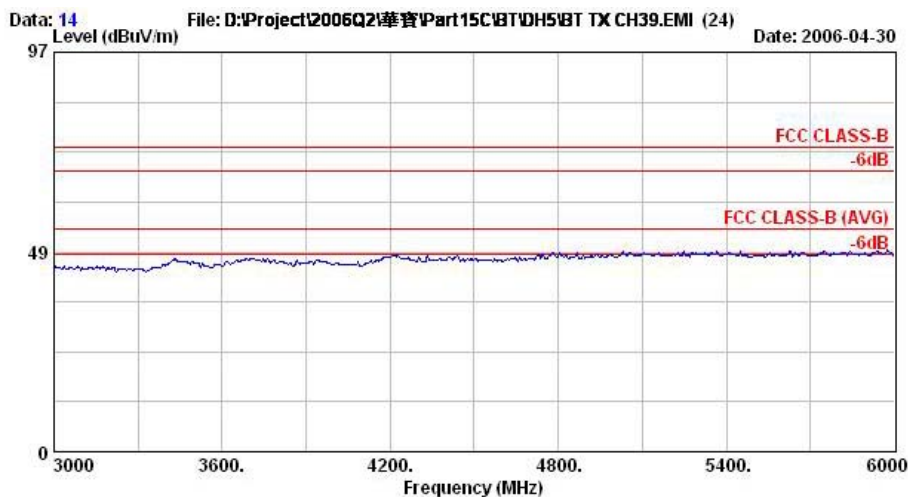


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH39_2441MHz



FCC/IC TEST REPORT

Report No. : FR650602

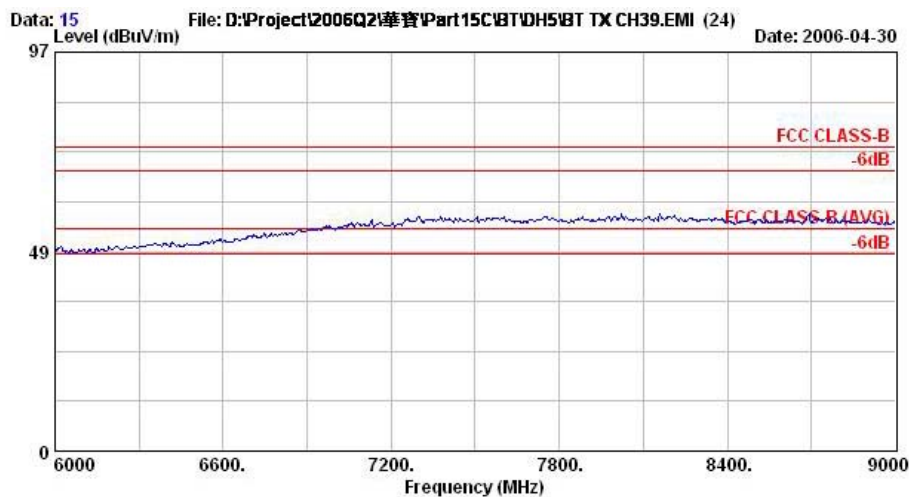


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W/1A)
Model : UPA2
Memo : BT TX CH39_2441MHz



- Test Mode : Mode 10
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

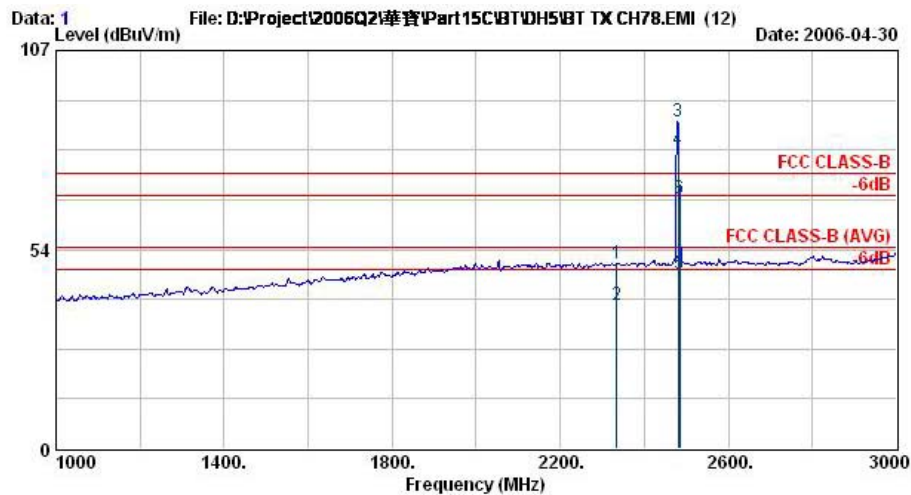

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH78_2480MHz


	Freq	Level	Over	Limit	Read		Factor
	MHz	dBuV/m	Limit	Line	Level	Remark	dB
1	2334.00	49.90	-24.10	74.00	50.91	Peak	-1.00
2 @	2334.00	38.56	-15.44	54.00	39.56	Average	-1.00
3 @	2480.00	88.03			88.89	Peak	-0.86
4 @	2480.00	80.30			81.16	Average	-0.86
5 @	2483.50	47.11	-6.89	54.00	47.97	Average	-0.86
6 @	2483.50	67.28	-6.72	74.00	68.14	Peak	-0.86

Remark: #3 and #4 Fundamental Signal




FCC/IC TEST REPORT

Report No. : FR650602

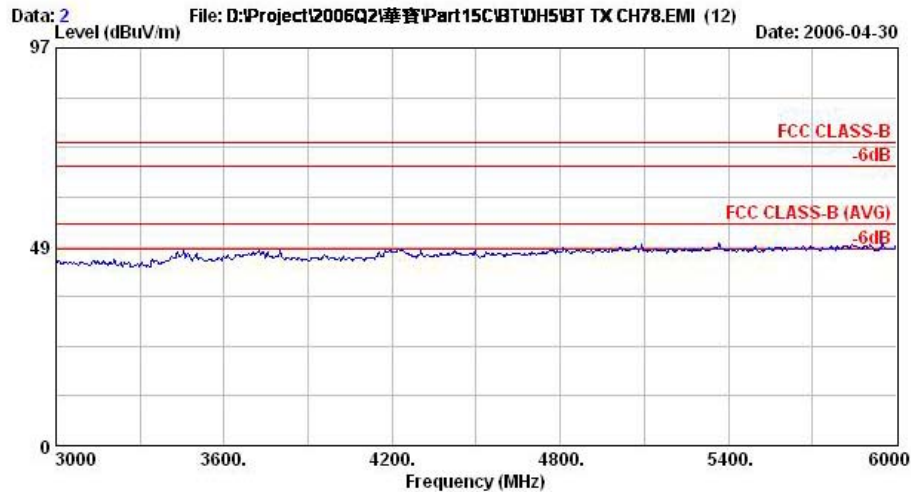

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH78_2480MHz

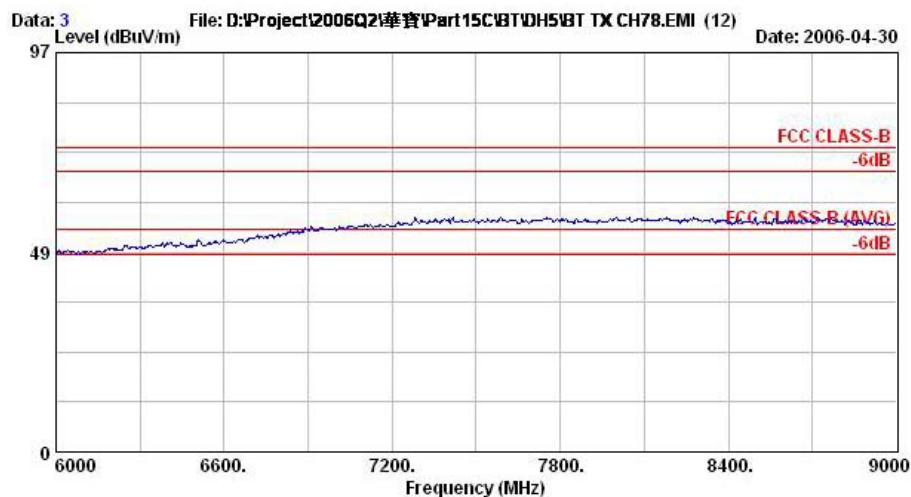


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)
Model : UPA2
Memo : BT TX CH78_2480MHz



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

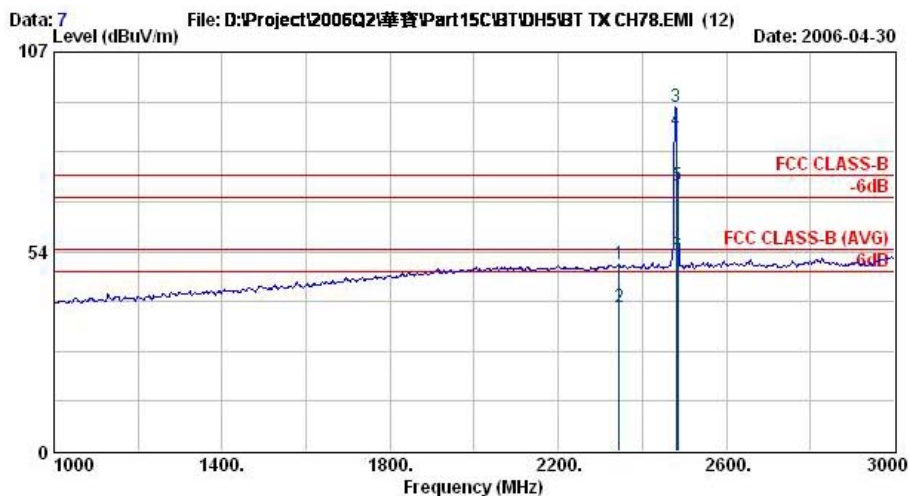

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH78_2480MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		
			dB	dBuV/m	dBuV		dB
1	2344.00	49.96	-24.04	74.00	50.95	Peak	-0.98
2 @	2344.00	38.44	-15.56	54.00	39.42	Average	-0.98
3 @	2480.00	92.41			93.27	Peak	-0.86
4 @	2480.00	85.76			86.62	Average	-0.86
5 @	2483.50	71.37	-2.63	74.00	72.23	Peak	-0.86
6 @	2483.50	52.66	-1.34	54.00	53.52	Average	-0.86

Remark: #3 and #4 Fundamental Signal

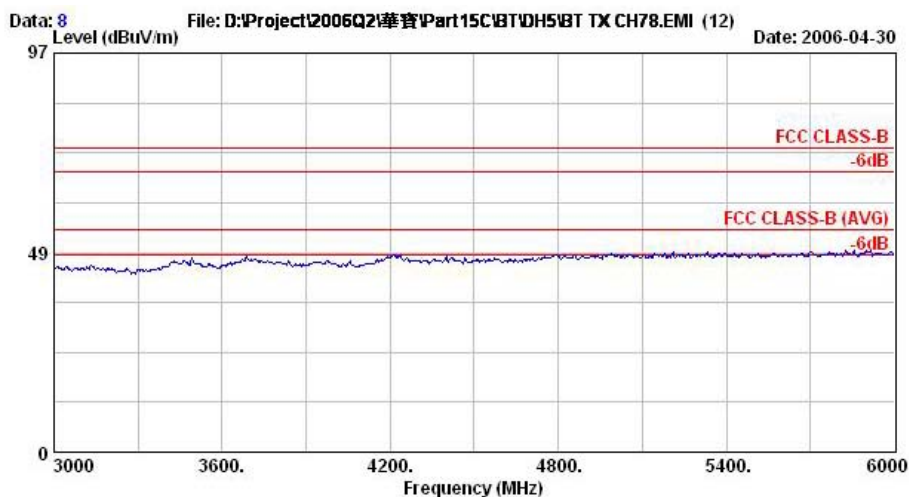


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)
Model : UPA2
Memo : BT TX CH78_2480MHz



FCC/IC TEST REPORT

Report No. : FR650602

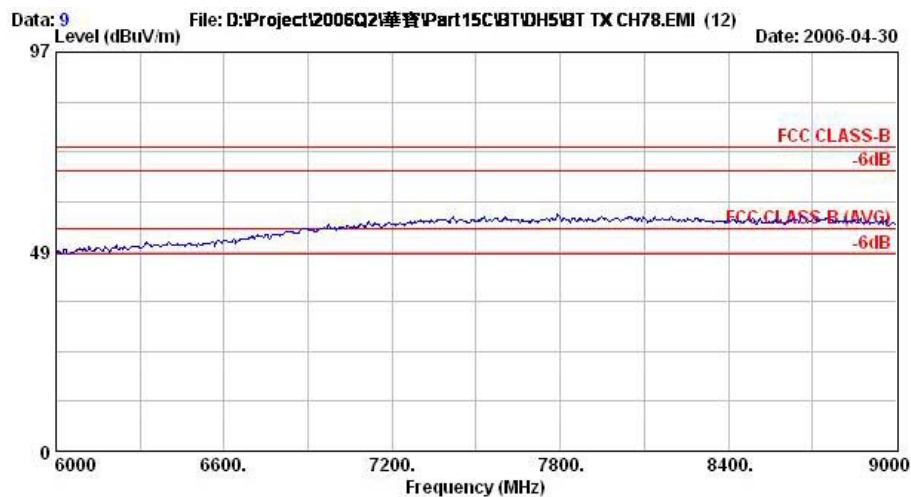

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : PDA Phone
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V/1A)
Model : UPA2
Memo : BT TX CH78_2480MHz

Remark: Testing was performed to 25GHz. No emissions closer than 20dB of the limit was detected other than those shown in the data above.



5.12 Antenna Requirements

5.12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.12.2 Antenna Connected Construction

The antennas used in this product are PIFAs for both WLAN and BT. The connector is Finger on antenna port and it is considered to meet antenna requirement of FCC.

5.12.3 Antenna Gain

The antenna gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

6. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Jun. 28, 2005	Jun. 28, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 29, 2006	Mar. 29, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Apr. 19, 2006	Apr. 19, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 22, 2005	Dec. 22, 2006	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Dec. 22, 2005	Dec. 22, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 25, 2005	Jul. 24, 2006	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	Jun. 28, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	N/A	N/A	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Nov. 22, 2004	Nov. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Feb. 1, 2005	Feb. 1, 2007	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)

7. Uncertainty Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
combined standard uncertainty $U_c(y)$	1.13		
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	2.26		

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty $U_c(y)$	1.27		
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	2.54		

**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				