



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Ed/Rév : 0002/00
Traduction : EN
Mémo : 624480
Date : 08/02/2002

SIEMENS

Projet / Project

NYL
Canarsie Line CBTC System
Contract S-32701

Arborescence / Technical number

CBTC/1350/DS/10

Type de document / *Type of document*

CATALOG CUT SHEET

TITRE / TITLE

TRANSPONDER INTERROGATOR ANTENNAE (TIA)

Mots clés descripteurs / *Descriptors*

Rédacteur / *Author*

G. LEDOUX

Nombre de pages / *Number of pages*

9

APPROBATION / APPROVAL

Nom / <i>Name</i>	Fonction / <i>Function</i>	Date / <i>Date</i>	Signature / <i>Signature</i>
Prepared by G. LEDOUX	E&SW Architecture Designer		
Checked by M. GOUVEA V. POUZOL	Hardware Quality Engineer Hardware Technical Supervisor		
Authorized by: D. GRIMBERT	Siemens MTI Project Manager		



Ed/Rév :0002/00 Trad.: EN
Date : 08/02/2002

SIEMENS

Edition / Révision <i>Version number</i>	Date <i>Date</i>	§ concernés <i>Affected §</i>	Modification <i>Change</i>	Justification <i>Justification</i>
00/00	07/09/01	All		First issue
01/00	09/11/01	All	Minor form corrections	
02/00	08/02/02	Annexe		FCC information



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

TABLE OF CONTENTS

1.	ENVIRONMENT CLASSIFICATION	4
2.	PRODUCT FUNCTION.....	4
3.	PRODUCT INSTALLATION CONSTRAINTS	4
4.	ELECTRICAL INTERFACE.....	4
5.	MECHANICAL INTERFACE	4
6.	ILLUSTRATIONS	5
7.	RAMS	6
8.	ENVIRONMENTAL CHARACTERISTICS	6
9.	EMI / EMC	6
10.	GLOSSARY.....	7
11.	REFERENCES	7
	ANNEXE A : FCC INFORMATION	8
	END OF DOCUMENT	9



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

1. ENVIRONMENT CLASSIFICATION

Environment Classification

Vehicle Interior	☐
Vehicle body Mounted	☐
Vehicle Truck Mounted	☒
Wayside Outdoors	☐
Wayside Equipment cases and Relay Rooms	☐
Computer Rooms	☐

2. PRODUCT FUNCTION

TIA receives signals from the transponders installed on the track. These data are processed by the carborne controller computer unit to verify and update the localization of the train.

3. PRODUCT INSTALLATION CONSTRAINTS

Location on the train – The TIA is secured to the center of the first truck of A1-car.

Positioning and mounting on the truck with reference to the TOR:

- ✕ Nominal height: 5.5"
- ✕ Maximum height: 5.82"
- ✕ Minimum height: 1.98"

4. ELECTRICAL INTERFACE

Input	Yes
Output	Yes
Protection	None

The TIA is linked to the OBCU by one specific shielded cable, made of 4 twisted shielded pairs featuring a 50 Ohms impedance at 10 MHz.

The cable is connected to the TIA to a Leatton Veam socket type: CIR 07R20.11P.F80.T100.V0 by means of a plug type CIRG06SB 18-20.11S.F80.T100.V0.

5. MECHANICAL INTERFACE

The transponder consist of a rectangular box, mechanically attached to the truck by means of 4 screws (3/8" grade 5) with a tied torque of 15 to 16 N.M (20.3 to 21.7 FT_LBF)..

The weight of a TIA is approximately 13 pounds.



New York City Transit


Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

6. ILLUSTRATIONS

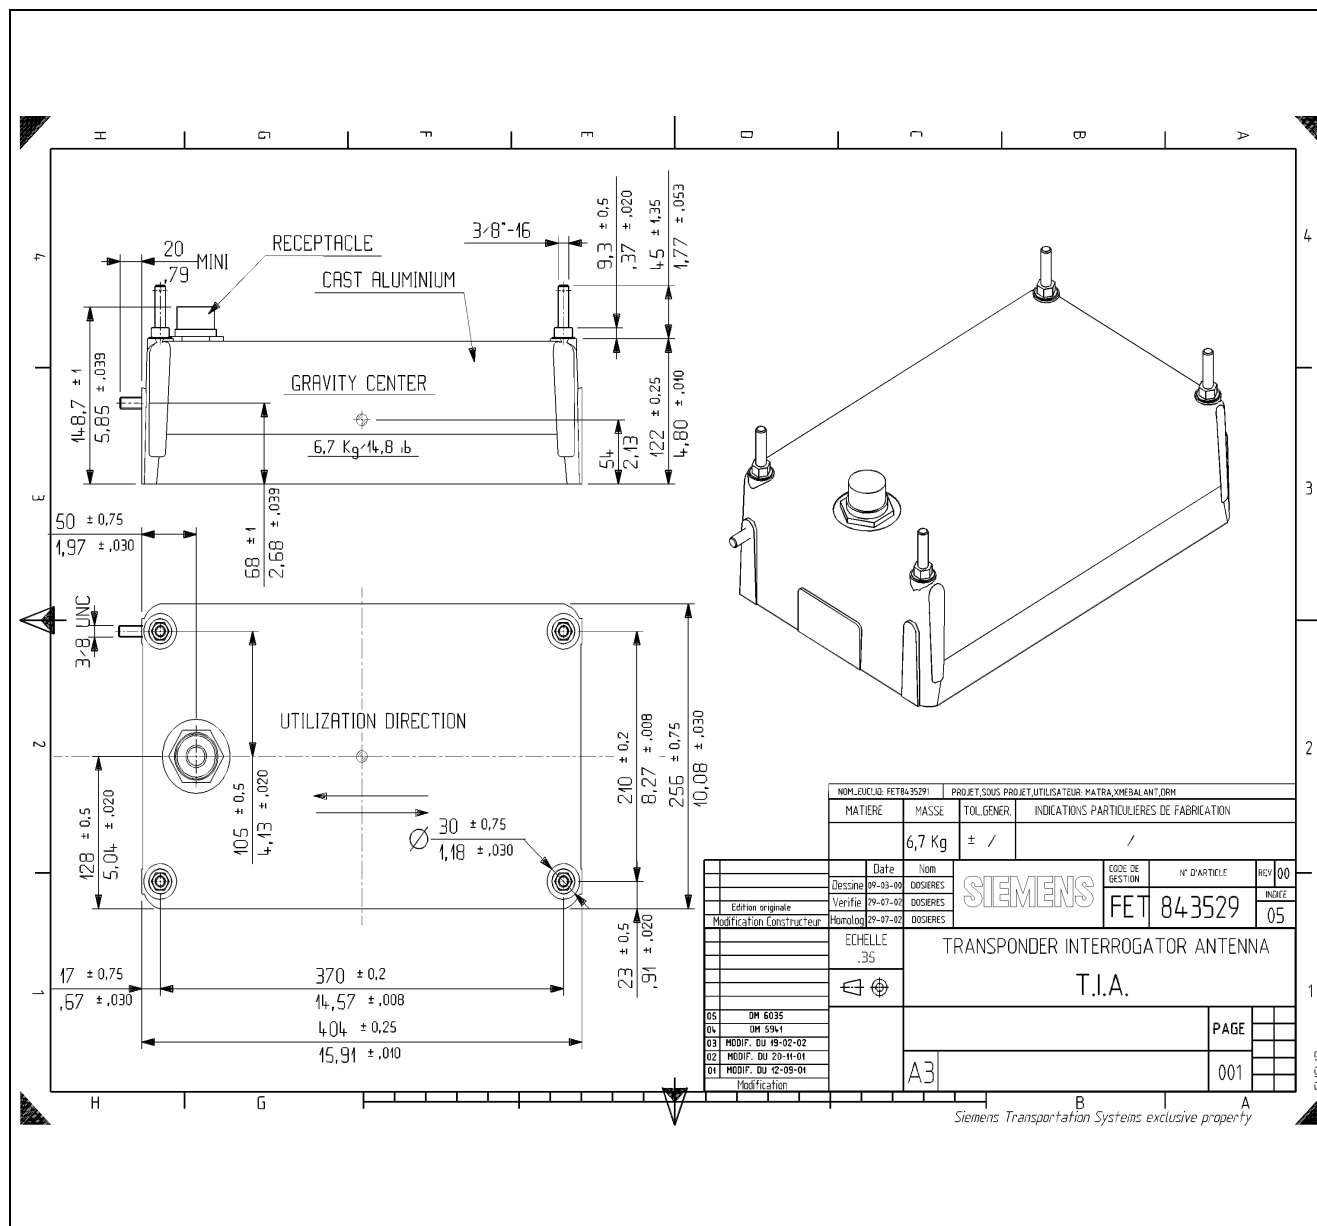

TIA Mechanical interface drawing



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

7. RAMS

Characteristic	Qualification standard or equivalent	Applied Level (when relevant)
MTBF	UTE C80 810	2 339 290 h
Electrical Insulation		500 V AC

8. ENVIRONMENTAL CHARACTERISTICS

Characteristic	Qualification standard or equivalent	Applied Level (when relevant)
Operating ambient temperature	MIL-STD-810F	-25°C / +70°C
Storage temperature	MIL-STD-810F	-40°C / +85°C
Shock (temperature)	N/A	
Humidity (non condensing)	MIL-STD-810F	95%
Sinusoidal vibration	N/A	
Random vibration	EN 61373	
Shock	EN 61373	30 g / 18 ms
Salt Fog	MIL-STD-810F	
Sand	EN 60529	IP65
Rain	EN 60529	IP65
Dust / Metallic Dust	EN 60529	IP65

9. EMI / EMC

Characteristic	Qualification standard or equivalent	Applied Level (when relevant)
Operating Frequencies	128 kHz and 9,984 MHz	
Emission	EN 50121-3-2	
Immunity	EN 50121-3-2	
FCC Part 15		



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

10. GLOSSARY

CBTC	Communication Based Train Control
CC	Carborne Controller
EMC	ElectroMagnetic Compatibility
EMI	ElectroMagnetic Induction
IP	Degree of Protection
N/A	Not Applicable
OBCU	On Board Computing Unit
TIA	Transponder Interrogator Antenna
TOR	Top Of Rail

11. REFERENCES

Canarsie Line CBTC System Contract S-32701
MIL-STD-810F
EN 50121-3
EN 60529
EN 61373
UTE C80 810



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

ANNEXE A : FCC INFORMATION

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

In accordance with FCC requirements, changes or modifications not expressly approved by Siemens Transportation Systems could void the user's authority to operate this product.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



New York City Transit

Réf. : DEL/NYL/39.1354.01/GLE/GLE
Mémo : 624480

Ed/Rév : 0002/00 Trad.: EN
Date : 08/02/2002

TRANSPONDER INTERROGATOR ANTENNAE
(TIA)

SIEMENS

END OF DOCUMENT