

Straubing, 20 September 2005

TEST - REPORT

No. 55426-050412 (Edition 2)

for

sd605

Inductive TAG Reader Module

Applicant: SKIDATA AG

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Radio Standards Specification
RSS-GEN, Sections 4.5, 7.2.2 and 7.2.4
and
RSS-210 Issue 6, Sections 2.2, 2.7 and
Annex 2.6

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures.....	8
6.1	Bandwidth Measurements	8
6.2	Pulse Train Measurement	9
6.3	Conducted AC Powerline Emission	10
6.4	Radiated Emission Measurement 9 kHz to 30 MHz	12
6.5	Radiated Emission in Fully or Semi Anechoic Room.....	14
6.6	Radiated Emission at Open Field Test Site	16
6.7	Carrier Frequency Stability	17
7	Photographs Taken During Testing	19
8	Test Results.....	31
8.1	Occupied Bandwidth.....	33
8.2	Emission Bandwidth	38
8.3	Designation of Emissions	43
8.4	Pulse Train Measurement	44
8.5	Restricted Bands of Operation	47
8.6	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	48
8.7	Spectrum Mask.....	49
8.8	Radiated Emission Measurement 9 kHz to 30 MHz	51
8.9	Radiated Emission Measurement 30 MHz to 1 GHz	56
8.10	Carrier Frequency Stability	59
8.11	Exposure of Humans to RF Fields.....	62
9	Referenced Regulations	64
10	Charts taken during testing	65

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	sd605
Parts ² : and Serial number(s):	sd605 (V4.2): D052000585 Antenna sd611 (V1.2): D044500823 Antenna sd612 (V1.2): D052500149 Antenna sd647 (V2.1): D051000069 Antenna sd648 (V1.1): D051000071
Manufacturer:	SKIDATA AG
Type of equipment:	Inductive TAG Reader Module
Version:	As delivered
FCC ID:	QSS-SD605
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	119 - 127 kHz and 13.553 - 13.567 MHz
Frequency range:	119 - 127 kHz and 13.553 - 13.567 MHz
Operating frequency:	122 kHz and 13.56 MHz
Type of modulation:	ASK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	2 (122 kHz and 13.56 MHz)
Channel spacing:	Not Applicable
Designation of emissions ³ :	10K0A1D
Type of antenna:	Up to two external antennas
Size/length of antenna:	Antenna sd611 (V1.2): 145 x 95 mm Antenna sd612 (V1.2): 90 x 90 mm Antenna sd647 (V2.1): 52 x 40 mm Antenna sd648 (V1.1): 70 x 52 mm
Connection of antenna:	☒ detachable ☐ not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 5.00 V minimum voltage: 4.75 V maximum voltage: 5.25 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	SKIDATA AG Untersbergstraße 40 A-5083 Grödig
Contact person:	Mr. Christoph Sonderegger
Contract identification:	---
Receipt of EUT:	25 August 2005
Date(s) of test:	September 2005
Note(s):	---

Report details	
Report number:	55426-050412
Edition:	2
Issue date:	20 September 2005

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

**Radio Standards Specification RSS-GEN, Sections 4.5, 7.2.2 and 7.2.4
and**

RSS-210 Issue 6, Sections 2.2, 2.7 and Annex 2.6

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

- Continuous transmission, alternating frequency, waiting for TAG.
- Reading 122 kHz TAG continuous, 13.56 MHz frequency not active.
- Reading 13.56 MHz TAG continuous, 122 kHz frequency not active.

Configuration(s) of EUT

EUT was configured as stand alone device.
 The EUT owns two electric identical channels, thus for measurements the EUT was configured with one of the four delivered antennas.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	DC 5 V supply	dc power	Unshielded	< 1m ⁵
2	Antenna port X1 (122 kHz)	signal/control port	Unshielded	< 1m ⁵
3	Antenna port X2 (122 kHz)	signal/control port	Unshielded	< 1m ⁵
4	Antenna port X3 (13.56 MHz)	signal/control port	Unshielded	< 1m ⁵
5	Antenna port X4 (13.56 MHz)	signal/control port	Unshielded	< 1m ⁵

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	sd611	Antenna	D044500823	SKIDATA AG
2	sd612	Antenna	D052500149	SKIDATA AG
3	sd647	Antenna	D051000069	SKIDATA AG
4	sd648	Antenna	D051000071	SKIDATA AG

List of support devices

Not Applicable


⁴ Ports shall be classified as ac power, dc power or signal/control port

⁵ EUT is intended for internal usage in a system.

6 Measurement Procedures


6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-GEN Issue 1, section 4.4.1 IC RSS-210 Issue 6, section annex 1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-GEN Issue 1, section 4.4.1
Measurement setup:	☐ Conducted: See below ☒ Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.4)
If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. The analyzer settings are specified by the test description of the appropriate test record(s).	

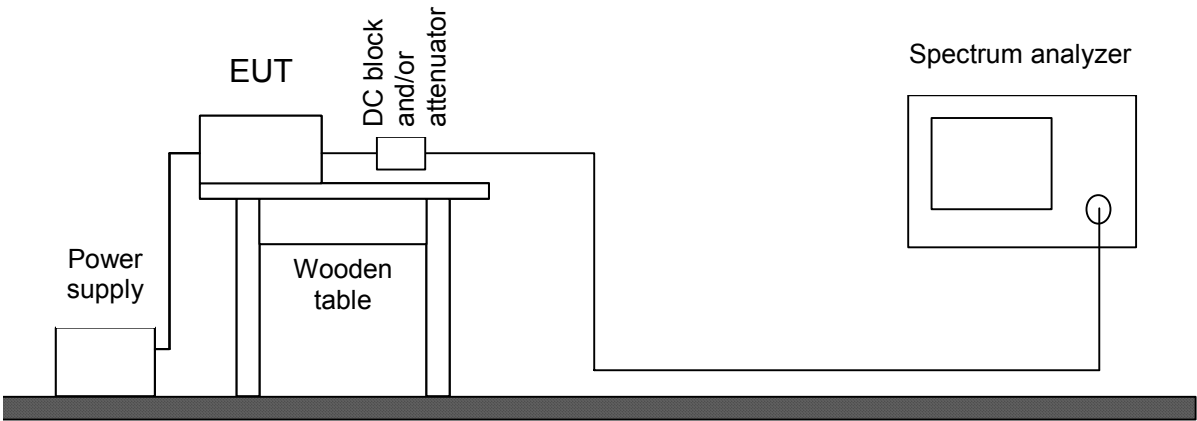


6.2 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-GEN Issue 1, section 4.3
Guide:	ANSI C63.4
Measurement setup:	☐ Conducted: See below (direct connection or via test fixture) ☒ Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.4)
If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals. If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.	

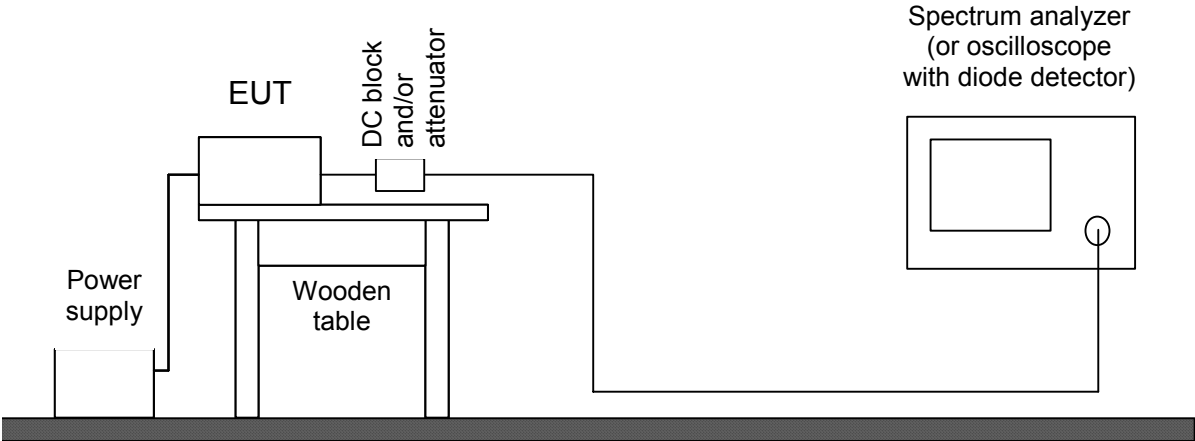

6.3 Conducted AC Powerline Emission

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 1, section 7.2.2
Guide:	ANSI C63.4 / CISPR 22
Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used: First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average (CFR 47 Part 15) or quasi-peak (IC RSS-210) limit are retested with detector set to quasi-peak. If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed. According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.	

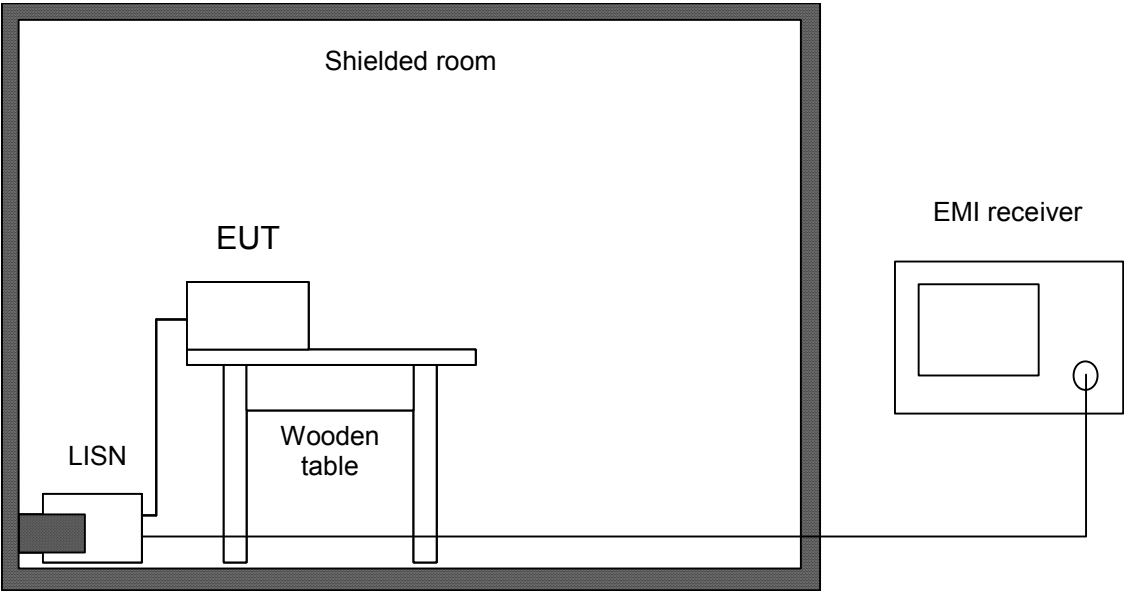


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
☒	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
☐	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
☐	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
☒	Shielded room	No. 1	1451	Albatross Projects
☐	Shielded room	No. 4	3FD-100 544	Euroshield

6.4 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 6, sections 2.2(b)-(c), 2.7 Table 3 and Annex 2.6
Guide:	ANSI C63.4
Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. Due to fixed polarization of the loop antenna, if possible, the EUT is put into a position that gives the maximum levels of emissions. Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.	

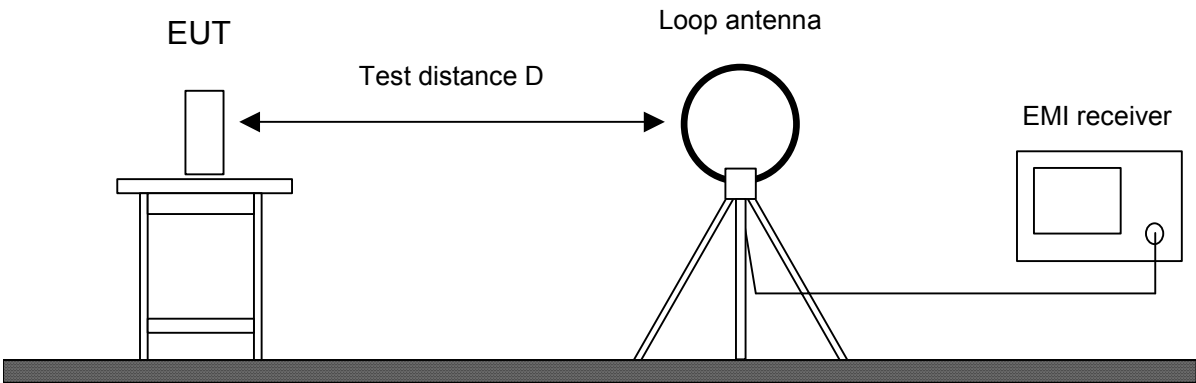


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☐	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
☒	Test receiver	ESCI 3	10008	Rohde & Schwarz
☐	Preamplifier	CPA9231A	3393	Schaffner
☒	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
☒	Fully anechoic room	No. 2	1452	Albatross Projects
☐	Semi-anechoic room	No. 3	1453	Siemens
☒	Open field test site	EG 1	1450	Senton

6.5 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2
Guide:	ANSI C63.4
Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.	

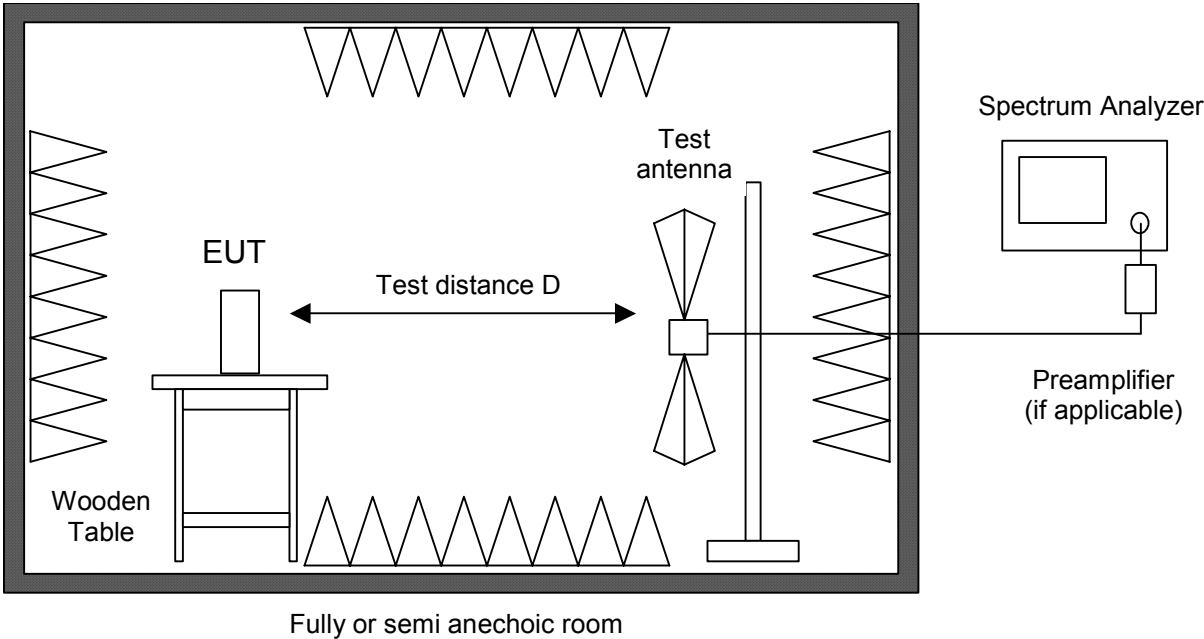


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	Spectrum analyzer	R 3271	05050023	Advantest
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	CPA9231A	3393	Schaffner
☐	Preamplifier	R14601		Advantest
☐	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
☐	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
☐	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
☐	External Mixer	WM782A	845881/005	Tektronix
☐	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
☒	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
☐	Horn antenna	3115	9508-4553	EMCO
☐	Horn antenna	3160-03	9112-1003	EMCO
☐	Horn antenna	3160-04	9112-1001	EMCO
☐	Horn antenna	3160-05	9112-1001	EMCO
☐	Horn antenna	3160-06	9112-1001	EMCO
☐	Horn antenna	3160-07	9112-1008	EMCO
☐	Horn antenna	3160-08	9112-1002	EMCO
☐	Horn antenna	3160-09	9403-1025	EMCO
☐	Horn antenna	3160-10	399185	EMCO
☒	Fully anechoic room	No. 2	1452	Albatross Projects
☐	Semi-anechoic room	No. 3	1453	Siemens

6.6 Radiated Emission at Open Field Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2
Guide:	ANSI C63.4
Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

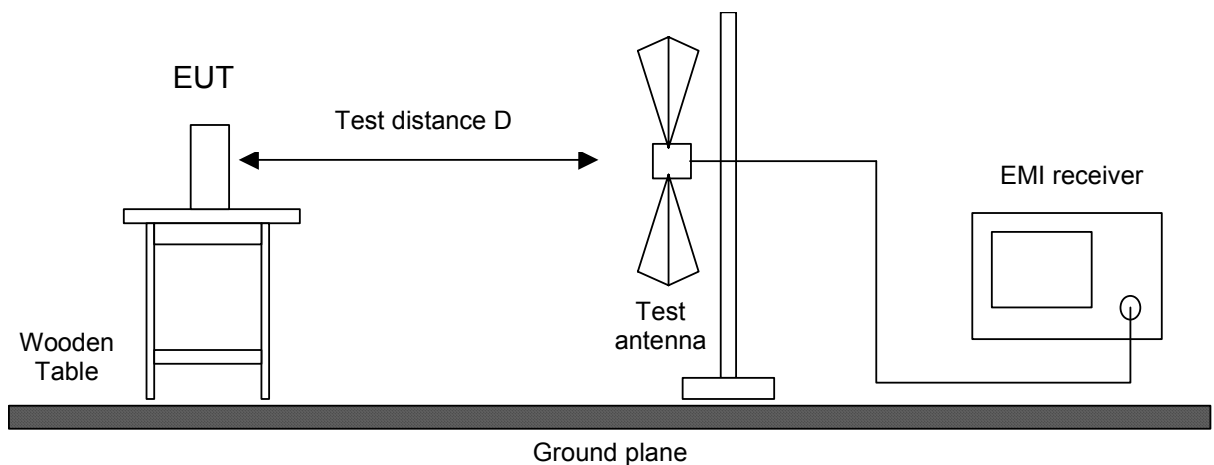


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	EMI receiver	ESVP	881414/009	Rohde & Schwarz
☒	Biconical antenna	EG 1 HK 116	842204/001	Rohde & Schwarz
☒	Log. per. antenna	EG 1 HL 223	841516/023	Rohde & Schwarz
☒	Open field test site	EG 1	1450	Senton

6.7 Carrier Frequency Stability

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-GEN Issue 6, sections 4.5 and 7.2.4
Guide:	ANSI C63.4
The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C. If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used. For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to: • the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage • the battery nominal voltage • 85% of the battery nominal voltage • the battery operating end point voltage which shall be specified by the equipment manufacturer The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance. If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.	

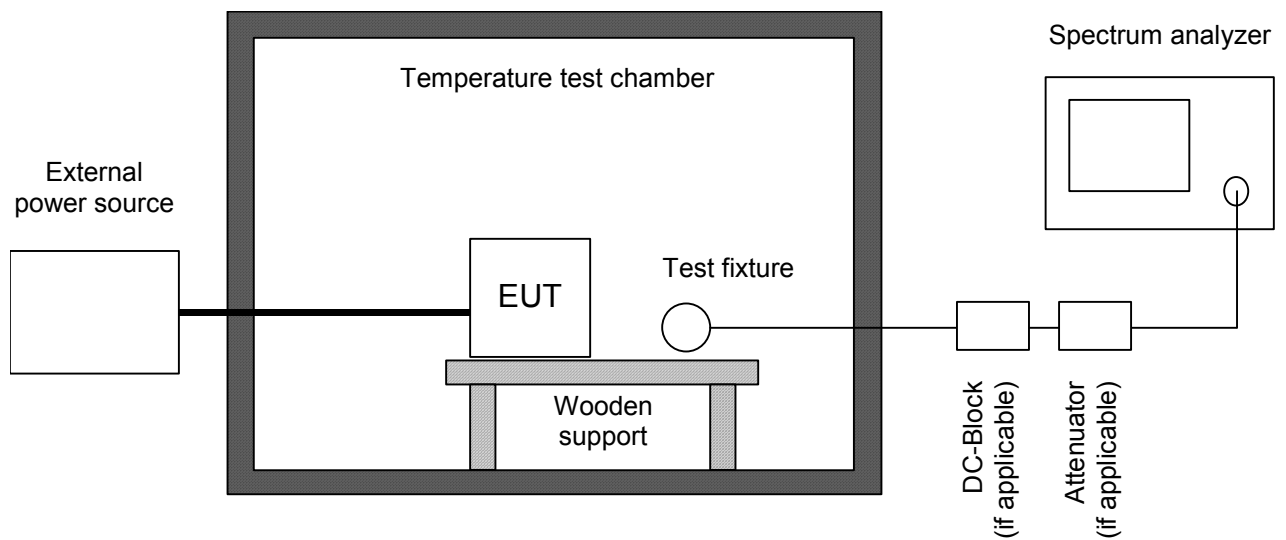


Test instruments used:



Used	Type	Model	Serial No. or ID	Manufacturer
☐	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☒	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☐	DC-block	7006	A2798	Weinschel
☐	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda
☒	Test probe	TP01	001	Senton
☒	DC power supply	NGSM 32/10	203	Rohde & Schwarz
☐	Isolating transformer	RT 5A	10387	Grundig
☐	Isolating transformer	RT 5A	10416	Grundig
☒	Temperature test chamber	HT4010	07065550	Heraeus

7 Photographs Taken During Testing


Test setup for conducted DC powerline emission measurement

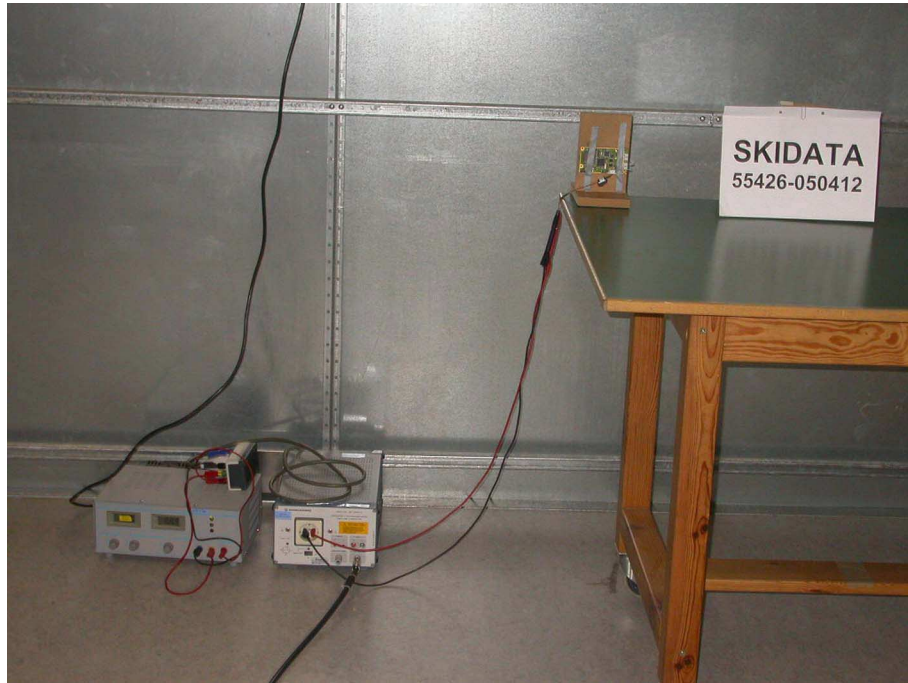


Test setup for radiated emission measurement 9 kHz – 30 MHz

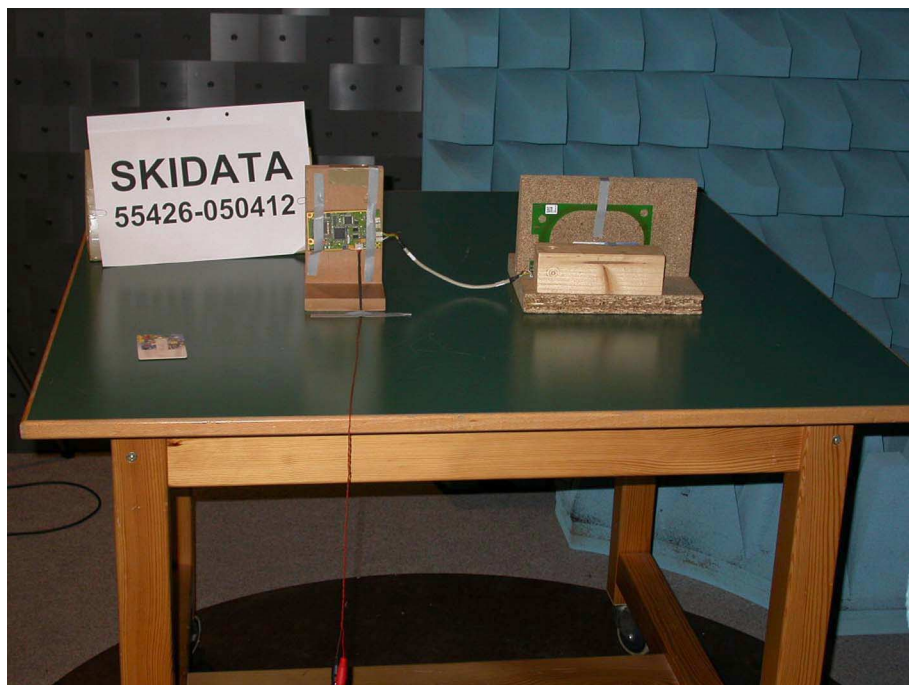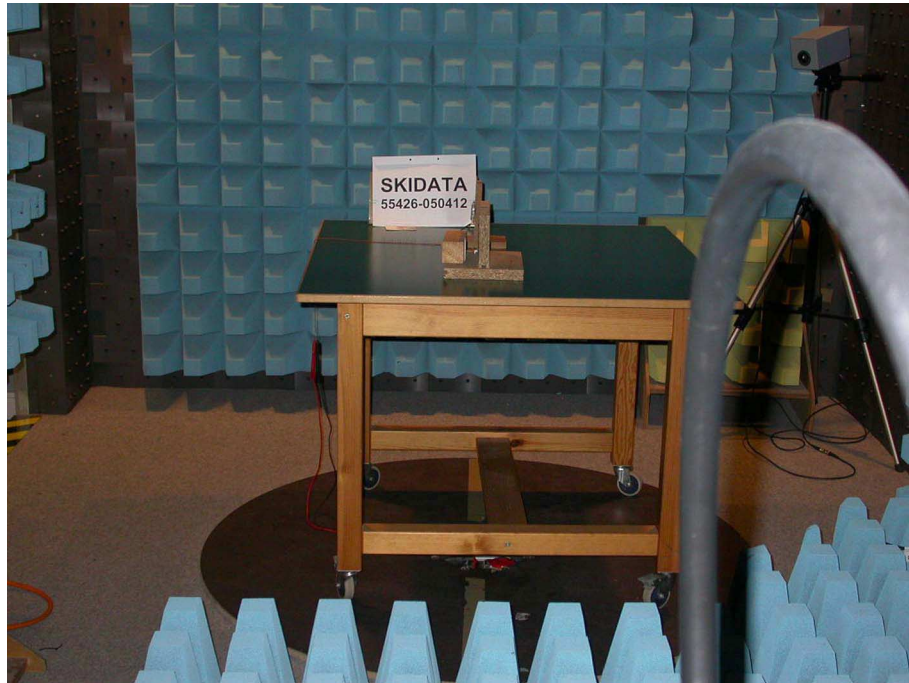

**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**

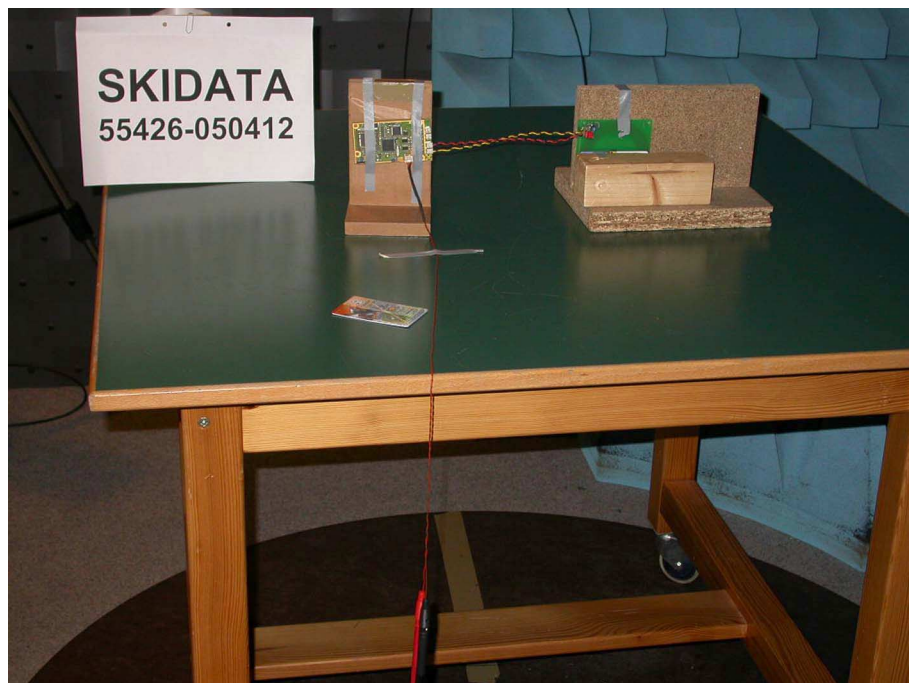


**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**

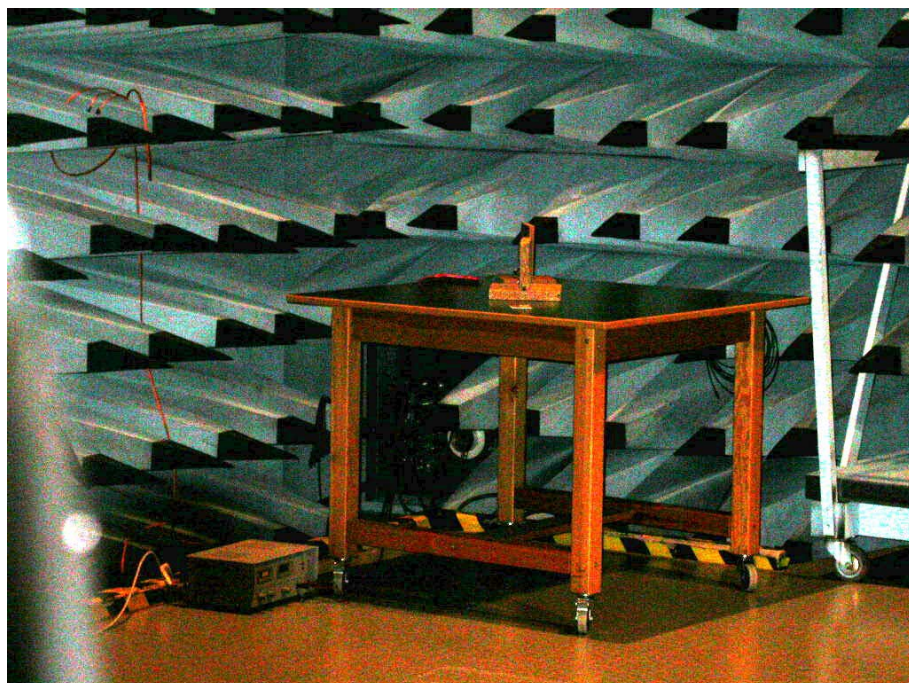


Setup for measurement for Restricted Bands Requirement

**Test setup for radiated emission measurement
(fully anechoic room)**

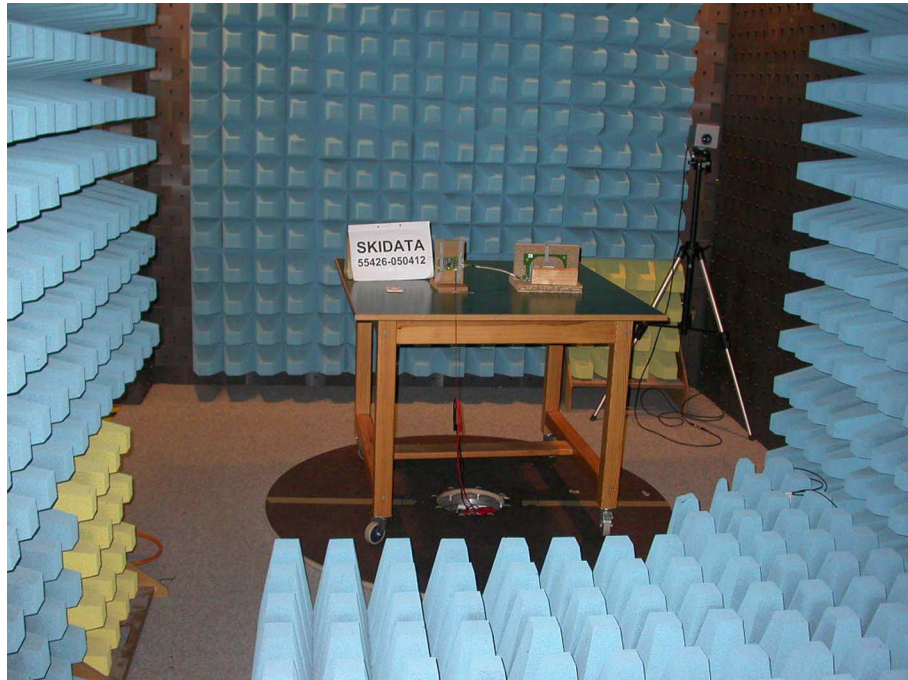

**Test setup for radiated emission measurement
(fully anechoic room) - continued -**

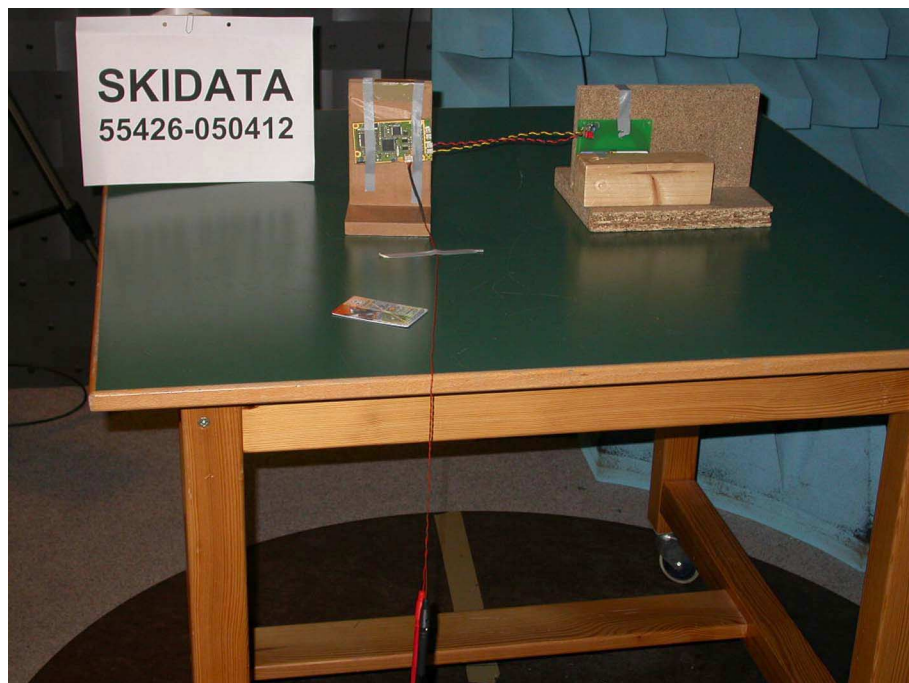

**Test setup for radiated emission measurement
(fully anechoic room) - continued -**



**Test setup for radiated emission measurement
(open field test site)**



**Test setup for radiated emission measurement
(open field test site) - continued -**



**Test setup for radiated emission measurement
(open field test site) - continued -**



**Test setup for radiated emission measurement
(open field test site) - continued -**



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	33	Recorded
15.215(c)	Bandwidth of the emission	38	Test passed
2.201, 2.202	Class of emission	43	Calculated
15.35(c)	Pulse train measurement for pulsed operation	44	Recorded
15.205(a) 15.205(d)(7)	Restricted bands of operation	47	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz ⁶	48	Test passed
15.225(a)-(d)	Spectrum Mask	49	Test passed
15.205 15.215(b) 15.225(a)-(d)	Radiated emission 9 kHz to 30 MHz	51	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	56	Test passed
15.225(e)	Carrier frequency stability	59	Test passed

⁶ Performed as "Conducted DC powerline emissions"

IC RSS-GEN Issue 1

<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
7.2.3.1	Antenna conducted output power	---	Not applicable
4.4.1	Occupied bandwidth	38	Recorded
3.2	Designation of emissions	43	Calculated
4.3	Pulsed operation	44	Recorded
7.2.2	Transmitter AC wireline conducted emissions 150 kHz to 30 MHz ⁷	48	Test passed
4.5 7.2.4	Carrier frequency stability	59	Test passed
5.5	Exposure of Humans to RF fields	62	Calculated

IC RSS-210 Issue 6

<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
Annex 2.6 2.2(a) 2.7 Table 1	Restricted bands and unwanted emission frequencies	47 ⁸	Test passed
Annex 2.6	Spectrum Mask	49	Test passed
Annex 2.6 2.2(b)-(c) 2.7 Table 3	Field strength of emissions 9 kHz to 30 MHz	51	Test passed
2.2(b)-(c) 2.7 Table 2	Field strength of emissions 30 MHz to 1 GHz	56	Test passed

⁷ Performed as "Conducted DC powerline emissions"


⁸ See "Spectrum Mask" and "Field strength of emissions".

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) IC RSS-210 Issue 6, section 4.4.1 ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission. The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier. The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	For Carrier Frequency: 122 kHz
Date of test:	20 September 2005
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

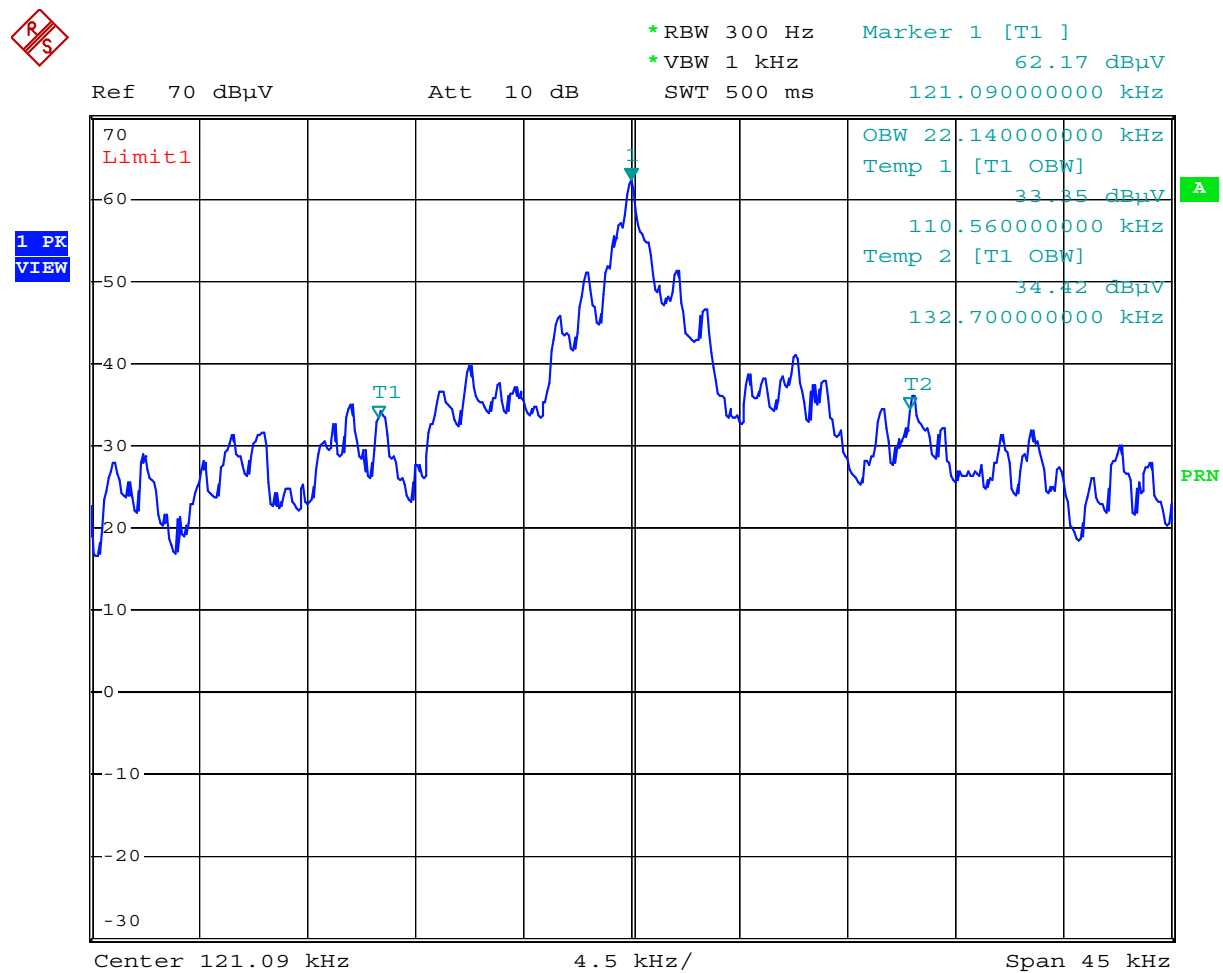

Comment: Skidata 050412: Occupied Bandwidth
Date: 20.SEP.2005 14:44:11

Occupied Bandwidth (99 %):	22.14 kHz
----------------------------	-----------

Occupied Bandwidth (-26 dB):

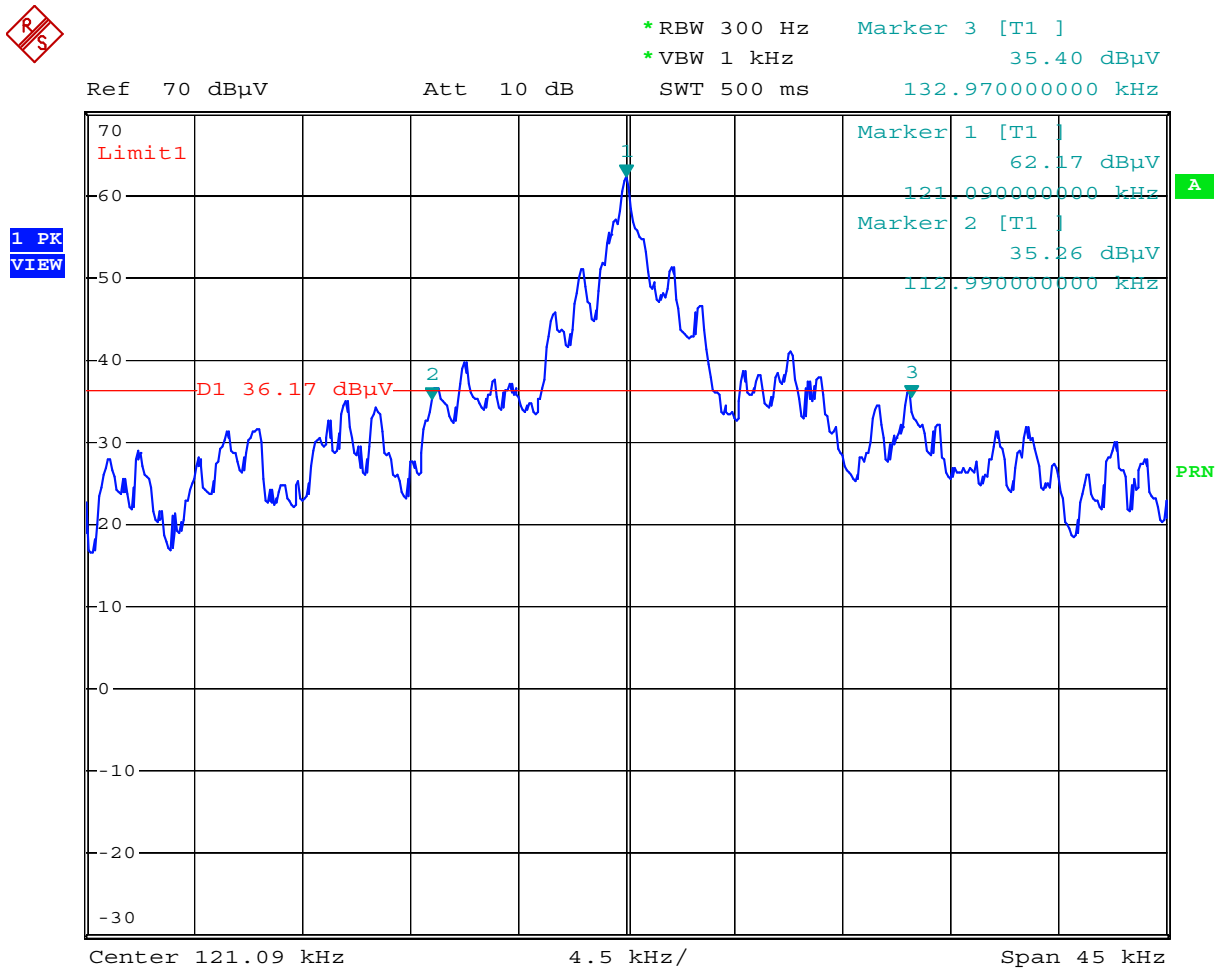


Comment: Skidata 050412: Occupied Bandwidth
Date: 20.SEP.2005 14:43:43

Occupied Bandwidth (-26 dB): 19.98 kHz

Comment:	For Carrier Frequency: 13.56 MHz
Date of test:	20 September 2005
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

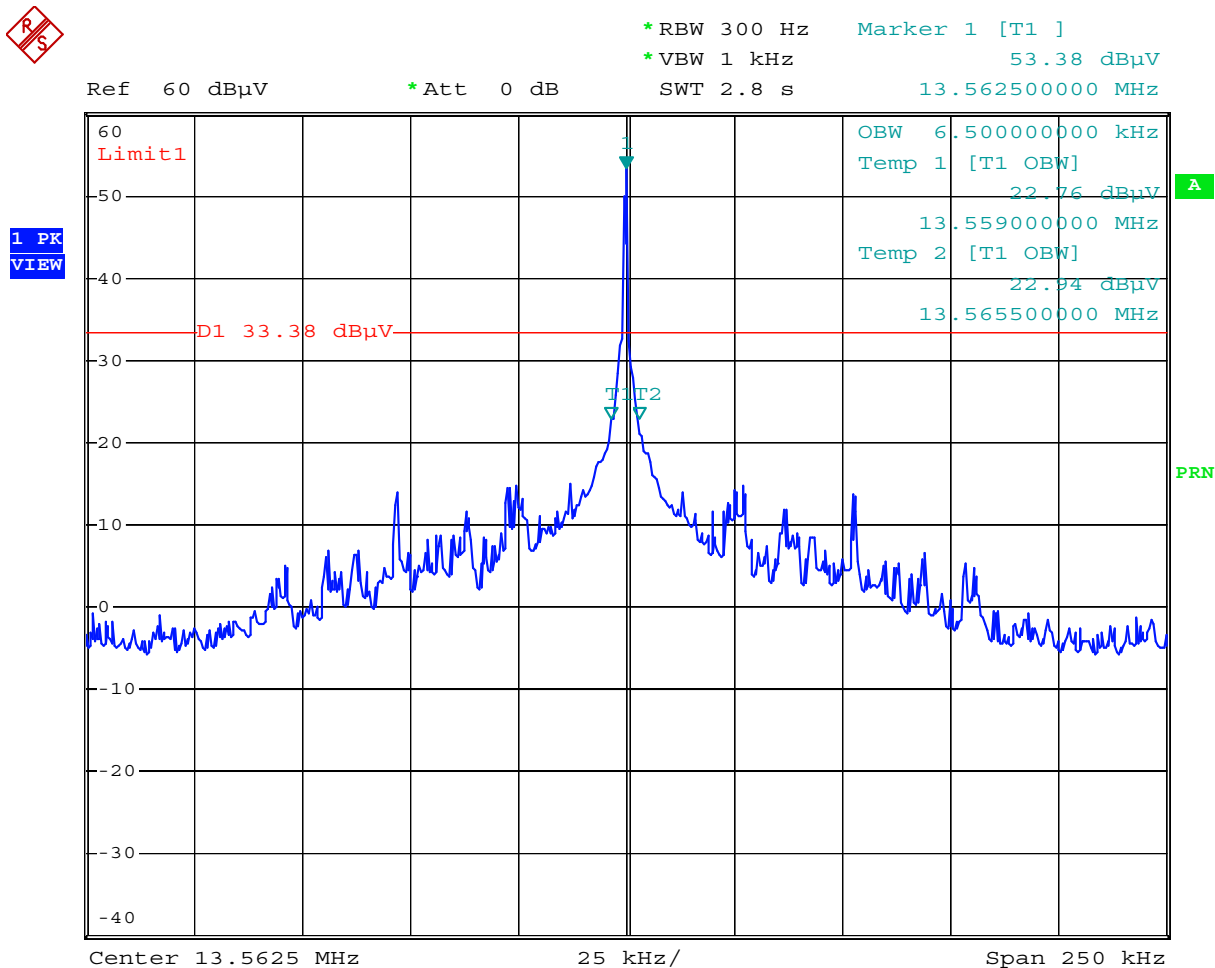

Comment: Skidata 050412: Occupied Bandwidth
Date: 20.SEP.2005 13:54:00

Occupied Bandwidth (99 %):	6.5 kHz
----------------------------	---------

Occupied Bandwidth (-26 dB):

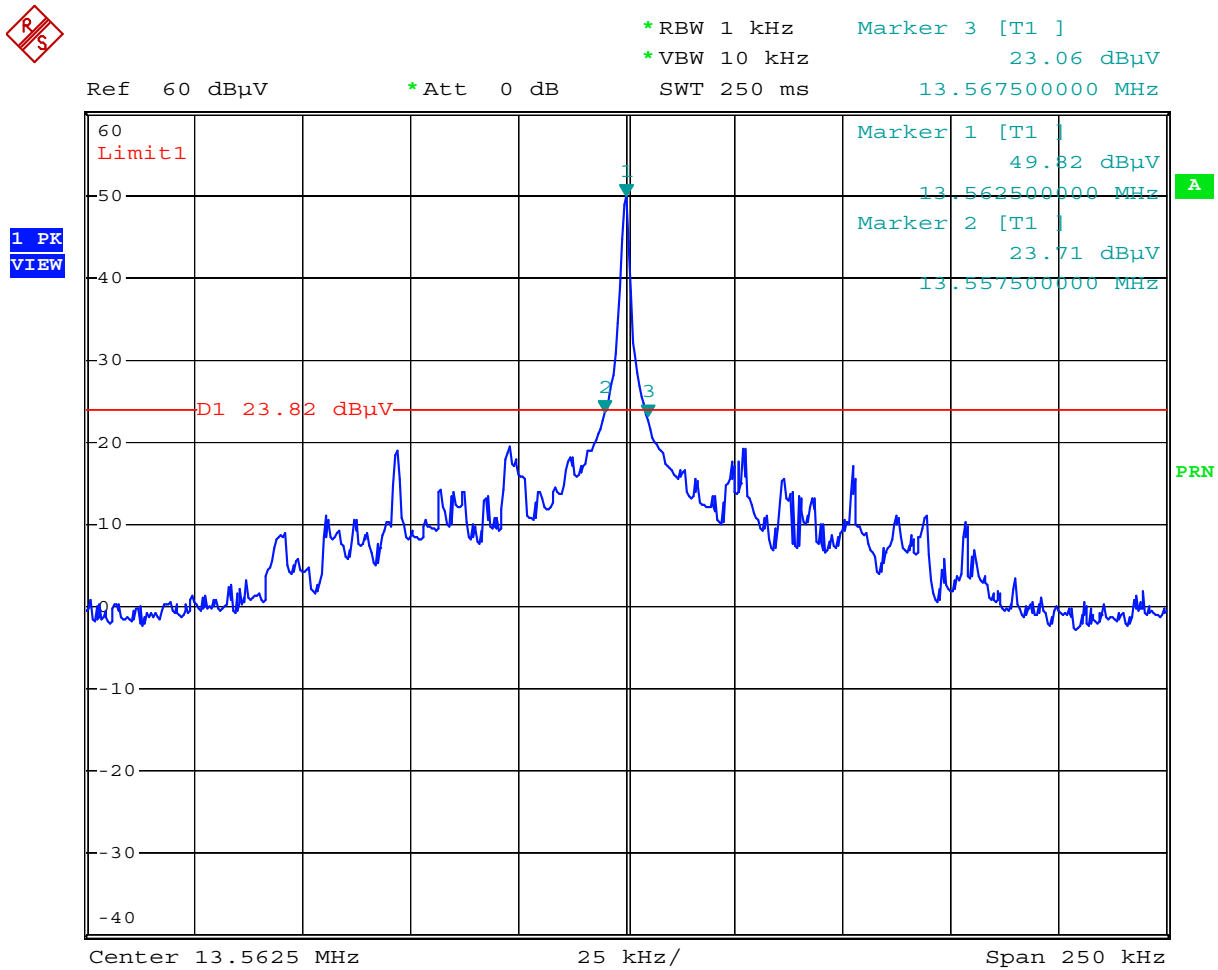

Comment: Skidata 050412: Occupied Bandwidth
Date: 20.SEP.2005 14:01:39


Occupied Bandwidth (-26 dB): 10.0 kHz

8.2 Emission Bandwidth

Rules and specifications:	CFR 47 Part 15, section 15.215(c)
Guide:	ANSI C63.4
Description:	The 20 dB bandwidth is measured at the points when the spectral density of the signal is 20 dB down from the inband spectral density of the modulated signal, with the transmitter modulated by a representative signal. Spectral density (power per unit bandwidth) is measured with a spectrum analyzer with resolution bandwidth set to 300 Hz or alternatively equal to approximately 1.0% of the emission bandwidth. The video bandwidth shall be at least three times greater than the resolution bandwidth.
Measurement procedure:	Bandwidth Measurements (6.1)

Test Result:	Test passed
--------------	-------------

Comment:	For Carrier Frequency: 122 kHz
Date of test:	20 September 2005
Test site:	Fully anechoic room, cabin no. 2

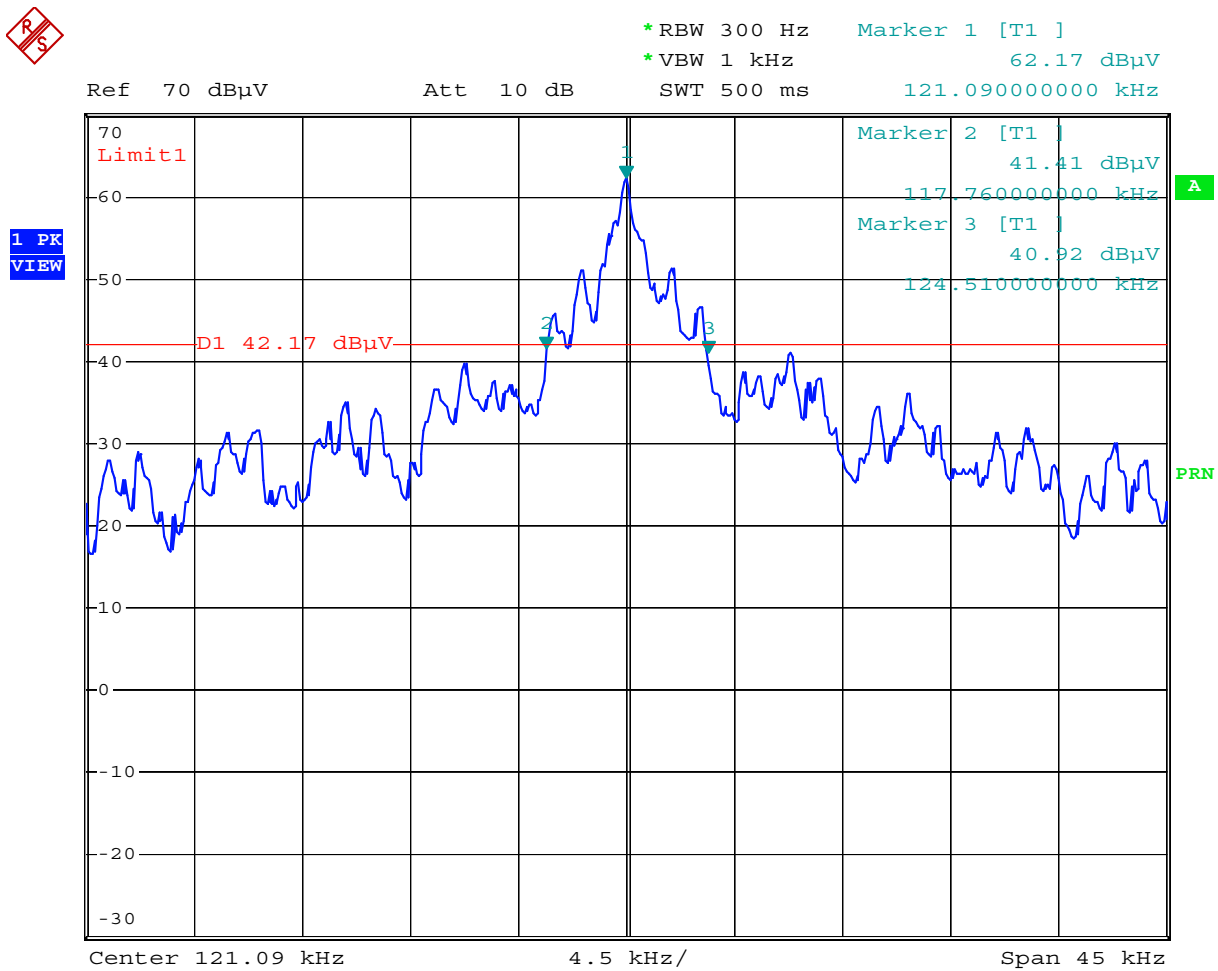


Comment: Skidata 050412: Emission Bandwidth
Date: 20.SEP.2005 14:42:33

Permitted frequency band:	119 – 127 kHz	
Emission frequency range:	119 – 127 kHz	
Emission bandwidth:	6.75 kHz	
Carrier frequency stability:	☐ specified	☒ not specified
Maximum frequency tolerances:	+ kHz - kHz	
Frequency range of the emission:		within permitted frequency band⁹:
Bandwidth of the emission:	 kHz	☒ yes ☐ no

Test Result:	Test passed
--------------	-------------

⁹ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Comment:	For Carrier Frequency: 13.56 MHz
Date of test:	20 September 2005
Test site:	Fully anechoic room, cabin no. 2

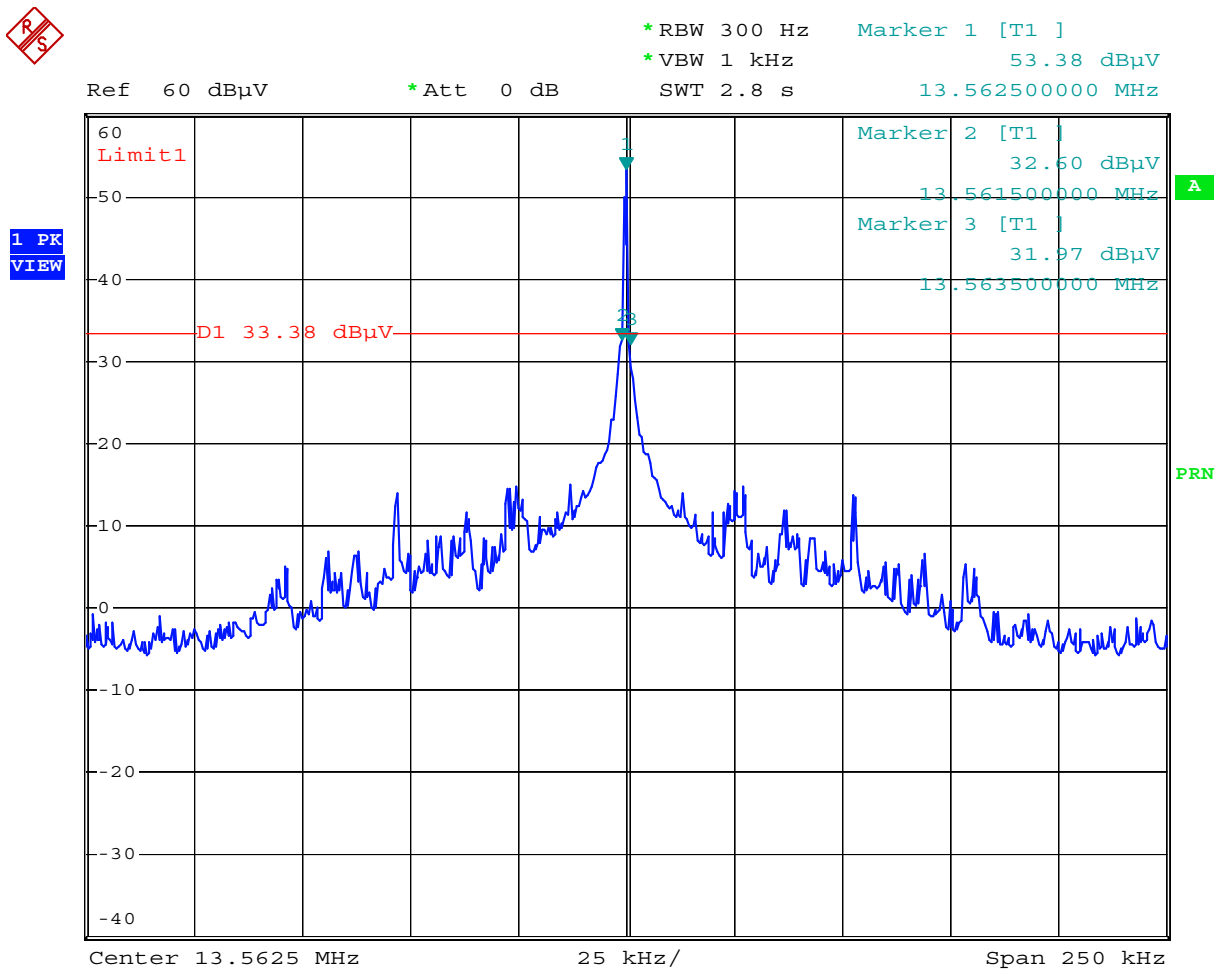

Comment: Skidata 050412: Emission Bandwidth
Date: 20.SEP.2005 13:53:16

Permitted frequency band:	13.553 – 13.567 MHz	
Emission frequency range:	13.5615 – 13.5635 MHz	
Emission bandwidth:	2.0 kHz	
Carrier frequency stability:	☒ specified	☐ not specified
Maximum frequency tolerances:	+0.021 kHz - 0.096 kHz	
Frequency range of the emission:	13.55923 – 13.56344 MHz	within permitted frequency band¹⁰:
Bandwidth of the emission:	4.2 kHz	☐ yes ☐ no

Test Result:	Test passed
--------------	-------------

¹⁰ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-GEN Issue 1, section 3.2
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = 5 \text{ kHz}$
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (5 \text{ kHz}) \cdot 1 = 10 \text{ kHz}$


Designation of Emissions:	10K0A1D
---------------------------	----------------

8.4 Pulse Train Measurement

Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-GEN Issue 1, section 4.3
Guide:	ANSI C63.4
Measurement procedure:	Pulse Train Measurement (6.2)


Comment:	Transmitting continuously without TAG (122 kHz)
Date of test:	22 September 2005
Test site:	Fully anechoic room, cabin no. 2

Total Pulse Train:

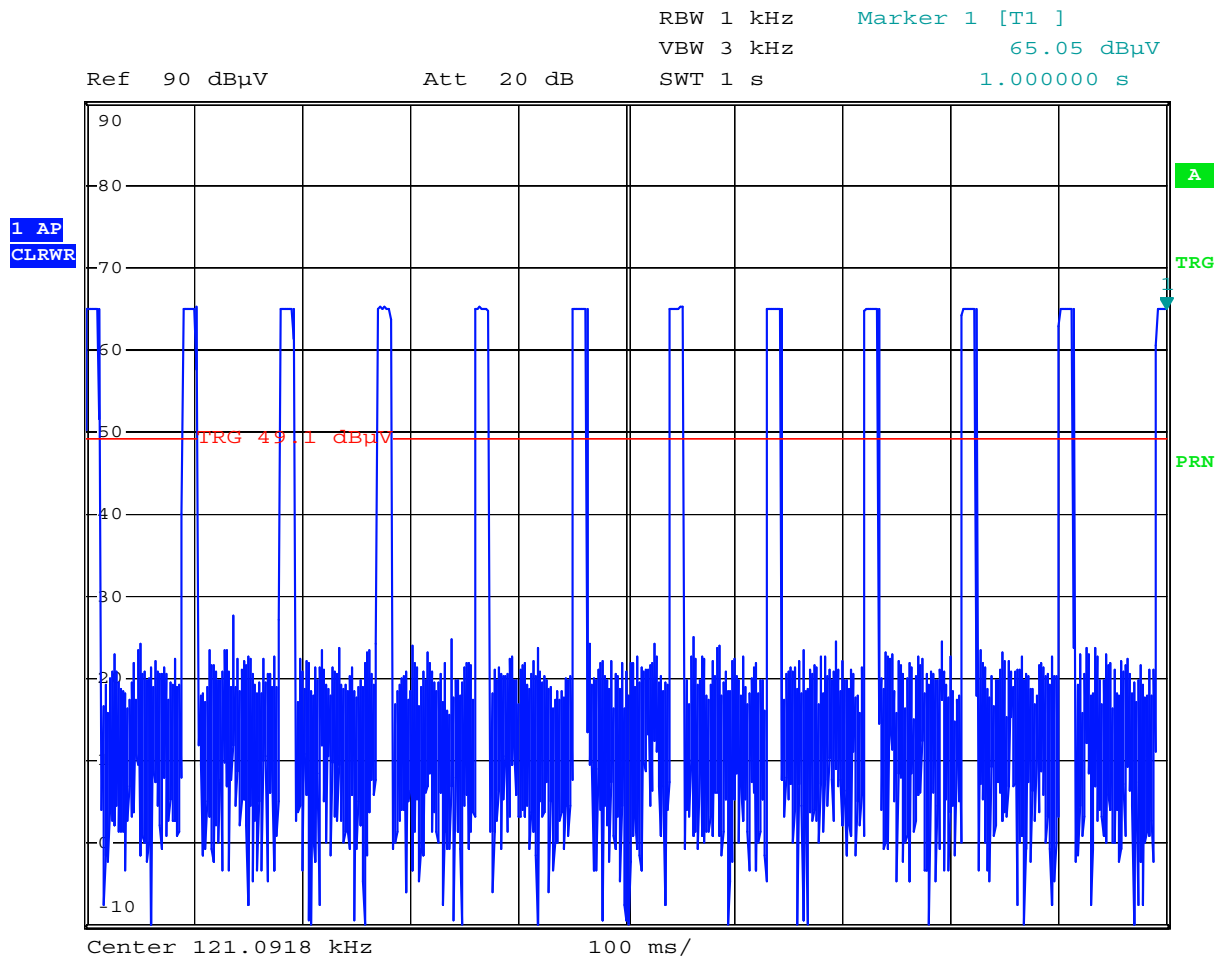

Comment: skidata 050412: Duty Cycle without TAG
Date: 22.SEP.2005 13:46:32

Worst case 0.1 second interval:

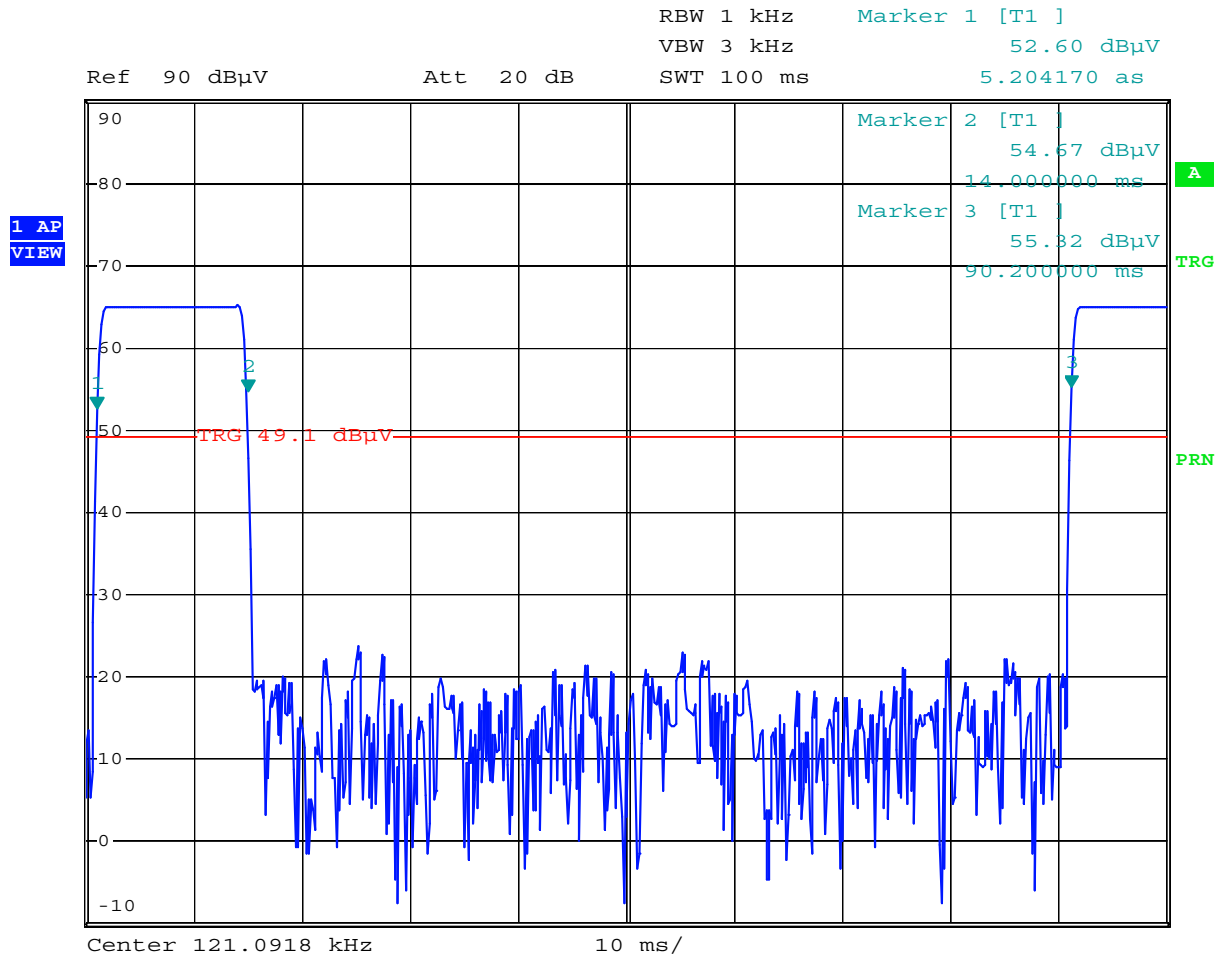


Comment: skidata 050412: Duty Cycle without TAG
Date: 22.SEP.2005 13:48:11

Calculation of pulse train correction:

TX-On-Time (worst case):	T_{on}	=	13.99 ms
Pulse Train Time:	T_{pt}	=	90.19 ms
Period Time:	T_{period}	=	90.19 ms
Pulse Train Correction:	C_{pt}	=	$20 \cdot \log(T_{on} / T_{period})$ dB
		=	-16.18 dB

Comment:	Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Fully anechoic room, cabin no. 2

Total Pulse Train:

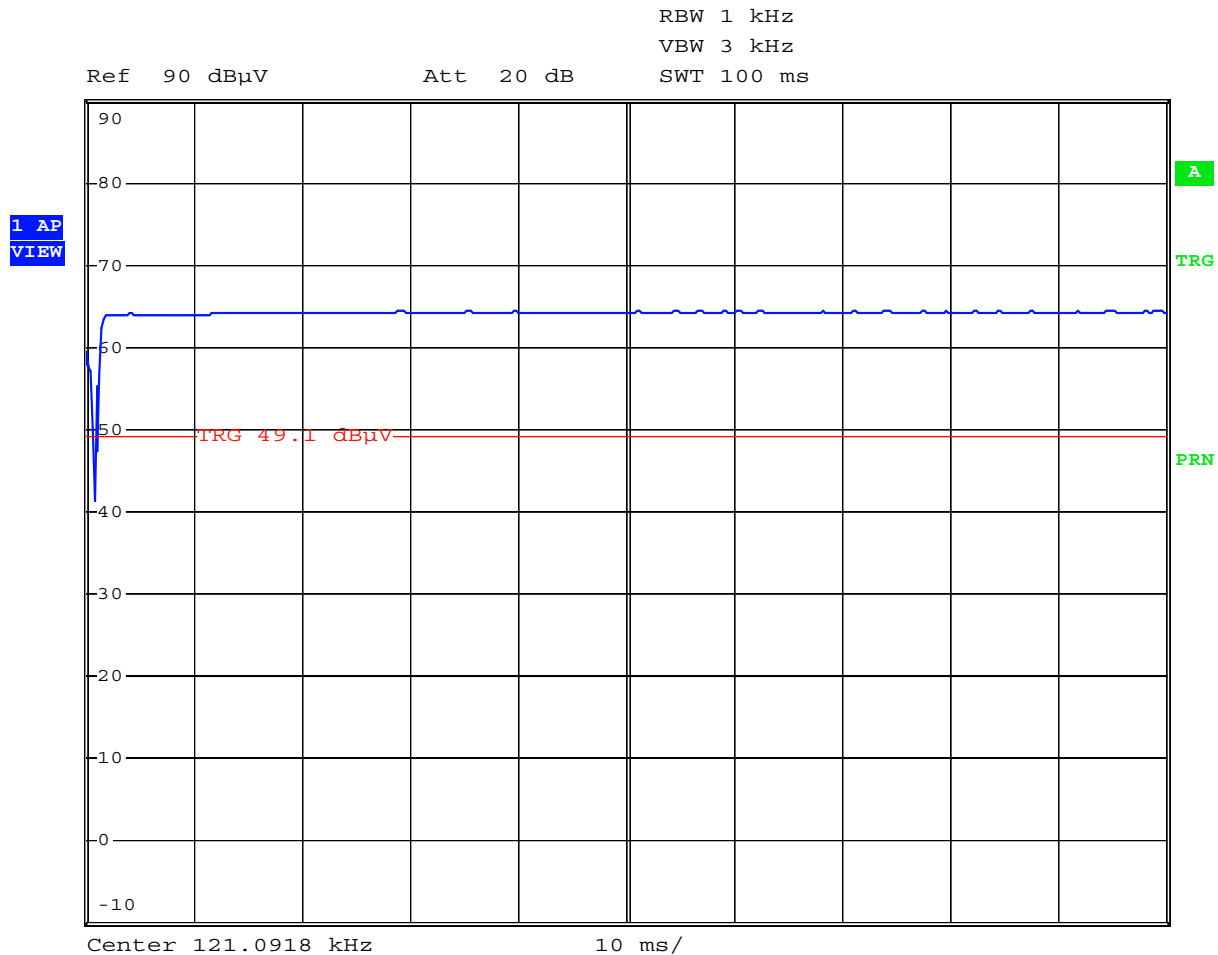

Comment: skidata 050412: Duty Cycle with TAG
Date: 22.SEP.2005 13:49:00


Calculation of pulse train correction:

TX-On-Time (worst case):	T_{on}	=	100 ms
Pulse Train Time:	T_{pt}	=	100 ms
Period Time:	T_{period}	=	100 ms
Pulse Train Correction:	C_{pt}	=	$20 \cdot \log(T_{on} / T_{period})$ dB
		=	0 dB

8.5 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, sections 15.205(a), 15.205(d)(7) IC RSS-210 Issue 6, sections 2.2(a), 2.7 Table 1, Annex 2.6
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 6, section 2.2(a).
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.4)

Comment:	Antenna: sd611 (worst case) Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Fully anechoic room, cabin no. 3
Test distance:	8.5 meters

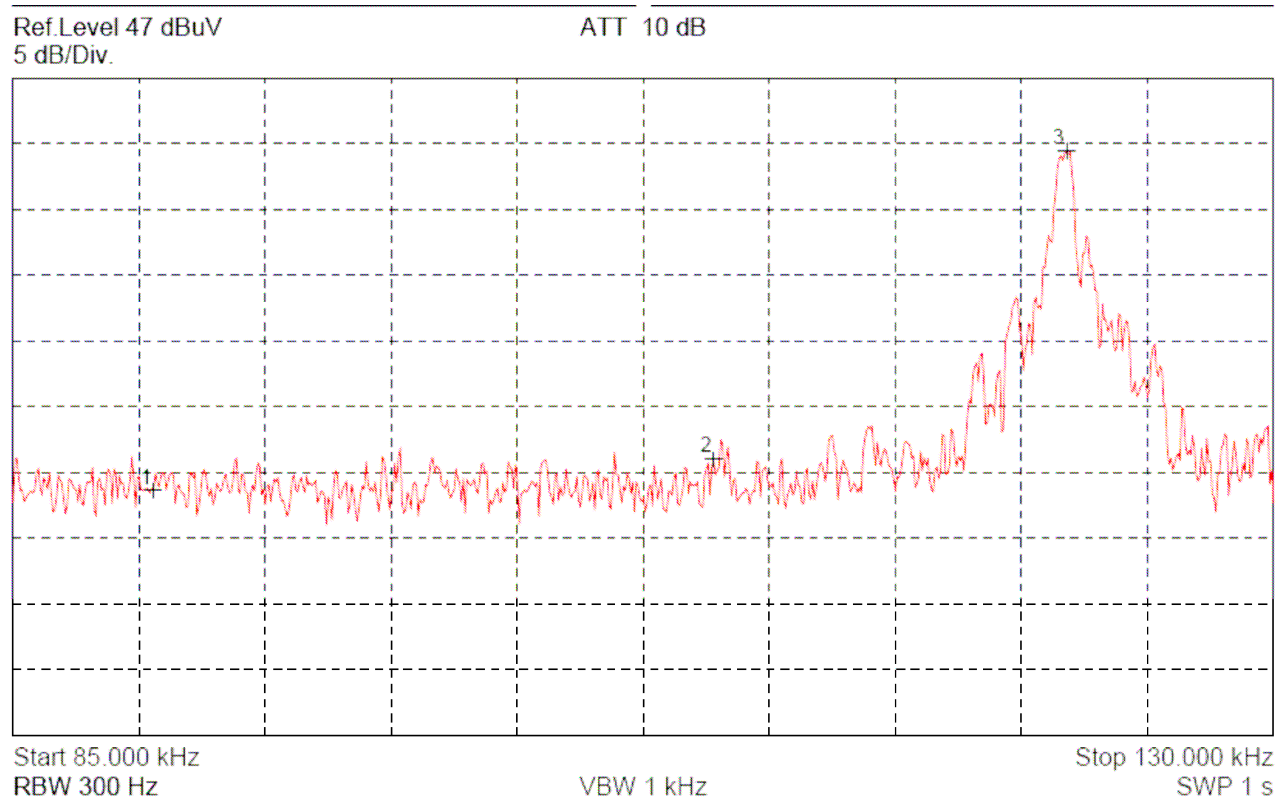

Test Result:	Test passed
--------------	-------------

8.6 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 1, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.3)		

Comment:	Performed on DC 5 V supply of EUT With 50 Ω termination of antenna connectors
Date of test:	20 September 2005
Test site:	Shielded room, cabin no. 1

Test Result:	Test passed
--------------	-------------

Tested on:	plus
------------	------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	50.5	0.0	50.5	60.0	9.5
13.560	Average	47.2	0.0	47.2	50.0	2.8

Tested on:	minus
------------	-------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	46.8	0.0	46.8	60.0	13.2
13.560	Average	42.1	0.0	42.1	50.0	7.9

Sample calculation of final values:



$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$

8.7 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 6, section Annex 2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.4)			

Comment:	
Date of test:	20 September 2005
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	40 dB/decade

Test Result:	Test passed
--------------	-------------

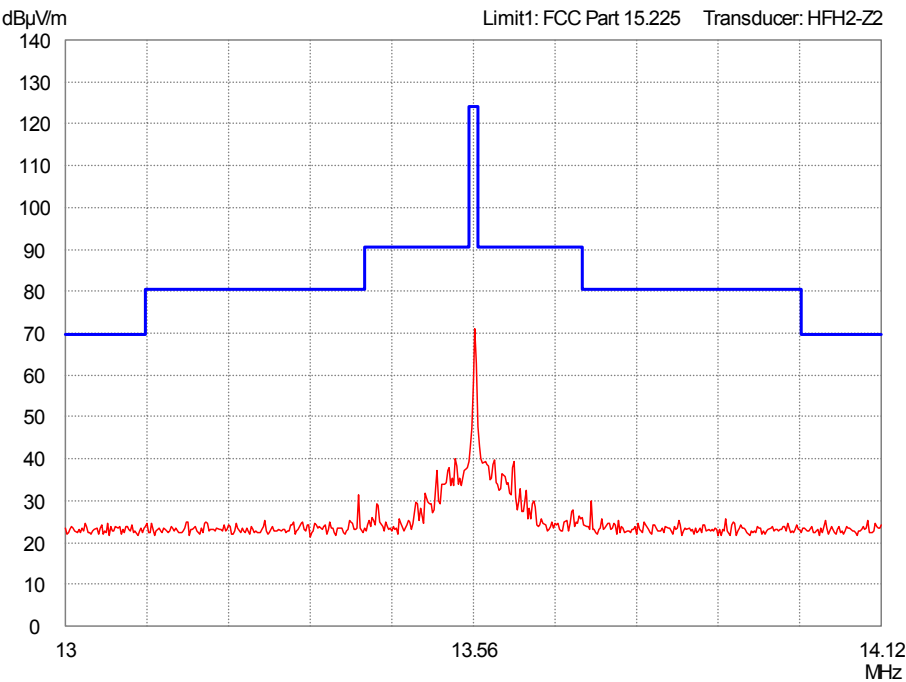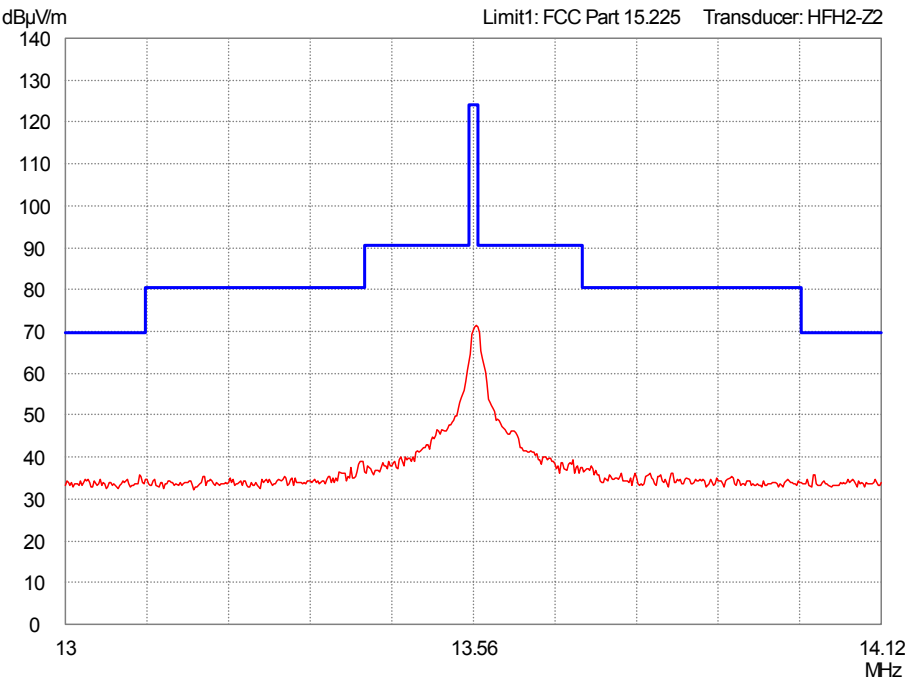

8.8 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.225(a)-(d) and 15.215(b) IC RSS-210 Issue 6, sections 2.2(b)-(c), 2.7 Table 3 and Annex 2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.4) Loop antenna was rotated about the horizontal and vertical axis			

Test Result:	Test passed
--------------	-------------

Sample calculation of final values:

$$\text{Extrapolation Factor (dB/decade)} = \begin{cases} -40 \text{ (dB/decade)} & \text{if } d_1 = d_2 \\ \frac{\text{Reading Value } d_2 \text{ (dB}\mu\text{V)} - \text{Reading Value } d_1 \text{ (dB}\mu\text{V)}}{\text{Log}(d_2) - \text{Log}(d_1)} & \text{if } d_1 \neq d_2 \end{cases}$$

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_2)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_2 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Comment:	Antenna: sd611 Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	67.2	39.3	20.0	-53.4	-78.9	-16.2	-35.8	25.9	61.8
13.560	QP	3	10	45.5	34.8	20.0	-20.4	-9.7		45.1	84.0	38.9

Test Result: Test passed

Comment:	Antenna: sd611 Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	66.0	38.4	20.0	-52.9	-78.1	0.0	-19.7	25.9	45.6

Test Result: Test passed

Comment:	Antenna: sd611 Reading TAG continuously (13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
13.560	QP	3	10	45.7	34.9	20.0	-20.8	-9.9		45.0	84.0	39.0

Test Result: Test passed

Comment:	Antenna: sd612 Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	64.6	36.1	20.0	-54.5	-80.5	-16.2	-40.6	25.9	66.5
13.560	QP	3	10	46.2	36.0	20.0	-19.5	-9.3		46.7	84.0	37.3

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd612 Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	63.3	33.4	20.0	-57.0	-84.3	0.0	-30.8	25.9	56.8

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd612 Reading TAG continuously (13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
13.560	QP	3	10	44.5	34.1	20.0	-20.0	-9.5		44.5	84.0	39.5

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd647 Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	51.6	25.7	20.0	-49.5	-73.1	-16.2	-43.5	25.9	69.5
13.560	QP	3	10	46.7	35.7	20.0	-21.0	-10.0		45.6	84.0	38.4

Test Result: Test passed

Comment:	Antenna: sd647 Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	50.0	23.8	20.0	-50.1	-74.0	0.0	-30.2	25.9	56.2

Test Result: Test passed

Comment:	Antenna: sd647 Reading TAG continuously (13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
13.560	QP	3	10	39.6	32.4	20.0	-13.9	-6.6		45.8	84.0	38.2

Test Result: Test passed

Comment:	Antenna: sd648 Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	54.0	26.5	20.0	-52.5	-77.6	-16.2	-47.2	25.9	73.2
13.560	QP	3	10	51.9	43.9	20.0	-15.4	-7.3		56.5	84.0	27.5

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd648 Reading TAG continuously (122 kHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
0.121	PK	3	10	49.8	22.8	20.0	-51.6	-76.3	0.0	-33.5	25.9	59.4

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd648 Reading TAG continuously (13.56 MHz)
Date of test:	22 September 2005
Test site:	Open field test site

Frequency (MHz)	Detector	Distance		Reading Value		Correction Factor (dB/m)	Extrapolation Factor		Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d ₁ (m)	d ₂ (m)	d ₁ (dBµV)	d ₂ (dBµV)		(dB/dec)	(dB)				
13.560	QP	3	10	45.5	37.2	20.0	-15.8	-7.5		49.7	84.0	34.3

Test Result:	Test passed
--------------	-------------

8.9 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Comment:			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.5) Radiated Emission at Open Field Test Site (6.6)		

Test Result:	Test passed
--------------	-------------

Sample calculation of final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

Comment:	Antenna: sd611 Mode: Transmitting continuously without TAG
Date of test:	19 – 20 September 2005
Test site:	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBμV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
40.670	vertical	Quasi-Peak	27.4	11.7		39.1	40.0	0.9
135.600	horizontal	Quasi-Peak	27.2	13.0		40.2	43.5	3.3
135.620	vertical	Quasi-Peak	21.7	13.0		34.7	43.5	8.8
176.310	horizontal	Quasi-Peak	26.0	15.1		41.1	43.5	2.4
189.870	horizontal	Quasi-Peak	26.5	16.3		42.8	43.5	0.7
203.440	horizontal	Quasi-Peak	26.4	17.0		43.4	43.5	0.1
216.990	horizontal	Quasi-Peak	17.5	17.5		35.0	46.0	11.0

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd611 Mode: Reading TAG (13.56 MHz)
Date of test:	
Test site:	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBμV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
40.680	vertical	Quasi-Peak	28.1	11.7		39.8	40.0	0.2
149.190	horizontal	Quasi-Peak	29.8	13.6		43.4	43.5	0.1
162.750	horizontal	Quasi-Peak	20.1	14.0		34.1	43.5	9.4
203.440	horizontal	Quasi-Peak	22.9	17.0		39.9	43.5	3.6
217.000	horizontal	Quasi-Peak	22.7	17.5		40.2	46.0	5.8
230.560	horizontal	Quasi-Peak	27.6	17.4		45.0	46.0	1.0

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd648 Mode: Transmitting continuously without TAG
Date of test:	
Test site:	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
135.600	horizontal	Quasi-Peak	24.7	13.0		37.7	43.5	5.8
162.750	horizontal	Quasi-Peak	19.2	14.0		33.2	43.5	10.3
189.870	horizontal	Quasi-Peak	17.9	16.3		34.2	43.5	9.3
203.440	horizontal	Quasi-Peak	22.2	17.0		39.2	43.5	4.3
216.990	horizontal	Quasi-Peak	20.7	17.5		38.2	46.0	7.8
230.560	horizontal	Quasi-Peak	26.6	17.4		44.0	46.0	2.0

Test Result:	Test passed
--------------	-------------

Comment:	Antenna: sd648 Mode: Reading TAG (13.56 MHz)
Date of test:	
Test site:	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
149.190	horizontal	Quasi-Peak	29.8	13.6		43.4	43.5	0.1
162.750	horizontal	Quasi-Peak	20.1	14.0		34.1	43.5	9.4
203.440	horizontal	Quasi-Peak	22.9	17.0		39.9	43.5	3.6
217.000	horizontal	Quasi-Peak	22.7	17.5		40.2	46.0	5.8
230.560	horizontal	Quasi-Peak	27.6	17.4		45.0	46.0	1.0


Test Result:	Test passed
--------------	-------------

8.10 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-GEN Issue 1, sections 4.5 and 7.2.4
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20 °C)
Measurement procedure:	Carrier Frequency Stability (6.7)


Comment:	
Date of test:	23 September 2005

8.10.1 Carrier Frequency Stability vs. Temperature

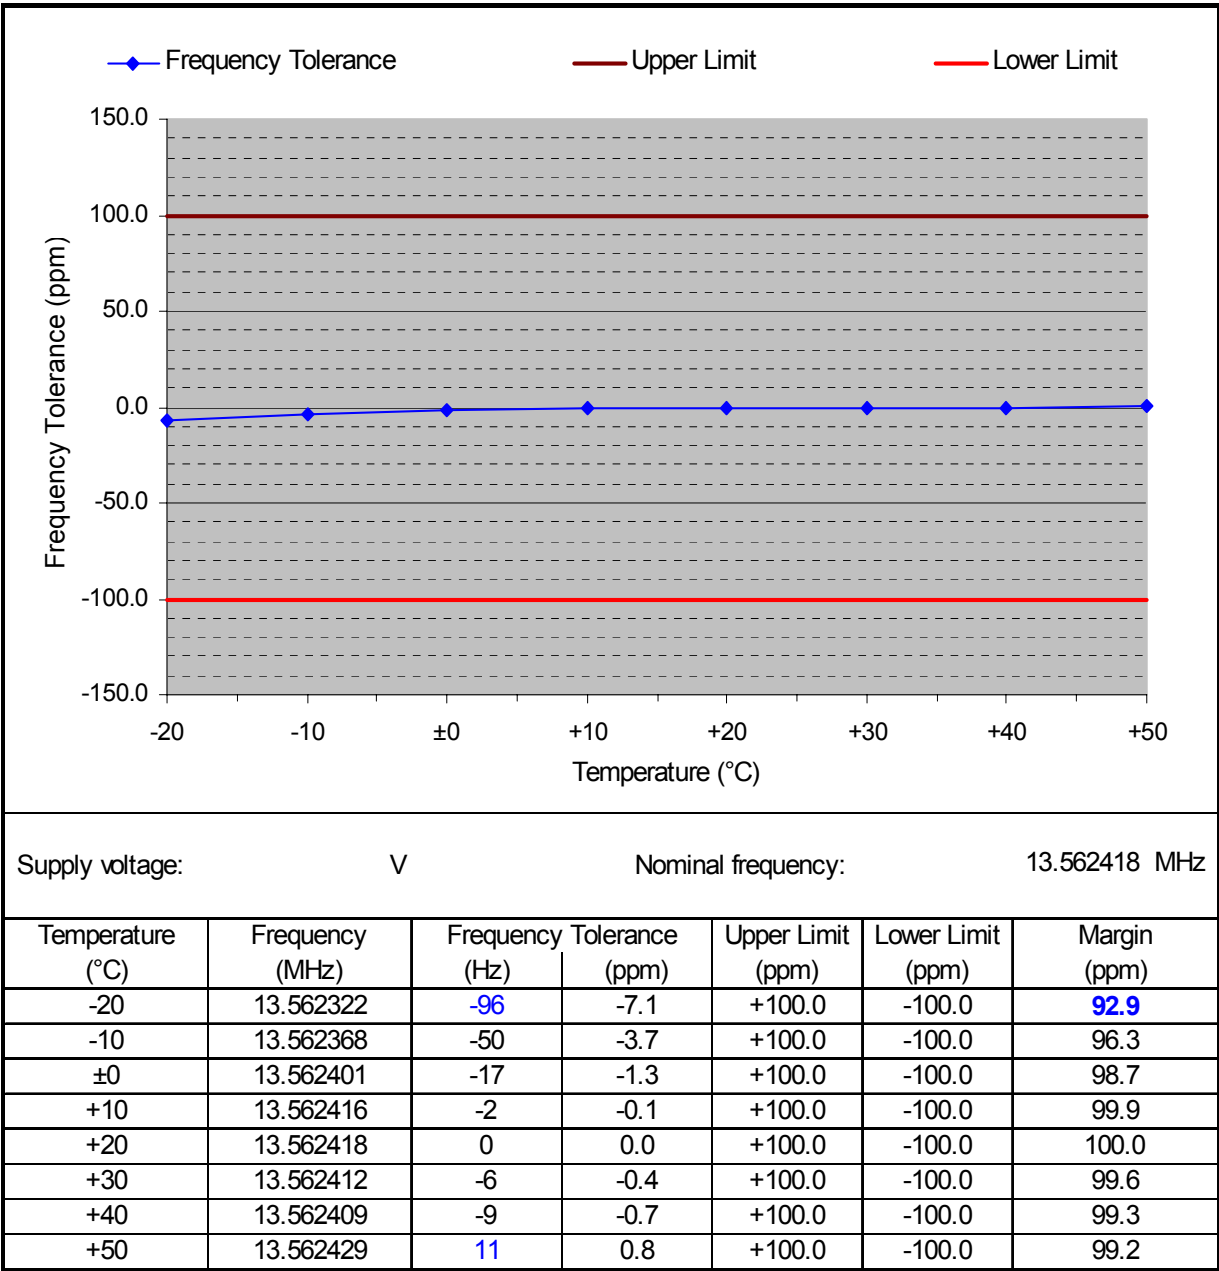

Test Result:	Test passed
--------------	-------------

8.10.2 Carrier Frequency Stability vs. Supply Voltage

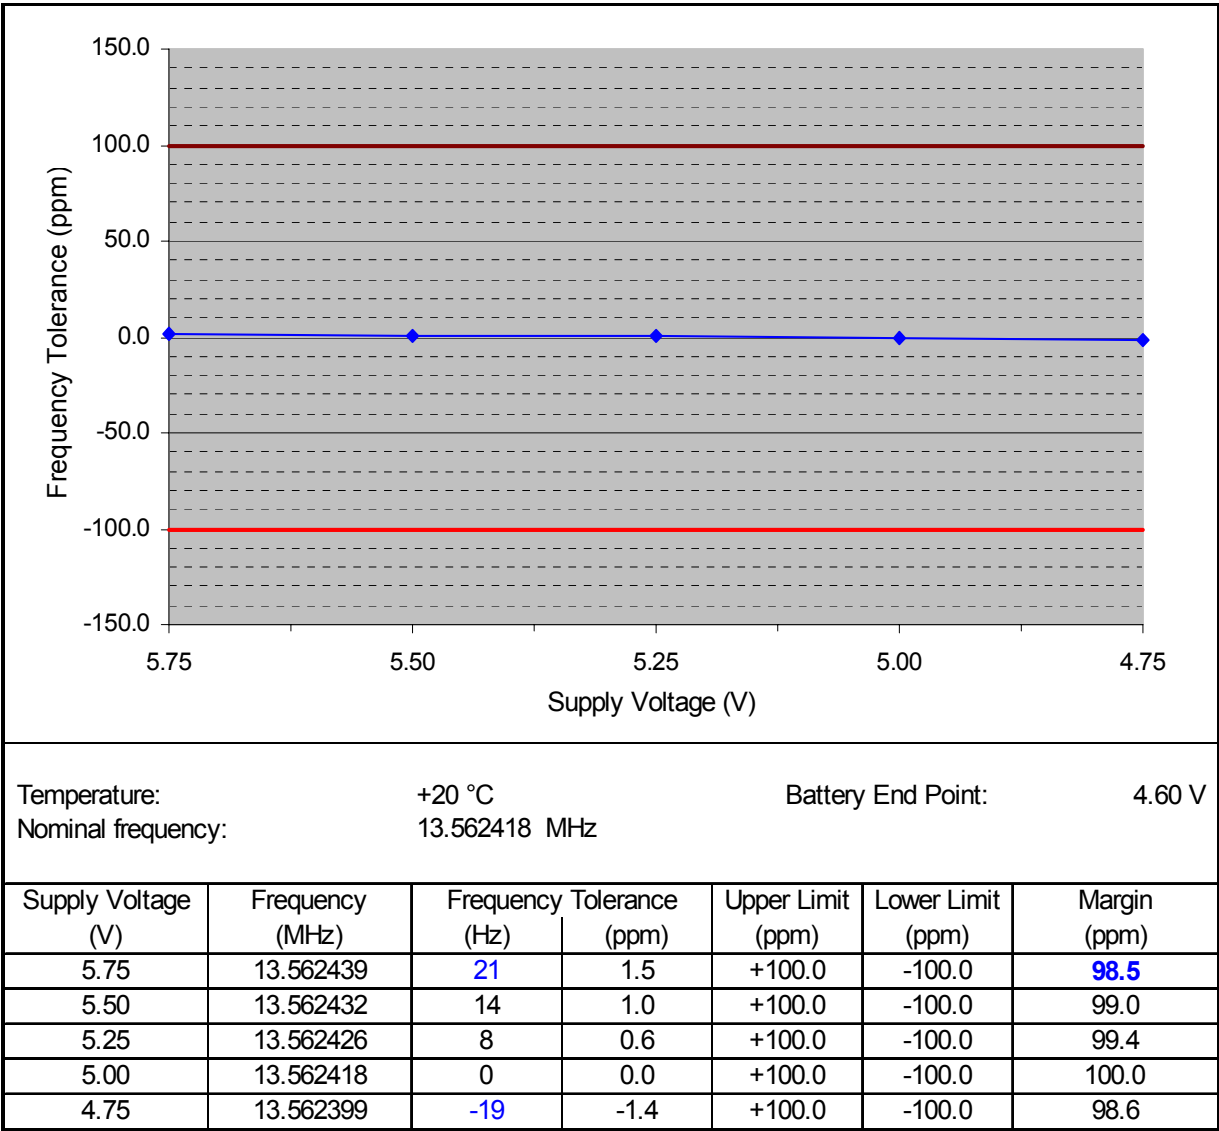

Test Result:	Test passed
--------------	-------------

8.11 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-GEN Issue 1, section 5.5
Guide:	IC RSS-102 Issue 1, section 4.1

Comment:	For carrier frequency 122 kHz
Date of test:	22 September 2005

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The transmitter is for				
☒ fixed use ☐ mobile use ☐ portable use		☒		☐
The antenna is				
☒ detachable				
The output power (TP in watts) is measured at the antenna connector: $TP = 32.36 \text{ mW}$ Numerical gain of the antenna: $G = 1$		☒	☒	
☐ not detachable				
SAR and RF evaluation				
$EIRP = G \cdot TP \Rightarrow EIRP = 32.36 \text{ mW}$				
☒ Transmitter is operating at frequencies below 1.0 GHz with an output power TP equal to or less than 200 milliwatts (mW). ☐ Transmitter is operating at frequencies between 1.0 and 2.2 GHz with an output power TP equal to or less than 100 milliwatts (mW). ☐ Transmitter is for mobile use and operating frequency is below 1.5 GHz with effective radiated power (ERP) of 1.5 watts or less (i.e. EIRP of 2.5 watts or less). ☐ Transmitter is for mobile use and operating frequency is above 1.5 GHz with ERP of 3 watts or less (i.e. EIRP of 5 watts or less). ☐ SAR and/or RF evaluation is documented in test report no.				☐

Comment:	For carrier frequency 13.56 MHz
Date of test:	22 September 2005

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The transmitter is for				
☒ fixed use ☐ mobile use ☐ portable use		☒		☐
The antenna is				
☒ detachable				
The output power (TP in watts) is measured at the antenna connector: $TP = 58.61 \text{ mW}$ Numerical gain of the antenna: $G = 1$				
☐ not detachable				
SAR and RF evaluation				
$EIRP = G \cdot TP \Rightarrow EIRP = 58.61 \text{ mW}$				
☒ Transmitter is operating at frequencies below 1.0 GHz with an output power TP equal to or less than 200 milliwatts (mW). ☐ Transmitter is operating at frequencies between 1.0 and 2.2 GHz with an output power TP equal to or less than 100 milliwatts (mW). ☐ Transmitter is for mobile use and operating frequency is below 1.5 GHz with effective radiated power (ERP) of 1.5 watts or less (i.e. EIRP of 2.5 watts or less). ☐ Transmitter is for mobile use and operating frequency is above 1.5 GHz with ERP of 3 watts or less (i.e. EIRP of 5 watts or less). ☐ SAR and/or RF evaluation is documented in test report no.				☐ ☐ ☐ ☐ ☐

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 10, 2004
☒	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 19, 2005
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
☒	RSS-Gen	Radio Standards Specification RSS-Gen Issue 1 containing General Requirements and Information for the Certification of Radiocommunication Equipmment, published by Industry Canada	September 2005
☒	RSS-210	Radio Standards Specification RSS-210 Issue 6 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	September 2005
☐	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
☒	RSS-102	Radio Standards Specification RSS-102 Issue 1: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields, published by Industry Canada	September 25, 1999
☐	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
☒	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
☐	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
☒	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Shielded room, cabin no. 1

Tested on:
Linecord
plus

Date of test: 2005-09-20 Operator: M. Steindl


Test performed: semi automatically File name:

Mode:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: 50 Ohms termination
- transmitting continuously

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

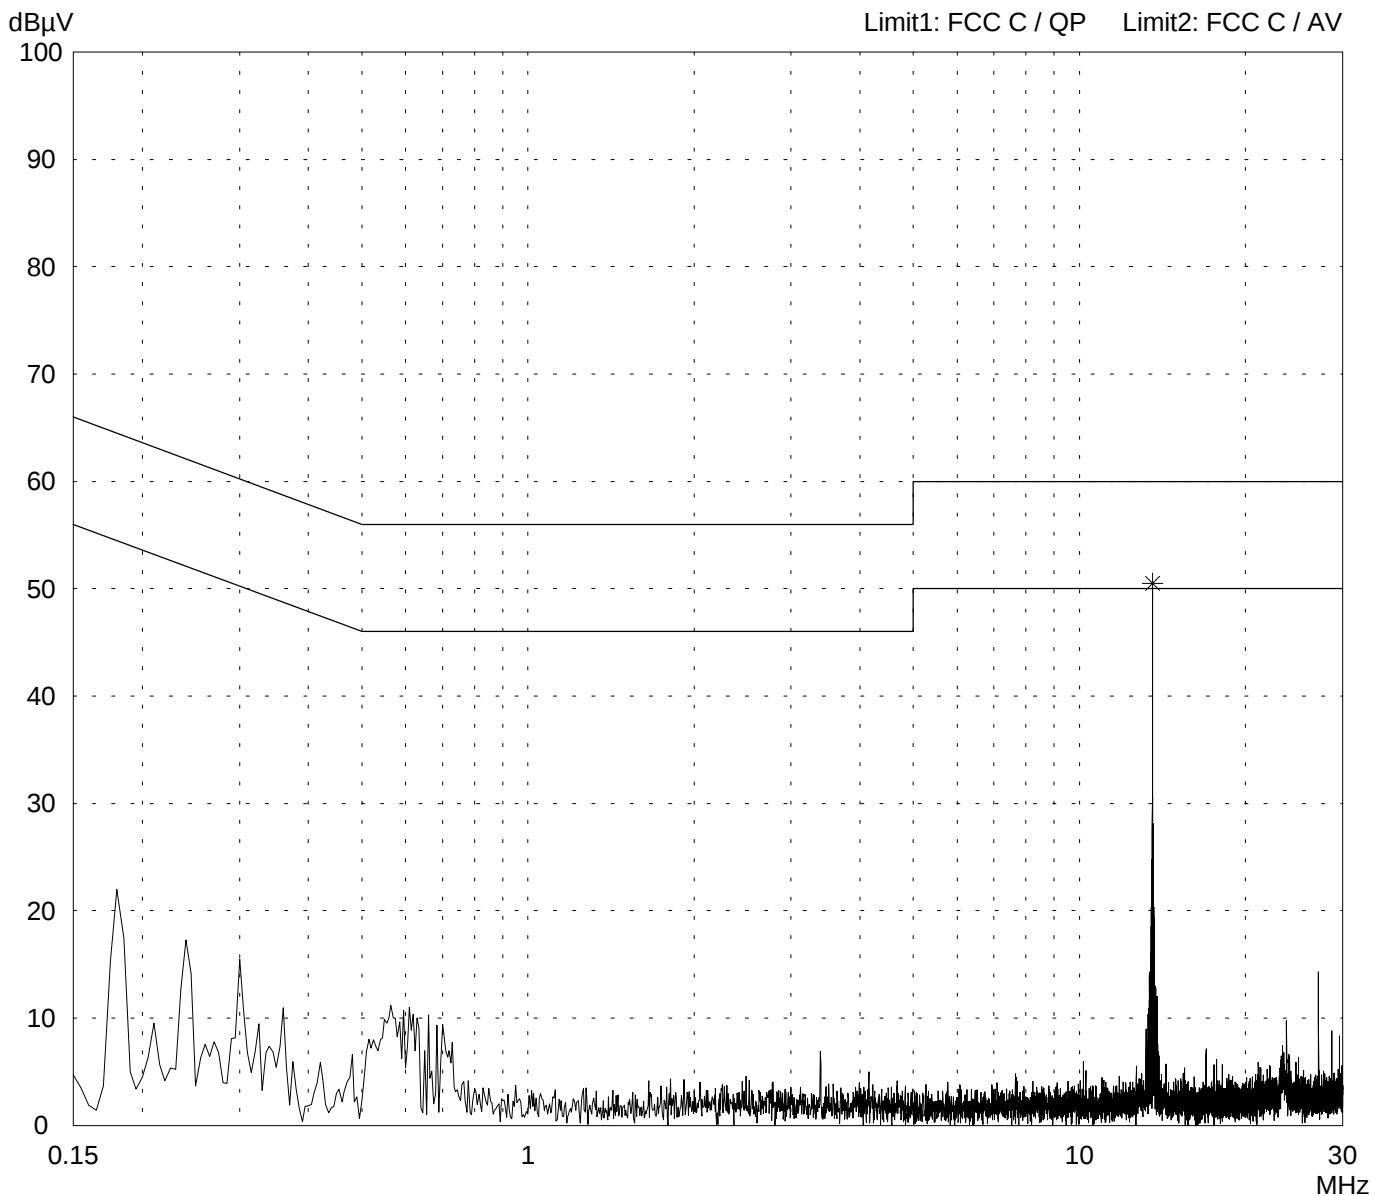

Result:
Limit kept

Project file:
55426-50412

Page of Pages

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Shielded room, cabin no. 1

Tested on:
Linecord
plus

Date of test:
2005-09-20

Operator:
M. Steindl

Test performed:
automatically

File name:

Mode:

- DC 5 V power supply

- Variant: Standard (V4.2)

- Antenna: 50 Ohms termination

- transmitting continuously

Detector:

Average / Final Results: AV

Final results:


20 dB Margin

25 Subranges

dB μ V

Limit1: FCC C / QP

Limit2: FCC C / AV

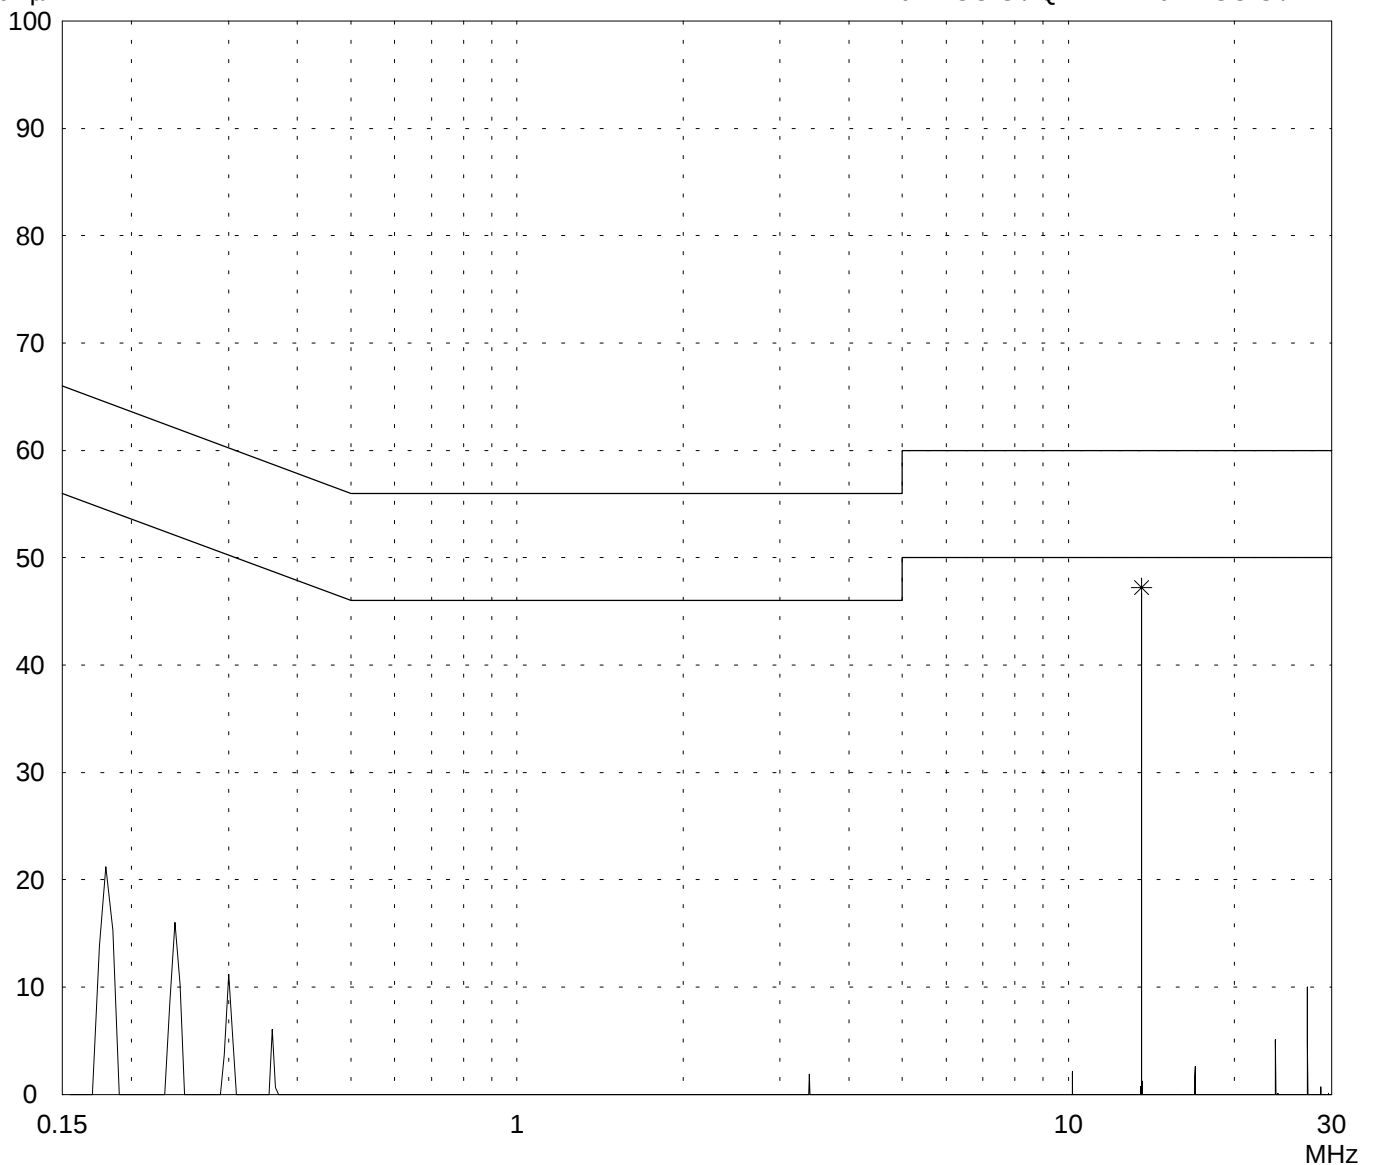

Result:

Limit kept

Project file:

55426-50412

Page

of

Pages

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Shielded room, cabin no. 1

Tested on:
Linecord
minus

Date of test:
2005-09-20

Operator:
M. Steindl

Test performed:
semi automatically

File name:

Mode:

- DC 5 V power supply

- Variant: Standard (V4.2)

- Antenna: 50 Ohms termination

- transmitting continuously

Detector:

Peak / Final Results: QP

Final results:


20 dB Margin

25 Subranges

dB μ V

Limit1: FCC C / QP

Limit2: FCC C / AV

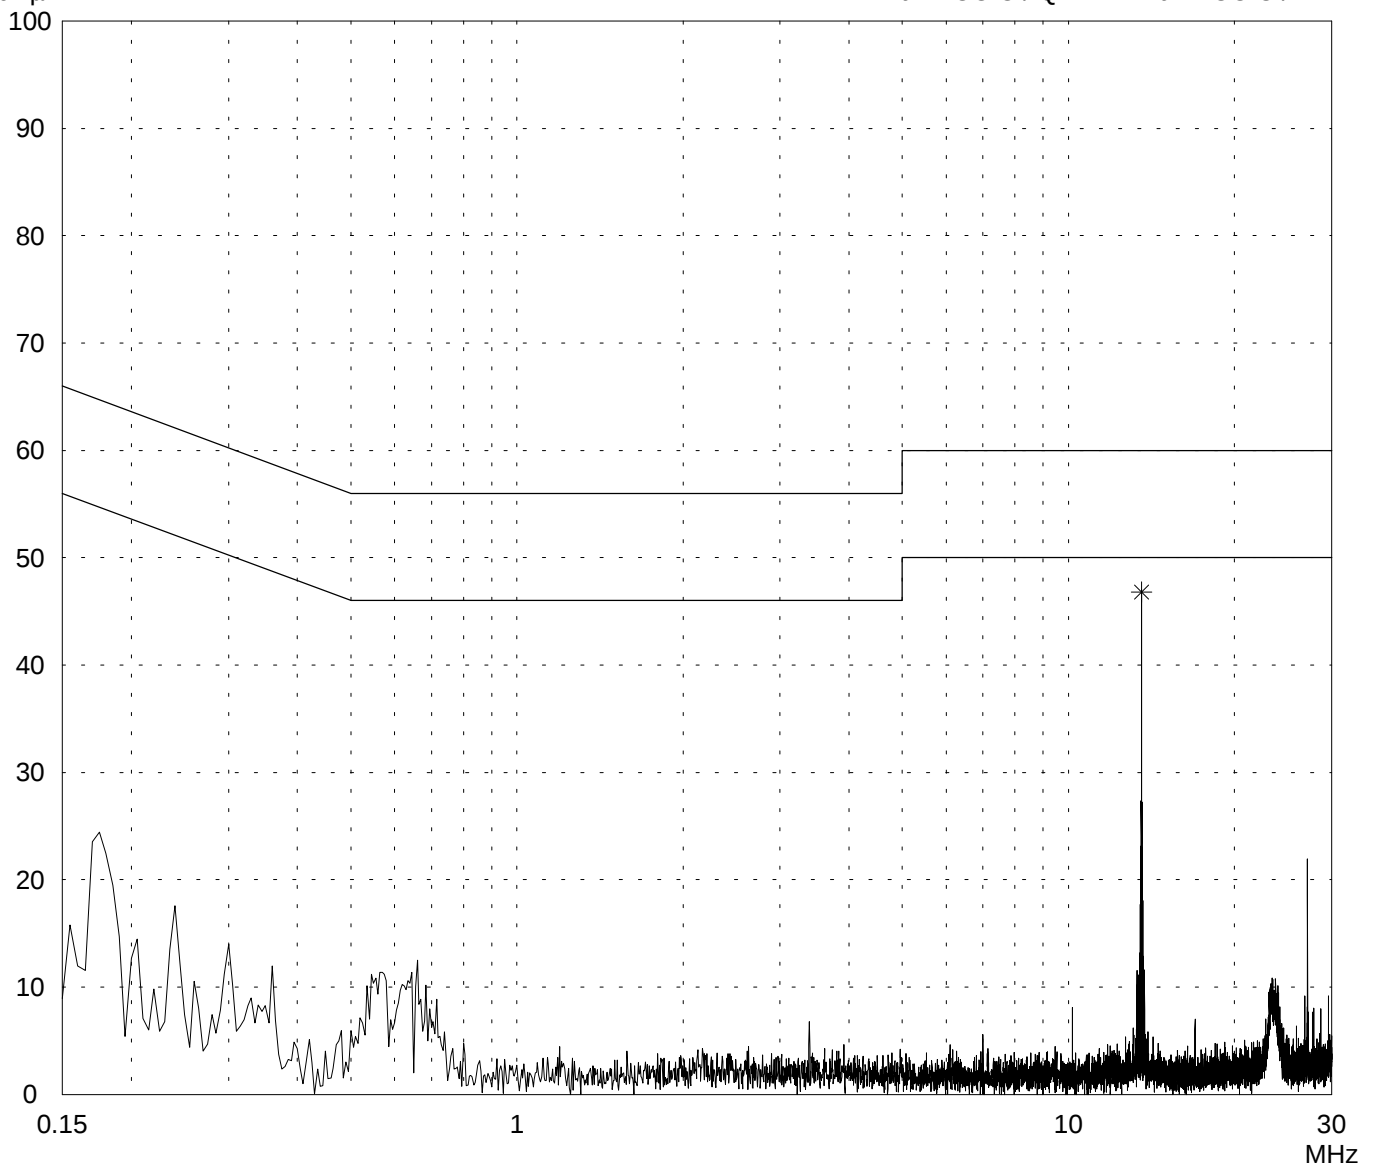

Result:

Limit kept

Project file:

55426-50412

Page

of

Pages

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Shielded room, cabin no. 1

Tested on:
Linecord
minus

Date of test:
2005-09-20

Operator:
M. Steindl

Test performed:
automatically

File name:

Mode:

- DC 5 V power supply

- Variant: Standard (V4.2)

- Antenna: 50 Ohms termination

- transmitting continuously

Detector:

Average / Final Results: AV

Final results:


20 dB Margin

25 Subranges

dB μ V

Limit1: FCC C / QP

Limit2: FCC C / AV

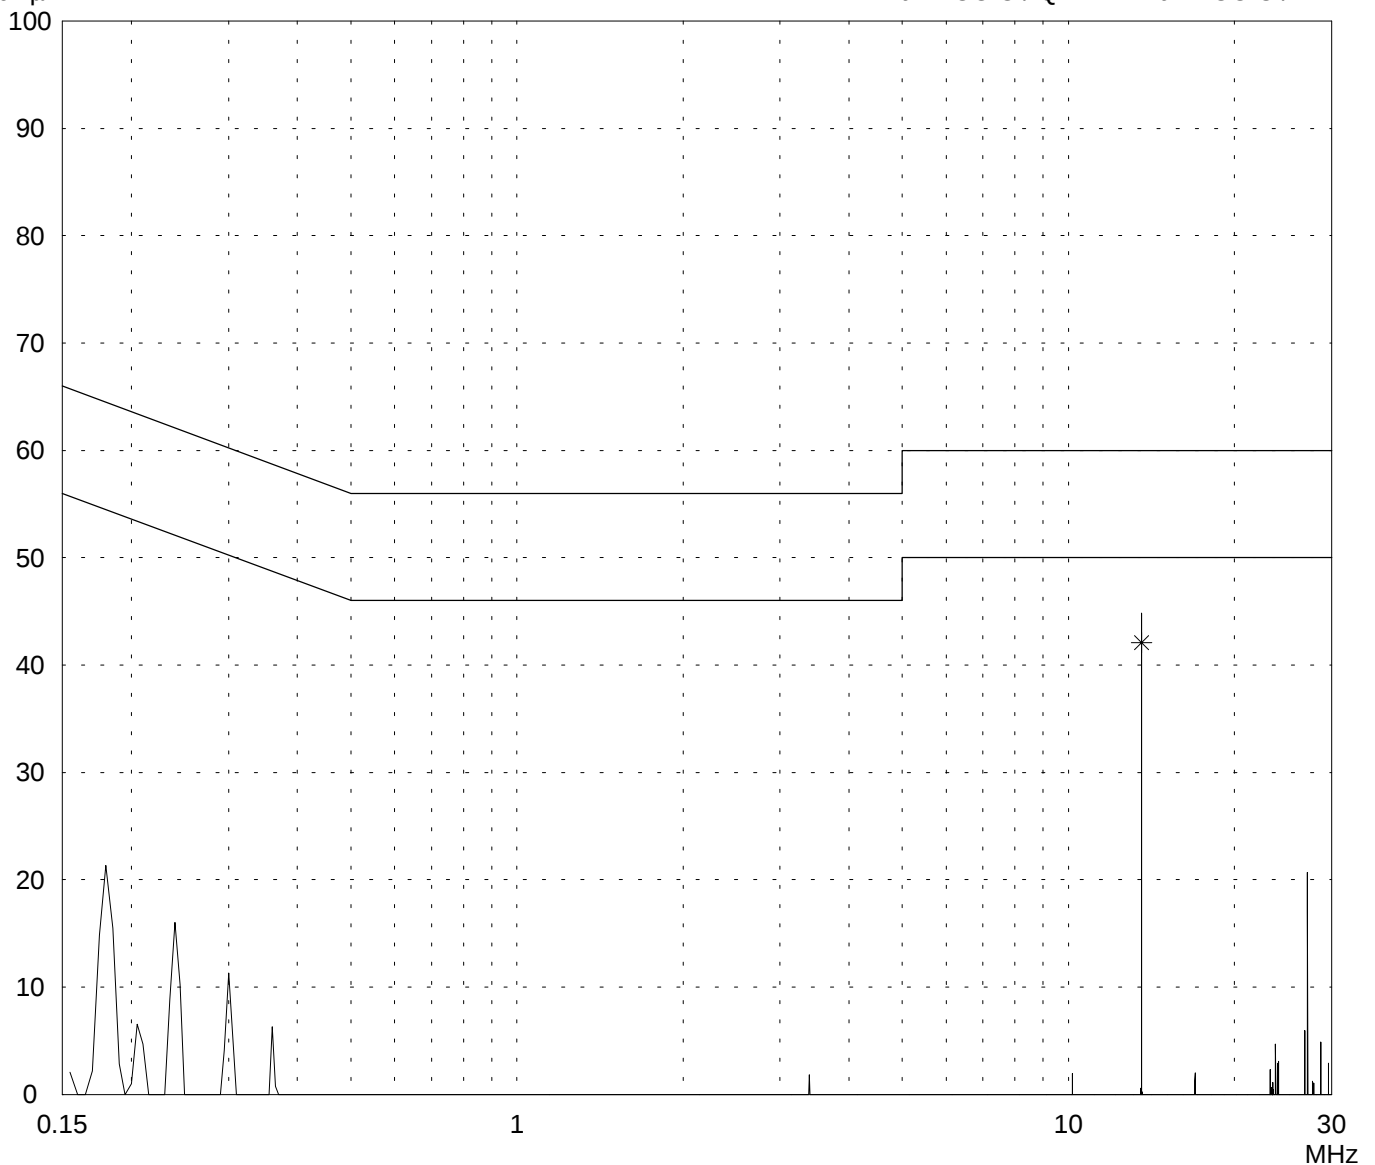

Result:

Limit kept

Project file:

55426-50412

Page


of

Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - transmitting
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

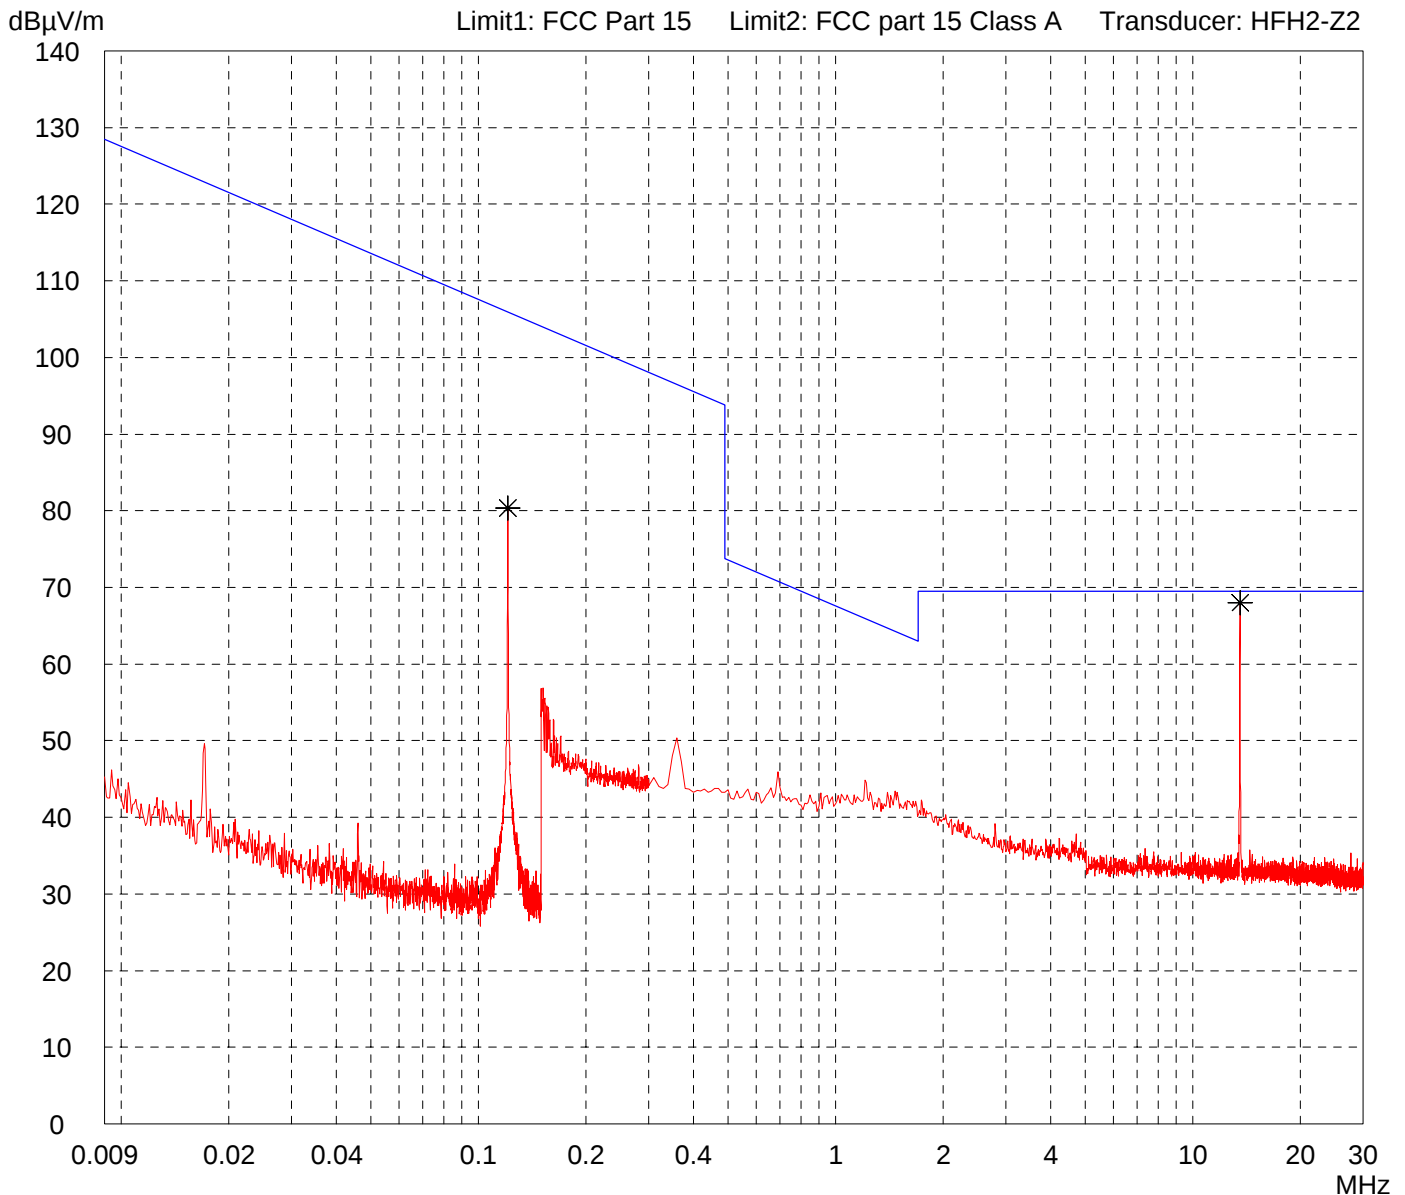


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

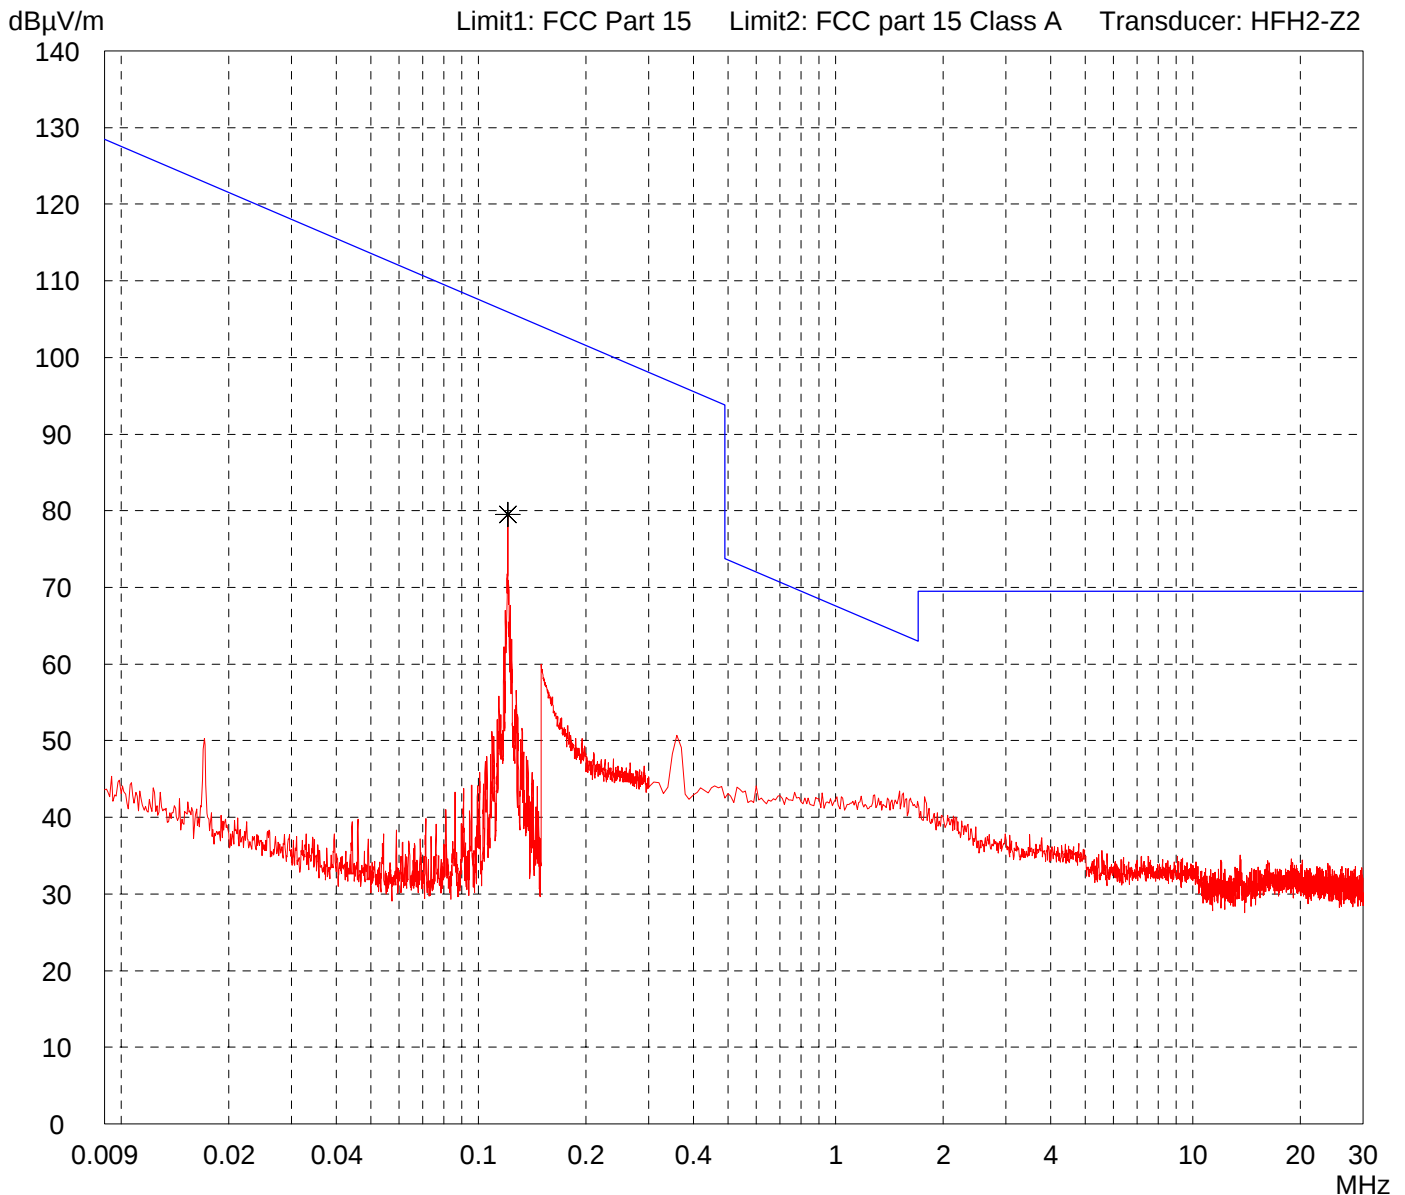


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

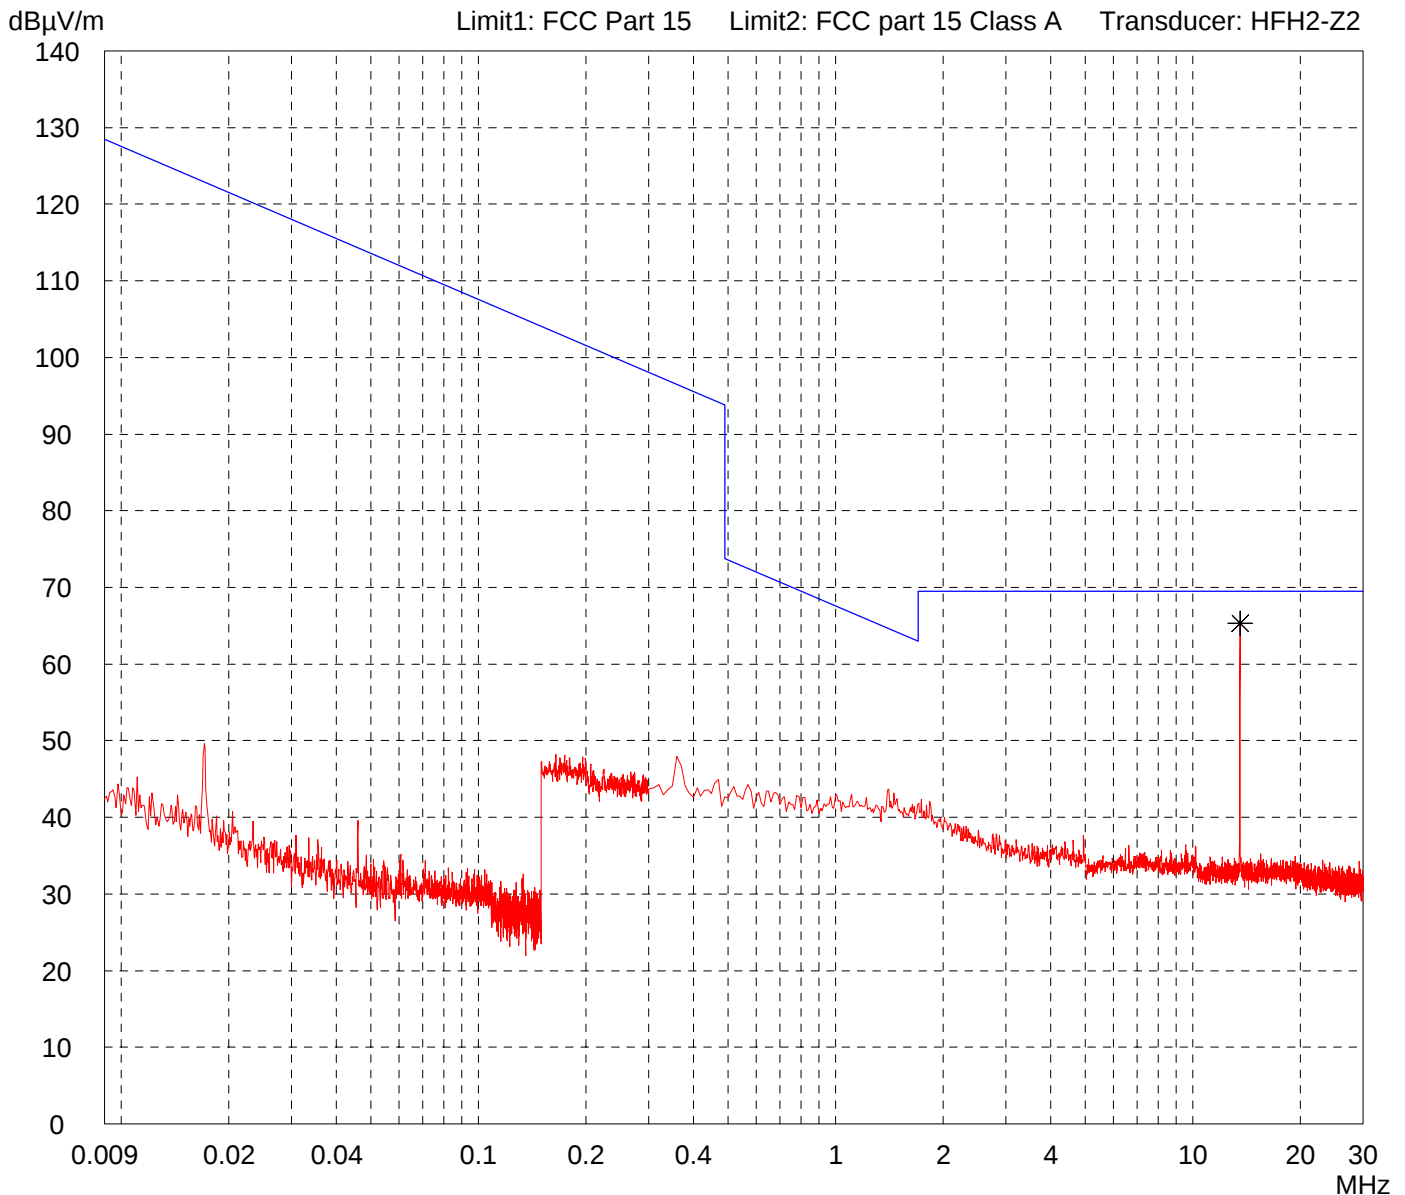


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

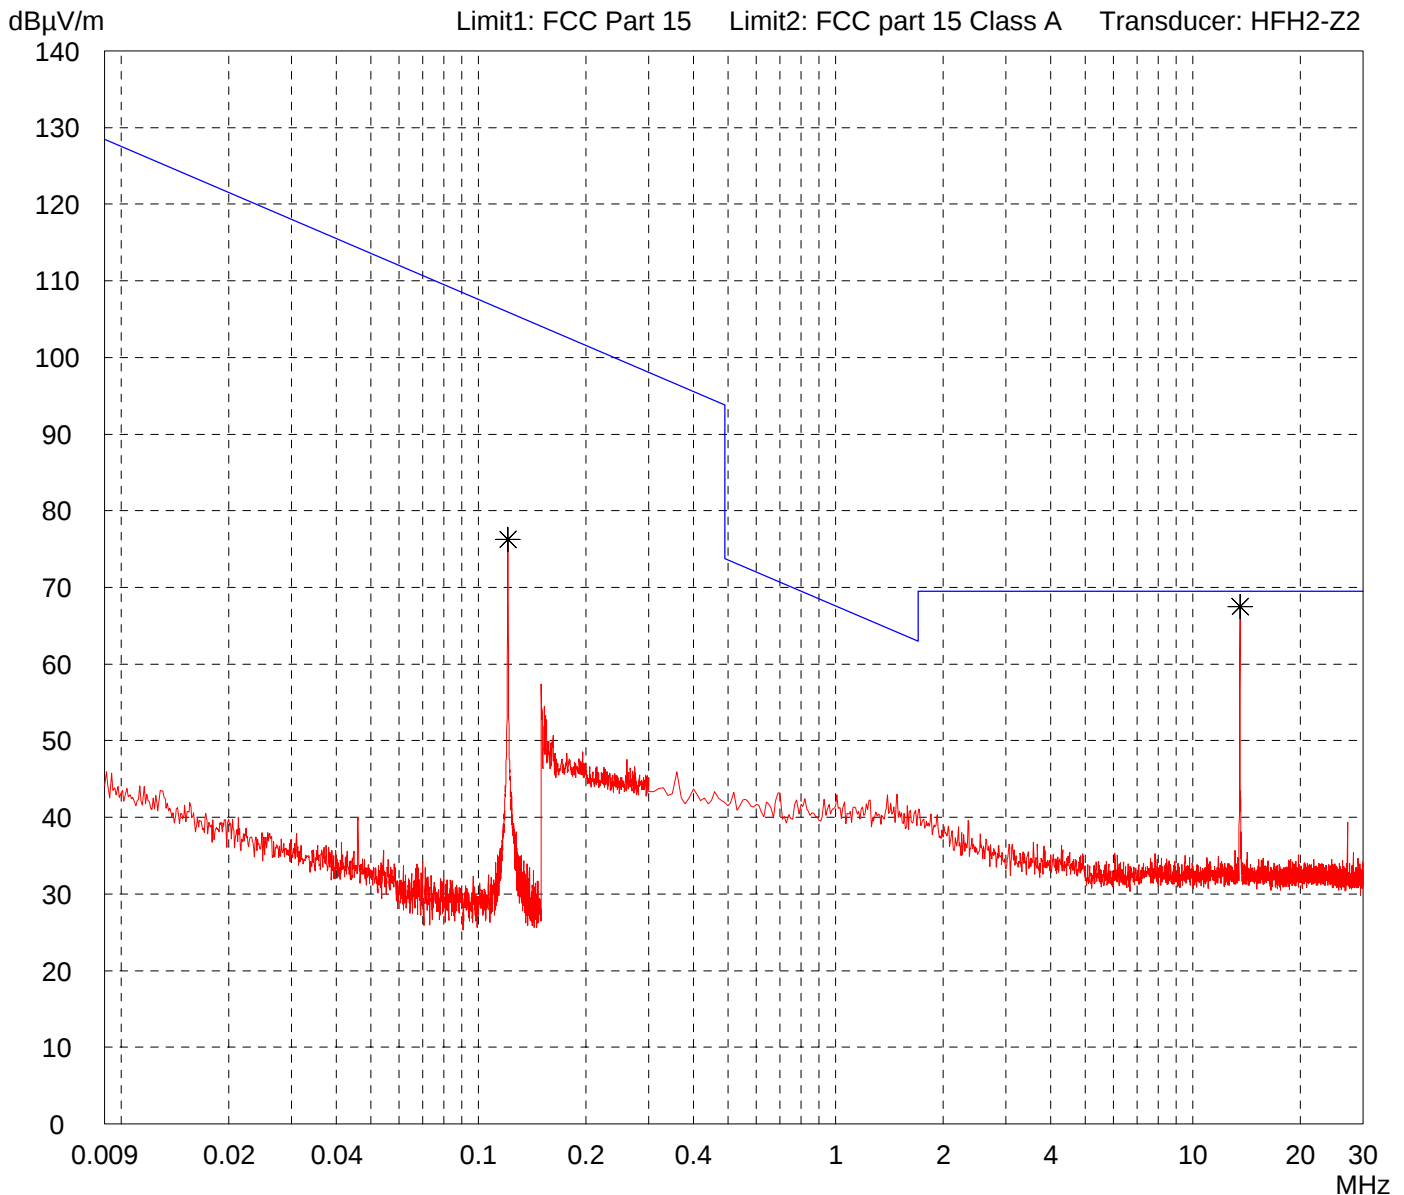


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

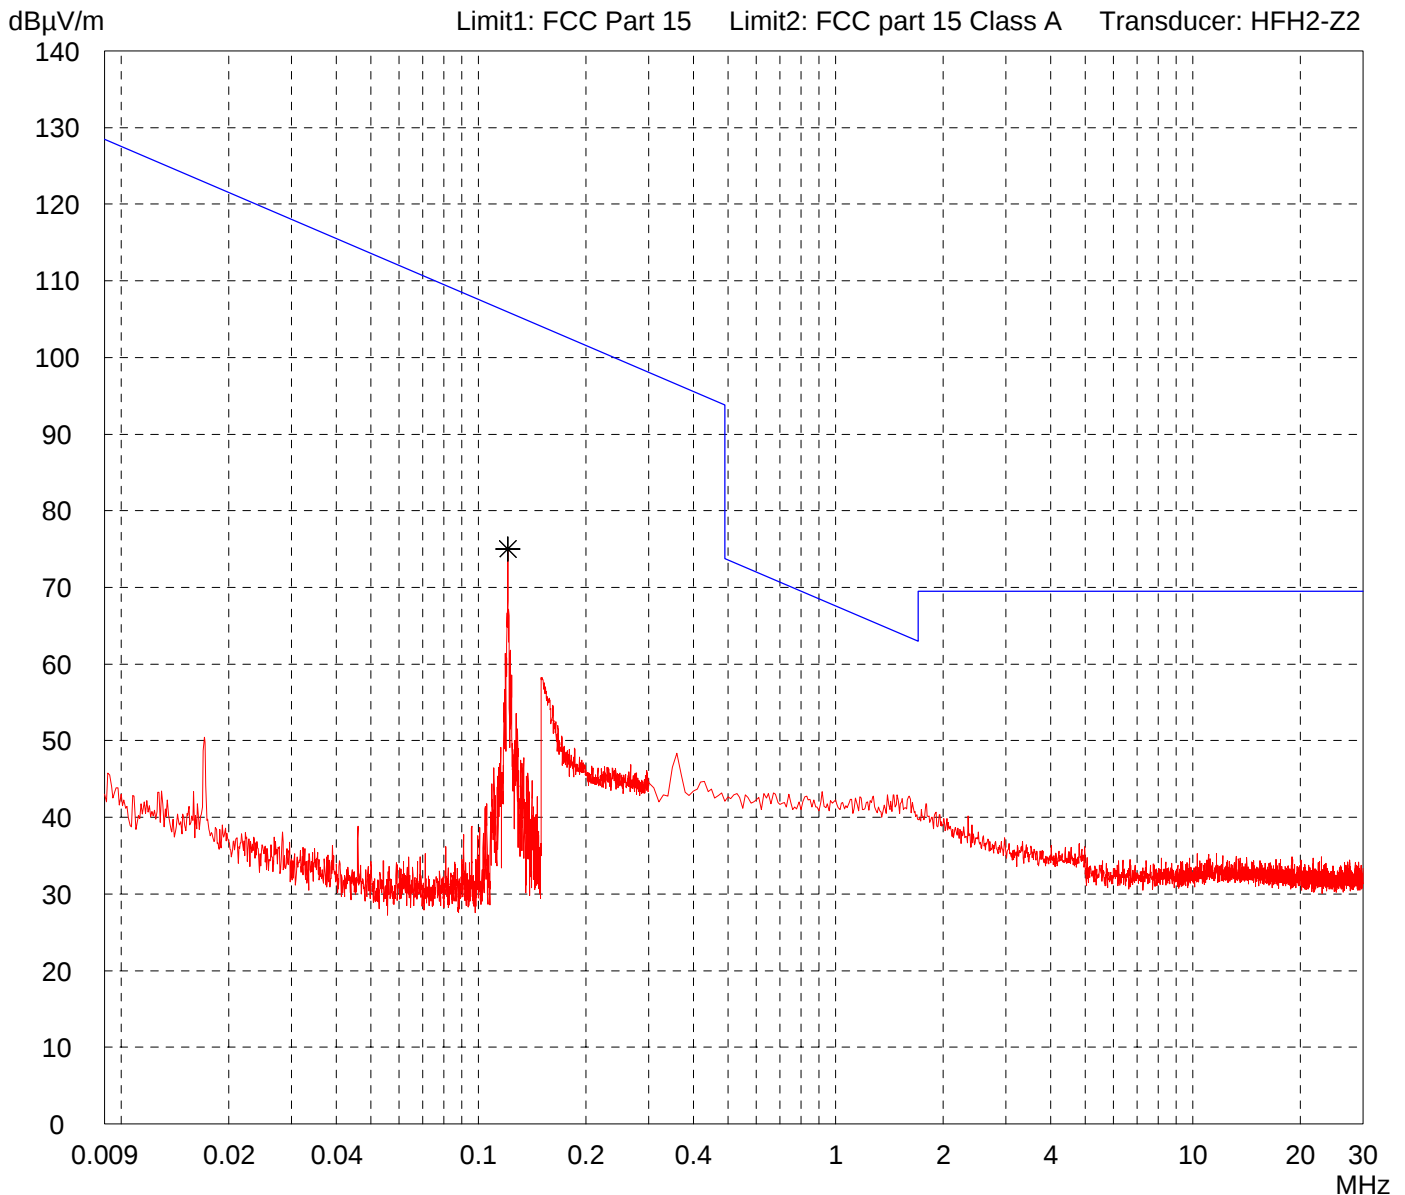


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

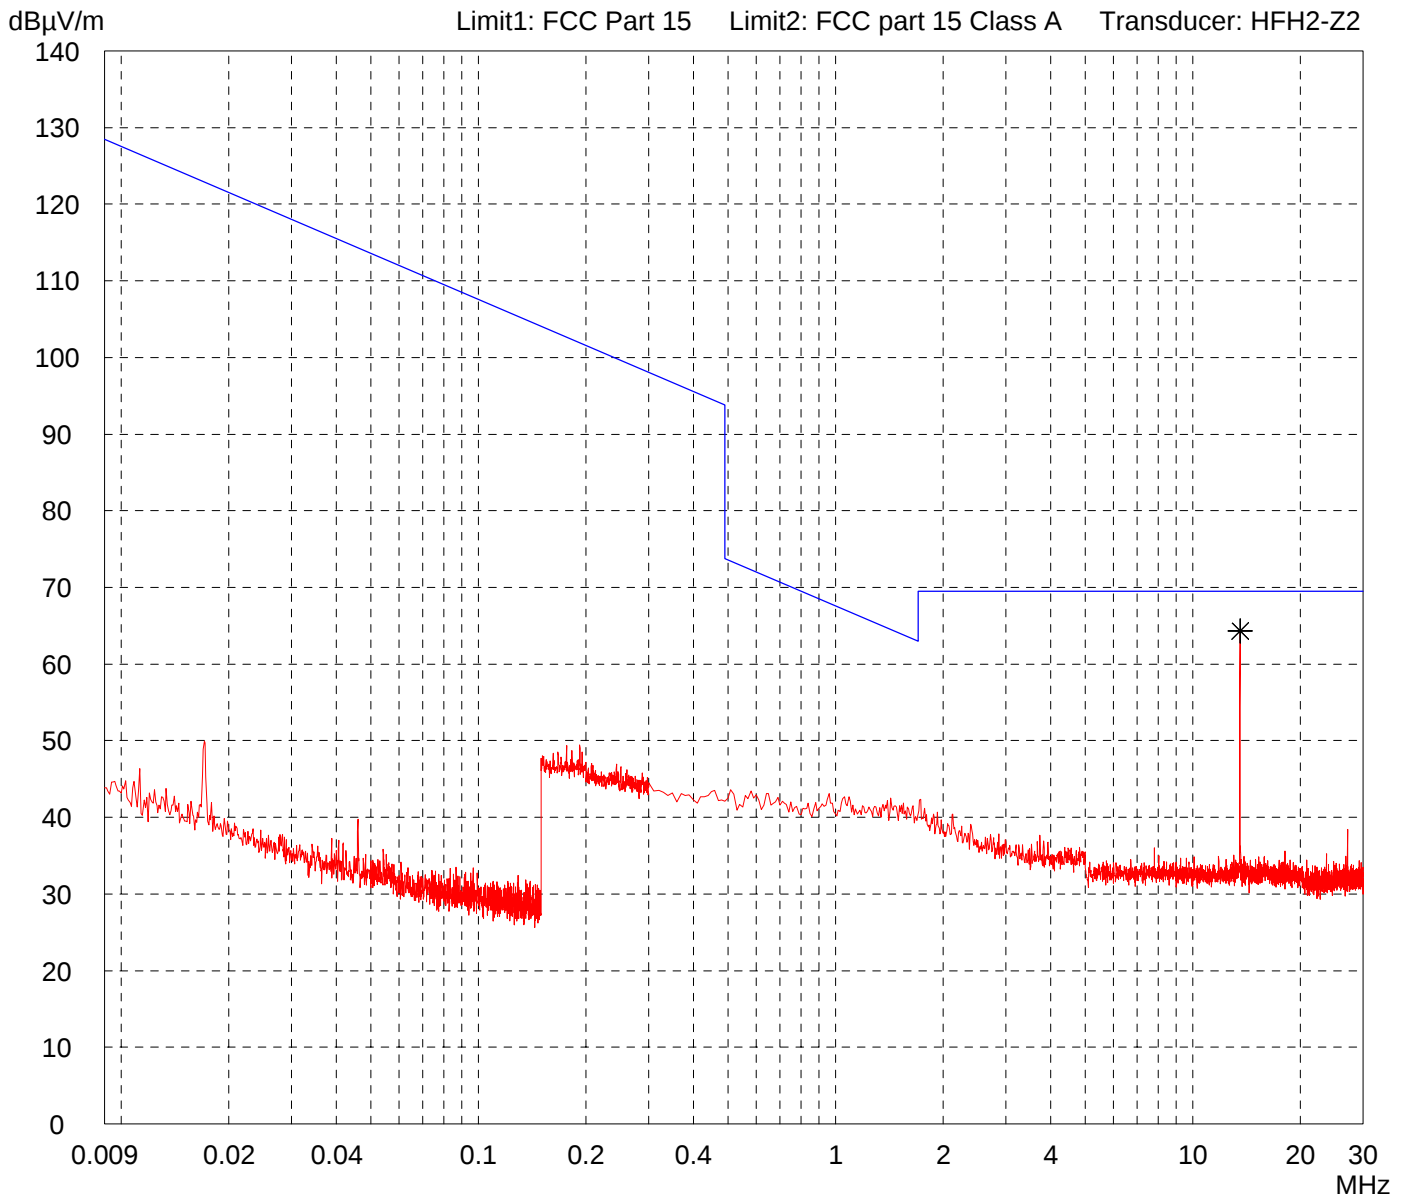


Result: Prescan	Project file: 55426-50412
---------------------------	-------------------------------------

Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

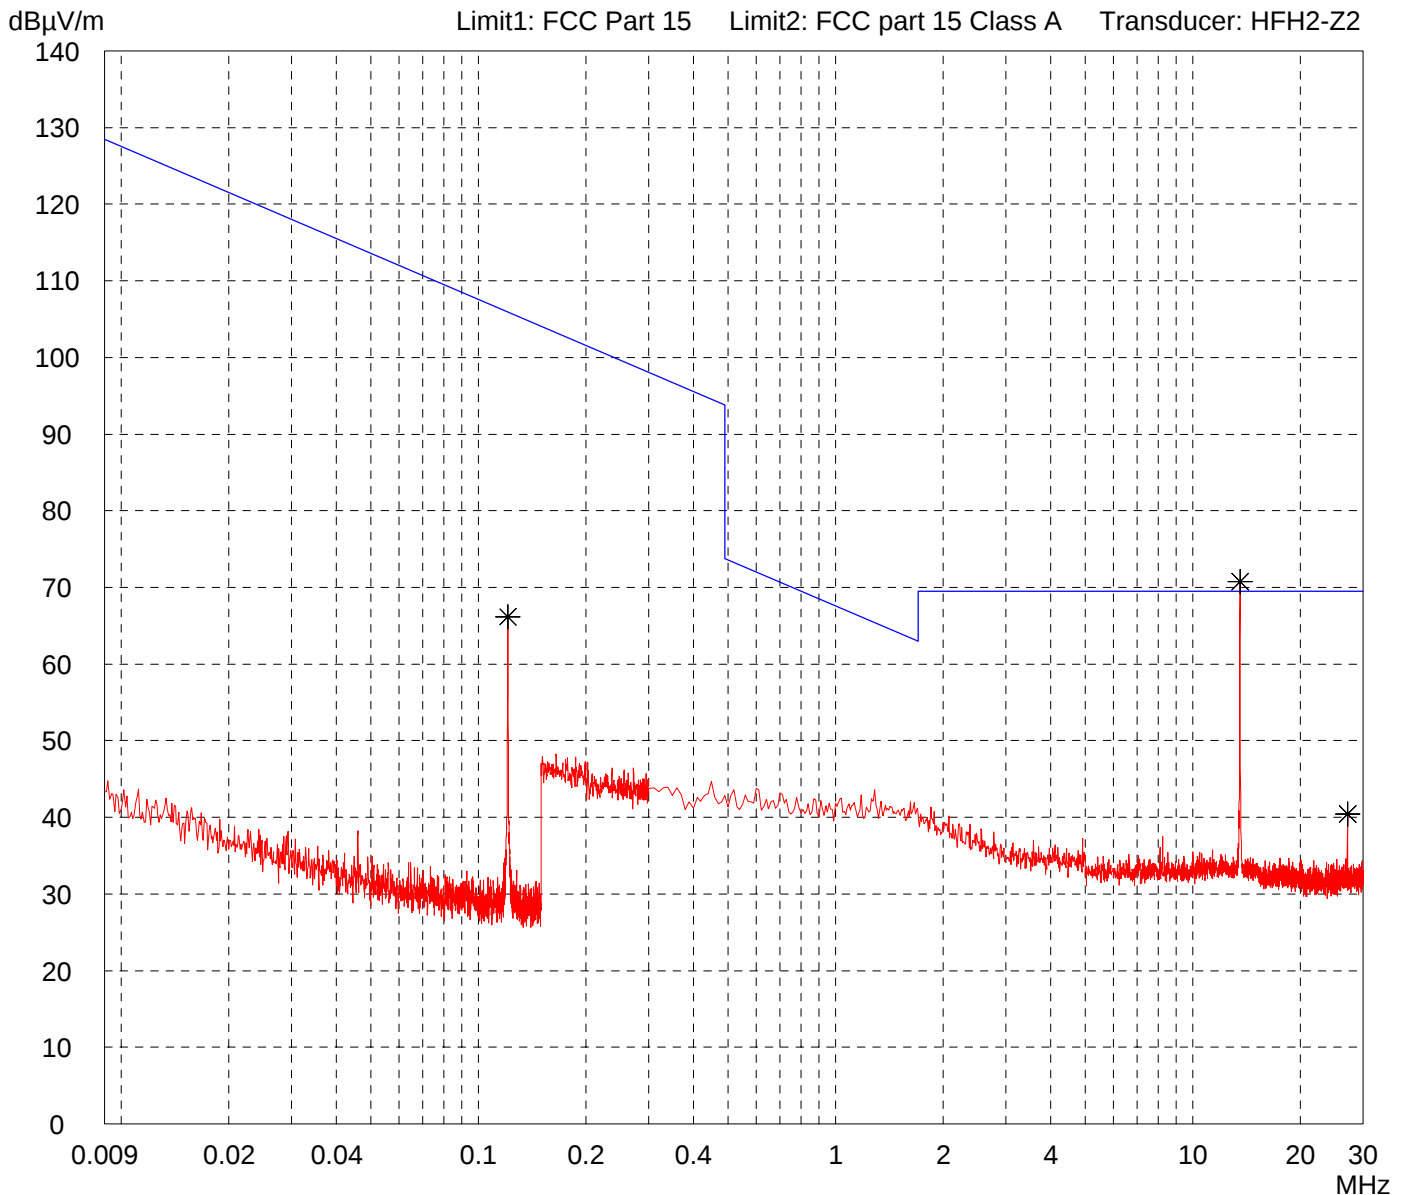


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

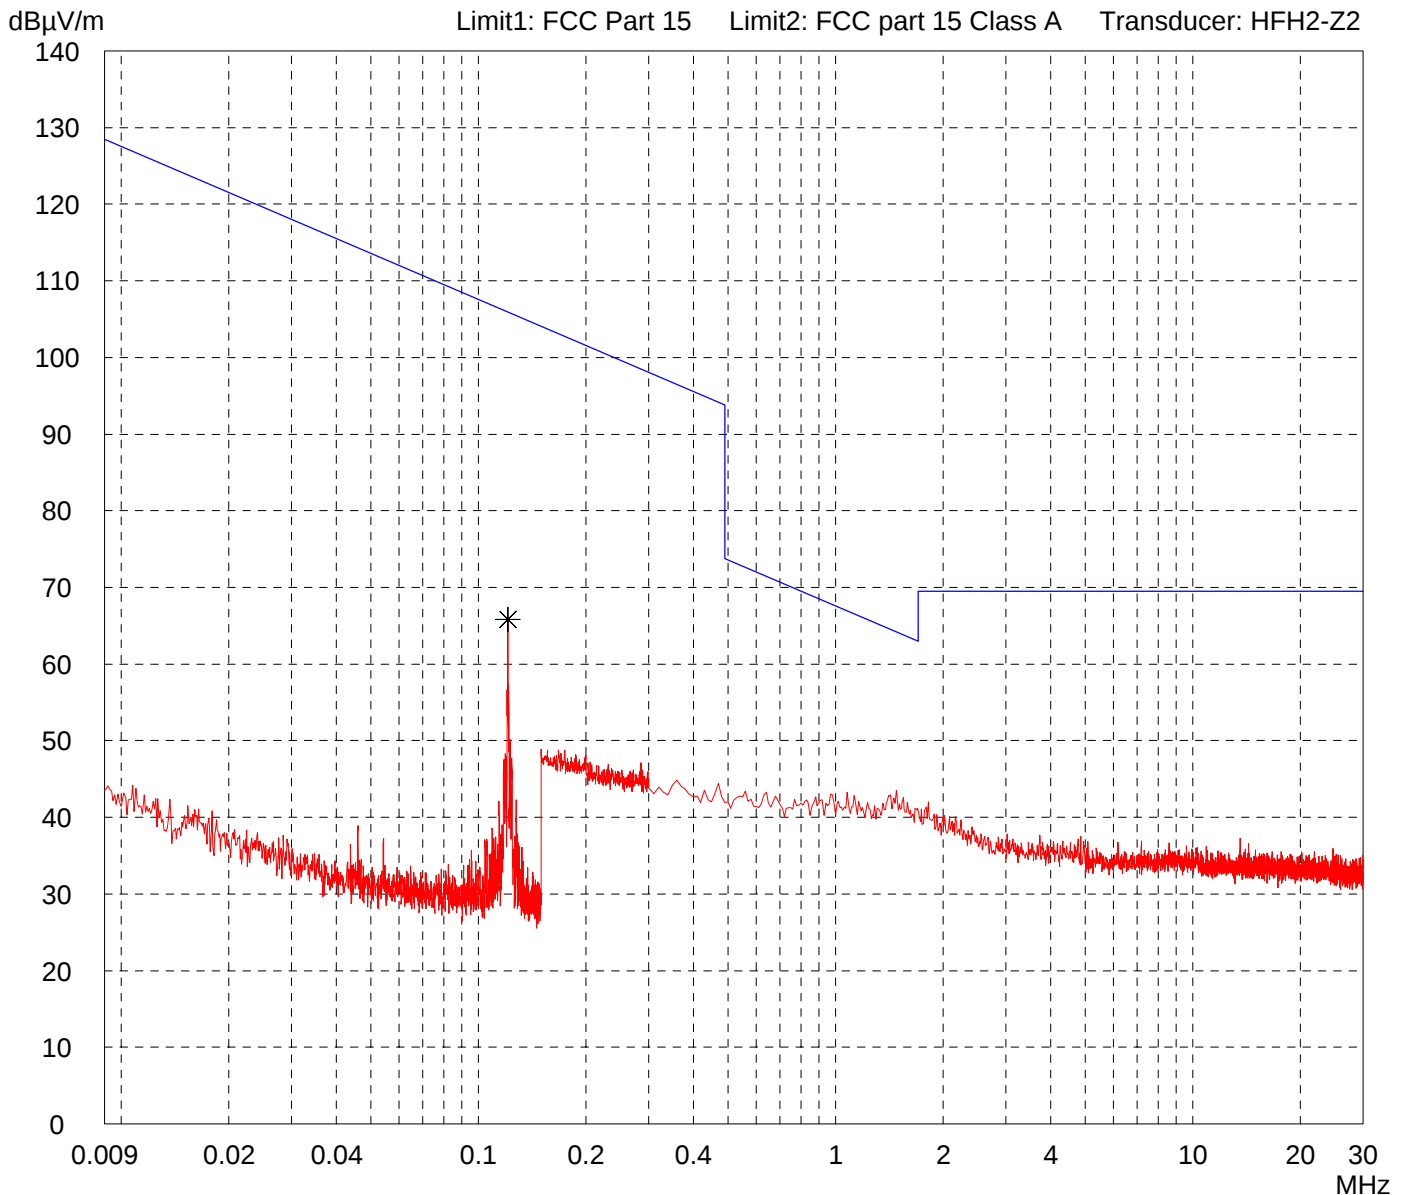


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

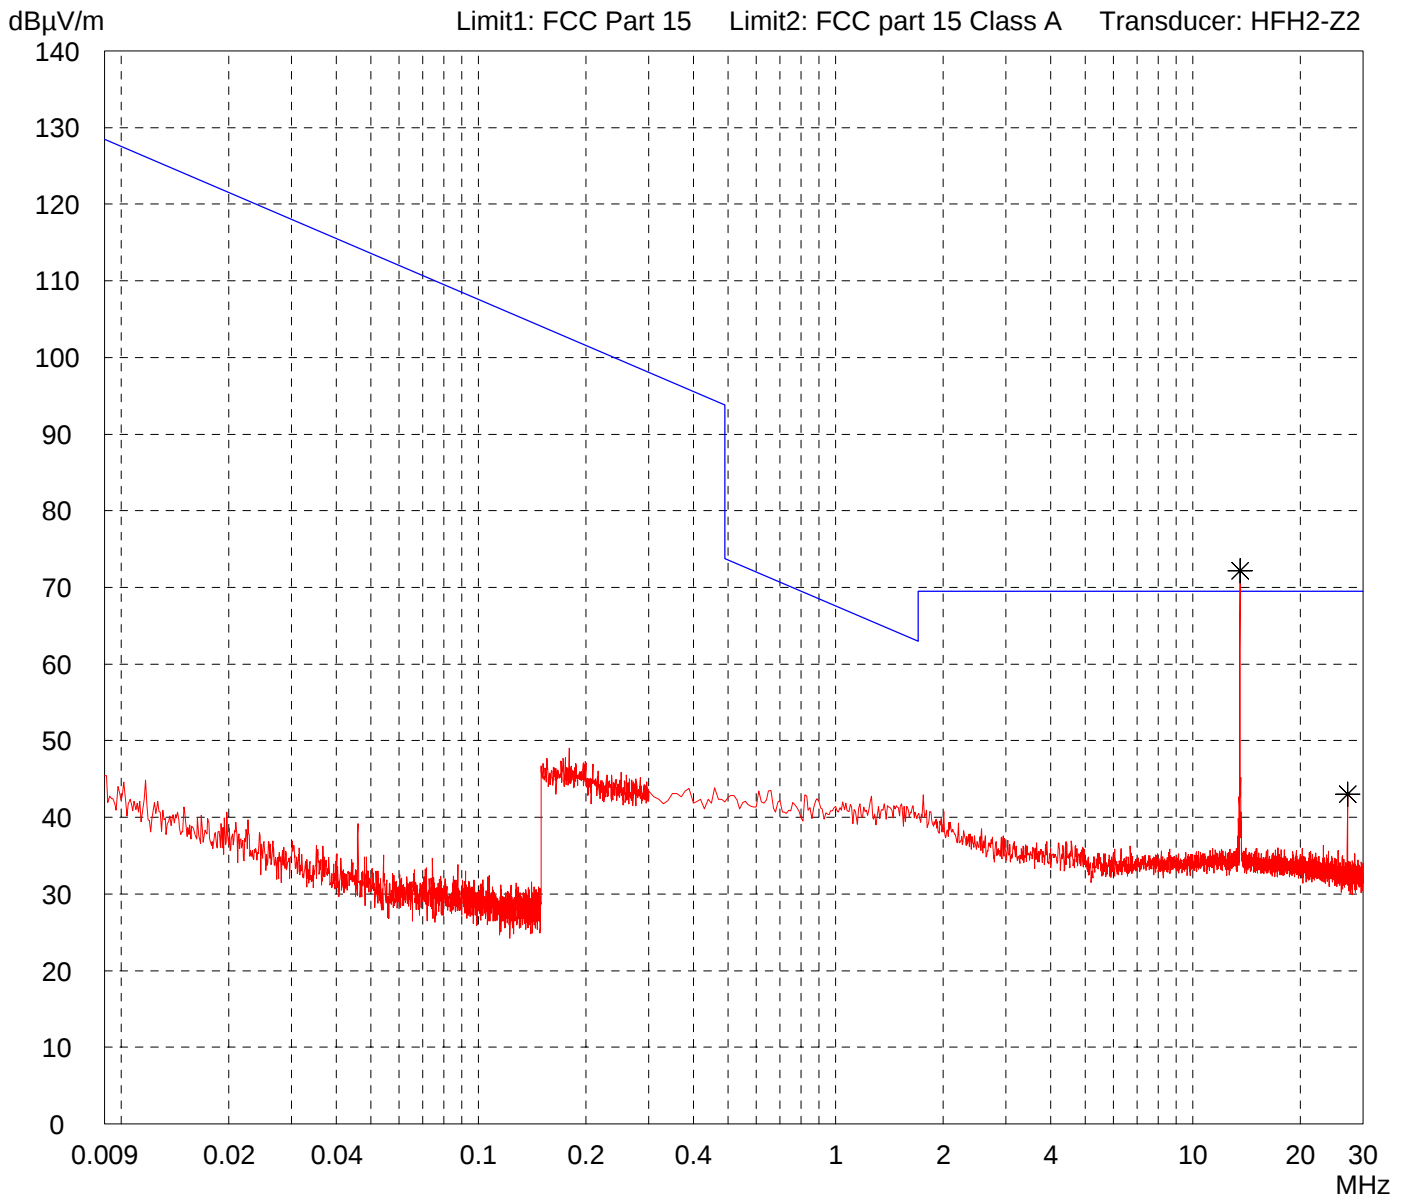


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd648 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

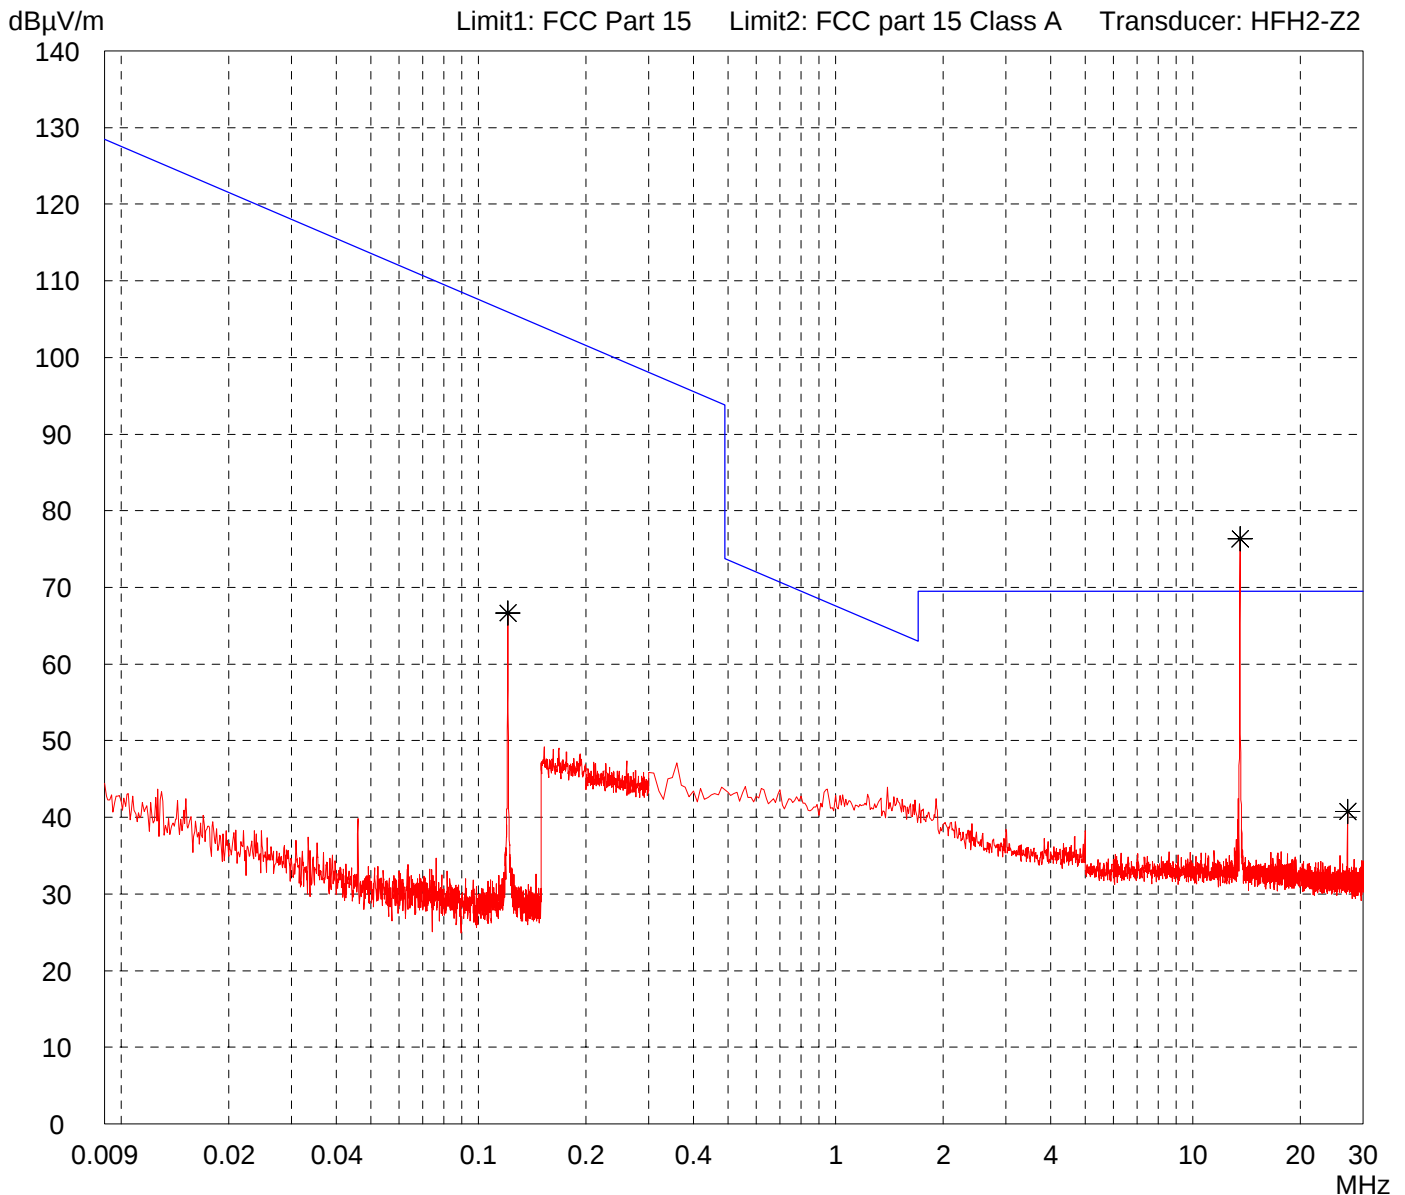


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd648 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

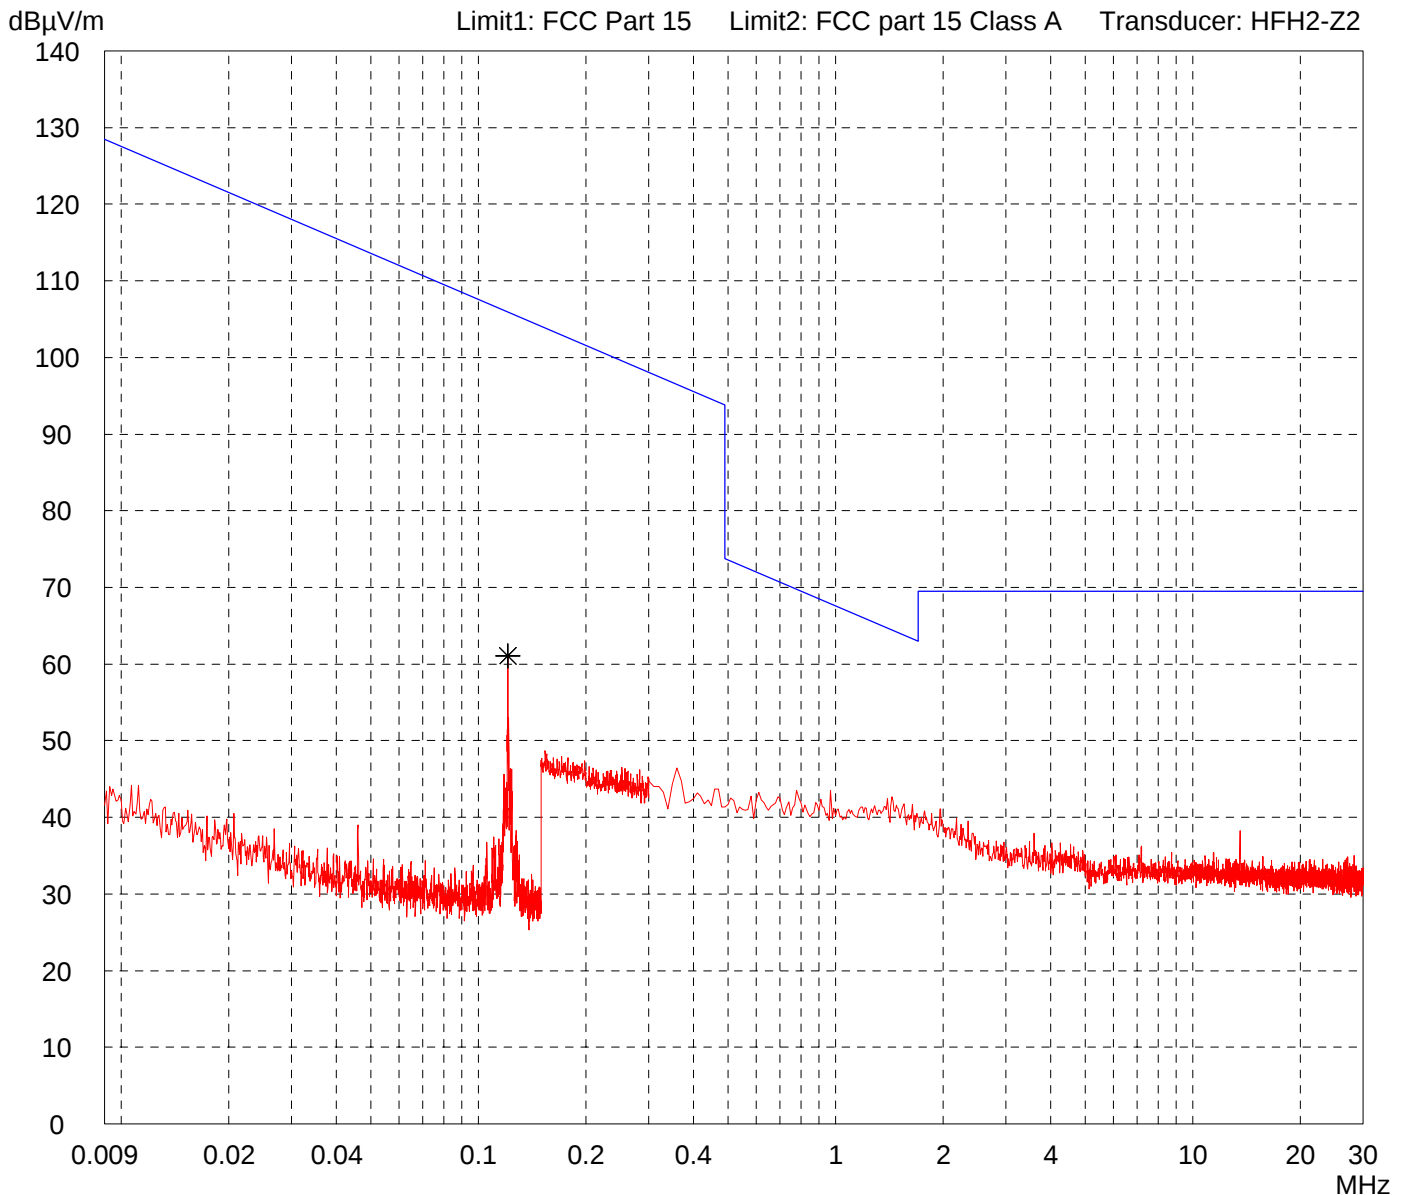


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd648 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

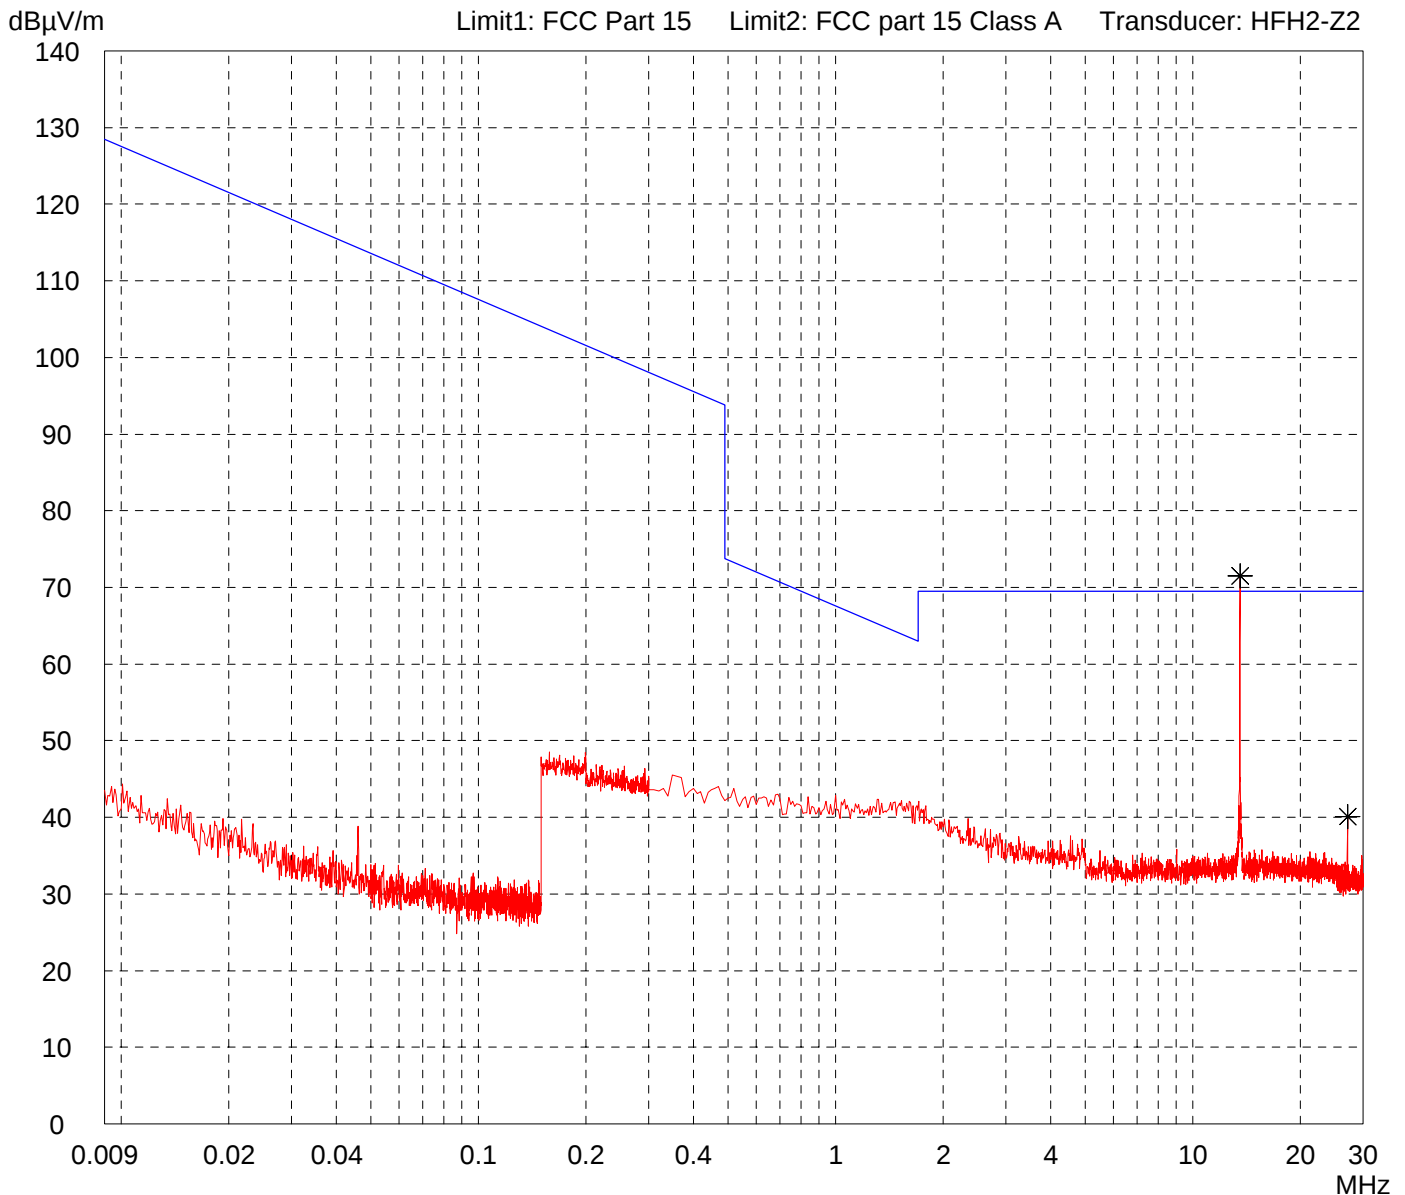


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

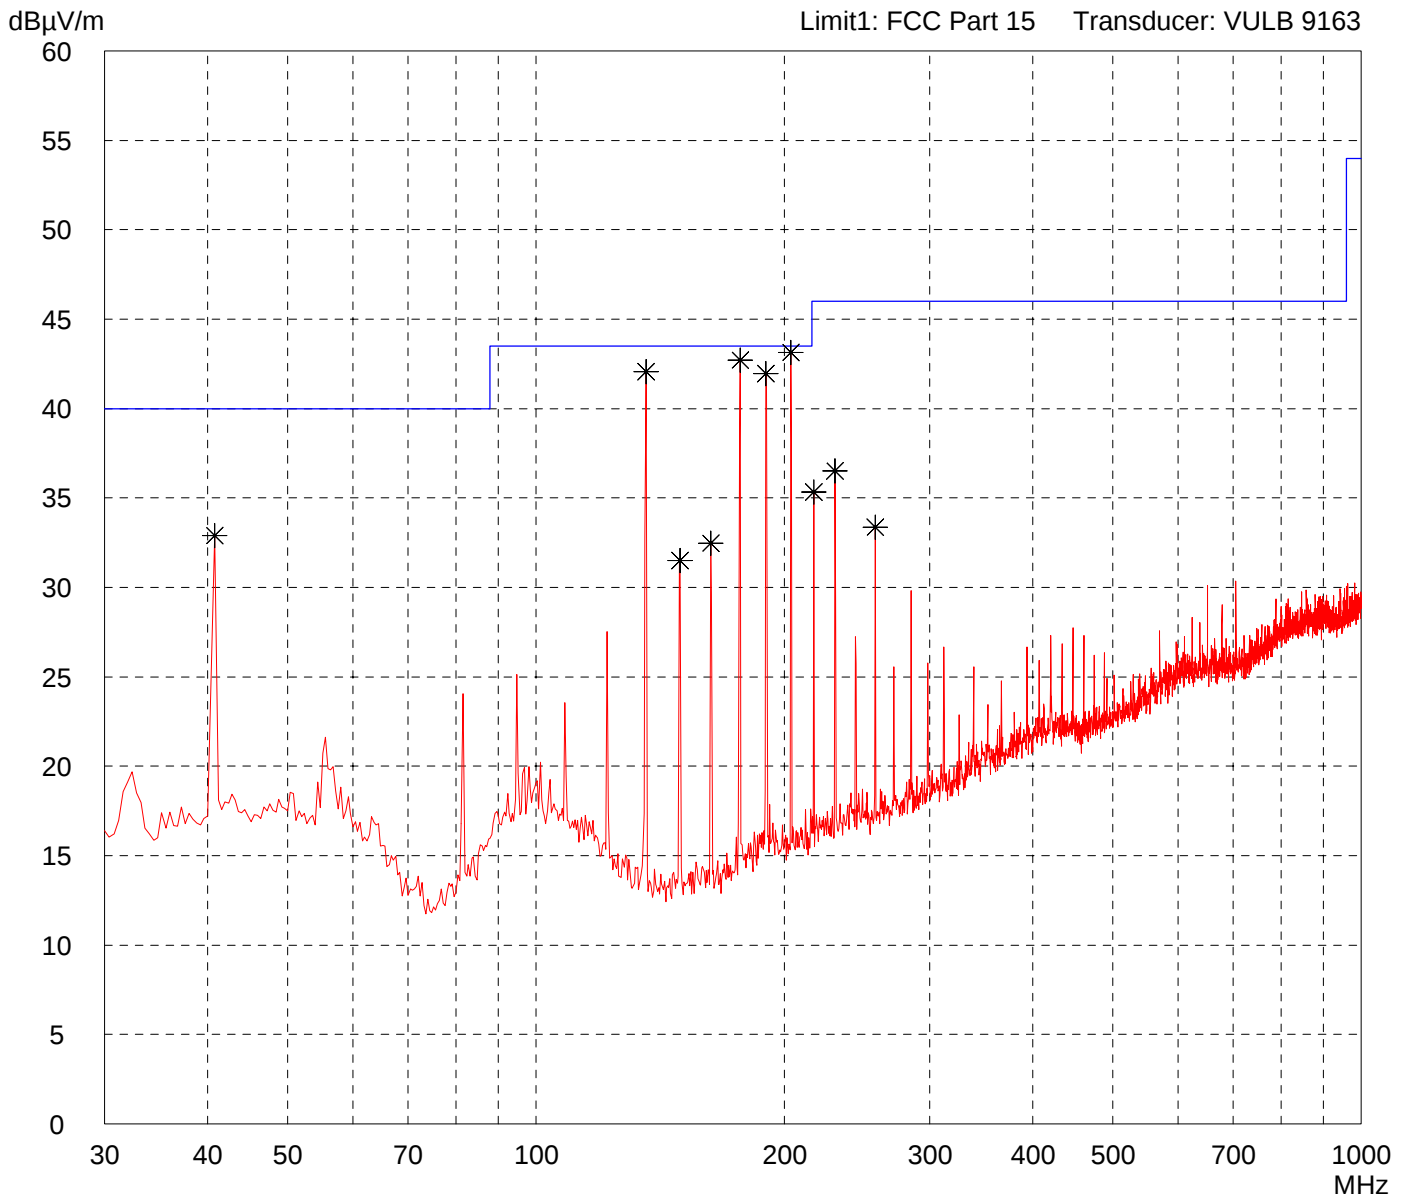

Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
**Test distance 3 metres
Vertical Polarization**

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd611
- transmitting continuously

Detector:
Peak


List of values:

10 dB Margin

50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

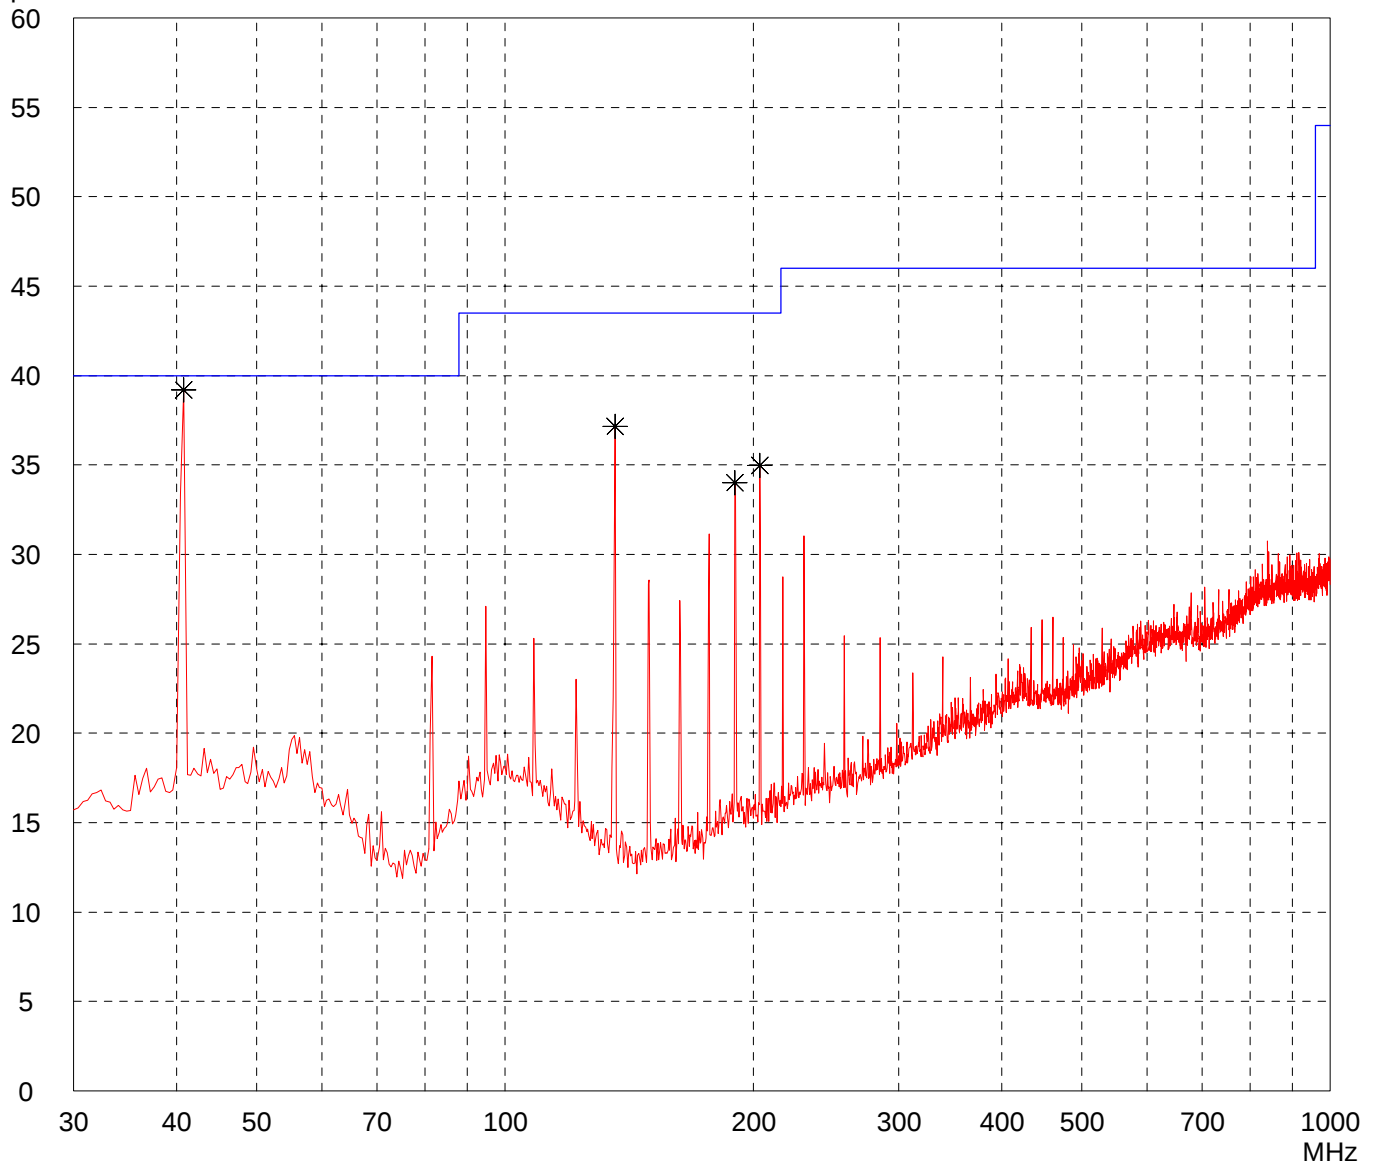

Result:
Prescan

Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically


File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd611
- reading TAG (13.56 MHz)

Detector:
Peak

List of values:
Selected by hand

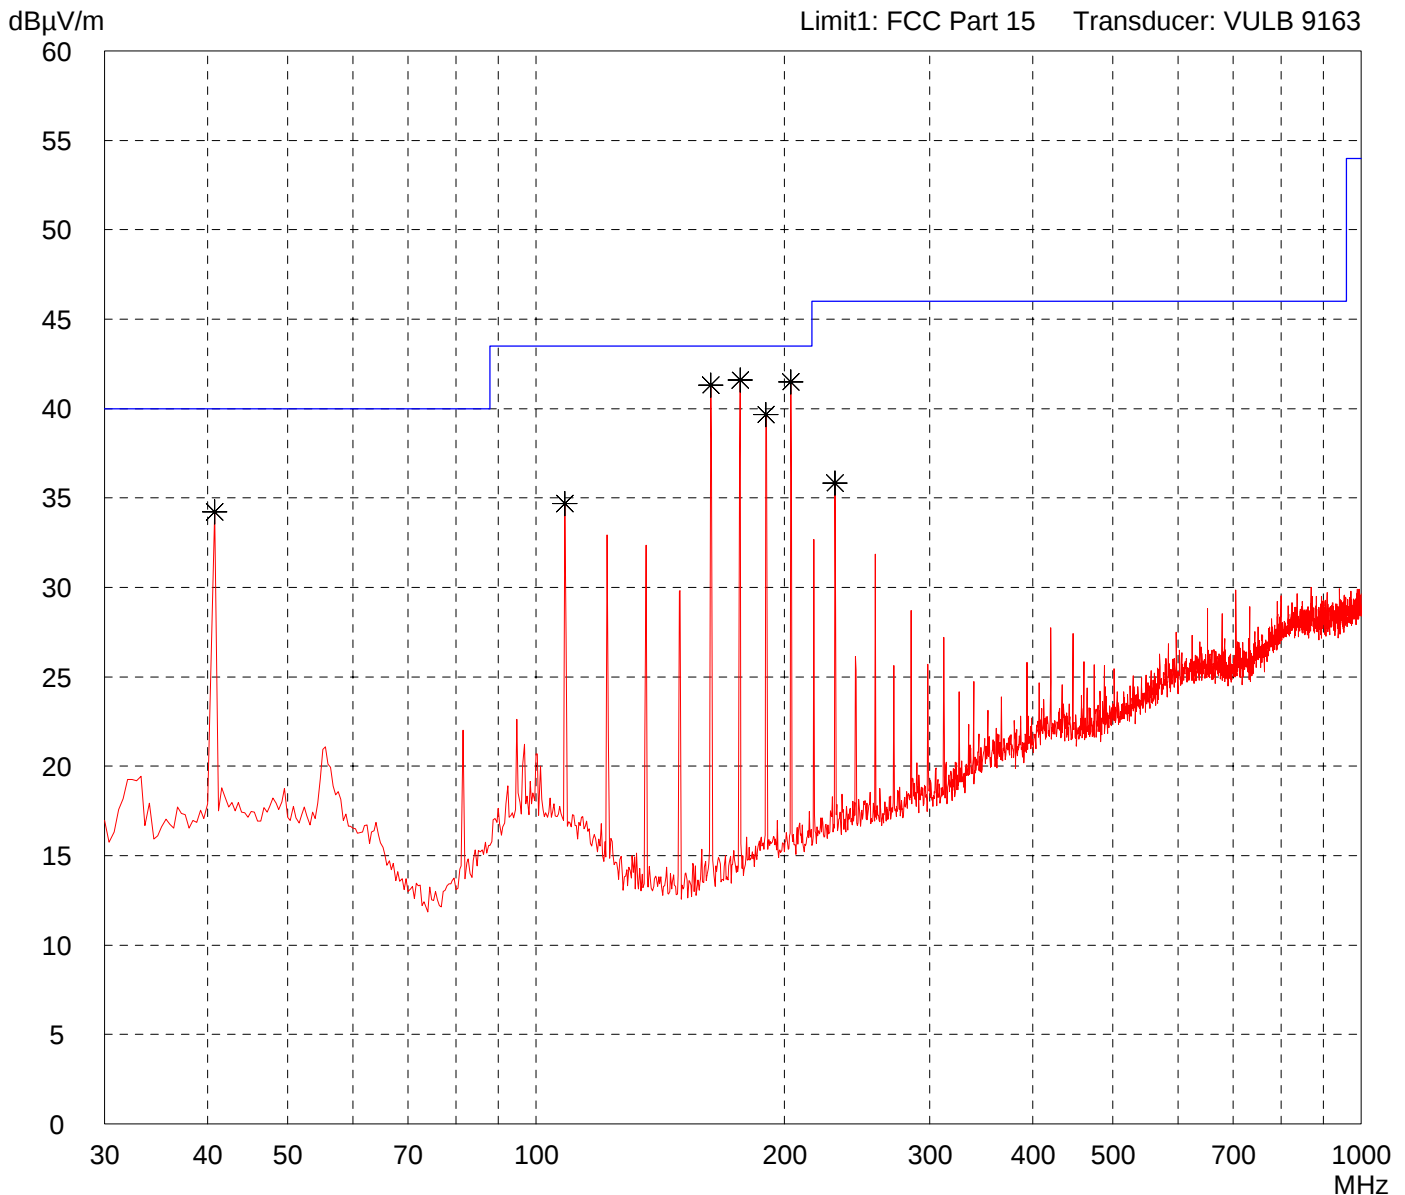

Result:
Prescan

Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
**Test distance 3 metres
Vertical Polarization**

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd611
- reading TAG (13.56 MHz)


Detector:
Peak

List of values:

Selected by hand

dBµV/m

Limit1: FCC Part 15 Transducer: VULB 9163

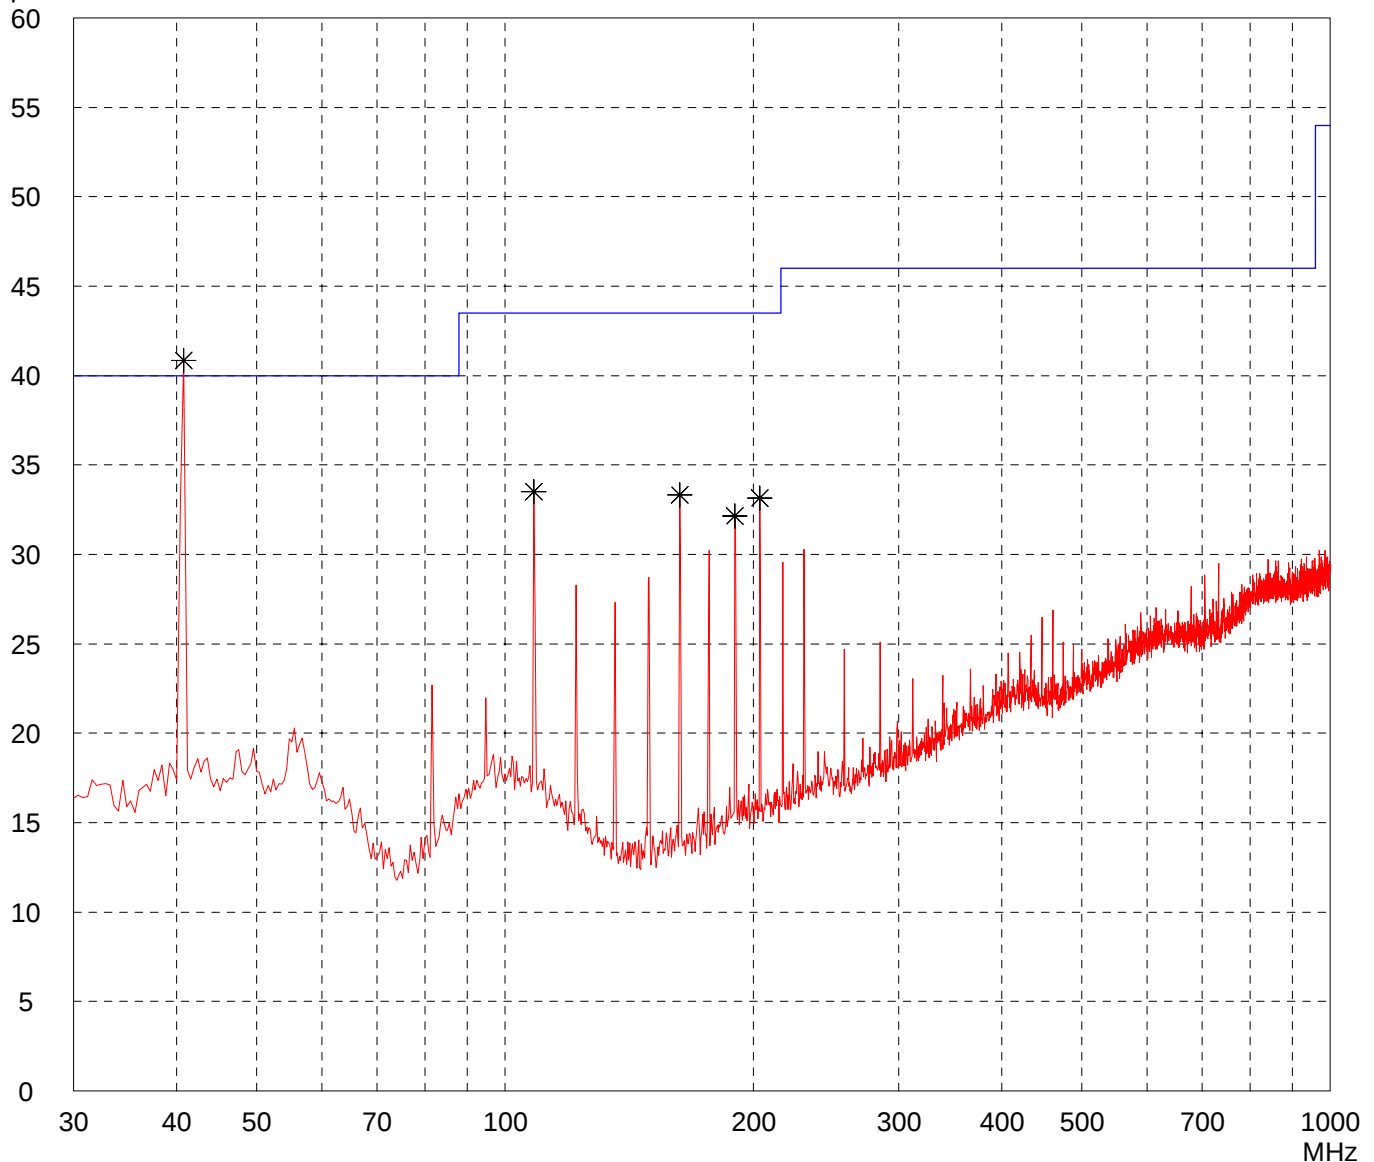

Result:
Prescan


Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

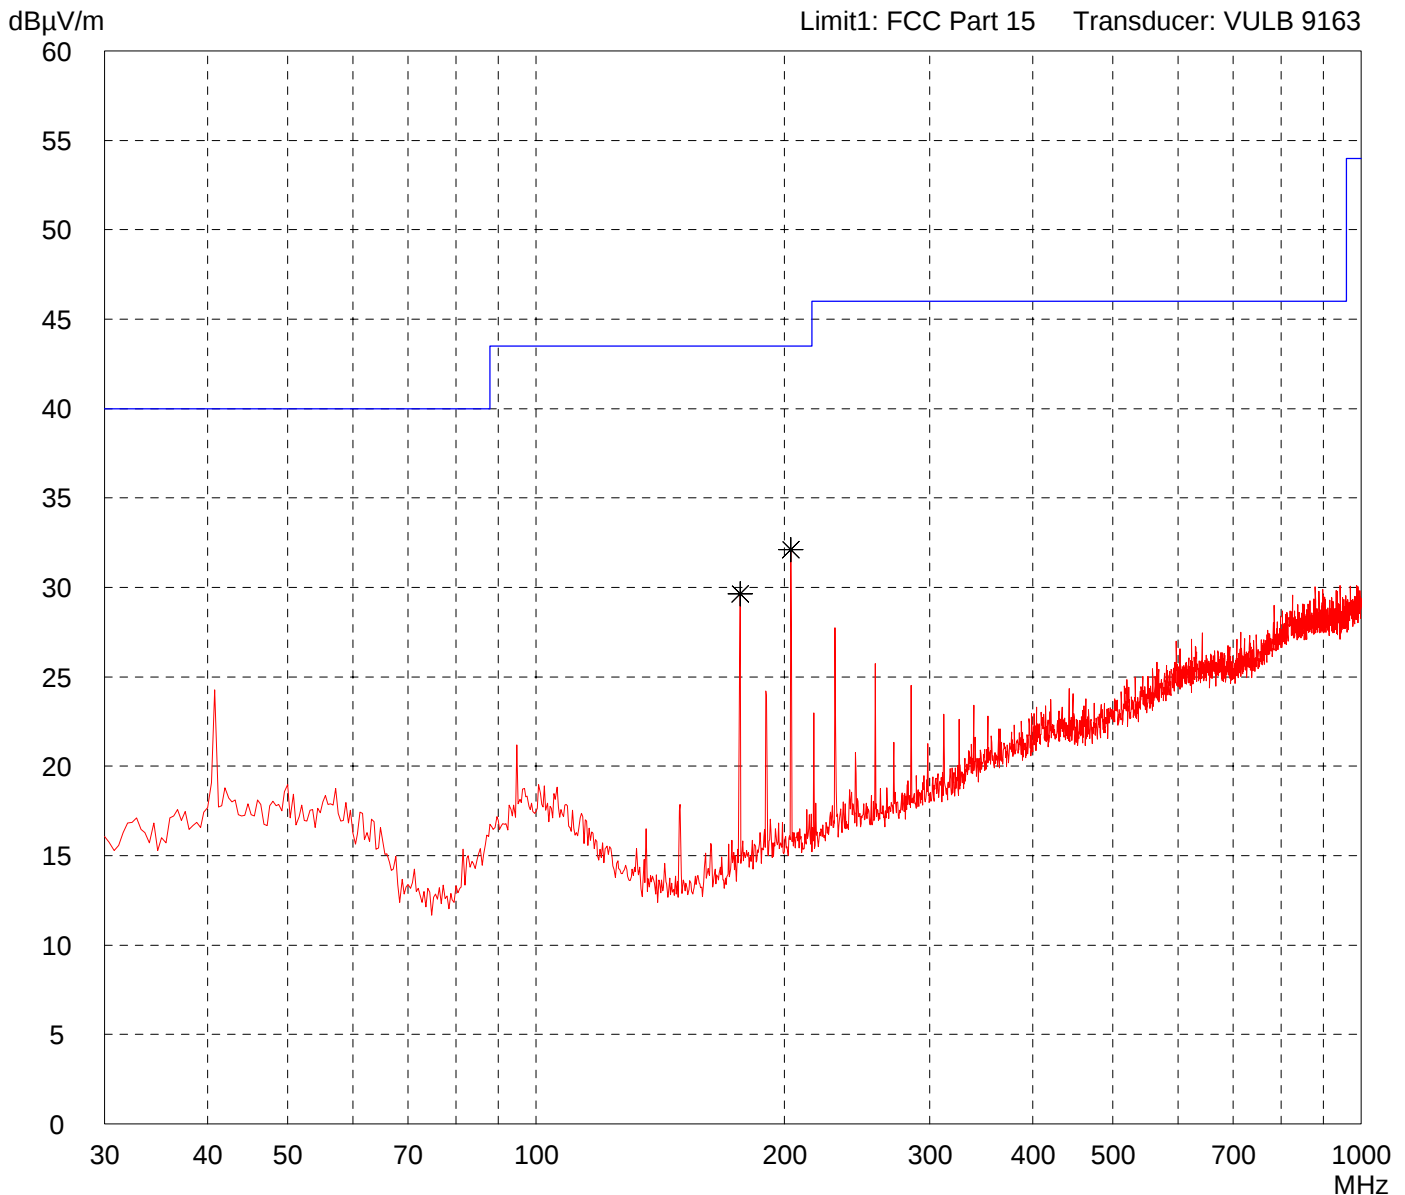


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd611 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

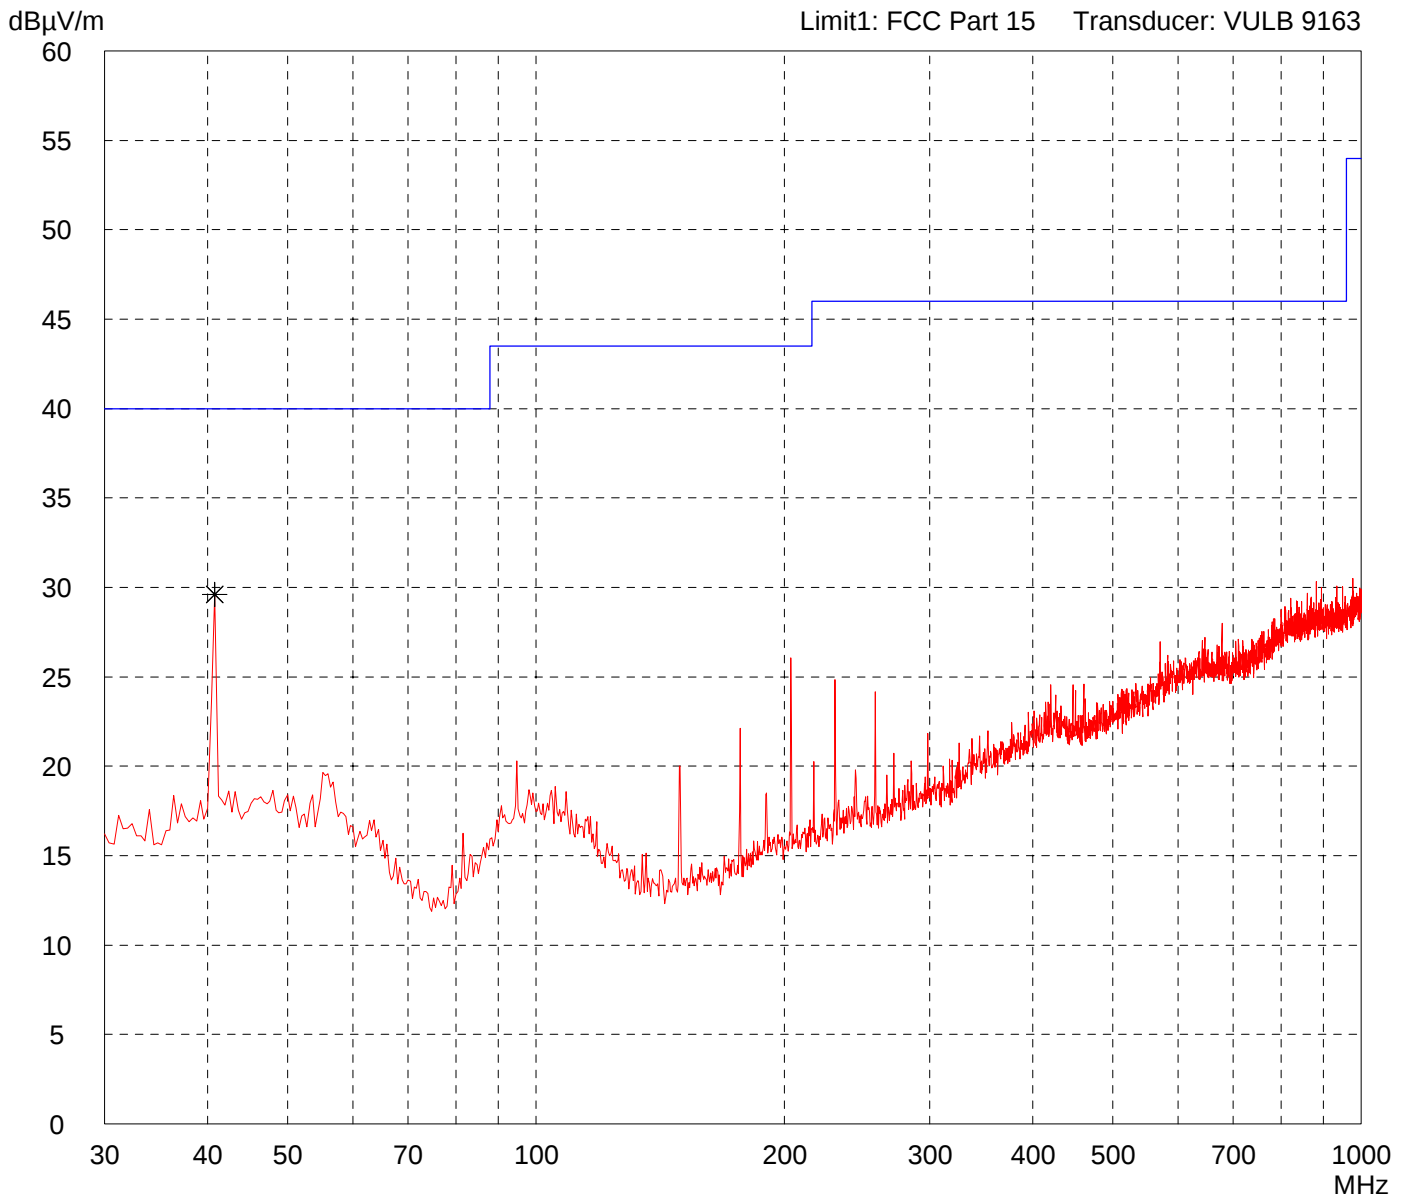


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

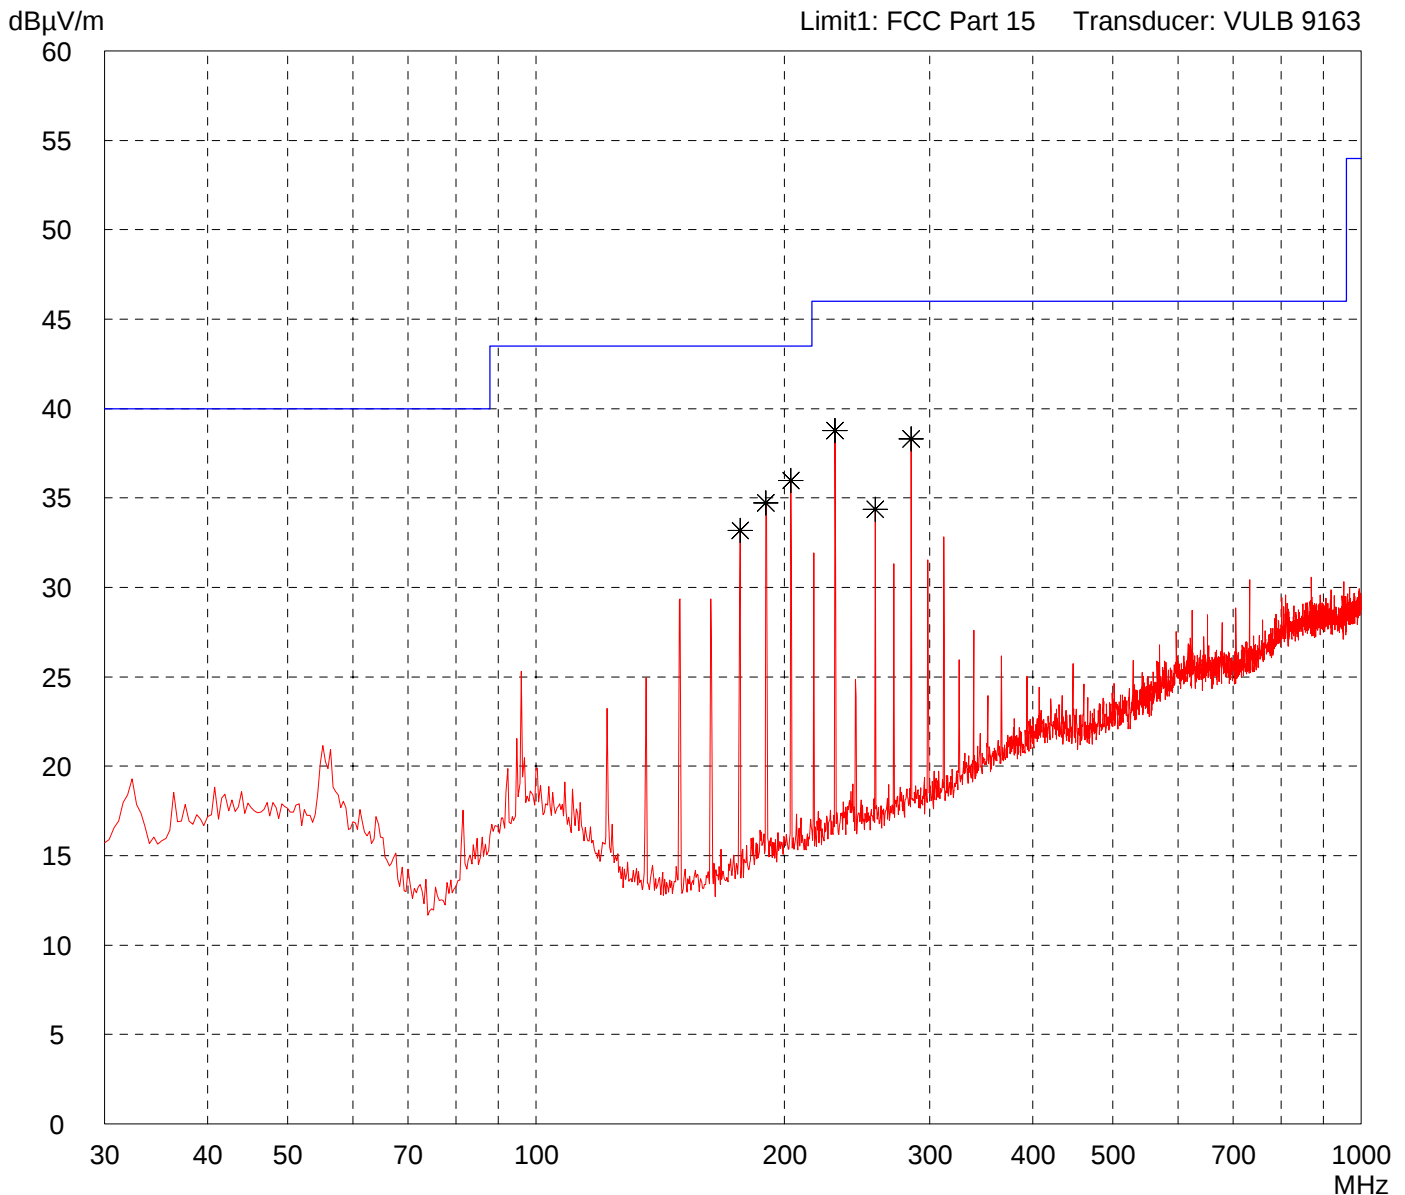


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

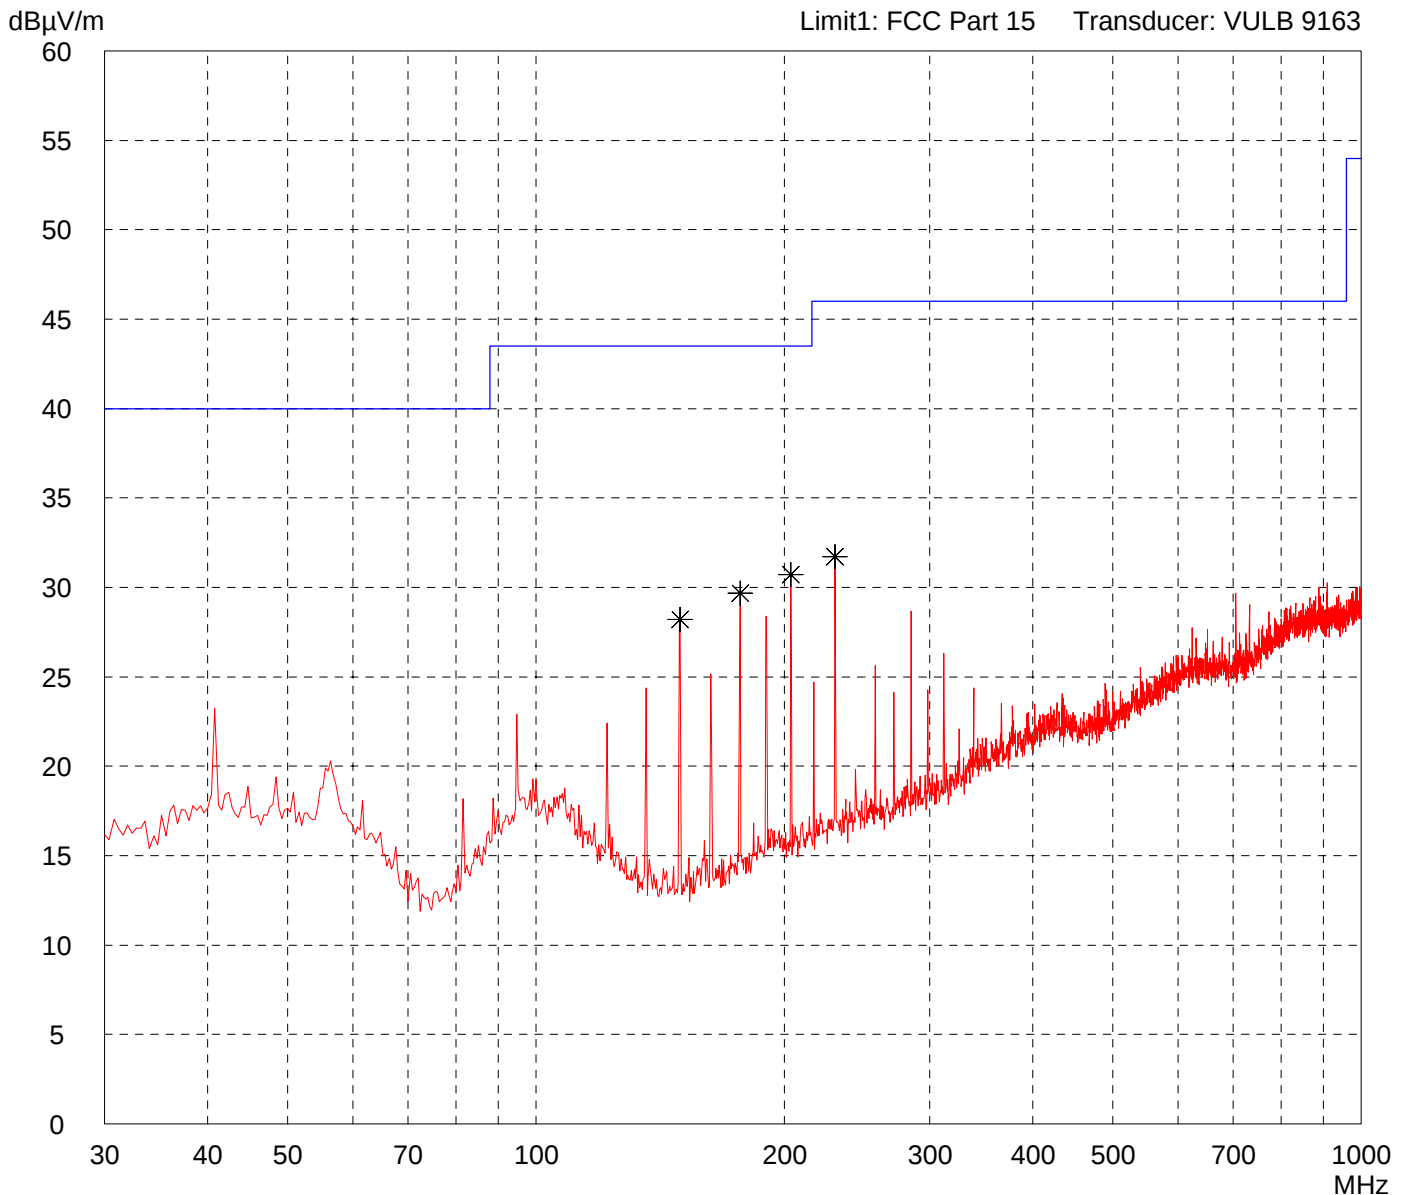

Result: Prescan	Project file: 55426-50412
---------------------------	-------------------------------------

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd612
- reading TAG (122 kHz)


Detector:
Peak

List of values:

Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

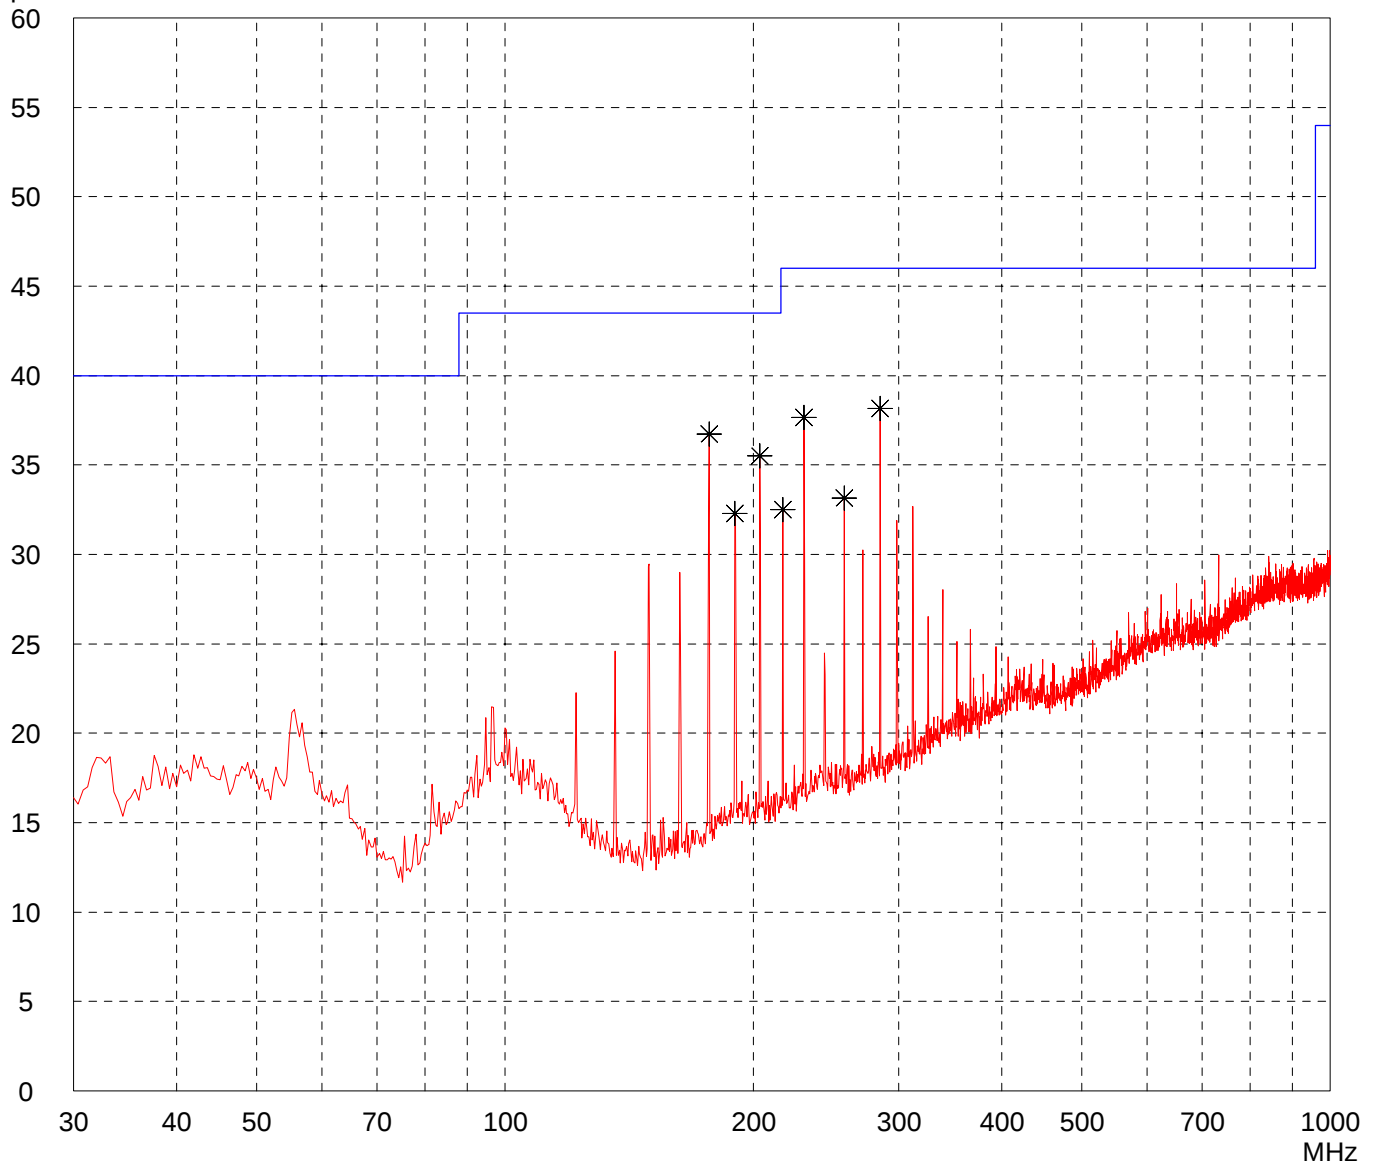

Result:
Prescan


Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

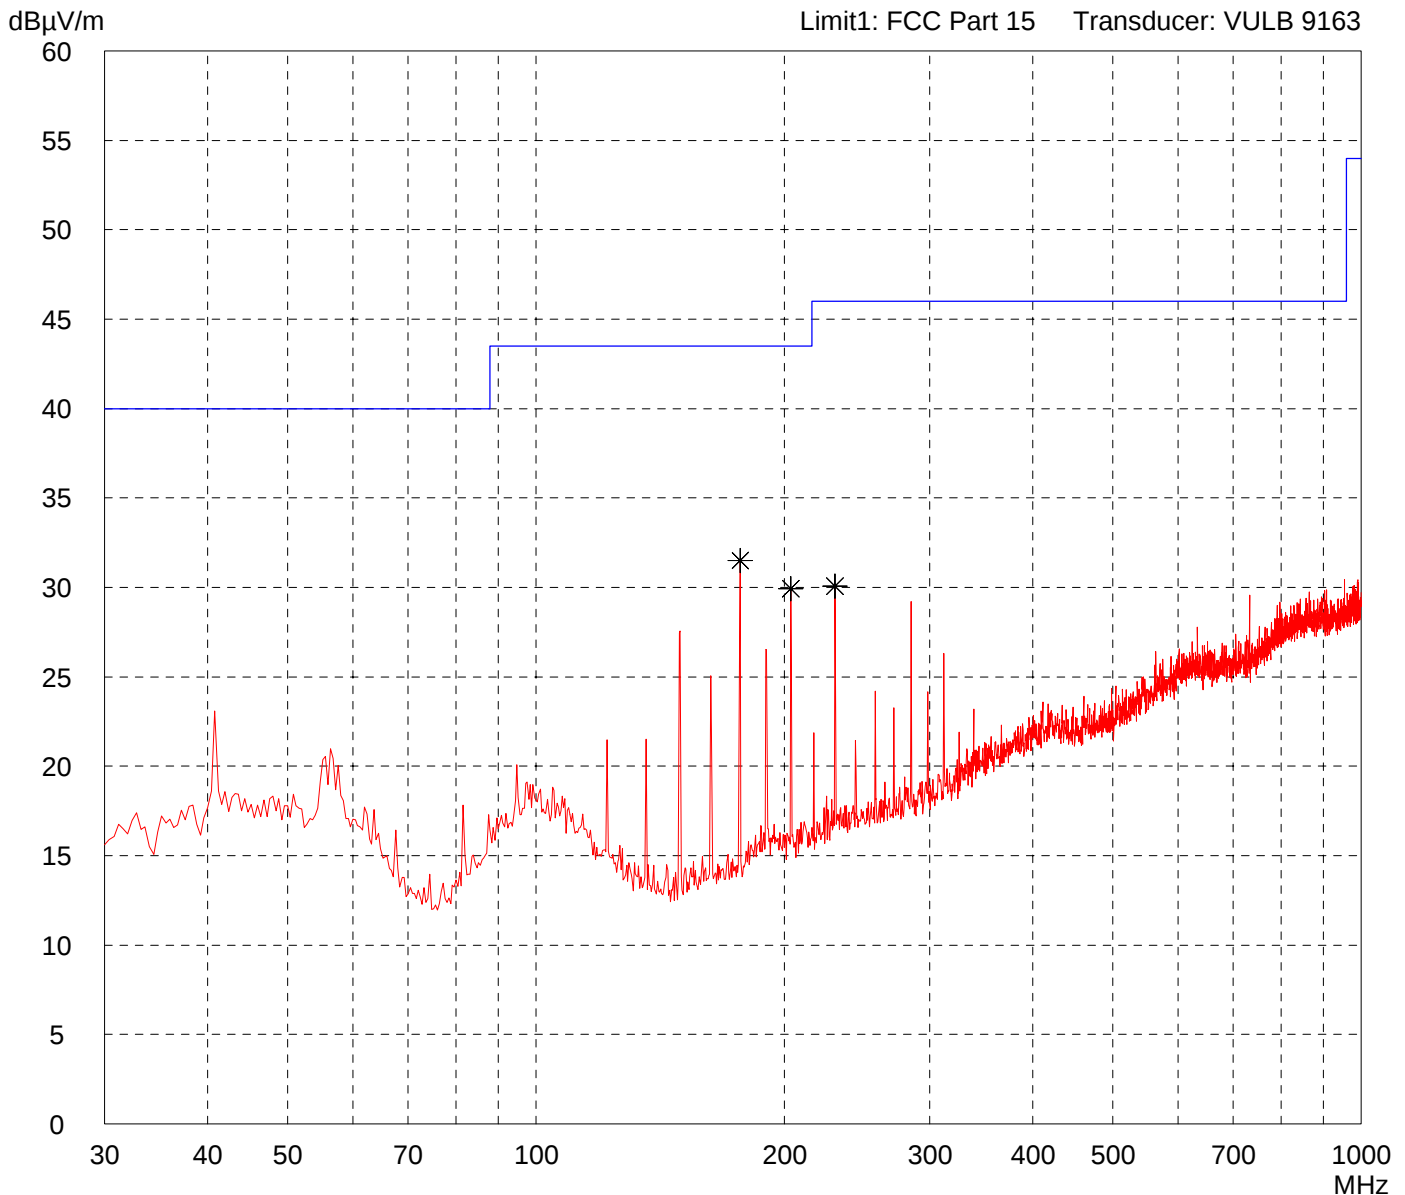


Result: Prescan	Project file: 55426-50412
---------------------------	-------------------------------------

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

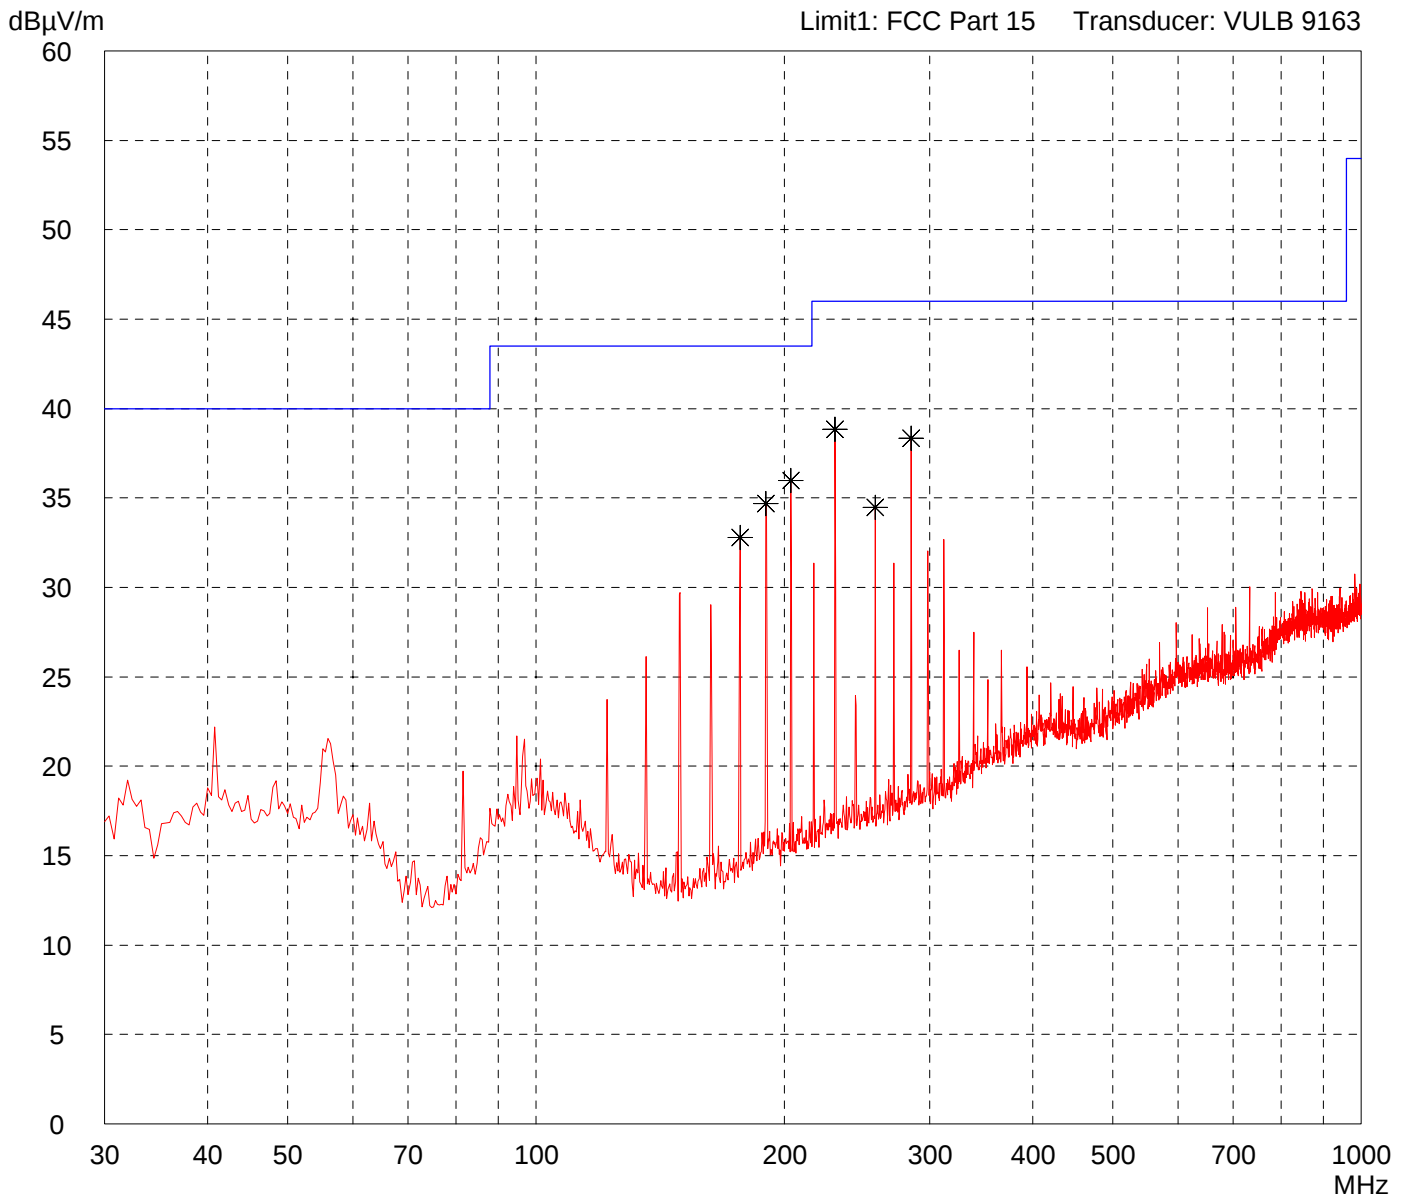


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd612 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

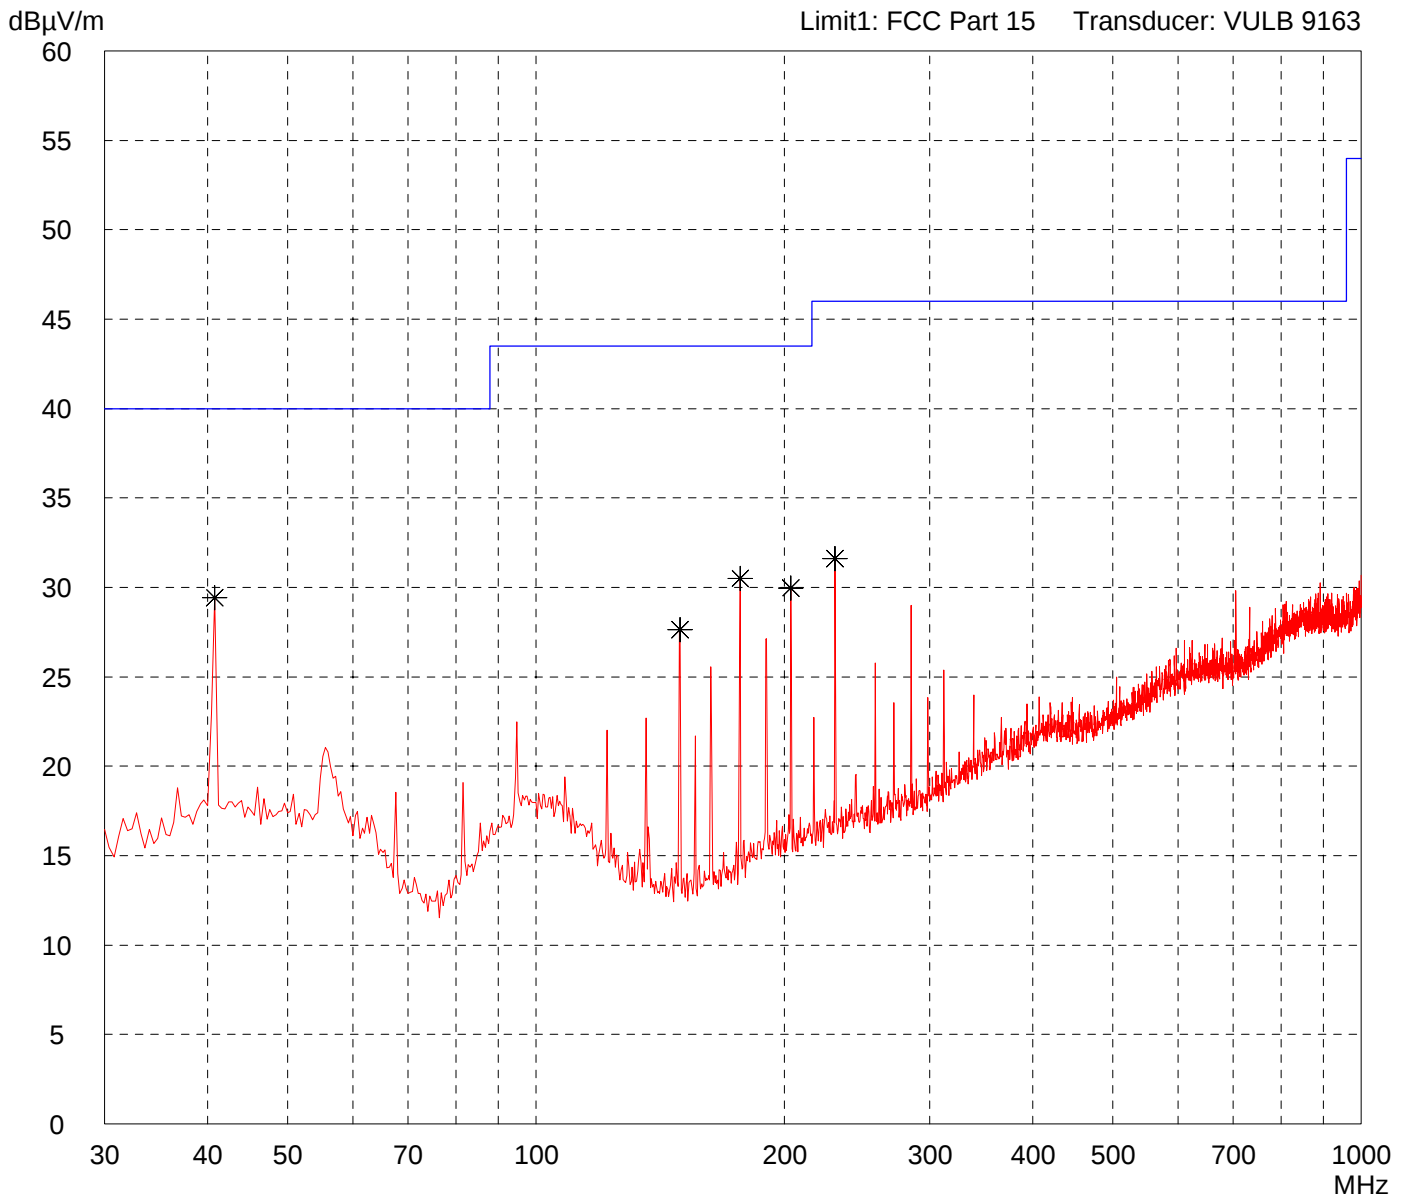

Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- transmitting continuously

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

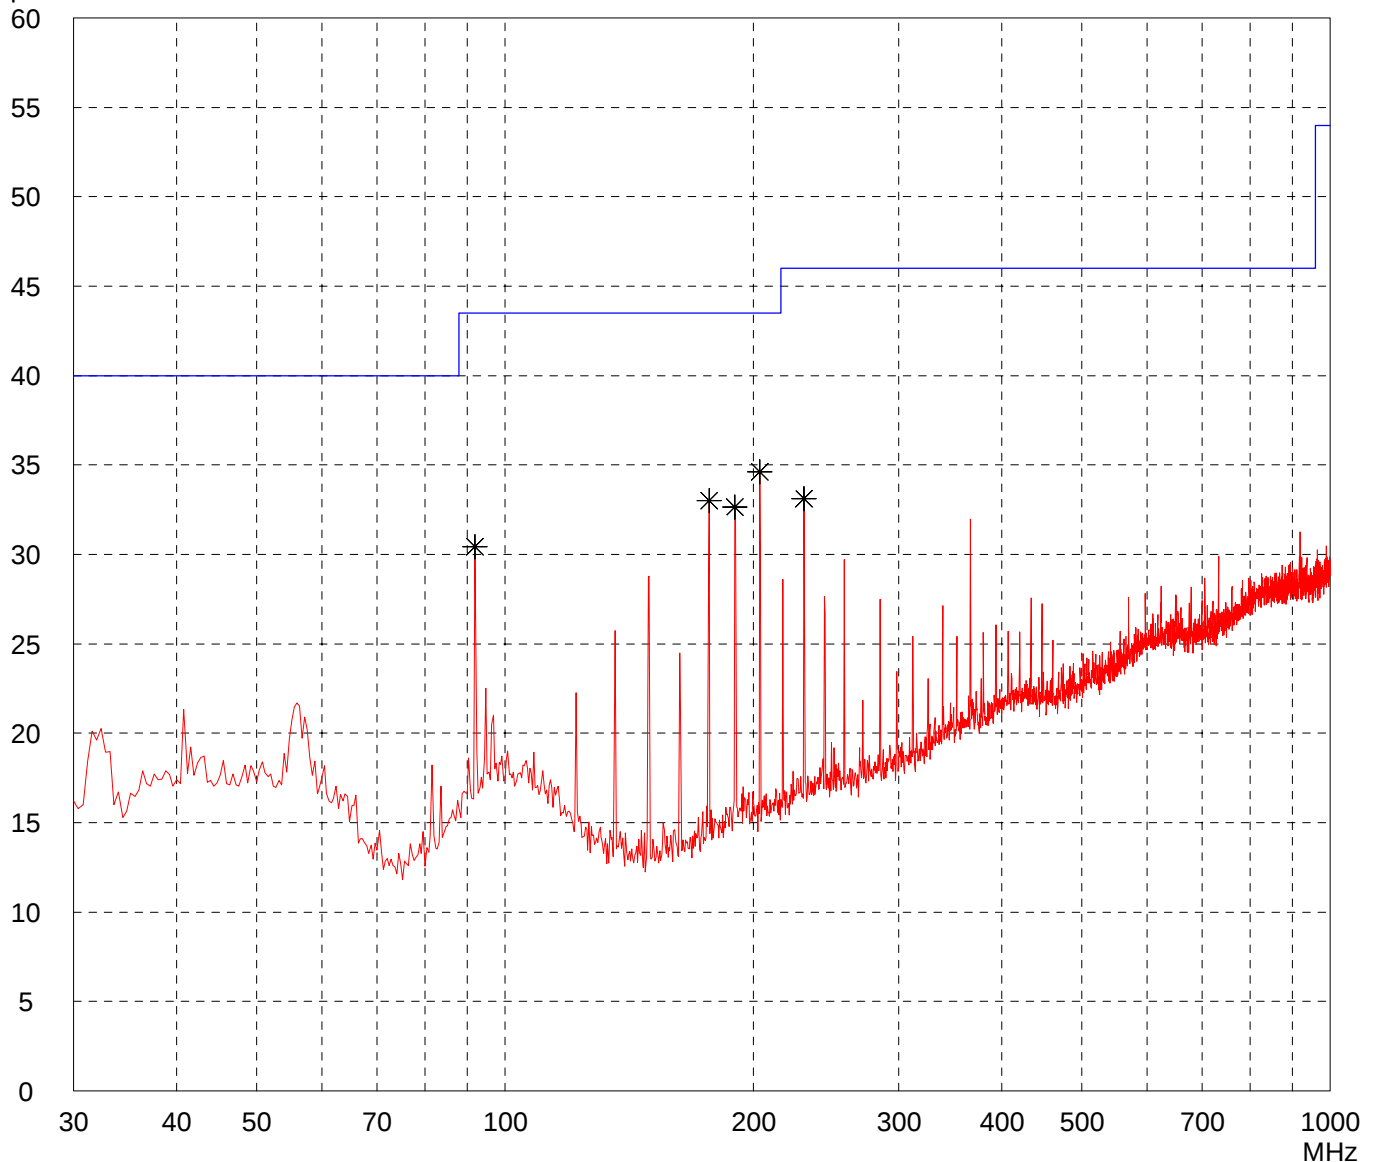

Result:
Prescan

Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- transmitting continuously


Detector:
Peak

List of values:

Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

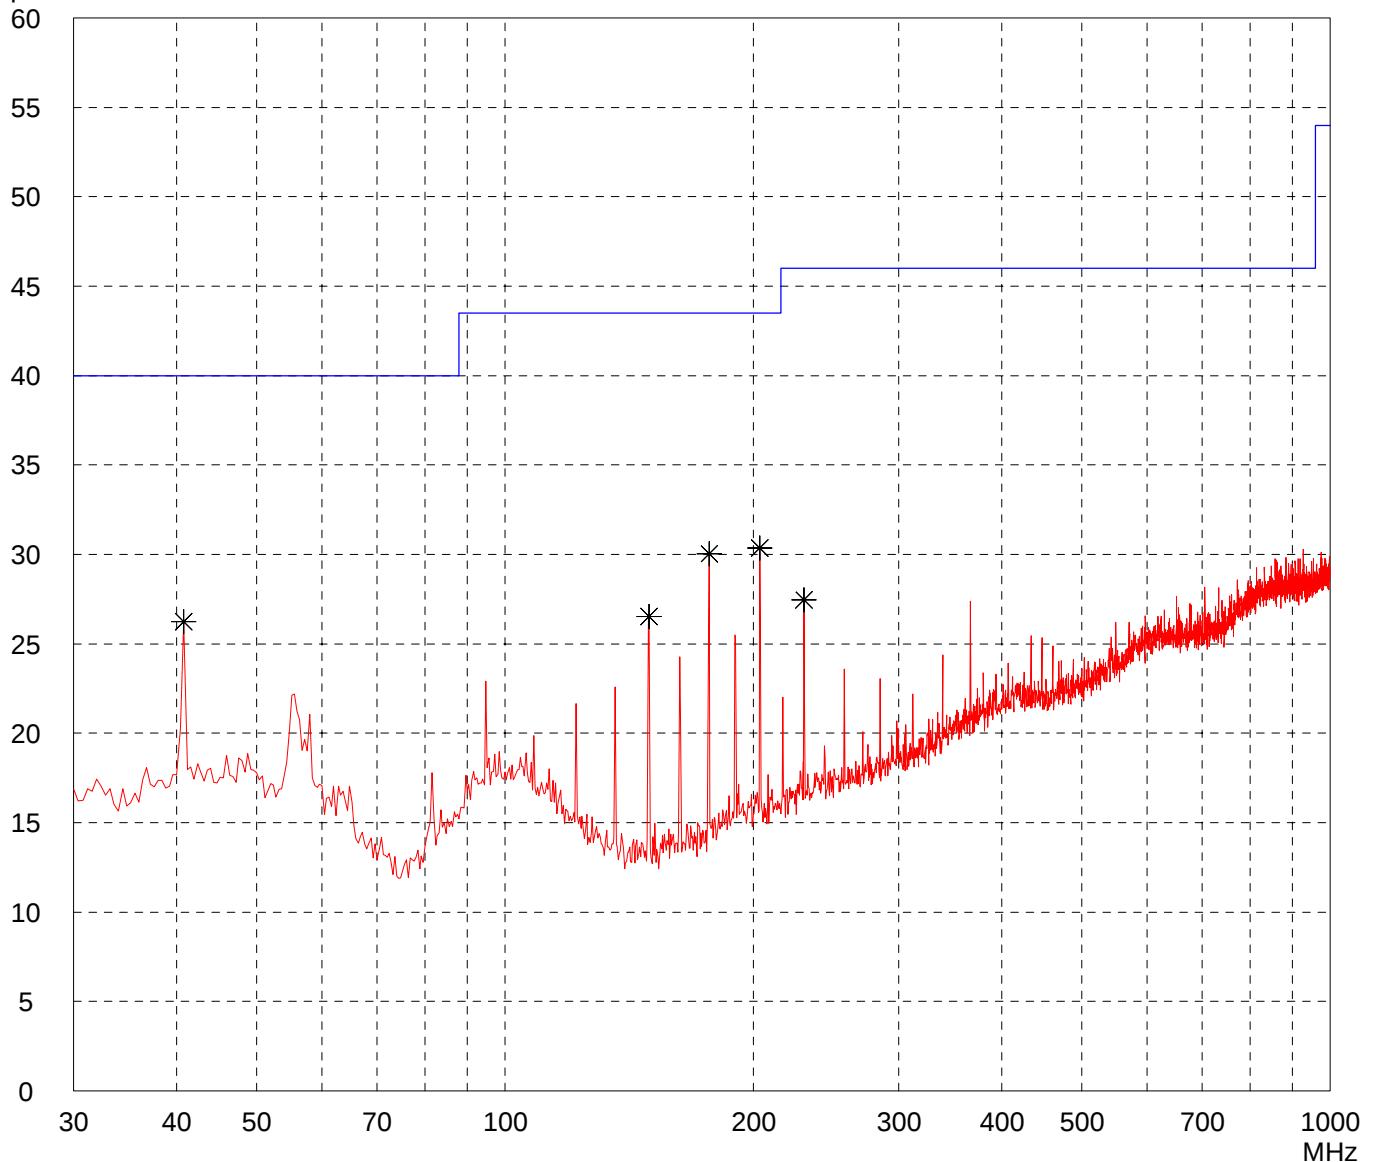

Result:
Prescan


Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

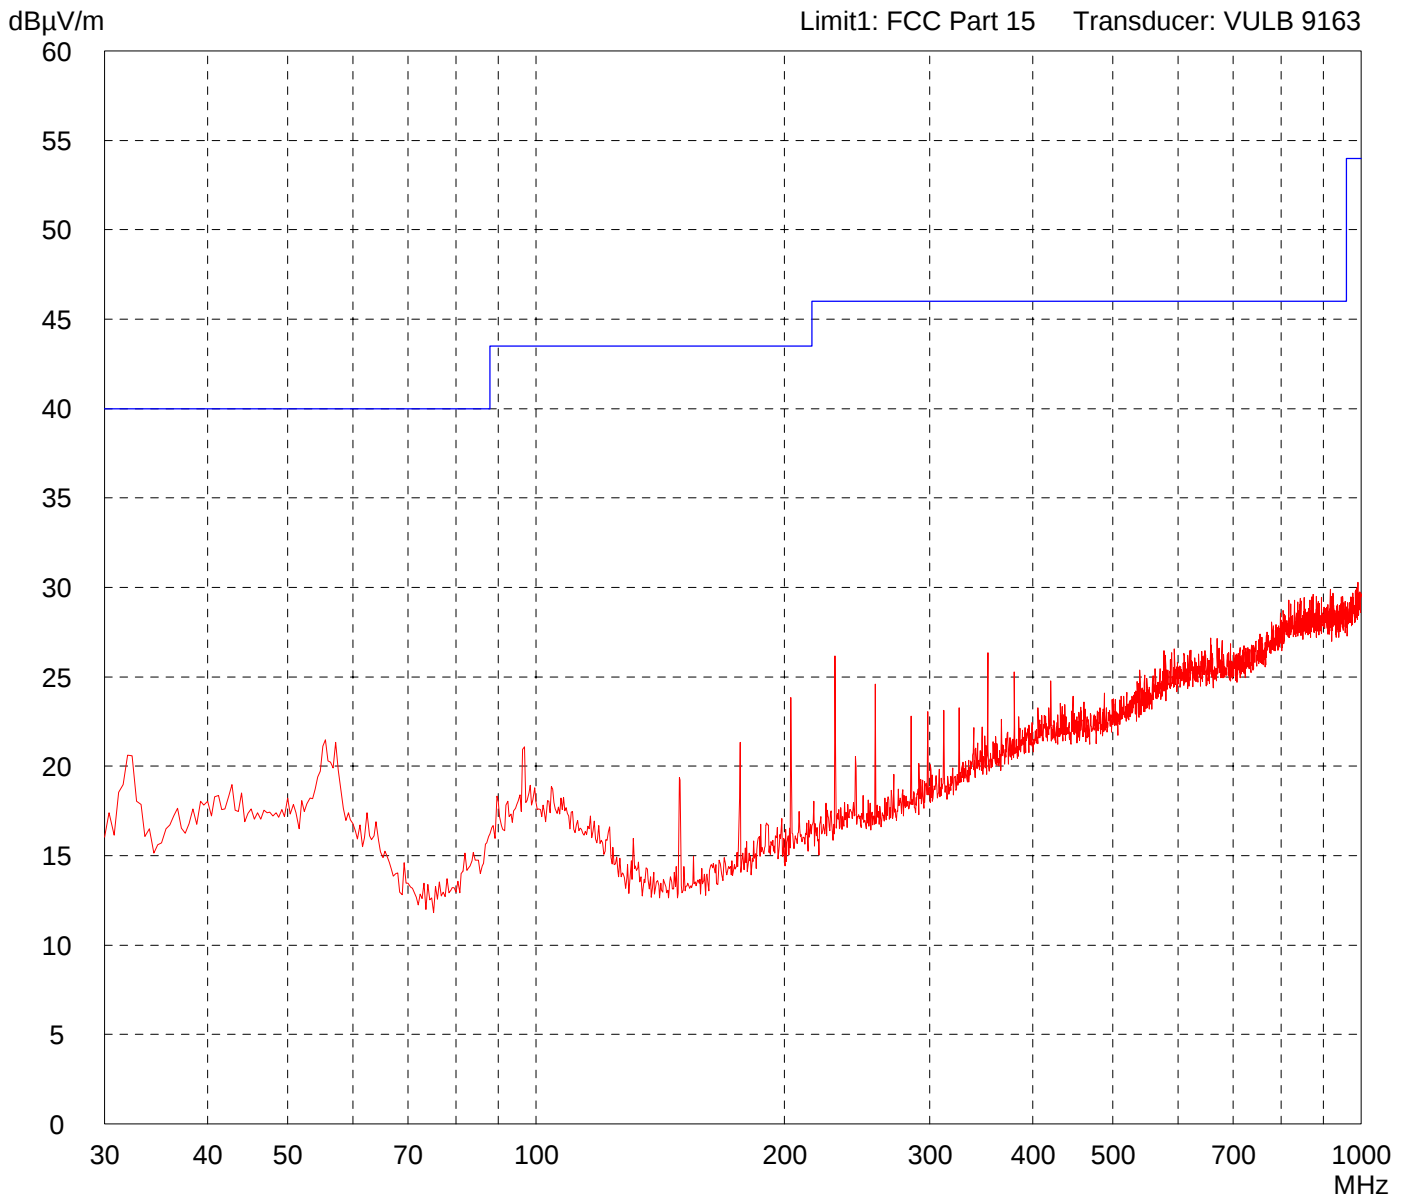


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - reading TAG (122 kHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

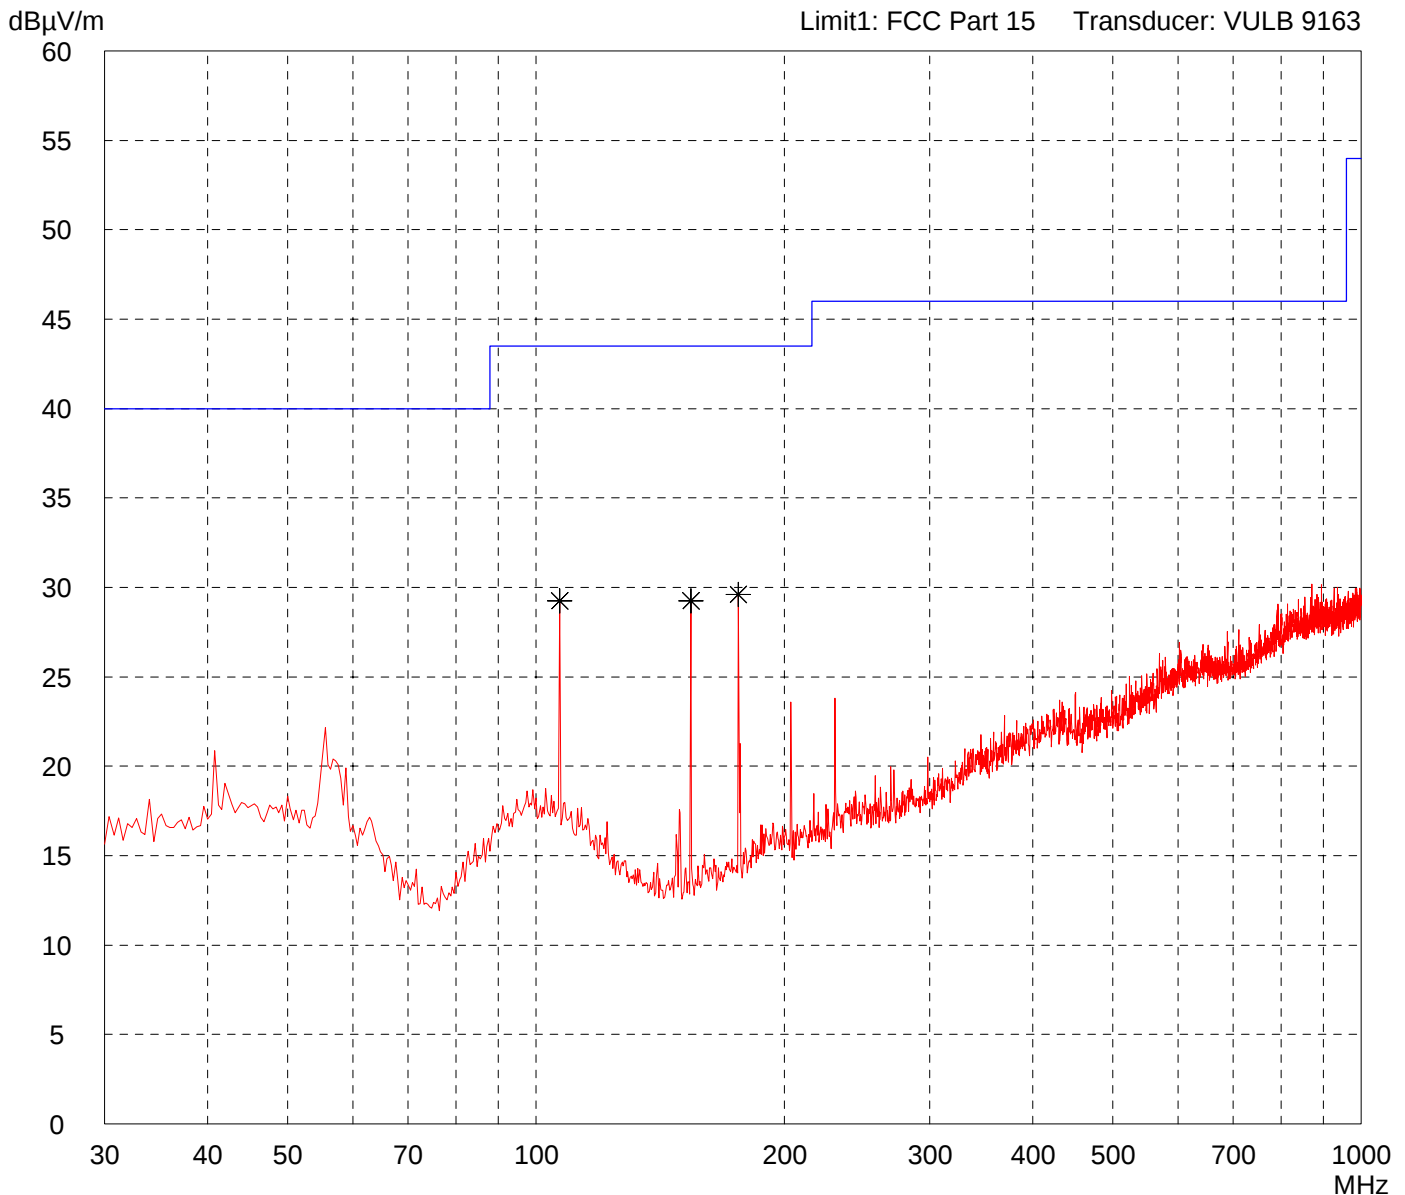

Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- reading TAG (13.56 MHz)


Detector:
Peak

List of values:

Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

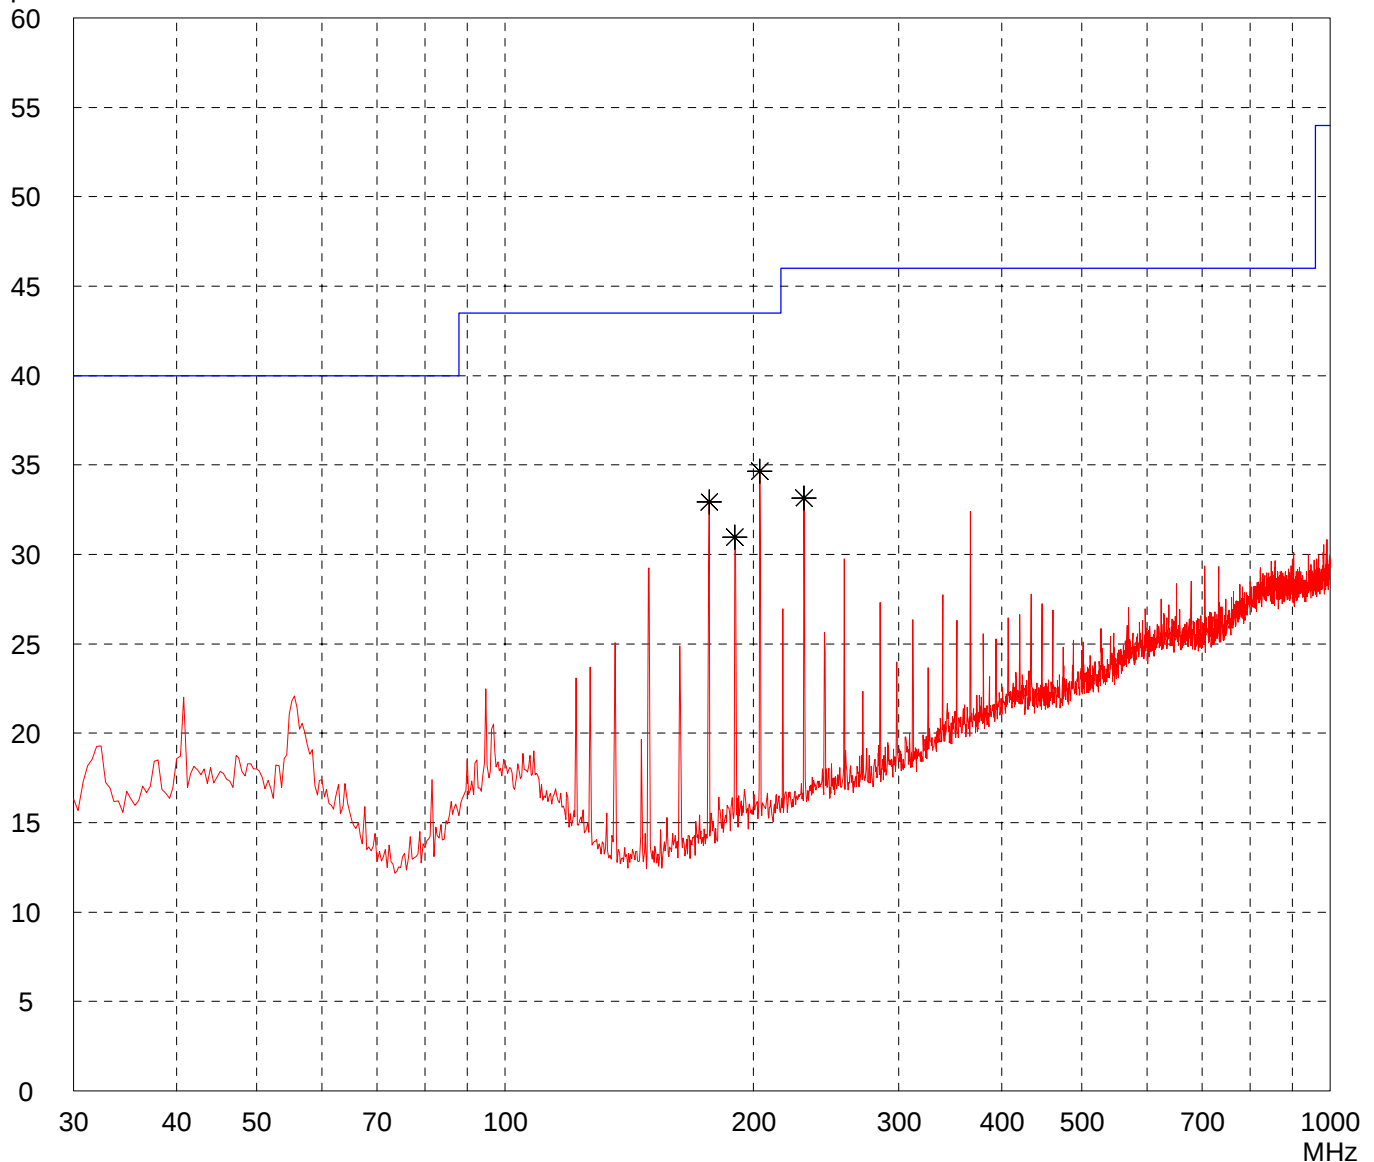

Result:
Prescan


Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd647 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

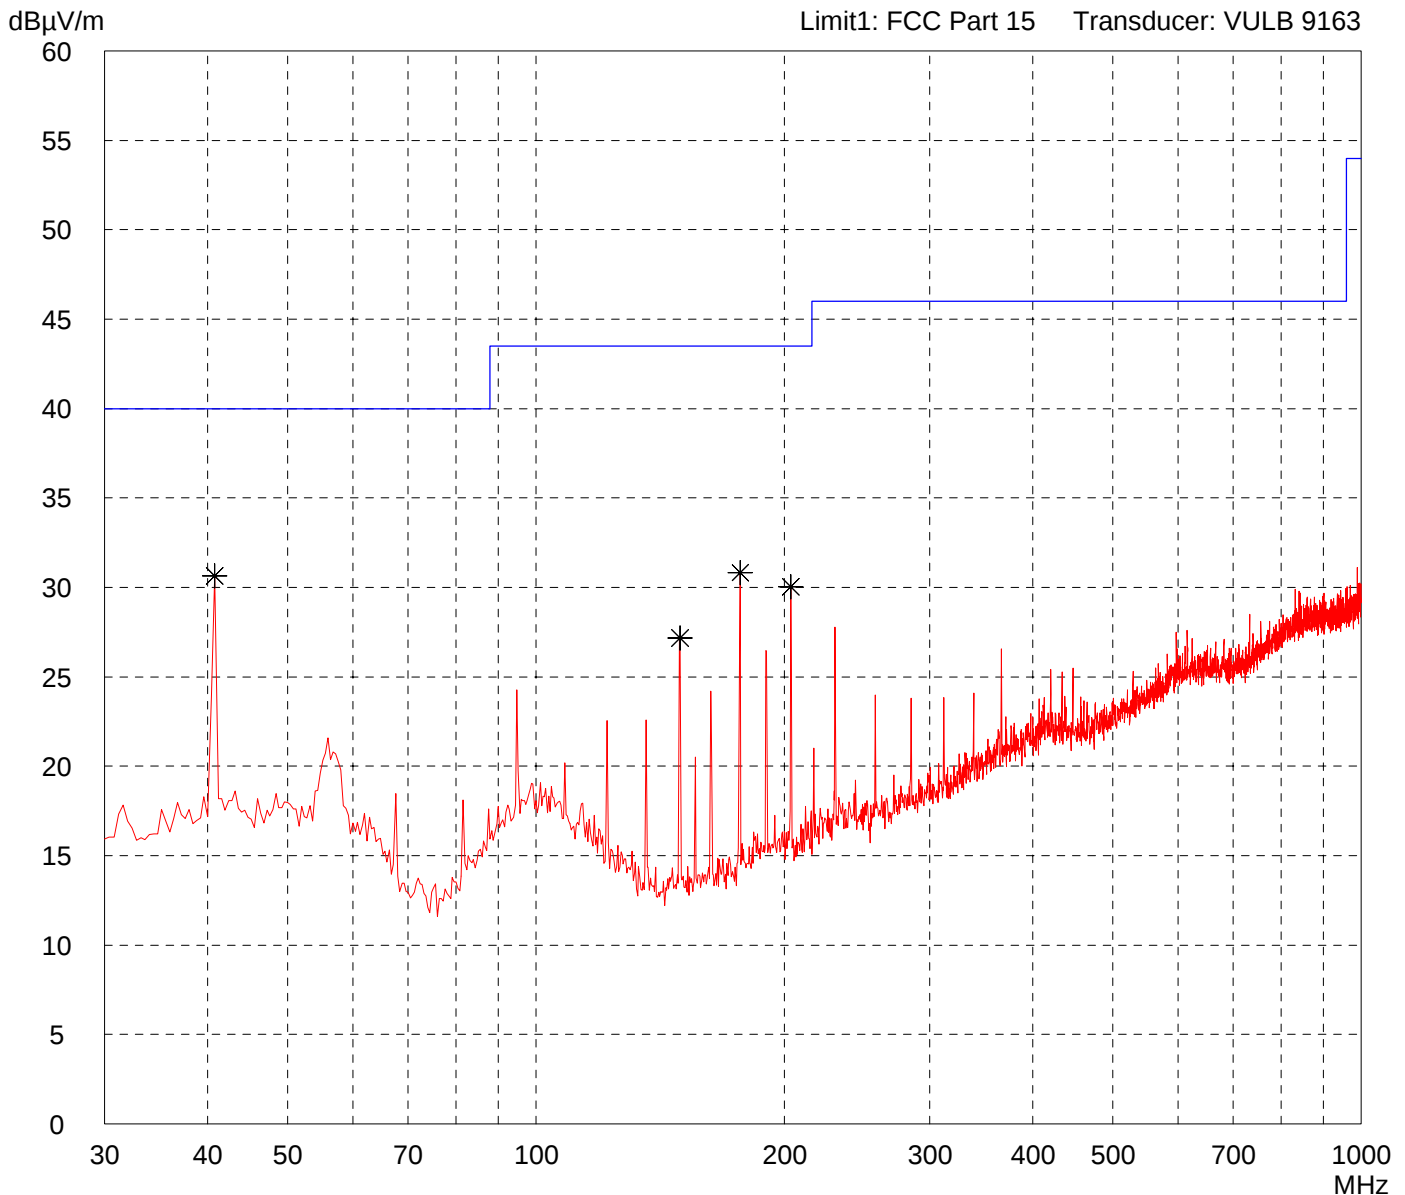


Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd648 - transmitting continuously
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	---

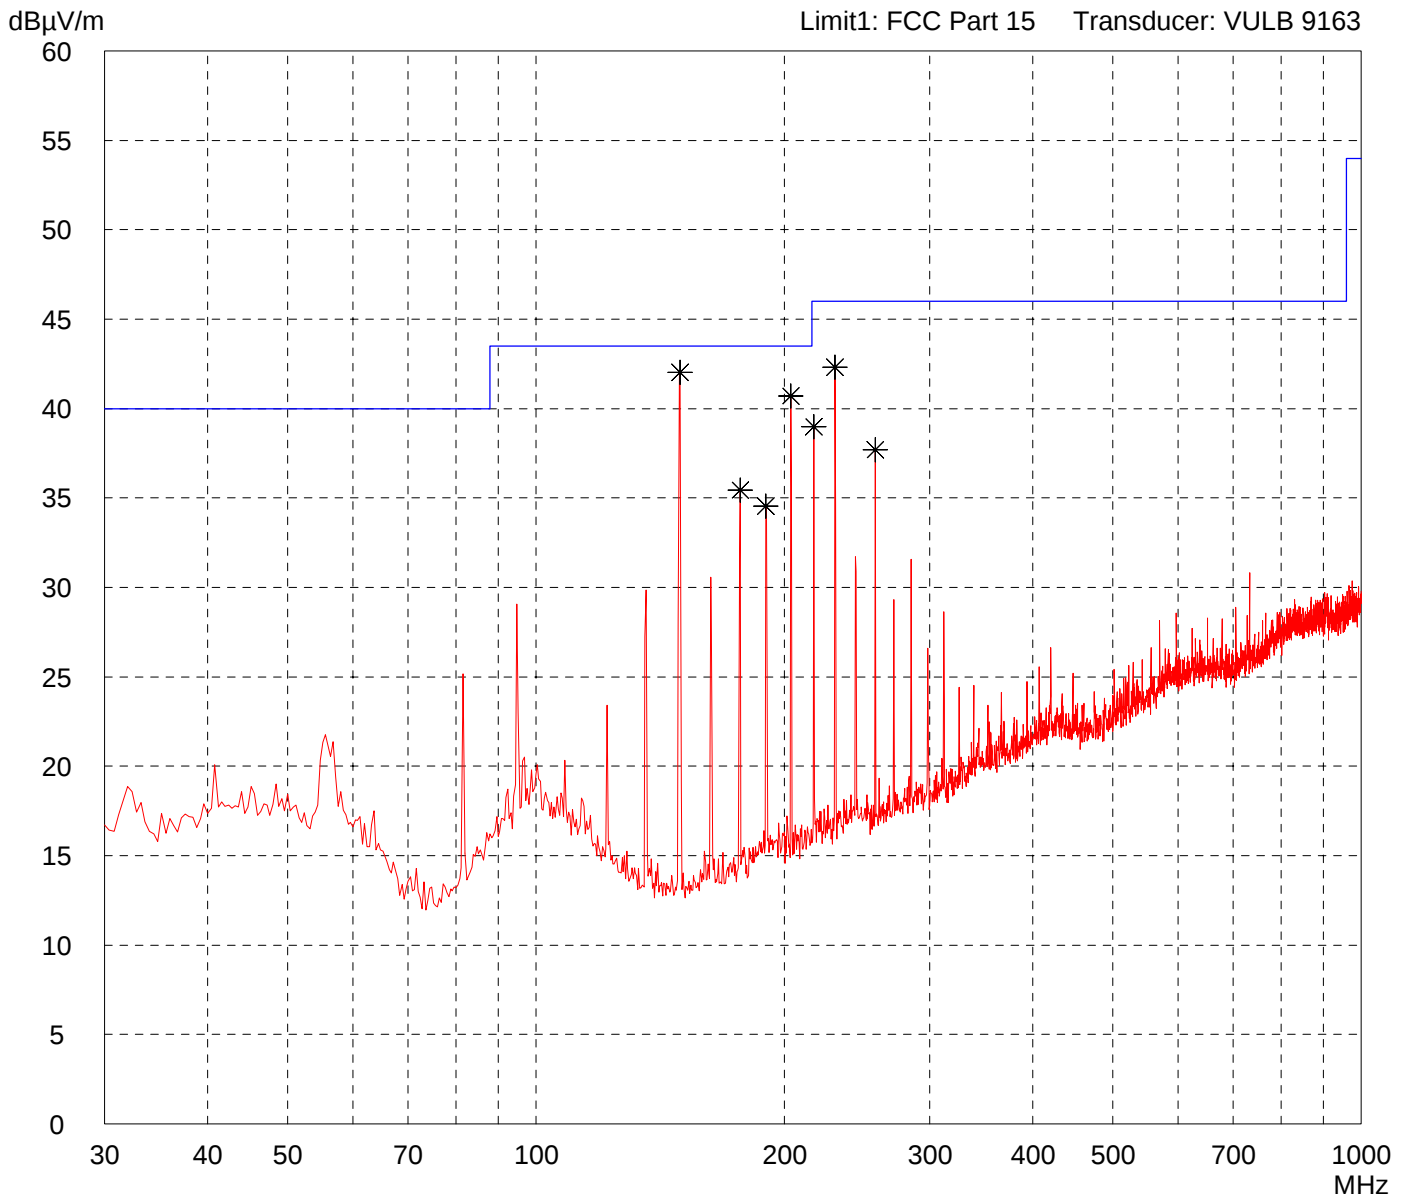

Result: Prescan	Project file: 55426-50412 Page of Pages
---------------------------	---

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- transmitting continuously

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

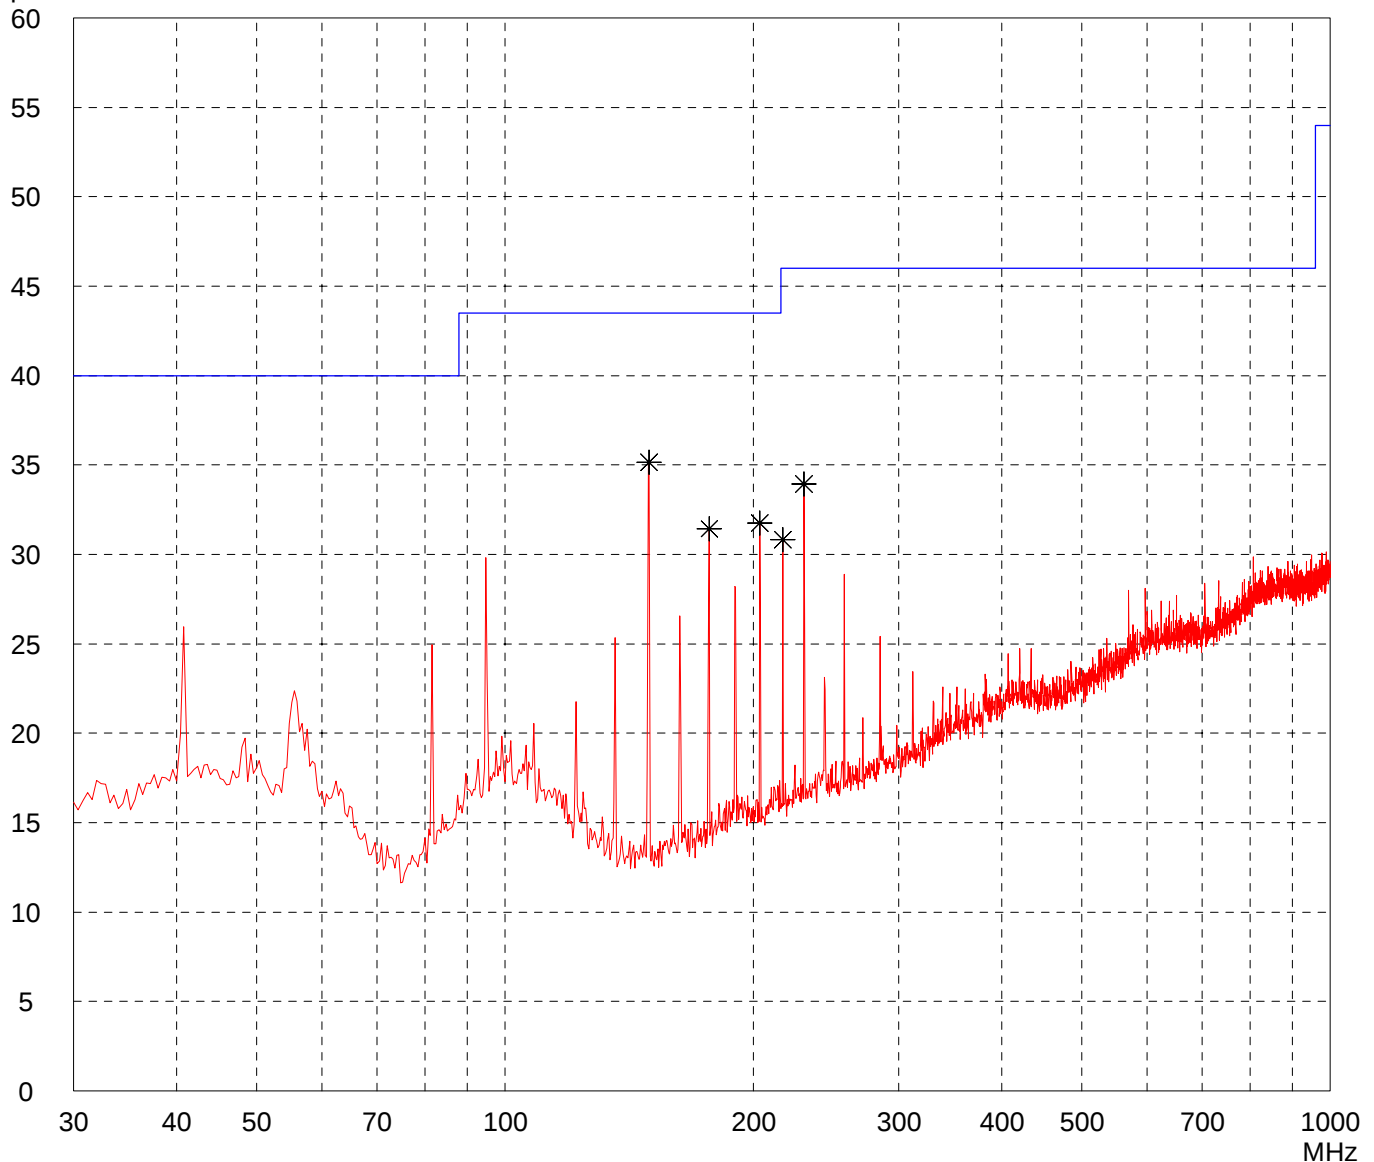

Result:
Prescan

Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- reading TAG (122 kHz)


Detector:
Peak

List of values:

Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

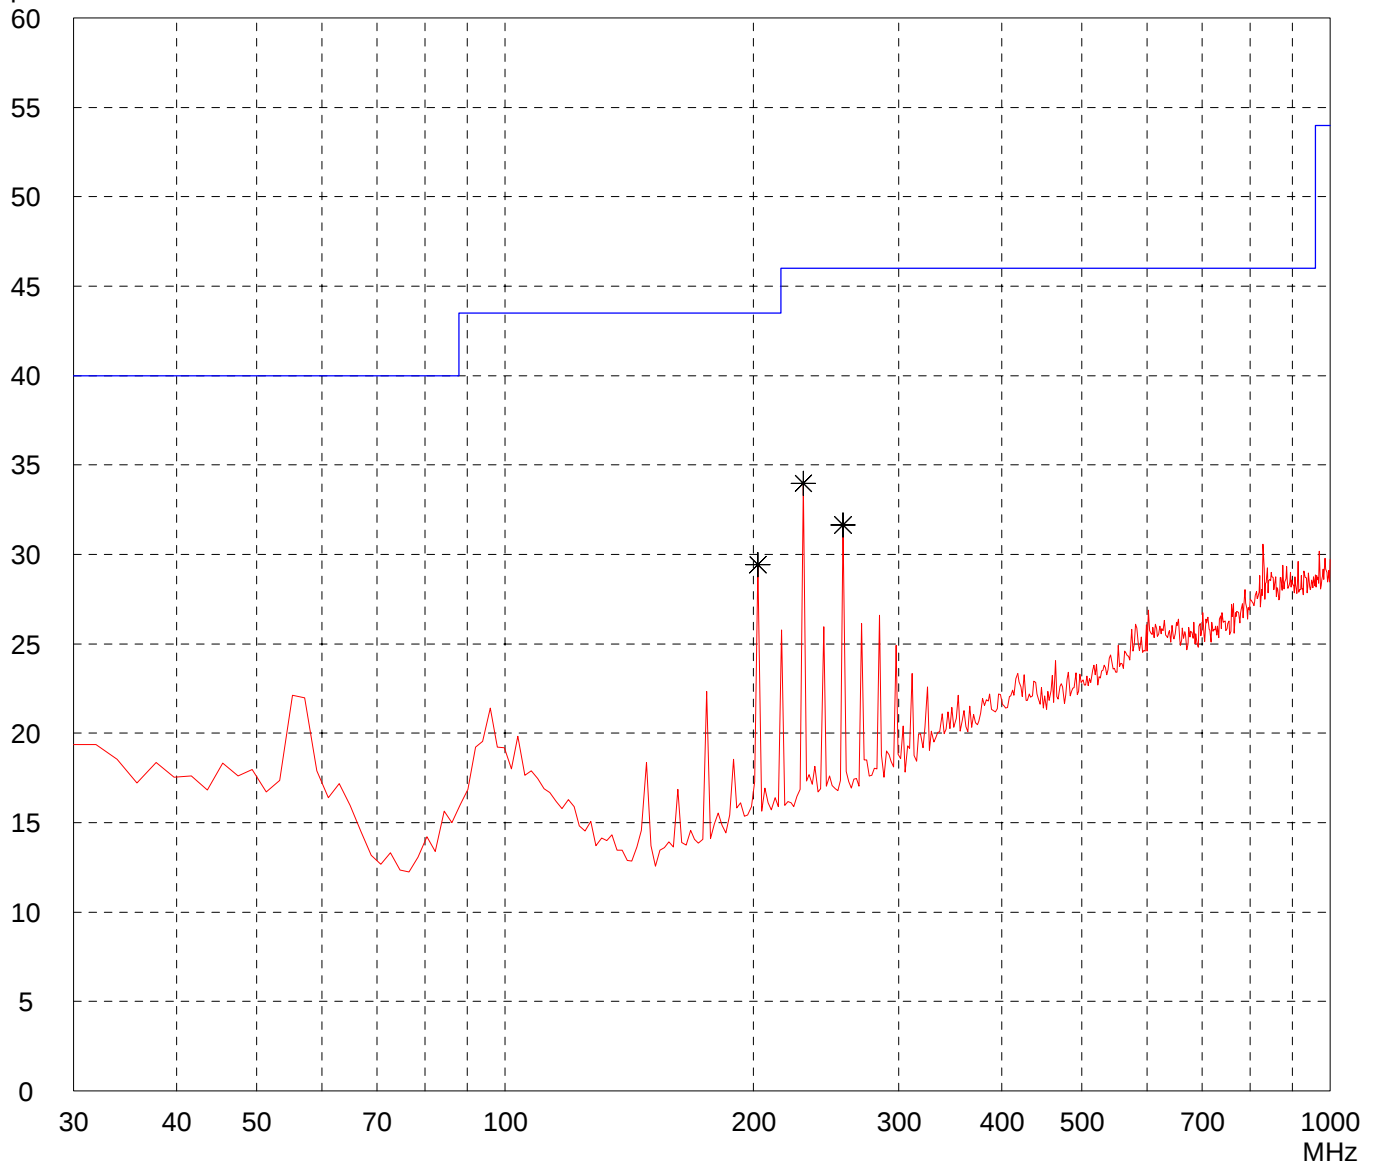

Result:
Prescan

Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- reading TAG (122 kHz)


Detector:
Peak

List of values:

Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

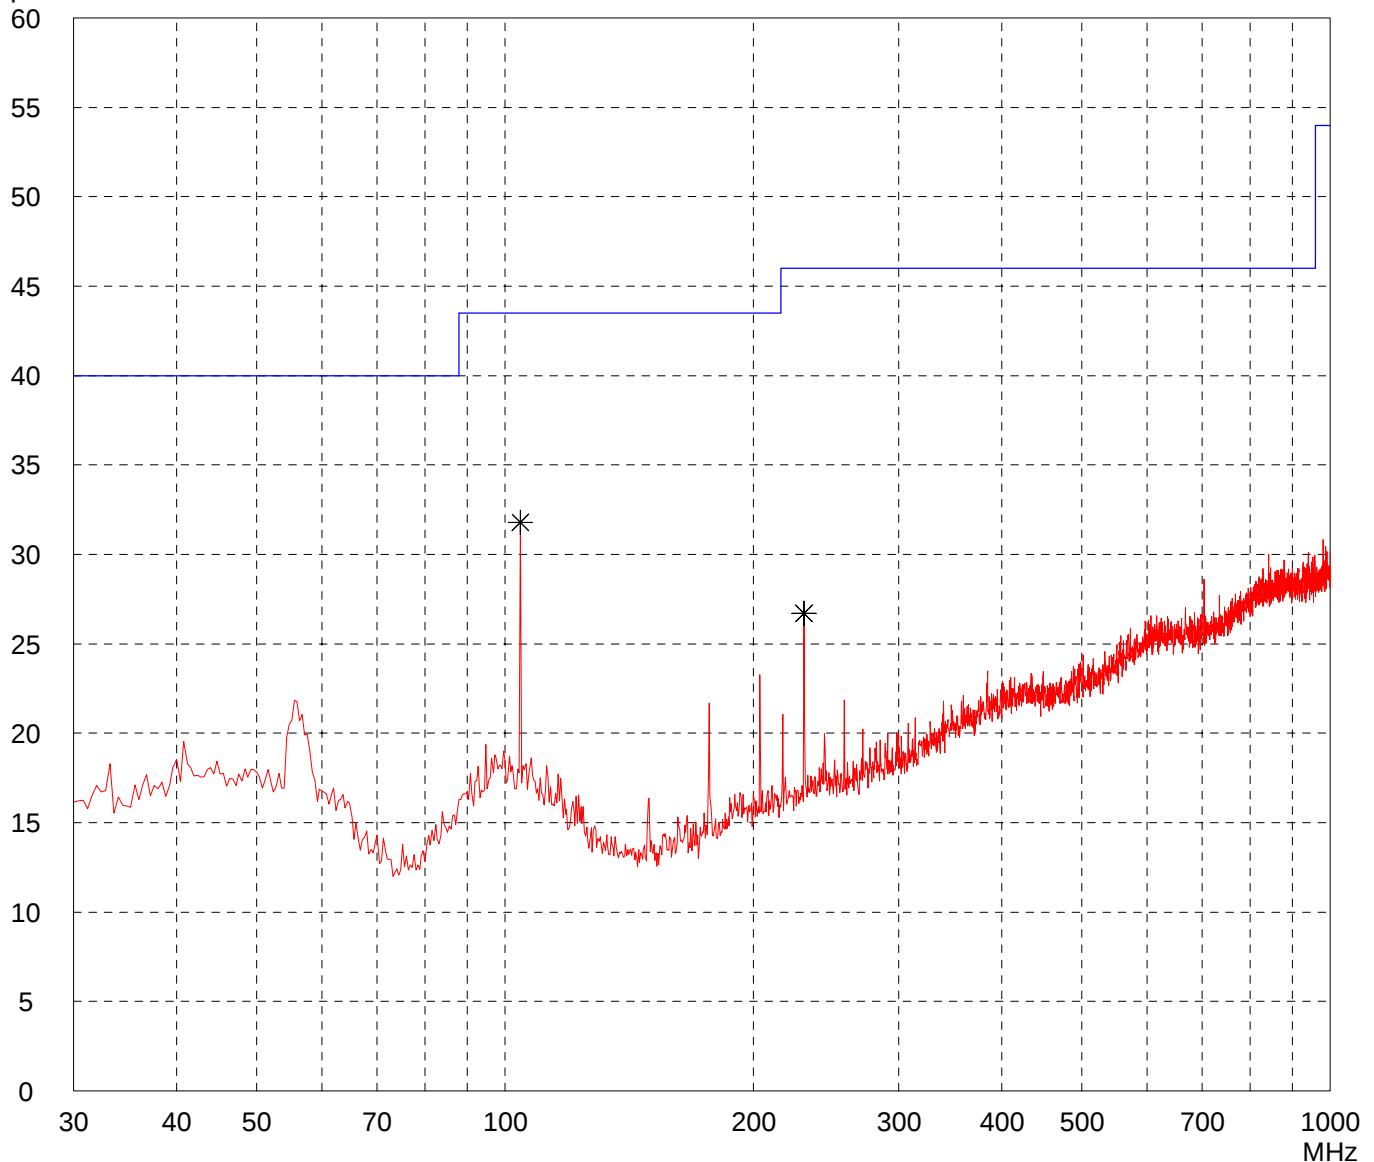

Result:
Prescan


Project file:
55426-50412

Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: sd605	Comment: - DC 5 V power supply - Variant: Standard (V4.2) - Antenna: sd648 - reading TAG (13.56 MHz)
Serial no.: D052900585	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 2005-09-19	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

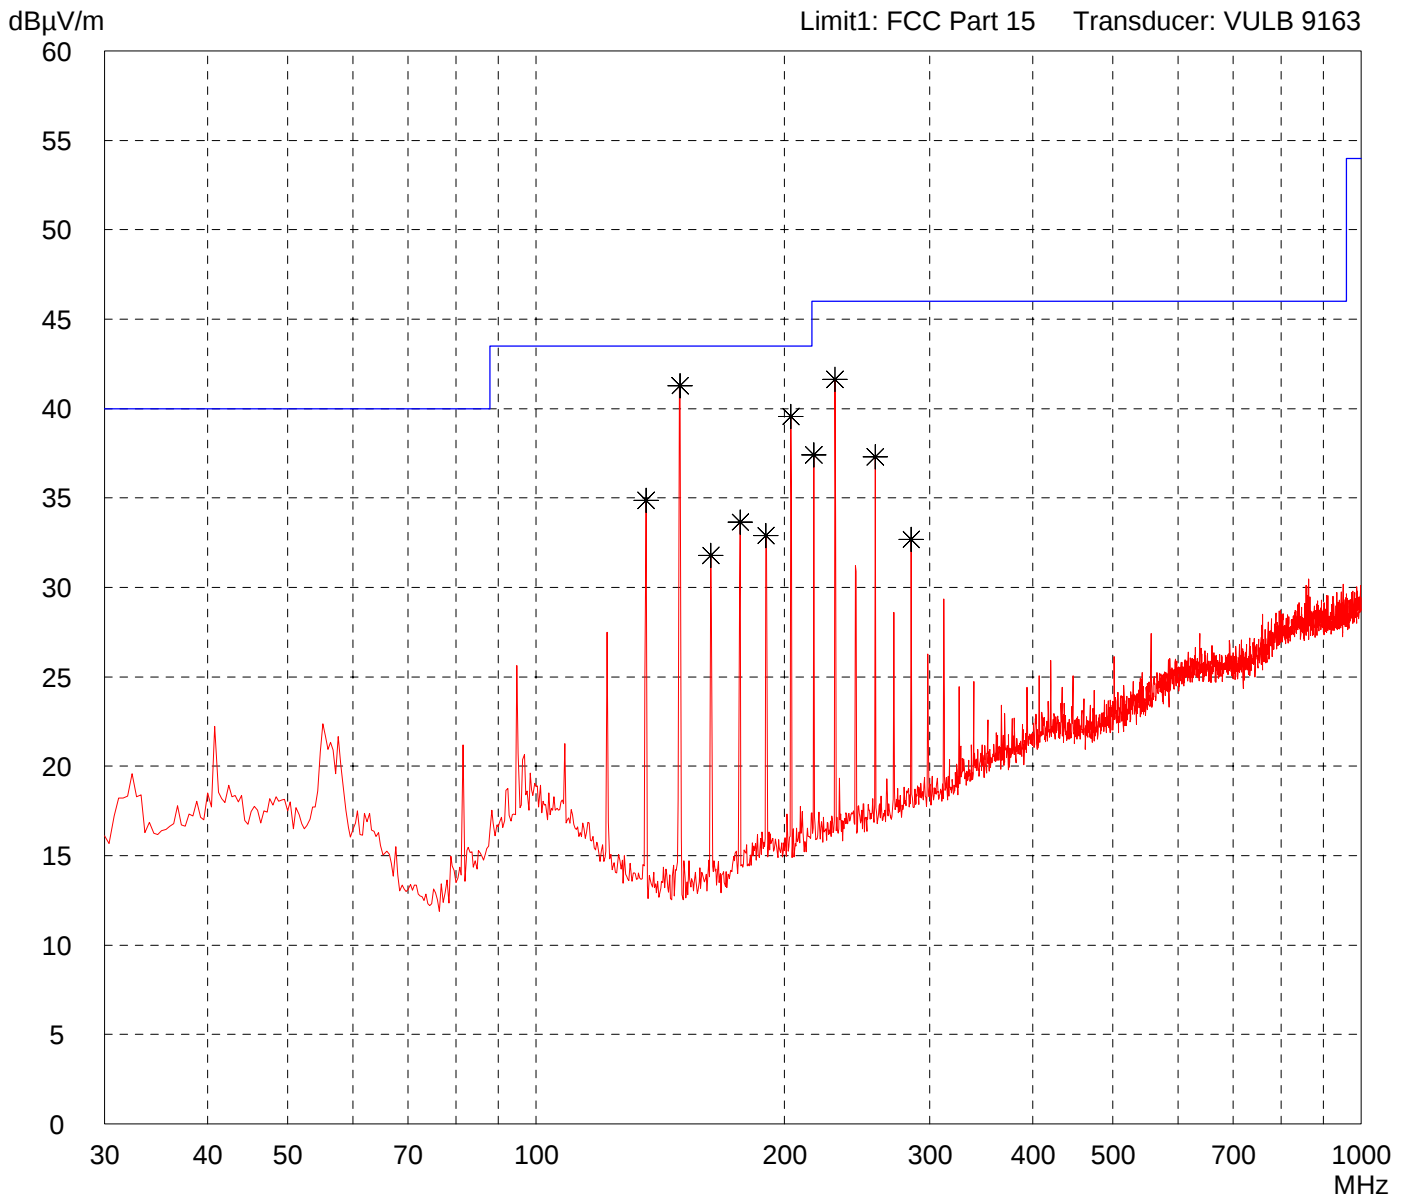

Result: Prescan	Project file: 55426-50412
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
sd605

Serial no.:
D052900585

Applicant:
SKIDATA AG

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
2005-09-19

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- reading TAG (13.56 MHz)

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

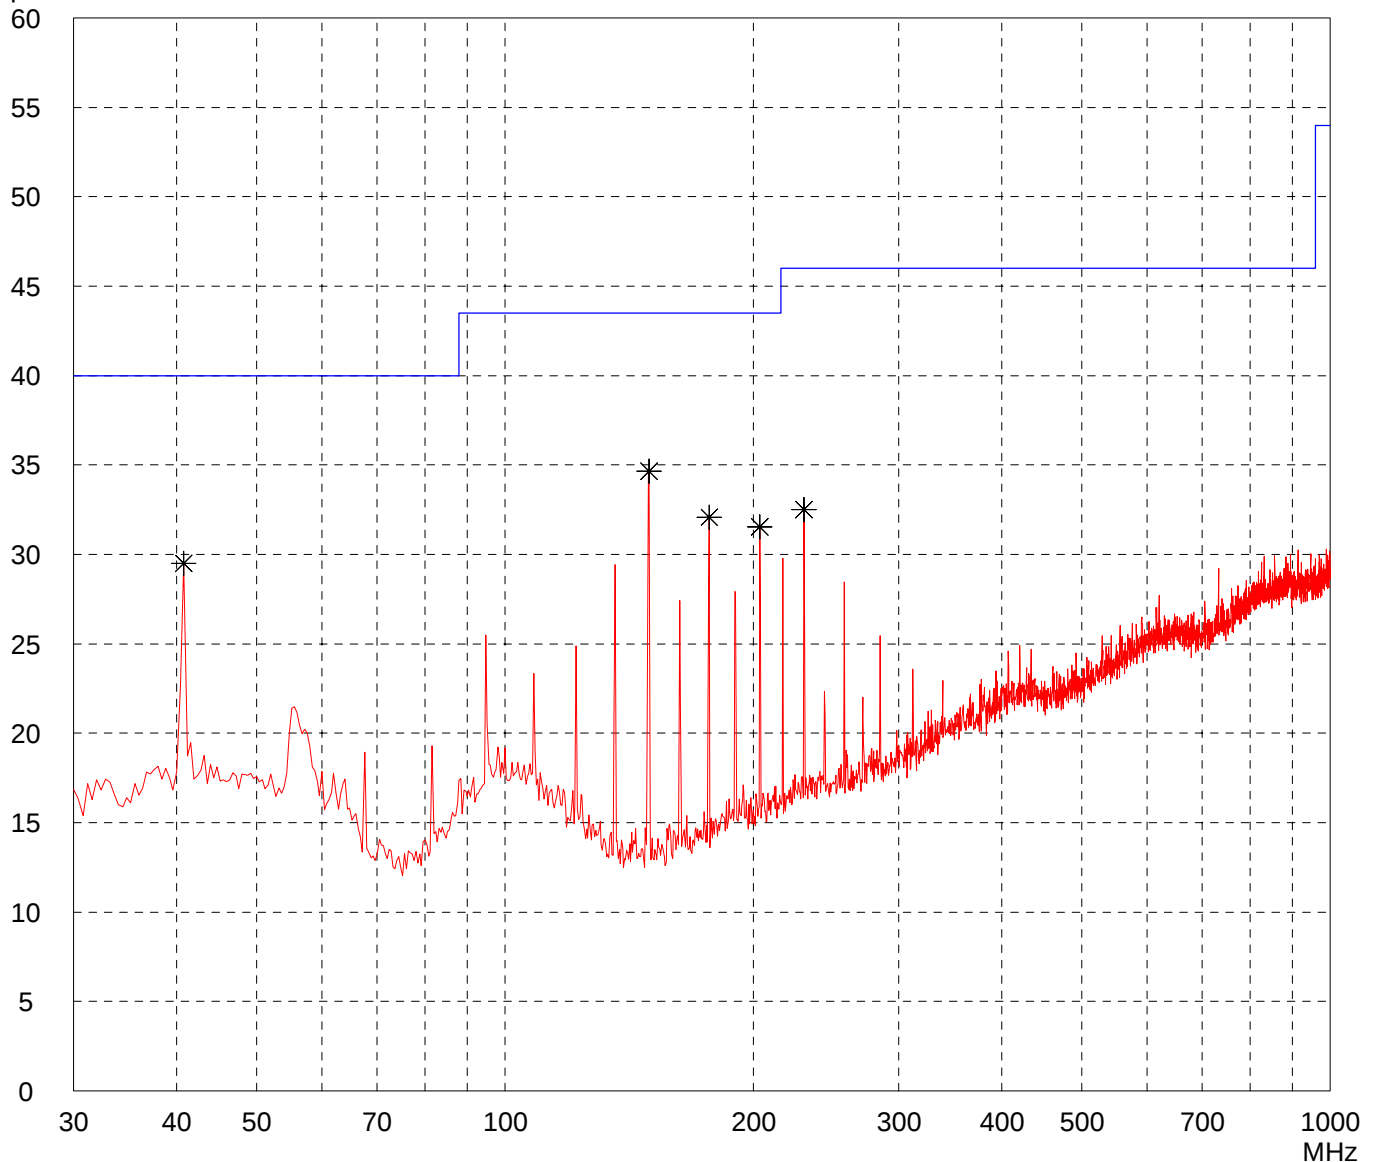

Result:
Prescan

Project file:
55426-50412

Page of Pages

Restricted Bands of Operation acc. to FCC 15.205

Model:
sd605

Serial No.:
D052900585

Applicant:
SKIDATA AG

Mode:

- DC 5 V power supply

- Variant: Standard (V 4.2)


- Antenna: sd611

- reading TAG (122 kHz)

- Measurement distance: 8.5 m

Ref.Level 47 dBuV
5 dB/Div.

ATT 10 dB

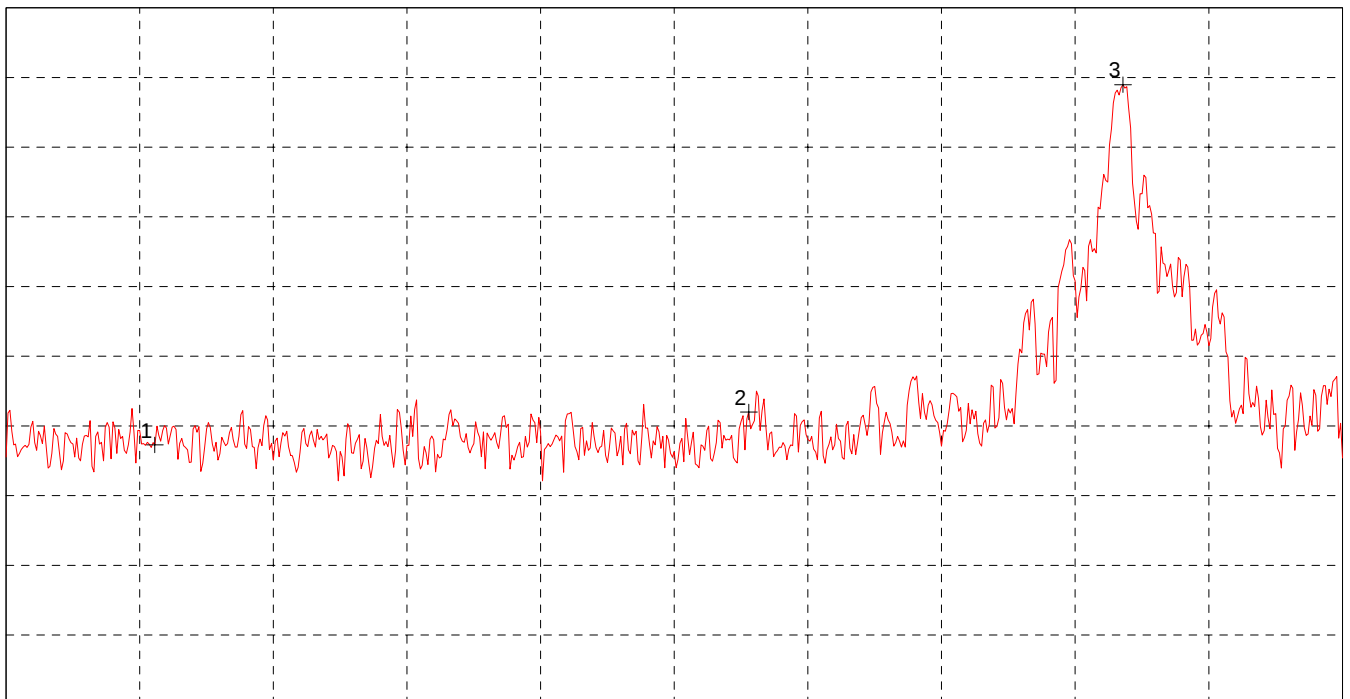

Start 85.000 kHz
RBW 300 Hz

VBW 1 kHz

Stop 130.000 kHz
SWP 1 s

Multi Marker List

No. 1	90.000 kHz	15.64 dBuV
No. 2	110.000 kHz	18.00 dBuV
No. 3	122.610 kHz	41.48 dBuV

Tested by:
M. Steindl

Date:
2005/09/22

Project-No.:
55426-050412

Page of pages