

Straubing, 19 June 2006

TEST - REPORT

No. 55426-060354-1 (Edition 1)

for

sd705

Inductive Tag Reader Module

Applicant: SKIDATA AG

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.209 15.215 and
15.225

Industry Canada Radio Standards
Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, 2.6, A2.6
(Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	5
3	Identification of the Test Laboratory	6
4	Summary	7
5	Operation Mode and Configuration of EUT.....	8
6	Measurement Procedures.....	10
6.1	Conducted Output Power	10
6.2	Bandwidth Measurements	12
6.3	Pulse Train Measurement	13
6.4	Conducted AC Powerline Emission	14
6.5	Radiated Emission Measurement 9 kHz to 30 MHz	16
6.6	Radiated Emission in Fully or Semi Anechoic Room.....	18
6.7	Radiated Emission at Open Field Test Site	20
6.8	Carrier Frequency Stability	21
7	Photographs Taken During Testing	23
8	Test Results.....	51
8.1	Conducted Output Power	53
8.2	Occupied Bandwidth.....	54
8.3	Bandwidth of the Emission	64
8.4	Designation of Emissions	68
8.5	Pulse Train Measurement	69
8.6	Restricted Bands of Operation	75
8.7	Spectrum Mask.....	76
8.8	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	78
8.9	Radiated Emission Measurement 9 kHz to 30 MHz	81
8.10	Radiated Emission Measurement 30 MHz to 1 GHz	106
8.11	Carrier Frequency Stability	115
8.12	Exposure of Humans to RF Fields.....	118
9	Referenced Regulations	123
10	Charts taken during testing	124

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation*:	sd705
Parts†: and Serial Numbers	sd705 (V 2.1): D061600112 Antenna sd611 (V 1.0): 00025 Antenna sd612 (V 1.0): D061100323 Antenna sd647 (V 2.2): D055000252 Antenna sd648 (V 1.3): D055100273 Antenna sd682 (V 1.0): D052100003 Antenna sd697 (V 2.0): D054800052 Antenna sd697 (V 3.0): D060400005 Antenna sd733 (V 2.2): D061700003
Manufacturer:	SKIDATA AG
Type of equipment:	Inductive Tag Reader Module
Version:	As delivered
FCC ID:	
Additional parts/accessories:	

* Type designation of the system if EUT consists of more than one part.

† Type designations of the parts of the system, if applicable.

Technical data of EUT		
Application frequency range:	119 - 127 kHz and 13.553 - 13.567 MHz	
Frequency range:	119 - 127 kHz and 13.556 - 13.567 MHz	
Operating frequency:	122 kHz and 13.56 MHz	
Type of modulation:	ASK	
Pulse train:	---	
Pulse width:	---	
Number of RF-channels:	2 (122.9 kHz and 13.56 MHz)	
Channel spacing:	Not applicable	
Designation of emissions [‡] :	10K0A1D	
Type of antenna:	Inductive Loop Coil	
Size/length of antenna:	sd611 (V 1.0): 94 x 143 mm sd612 (V 1.0): Ø 90 mm sd647 (V 2.2): 40 x 52 mm sd648 (V 1.3): 52 x 70 mm sd682 (V 1.0): 156 x 162 mm sd697 (V 2.0): Ø 120 mm § sd697 (V 3.0): Ø 200 mm sd733 (V 2.2): 117 x 135 mm	
Connection of antenna:	☒ detachable ☐ not detachable	
Type of power supply:	DC supply	
Specifications for power supply:	nominal voltage: 5.00 V minimum voltage: 4.25 V maximum voltage: 5.75 V	

[‡] Also known as "Class of Emission".

[§] Coopercoil on outer side is not intended for usage with sd705.

2 Administrative Data

Application details	
Applicant (full address):	SKIDATA AG Untersbergstraße 40 A-5083 Grödig
Contact person:	Mr. Sonderegger
Contract identification:	Order No. T-745246
Receipt of EUT:	12 June 2006
Date(s) of test:	June 2006
Note(s):	---

Report details	
Report number:	55426-060354-1
Edition:	1
Issue date:	19 June 2006

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.209, 15.215 and 15.225
of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications
RSS-Gen Issue 1, Section 7.2.2 and
RSS-210 Issue 6, Sections 2.2, 2.6, A2.6 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Modes

For radiated emission tests the EUT worked in normal polling mode:
First the EUT attempts to read a transponder at 125 kHz. If the EUT succeeds to read the 125 kHz transponder the loop starts again, otherwise the EUT tries to read a transponder at 13.56 MHz.

Measurements were performed with three modes:

- Polling continuously, waiting for tags
- Reading 125 kHz tag continuously
- Reading 13.56 MHz tag continuously

For frequency error testings the EUT worked in a special test mode which allowed an unmodulated carrier. This was activated with a special jumper.

Configurations of EUT

The EUT was configured as stand alone device.

The EUT owns two pairs of antenna connectors. One pair contains each a connector for 125 kHz and 13.56 MHz. On startup the device tests if a antenna with single or double power is attached. If a single powered antenna is attached the second antenna port pair will be deactivated. If a double powered antenna is attached both antenna port pairs will be activated.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification**</i>	<i>Cable type</i>	<i>Cable length</i>
1	DC 5 V supply	dc power	Unshielded	< 1 m ††
2	Antenna port X1 (122 kHz)	signal/control port	Unshielded	< 1 m ††
3	Antenna port X2 (122 kHz)	signal/control port	Unshielded	< 1 m ††
4	Antenna port X3 (13.56 MHz)	signal/control port	Unshielded	< 1 m ††
5	Antenna port X4 (13.56 MHz)	signal/control port	Unshielded	< 1 m ††

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	sd611 (V 1.0)	Antenna single power	00025	SKIDATA AG
2	sd612 (V 1.0)	Antenna single power	D061100323	SKIDATA AG
3	sd647 (V 2.2)	Antenna single power	D055000252	SKIDATA AG
4	sd648 (V 1.3)	Antenna single power	D055100273	SKIDATA AG
5	sd682 (V 1.0)	Antenna double power	D052100003	SKIDATA AG
6	sd697 (V 2.0)	Antenna double power	D054800052	SKIDATA AG
7	sd697 (V 3.0)	Antenna double power	D060400005	SKIDATA AG
8	sd733 (V 2.2)	Antenna single power	D061700003	SKIDATA AG

List of support devices


<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
	Not applicable			

** Ports shall be classified as ac power, dc power or signal/control port
 †† EUT is intended for internal usage in a system.

6 Measurement Procedures

6.1 Conducted Output Power

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.1046(a) IC RSS-Gen Issue 1, section 4.6
Guide:	CFR 47 Part 2, section 2.1046 / IC RSS-Gen Issue 1
Conducted output power is measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer and/or a power meter with appropriate sensor. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If a spectrum analyzer is used and no other settings are specified resolution bandwidth shall be selected according to the carrier frequency f_c and set to 10 kHz ($150\text{ kHz} \leq f_c < 30\text{ MHz}$), 100 kHz ($30\text{ MHz} \leq f_c < 1\text{ GHz}$) or 1 MHz ($f_c \geq 1\text{ GHz}$). The video bandwidth shall be at least three times greater than the resolution bandwidth. The settings used have to be indicated within the appropriate test record(s).	

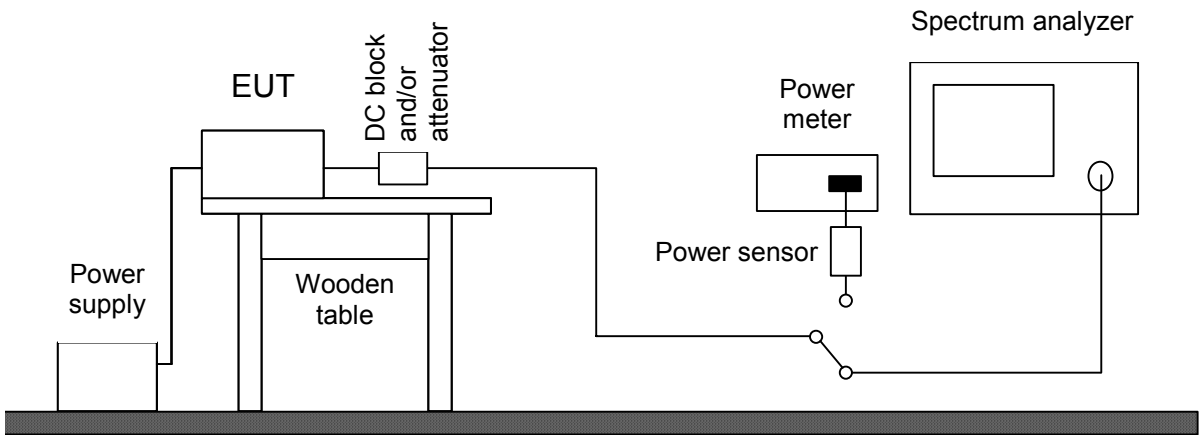

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☐	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Power meter	NRVS	836856/015	Rohde & Schwarz
☒	Peak power sensor	NRV-Z31	8579604.03	Rohde & Schwarz
☐	Power sensor	NRV-Z52	837901/030	Rohde & Schwarz
☐	Power sensor	NRV-Z4	863828/015	Rohde & Schwarz
☐	DC-block	7006	A2798	Weinschel
☒	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda

6.2 Bandwidth Measurements


Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2 IC RSS-210 Issue 6, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 1, sections 4.4.1 and 4.4.2
Measurement setup:	☐ Conducted: See below ☒ Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.5)
If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. The analyzer settings are specified by the test description of the appropriate test record(s).	

6.3 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 1, section 4.3
Guide:	ANSI C63.4
Measurement setup:	☐ Conducted: See below (direct connection or via test fixture) ☒ Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.5)
If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals. If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.	

6.4 Conducted AC Powerline Emission

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 1, section 7.2.2
Guide:	ANSI C63.4 / CISPR 22
Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used: First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak. If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed. According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.	

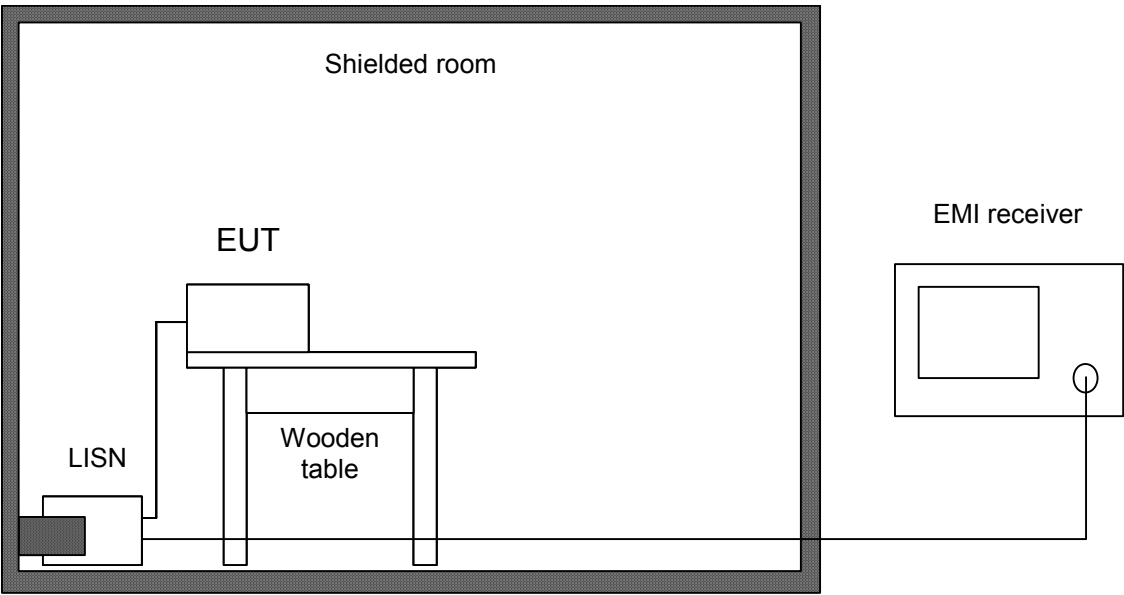


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
☒	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
☐	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
☐	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
☐	Shielded room	No. 1	1451	Albatross Projects
☒	Shielded room	No. 4	3FD-100 544	Euroshield

6.5 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.209, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 6, sections 2.2, 2.6 and A2.6
Guide:	ANSI C63.4
Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances). Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.	

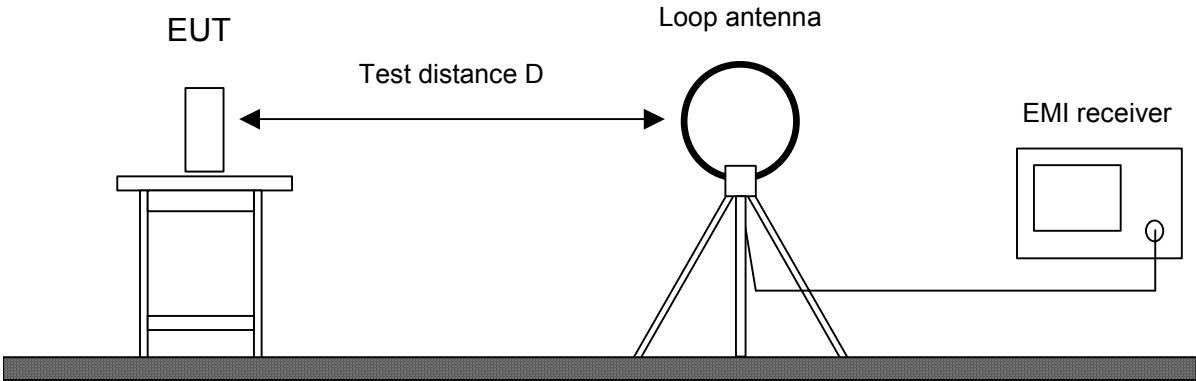


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
☐	Preamplifier	CPA9231A	3393	Schaffner
☒	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
☒	Fully anechoic room	No. 2	1452	Albatross Projects
☐	Semi-anechoic room	No. 3	1453	Siemens
☒	Open field test site	EG 1	1450	Senton

6.6 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b), 15.209 and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.	

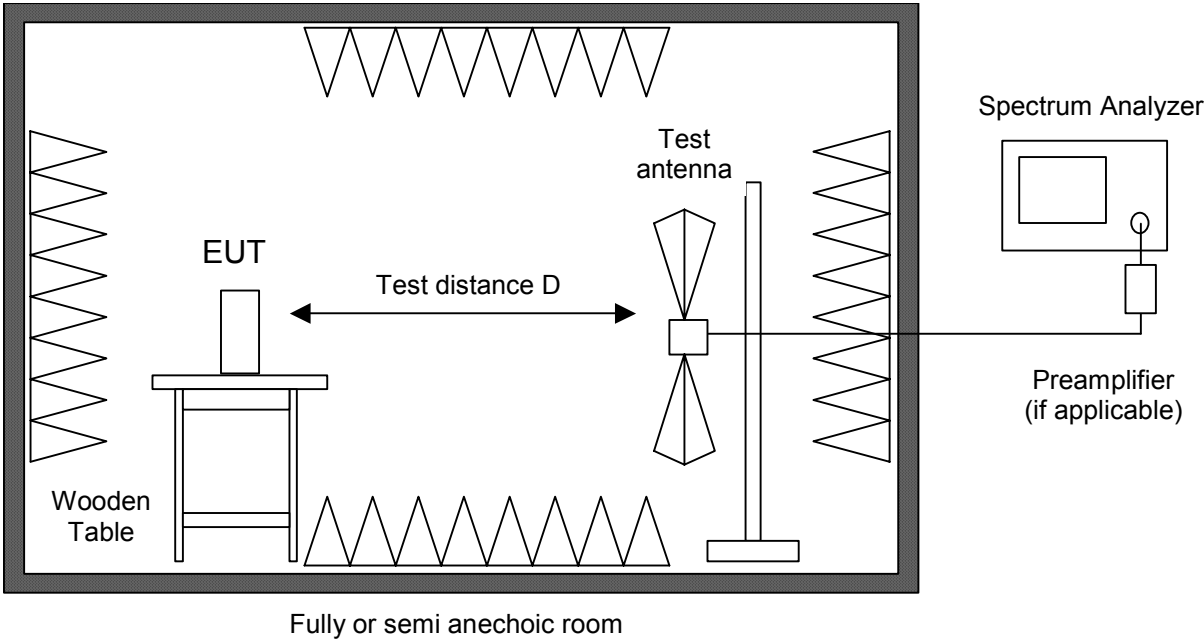


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	Spectrum analyzer	R 3271	05050023	Advantest
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	CPA9231A	3393	Schaffner
☐	Preamplifier	R14601		Advantest
☐	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
☐	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
☐	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
☐	External Mixer	WM782A	845881/005	Tektronix
☐	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
☒	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
☐	Horn antenna	3115	9508-4553	EMCO
☐	Horn antenna	3160-03	9112-1003	EMCO
☐	Horn antenna	3160-04	9112-1001	EMCO
☐	Horn antenna	3160-05	9112-1001	EMCO
☐	Horn antenna	3160-06	9112-1001	EMCO
☐	Horn antenna	3160-07	9112-1008	EMCO
☐	Horn antenna	3160-08	9112-1002	EMCO
☐	Horn antenna	3160-09	9403-1025	EMCO
☐	Horn antenna	3160-10	399185	EMCO
☒	Fully anechoic room	No. 2	1452	Albatross Projects
☐	Semi-anechoic room	No. 3	1453	Siemens

6.7 Radiated Emission at Open Field Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b), 15.209 and 15.225(d) IC RSS-210 Issue 6, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

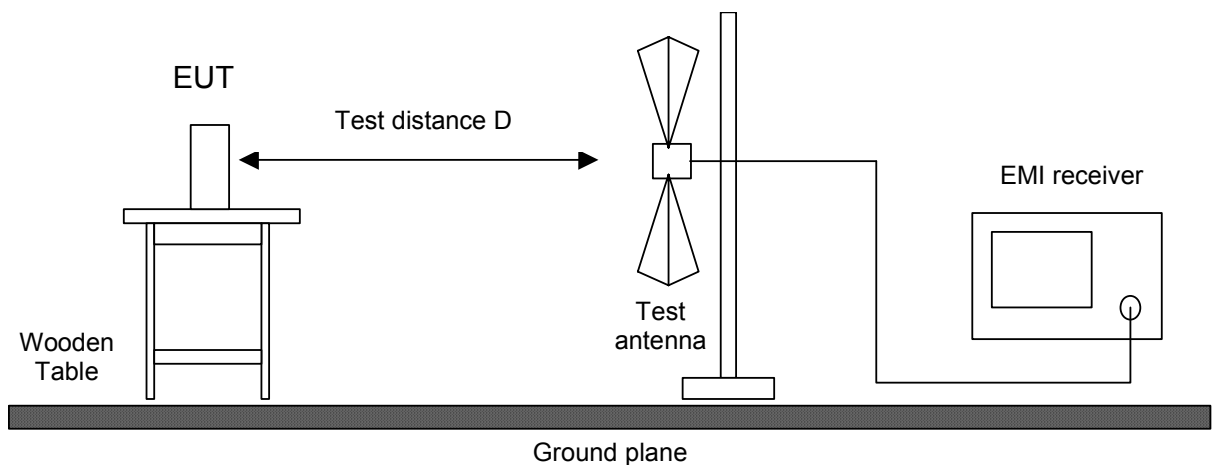


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	EMI receiver	ESVP	881120/024	Rohde & Schwarz
☒	Biconical antenna	EG 1 HK 116	842204/001	Rohde & Schwarz
☒	Log. per. antenna	EG 1 HL 223	841516/023	Rohde & Schwarz
☒	Open field test site	EG 1	1450	Senton

6.8 Carrier Frequency Stability

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 1, section 4.5 and IC RSS-210 Issue 6, section A2.6
Guide:	ANSI C63.4
The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C. If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used. For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to: • the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage • the battery nominal voltage • 85% of the battery nominal voltage • the battery operating end point voltage which shall be specified by the equipment manufacturer The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance. If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.	


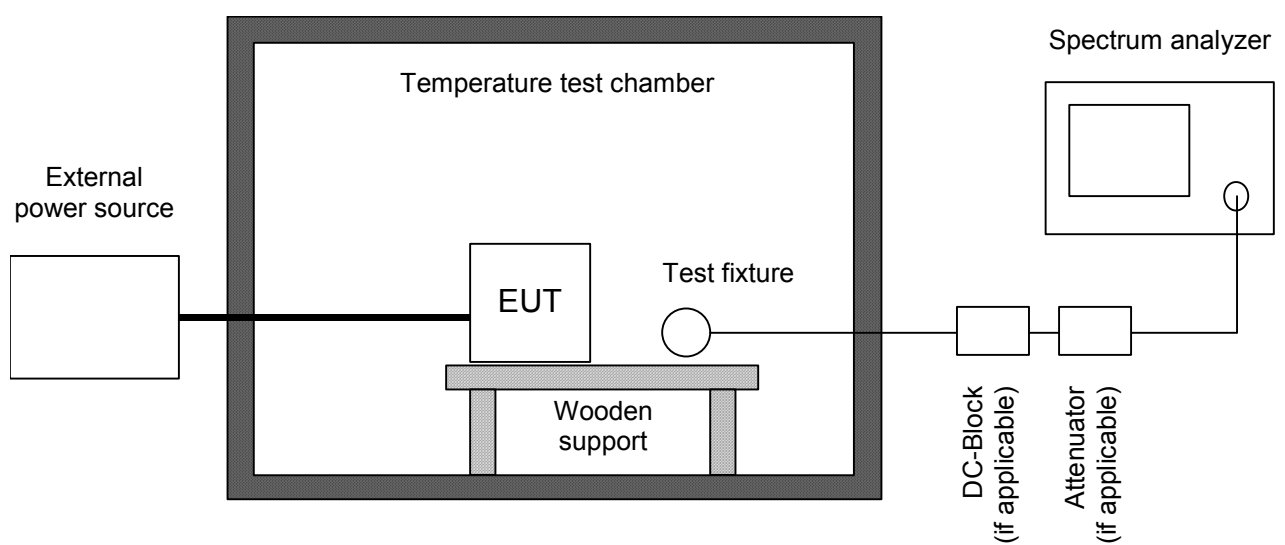


Test instruments used:


Used	Type	Model	Serial No. or ID	Manufacturer
☐	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☒	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☐	DC-block	7006	A2798	Weinschel
☐	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda
☒	Test probe	TP01	001	Senton
☒	DC power supply	NGSM 32/10	203	Rohde & Schwarz
☐	Isolating transformer	RT 5A	10387	Grundig
☐	Isolating transformer	RT 5A	10416	Grundig
☒	Temperature test chamber	HT4010	07065550	Heraeus

7 Photographs Taken During Testing



Test setup for radiated emission measurement 9 kHz – 30 MHz

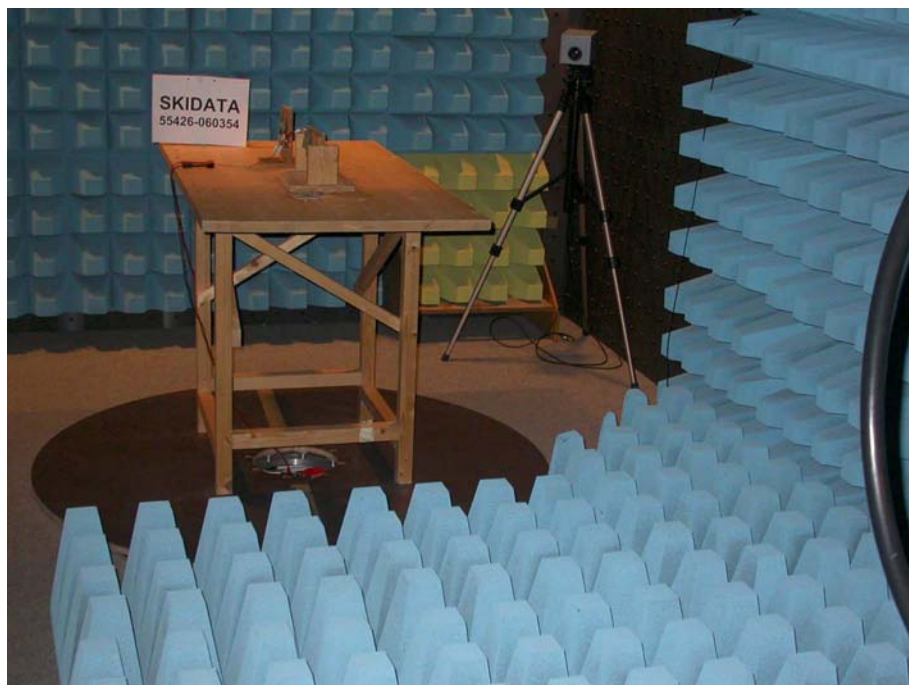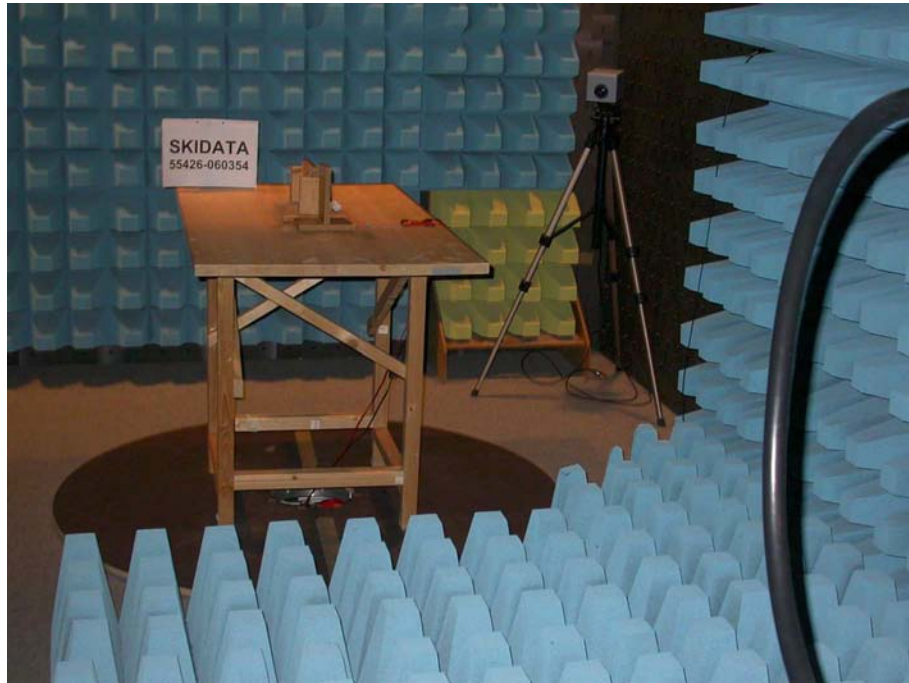

**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**

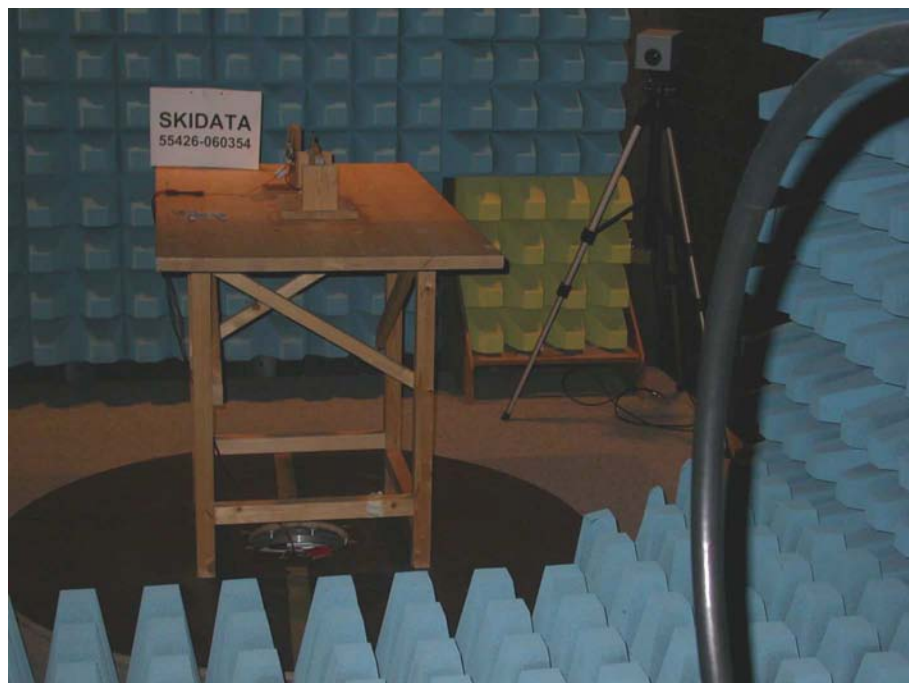

**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**

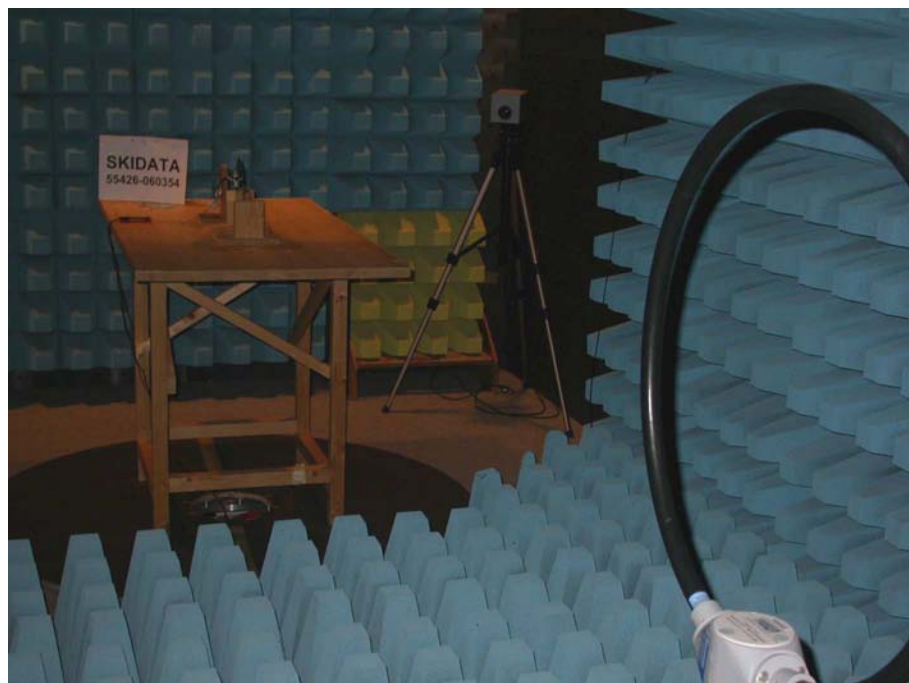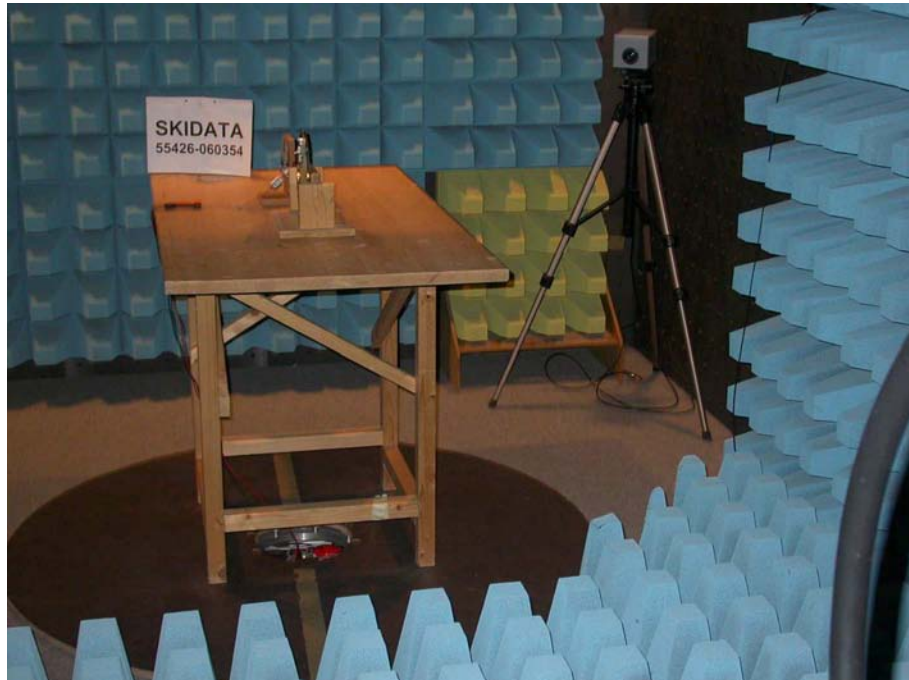

**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**



**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**



**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**



**Test setup for radiated emission measurement 9 kHz – 30 MHz
- continued -**

