



EMI TEST REPORT

Test Report No. : 26BE0051-HO-F1

Applicant : Alps Electric Co., Ltd.
Type of Equipment : Label Printer
Model No. : CDPR22
FCC ID : QT5-CDPR22
Test Standard : FCC Part15 Subpart C,
Section 15.207, Section 15.209, Section 15.247: 2006
Test Result : Complied

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test: January 12, 14, 17, 18 and May 10, 11, 2006

Tested by:

I. Isozaki
Ichiro Isozaki &

T. Imamura
Toyokazu Imamura

M. Hosaka
Makoto Hosaka &

T. Suzuki
Takahiro Suzuki

Approved by:

O. Watatani
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Table of Contents	Page
1 Applicant Information	3
2 Product Description	4
3 Test Specification, Procedures and Results	5
4 System Test Configuration	7
5 Conducted Emissions	9
6 Carrier Frequency Separation	10
7 20dB Bandwidth	10
8 Number of Hopping Frequency	10
9 Dwell time	10
10 Maximum Peak Output Power	10
11 Out of Band Emissions (Antenna Port Conducted)	10
12 Out of Band Emissions (Radiated)	11
 <u>Contents of Appendixes</u>	 12
APPENDIX 1: Photographs of test setup	13
APPENDIX 2: Test Data	15
APPENDIX 3: Test instruments	49

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

1 Applicant Information

Company Name : Alps Electric Co., Ltd.
Brand Name : ALPS
Address : 41-25, Yanagi-machi, Noda Onahama, Iwaki-shi, Fukushima-ken 971-8615 JAPAN
Telephone Number : +81 246 58 6464
Facsimile Number : +81 246 58 7994
Contact Person : Koichi Sugiyama

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

2 Product Description

Type of Equipment : Label Printer

Model No. : CDPR22

Serial No. : Out of Band emission (Radiated), Hopping mode: #10
Out of Band emission (Radiated), except Hopping mode: #6
Antenna port conducted test: #4

Rating : AC100-120/220-240V, 50/60Hz

Country of Manufacture : Japan

Receipt Date of Sample : January 12, 2006

Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)

Frequency of operation : 2427-2469MHz
Other clock frequency : Custom IC: 32MHz, CPU: 50MHz, USB: 480MHz
Type of modulation : ASK (FHSS)
Antenna type : Dipole antenna
Antenna connector type : U.FL
Antenna gain : 1.58 dBi
Mode of operation : Simplex

Emission designation : 1M53AXD
Operation temperature range : 0 ~ 40 deg. C.

The RFID installed in the Label Printer employs a homodyne system, therefore the receiver input bandwidth is same as the transmitting frequency operation.

FCC Part15.31 (e)

The Label Printer provides the module with stable power supply (DC 3.3 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

3 Test Specification, Procedures and Results

3.1 Test specification

Test specification : FCC Part15 Subpart C: 2006
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	Section 15.207	-		7.3dB (2.0305MHz, L1, AV, Tx&Rx 2427MHz)	Complied
Carrier Frequency Separation	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.247 (a)(1)	Conducted	N/A	*See data.	Complied
20dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.247 (a)(1)	Conducted	N/A		Complied
Number of Hopping Frequency	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Dwell time	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum Peak Output Power	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.247 (b)(1)	Conducted	N/A		Complied
Spurious Emission	ANSI C63.4:2003 13. Measurement of intentional radiators	Section15.209 Section15.247(d)	Conducted / Radiated	N/A	2.0dB (24490.00MHz, Horizontal & Vertical, Tx Hopping)	Complied

The measurements also referred to FCC Public Notice DA 00-705 "Guidance on Measurement for Frequency Hopping Spread Spectrum Systems".

* No addition, exclusion nor deviation has been made from the standard.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

3.3 Uncertainty

Conducted emission test

The measurement uncertainty (with 95% confidence level) for this test is ± 2.7 dB.

The data listed in this test report has enough margin, more than site margin.

Antenna port conducted test

The measurement uncertainty (with 95% confidence level) for this test is ± 0.4 dB.

Spurious emission test (Radiated)

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.

The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 5.2 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.4 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.

907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN

Telephone number : +81 465 77 1011

Facsimile number : +81 465 77 2112

NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005 (Registration No.: 95486).

IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005 (Registration No.: 466226).

IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).

IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 EMS lab.	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5	(Semi-anechoic chamber)	
No.3 shielded room	4.0 x 5.0 x 2.7		

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

4 System Test Configuration


4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.


Test mode: Transmitting/Receiving mode (Packet size: DH5)
 - Low channel : 2427MHz
 - Middle channel : 2449MHz
 - High channel : 2469MHz
 - Hopping

4.2 Configuration of Tested System


Front View (Conducted emission)

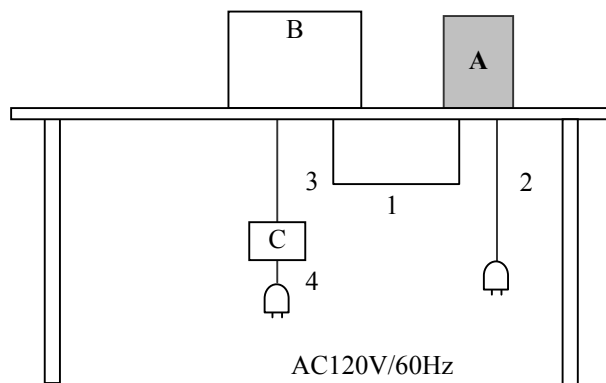


Front View (Radiated emission)

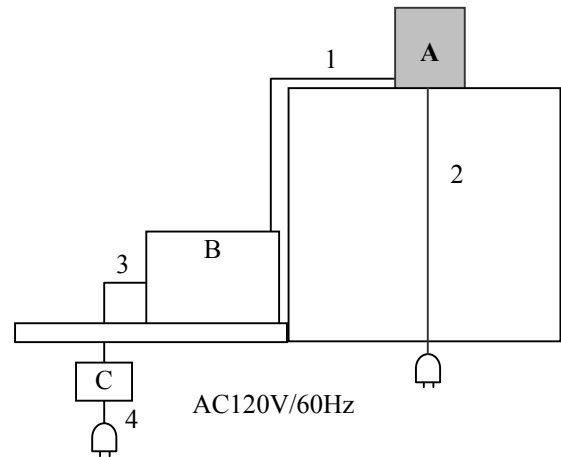

Top View (Conducted emission)

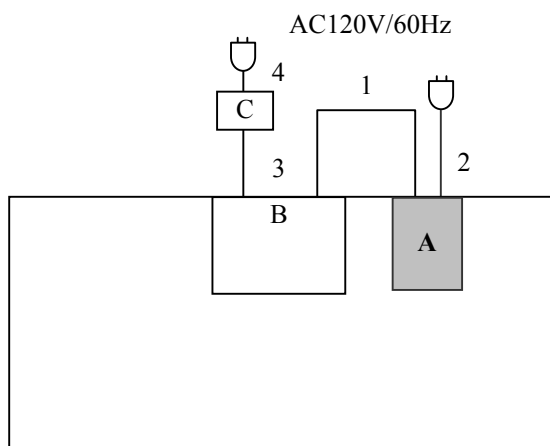

Top View (Radiated emission)

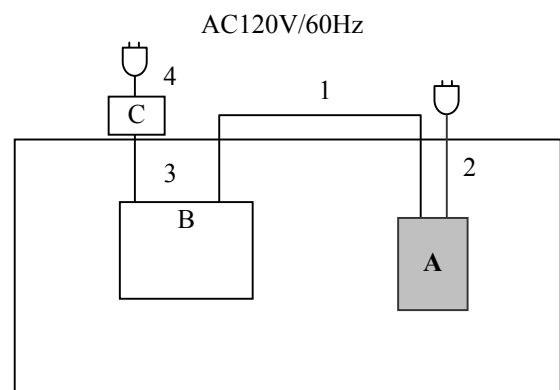

* Test data was taken under worse case conditions.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	Label Printer	CDPR22	#4 #6 *1	ALPS	QT5-CDPR22 (EUT)
B	Personal Computer	PPX	-	DELL	-
C	AC Adaptor	ADP-70EB	-	DELL	-

*1) For Conducted emission and Out of Band emission (Radiated), the model of serial #6 was under the test. The model of serial #4 was under the test for Antenna port conducted test.

List of cables used

No.	Name	Length (m)	Shield	Remark
1	Serial cable	1.6	Shielded	-
2	AC Power cable	2.9	Unshielded	-
3	DC cable	1.8	Unshielded	-
4	AC Power cable	1.8	Unshielded	-

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

5 Conducted Emissions

5.1 Operating environment

The test was carried out in No.3 shielded room.

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.8m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN) and excess AC cable was bundled in center. I/O cable were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT operation mode : Transmitting/Receiving

5.4 Test procedure

The EUT was connected to a LISN (AMN).
An overview sweep with peak detection has been performed.
The Conducted emission measurements were made with the following detector function of the test receiver.
Detector: QP/AV
IF Bandwidth: 10kHz

5.5 Results

Summary of the test results : Pass
Test data : APPENDIX 2 Page 15 - 19

Date : January 14, 2006 Test engineer : Ichiro Isozaki

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b(01.06.05)

6 Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date: January 17, 2006

Test data: APPENDIX 2 Page 20
Test engineer : Toyokazu Imamura

7 20dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date: January 17, 2006

Test data: APPENDIX 2 Page 21
Test engineer : Toyokazu Imamura

8 Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date: January 17, 2006

Test data: APPENDIX 2 Page 22 to 23
Test engineer : Toyokazu Imamura

9 Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date: January 17, 2006

Test data: APPENDIX 2 Page 24 to 25
Test engineer : Toyokazu Imamura

10 Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass
Date: January 17, 2006

Test data: APPENDIX 2 Page 26
Test engineer : Toyokazu Imamura

11 Out of Band Emissions (Antenna Port Conducted)

Test Procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date: January 18 and May 11, 2006

Test data: APPENDIX 2 Page 27 - 34
Test engineer : Toyokazu Imamura and Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

12 Out of Band Emissions (Radiated)

12.1 Operating environment

The test was carried out in No.1 anechoic chamber.

12.2 Test configuration

EUT was placed on a platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

12.3 Test conditions

Frequency range : 30MHz - 26.5GHz
Test distance : 3m
EUT operation mode : Transmitting/Receiving

12.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz
IF Bandwidth		AV: RBW: 1MHz/VBW: 10Hz

12.5 Results

Summary of the test results : Pass
Test data : APPENDIX 2 Page 35 - 38 (30 - 1000MHz)
: APPENDIX 2 Page 39 - 46 (1 - 26.5GHz)

Date : January 12, 17 and May 10, 2006
Test engineer : Toyokazu Imamura, Takahiro Suzuki and Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

APPENDIX 1: Photographs of test setup

Page 13 : Conducted emission

Page 14 : Radiated emission

APPENDIX 2: Test Data

Page 15 - 19 : Conducted Emission

Page 20 : Carrier Frequency Separation

Page 21 : 20dB Bandwidth

Page 22 - 23 : Number of Hopping Frequency

Page 24 - 25 : Dwell time

Page 26 : Maximum Peak Output Power

Page 27 - 34 : Out of Band Emissions (Antenna Port Conducted)

Page 35 - 46 : Out of Band Emissions (Radiated)

35-38 : 30-1000MHz

39-46 : 1-26.5GHz

Page 47 - 48 : Occupied Bandwidth

APPENDIX 3: Test instruments

Page 49 : Test instruments

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

This page has been submitted as a separate exhibit.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

This page has been submitted as a separate exhibit.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)

DATA OF CONDUCTION TEST

UL Apex Co., Ltd.

YAMAKITA No.3 SHIELD ROOM

Report No. : 26BE0051-H0 - **F1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2427MHz
 Remarks : -
 Date : 1/14/2006
 Phase : Single Phase
 Temperature : 22 °C
 Humidity : 42 %
 Regulation : FCC Part15C § 15. 207. (CISPR Pub. 22)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dB μV]	AV [dB μV]	QP [dB μV]	AV [dB μV]				QP [dB]	AV [dB μV]	QP [dB μV]	AV [dB μV]	QP [dB]	AV [dB]
1.	0.1500	31.5	-	32.5	-	0.1	0.1	0.0	32.7	-	66.0	56.0	33.3	-
2.	0.1958	46.4	42.7	46.8	45.4	0.1	0.1	0.0	47.0	45.6	63.8	53.8	16.8	8.2
3.	0.3937	35.3	-	36.9	-	0.1	0.2	0.0	37.2	-	58.0	48.0	20.8	-
4.	0.6549	35.3	34.9	35.5	35.1	0.1	0.2	0.0	35.8	35.4	56.0	46.0	20.2	10.6
5.	0.7210	34.7	-	34.4	-	0.1	0.2	0.0	35.0	-	56.0	46.0	21.0	-
6.	1.7686	34.0	32.0	38.9	38.0	0.1	0.4	0.0	39.4	38.5	56.0	46.0	16.6	7.5
7.	2.0305	30.6	27.9	38.7	38.2	0.1	0.4	0.0	39.2	38.7	56.0	46.0	16.8	7.3
8.	2.1614	33.2	-	32.4	-	0.1	0.4	0.0	33.7	-	56.0	46.0	22.3	-
9.	9.9899	40.7	34.3	40.0	33.3	0.6	1.2	0.0	42.5	36.1	60.0	50.0	17.5	13.9

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.


■ LISN: KLS-05 (NSLK8126) ■ COAXIAL CABLE: KCC-24/25/26/28
 ■ PULSE LIMITER: KPL-02 ■ EMI RECEIVER: KTR-03 (ESHS10)

DATA OF CONDUCTION TEST

UL Apex Co.,Ltd.
YAMAKITA No.3 SHIELD ROOM
Report No. : 26BE0051-H0 - **F I**

Applicant : ALPS ELECTRIC CO., LTD.
Kind of Equipment : Label Printer
Model No. : CDPR22
Serial No. : #6
Power : AC120V/60Hz
Mode : Transmitting/Receiving 2427MHz
Remarks : -
Date : 1/14/2006
Phase : Single Phase
Temperature : 22 °C
Humidity : 42 %
Regulation : FCC Part15C § 15.207. (CISPR Pub. 22)

Engineer : Ichiro Isozaki

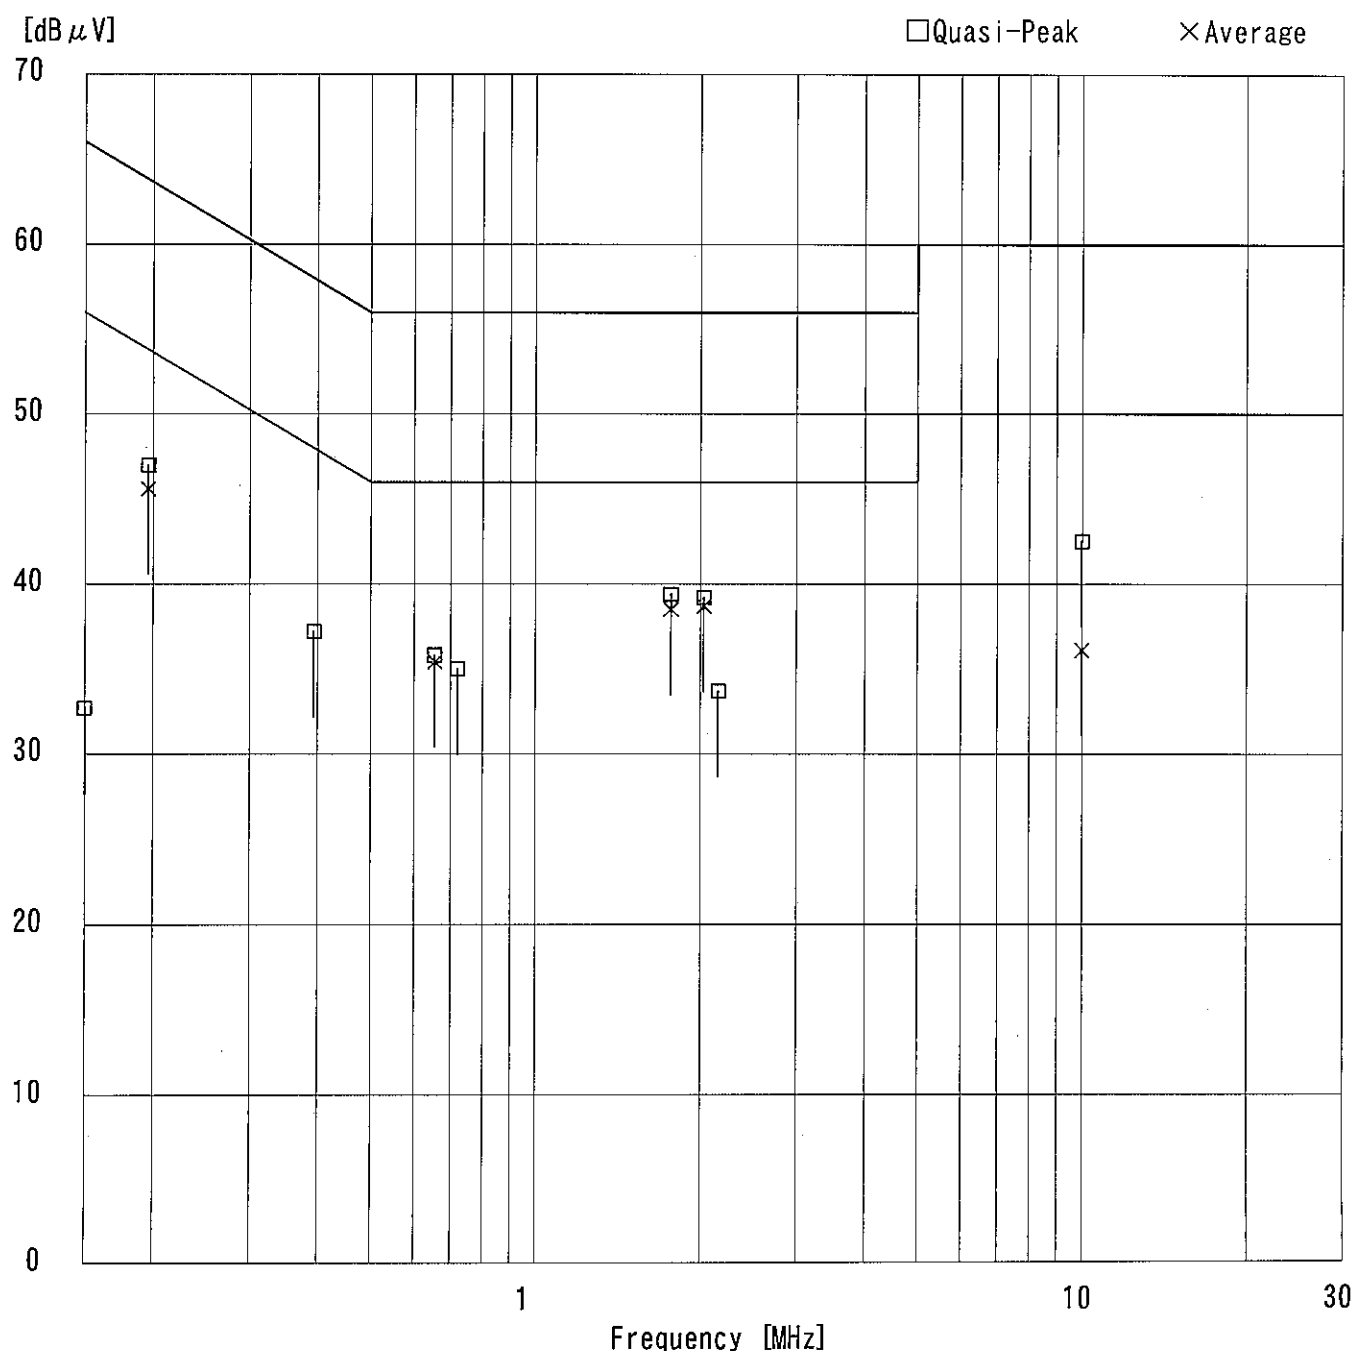

DATA OF CONDUCTION TEST CHART

UL Apex Co.,Ltd.

YAMAKITA No.3 SHIELD ROOM


Report No. : 26BE0051-HQ. **F 1**

Applicant : ALPS ELECTRIC CO., LTD.
Kind of Equipment : Label Printer
Model No. : CDPR22
Serial No. : #6
Power : AC120V/60Hz
Mode : Transmitting/Receiving 2427MHz
Remarks : -
Date : 1/14/2006
Phase : Single Phase
Temperature : 22 °C
Humidity : 42 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub. 22)
Regulation 2 : None

Engineer : Ichiro Isozaki


Emission Level [dB μ V]

PHASE:N

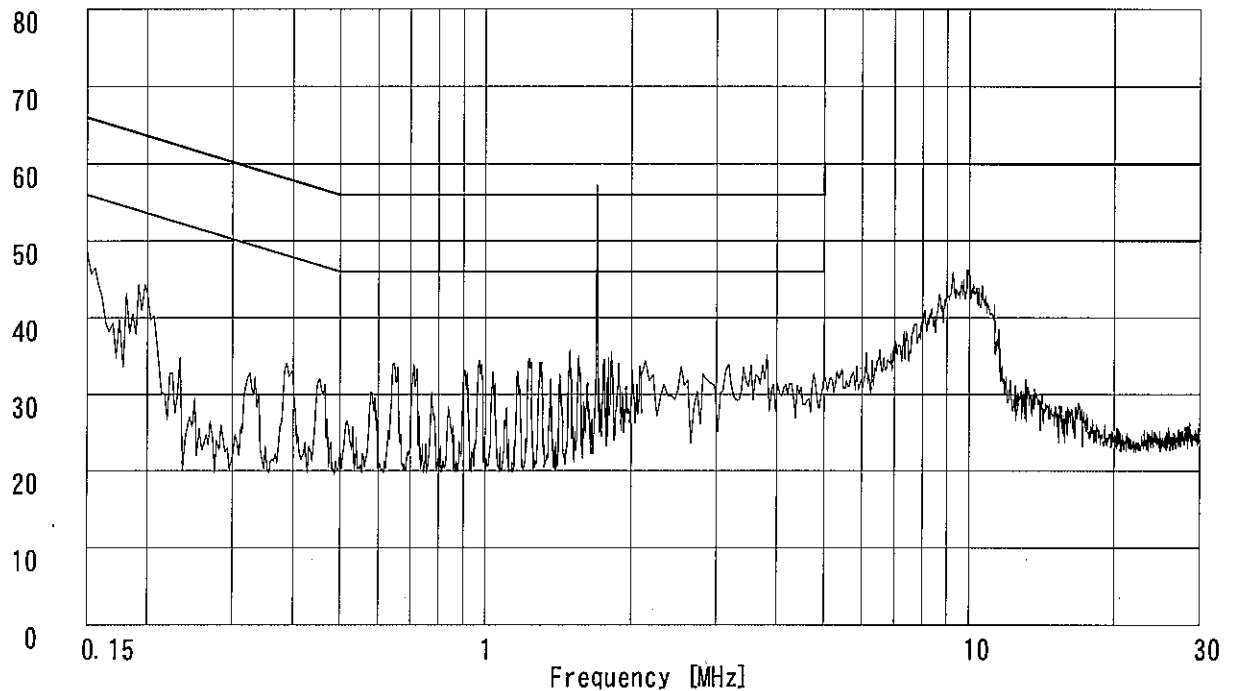

Emission Level [dB μ V]

PHASE:L1

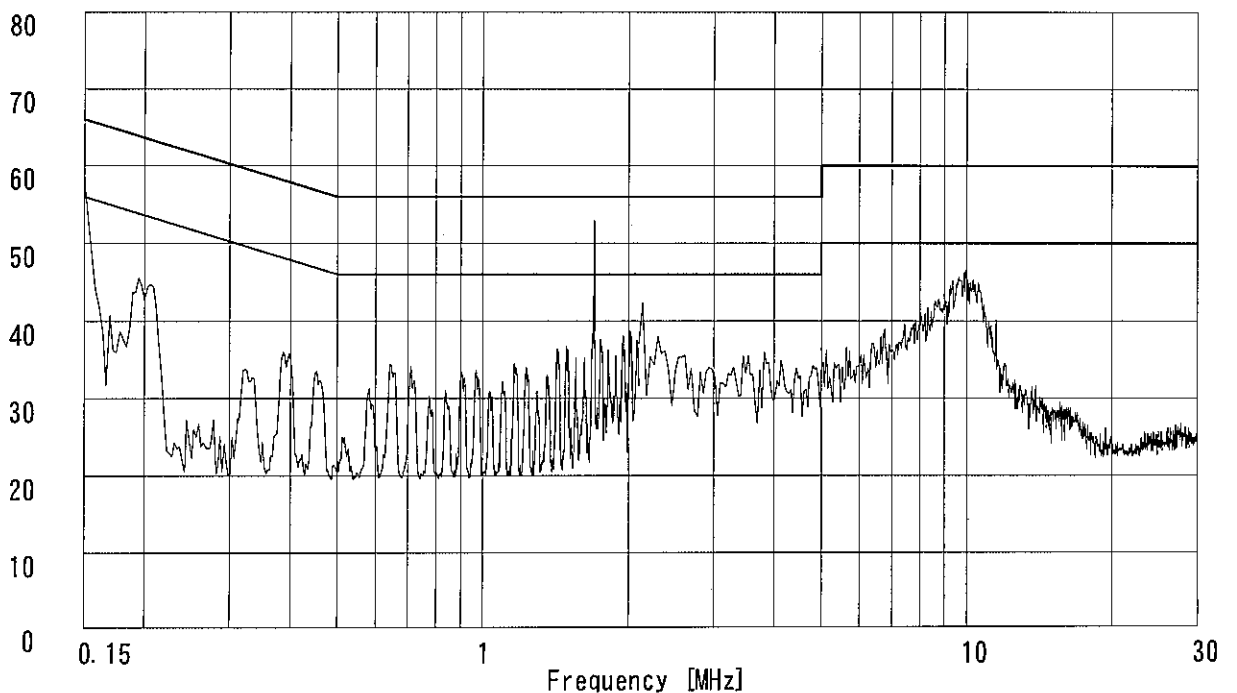

Page:

DATA OF CONDUCTION TEST CHART



UL Apex Co.,Ltd.

YAMAKITA No.3 SHIELD ROOM

Report No. : 26BE0051-H0 - **F 1**

Applicant : ALPS ELECTRIC CO., LTD.
Kind of Equipment : Label Printer
Model No. : CDPR22
Serial No. : #6
Power : AC120V/60Hz
Mode : Transmitting/Receiving 2449MHz
Remarks : -
Date : 1/14/2006
Phase : Single Phase
Temperature : 22 °C
Humidity : 42 %
Regulation 1 : FCC Part15C § 15.207. (CISPR Pub. 22)
Regulation 2 : None

Engineer : Ichiro Isozaki

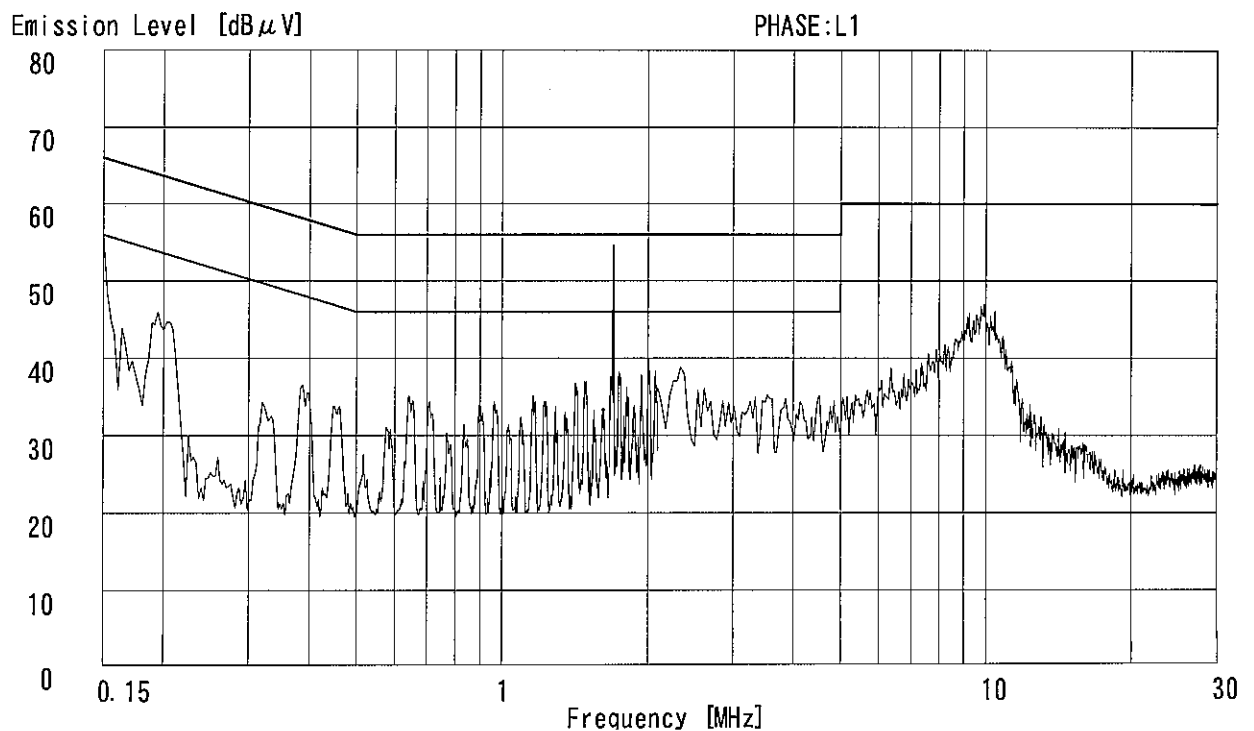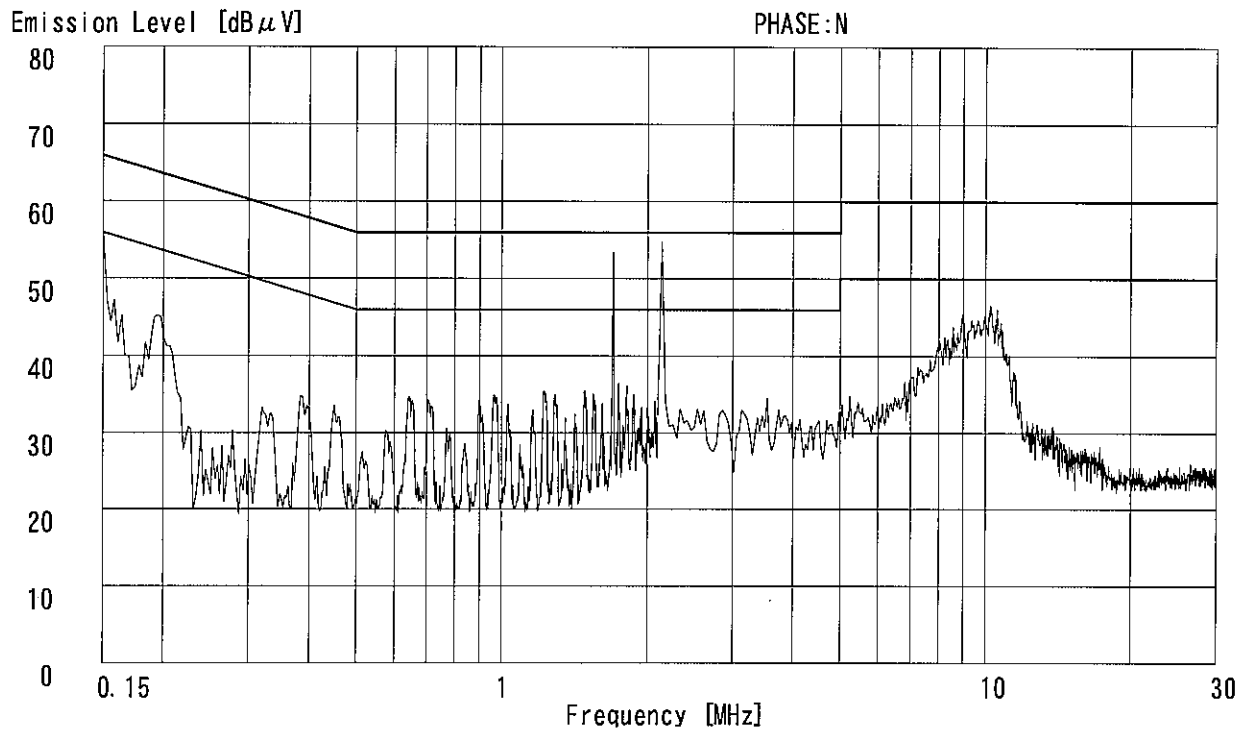

Page:

DATA OF CONDUCTION TEST CHART

UL Apex Co.,Ltd.

YAMAKITA No.3 SHIELD ROOM


Report No. : 26BE0051-H0 = F1

Applicant : ALPS ELECTRIC CO., LTD.
Kind of Equipment : Label Printer
Model No. : CDPR22
Serial No. : #6
Power : AC120V/60Hz
Mode : Transmitting/Receiving 2469MHz
Remarks : -
Date : 1/14/2006
Phase : Single Phase
Temperature : 22 °C
Humidity : 42 %
Regulation 1 : FCC Part15C § 15. 207. (CISPR Pub. 22)
Regulation 2 : None

Engineer : Ichiro Isozaki


Emission Level [dBμV]

PHASE:N

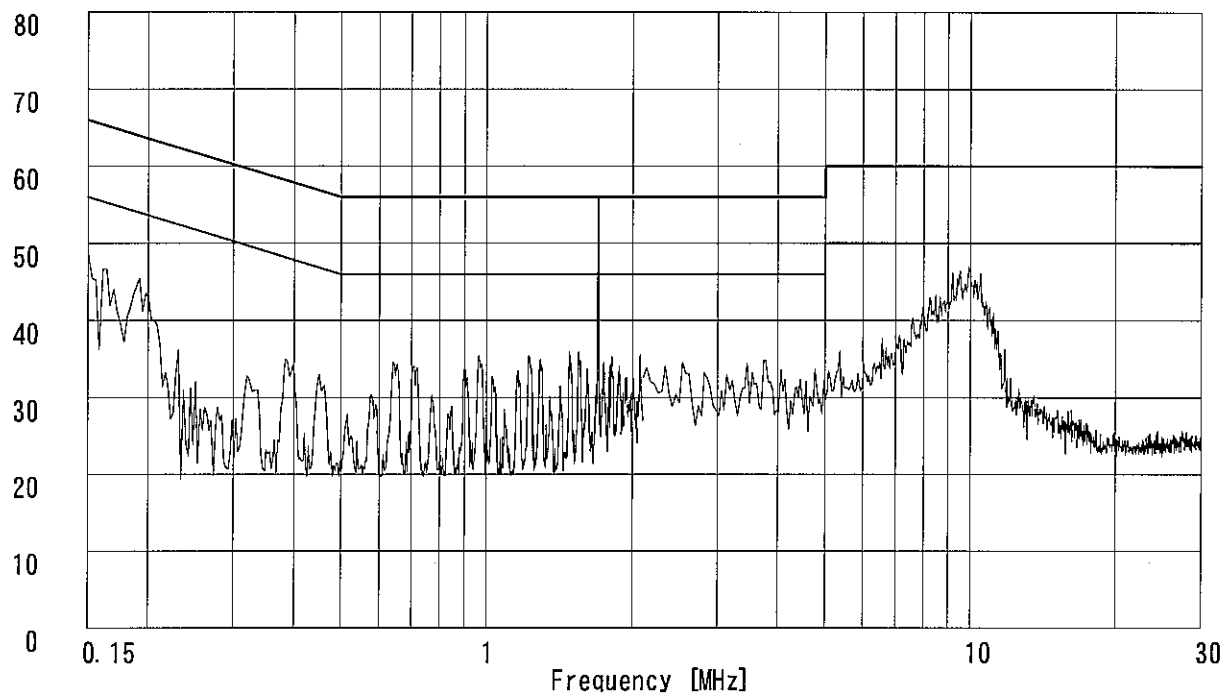

Emission Level [dBμV]

PHASE:L1

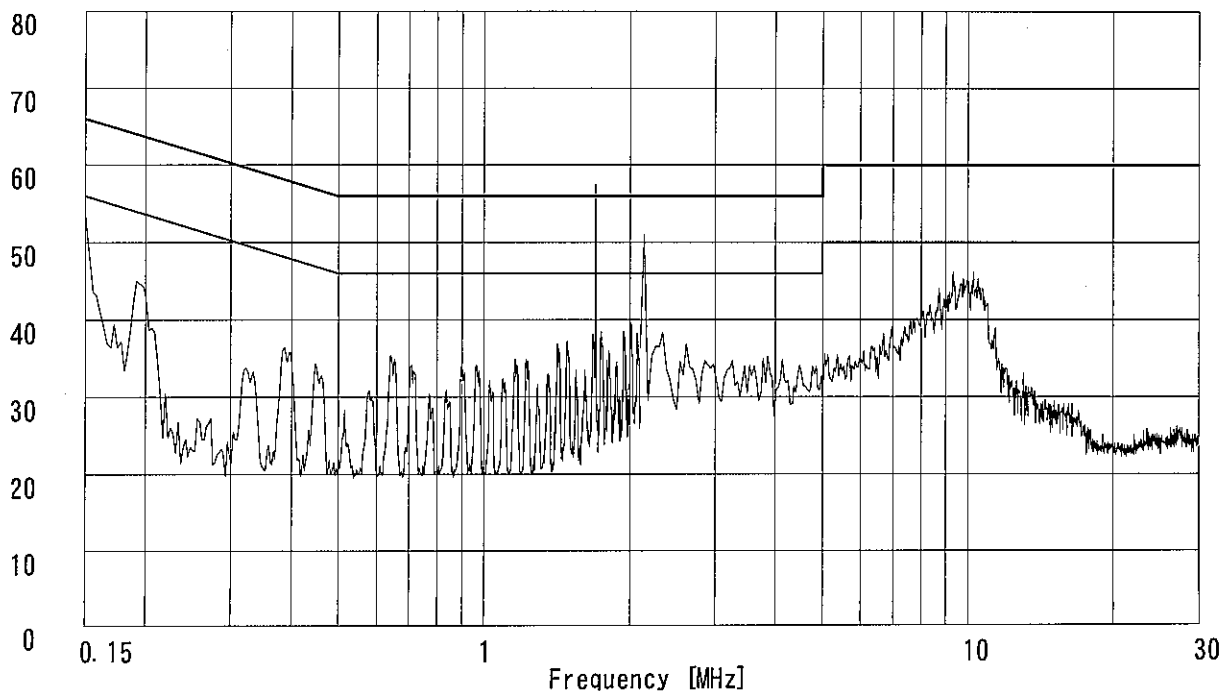


Page:

Channel Separation: FCC 15.247(a)(1)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

1. Hopping:1995.99kHz

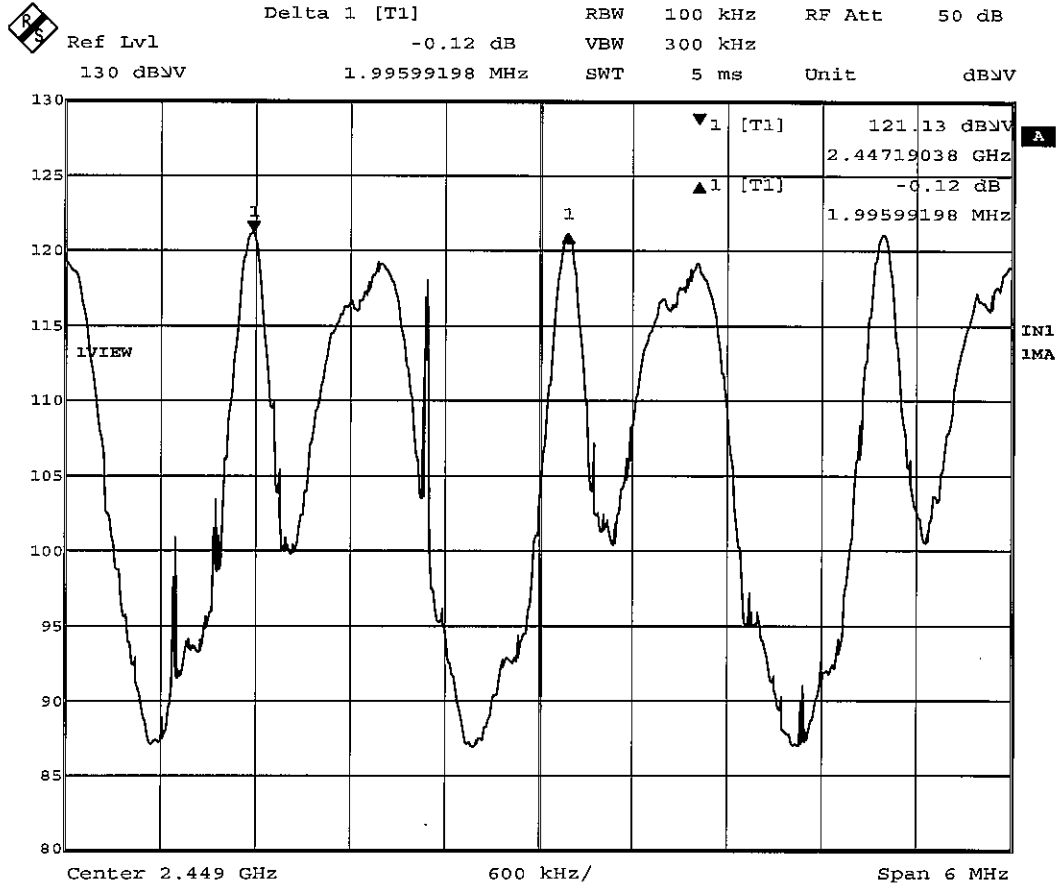


Date: 17.JAN.2006 09:07:04

20dB Bandwidth: FCC 15.247(a)(1)


COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura


1. ch : 2427MHz/20dB Bandwidth:1364.73kHz

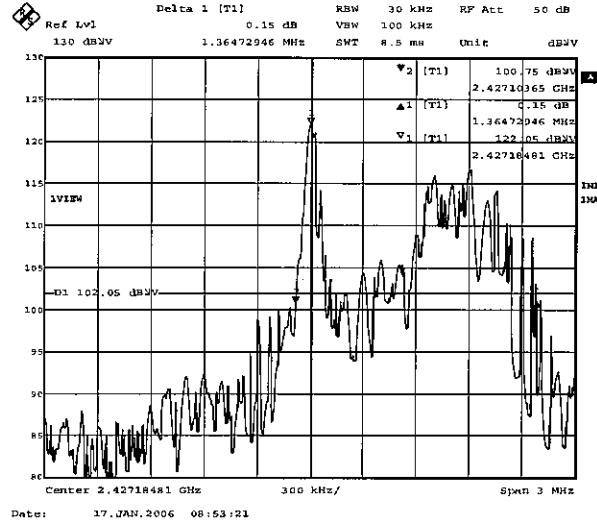

2. ch : 2449MHz/20dB Bandwidth:1262.53kHz

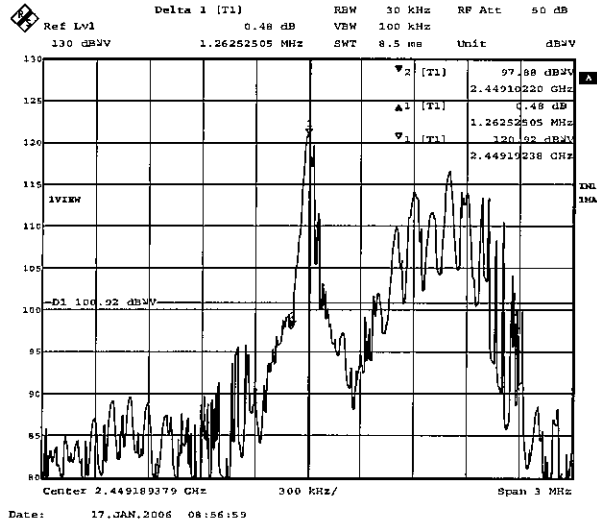

3. ch : 2469MHz/20dB Bandwidth:1220.44kHz

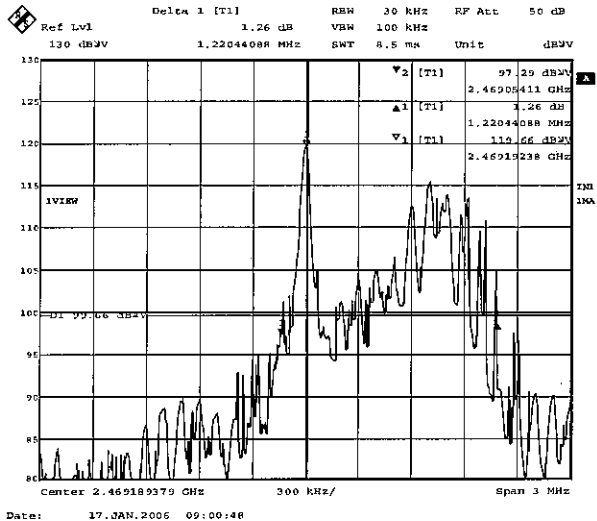


Channel Utilization: FCC 15.247(a)(1)(iii)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)(iii)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Hopping: 22ch


1.

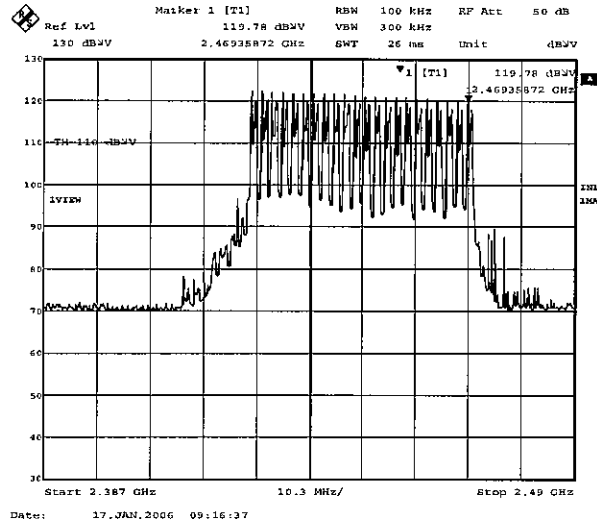

2.

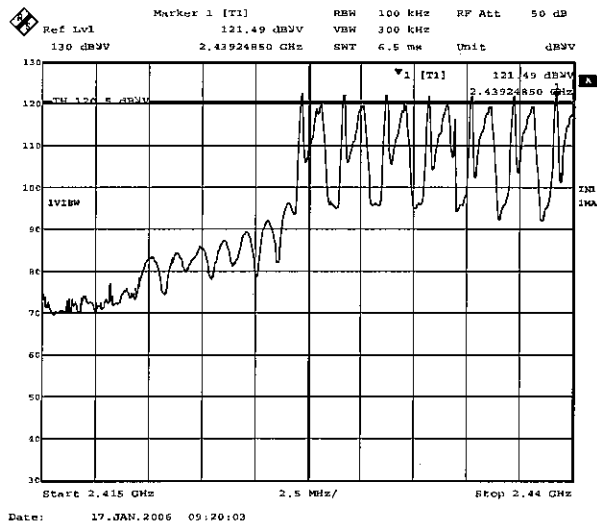

3.

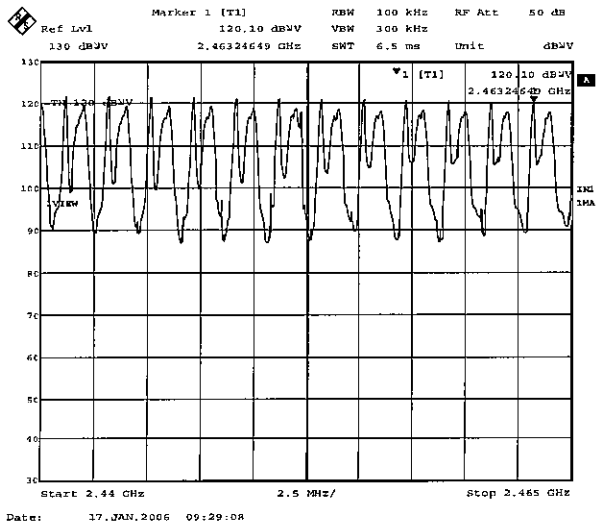


Channel Utilization: FCC 15.247(a)(1)(iii)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)(iii)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

4.

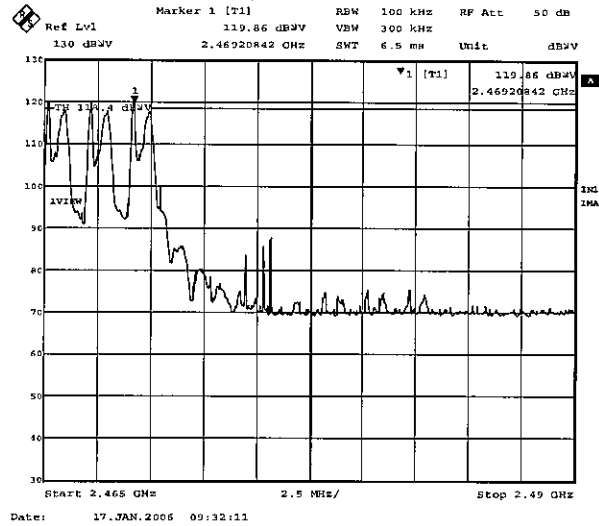


Dwell Time: FCC 15.247(a)(1)(iii)


COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)(iii)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura


Hopping:
Count 1

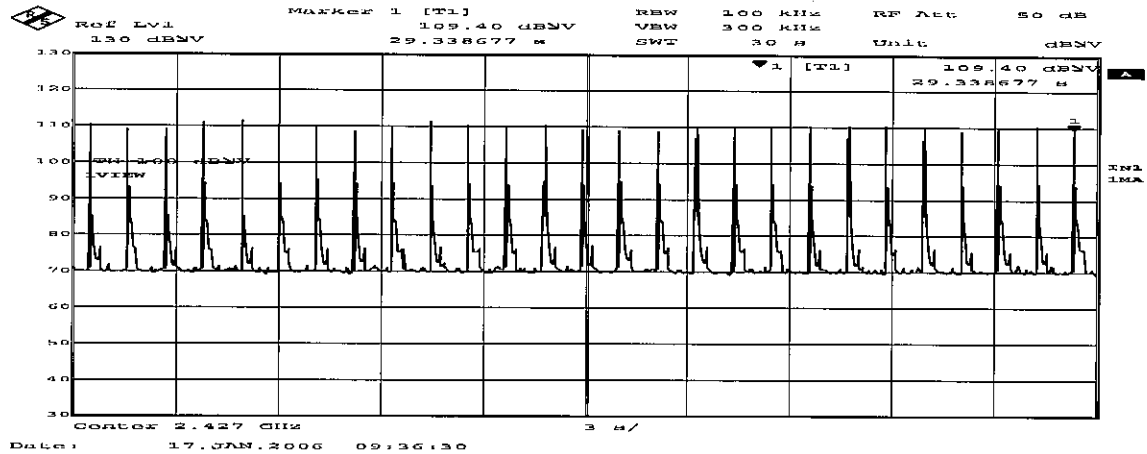

Count 2

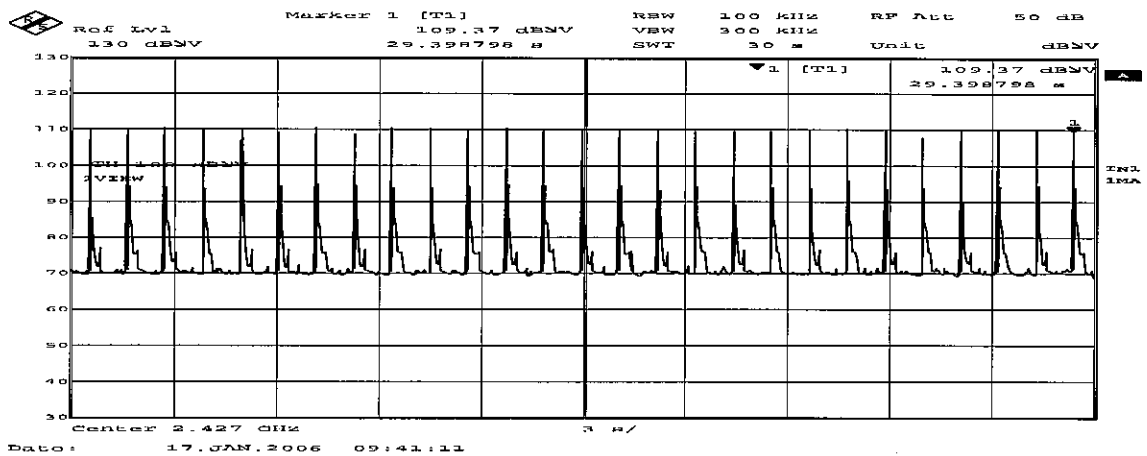


Count 3

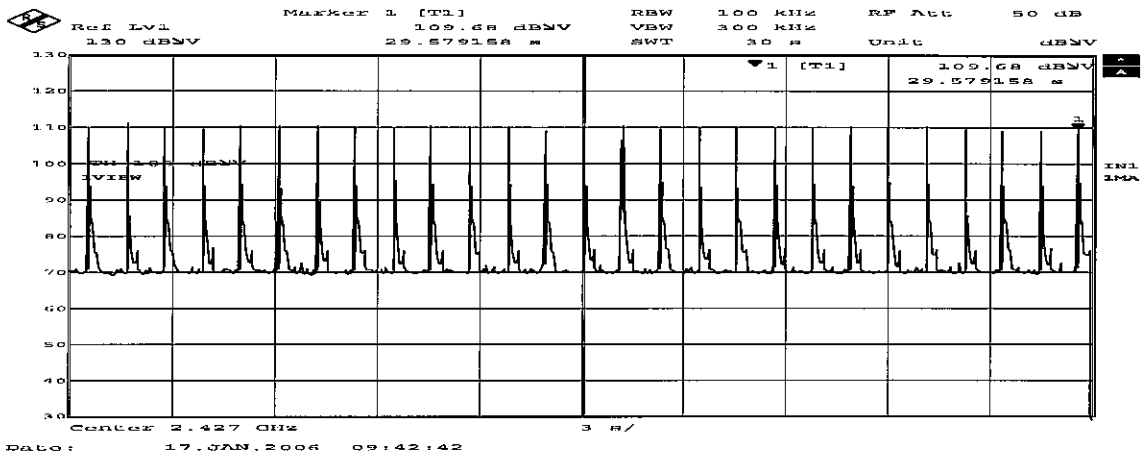


Dwell Time: FCC 15.247(a)(1)(iii)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz
Count 4


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(a)(1)(iii)
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

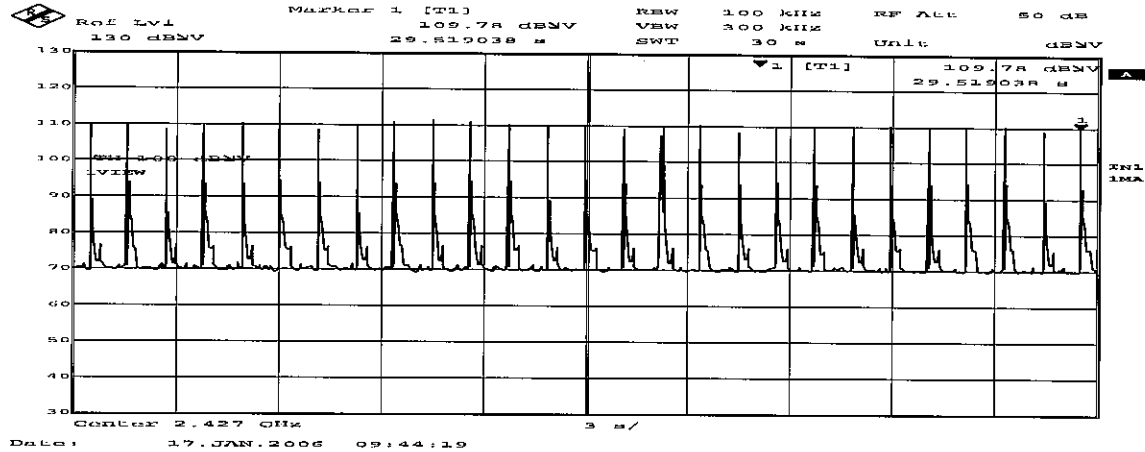

Count 5

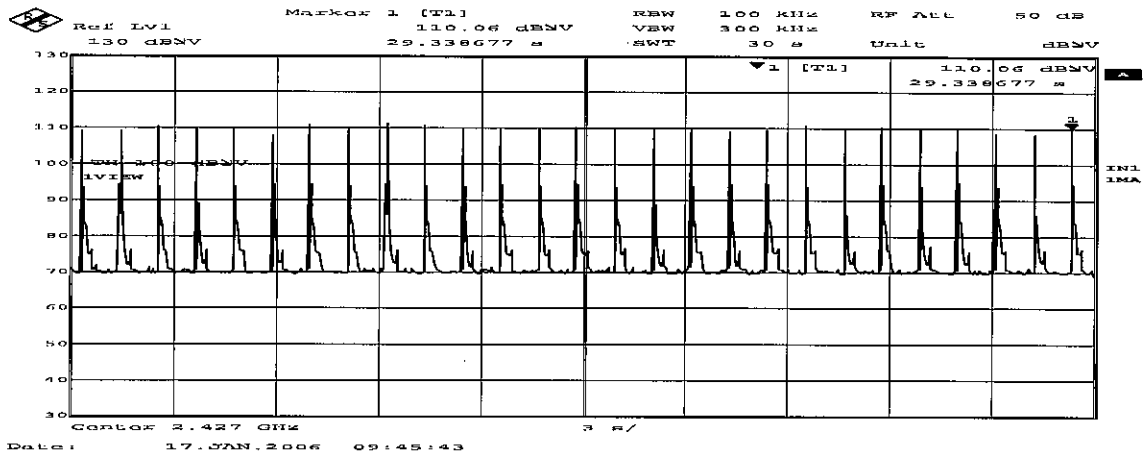

Duty cycle(Hopping)

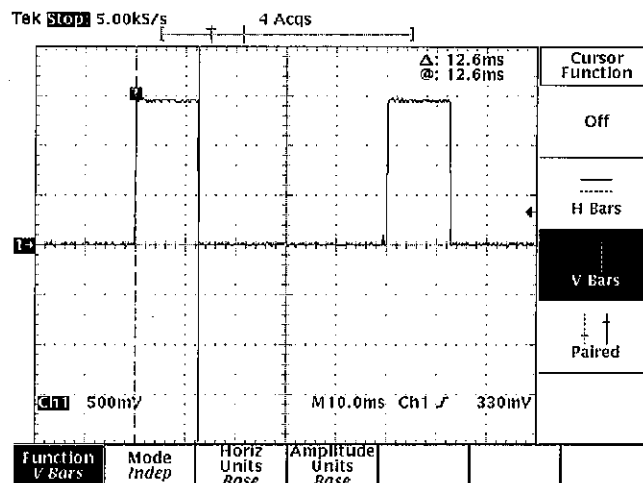

Average times of rising in 30 sec. of sweep = $(27 + 27 + 27 + 27 + 27) / 5 = 27$

Average times of rising in 1 sec. = $27 / 30s = 0.9$

Average times of rising in 0.4x = $0.4 * 22ch * 0.9 = 7.92$

Dwell time = $7.92 * 12.6 = 99.8 \text{ [ms]}$

Limit : Dwell Time < 0.4[s]

Maximum Peak Conducted Output Power

UL Apex Co.,Ltd
YAMAKITA No.4 Shielded Room

COMPANY : ALPS ELECTRIC Co.,LTD.
EQUIPMENT : Label Printer
MODEL NUMBER: CDP22
SERIAL NUMBER: #4
FCC ID : QT5-CDP22
POWER : AC120V/60Hz
TEST MODE : Transmitting/Receiving

REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(b)(1)
DATE : 2006/01/17
TEMP./HUMI : 20°C/38%

ENGINEER : Toyokazu Imamura

CH	FREQ [GHz]	P/M Reading [dBm]	Cable Loss [dB]	Results [dBm]	Limit (1W) [dBm]	MARGIN [dB]
Low	2427.00	15.10	1.00	16.10	30.0	13.90
Mid	2449.00	14.15	1.00	15.15	30.0	14.85
High	2469.00	12.98	1.00	13.98	30.0	16.02
Hopping	-	15.26	1.00	16.26	30.0	13.74

Limit: 1W=30dBm

P/M: Power Meter

CABLE LOSS:The Cable Prepared by The Client + KCC-D16

* Peak output power was measured with the peak function of the Power Meter.


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2427MHz


1.

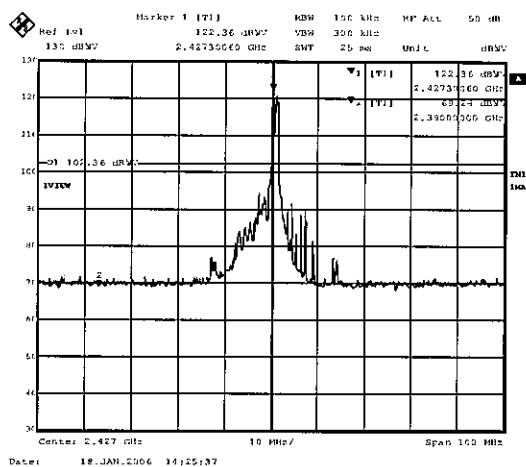

2.

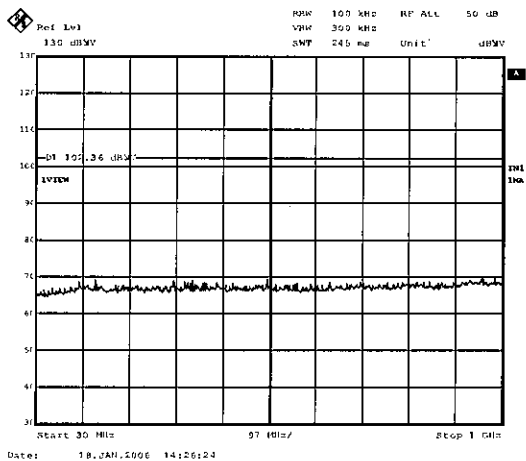

3.

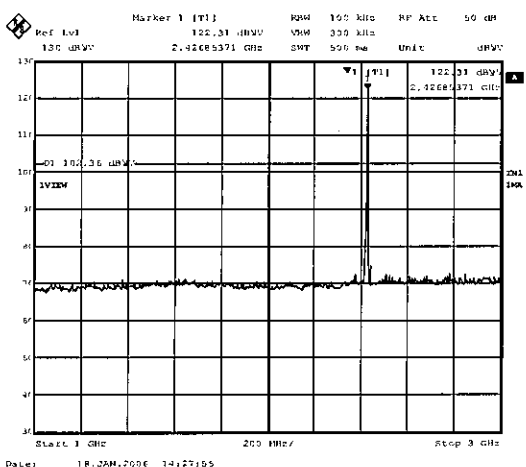


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2427MHz

4.

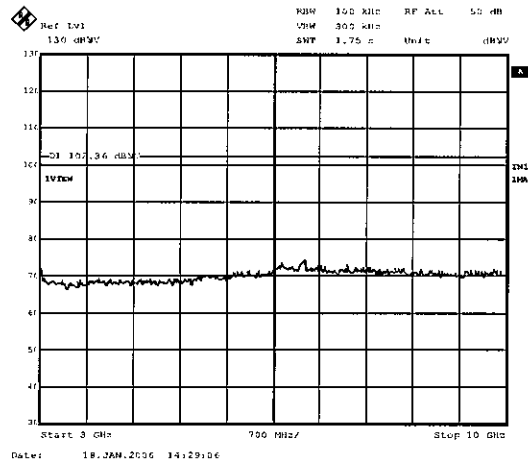

5.

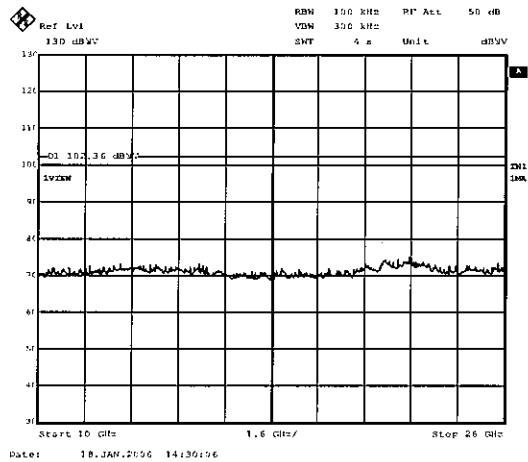


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDP22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2449MHz


1.

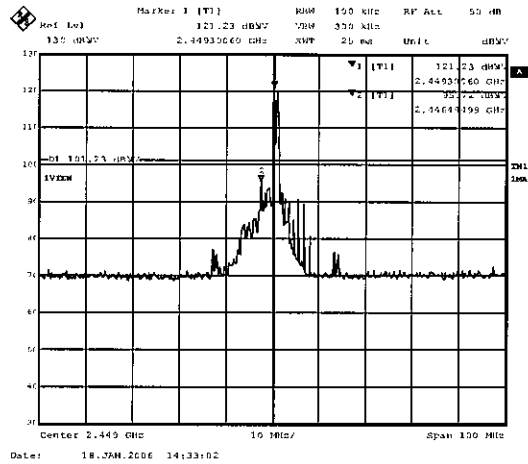

2.

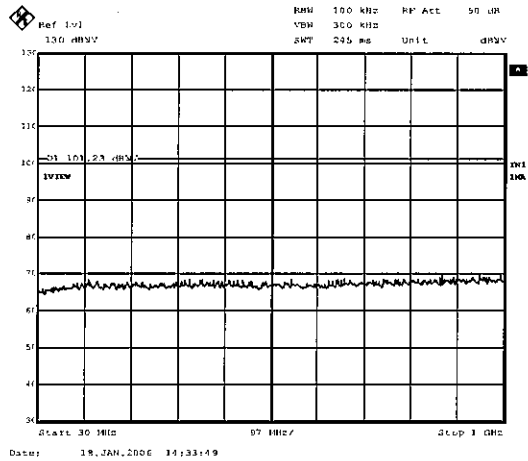

3.

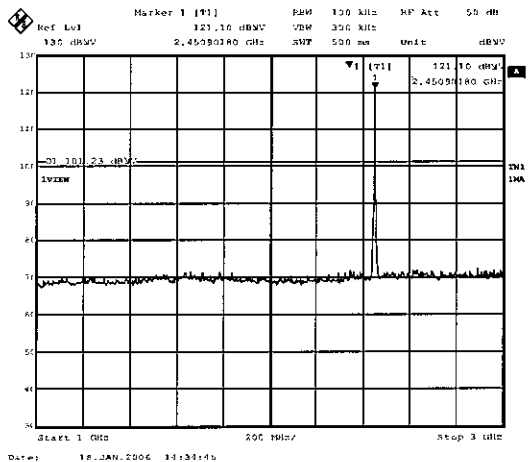


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2449MHz

4.

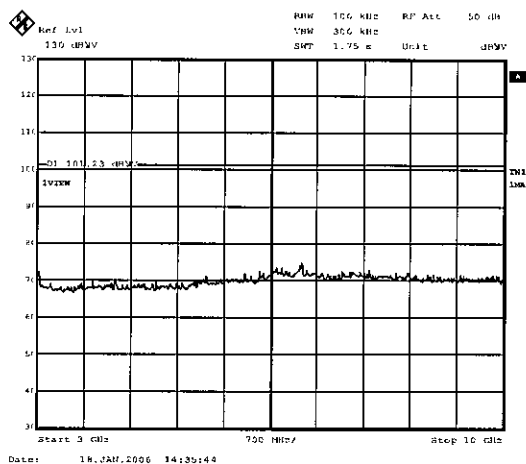

5.

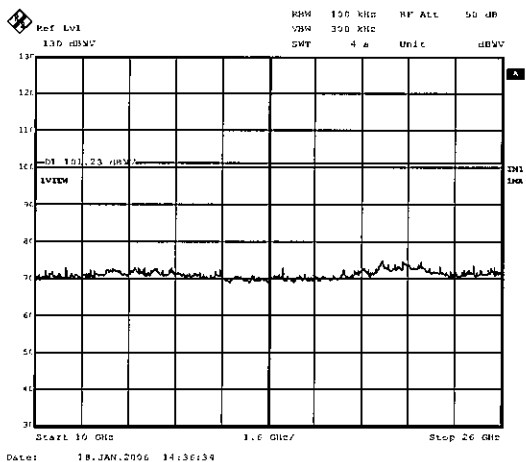


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2469MHz


1.

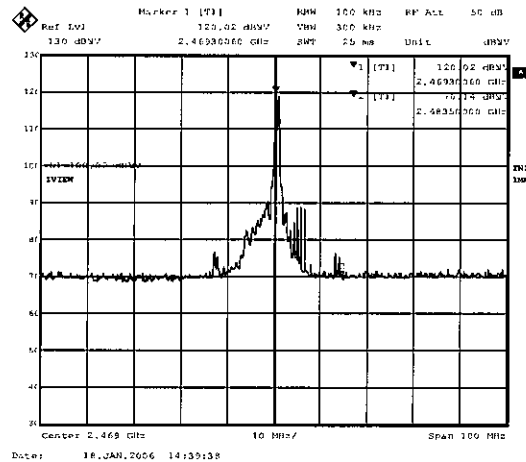

2.

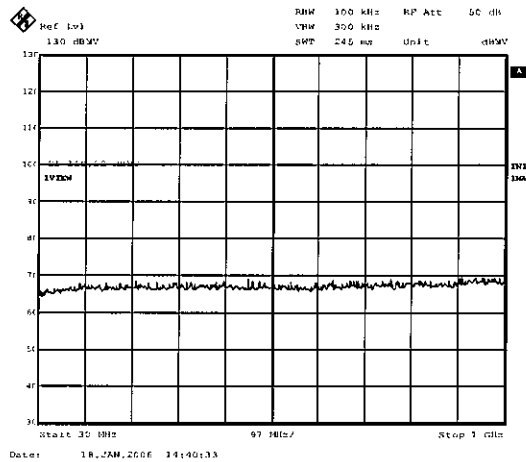

3.

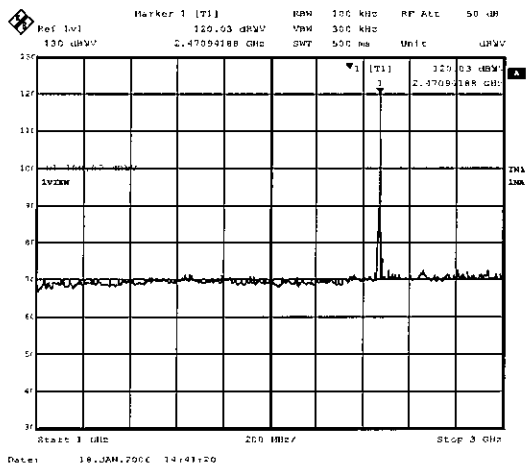


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID :QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/01/18
TEMP/HUMI : 20°C/34%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

Ch:2469MHz

4.

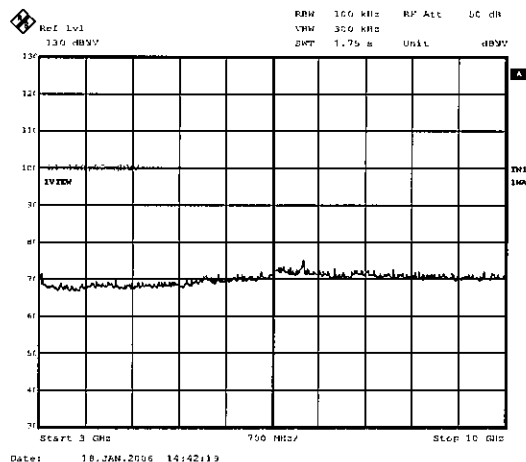

5.

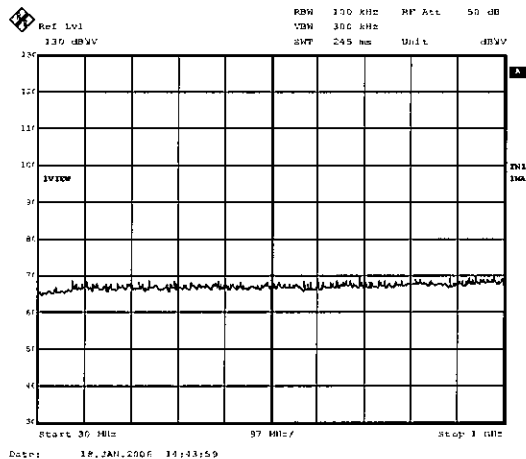


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz


UL Apex Co., Ltd. Yamakita No.2 Shielded Room
REPORT NO : 26BE0051-HO - F1
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/05/11
TEMP/HUMI : 22°C/66%
TEST MODE : Transmitting/Receiving (Hopping)
ENGINEER : Makoto Hosaka

Hopping


1.

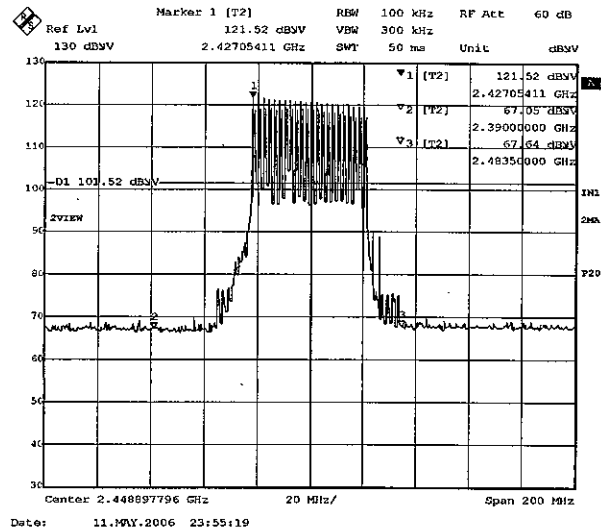

2.

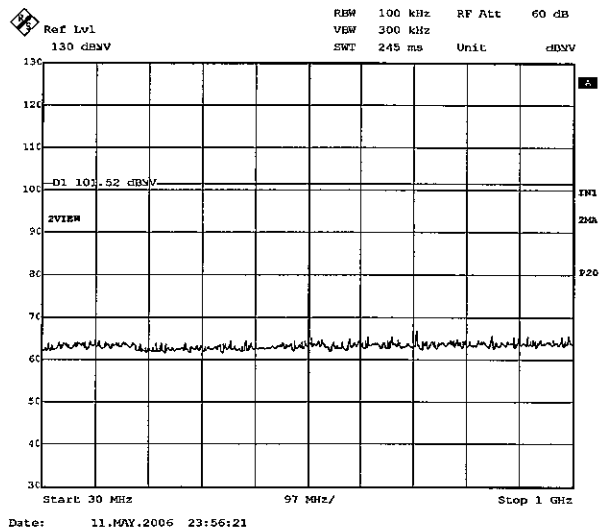

3.

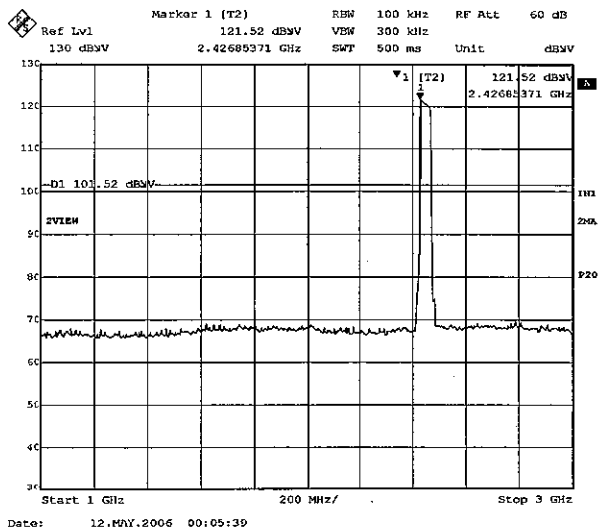


Out of Band Emission(Antenna Terminal Conducted): FCC 15.247(d)


COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.2 Shielded Room
REPORT NO : 26BE0051-HO
REGULATION : Fcc Part15SubpartC 247(d)
DATE : 2006/05/11
TEMP/HUMI : 22°C/66%
TEST MODE : Transmitting/Receiving (Hopping)
ENGINEER : Makoto Hosaka

4.

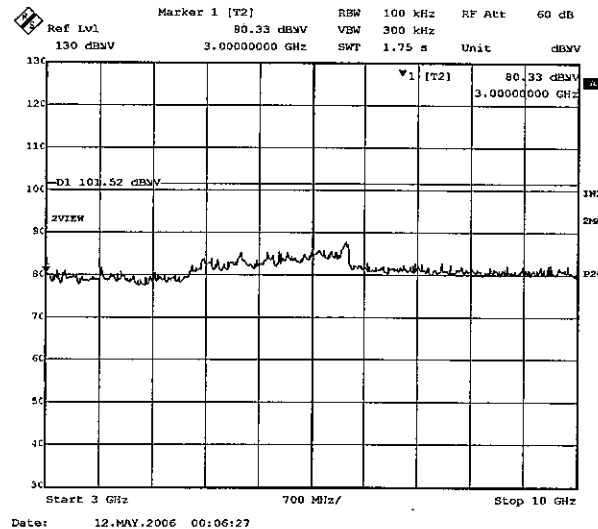

5.

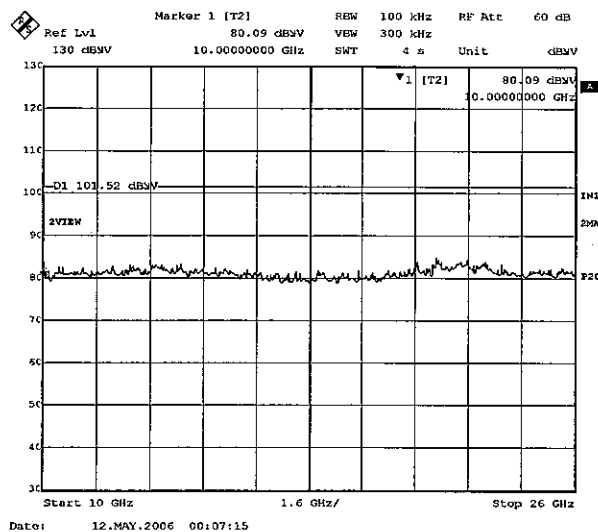

DATA OF RADIATION TEST

UL Apex Co., Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - **F 1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2427MHz
 Remarks :
 Date : 1/12/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 28 %
 Regulation : FCC Part15C § 15.209

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	35.28	BB	22.5	29.9	16.5	27.6	1.2	6.0	18.6	26.0	40.0	21.4	14.0
2.	86.46	BB	33.9	42.8	7.2	27.5	1.9	6.0	21.5	30.4	40.0	18.5	9.6
3.	103.40	BB	32.2	38.9	10.6	27.5	2.1	6.0	23.4	30.1	43.5	20.1	13.4
4.	332.79	BB	32.5	36.9	15.1	26.9	4.1	6.0	30.8	35.2	46.0	15.2	10.8
5.	480.06	BB	31.7	37.4	18.1	27.7	5.1	6.0	33.2	38.9	46.0	12.8	7.1
6.	671.91	BB	38.6	37.6	20.5	28.0	5.7	6.0	42.8	41.8	46.0	3.2	4.2
7.	750.04	BB	31.3	28.2	21.2	27.9	6.0	6.0	36.6	33.5	46.0	9.4	12.5

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299MHz/KLA-03 (USLP9143) 300-1000MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - **F1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2449MHz
 Remarks :
 Date : 1/12/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 28 %
 Regulation : FCC Part15C § 15.209

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	35.20	BB	22.4	29.6	16.5	27.6	1.2	6.0	18.5	25.7	40.0	21.5	14.3
2.	87.26	BB	32.9	42.3	7.3	27.5	1.9	6.0	20.6	30.0	40.0	19.4	10.0
3.	103.20	BB	33.4	39.2	10.6	27.5	2.1	6.0	24.6	30.4	43.5	18.9	13.1
4.	332.96	BB	30.9	35.7	15.1	26.9	4.1	6.0	29.2	34.0	46.0	16.8	12.0
5.	480.06	BB	31.0	37.2	18.1	27.7	5.1	6.0	32.5	38.7	46.0	13.5	7.3
6.	671.91	BB	35.3	33.7	20.5	28.0	5.7	6.0	39.5	37.9	46.0	6.5	8.1
7.	750.04	BB	31.4	29.9	21.2	27.9	6.0	6.0	36.7	35.2	46.0	9.3	10.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299MHz/KLA-03 (USLP9143) 300-1000MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - F 1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2469MHz
 Remarks :
 Date : 1/12/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 28 %
 Regulation : FCC Part15C §15.209

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	35.32	BB	22.4	29.6	16.5	27.6	1.2	6.0	18.5	25.7	40.0	21.5	14.3
2.	86.38	BB	33.8	42.8	7.2	27.5	1.9	6.0	21.4	30.4	40.0	18.6	9.6
3.	103.68	BB	33.6	38.5	10.7	27.5	2.1	6.0	24.9	29.8	43.5	18.6	13.7
4.	332.83	BB	32.3	37.9	15.1	26.9	4.1	6.0	30.6	36.2	46.0	15.4	9.8
5.	480.06	BB	31.4	37.1	18.1	27.7	5.1	6.0	32.9	38.6	46.0	13.1	7.4
6.	671.91	BB	37.4	38.5	20.5	28.0	5.7	6.0	41.6	42.7	46.0	4.4	3.3
7.	750.04	BB	31.4	28.9	21.2	27.9	6.0	6.0	36.7	34.2	46.0	9.3	11.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299MHz/KLA-03 (USLP9143) 300-1000MHz
 ■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - F1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #10
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving Hopping
 Remarks : -
 Date : 5/10/2006
 Test Distance : 3 m
 Temperature : 22 °C
 Humidity : 60 %
 Regulation : FCC Part15C § 15. 209

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	68.11	BB	31.0	44.6	7.7	28.5	1.6	6.0	17.8	31.4	40.0	22.2	8.6
2.	85.75	BB	26.9	37.3	8.2	28.4	1.9	6.0	14.6	25.0	40.0	25.4	15.0
3.	129.42	BB	33.3	32.5	14.0	28.3	2.3	6.1	27.4	26.6	43.5	16.1	16.9
4.	271.41	BB	25.8	33.7	18.8	27.6	3.5	6.0	26.5	34.4	46.0	19.5	11.6
5.	431.95	BB	31.8	33.4	18.2	28.7	5.0	6.0	32.3	33.9	46.0	13.7	12.1
6.	500.03	BB	30.5	32.2	18.5	29.0	5.2	6.0	31.2	32.9	46.0	14.8	13.1
7.	671.92	BB	34.0	35.5	20.0	29.2	5.7	6.0	36.5	38.0	46.0	9.5	8.0
8.	700.05	BB	34.5	34.3	20.1	29.3	5.8	6.0	37.1	36.9	46.0	8.9	9.1
9.	800.06	BB	36.9	36.9	22.0	29.0	6.2	6.1	42.2	42.2	46.0	3.8	3.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz

■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0- **1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2427MHz
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15. 209 (PK Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	40.8	40.6	32.1	37.0	4.0	10.0	49.9	49.7	74.0	24.1	24.3
2.	4854.00	BB	57.6	58.8	35.1	36.5	5.5	0.5	62.2	63.4	74.0	11.8	10.6
3.	7281.00	BB	45.1	47.6	37.3	36.8	6.6	0.2	52.4	54.9	74.0	21.6	19.1
4.	9708.00	BB	42.3	42.1	36.6	37.1	7.4	0.4	49.6	49.4	74.0	24.4	24.6
5.	12135.00	BB	39.3	40.6	40.3	36.0	8.2	0.0	51.8	53.1	74.0	22.2	20.9
6.	14562.00	BB	38.9	39.8	42.7	35.2	8.9	0.4	55.7	56.6	74.0	18.3	17.4
7.	16989.00	BB	39.7	39.9	46.0	35.6	9.7	0.6	60.4	60.6	74.0	13.6	13.4
8.	19416.00	BB	42.8	42.5	38.5	35.1	10.4	0.0	56.6	56.3	74.0	17.4	17.7
9.	21843.00	BB	43.1	42.7	39.1	35.3	10.8	0.0	57.7	57.3	74.0	16.3	16.7
10.	24270.00	BB	41.3	41.8	39.4	34.9	11.1	0.0	56.9	57.4	74.0	17.1	16.6

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0- F 1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2427MHz
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15. 209 (AV Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	29.9	29.4	32.1	37.0	4.0	10.0	39.0	38.5	54.0	15.0	15.5
2.	4854.00	BB	40.0	41.6	35.1	36.5	5.5	0.5	44.6	46.2	54.0	9.4	7.8
3.	7281.00	BB	31.0	33.6	37.3	36.8	6.6	0.2	38.3	40.9	54.0	15.7	13.1
4.	9708.00	BB	28.8	28.9	36.6	37.1	7.4	0.4	36.1	36.2	54.0	17.9	17.8
5.	12135.00	BB	28.7	28.8	40.3	36.0	8.2	0.0	41.2	41.3	54.0	12.8	12.7
6.	14562.00	BB	29.4	29.5	42.7	35.2	8.9	0.4	46.2	46.3	54.0	7.8	7.7
7.	16989.00	BB	30.6	30.7	46.0	35.6	9.7	0.6	51.3	51.4	54.0	2.7	2.6
8.	19416.00	BB	31.1	30.9	38.5	35.1	10.4	0.0	44.9	44.7	54.0	9.1	9.3
9.	21843.00	BB	32.7	32.8	39.1	35.3	10.8	0.0	47.3	47.4	54.0	6.7	6.6
10.	24270.00	BB	32.5	32.4	39.4	34.9	11.1	0.0	48.1	48.0	54.0	5.9	6.0

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 **F1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2449MHz
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15.209 (PK Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	4898.00	BB	58.0	59.6	35.3	36.5	5.5	0.5	62.8	64.4	74.0	11.2	9.6
2.	7347.00	BB	44.8	47.4	37.4	36.8	6.7	0.2	52.3	54.9	74.0	21.7	19.1
3.	9796.00	BB	42.1	42.5	36.6	37.1	7.4	0.3	49.3	49.7	74.0	24.7	24.3
4.	12245.00	BB	39.5	40.1	39.9	35.9	8.1	0.0	51.6	52.2	74.0	22.4	21.8
5.	14694.00	BB	38.8	39.6	42.6	35.4	9.0	0.5	55.5	56.3	74.0	18.5	17.7
6.	17143.00	BB	39.6	39.7	45.9	35.6	9.6	0.5	60.0	60.1	74.0	14.0	13.9
7.	19592.00	BB	42.6	42.7	38.4	35.2	10.5	0.0	56.3	56.4	74.0	17.7	17.6
8.	22041.00	BB	43.2	42.8	39.1	35.1	10.9	0.0	58.1	57.7	74.0	15.9	16.3
9.	24490.00	BB	41.5	41.6	39.4	35.0	11.1	0.0	57.0	57.1	74.0	17.0	16.9

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0-**F 1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2449MHz
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15. 209 (AV Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	4898.00	BB	41.9	43.0	35.3	36.5	5.5	0.5	46.7	47.8	54.0	7.3	6.2
2.	7347.00	BB	30.8	34.5	37.4	36.8	6.7	0.2	38.3	42.0	54.0	15.7	12.0
3.	9796.00	BB	28.9	29.0	36.6	37.1	7.4	0.3	36.1	36.2	54.0	17.9	17.8
4.	12245.00	BB	28.8	28.7	39.9	35.9	8.1	0.0	40.9	40.8	54.0	13.1	13.2
5.	14694.00	BB	29.5	29.4	42.6	35.4	9.0	0.5	46.2	46.1	54.0	7.8	7.9
6.	17143.00	BB	30.5	30.9	45.9	35.6	9.6	0.5	50.9	51.3	54.0	3.1	2.7
7.	19592.00	BB	30.9	31.1	38.4	35.2	10.5	0.0	44.6	44.8	54.0	9.4	9.2
8.	22041.00	BB	32.8	32.9	39.1	35.1	10.9	0.0	47.7	47.8	54.0	6.3	6.2
9.	24490.00	BB	32.4	32.6	39.4	35.0	11.1	0.0	47.9	48.1	54.0	6.1	5.9

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0-**F1**

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2469MHz
 Remarks : PK (RBW:1MHz, VBW:1MHz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15. 209 (PK Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2483.50	BB	41.4	42.5	30.1	37.1	4.0	10.0	48.4	49.5	74.0	25.6	24.5
2.	4938.00	BB	56.1	59.8	35.4	36.4	5.6	0.5	61.2	64.9	74.0	12.8	9.1
3.	7407.00	BB	45.0	47.2	37.5	36.8	6.7	0.2	52.6	54.8	74.0	21.4	19.2
4.	9876.00	BB	41.9	42.6	36.5	37.1	7.4	0.2	48.9	49.6	74.0	25.1	24.4
5.	12345.00	BB	39.7	39.8	39.5	35.8	8.1	0.0	51.5	51.6	74.0	22.5	22.4
6.	14814.00	BB	38.7	39.5	42.5	35.6	9.0	0.7	55.3	56.1	74.0	18.7	17.9
7.	17283.00	BB	39.7	39.8	45.8	35.6	9.6	0.3	59.8	59.9	74.0	14.2	14.1
8.	19752.00	BB	42.4	42.8	38.5	35.1	10.5	0.0	56.3	56.7	74.0	17.7	17.3
9.	22221.00	BB	43.3	42.9	39.2	35.0	11.0	0.0	58.5	58.1	74.0	15.5	15.9
10.	24690.00	BB	41.4	41.7	39.5	34.8	11.4	0.0	57.5	57.8	74.0	16.5	16.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 7 F 1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #6
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving 2469MHz
 Remarks : AV (RBW:1MHz, VBW:10Hz)
 Date : 1/17/2006
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15.209 (AV Detection) 1-26GHz:3m/26-40GHz:1m

Engineer : Takahiro Suzuki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2483.50	BB	31.6	32.2	30.1	37.1	4.0	10.0	38.6	39.2	54.0	15.4	14.8
2.	4938.00	BB	40.6	43.5	35.4	36.4	5.6	0.5	45.7	48.6	54.0	8.3	5.4
3.	7407.00	BB	30.9	34.7	37.5	36.8	6.7	0.2	38.5	42.3	54.0	15.5	11.7
4.	9876.00	BB	28.7	29.0	36.5	37.1	7.4	0.2	35.7	36.0	54.0	18.3	18.0
5.	12345.00	BB	28.6	28.9	39.5	35.8	8.1	0.0	40.4	40.7	54.0	13.6	13.3
6.	14814.00	BB	29.6	29.3	42.5	35.6	9.0	0.7	46.2	45.9	54.0	7.8	8.1
7.	17283.00	BB	30.7	30.8	45.8	35.6	9.6	0.3	50.8	50.9	54.0	3.2	3.1
8.	19752.00	BB	30.8	31.2	38.5	35.1	10.5	0.0	44.7	45.1	54.0	9.3	8.9
9.	22221.00	BB	32.9	32.7	39.2	35.0	11.0	0.0	48.1	47.9	54.0	5.9	6.1
10.	24690.00	BB	32.6	32.7	39.5	34.8	11.4	0.0	48.7	48.8	54.0	5.3	5.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-02 (1-18GHz) / KHA-04 (18-26GHz)

■ AMP: KAF-04 (8449B) ■ SPECTRUM ANALYZER: KSA-04 ■ CABLE: KCC-D3/D7

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - F 1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #10
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving Hopping
 Remarks : PK RBW:1MHz, VBW:1MHz
 Date : 5/10/2006
 Test Distance : 3 m
 Temperature : 22 °C
 Humidity : 60 %
 Regulation : FCC Part15C § 15. 209 (PK Detection)

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	46.0	45.1	28.7	36.8	4.0	9.9	51.8	50.9	74.0	22.2	23.1
2.	2483.50	BB	43.7	43.6	28.8	36.8	4.0	9.9	49.6	49.5	74.0	24.4	24.5
3.	4927.57	BB	55.0	51.6	33.2	37.3	5.8	0.4	57.1	53.7	74.0	16.9	20.3
4.	7287.45	BB	48.6	48.2	36.6	37.0	6.6	0.5	55.3	54.9	74.0	18.7	19.1
5.	9740.73	BB	42.9	47.5	38.4	37.0	7.6	0.9	52.8	57.4	74.0	21.2	16.6
6.	12245.00	BB	42.5	41.8	40.5	35.7	8.8	0.5	56.6	55.9	74.0	17.4	18.1
7.	14694.00	BB	43.8	42.7	42.8	34.3	9.3	0.7	62.3	61.2	74.0	11.7	12.8
8.	17143.00	BB	43.1	42.8	43.5	34.1	9.7	0.4	62.6	62.3	74.0	11.4	11.7
9.	19592.00	BB	42.7	41.8	40.9	34.3	10.3	0.0	59.6	58.7	74.0	14.4	15.3
10.	22041.00	BB	41.9	41.6	40.8	33.7	11.1	0.0	60.1	59.8	74.0	13.9	14.2
11.	24490.00	BB	42.7	43.7	40.7	33.0	11.5	0.0	61.9	62.9	74.0	12.1	11.1

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz / KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8447B) ■ SPECTRUM ANALYZER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26BE0051-H0 - F1

Applicant : ALPS ELECTRIC CO., LTD.
 Kind of Equipment : Label Printer
 Model No. : CDPR22
 Serial No. : #10
 Power : AC120V/60Hz
 Mode : Transmitting/Receiving Hopping
 Remarks : AV RBW:1MHz, VBW:10Hz
 Date : 5/10/2006
 Test Distance : 3 m
 Temperature : 22 °C
 Humidity : 60 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	2390.00	BB	32.8	32.8	28.7	36.8	4.0	9.9	38.6	38.6	54.0	15.4	15.4
2.	2483.50	BB	34.9	34.7	28.8	36.8	4.0	9.9	40.8	40.6	54.0	13.2	13.4
3.	4927.57	BB	39.3	38.6	33.2	37.3	5.8	0.4	41.4	40.7	54.0	12.6	13.3
4.	7287.45	BB	33.3	35.6	36.6	37.0	6.6	0.5	40.0	42.3	54.0	14.0	11.7
5.	9740.73	BB	31.1	32.1	38.4	37.0	7.6	0.9	41.0	42.0	54.0	13.0	12.0
6.	12245.00	BB	30.9	30.9	40.5	35.7	8.8	0.5	45.0	45.0	54.0	9.0	9.0
7.	14694.00	BB	31.5	31.5	42.8	34.3	9.3	0.7	50.0	50.0	54.0	4.0	4.0
8.	17143.00	BB	30.1	30.9	43.5	34.1	9.7	0.4	49.6	50.4	54.0	4.4	3.6
9.	19592.00	BB	31.3	31.3	40.9	34.3	10.3	0.0	48.2	48.2	54.0	5.8	5.8
10.	22041.00	BB	31.4	31.9	40.8	33.7	11.1	0.0	49.6	50.1	54.0	4.4	3.9
11.	24490.00	BB	32.8	32.8	40.7	33.0	11.5	0.0	52.0	52.0	54.0	2.0	2.0

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz/KHA-03 (3160-09) 18-26GHz

■ CABLE: KCC-D3/D7 ■ PREAMP: KAF-02 (8447B) ■ SPECTRUM ANALYZER: KTR-01 (ES140)


Page:

Occupied Bandwidth(99%)


COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : RSS-210
DATE : 2006/01/17
TEMP/HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura


1. ch : 2427MHz/Occupied Bandwidth:1528.06kHz

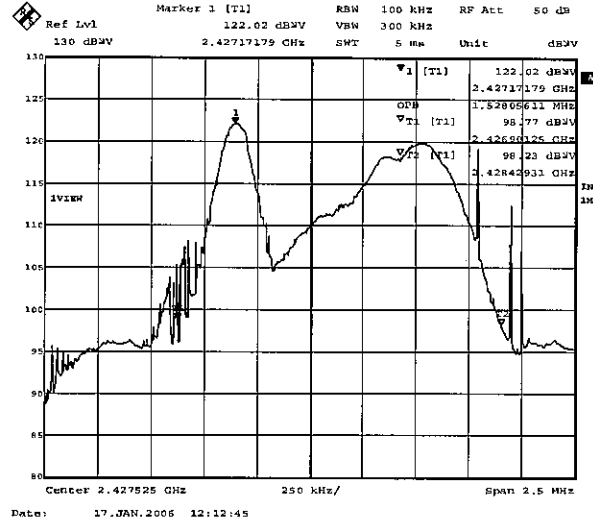

2. ch : 2449MHz/Occupied Bandwidth:1387.78kHz

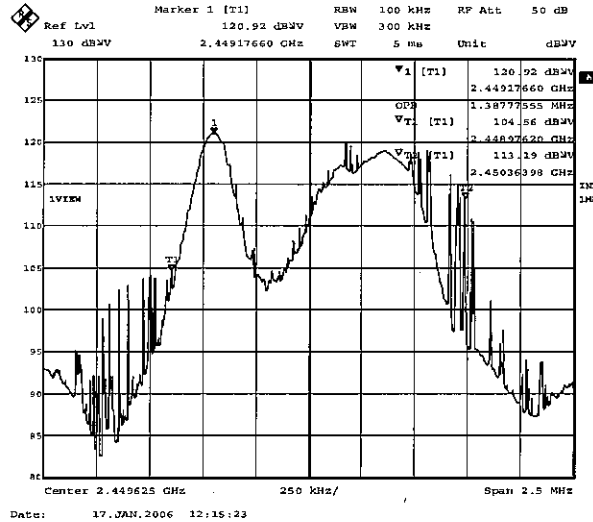

3. ch : 2469MHz/Occupied Bandwidth:1342.69kHz

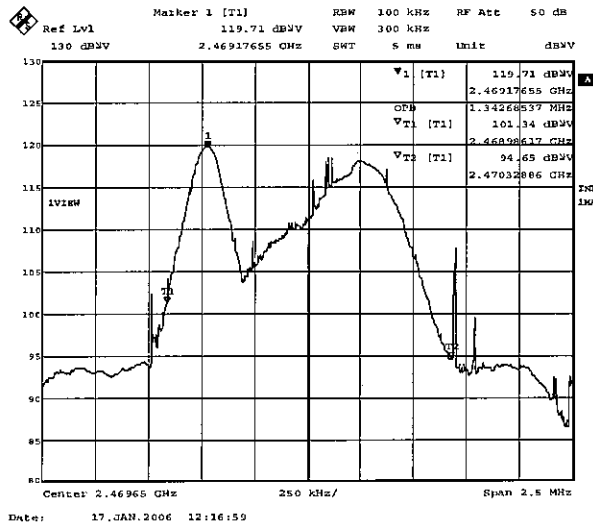


Occupied Bandwidth(99%)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Label Printer
MODEL NUMBER: CDPR22
SERIAL NUMBER: #4
FCC ID : QT5-CDPR22
POWER : AC120V/60Hz

UL Apex Co.,Ltd. Yamakita No.4 Shielded Room
REPORT NO : 26BE0051-HO-F1
REGULATION : RSS-210
DATE : 2006/01/17
TEMP./HUMI : 20°C/38%
TEST MODE : Transmitting/Receiving
ENGINEER : Toyokazu Imamura

4. Hopping/Occupied Bandwidth:43.09MHz

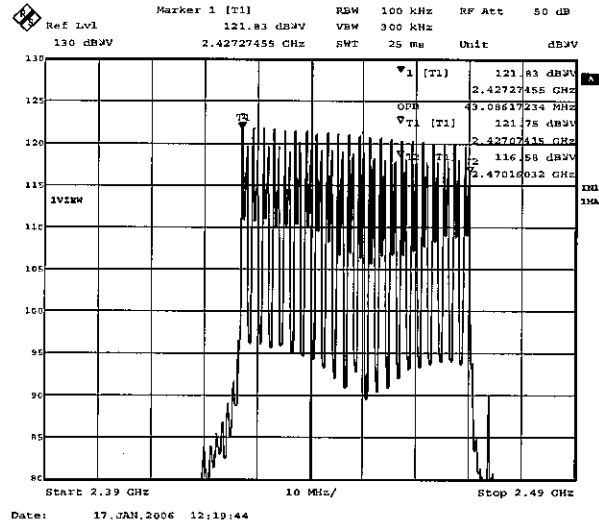

APPENDIX 3 Test Instruments

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
KAEC-01(NS A)	Anechoic Chamber	JSE	Semi 3m	RE	2005/09/03 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE	2005/04/28 * 12 2006/04/24 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE	2005/05/11 * 12
KAT10-S1	Attenuator	Agilent	8449D 010	RE	2005/04/12 * 12 2006/04/11 * 12
KAT6-01	Attenuator	INMET	18N-6dB	RE	2005/04/07 * 12 2006/03/24 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2005/01/29 * 12
KCC-24/25/26/ 28/KPL-02	Coaxial Cable/Pulse Limiter	Fujikura/Suhner/PMM	5D-2W/5D-2W/S04 272B/S04272B/PL0 1	CE	2005/09/02 * 12
KCC-30/31/32/ 34	Coaxial Cable	Fujikura/Suhner	5D-2W/S04272B	RE	2005/12/22 * 12
KCC-D3/D7	Coaxial Cable	Rosenberger/Advantest	2201/JUN-08-01-06 1	RE	2005/04/12 * 12 2006/04/11 * 12
KFL-01	Highpass Filter	Hewlett Packard	84300 80038	RE	2005/04/12 * 12 2006/04/11 * 12
KHA-02	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2005/10/15 * 12
KHA-04	Horn Antenna	EMCO	3160-09	RE	2005/05/14 * 12
KLS-05	LISN(AMN)	Schwarzbeck	NSLK8126	CE (EUT)	2005/09/06 * 12
KLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	CE	2005/09/06 * 12
KPM-05	Power meter	Agilent	E4417A	AT 5	2005/03/02 * 12
KPSS-01	Power sensor	Agilent	E9327A	AT 5	2005/03/04 * 12
KSA-02	Spectrum Analyzer	Advantest	R3265A	CE	2005/11/10 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE	2005/09/13 * 12
KTM-06	Terminator	TME	CT-01BP	CE	2005/04/07 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE/AT 1-4,6	2005/08/05 * 12
KTR-03	Test Receiver	Rohde & Schwarz	ESHS10	CE	2005/05/11 * 12
KCC-D16	Coaxial Cable	INSULATED WIRE INC	KPS-1501-200-KPS	AT 1-6	2005/09/02 * 12
KST-09	Digitizing Oscilloscope	Tektronix	TDS420A	AT 4	2005/08/31 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

CE: Conducted Emission

RE: Out of Band Emission (Radiated)

1 30-1000MHz

2 1-26.5GHz

3 Hopping (30-1000MHz, 1-26.5GHz)

AT: Antenna Terminal Conducted test

1 Carrier Frequency Separation

2 20dB Bandwidth

3 Number of Hopping Frequency

4 Dwell time

5 Maximum Peak Output Power

6 Out of Band Emission (Conducted)

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(01.06.05)