

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD TV Monitor
MODEL/TYPE NO : LN150X
FCC ID : QTHLN151X
APPLICANT : T3 Digital Co., Ltd.
3rd Fl, Sungwon bld, 651 Daerim-3Dong, Youngdungpo-Gu,
Seoul, Korea
Attn. : Woo-Jin, Oh / Executive Director.

FCC CLASSIFICATION : Class B personal computers and peripherals
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : T3 Digital
TEST REPORT No. : E03.0522.FCC.284N
DATES OF TEST : May 20~22, 2003
DATES OF ISSUE : May 22, 2003
TEST LABORATORY : ETL Inc (FCC Registration Number : 95422)
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyunggi-do,
469-880, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This LCD TV Monitor, Model LN150X has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complies with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B Class B personal computers and peripherals.

I attest to the accuracy of data. All measurements herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product / system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yo Han, Park

Name : Yo Han, Park

Title : Chief Engineer & Lab.Manager

E-RAE Testing Laboratory Inc.
#584 Sangwhal-ri, Kanam-myon, Yaju-kun,
Kyunggi-do, 469-880, Korea

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

- Appendix A. FCC Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User' s Manual**

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : T3 Digital Co., Ltd.

Address : 3rd Fl, Sungwon bld, 651 Daerim-3Dong, Youngdungpo-Gu,
Seoul, Korea

Attention : Woo-Jin, Kim / Executive Director.

- **EUT Type** : LCD TV Monitor
- **Model Number** : LN150X
- **FCC Identifier** : QTHLN151X
- **S/N** : N/A
- **FCC Rule Part(s)** : FCC Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-1992
- **FCC Classification** : Class B computers and peripherals
- **Dates of Tests** : May 20~22, 2003
- **Place of Tests** : ETL Inc
EMC Testing Lab (FCC Registration Number : 95422)
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E03.0522.FCC.284N



1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyounggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meters site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission (Registration Number: 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the T3 Digital Co., Ltd. Model: LN150X

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the T3 Digital Co., Ltd. LCD TV Monitor, LN150X
Please refer to Users manual

2.2 General Specification

- Chassis Type : Plastic
- List of Each OSC. Or X-Tal. Freq. (≥ 1 MHz) : X-Tal – 14.31818MHz, 24.576MHz, 12.00MHz
- Chipset Brand & Part No. : ANALOG DEVICES / 1138481, Weltrend / J791D

- Horizontal Frequency : 30~60 Hz (Auto Set)
- Vertical Frequency : 56~75 Hz (Auto Set)
- Displayable colour : 16.7M Colour
- Input Signal : Analog 0.7Vpp Positive (75 Ω)
- Video Signal : NTSC
- Audio Signal : MONO/STEREO
- Separate Sync Signal : TTL LEVEL POSITIVE OR NEGATIVE
- Temperature : -20 ~ 40
- Humidity : 10 ~ 95%
- Power : Flow 100-240V, 60/50 Hz, DC 12V/3A

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 Ω /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from the another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determine the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

Operating Mode	The worst operating condition
640 x 480 75Hz Full "H" Pattern Display)	
800 x 600 75Hz Full "H" Pattern Display	
1024 x 768 75Hz Full "H" Pattern Display	O
1280 x 720M 75Hz Full "H" Pattern Display	
TV Receiving Mode	
Composite Video Input Mode	

O: Worst case investigated during the Test.

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – LCD TV Monitor (T3 Digital)

FCC ID : QTHLN151X
Model Name : LN150X
Serial No. : N/A
Manufacturer : T3 Digital Co., Ltd.
Power Supply Type : DC 12V 3.75A from the AC/DC Adapter
Power Cord : Non-Shielded, Detachable, 1.2m
Data Cable : 1.5m Unshielded A/V RCA cable, 1.2m Shielded 15pin D-sub Cable
1.5m Shielded S-VHS Cable.

Support Unit 1-Persnal computer (DELL)

FCC ID : N/A (DoC)
Model Name : X2004
Serial No. : H9MB71S
Manufacturer : DELL
Power Supply Type : Switching
Power Cord : Non-shielded, Detachable: 1.2m
Data Cable : Shielded, Detachable:1.5m



Support Unit 2-Keyboards (DELL)

FCC ID : N/A (DoC)
Model Name : SK-8000
Serial No. : 2965
Manufacturer : DELL
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.5m

Support Unit 3-Mouse (LOGITECH)

FCC ID : DZL211029
Model Name : M-S34
Serial No. : LZC01002314
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : None-Shielded, 1.2m

Support Unit 4- EAR- MIC (JETECH)

FCC ID : N/A
Model Name : JE101
Serial No. : N/A
Manufacturer : JETECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.5m

Support Unit 5- USB Mouse (PENDING)

FCC ID : N/A
Model Name : HL898W
Serial No. : HL08011837
Manufacturer : PENDING
Power Supply Type : N/A
Power Cord : N/A
Data Cable : None-Shielded, 1.2m

Support Unit 6- Printer (EPSON)

FCC ID : N/A
Model Name : STYLUS PHOTO 750
Serial No. : BRL0005620
Manufacturer : SEIKO EPSON CORP.
Power Supply Type : Switching
Power Cord : Non-Shield, 1.5m
Data Cable : Shielded, 1.5m



FCC ID : QTHLN151X
Report No: E03.0522.FCC.284N
Date of Issue: May 22, 2003

Support Unit 8- DVD PLAYER (AlphaCast)

FCC ID	: N/A
Model Name	: DVDP-M100
Serial No.	: N/A
Manufacturer	: AlphaCast
Power Supply Type	: DC 12V From Adaptor
Power Cord	: Non-Shield, 1.5m
Data Cable	: Shielded, 1.5m

Support Unit 9- AC Adapter (Samsung)

FCC ID	: N/A
Model Name	: AD-4512L
Serial No.	: N/A
Manufacturer	: Samsung
Power Supply Type	: Switching
AC Power Cord	: Non-Shield, 1.5m
DC Power Cable	: Shielded, 1.5m

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107(e)	Conducted Emissions Measurement	Passed by -16.42dB
15.109(g)	Radiated Emissions Measurement	Passed by -3.60dB

The data collected shows that the **T3 Digital Co., Ltd. LCD TV Monitor, LN150X** complies with technical requirements of above rules part 15.107(e) and 15.109(g) CISPR 22 Class B Limits

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	LCD TV Monitor / LN150X (S/N:NONE)
Limit apply to	FCC Part 15 Subpart B (15.109(g): CISPR 22 CLASS B)
Test Date	May 22, 2003
Operating Condition	1024 x 768 75Hz Full "H" Pattern Display
Environment Condition	Humidity Level : 45%RH, Temperature : 21
Result	Passed by -16.42dB

Conducted Emission Test Data


The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth : 9 KHz)

Frequency [MHz]	Reading [dB μ V]		Phase (*H/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Peak	Average
0.212	46.79	-	N	63.21	-	16.42	-
0.315	37.30	-	N	59.84	-	22.54	-
0.845	35.41	-	N	56.00	-	20.59	-
0.952	33.20	-	N			22.80	-
2.960	30.59	-	N			25.41	-
6.768	34.57	-	H	60.00	-	25.43	-
10.68	37.99	-	N			22.01	-
12.58	39.20	-	N			20.80	-
13.42	36.65	-	H			23.35	-
14.58	35.31	-	H			24.69	-

NOTES :

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit - Reading
3. Measurement were performed at the AC/DC Power Inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15 subpart B (15.107 (e): CISPR 22 CLASS B)



Test Engineer: H. J. Kim

5. TEST RESULTS

Line: NETURAL Line

ETL EMC Laboratory Conducted Emission Test Result

EUT:

Manuf: T3Digital
Op Cond:
Operator: Ho Jin, Kim
Test Spec: EN 55022 Class B
Comment: HOT


Result File: h150xh.dat : H-Panel

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	1000kHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB
1000kHz	5MHz	20kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
5MHz	30MHz	20kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	150kHz	30MHz	Factor

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Peaks: 25
Acc Margin: 20 dB

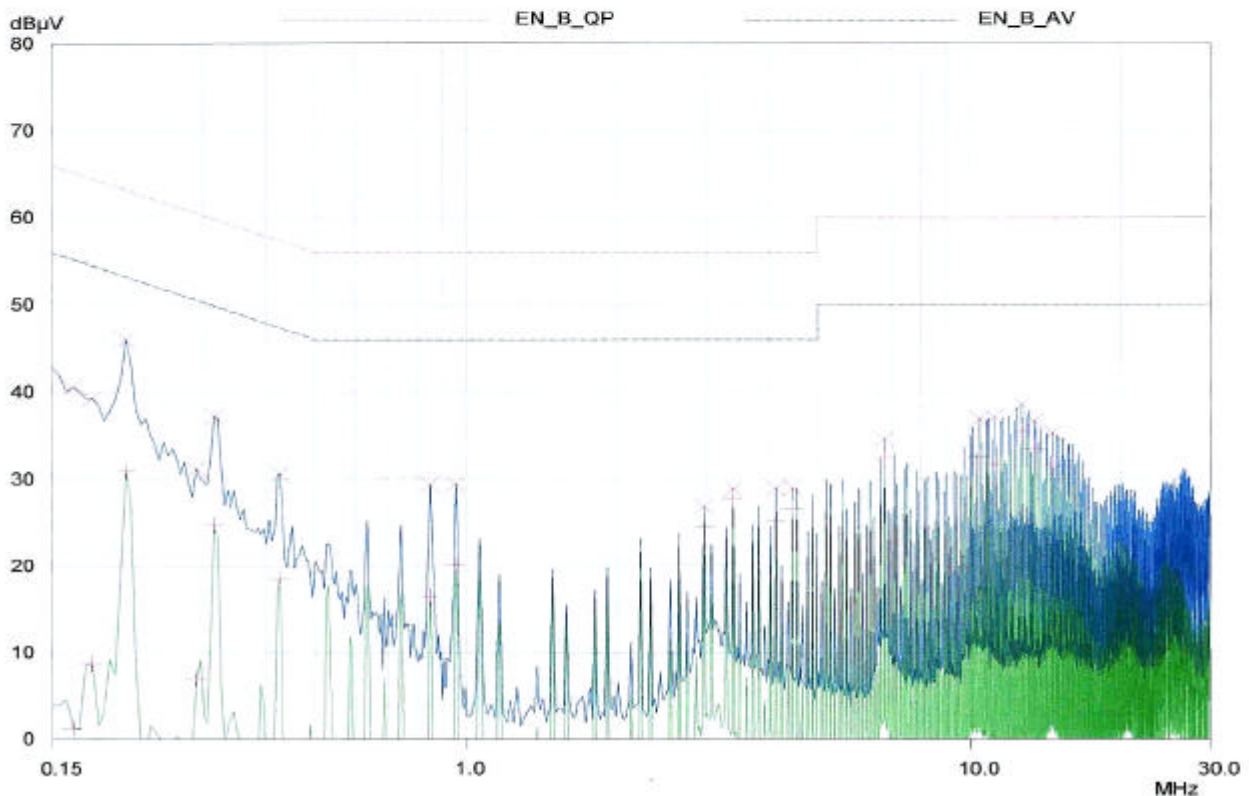

5. TEST RESULTS

Line: HOT Line

ETL EMC Laboratory Conducted Emission Test Result

EUT:
Manuf: T3Digital
Op Cond:
Operator: Ho Jin, Kim
Test Spec: EN 55022 Class B
Comment: NEUTRAL

Result File: h150xn.dat : H-Panel


Scan Settings (3 Ranges)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	1000kHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB
1000kHz	5MHz	20kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
5MHz	30MHz	20kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Receiver Settings

Transducer	No.	Start	Stop	Name
	1	150kHz	30MHz	Factor

Prescan Measurement: Detectors: X PK / + AV
Meas Time: see scan settings
Peaks: 25
Acc Margin: 20 dB

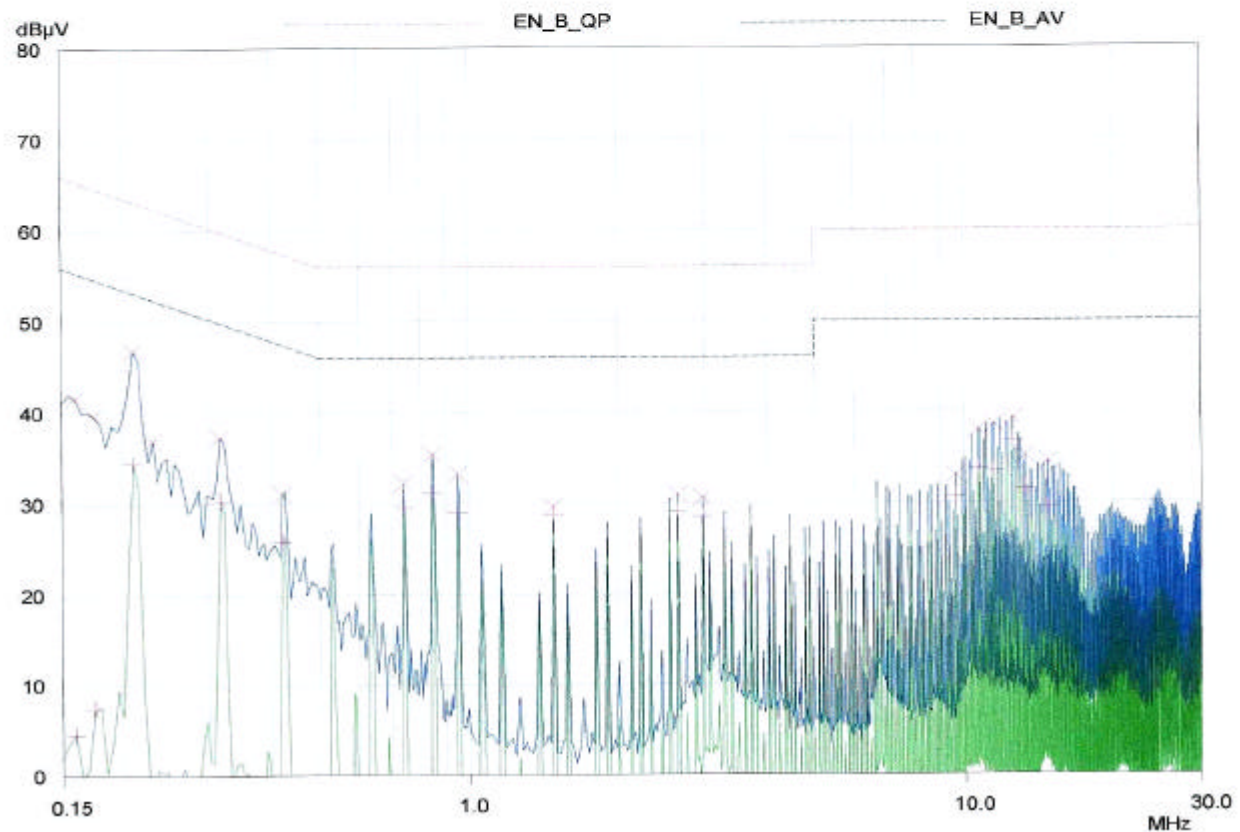

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	LCD TV Monitor / LN150X (S/N:NONE)
Limit apply to	FCC Part 15 Subpart B (15.109(g): CISPR 22 CLASS B)
Test Date	May 22, 2003
Operating Condition	1024 x 768 75Hz Full "H" Pattern Display
Environment Condition	Humidity Level : 45%RH, Temperature : 19
Result	Passed by -3.60dB

Radiated Emission Test Data


The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
79.28	15.56	V	8.64	2.20	26.40	30.0	3.60
110.33	9.13	V	10.37	2.60	22.10	30.0	7.90
123.83	10.05	V	11.25	2.80	24.10	30.0	5.90
130.58	8.13	V	11.87	2.80	22.80	30.0	7.20
185.93	8.49	V	10.81	3.70	23.00	30.0	7.00
206.85	10.68	H	8.82	3.90	23.40	30.0	6.60
237.90	17.53	H	10.27	4.00	31.80	37.0	5.20
275.70	13.20	V	12.00	4.40	29.60	37.0	7.40
394.50	12.58	V	14.32	5.30	32.20	37.0	4.80

NOTES :

- * H : Horizontal polarization , ** V : Vertical polarization
- Emission Level = Reading + Antenna factor + Cable loss
- Margin value = Limit - Emission Level
- The measurement was performed for the frequency range 30MHz ~ 1000MHz at a distance of 10m according to the FCC Part 15 subpart B (15.109(g): CISPR 22 CLASS B)



Test Engineer : H. J. Kim

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$\text{dB}(\mu\text{V}/\text{m}) = 20 \log_{10} (\mu\text{V} / \text{m}) : \text{Equation 1}$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107 : \text{Equation 2}$$

Example 1 : @ 0.212MHz

Class B Limit	=	1447.10 μV	=	63.21dB μV
Reading	=	46.79dB μV		
Convert to μV	=	218.52 μV		
Margin	=	46.79– 63.21	=	-16.42 dB μV
	=	-16.42 dB μV		below Limit

Example 2 : @ 79.28 MHz

Class B Limit	=	31.6 μV	=	30.0 dB μV
Reading	=	15.56 dB μV		
Antenna Factor + Cable Loss	=	8.64 dB μV	+ 2.20 dB μV	
Total	=	26.4 dB μV		
Margin	=	26.4 – 30.0	=	-3.60 dB μV
	=	-3.60 dB μV		below Limit

7. TEST EQUIPMENT LIST

List of Test Equipments Used for Measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Due Date
☒	Spectrum Analyzer	E7402A	H.P	US39110107	04-05-18
☒	Receiver	ESVS 10	R & S	835165/001	04-03-22
☒	EMI TEST Receiver	ESHS30	Rohde & Schwarz	0401901/002	04-03-19
☐	Preamplifier	HP 8347A	HP	2834A00544	04-03-19
☒	LISN	3825/2	EMCO	9006-1669	03-12-27
☒	LISN	3825/2	EMCO	9208-1995	03-12-27
☒	TriLog Antenna	VULB9160	Schwarz Beck	3082	03-06-19
☐	LogBicon	VULB9165	Schwarz Beck	2023	04-05-08
☐	Dipole Antenna	VHAP	Schwarz Beck	964	04-05-03
☐	Dipole Antenna	VHAP	Schwarz Beck	965	04-05-03
☐	Dipole Antenna	UHAP	Schwarz Beck	949	04-05-03
☐	Dipole Antenna	UHAP	Schwarz Beck	950	04-05-03
☐	Double Ridged Horn	3115	EMCO	9809-2334	03-09-20
☒	Turn-Table	DETT-03	Daeil EMC	-	N/A
☒	Antenna Master	DEAM-03	Daeil EMC	-	N/A
☐	Plotter	7440A	H.P	2725A 75722	N/A
☒	Chamber	DTEC01	DAETONG	-	N/A
☐	Impedance Matching Pad	6001.01.A	SUNNER	3252	04-04-24
☐	Thermo Hygrograph	3-3122	ISUZU	3312201	03-12-20
☐	BaroMeter	-	Regulus	-	-