TCC
Nokia

FINAS
Finnish Accreditation Service
T117 (EN ISO/IEC 17025)

SAR Compliance Test Report

Test report no.:	Cph_SAR_0612_03	**Date of report:**	2006-03-23
Template version:	5	**Number of pages:**	35
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaj DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01	**Client:**	Nokia Danmark A/S Frederikskaj DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01
Responsible test engineer:	Jesper Nielsen	**Product contact person:**	Ernest Mayer
Measurements made by:	Leif Klysner / Jesper Nielsen		

Tested device:	RM-145		
FCC ID:	QTKRM-145	**IC:**	661AD-RM145

Supplement reports:	-
Testing has been carried out in accordance with:	**47CFR §2.1093** Radiofrequency Radiation Exposure Evaluation: Portable Devices **FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields **RSS-102** Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields **IEEE 1528 - 2003** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.
Test results:	**The tested device complies with the requirements in respect of all parameters subject to the test.** The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.

Date and signatures:

For the contents:

Leif Funch Klysner
Test System Manager

Digitally signed by Leif Funch Klysner
DN: cn=Leif Funch Klysner, c=DK, o=Radio Spectrum, ou=CertT, email=leif.klysner@nokia.com
Reason: I am approving this document
Date: 2006.03.28 10:38:46 +02'00'

Copyright © 2006 Copenhagen

CONTENTS

1. SUMMARY OF SAR TEST REPORT 3

1.1 TEST DETAILS 3
1.2 MAXIMUM RESULTS 3
1.2.1 Head Configuration 3
1.2.2 Body Worn Configuration 3
1.2.3 Maximum Drift 4
1.2.4 Measurement Uncertainty 4

2. DESCRIPTION OF THE DEVICE UNDER TEST 5

2.1 PICTURE OF THE DEVICE 5
2.2 DESCRIPTION OF THE ANTENNA 5

3. TEST CONDITIONS 6

3.1 TEMPERATURE AND HUMIDITY 6
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER 6

4. DESCRIPTION OF THE TEST EQUIPMENT 6

4.1 MEASUREMENT SYSTEM AND COMPONENTS 6
4.1.1 Isotropic E-field Probe Type ET3DV6 8
4.2 PHANTOMS 8
4.3 TISSUE SIMULANTS 9
4.3.1 Tissue Simulant Recipes 9
4.3.2 System Checking 9
4.3.3 Tissue Simulants used in the Measurements 10

5. DESCRIPTION OF THE TEST PROCEDURE 11

5.1 DEVICE HOLDER 11
5.2 TEST POSITIONS 11
5.2.1 Against Phantom Head 11
5.2.2 Body Worn Configuration 12
5.3 SCAN PROCEDURES 13
5.4 SAR AVERAGING METHODS 13

6. MEASUREMENT UNCERTAINTY 14

7. RESULTS 15

APPENDIX A: SYSTEM CHECKING SCANS 17

APPENDIX B: MEASUREMENT SCANS 20

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS 34

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS 35

Copyright © 2006 Copenhagen

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2006-03-16 to 2006-03-22
SN, HW and SW numbers of tested device	IMEI: 004400/75/173950/7 HW: 0415b SW: 03.12 DUT#28189
Batteries used in testing	BP-6M DUT#28187, 28188
Headsets used in testing	HS-6 DUT#28715
Other accessories used in testing	SD card DUT#28487
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / *f* (MHz)	Radiated power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM1900	512 / 1850.2	28.5 dBm EIRP	Right, Tilt	0.54 W/kg	**0.61 W/kg**	1.6 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / *f* (MHz)	Radiated power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
GSM1900	661 / 1880.0	28.5 dBm EIRP	2.2 cm	0.30 W/kg	**0.34 W/kg**	1.6 W/kg	PASSED

*SAR values are scaled up by 12% to cover measurement drift.

Copyright © 2006 Copenhagen

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	-0.22 dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%

Copyright © 2006 Copenhagen

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes and Bands of Operation	GSM 1900	GPRS 1900	EGPRS 1900	BT
Modulation Mode	GMSK	GMSK	GMSK / 8PSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850 - 1910	1850 - 1910	1850 - 1910	2402-2480

Outside of USA and Canada, the transmitter of the device is capable of operating also in 900/1800/2100 bands, which are not part of this filing.

This device has Push to Talk capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was evaluated against the head profile of the phantom.

2.1 Picture of the Device

2.2 Description of the Antenna

The device has an internal patch antenna.

Copyright © 2006 Copenhagen

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 to 21.5
Ambient humidity (RH %):	35 to 55

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the‘advanced extrapolation’ algorithm.

Copyright © 2006 Copenhagen

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 3	339	12 months	2006-08
E-field Probe ET3DV6	1813	12 months	2006-09
Dipole Validation Kit, D1900V2	5d063	24 months	2007-09
DASY4 software	Version 4.6	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SME06	848650/011	36 months	2008-07
Amplifier	ZHL-42W	E012903	-	-
Power Meter	NRVD	840297/008	24 months	2007-11
Power Sensor	NRV-Z51	100184	24 months	2007-11
Call Tester	CMU200	836203/022	-	-
Call Tester	4400M	0411216	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	2006-08
Dielectric Probe Kit	HP85070B	US33020403	-	-

Copyright © 2006 Copenhagen

4.1.1 Isotropic E-field Probe Type ET3DV6

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 27 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checking and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

Copyright © 2006 Copenhagen

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within ± 5% of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipes were used for Head and Body tissue simulants:

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ε_r	σ [S/m]	
1900	Reference result	10.3	38.6	1.48	
	± 10% window	9.3 - 11.3			
	2006-03-22	9.86	38.7	1.47	21.5

Copyright © 2006 Copenhagen

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ε_r	σ [S/m]	
	Reference result	10.5	53.0	1.53	
	± 10% window	9.4 - 11.6			
1900	2006-03-16	10.1	52.0	1.50	21.4

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ε_r	σ [S/m]	
	Recommended value	40.0	1.40	
	± 5% window	38.0 – 42.0	1.33 – 1.47	
1880	2006-03-22	38.8	1.45	21.5

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ε_r	σ [S/m]	
	Recommended value	53.3	1.52	
	± 5% window	50.6 – 56.0	1.44 – 1.60	
1880	2006-03-16	52.0	1.48	21.4

Copyright © 2006 Copenhagen

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.

Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.

Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate

Copyright © 2006 Copenhagen

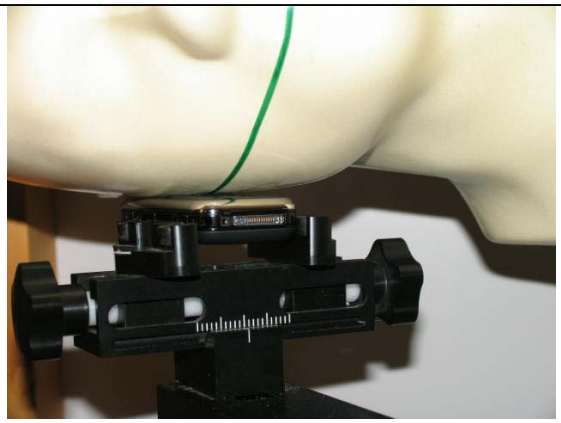

Photo of the device in “cheek” position

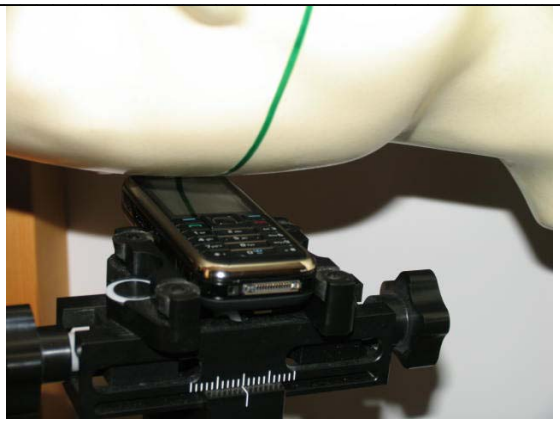

Photo of the device in “tilt” position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

Photo of the device positioned for Body SAR measurement.
The spacer was removed for the tests.

Copyright © 2006 Copenhagen

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

Copyright © 2006 Copenhagen

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i . u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			**±12.9**	116
Coverage Factor for 95%			**k=2**				
Expanded Uncertainty						**±25.8**	

Copyright © 2006 Copenhagen

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

1900 MHz Head SAR results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
2-slot GPRS	**Power**		**28.5 dBm**	**28.2 dBm**	**27.1 dBm**
Without SD card	Left	Cheek	-	0.291	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
GSM	**Power**		**28.5 dBm**	**28.5 dBm**	**30.1 dBm**
Without SD card	Left	Cheek	-	0.309	-
		Tilt	-	0.503	-
	Right	Cheek	-	0.374	-
		Tilt	**0.526**	0.519	0.479
2-slot 8PSK EGPRS	**Power**		**24.7 dBm**	**27.4 dBm**	**25.0 dBm**
Without SD card	Left	Cheek	-	-	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	0.309	-	-
GSM With SD card	Right Tilt position		**0.537**	-	-
GSM With SD card	Right Tilt position BT active		**0.538**	-	-

Copyright © 2006 Copenhagen

The measured Body SAR values for the test device are tabulated below:

1900 MHz Body SAR results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	**Power**	**28.5 dBm**	**28.5 dBm**	**30.1 dBm**
Without SD card	Without headset	0.256	**0.294**	0.270
	Headset HS-6	0.245	0.269	0.256
2-slot GPRS	**Power**	**28.5 dBm**	**28.2 dBm**	**27.1 dBm**
Without SD card	Without headset	-	0.291	-
	Headset HS-6	-	-	-
GSM With SD card	Without headset	-	0.294	-
GSM Without SD card	Without headset BT active	-	**0.295**	-

Plots of the Measurement scans are given in Appendix B.

Copyright © 2006 Copenhagen

APPENDIX A: SYSTEM CHECKING SCANS

See the following pages.

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 09:44:28

Test Laboratory: TCC Copenhagen
Type: D1900V2; Serial: 5d063

Communication System: Continuous Wave
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used: f = 1900 MHz; σ = 1.47 mho/m; εr = 38.7; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.3 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.2 V/m; Power Drift = 0.050 dB
Peak SAR (extrapolated) = 17.1 W/kg
SAR(1 g) = 9.86 mW/g; SAR(10 g) = 5.17 mW/g
Maximum value of SAR (measured) = 11.3 mW/g

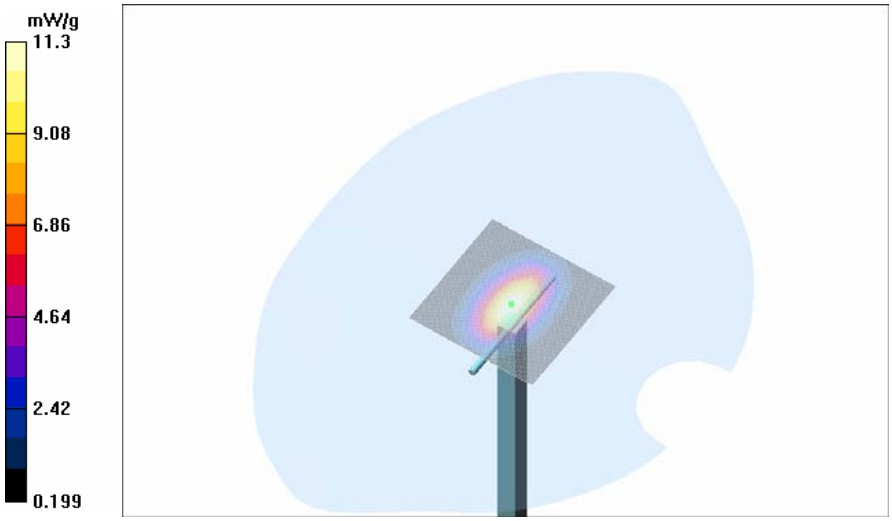

Copyright © 2006 Copenhagen

Date/Time: 2006-03-16 15:29:49

Test Laboratory: TCC Copenhagen
Type: D1900V2; Serial: 5d063

Communication System: Continuous Wave
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.4 C
Medium parameters used: f = 1900 MHz; σ = 1.5 mho/m; εr = 52; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.36, 4.36, 4.36); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 91.6 V/m; Power Drift = 0.017 dB
Peak SAR (extrapolated) = 17.4 W/kg
SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.4 mW/g
Maximum value of SAR (measured) = 11.5 mW/g

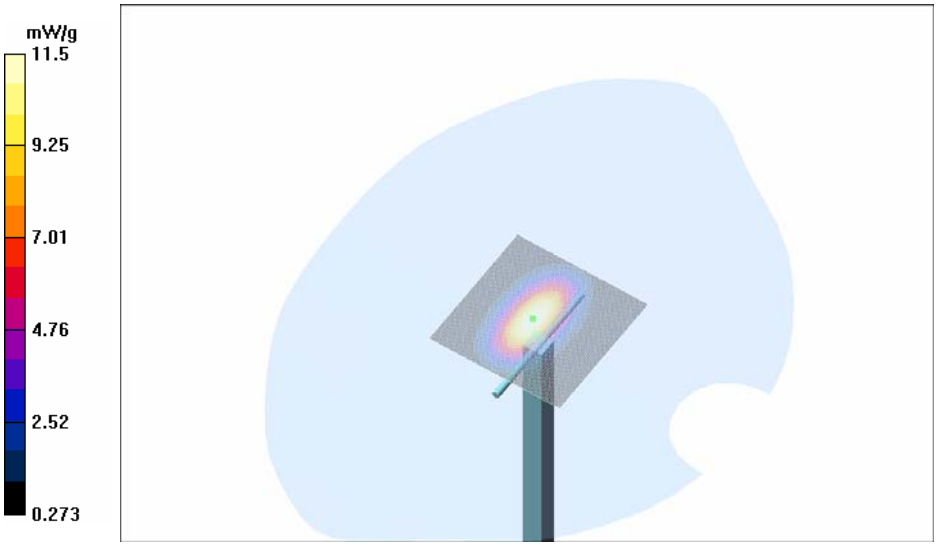

Copyright © 2006 Copenhagen

APPENDIX B: MEASUREMENT SCANS

SEE THE FOLLOWING PAGES

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 14:25:55

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: 2-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; εr = 38.8; ρ = 1000 kg/m3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.330 mW/g

Cheek position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.6 V/m; Power Drift = -0.088 dB
Peak SAR (extrapolated) = 0.464 W/kg
SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.170 mW/g
Maximum value of SAR (measured) = 0.332 mW/g

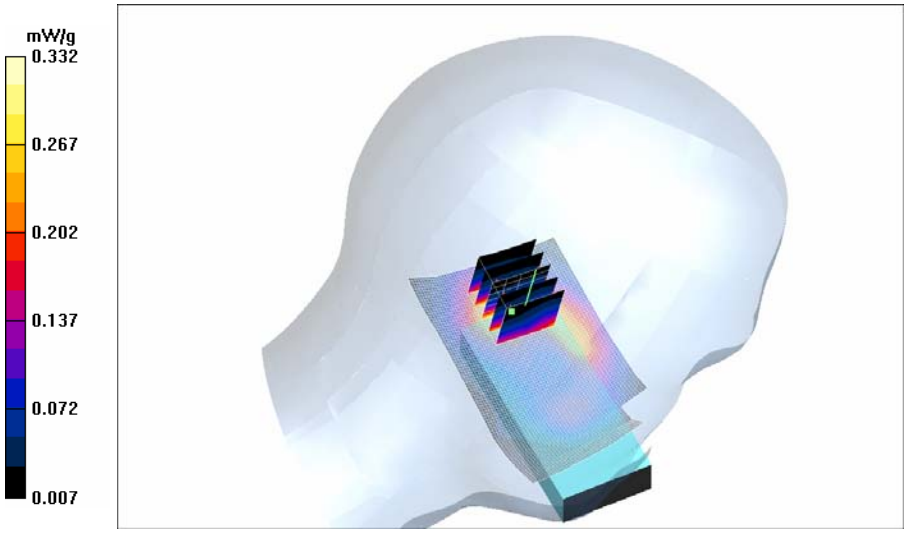

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 17:16:33

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; εr = 38.8; ρ = 1000 kg/m3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle /Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.356 mW/g

Cheek position - Middle /Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.2 V/m; Power Drift = 0.031 dB
Peak SAR (extrapolated) = 0.511 W/kg
SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.179 mW/g
Maximum value of SAR (measured) = 0.345 mW/g

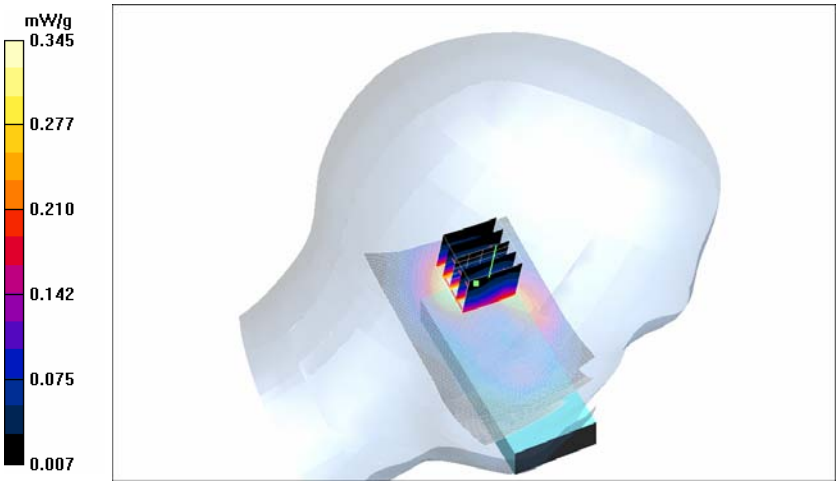

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 17:41:41

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; εr = 38.8; ρ = 1000 kg/m3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Middle/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.578 mW/g

Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 20.7 V/m; Power Drift = 0.022 dB
Peak SAR (extrapolated) = 0.858 W/kg
SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.276 mW/g
Maximum value of SAR (measured) = 0.562 mW/g

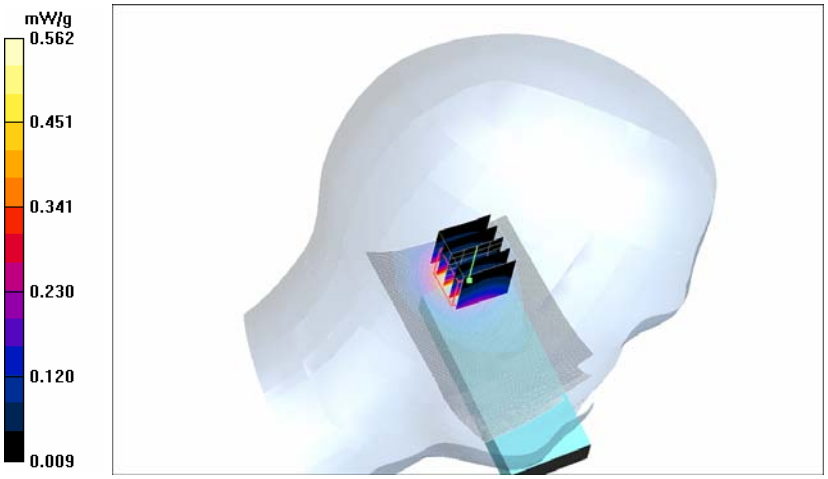

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 18:06:16

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; εr = 38.8; ρ = 1000 kg/m3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Cheek position - Middle/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.411 mW/g

Cheek position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.1 V/m; Power Drift = -0.035 dB
Peak SAR (extrapolated) = 0.672 W/kg
SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.203 mW/g
Maximum value of SAR (measured) = 0.422 mW/g

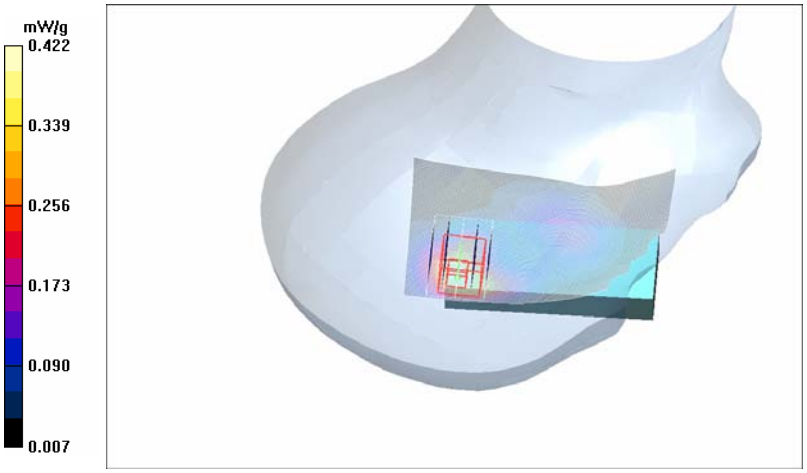

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 18:46:52

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.42 mho/m; εr = 38.9; ρ = 1000 kg/m3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.601 mW/g

Tilt position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.0 V/m; Power Drift = -0.033 dB
Peak SAR (extrapolated) = 0.913 W/kg
SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.285 mW/g
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.597 mW/g

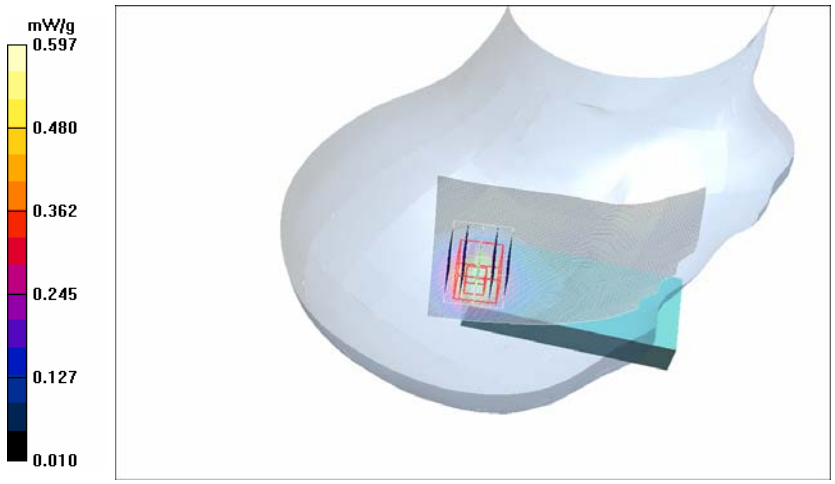

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 20:36:48

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: 2-slot EGPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.42 mho/m; εr = 38.9; ρ = 1000 kg/m3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.357 mW/g

Tilt position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.5 V/m; Power Drift = -0.218 dB
Peak SAR (extrapolated) = 0.528 W/kg
SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.170 mW/g
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.347 mW/g

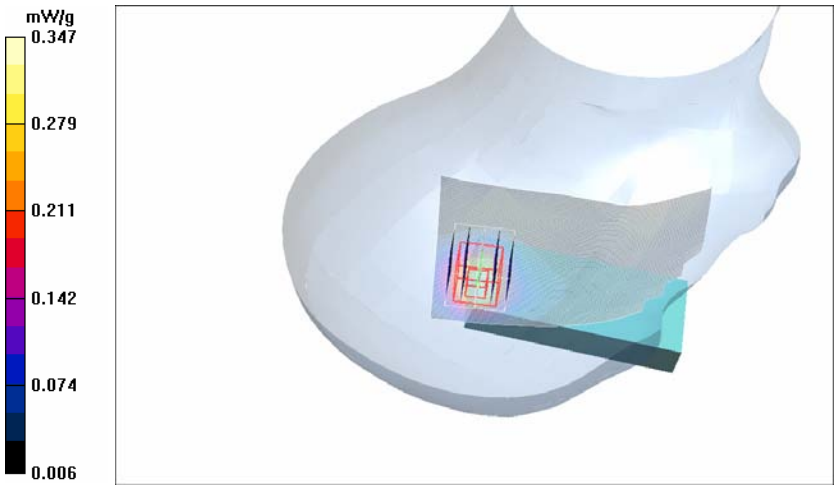

Copyright © 2006 Copenhagen

Date/Time: 2006-03-22 19:45:19

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: Head 1900; Medium Notes: Medium Temperature: t=21.5 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.42 mho/m; εr = 38.9; ρ = 1000 kg/m3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.89, 4.89, 4.89); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 1; Type: Twin Phantom; Serial: TP-1215
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low - SD card - BT active/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.618 mW/g

Tilt position - Low - SD card - BT active/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 17.7 V/m; Power Drift = -0.002 dB
Peak SAR (extrapolated) = 0.939 W/kg
SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.293 mW/g
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.611 mW/g

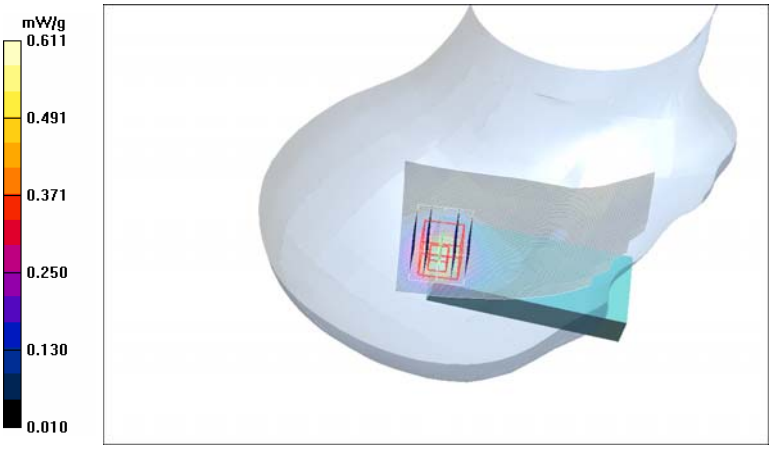

Copyright © 2006 Copenhagen

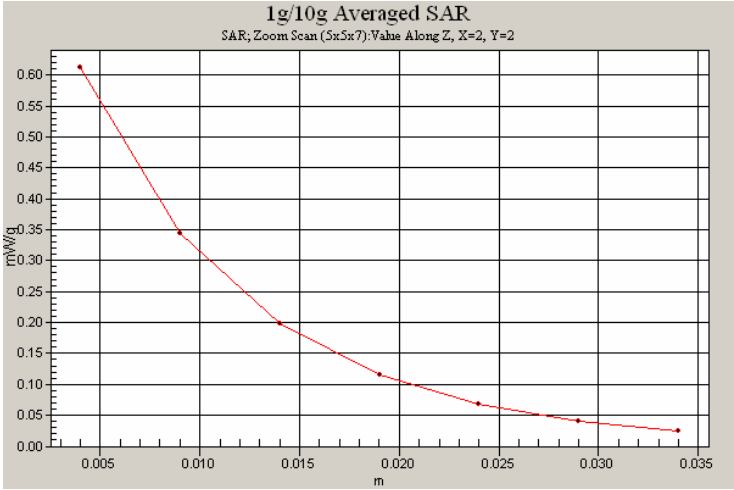

Copyright © 2006 Copenhagen

Date/Time: 2006-03-16 19:32:07

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.4 C
Medium parameters used: f = 1880 MHz; σ = 1.48 mho/m; εr = 52; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.36, 4.36, 4.36); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body - Middle - No Accessory/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.324 mW/g

Body - Middle - No Accessory/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.2 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 0.432 W/kg
SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.181 mW/g
Maximum value of SAR (measured) = 0.320 mW/g

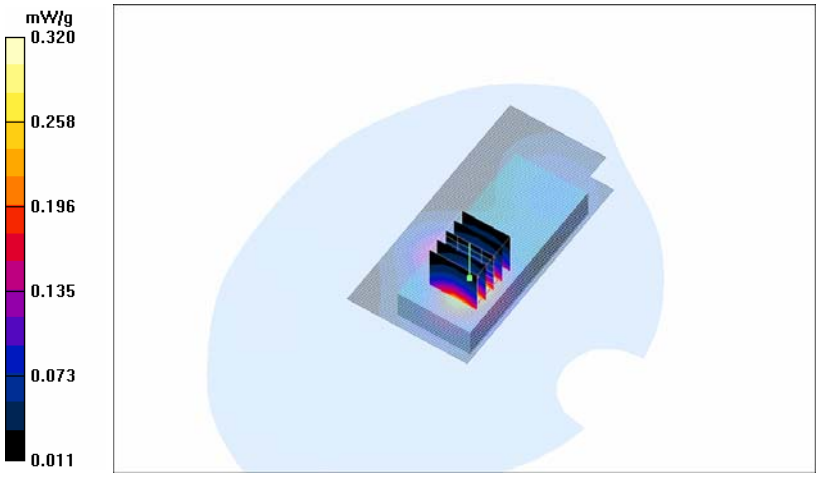

Copyright © 2006 Copenhagen

Date/Time: 2006-03-16 20:57:52

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.4 C
Medium parameters used: f = 1880 MHz; σ = 1.48 mho/m; εr = 52; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.36, 4.36, 4.36); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body - Mid - HS-6/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.298 mW/g

Body - Mid - HS-6/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.6 V/m; Power Drift = 0.003 dB
Peak SAR (extrapolated) = 0.400 W/kg
SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.165 mW/g
Maximum value of SAR (measured) = 0.295 mW/g

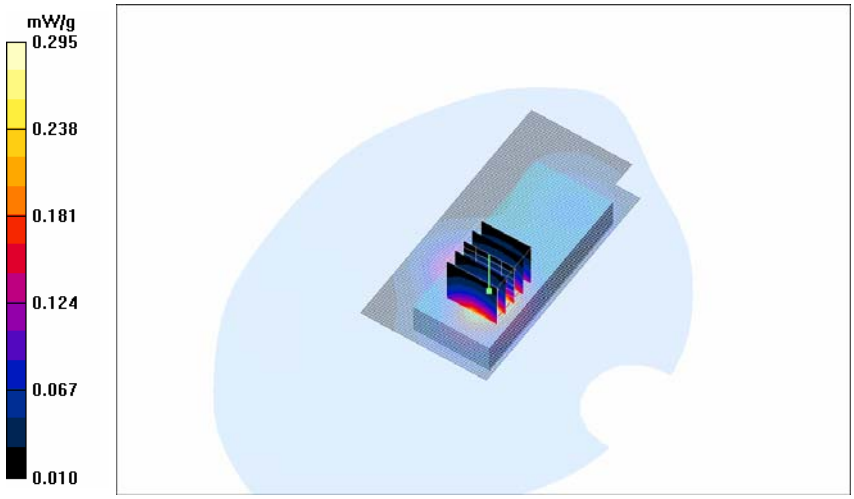

Copyright © 2006 Copenhagen

Date/Time: 2006-03-16 19:48:47

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: 2-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.4 C
Medium parameters used: f = 1880 MHz; σ = 1.48 mho/m; εr = 52; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.36, 4.36, 4.36); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body - Middle - No Accessory/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.323 mW/g

Body - Middle - No Accessory/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.3 V/m; Power Drift = -0.173 dB
Peak SAR (extrapolated) = 0.433 W/kg
SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.179 mW/g
Maximum value of SAR (measured) = 0.319 mW/g

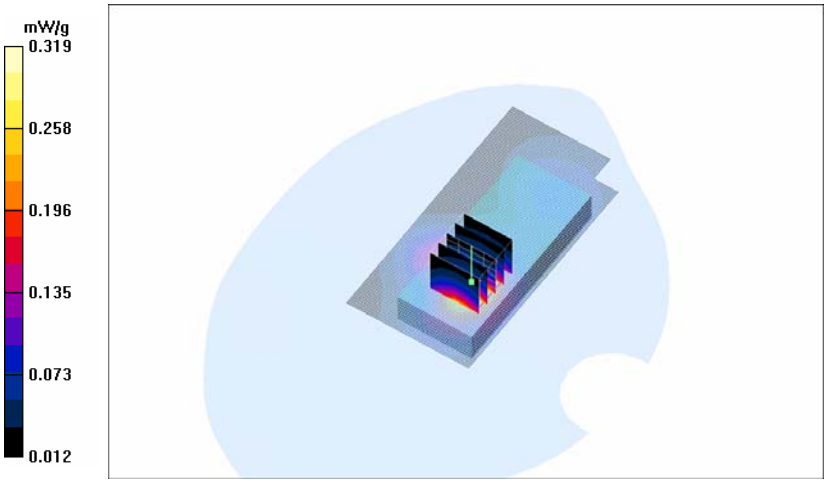

Copyright © 2006 Copenhagen

Date/Time: 2006-03-16 21:41:07

Test Laboratory: TCC Copenhagen
Type: RM-145; Serial: 004400/75/173950/7

Communication System: GSM 1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: Body 1900; Medium Notes: Medium Temperature: t=21.4 C
Medium parameters used: f = 1880 MHz; σ = 1.48 mho/m; εr = 52; ρ = 1000 kg/m3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ET3DV6 - SN1813; Probe Notes: Advanced Extrapolation
- ConvF(4.36, 4.36, 4.36); Calibrated: 2005-09-19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn339; Calibrated: 2005-08-17
- Phantom: SAM 3; Type: Twin Phantom; Serial: TP-1302
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body - Middle - BT active/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.324 mW/g

Body - Middle - BT active/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.1 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 0.439 W/kg
SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.181 mW/g
Maximum value of SAR (measured) = 0.323 mW/g

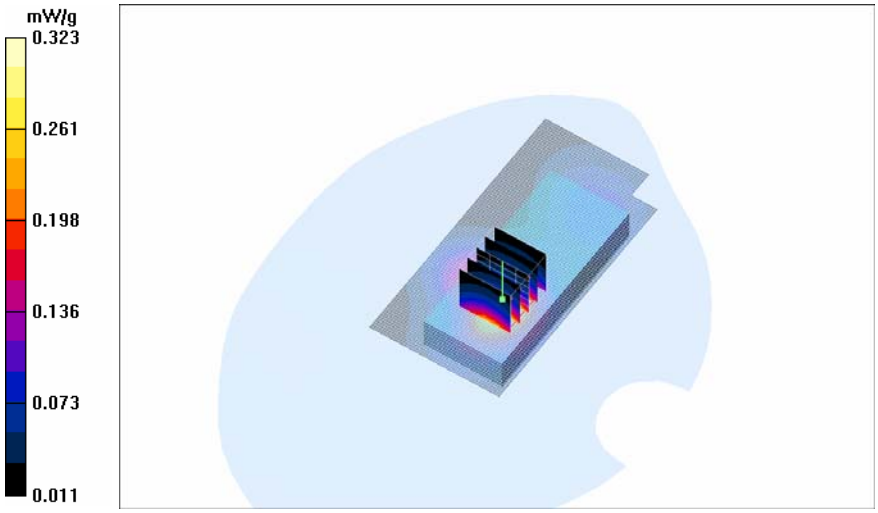

Copyright © 2006 Copenhagen

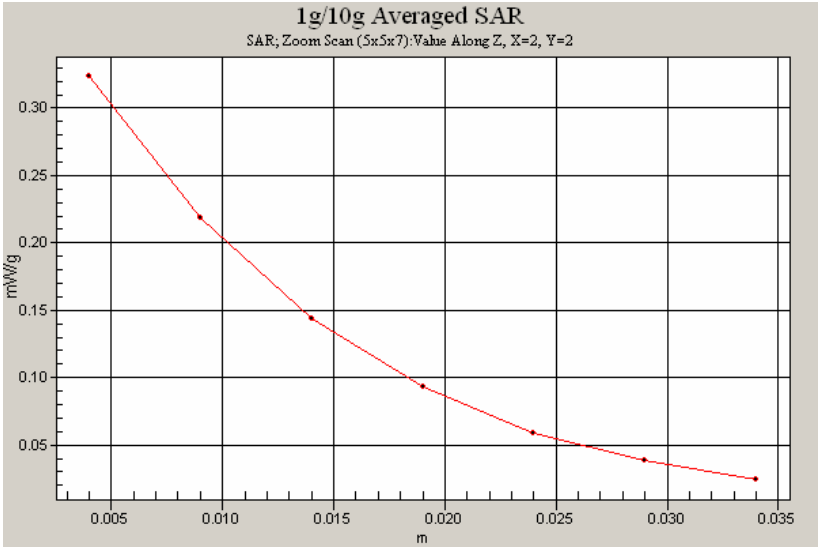

Copyright © 2006 Copenhagen

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS

See the following pages

Copyright © 2006 Copenhagen

19368

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia (NMP / Copenhagen)

Certificate No: ET3-1813_Sep04

CALIBRATION CERTIFICATE

Object	ET3DV6 - SN:1813
Calibration procedure(s)	QA CAL-01.v5 Calibration procedure for dosimetric E-field probes
Calibration date:	September 30, 2004
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN:3013	8-Jan-04 (SPEAG, No. ES3-3013_Jan04)	Jan-05
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	N. Vetterli
Approved by:	Katja Pokovic	Technical Manager	Pokovic Katja

Issued: October 1, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Conversion Factor Assessment

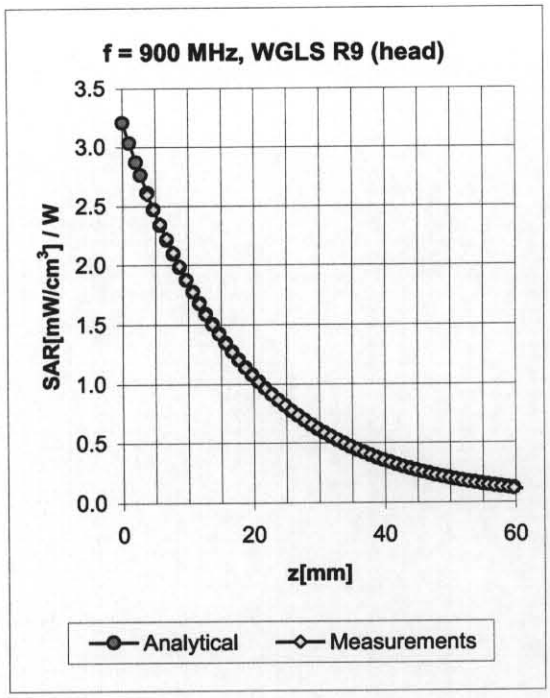

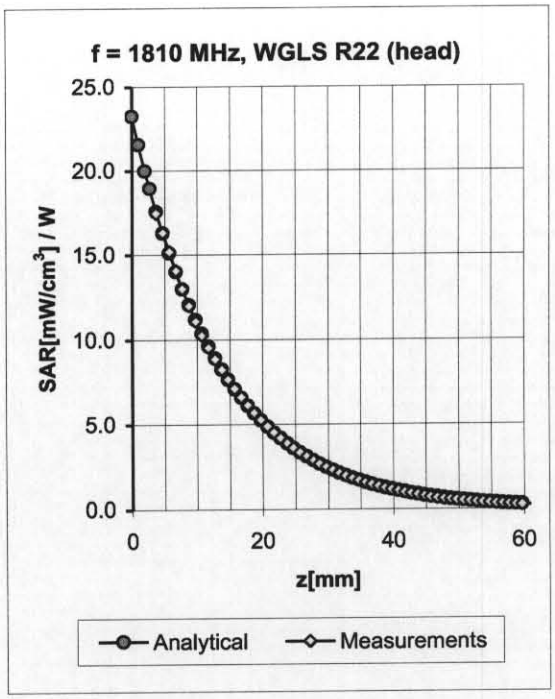

f [MHz]	Validity [MHz][c]	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	1.02	1.53	6.37 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.96	1.59	6.17 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.58	2.33	5.13 ± 11.0% (k=2)
1900	± 50 / ± 101	Head	40.0 ± 5%	1.40 ± 5%	0.55	2.52	4.96 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.50	2.77	4.75 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.62	2.37	4.50 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.99	1.58	6.17 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.93	1.65	5.95 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.77	4.55 ± 11.0% (k=2)
1900	± 50 / ± 101	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.96	4.41 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.53	2.67	4.42 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.59	2.30	4.21 ± 11.8% (k=2)

[c] The validity of ± 100 MHz only applies for DASY 4.3 B17 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS

See the following pages

Copyright © 2006 Copenhagen

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia DK

Certificate No: D1900V2-5d063_Oct05

CALIBRATION CERTIFICATE

Object	D1900V2 - SN: 5d063
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits
Calibration date:	October 25, 2005
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference 10 dB Attenuator	SN: 5047.2 (10r)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference Probe ET3DV6	SN 1507	26-Oct-04 (SPEAG, No. ET3-1507_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05

	Name	Function	Signature
Calibrated by:	Judith Müller	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 26, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Head TSL

Date/Time: 25.10.2005 16:04:03

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d063

Communication System: CW-1900; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: HSL 1900 MHz;
Medium parameters used: f = 1900 MHz; σ = 1.48 mho/m; ε_r = 38.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.6 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 159

Pin = 250 mW; d = 10 mm/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.1 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.3 V/m; Power Drift = 0.014 dB
Peak SAR (extrapolated) = 18.0 W/kg
SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.36 mW/g
Maximum value of SAR (measured) = 11.7 mW/g

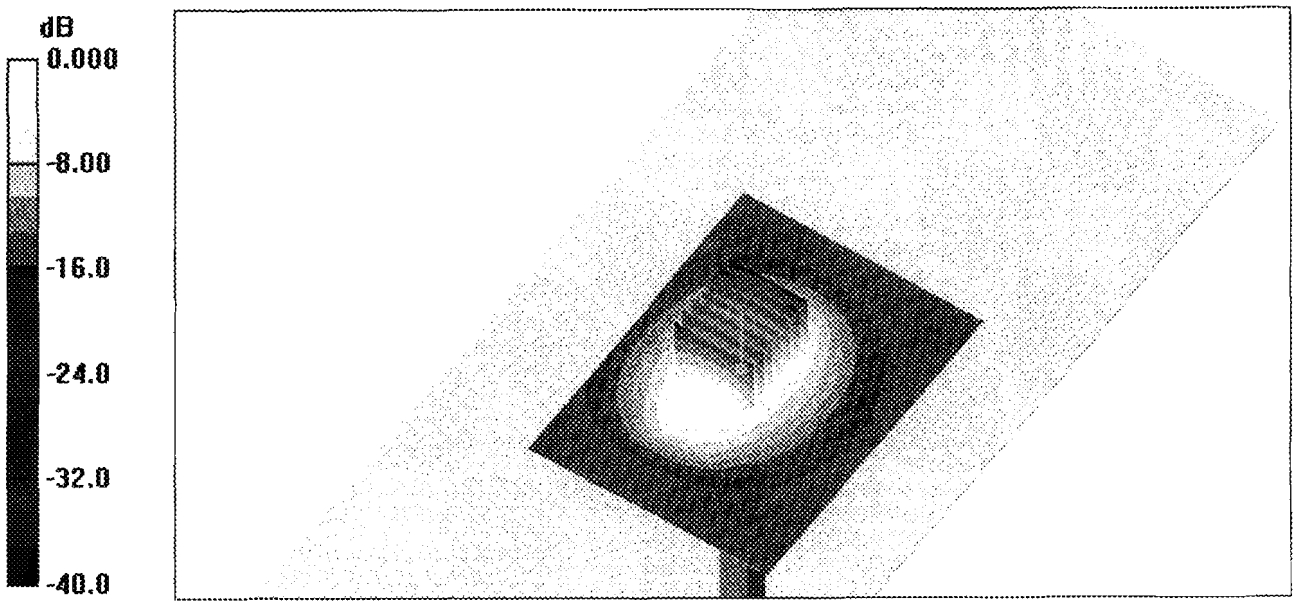

0 dB = 11.7mW/g

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Denmark

Certificate No: D1900V2-5d063_Jan06

CALIBRATION CERTIFICATE

Object	D1900V2 - SN: 5d063
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits
Calibration date:	January 10, 2006
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Power sensor HP 8481A	US37292783	04-Oct-05 (METAS, No. 251-00516)	Oct-06
Reference 20 dB Attenuator	SN: 5086 (20g)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference 10 dB Attenuator	SN: 5047.2 (10r)	11-Aug-05 (METAS, No 251-00498)	Aug-06
Reference Probe ET3DV6	SN 1507	28-Oct-05 (SPEAG, No. ET3-1507_Oct05)	Oct-06
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

	Name	Function	Signature
Calibrated by:	Judith Müller	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 17, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Body TSL

Date/Time: 10.01.2006 15:46:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d063

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: MSL U10;
Medium parameters used: f = 1900 MHz; σ = 1.53 mho/m; ε_r = 53; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.3, 4.3, 4.3); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin = 250 mW; d = 10 mm 2/Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.0 mW/g

Pin = 250 mW; d = 10 mm 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.2 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 18.0 W/kg
SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.6 mW/g
Maximum value of SAR (measured) = 12.0 mW/g

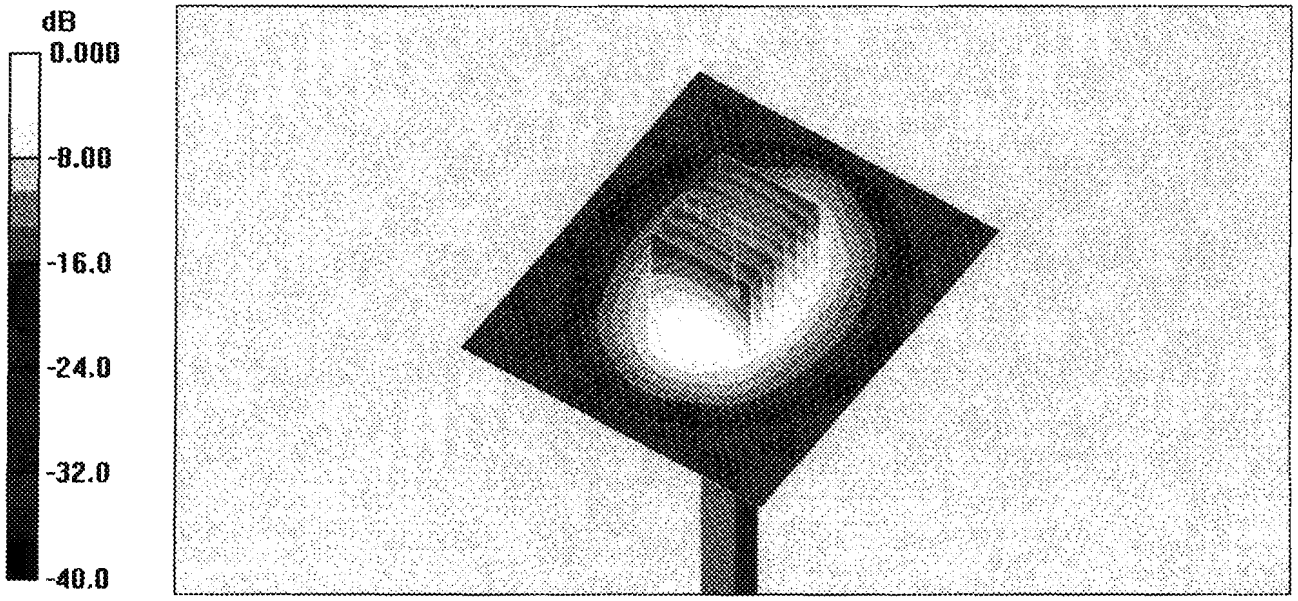

0 dB = 12.0mW/g