

FCC Part 15B Compliance Test Report

Test Report no.:	Cph_FCC_0538_06.doc	Date of Report:	27-09-2005
Number of pages:	9	Customer's Contact person:	Ernest Mayer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone: RM-78 (HW 0407) & Battery: BP-6M & AC-Charger: AC-4E & Headset: HS-23 & MMC MU-16		
FCC ID:	QTKRM-78	IC:	661AD-RM78
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Engineer

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	19-09-2005
Testing completed	21-09-2005
The customer's contact person	Ernest Mayer
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	Cph_FCC_0538_06.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS and Bluetooth. GSM band is tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-78	004400/74/160069/4	0407	-	Vp03.01.2	28379
Battery	BP-6M	0670467393213M061120140976	-	-	-	28378
AC-Charger	AC-4E	3997915036031100023;0675384	1.1	1.0	-	28999
Headset	HS-23	0025	0.5	0.3	0.2	28941
Multi Media Card	MU-16	SDSDM64 ABO4251AJ	-	-	-	28410

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (9)	Radiated emissions	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1.	Summary for FCC Part 15B Compliance Test Report	2
1.1.	EUT and Accessory Information	2
1.2.	Summary of Test Results	2
2.	Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)	4
2.1.	Test setup	4
2.2.	Test method and limit	4
2.3.	GSM 1900 Test results	5
2.3.1	Phone slide open	5
2.3.2	Phone slide closed	6
3.	Test Equipment	8
3.1.	Conducted measurements	8
3.2.	Radiated measurements	8

2. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-78 Dut#28379
Accessories with DUT numbers	BP-6M Dut#28378, AC-4E Dut#28999, HS-23 Dut#28941, MU-16 Dut#28410
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 55 / 1024
Date of measurements	21-09-2005
Measured by	Christian Andersen

2.1. Test setup

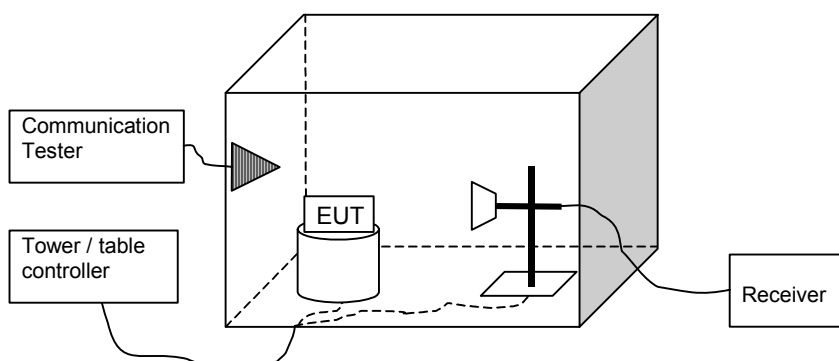

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m below 3 GHz and 1.6 m above that.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 - 1000	47	-	-
Above 1000	-	54	74

2.3. GSM 1900 Test results

2.3.1 Phone slide open

RX mode, channel 512

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3860.000000	41.04	112.72	33.34	7.70	HORIZONTAL	Passed
7720.000000	44.34	164.82	31.64	12.70	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3860.000000	27.94	24.95	20.24	7.70	VERTICAL	Passed
7720.000000	31.44	37.33	18.74	12.70	VERTICAL	Passed

RX mode, channel 661

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
36.433467	25.30	18.41	34.20	-8.90	VERTICAL	Passed
45.209820	31.00	35.48	45.40	-14.40	VERTICAL	Passed
72.905611	21.60	12.02	39.70	-18.10	VERTICAL	Passed
87.474950	61.30	1161.45	78.40	-17.10	HORIZONTAL	Passed
109.058717	21.70	12.16	37.90	-16.20	VERTICAL	Passed

*87.5 MHz frequency is coming from FM Radio tester and thus ignored.

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
1959.919840	65.30	1840.77	54.80	10.50	VERTICAL	Passed
1959.921844	65.00	1778.28	54.50	10.50	VERTICAL	Passed
2908.809619	58.00	794.33	40.10	17.90	VERTICAL	Passed
3919.841683	43.34	146.89	35.54	7.80	VERTICAL	Passed
7840.179359	46.94	222.33	33.74	13.20	VERTICAL	Passed

*1960 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
1959.919840	63.20	1445.44	52.70	10.50	VERTICAL	Passed
1959.921844	63.60	1513.56	53.10	10.50	VERTICAL	Passed
2491.989980	42.20	128.82	27.20	15.00	VERTICAL	Passed
2904.309619	45.10	179.89	27.00	18.10	VERTICAL	Passed
3919.841683	28.94	27.99	21.14	7.80	VERTICAL	Passed
6704.412826	37.64	76.21	26.24	11.40	VERTICAL	Passed
6998.000000	38.34	82.60	27.14	11.20	HORIZONTAL	Passed
7423.351703	31.54	37.76	18.64	12.90	VERTICAL	Passed
7839.679359	32.94	44.36	19.74	13.20	VERTICAL	Passed

*1960 MHz frequency is coming from communication tester and thus ignored.

RX mode, channel 810

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	42.54	133.97	34.74	7.80	VERTICAL	Passed
7960.000000	46.54	212.32	33.34	13.20	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.24	25.82	20.44	7.80	VERTICAL	Passed
7960.000000	32.24	40.93	19.04	13.20	VERTICAL	Passed

2.3.2 Phone slide closed

RX mode, channel 512

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	42.04	126.47	34.34	7.70	VERTICAL	Passed
7720.000000	44.54	168.66	31.84	12.70	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	28.24	25.82	20.54	7.70	VERTICAL	Passed
7720.000000	31.44	37.33	18.74	12.70	VERTICAL	Passed

RX mode, channel 661

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
36.492986	25.70	19.28	34.70	-9.00	VERTICAL	Passed
45.750301	27.50	23.71	42.30	-14.80	VERTICAL	Passed
73.246092	22.50	13.34	40.60	-18.10	VERTICAL	Passed
87.474950	61.30	1161.45	78.40	-17.10	HORIZONTAL	Passed
107.756313	21.20	11.48	37.50	-16.30	VERTICAL	Passed
906.113627	24.20	16.22	25.40	-1.20	HORIZONTAL	Passed

*87.5 MHz frequency is coming from FM Radio tester and thus ignored.

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	64.30	1640.59	53.80	10.50	VERTICAL	Passed
2906.813627	58.00	794.33	39.90	18.10	HORIZONTAL	Passed
3919.841683	43.84	155.60	36.04	7.80	VERTICAL	Passed
7839.681363	45.74	193.64	32.54	13.20	VERTICAL	Passed

*1960 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	62.30	1303.17	51.80	10.50	VERTICAL	Passed
2494.983968	42.20	128.82	27.20	15.00	HORIZONTAL	Passed
2910.313627	44.90	175.79	27.00	17.90	HORIZONTAL	Passed
3919.841683	29.44	29.65	21.64	7.80	VERTICAL	Passed
6701.410822	37.54	75.34	26.04	11.50	HORIZONTAL	Passed
6919.845691	40.74	108.89	29.34	11.40	VERTICAL	Passed
7429.351703	31.44	37.33	18.54	12.90	VERTICAL	Passed
7840.181363	33.14	45.39	19.94	13.20	VERTICAL	Passed

*1960 MHz frequency is coming from communication tester and thus ignored.

RX mode, channel 810

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	43.14	143.55	35.34	7.80	VERTICAL	Passed
7960.000000	47.54	238.23	34.34	13.20	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.64	27.04	20.84	7.80	VERTICAL	Passed
7960.000000	32.34	41.40	19.14	13.20	VERTICAL	Passed

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
	Ultralog 30-3000MHz			
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C