EMC Test Report
for

RH-60

T183 (EN ISO/IEC 17025)

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

CONTENTS

1 CUSTOMER INFORMATION 3
2 EUT AND ACCESSORY INFORMATION 4
2.1 EUT description 4
2.2 EUT and accessories 4
3 STANDARDS AND MEASUREMENT METHODS 6
4 TEST RESULTS 7
4.1 AC powerline conducted emissions 7
4.1.1 Limit 7
4.1.2 EUT operation mode 7
4.1.3 EUT test setup 8
4.1.4 Emission measurement data 9
4.2 Radiated emissions 10
4.2.1 Test method and level, 30MHz – 8500 MHz 10
4.2.2 EUT operation mode 11
4.2.3 EUT test setup 11
4.2.4 Emission measurement data, 30MHz – 8500 MHz 12

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

1 CUSTOMER INFORMATION

Test laboratory:	TCC Tampere Nokia Oyj Sinitaival 5 FIN-33720 TAMPERE Tel. +358 7180 08000 Fax. +358 7180 46800
FCC registration number IC file number:	94436 (June 14, 2002) IC 3608 (March 5, 2003)
Client:	Nokia Corporation Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 Beijing China Tel. +861065392828 Fax. +861065393824
Contact person:	Liu Haiping tel: +8610 65392828
Receipt of EUT:	24.6.2004
Date of testing:	5.-6.7.2004
Date of report:	7.7.2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 15 and IC standard ICES-003.

Contents approved:

Jari Jantunen EMC test engineer

2 EUT AND ACCESSORY INFORMATION

2.1 EUT description

The EUT is a dual band (850 MHz/1900MHz) GSM mobile phone.

The highest internal frequency of the EUT is 3980 MHz.

2.2 EUT and accessories

The table below lists all EUTs and accessories used in the tests. Later in this test report, only numbers in the last column are used to refer to the devices in each test.

	Name	Type	S/N	Number
EUT	GSM Phone	RH-60	001004001742205	40005
Accessories	Battery Battery AC Charger	BL-5C BL-5C ACP-12U	L076311842803 L076311842756 15.1694	40009 40010 40013

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

SUMMARY OF TEST RESULTS

Section in CFR 47	Section in ICES-003		Result
15.107,a	5.3	AC powerline conducted emissions	PASS
15.109,a	5.5	Radiated emissions	PASS

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

3 STANDARDS AND MEASUREMENT METHODS

The tests were performed in guidance of CFR 47 Part 15 Subpart B, ANSI C63.4 (2001), ICES-003 and CISPR 22. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method".

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

4 TEST RESULTS

4.1 AC powerline conducted emissions

EUT	40005		
Accessories	40010, 40013		
Temp, Humidity, Air Pressure	18ºC	53 % RH	1005 mbar
Date of measurement	6.7.2004		
FCC rule part	§15.107		
ICES-003 section	5.3		
Measured by	Jari Jantunen		
Result	**PASS**		

4.1.1 Limit

CISPR 22 Class B limit

Frequency band (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50

4.1.2 EUT operation mode

EUT operation mode	GSM 1900, Idle
EUT operation voltage	115V/60Hz

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

4.1.3 EUT test setup

Picture 1 Test setup

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

4.1.4 Emission measurement data

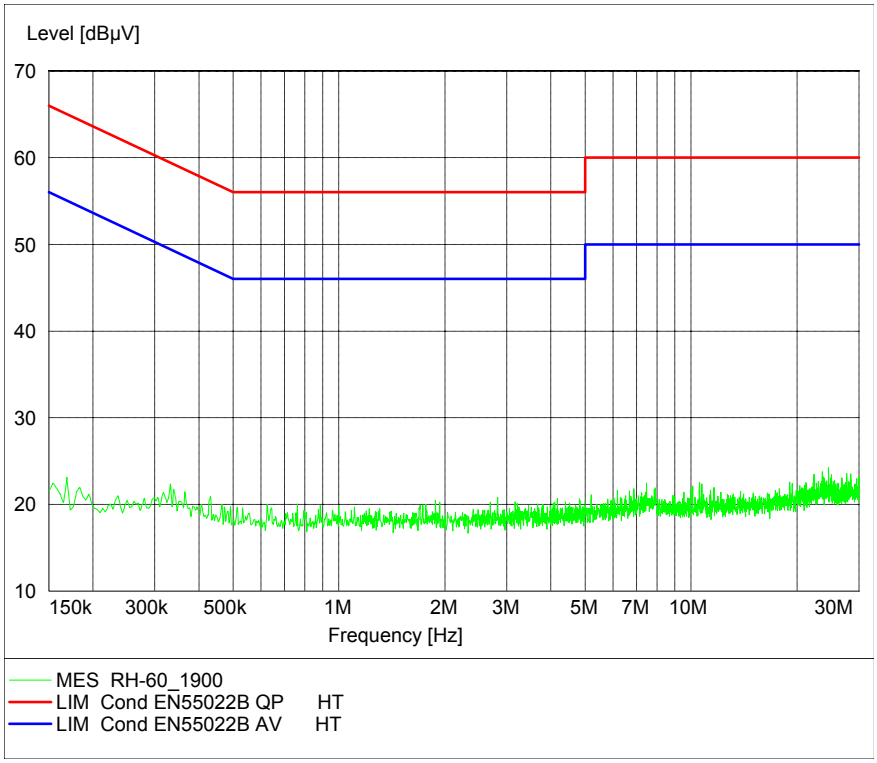

Picture 2 AC powerline conducted emission

Table 1 Highest emissions on selected frequencies.

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.300000	6.80	10.10	50.20	43.40	AV	L1	GND
0.600000	3.40	10.20	46.00	42.60	AV	N	GND
1.500000	3.40	10.40	46.00	42.60	AV	N	GND
5.000000	5.30	10.70	46.00	40.70	AV	L1	GND
0.300000	11.70	10.10	60.20	48.50	QP	L1	GND
0.600000	8.10	10.20	56.00	47.90	QP	L1	GND
1.500000	7.70	10.40	56.00	48.30	QP	L1	GND
5.000000	9.70	10.70	56.00	46.30	QP	N	GND

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

4.2 Radiated emissions

EUT	40005		
Accessories	40009, 40013		
Temp, Humidity, Air Pressure	21 °C	44 %RH	1010 mbar
Date of measurement	5.7.2004		
FCC rule part	§15.109		
ICES-003 section	5.5		
Measured by	Jari Jantunen		
Result	**PASS**		

4.2.1 Test method and level, 30MHz – 8500 MHz

The test was made according to ANSI C63.4 (2001) with following execptions and additions:

1) The measurement was made in semi-anechoic chamber at measurement distance of 3m. The chamber had ferrite and absorber lining in all walls and ceiling, the floor was metal covered.
2) The measurement was divided in two parts; prescan and final measurement.

4.2.1.1 Prescan

a) The EUT was set on the turntable and measuring antenna in horizontal polarization at 1m.
b) The turntable was set to 0 degrees.
c) The receiver was set to record the maximum level using peak detector.
d) The antenna was raised from 1m to 4m in 1 meter steps.
e) For each antenna height the table was rotated full turn in 30 degree steps.
f) Antenna polarization was changed to vertical and phases b - e repeated.
g) All suspect frequencies were recorded in a file.
h) At every suspect frequency the turntable was rotated around, antenna scanned and the polarization changed to find the maximum levels.

4.2.1.2 Final measurement

a) The final measurement was run at suspect frequencies only using peak, quasipeak and average detector.
b) The turntable was rotated full turn to find out the worst azimuth.
c) On those azimuths obtained in b, the antenna was scanned from 1m to 4m to find out the worst elevation.
d) Phases b and c were repeated with another antenna polarization.
e) Obtained values were reported

CISPR 22 Class B limit (3m measuring distance)

Frequency band (MHz)	Quasi-peak limit (dBµV/m)
30 – 230	40
230 – 1000	47

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

Class B limit (3m measuring distance)

Frequency band (MHz)	Limit (µV/m)	Limit (dBµV/m)	Detector
1000-8500	500 / 5000	54 / 74	AV / PK

4.2.2 EUT operation mode

EUT operation mode	GSM 1900, Idle
EUT operation voltage	115V/60Hz

4.2.3 EUT test setup

Picture 3 Test setup

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880

4.2.4 Emission measurement data, 30MHz – 8500 MHz

The measurement results were obtained as described below.

$$E[uV/m] = U_{RX} + A_{CABLE} + AF - G_{PREAMP}$$

Where

U_{RX}	receiver reading
A_{CABLE}	Attenuation of the cable
AF	Antenna factor
G_{PREAMP}	Gain of the preamplifier

Table 2

Freq [MHz]	EMI QP [dBμV/m]	Polarization
38.857315	6.40	VERTICAL
41.983567	8.00	VERTICAL
199.499198	14.10	VERTICAL
213.727455	19.90	VERTICAL
228.056313	15.10	VERTICAL

The test results are valid for the tested unit(s) only. This report shall not be reproduced except in full, without the written permission of the testing laboratory.

TCC Tampere
Box 68
FIN-33721 TAMPERE
FINLAND

Tel. +358 7180 08000
Fax. +358 7180 46880