

FCC Part 15B Compliance Test Report

Test Report no.:	Tre_FCC_0646_02.doc	Date of Report:	04.12.2006
Number of pages:	10	Customer's Contact person:	Wang Yan-Winnie
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 BEIJING, PRC Tel. +86 10 65392828 Fax. +86 10 65393838
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RH-95 / Battery BL-5CA, AC charger ACP-7U, Headset HS-7		
FCC ID:	QTLRH-95	IC:	661AB-RH95
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Juho Tuohino, Test System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	17.11.2006
Testing completed	23.11.2006
The customer's contact person	Wang Yan-Winnie
Test Plan referred to	T:\Projects\RH-95\TestPlan_RS\RS_testplan_RH-95.xls
Notes	-
Document name	T:\Projects\RH-95\EMC\Results\FCC\Tre_FCC_0646_02.doc

1.1. EUT and Accessory Information

The EUT is a 2-band (GSM850/1900) mobile phone. GSM bands are tested in idle mode.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RH-95	001004002222918	0402		1.9C	40868
Battery	BL-5CA	-	-	-	-	40871
AC Charger	ACP-7U	-	-	-	-	40872
Headset	HS-7	-	-	-	-	40315

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	Passed
15.109, a	5.5 (6.6)	Radiated emissions	Passed

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (9)	Radiated emissions	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. GSM 850 Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 6	6
3.1. Test setup	6
3.2. Test method and limit.....	6
3.3. GSM 850 Test results	7
3.4. GSM 1900 Test results	8
4. Test Equipment.....	10
4.1. Conducted measurements	10
4.2. Radiated measurements	10

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RH-95 #40868
Accessories with DUT numbers	BL-5CA #40871, ACP-7U #40872, HS-7 #40315
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45 / 101.2
Date of measurements	20.11.2006
Measured by	Juho Tuohino

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

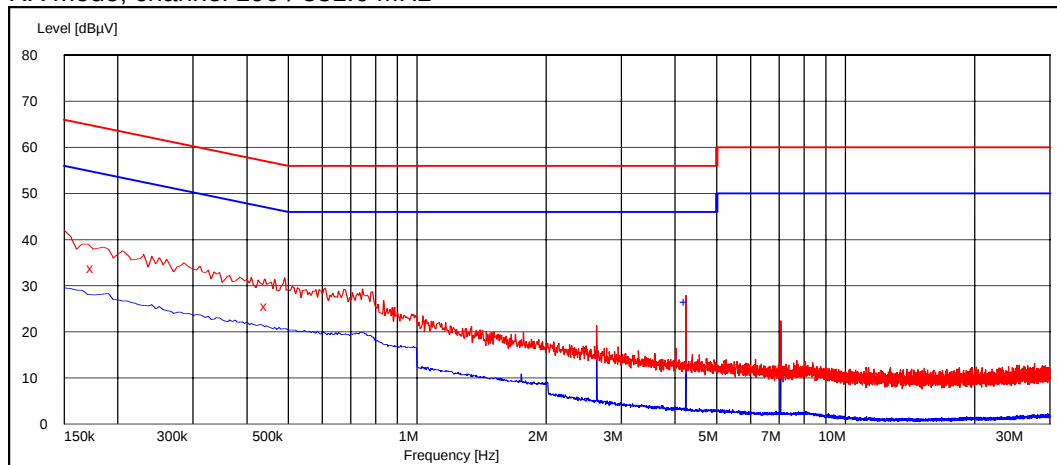

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.175000	33.80	L1	Passed
0.445000	25.70	L1	Passed

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
4.240000	26.50	N	Passed

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RH-95 #40868
Accessories with DUT numbers	BL-5CA #40871, ACP-7U #40872, HS-7 #40315
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45 / 101.2
Date of measurements	20.11.2006
Measured by	Juho Tuohino

3.1. Test setup

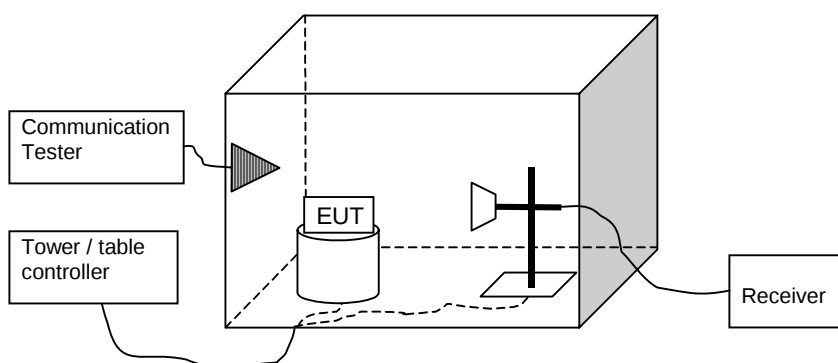

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	38.90	88.10	44.00	-5.10	HORIZONTAL	Passed
6953.600000	53.30	462.38	52.40	0.90	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	25.60	19.05	30.70	-5.10	HORIZONTAL	Passed
6953.600000	31.10	35.89	30.20	0.90	HORIZONTAL	Passed

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.000000	19.00	8.91	37.80	-18.80	VERTICAL	Passed
72.565130	6.90	2.21	37.50	-30.60	VERTICAL	Passed
881.663527	57.20	724.44	73.60	-16.40	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7051.602204	50.40	331.13	49.60	0.80	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7051.602204	16.60	6.76	15.80	0.80	HORIZONTAL	Passed

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	39.20	91.20	43.80	-4.60	HORIZONTAL	Passed
7150.400000	47.30	231.74	45.80	1.50	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	25.60	19.05	30.20	-4.60	HORIZONTAL	Passed
7150.400000	28.50	26.61	27.00	1.50	HORIZONTAL	Passed

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	40.30	103.51	42.70	-2.40	HORIZONTAL	Passed
7720.000000	45.40	186.21	42.70	2.70	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	27.30	23.17	29.70	-2.40	HORIZONTAL	Passed
7720.000000	31.60	38.02	28.90	2.70	HORIZONTAL	Passed

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.102405	19.00	8.91	37.90	-18.90	HORIZONTAL	Passed
72.565130	6.90	2.21	37.50	-30.60	VERTICAL	Passed
900.399599	21.40	11.75	37.40	-16.00	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.919840	59.30	922.57	66.20	-6.90	VERTICAL	Passed
7839.679359	45.10	179.89	42.30	2.80	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.919840	57.50	749.89	64.40	-6.90	VERTICAL	Passed
7839.679359	18.30	8.22	15.50	2.80	HORIZONTAL	Passed

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	40.00	100.00	42.70	-2.70	HORIZONTAL	Passed
7960.000000	43.40	147.91	40.30	3.10	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	27.10	22.65	29.80	-2.70	HORIZONTAL	Passed
7960.000000	29.70	30.55	26.60	3.10	HORIZONTAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B