

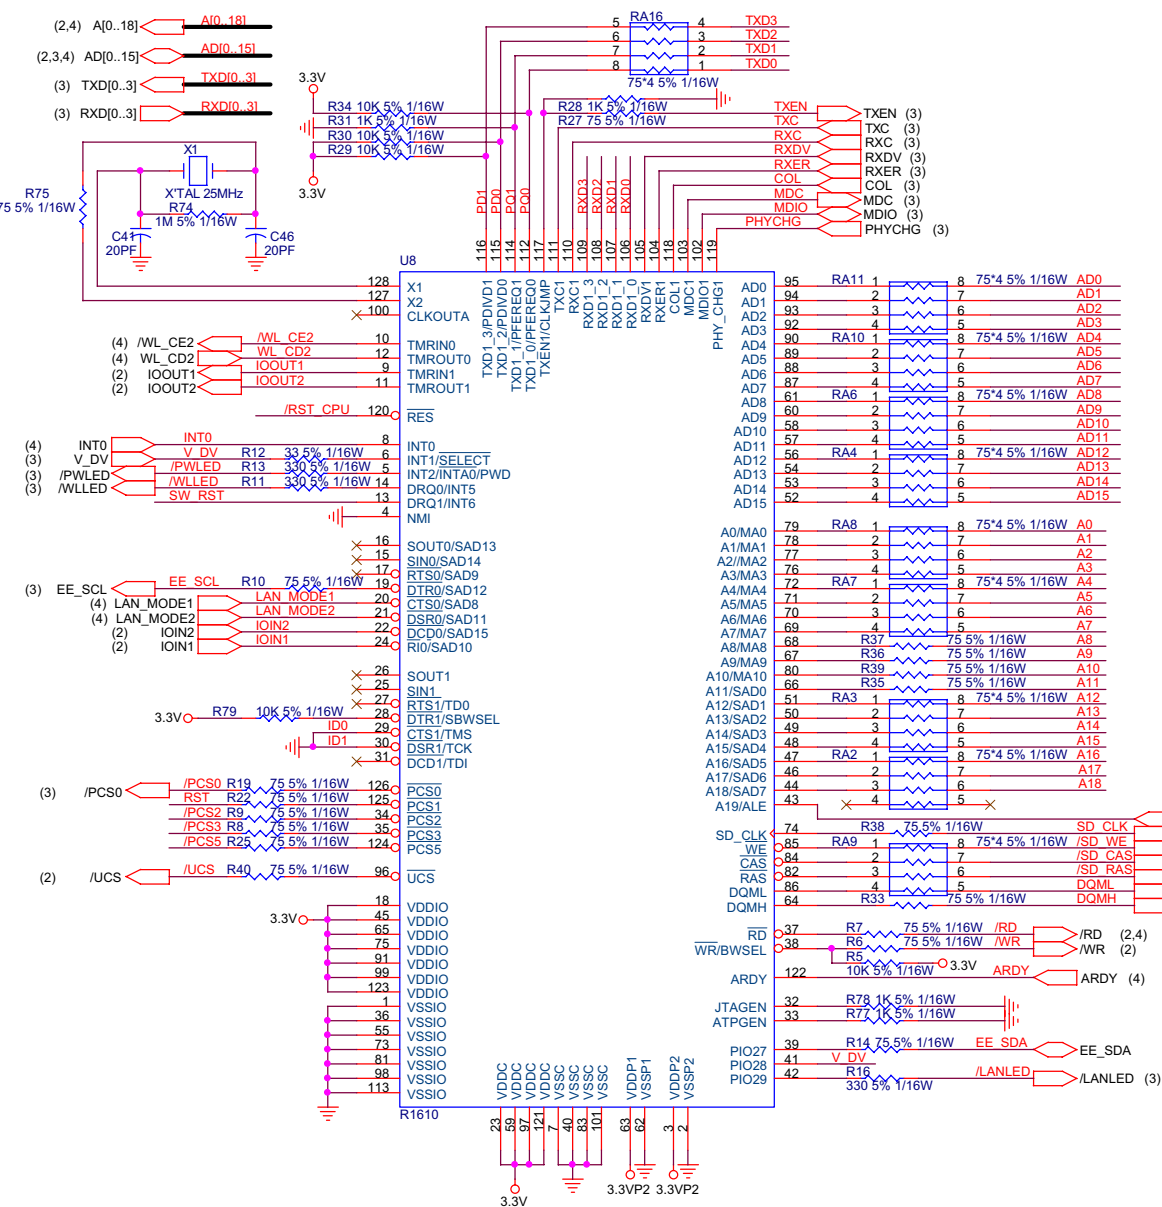
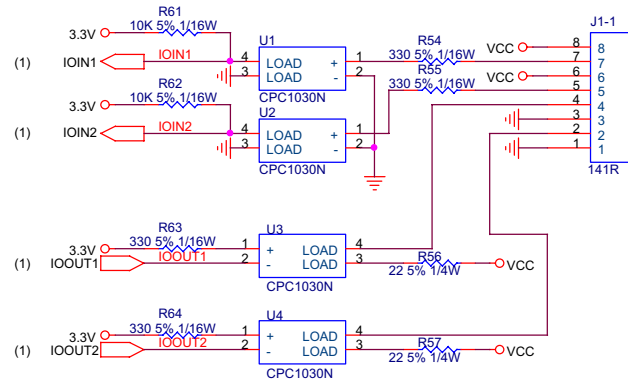


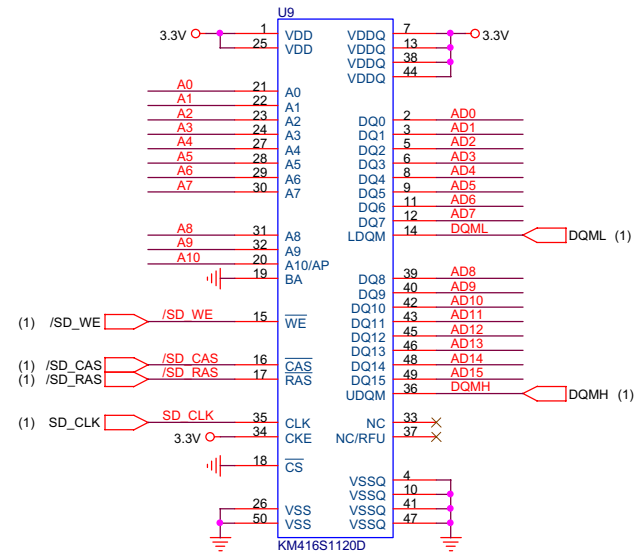


Software Version : Pin 29(U1_CTS) ID0= 0
Pin 30(U1_DSR) ID1= 0
Pin 38(/WR) = PU : ROM 16bit
Pin 32(JTAGEN)=PD : JTAGEN disable
Pin 33(ATPGEN)=PD : Sacn chain disable
Pin 117(TXEN1/CLKJMP)=PD : Clkout = X'tal
25MHZ*4=100MHZ
Pin 116(TXD1_3/PDIVD1) = PU
Pin 115(TXD1_2/PDIVD0) = PU
Pin 114(TXD1_1/PFEREQ1) = PD
Pin 112(TXD1_0/PFEREQ0) = PU
Pin 28(DTR1/SBWSSEL)=PU : UART1 disable




(1,3,4) AD[0..15]  AD[0..15]






(1,4) A[0..18]  A[0..18]

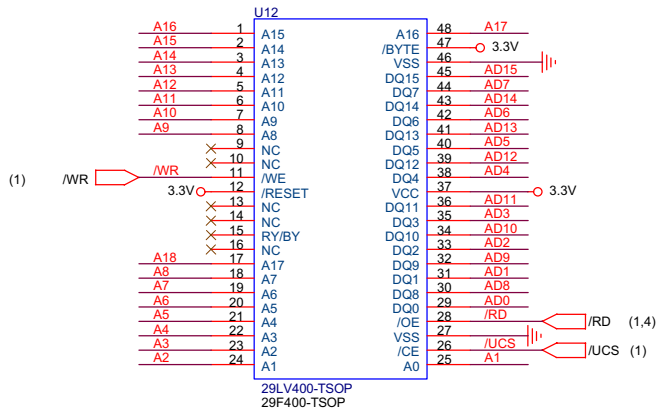

Prepared: York Lin			
Issued Date:			
Title CAS-200W			
Size B	Document Number Memory & IO		Rev 1B1
Date:	Tuesday, November 05, 2002	Sheet 2	of 4

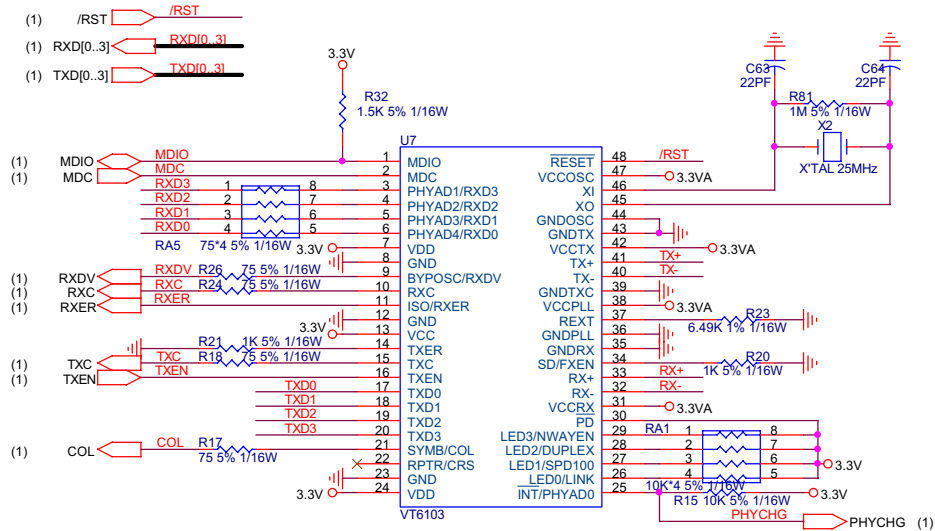


(1,2,4) AD[0..15]

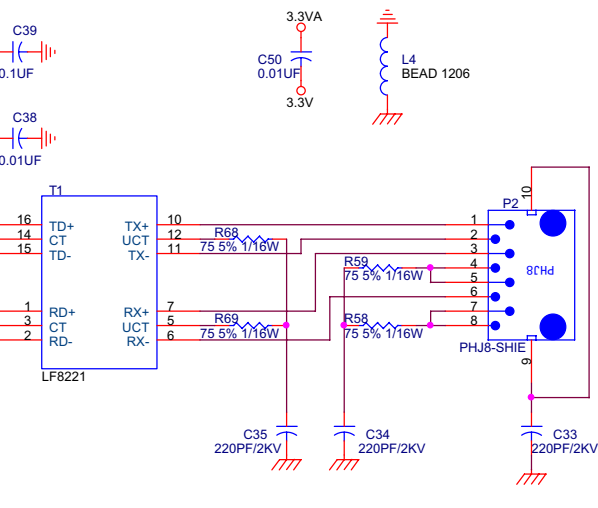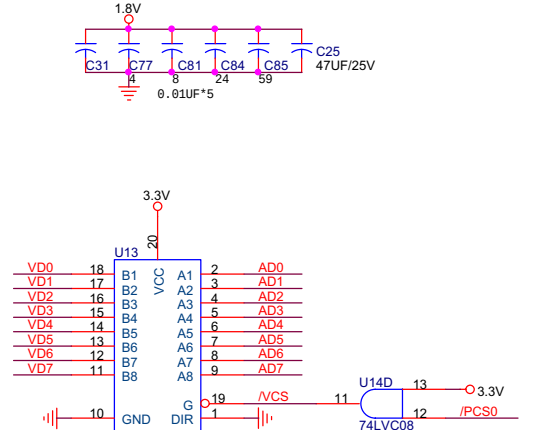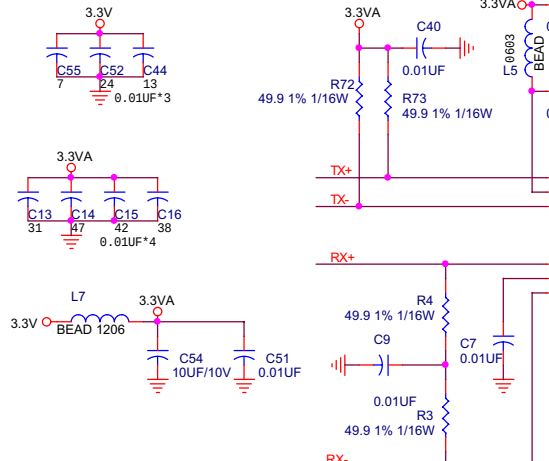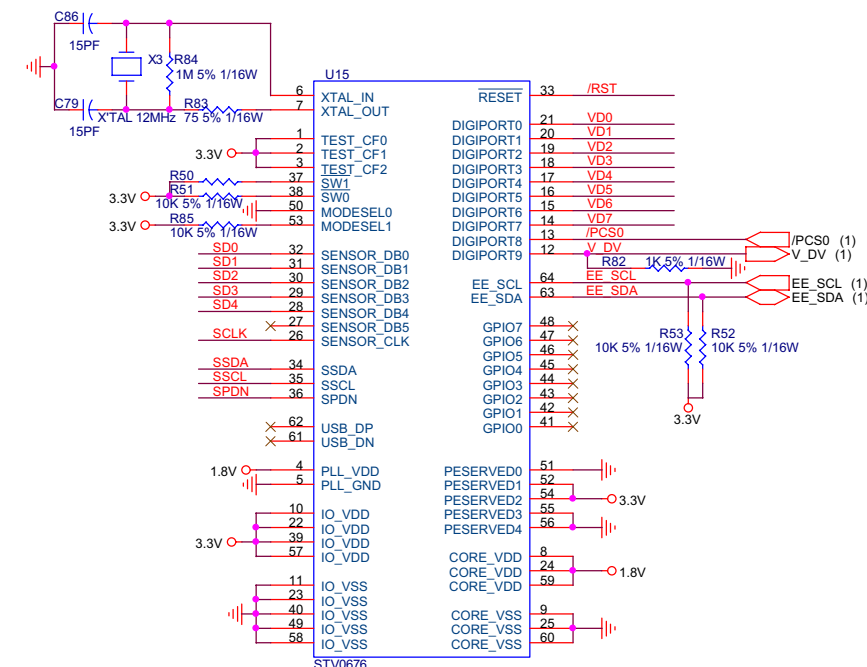

RXD[0:3] INT# = 00001B | PHY ADDRESS
PIN29(LED3)=PU NWay enable
PIN28(LED2)=PU Full duplex
PIN27(LED1)=PU Speed 100M
PIN26(LED0)=PU Test mode disable
PIN34(FXEN)=PD Fiber mode disable

modelsel[1:0]=10 | Slave I2C mode
SW1 : 1 | Remote wakeup disable
SW0 : 1 | Load TWAIN driver data upload disable

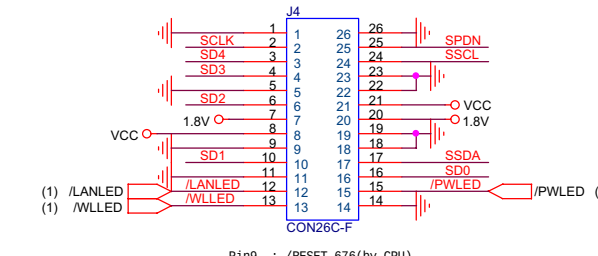

Prepared : York Lin	
Issued Date:	
Title	
CAS-200W	
Size	Document Number
B	PHY & VIEDO
Date:	Tuesday, November 05, 2002
Sheet	3 of 4
Rev	1B1

