


TX4313RS
BLOCK
DIAGRAM

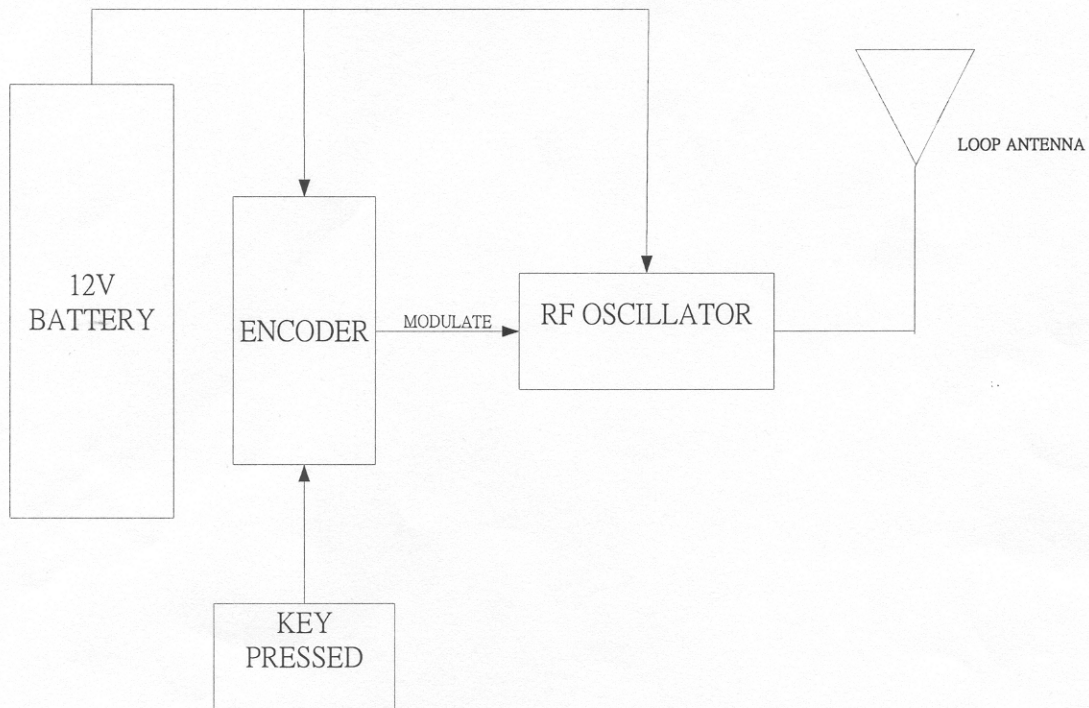

When a key pressed encoder will send a code to activate rf oscillator then transmits a rf signal through antenna.