

TST FFS10

manual radio transmitter 433 MHz - AM

TST FFS10-B **10- channel transmitter**

Remote-controlled opening and closing of industrial doors and barriers

Special features:

- remote control radio transmitters in compact case
- frequency range AM 433 MHz
- LED display

Technical data

dimensions:	W x H x D: 130 x 60 x 23 mm
Mains voltage:	9V block battery
Current consumption:	approx. 35 mA
Operating frequency:	433,920 MHz
Modulation method.	AM
degree of modulation:	min. 95%
Transmission power:	typical <10 mW

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:


- (1) This device may not cause harmful interference, and*
- (2) this device must accept any interference received, including interference that may cause undesired operation.*

Changes or modifications not expressly approved by the party responsible for compliance could avoid the user's authority to operate the equipment.

FCC ID: QV2-SMD-53200TXX

Construction:

**main frequency selection
(DIP switches, inside):**

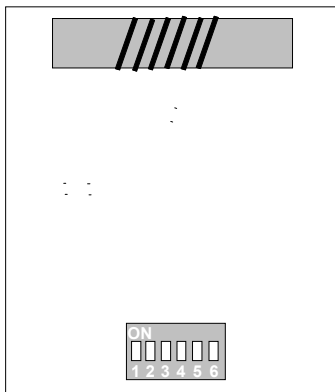

**channel selection
(selector switch, outside):**

