



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR
352.472.5500
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 15.231(a) & RSS-210 (i9) ANNEX 1
MOMENTARILY OPERATED TRANSMITTER
COMBO TEST REPORT**

Applicant	ENTERPRISE ELECTRONICS, L.L.C.
Address	1577 STAR-BATT DRIVE ROCHESTER HILLS MI 48309 USA
Product Model Number	KB3J-19G544-BA
Product Description	RF KEYPAD
FCC ID	QV4-LRL071
IC	4545A-LRL071
Date Sample Received	05/23/2018
Date Tested	05/23/2018
Tested By	Tim Royer
Approved By	Franklin Rose

Report Number	Version Number	Description	Issue Date
723UT18TestReport	Rev1	Initial Issue	05/23/2018
	Rev2	Corrected FCC ID and IC Certification #	12/20/2018

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION.....	3
TEST RESULTS SUMMARY	5
TEST SETUP	5
PERIODIC OPERATION.....	6
Declaration Provided by Applicant	7
Periodic Transmission Per Hour Calculation.....	7
Test Data: Transmitter Deactivation Plot	8
DUTY CYCLE.....	9
Test Data: Calculation of Duty Cycle	9
Test Data: 100 ms Number of Pulses Plot	10
Test Data: SubPulse 1 Duration Plot	11
RADIATION EMISSIONS:	13
Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental.....	15
OCCUPIED BANDWIDTH	16
Test Data: Occupied Bandwidth Measurement Table	16
Test Data: 902.375 MHz 20 dB Occupied Bandwidth Plot.....	17
Test Data: 902.375 MHz 99% Occupied Bandwidth Plot	18
Test Data: 903.425 MHz 20 dB Occupied Bandwidth Plot.....	19
Test Data: 903.425 MHz 99% Occupied Bandwidth Plot	20
TEST EQUIPMENT LIST	21
State of the measurement Uc – TEI Tab Lic Devices Uc 170428	22

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Sr. EMC Engineer
EMC-003838-NE



Tested by:

Name and Title: Tim Royer, Project Manager/Testing Engineer

Date: 05/23/2018



Reviewed and approved by:

Name and Title: Franklin Rose, Project Manager/EMC Testing Technician

Date: 05/25/2018

Applicant: ENTERPRISE ELECTRONICS, L.L.C.
FCC ID: QV4-LRL071
IC: 4545A-LRL071
Report: 723UT18TestReport_Rev2

[Table of Contents](#)

GENERAL INFORMATION

EUT Description	RF KEYPAD
FCC ID	QV4-LRL071
IC Certification	4545A-LRL071
Model Number	KB3J-19G544-BA
Operating Frequency	902.375, 903.425 MHz
Modulation	FSK
EUT Power Source	☐ 110–120Vac/50– 60Hz
	☐ DC Power 12V
	☒ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☐ Fixed
	☒ Mobile
	☐ Portable
Test Conditions	Temperature: 24-26°C Relative humidity: 50-65% Barometric Pressure: 1024mb
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070
Modification to the EUT	NONE
Test Exercise	For radiated emissions testing a continuously transmitting modulated carrier was used, for verification of duty cycle and compliance with periodic operation a normally operating transmitter was used
Regulatory Standards	FCC CFR Title 47 Part 15C IC RSS-210 (i9) Annex 1
Measurement Standards	ANSI C63.10: 2013 FCC CFR Title 47 Part 15.31, 15.33, 15.35 RSS-GEN (i4)

TEST RESULTS SUMMARY

Requirement	FCC Rules Part No.	IC RSS §	RESULTS Pass / Fail / NA
Types of Momentary Signals	15.231(a)	210 A1.1.1	Pass
Fundamental Output Power	15.231(b)	210 A1.1.2 GEN 6.12	Pass
Spurious Emissions and Harmonics	15.231(b) 15.209(a) 15.205(a)(b)	210 A1.1.2 GEN 8.9 GEN 8.10	Pass
Occupied Bandwidth	15.231(c) 15.215(c)	210 A1.1.3 GEN 6.6	Pass

TEST SETUP

Supporting Peripheral Equipment	N/A
---------------------------------	-----

PERIODIC OPERATION

FCC Rule Part No: 15.231(a)

IC RSS: 210 A1.1.1

Requirements:

The intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (1) and (2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Procedure: ANSI C63.10 § 7.4(e) Compliance for periodic operation

PERIODIC OPERATION

Declaration Provided by Applicant

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	X	
2	Does this device send data with this control signal?		X
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.		X
4	Does this device transmit continuously or automatically?		X
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	X	
6	If automatically operated does it deactivate 5 seconds after activation?		NA
7	Does it transmit at regular predetermined intervals?		N
8	Does it poll or send supervisory information?		N
	If yes does it do a system integrity check? How often?		N
9	Is this a fire, security or safety of life device?		N
	If YES does the device stop transmitting after the alarm condition is satisfied?		NA
10	Duty cycle: Maximum on-time?		NA
	If YES, on-time in 100 mS?		
	If Other, please specify here: On time in		
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?		FSK


Periodic Transmission Per Hour Calculation

Transmissions Per Hour	On Time per Transmission	Total Hourly On Time (s)	Hourly On Time Limit (s)	Margin (s)
NA				

Meets all requirements.

PERIODIC OPERATION

Test Data: Transmitter Deactivation Plot

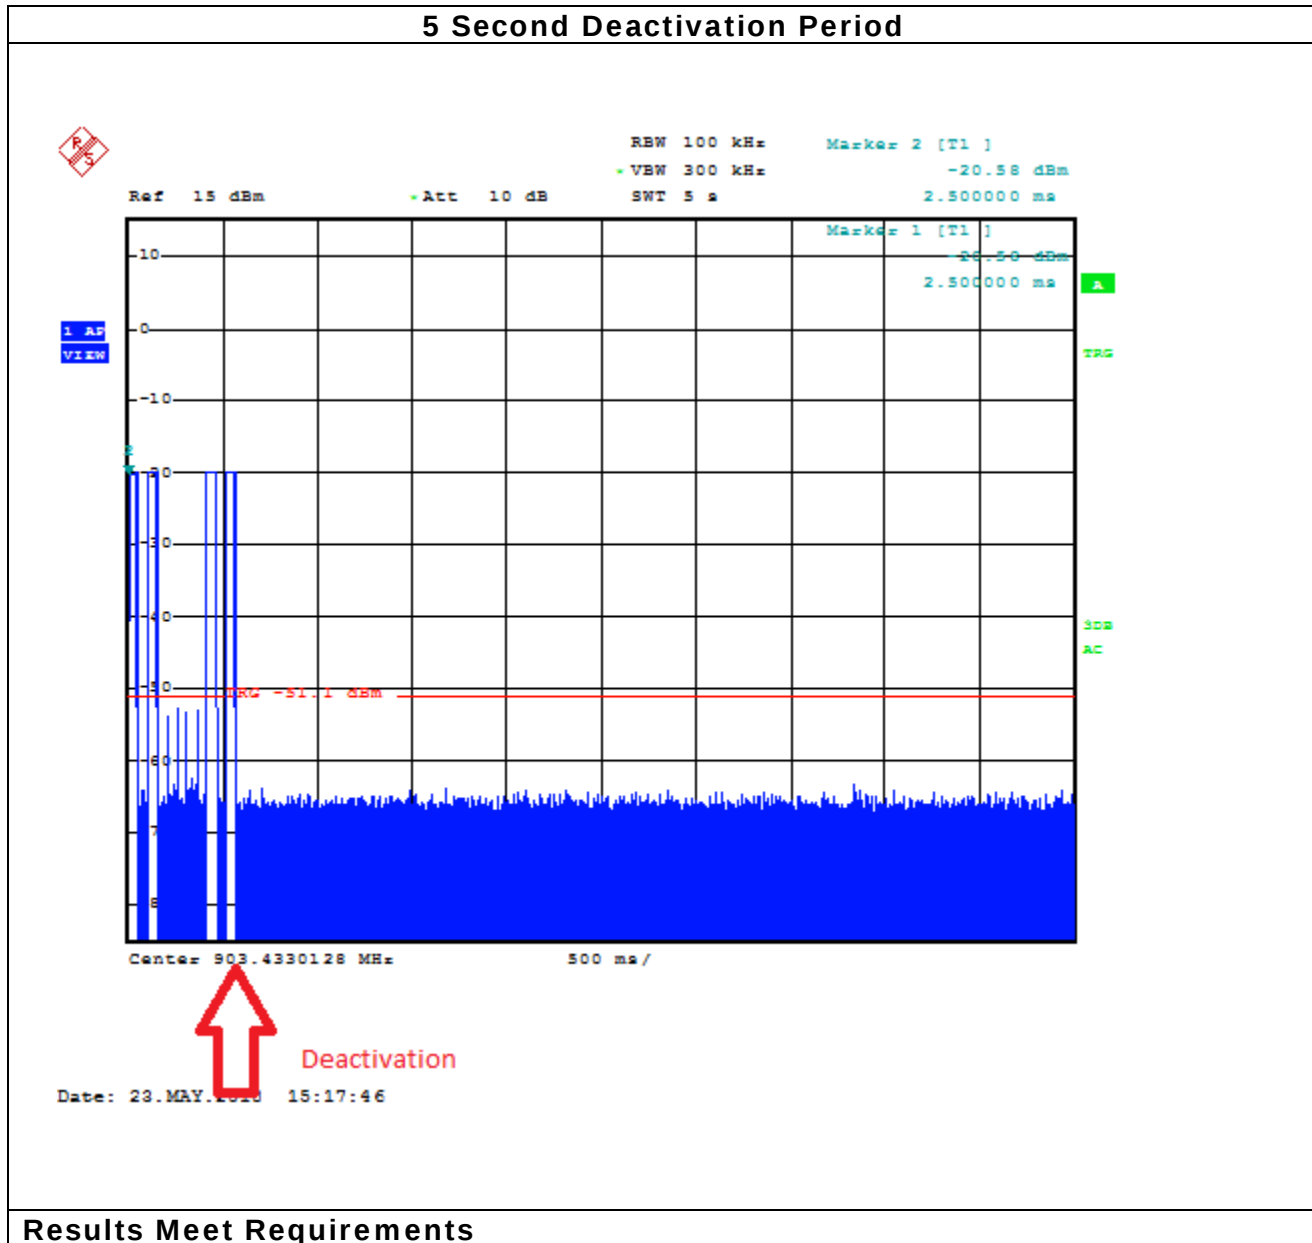

DUTY CYCLE

Requirements: There are no requirements for the duty cycle; it is measured to determine compliance with the periodic operation average emission limits and the automatic transmission on time requirement.

Procedure: ANSI C63.10 § 7.5 Average value of pulsed emissions

Formula: $\delta \text{ (dB)} = 20 \log (n_1 t_1 + n_2 t_2 + n_3 t_3) / T$

Where:

δ is the duty cycle correction factor (dB)

T is the pulse width (100 ms period)

t_1 is the pulse width of subpulse 1

t_2 is the pulse width of subpulse 2

t_3 is the pulse width of subpulse 3

n_1 is the number of t_1 pulses

n_2 is the number of t_2 pulses

n_3 is the number of t_3 pulses


Test Data: Calculation of Duty Cycle

Sub Pulse	Duration (ms)	Number	On Time (ms)
1	51.85	1	51.85
Total On Time (ms)			51.85
Period (ms)			100
Duty Cycle (%)			52%
Cor Factor (dB)			-5.71

DUTY CYCLE

Test Data: 100 ms Number of Pulses Plot

Subpulse 1 = 51.85 ms

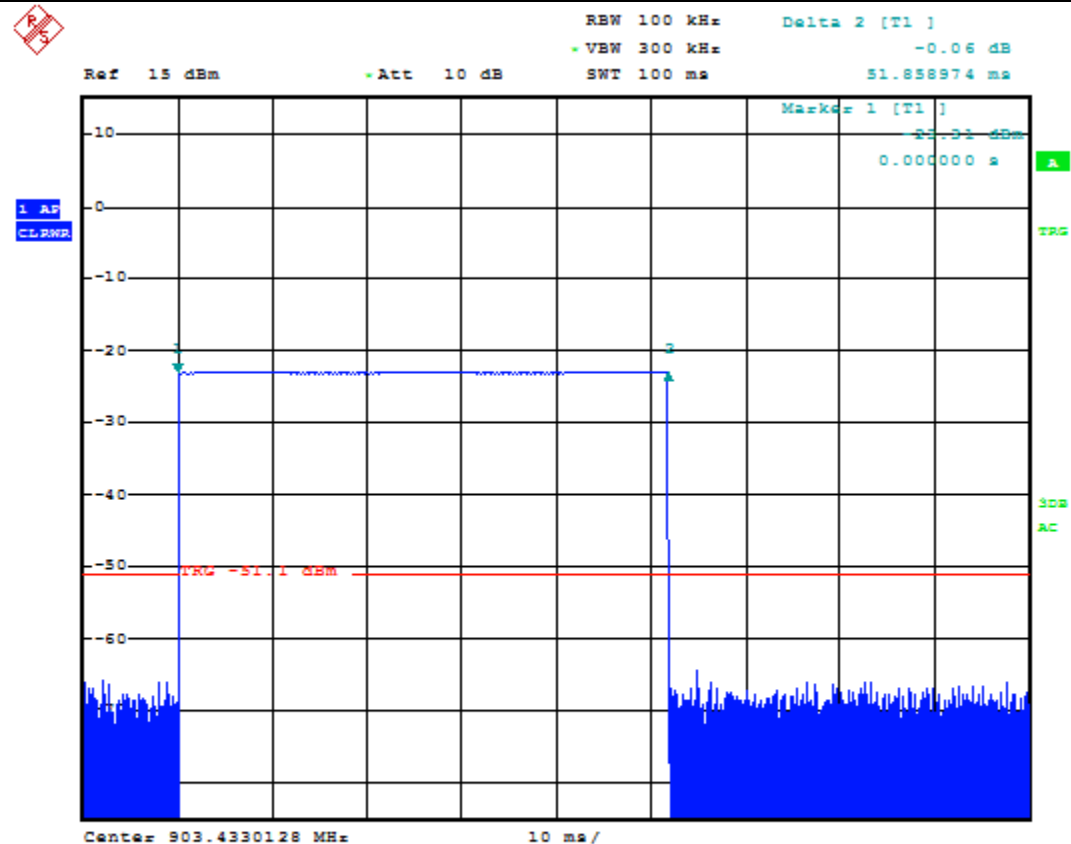


Date: 23.MAY.2018 15:23:11

DUTY CYCLE

Test Data: SubPulse 1 Duration Plot

Subpulse 1 Duration =??

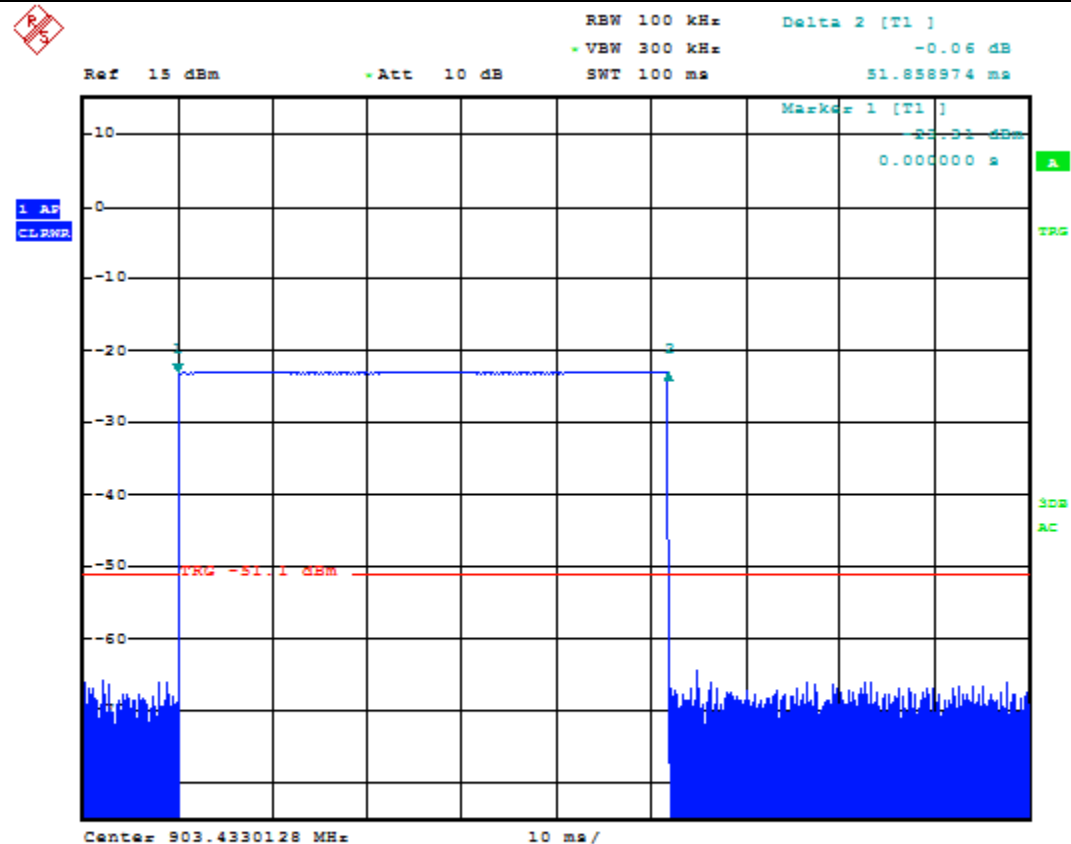

Date: 23.MAY.2018 15:23:11

RADIATION EMISSIONS:

FCC Rules Part No.: 15.231(b), 15.209 (a), 15.205(a) (b)

IC RSS: 210 § A1.1 Table A, RSS-Gen § 8.9, & 8.10

Requirements:

Fundamental and Harmonics not in Restricted Bands		
Fundamental Frequency (MHz)	Field Strength of Fundamental (dBμV/m)	Field Strength of Harmonics and Spurious Emissions (dBμV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94(12500)	61.94

Restricted Band Emissions	
Frequency (MHz)	Limits
9 – 490 kHz	2400/F (kHz) μV/m @ 300 meters
490 – 1705 kHz	24000/F (kHz) μV/m @ 30 meters
1705 – 30 MHz	29.54 dBμV/m measured @ 30 meters
30 – 88	40.0 dBμV/m measured @ 3 meters
88 – 216	43.5 dBμV/m measured @ 3 meters
216 – 960	46.0 dBμV/m measured @ 3 meters
Above 960	54.0 dBμV/m measured @ 3 meters

No fundamental frequency is allowed in the restricted bands.

No harmonic or spurious emissions may exceed the level of the fundamental carrier frequency.

RADIATION EMISSIONS:

Fundamental Emission Limit Formula:

1) For the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F)-6136.3636$;

2) For the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F)-7083.3333$.

Where F is the fundamental emission frequency in MHz

Example Calculation of limit @ 433.92 MHz:

$$41.6667 (433.9) - 7083.3333 = 10,995.85 \text{ } \mu\text{V/m}$$

$$20\log (10,995.85) = 80.82 \text{ dBuV/m}$$

Harmonics and Spurious Emissions Limit:

1) 20 dBc for all emissions outside of restricted bands

2) General limits of 15.209(a) & RSS-Gen for emissions inside restricted bands

3 Meter Field Strength Limit for this EUT:

Fund Freq (MHz)	Fund Limit (dBuV/m)	Harm & Spur (dBuV/m)	Restricted Bands
903.433	89.70	69.70	Limit of 15.209

RADIATION EMISSIONS:

Test Method: ANSI C63.10 § 6.3 – 6.6 Radiated Emissions Unlicensed Devices

The EUT was placed on a table with dimensions of 1m by 1.5m, 80 cm high below 1 GHz and 150 cm high above 1 GHz. The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 9 KHz or the lowest frequency generated to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

Formula of Conversion Factors:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq. MHz	Meter Reading dB μ V	ACF dB/m	Cable Loss dB	Field Strength dB μ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

RADIATION EMISSIONS:

Test Data: Emissions from 9 KHz to the 10th harmonic of the Fundamental

Tuned Freq (MHz)	Emission Frequency (MHz)	Meter Reading (dBUV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBUV/m)	Margin (dB)	Limit (dBUV/m)
902.38	69.23	2.26	V	0.984	5.920	3.454	66.246	69.700
902.38	103.55	2.57	H	1.174	10.650	8.684	61.016	69.700
902.38	257.26	3.33	H	1.977	12.530	12.127	57.573	69.700
902.38	535.47	2.98	V	2.775	17.400	17.445	52.255	69.700
902.38	902.38	46.58	V	3.542	21.900	66.312	23.388	89.700
902.38	902.38	56.80	H	3.542	21.900	76.532	13.168	89.700
902.38	1230.76	14.55	H	4.086	29.220	42.146	11.854	54.000
902.38	5009.60	12.78	H	8.451	34.040	49.561	4.439	54.000
902.38	5283.60	12.85	V	8.714	34.370	50.224	3.776	54.000
902.38	7216.30	11.84	V	10.120	35.680	51.930	2.070	54.000
902.38	7649.00	12.10	V	10.449	35.760	52.599	1.401	54.000
903.42	68.14	2.41	H	0.975	5.900	3.575	66.125	69.700
903.42	76.85	2.78	V	1.052	7.560	5.682	64.018	69.700
903.42	716.24	2.32	H	3.142	20.180	19.932	49.768	69.700
903.42	903.42	56.75	H	3.543	21.940	76.523	13.177	89.700
903.42	903.42	46.70	V	3.543	21.940	66.473	23.227	89.700
903.42	985.47	4.46	V	3.717	24.000	26.467	43.233	69.700
903.42	1663.40	15.34	H	4.728	28.580	42.938	11.062	54.000
903.42	4403.80	35.45	H	7.954	33.800	51.494	2.506	54.000
903.42	7000.00	12.44	H	10.010	35.730	52.470	1.530	54.000
903.42	8456.70	12.34	V	11.027	35.730	53.387	0.613	54.000
903.42	9405.65	12.39	V	11.552	36.480	54.712	-0.712	54.000

* -Denotes restricted bands which must comply with limits 15.209

Note: Emissions that are 20 dB below the limit are not required to be reported.

OCCUPIED BANDWIDTH

FCC Rules Part No.: 15.231(C), & 15.215(c)

IC RSS: 210 § A1.1.3, & GEN § 6.6

Requirements:

The bandwidth of the emission shall fall completely inside the band of operation, and be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz.

For FCC compliance the Bandwidth is determined at the points 20 dB down from the modulated carrier.

For IC compliance the Bandwidth is determined as the 99% power bandwidth.

Test Method: ANSI C63.10 § 6.9.2 Occupied bandwidth Relative procedure
ANSI C63.10 § 6.9.3 Occupied bandwidth 99% Power

Test Data: Occupied Bandwidth Measurement Table


Tuned Frequency (MHz)	Limit (KHz)	Measured 20 dB BW (KHz)	Measured 99% BW (KHz)
902.375	2255.9375	22.81	29.03
Margin (KHz)		2233.1275	2226.9075

Tuned Frequency (MHz)	Limit (KHz)	Measured 20 dB BW (KHz)	Measured 99% BW (KHz)
903.425	2258.5625	22.46	25.57
Margin (KHz)		2236.1025	2232.9925

Results Meet Requirement

OCCUPIED BANDWIDTH

Test Data: 902.375 MHz 20 dB Occupied Bandwidth Plot

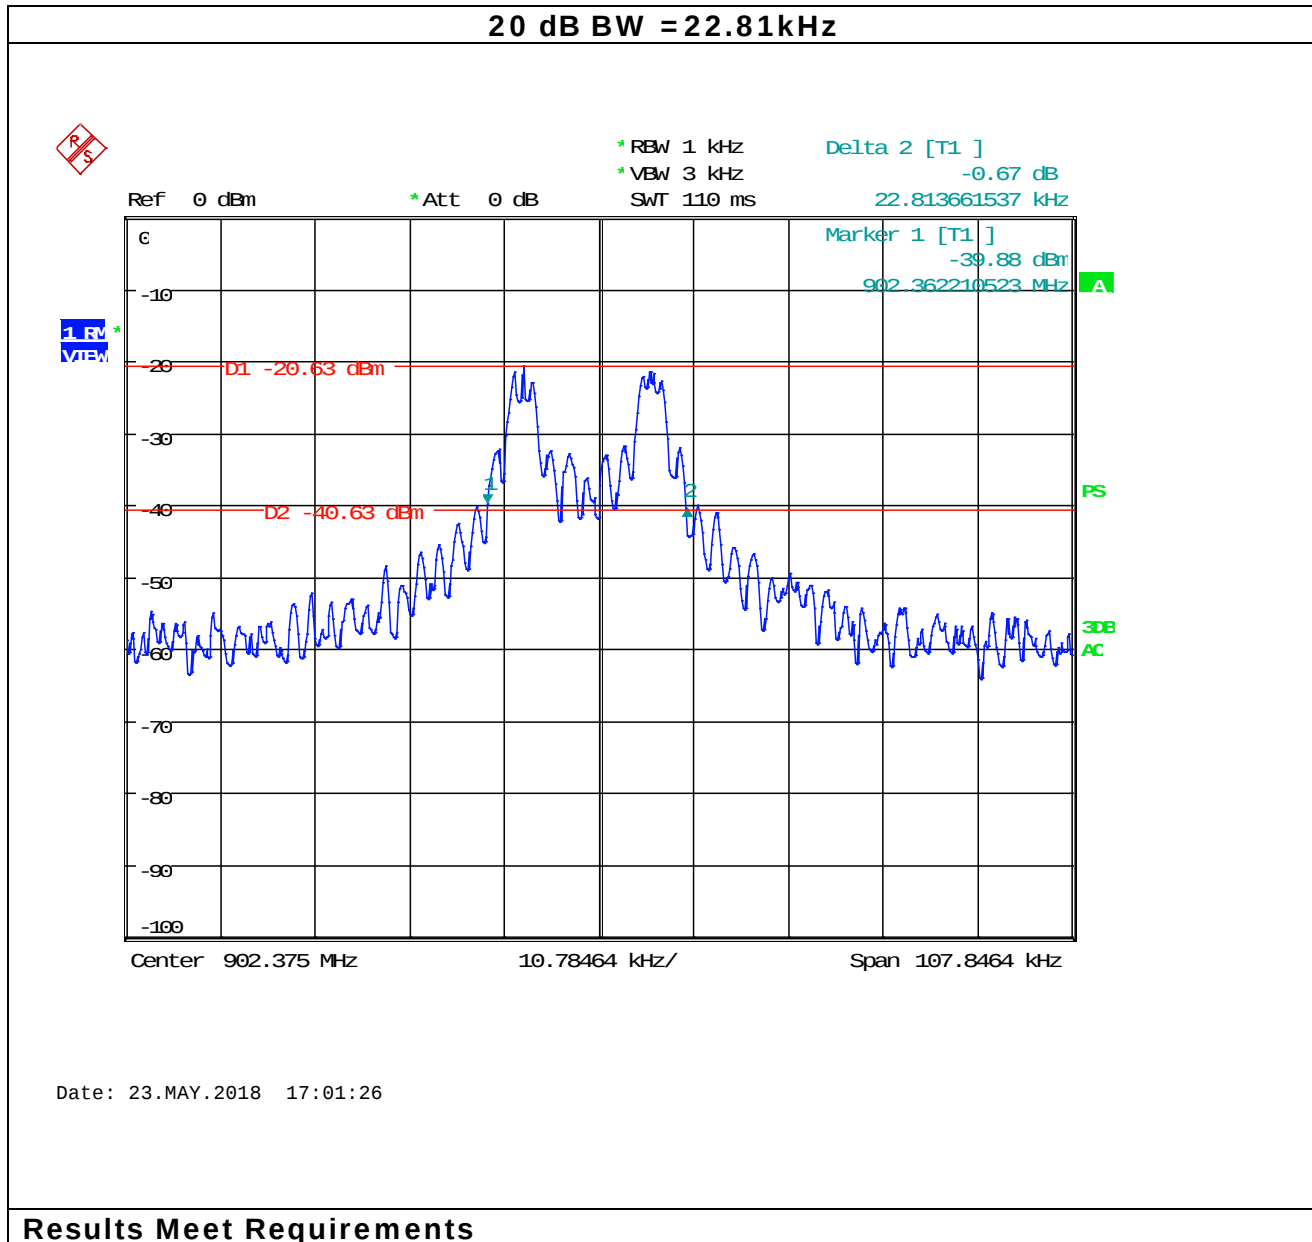


Applicant: ENTERPRISE ELECTRONICS, L.L.C.
 FCC ID: QV4-LRL071
 IC: 4545A-LRL071
 Report: 723UT18TestReport_Rev2

[Table of Contents](#)


OCCUPIED BANDWIDTH

Test Data: 902.375 MHz 99 % Occupied Bandwidth Plot

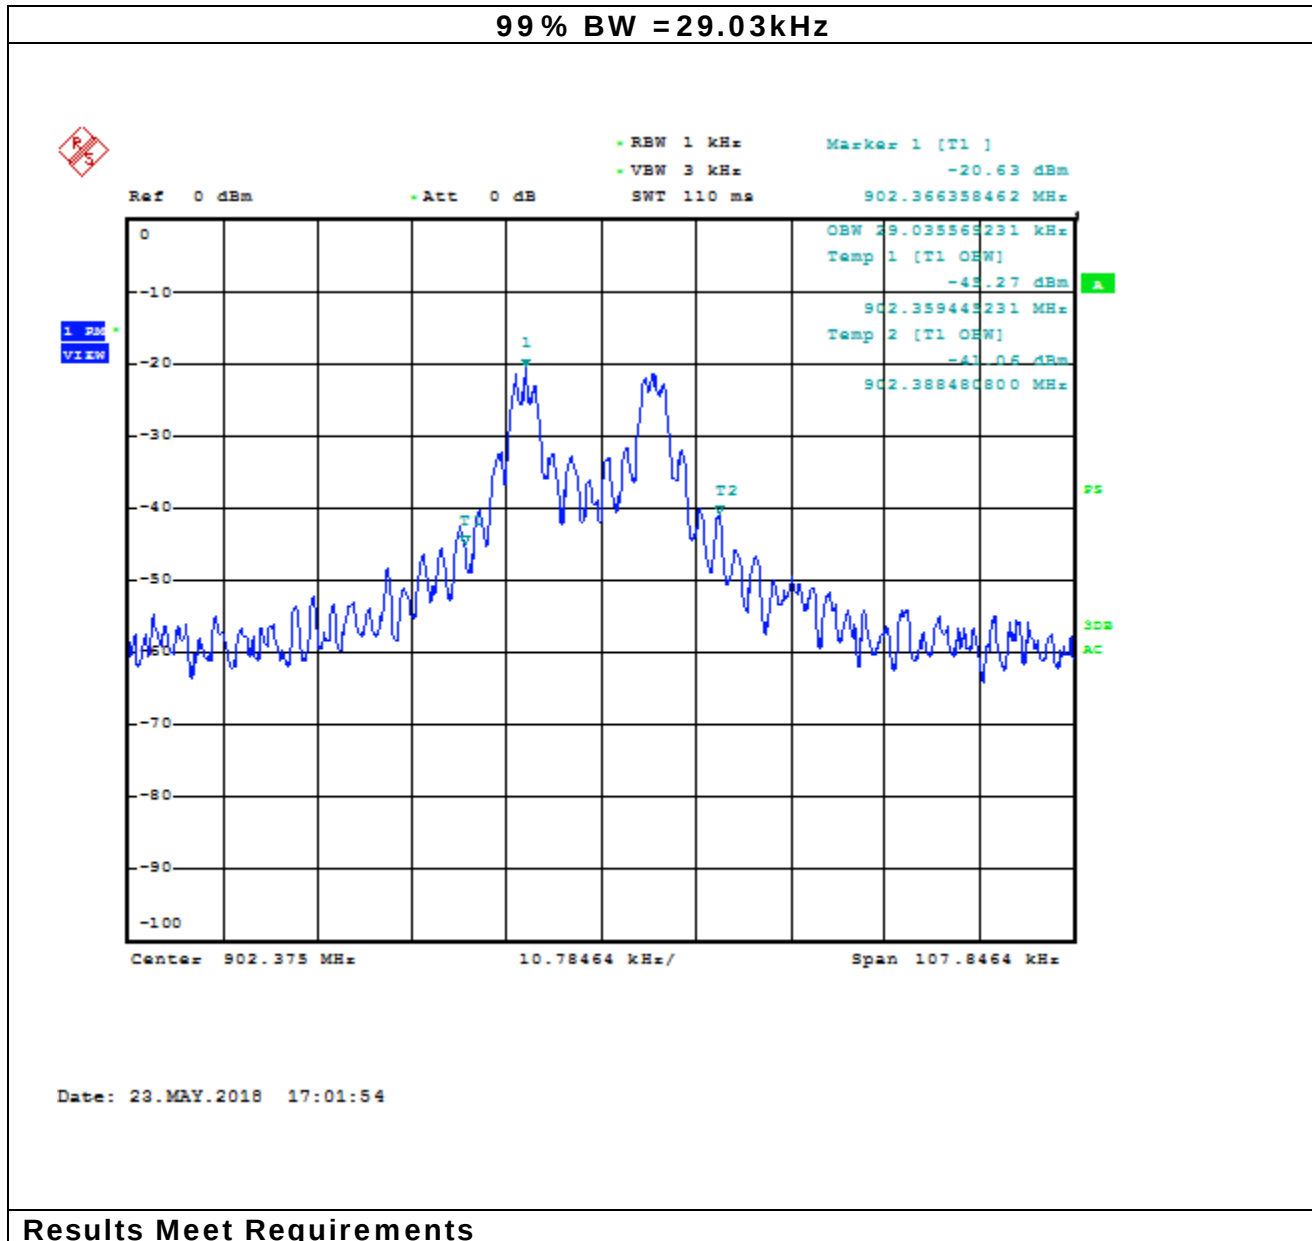


OCCUPIED BANDWIDTH

Test Data: 903.425 MHz 20 dB Occupied Bandwidth Plot

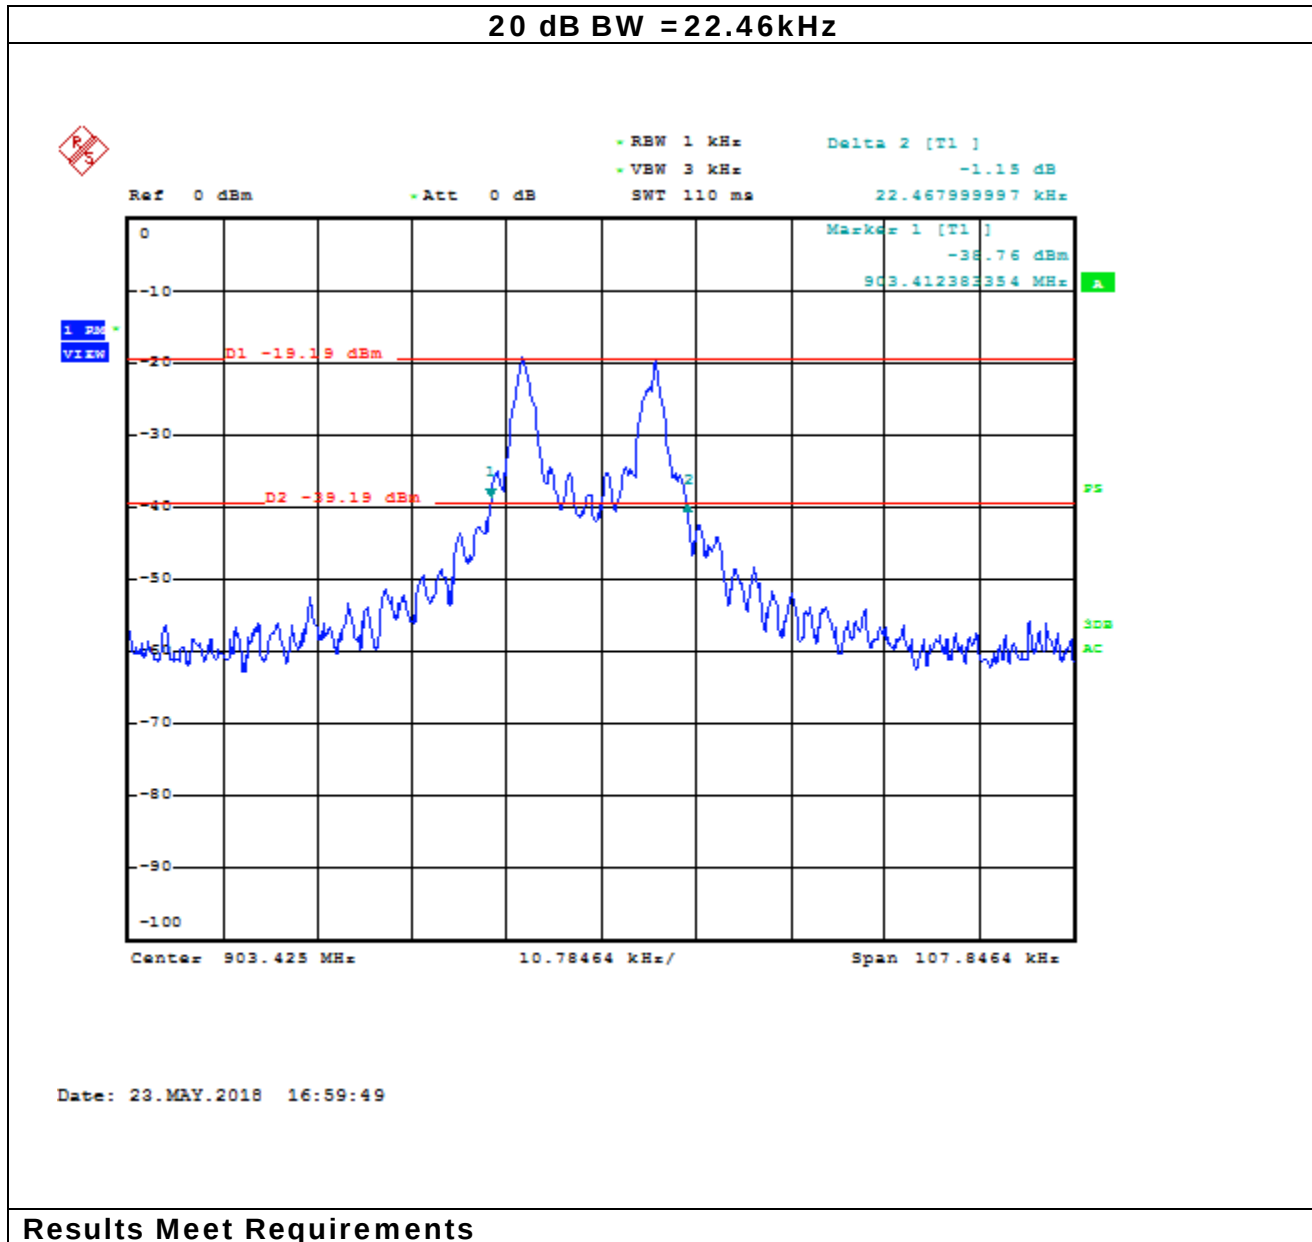

OCCUPIED BANDWIDTH

Test Data: 903.425 MHz 99 % Occupied Bandwidth Plot

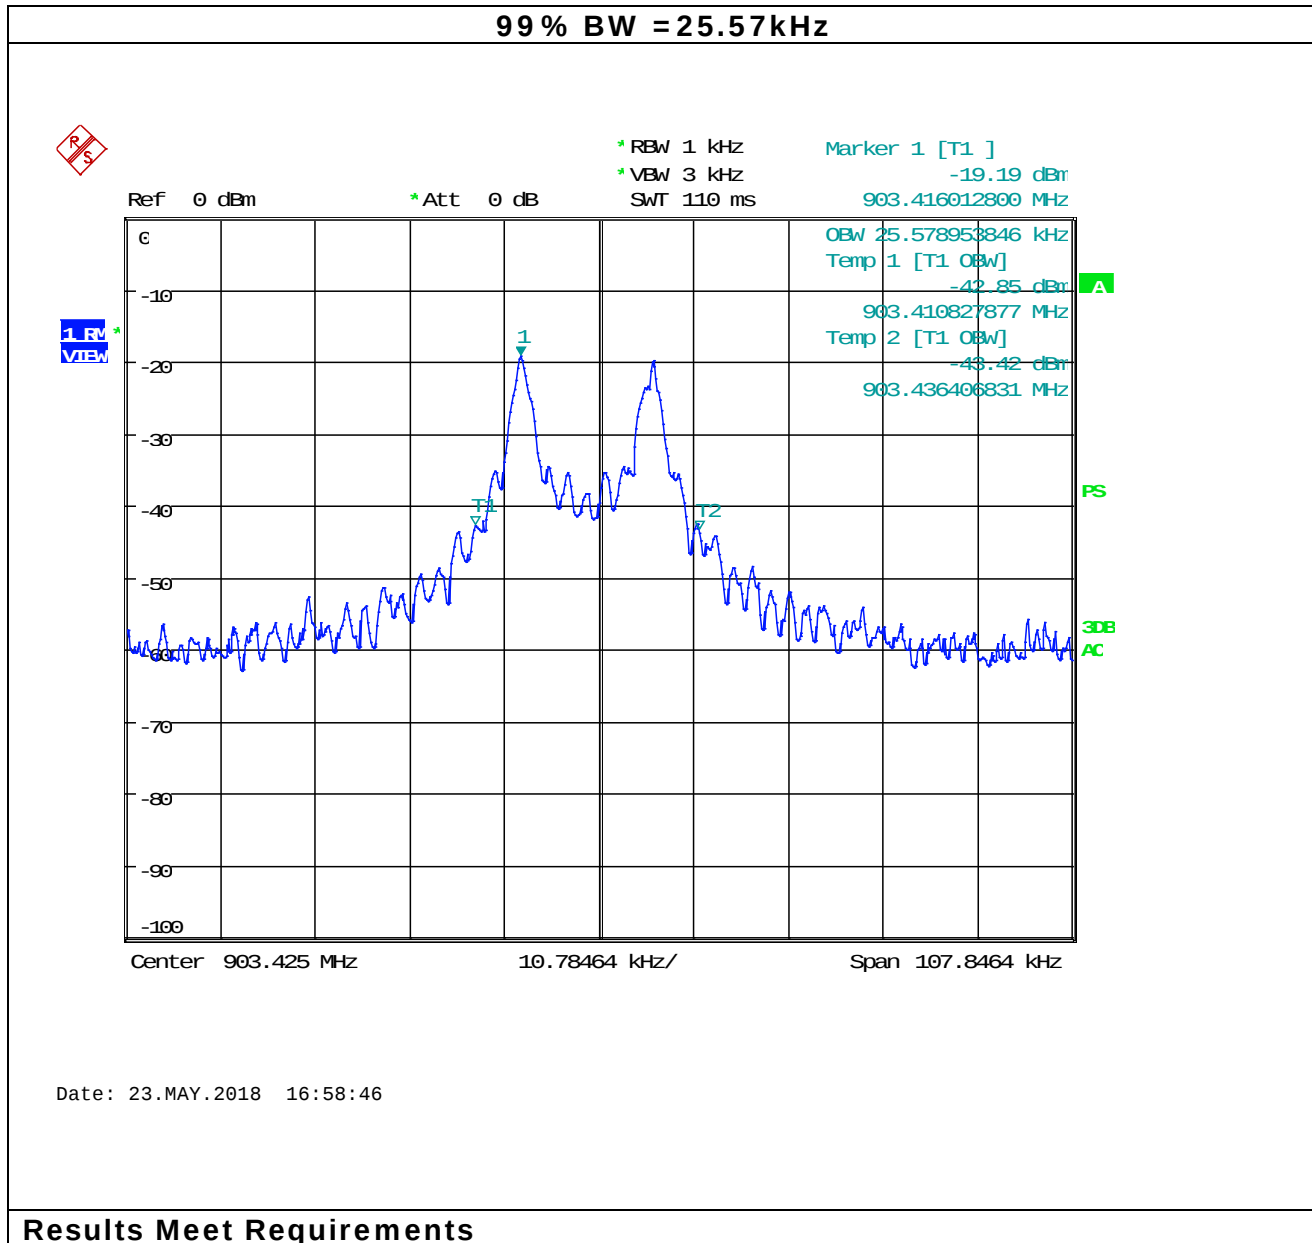

Applicant: ENTERPRISE ELECTRONICS, L.L.C.
 FCC ID: QV4-LRL071
 IC: 4545A-LRL071
 Report: 723UT18TestReport_Rev2

[Table of Contents](#)

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/19
Antenna: Log- Periodic 1122	Electro-Metrics	LPA-25	1122	07/26/17	07/26/19
LISN (Secondary)	Electro-Metrics	EM-7820	2682	N/A	N/A
CHAMBER	Panashield	3M	N/A	12/31/17	12/31/19
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	03/01/17	03/01/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Antenna: Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/11/19
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/19
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244- 01; KMKM- 0670-00; KFKF-0198-01	08/09/16	08/09/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

State of the measurement Uc – TEI Tab Lic Devices Uc 170428

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	± 2.65 %	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	± 1.88 %	
Within 6kHz and 25kHz of audio Freq.	± 2.04 %	
Adjacent channel power	± 1.47 dB	(1)
Transient Frequency Response	± 1.88 %	
Temperature	$\pm 1.0^{\circ}$ C	(1)
Humidity	± 5.0 %	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

END OF TEST REPORT