




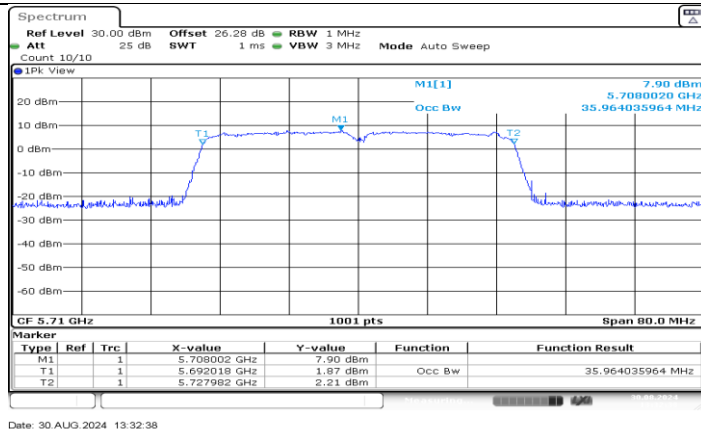

11N40SISO_Ant1_5710

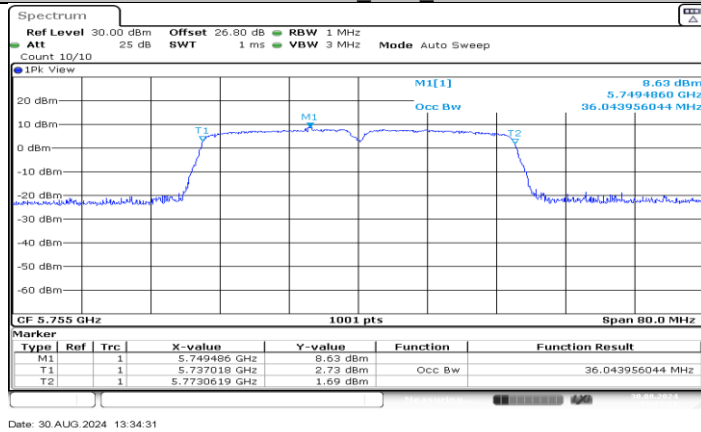

11N40SISO_Ant1_5755

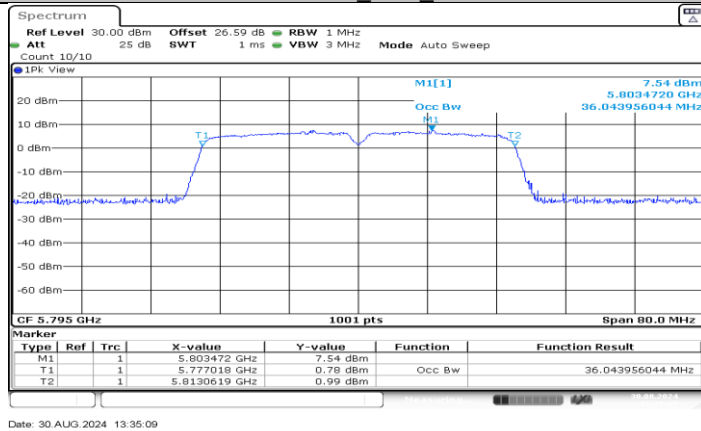


11N40SISO_Ant1_5795


11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.32	5711.80	5728.12	≥0.5	PASS
		5720 UNII-3	3.12	5725	5728.12	≥0.5	PASS
		5745	16.32	5736.80	5753.12	≥0.5	PASS
		5785	16.40	5776.76	5793.16	≥0.5	PASS
		5825	16.32	5816.80	5833.12	≥0.5	PASS
11N20SISO	Ant1	5720	17.04	5711.44	5728.48	≥0.5	PASS
		5720 UNII-3	3.48	5725	5728.48	≥0.5	PASS
		5745	17.56	5736.20	5753.76	≥0.5	PASS
		5785	17.28	5776.44	5793.72	≥0.5	PASS
		5825	17.56	5816.20	5833.76	≥0.5	PASS
11N40SISO	Ant1	5710	35.20	5692.40	5727.60	≥0.5	PASS
		5710 UNII-3	2.6	5725	5727.60	≥0.5	PASS
		5755	35.12	5737.40	5772.52	≥0.5	PASS
		5795	35.20	5777.40	5812.60	≥0.5	PASS

11.3.2. Test Graphs

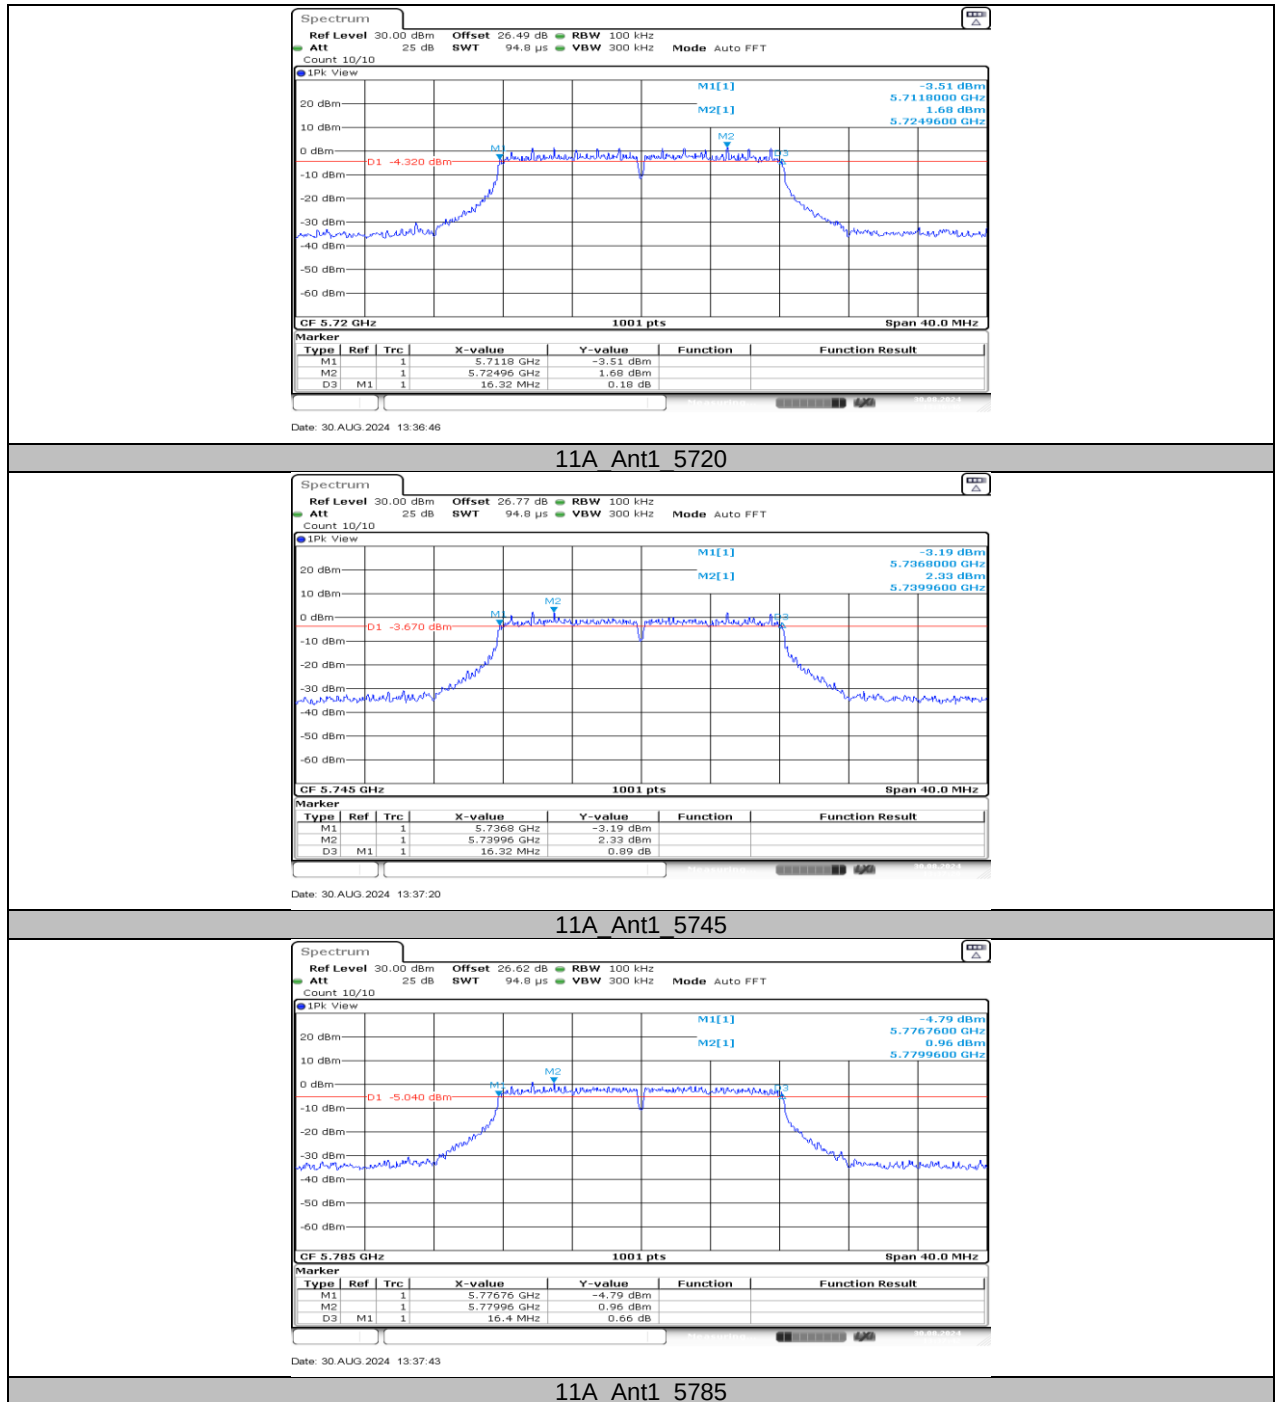


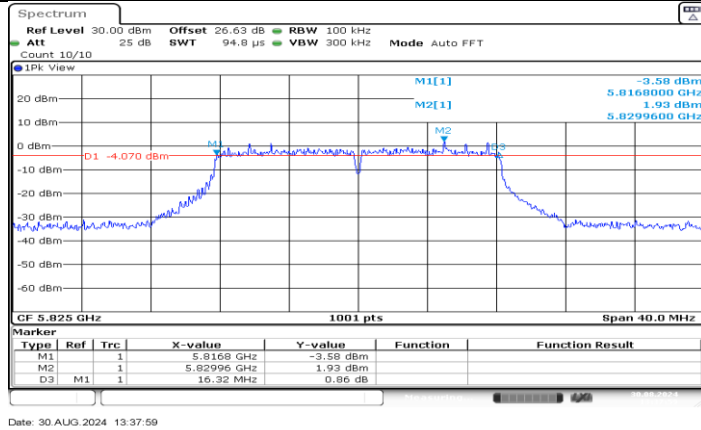


11A_Ant1_5825

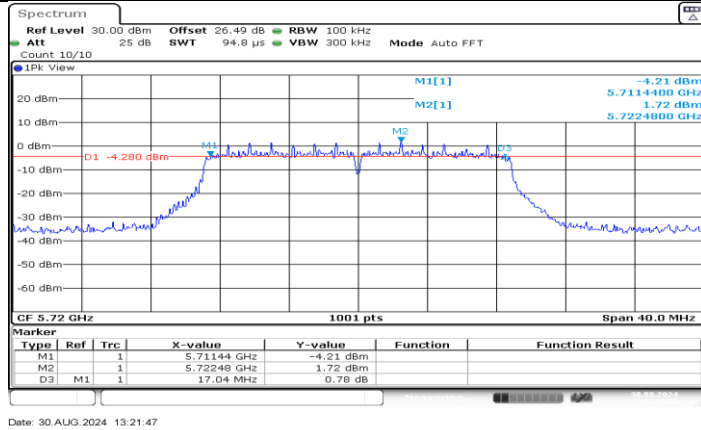


11N20SISO_Ant1_5720

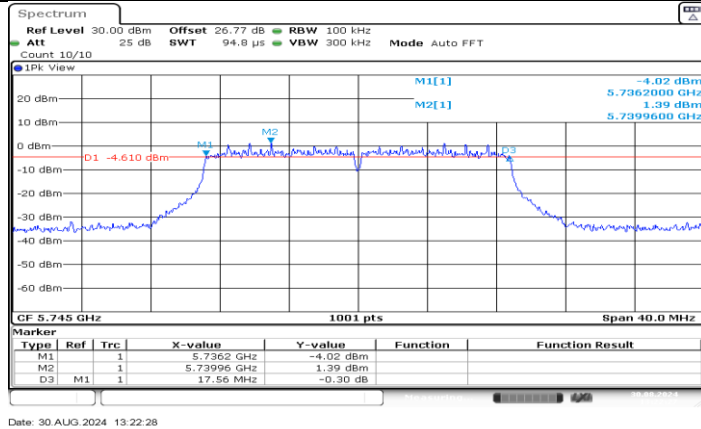


11N20SISO_Ant1_5745

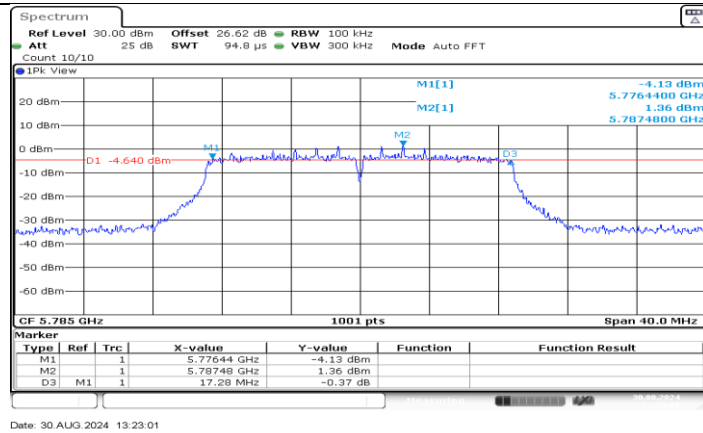


11N20SISO_Ant1_5785

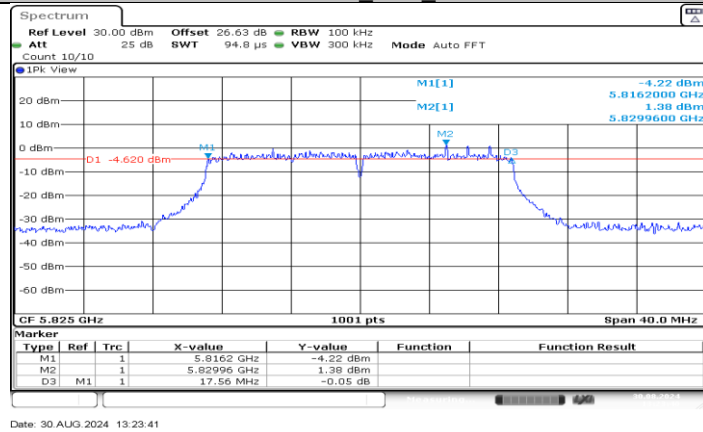

11N20SISO_Ant1_5825

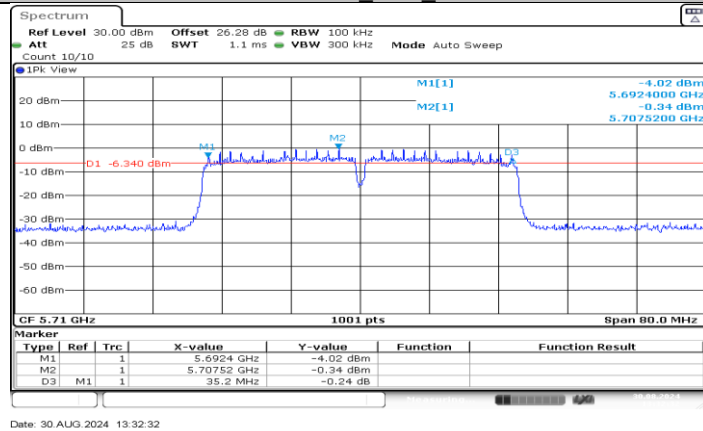

11N40SISO_Ant1_5710

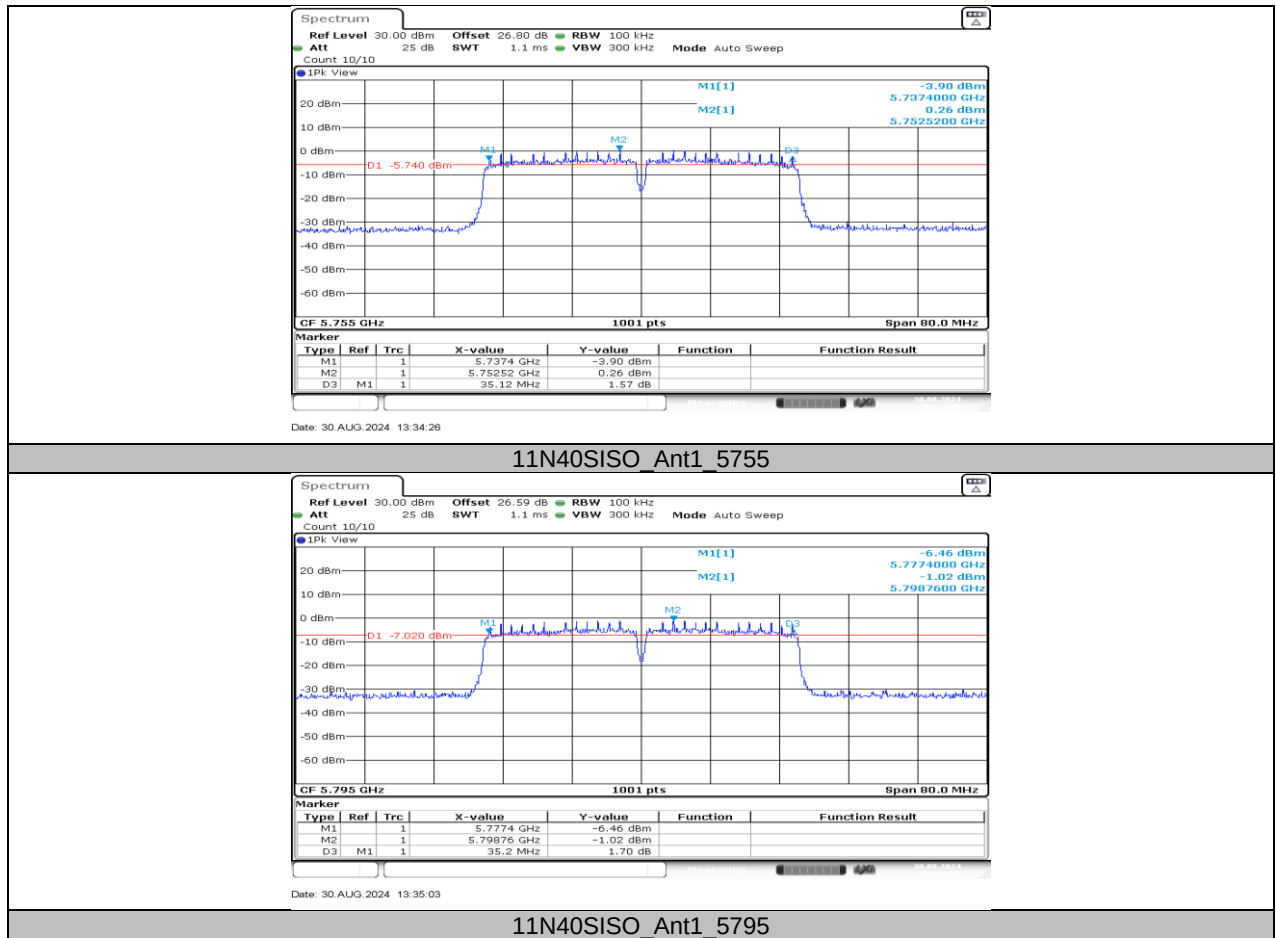

11.4. APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER


11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	ISED Limit [dBm]	EIRP [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	14.32	≤23.98	---	18.70	≤22.11	PASS
		5200	14.42	≤23.98	---	18.80	≤22.09	PASS
		5240	14.24	≤23.98	---	18.62	≤22.10	PASS
		5260	14.35	≤23.98	≤23.45	18.73	≤29.45	PASS
		5280	14.39	≤23.98	≤23.47	18.77	≤29.47	PASS
		5320	14.30	≤23.98	≤23.41	18.68	≤29.41	PASS
		5500	14.12	≤23.98	≤23.38	18.50	≤29.38	PASS
		5580	14.18	≤23.98	≤23.39	18.56	≤29.39	PASS
		5700	14.15	≤23.98	≤23.44	18.53	≤29.44	PASS
		5720 UNII-2C	13.99	≤23.08	≤22.47	18.37	≤28.47	PASS
		5720 UNII-3	7.60	≤30.00	≤30.00	11.98	---	PASS
		5745	14.25	≤30.00	≤30.00	18.63	---	PASS
		5785	14.22	≤30.00	≤30.00	18.60	---	PASS
		5825	14.18	≤30.00	≤30.00	18.56	---	PASS
11N20SISO	Ant1	5180	14.09	≤23.98	---	18.47	≤22.30	PASS
		5200	14.12	≤23.98	---	18.50	≤22.37	PASS
		5240	14.14	≤23.98	---	18.52	≤22.33	PASS
		5260	14.18	≤23.98	≤23.64	18.56	≤29.64	PASS
		5280	14.26	≤23.98	≤23.67	18.64	≤29.67	PASS
		5320	14.25	≤23.98	≤23.63	18.63	≤29.63	PASS
		5500	14.10	≤23.98	≤23.64	18.48	≤29.64	PASS
		5580	14.21	≤23.98	≤23.63	18.59	≤29.63	PASS
		5700	14.32	≤23.98	≤23.65	18.70	≤29.65	PASS
		5720 UNII-2C	14.14	≤23.14	≤22.57	18.52	≤28.57	PASS
		5720 UNII-3	7.69	≤30.00	≤30.00	12.07	---	PASS
		5745	14.38	≤30.00	≤30.00	18.76	---	PASS
		5785	14.24	≤30.00	≤30.00	18.62	---	PASS
		5825	14.19	≤30.00	≤30.00	18.57	---	PASS
11N40SISO	Ant1	5190	13.18	≤23.98	---	17.56	≤22.69	PASS
		5230	13.97	≤23.98	---	18.35	≤22.69	PASS
		5270	14.28	≤23.98	≤23.98	18.66	≤29.98	PASS
		5310	14.19	≤23.98	≤23.98	18.57	≤29.98	PASS
		5510	14.14	≤23.98	≤23.98	18.52	≤29.98	PASS
		5550	14.39	≤23.98	≤23.98	18.77	≤29.98	PASS
		5670	14.50	≤23.98	≤23.98	18.88	≤29.98	PASS
		5710 UNII-2C	14.09	≤23.98	≤23.98	18.47	≤29.98	PASS
		5710 UNII-3	1.96	≤30.00	≤30.00	6.34	---	PASS
		5755	14.33	≤30.00	≤30.00	18.71	---	PASS
		5795	14.26	≤30.00	≤30.00	18.64	---	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

11.4.2. Test Graphs

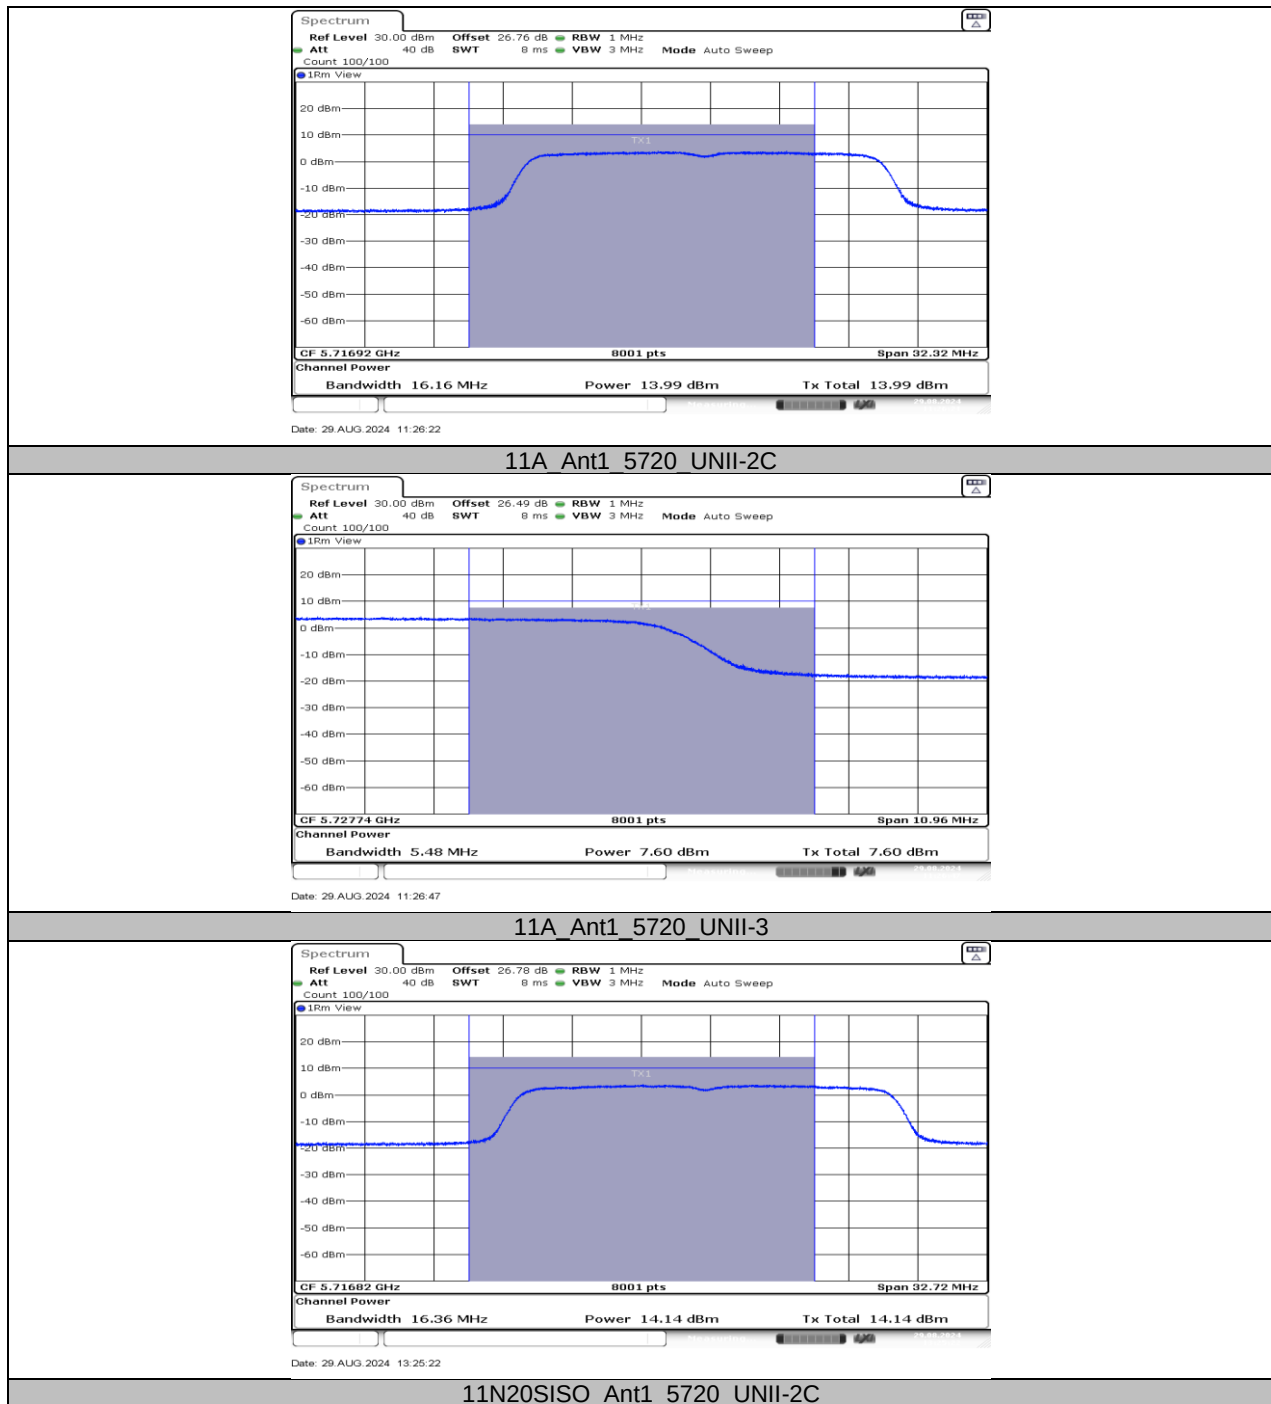


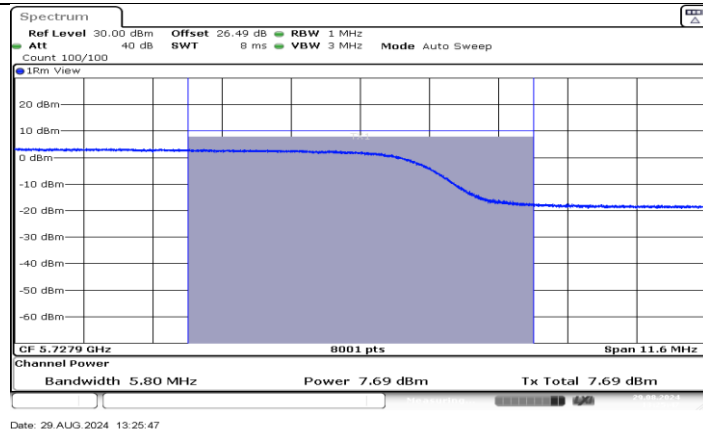

11N20SISO_Ant1_5720_UNII-3

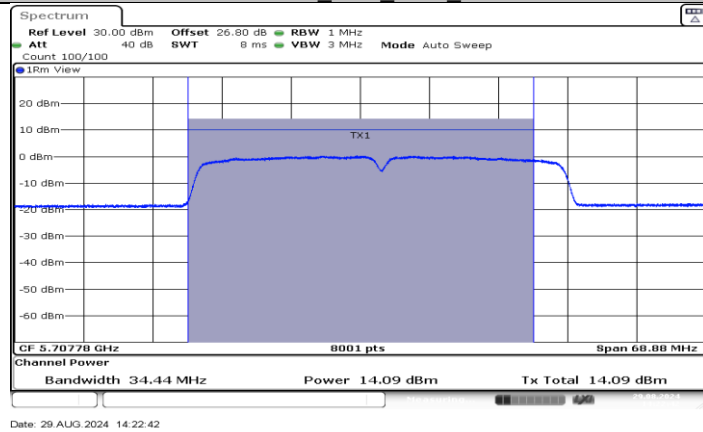

11N40SISO_Ant1_5710_UNII-2C

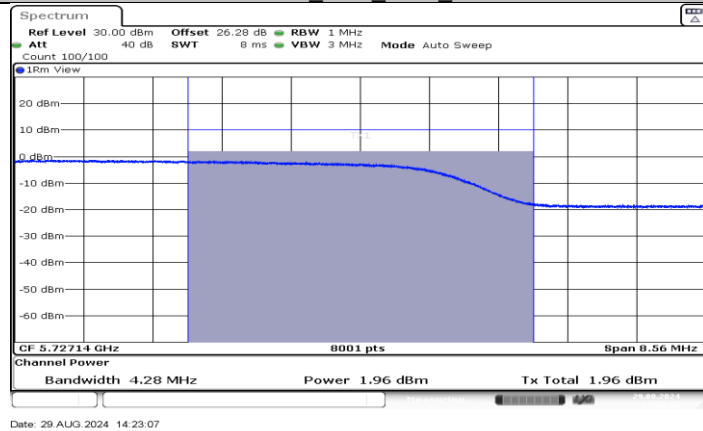

11N40SISO_Ant1_5710_UNII-3

11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY


11.5.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	EIRP [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	3.23	≤11.00	7.61	≤10.00	PASS
		5200	3.19	≤11.00	7.57	≤10.00	PASS
		5240	2.90	≤11.00	7.28	≤10.00	PASS
		5260	2.60	≤11.00	6.98	---	PASS
		5280	3.04	≤11.00	7.42	---	PASS
		5320	3.00	≤11.00	7.38	---	PASS
		5500	2.85	≤11.00	7.23	---	PASS
		5580	2.91	≤11.00	7.29	---	PASS
		5700	2.80	≤11.00	7.18	---	PASS
		5720_UNII-2C	4.01	≤11.00	8.39	---	PASS
		5720_UNII-3	0.79	≤30.00	5.17	---	PASS
		5745	0.01	≤30.00	4.39	---	PASS
		5785	0.00	≤30.00	4.38	---	PASS
		5825	-0.04	≤30.00	4.34	---	PASS
11N20SISO	Ant1	5180	2.63	≤11.00	7.01	≤10.00	PASS
		5200	2.69	≤11.00	7.07	≤10.00	PASS
		5240	2.75	≤11.00	7.13	≤10.00	PASS
		5260	2.66	≤11.00	7.04	---	PASS
		5280	2.93	≤11.00	7.31	---	PASS
		5320	2.77	≤11.00	7.15	---	PASS
		5500	2.73	≤11.00	7.11	---	PASS
		5580	3.09	≤11.00	7.47	---	PASS
		5700	2.79	≤11.00	7.17	---	PASS
		5720_UNII-2C	3.36	≤11.00	7.74	---	PASS
		5720_UNII-3	0.41	≤30.00	4.79	---	PASS
		5745	0.23	≤30.00	4.61	---	PASS
		5785	-0.30	≤30.00	4.08	---	PASS
		5825	-0.31	≤30.00	4.07	---	PASS
11N40SISO	Ant1	5190	-1.21	≤11.00	3.17	≤10.00	PASS
		5230	-0.38	≤11.00	4.00	≤10.00	PASS
		5270	-0.05	≤11.00	4.33	---	PASS
		5310	-0.22	≤11.00	4.16	---	PASS
		5510	-0.08	≤11.00	4.30	---	PASS
		5550	0.02	≤11.00	4.40	---	PASS
		5670	0.25	≤11.00	4.63	---	PASS
		5710_UNII-2C	0.11	≤11.00	4.49	---	PASS
		5710_UNII-3	-4.44	≤30.00	-0.06	---	PASS
		5755	-2.93	≤30.00	1.45	---	PASS
		5795	-2.43	≤30.00	1.95	---	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

11.5.2. Test Graphs

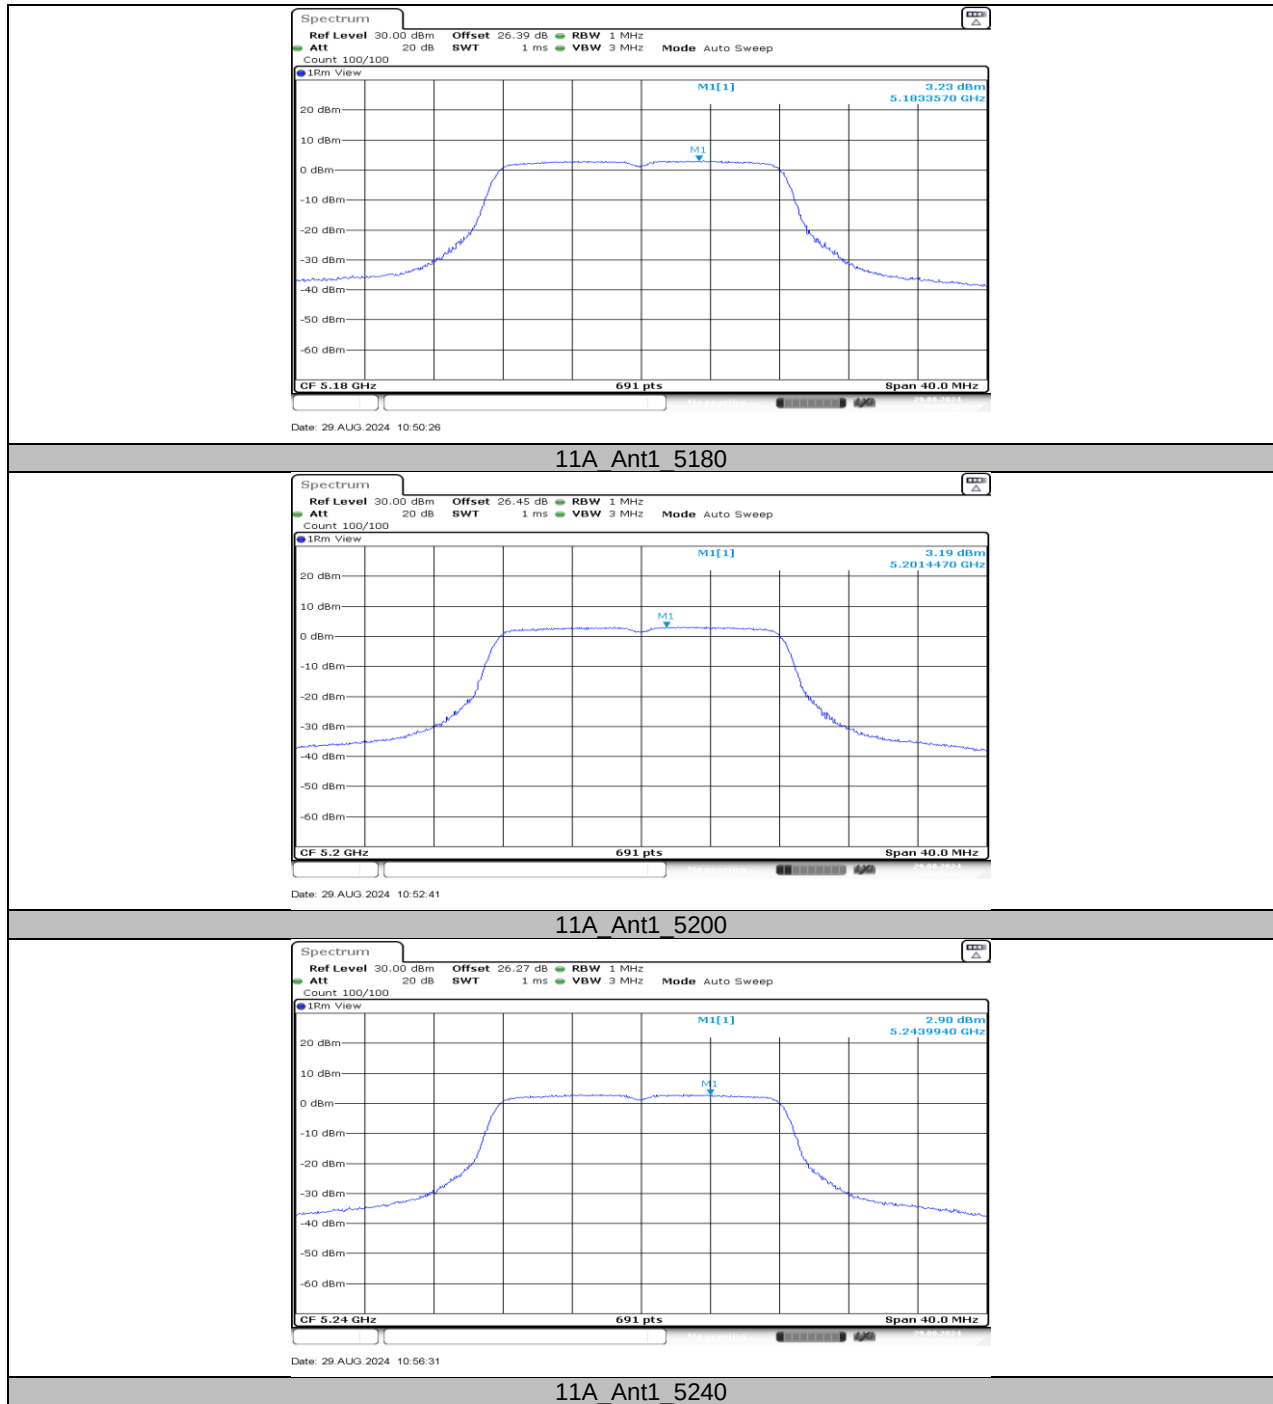


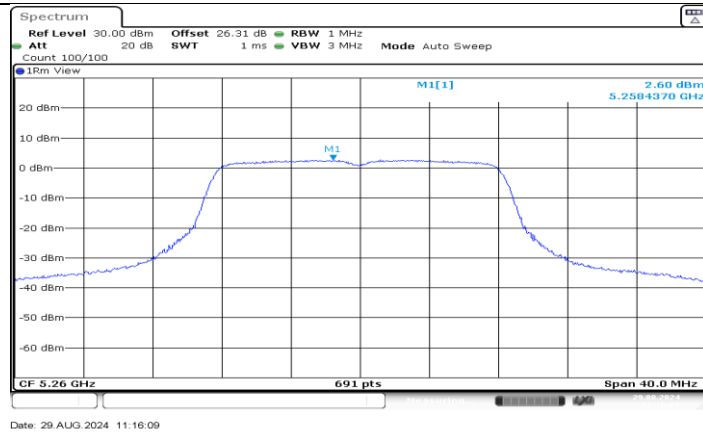


11A_Ant1_5260

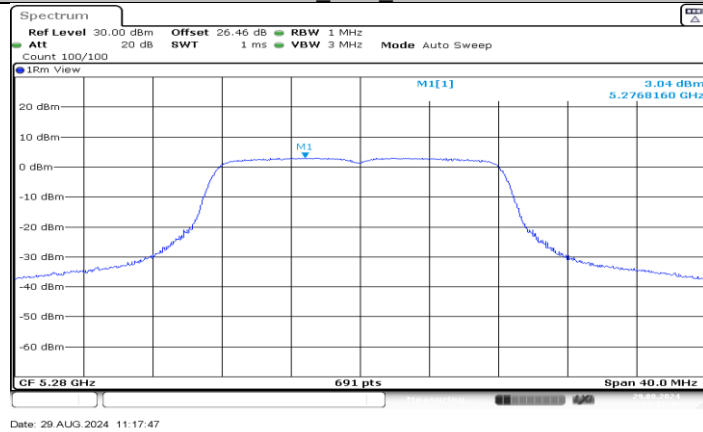


11A_Ant1_5280

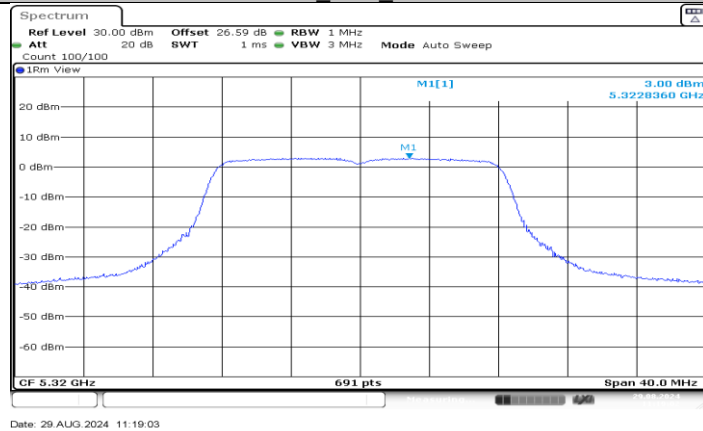


11A_Ant1_5320

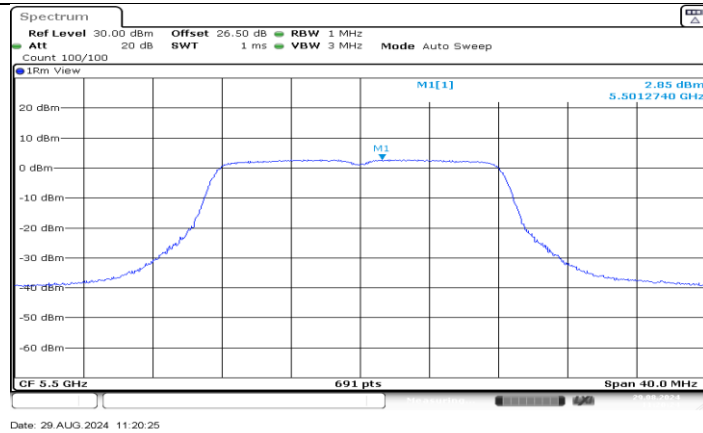


11A_Ant1_5500

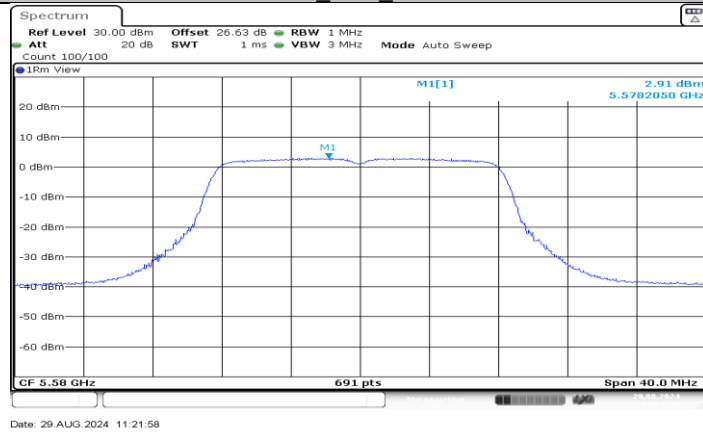


11A_Ant1_5580

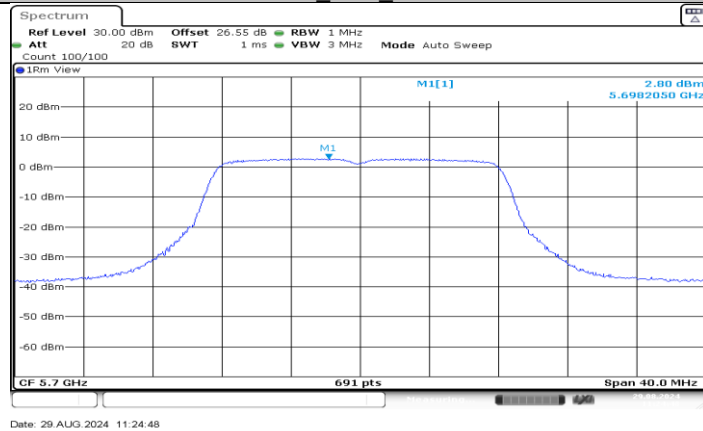


11A_Ant1_5700

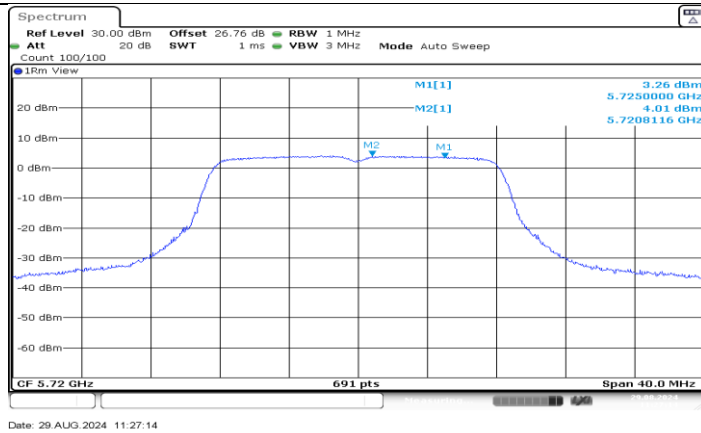


11A Ant1 5720 UNII-2C

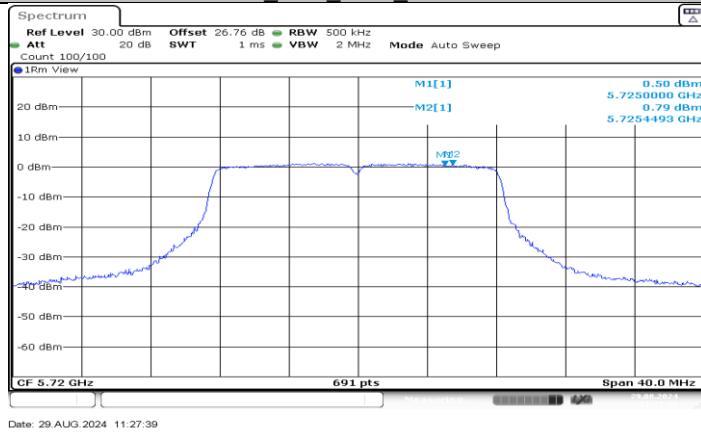


11A Ant1 5720 UNII-3

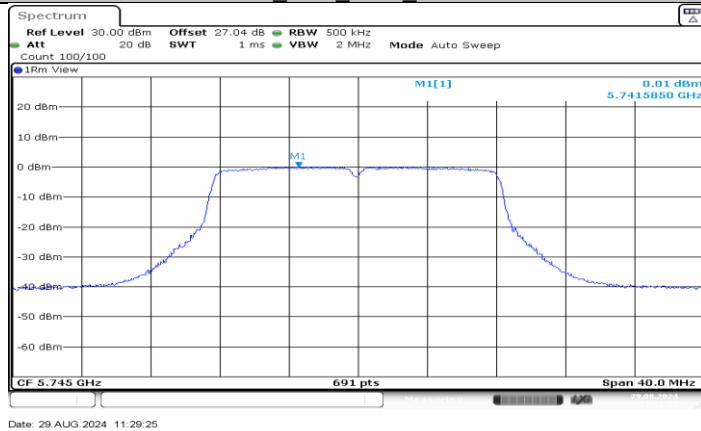


11A Ant1 5745

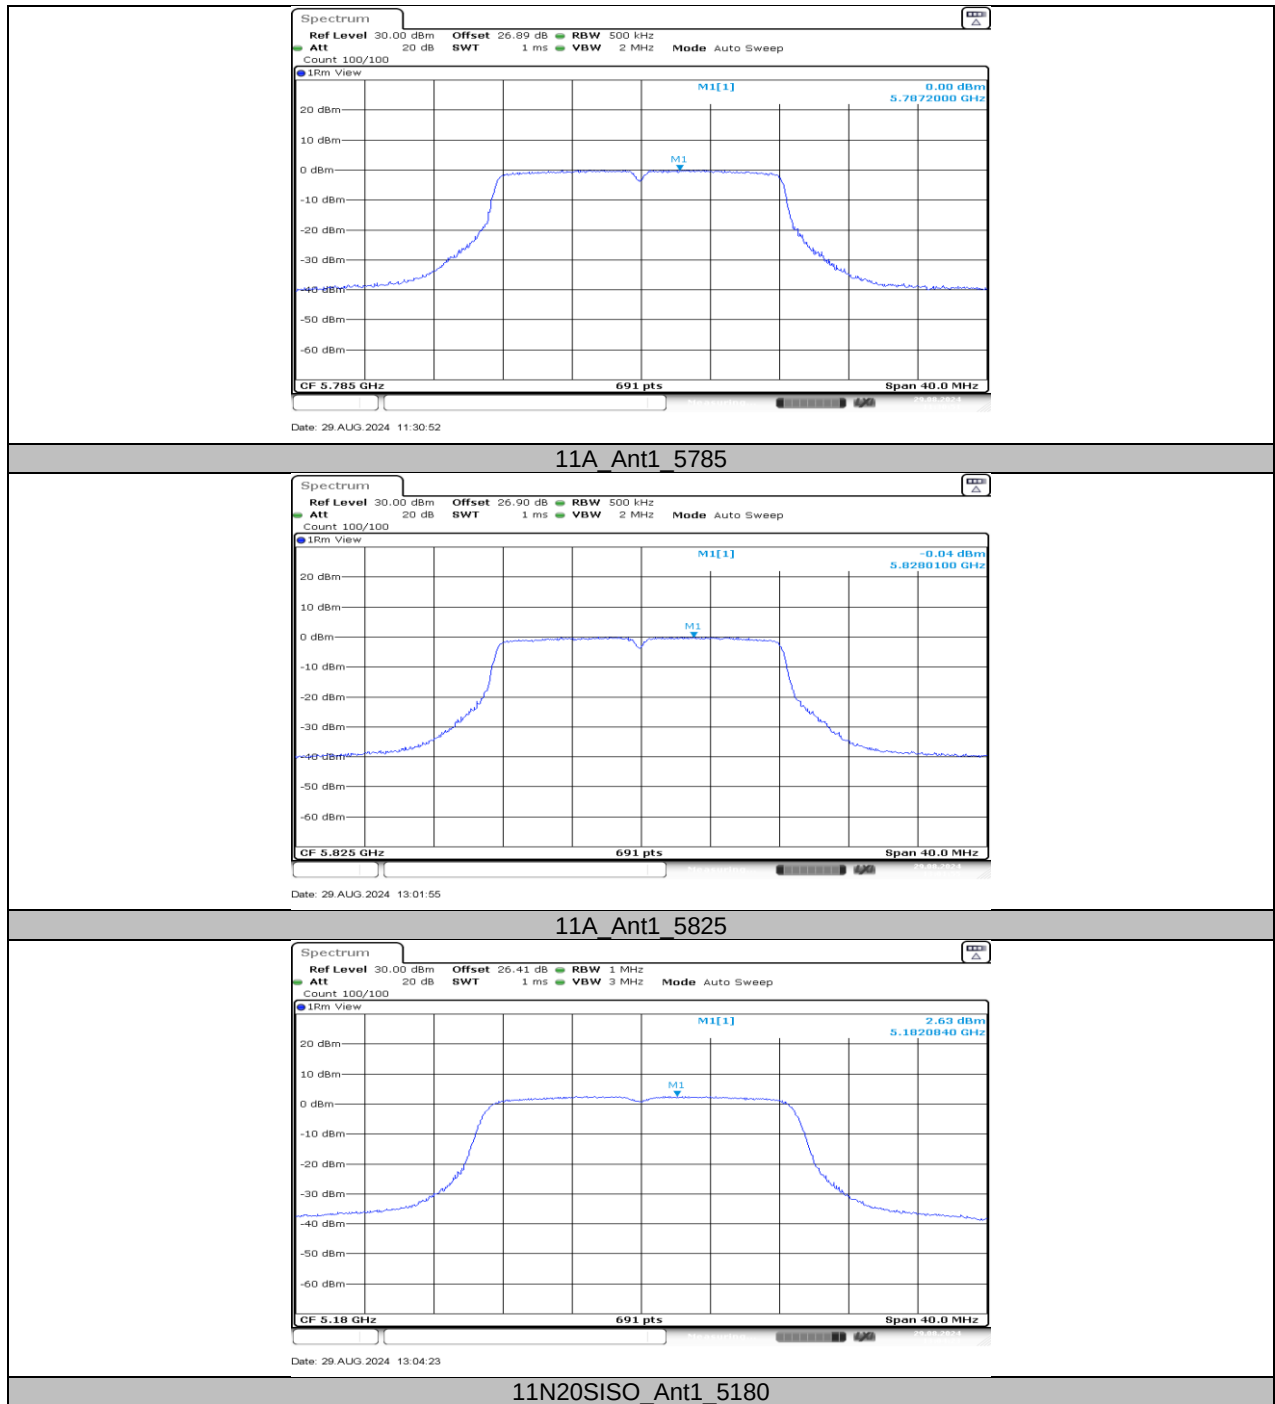


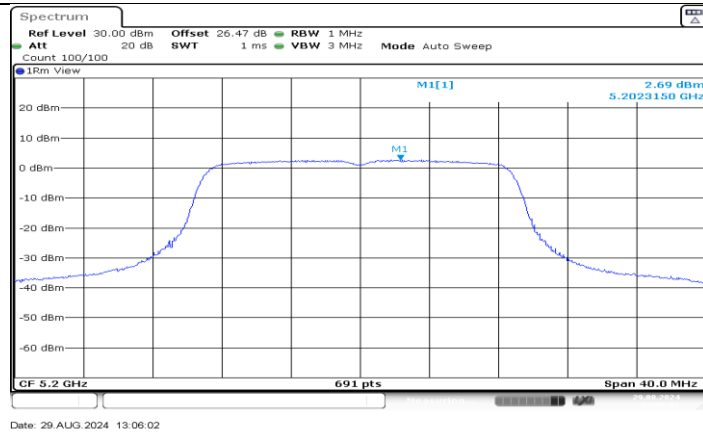


11N20SISO_Ant1_5200

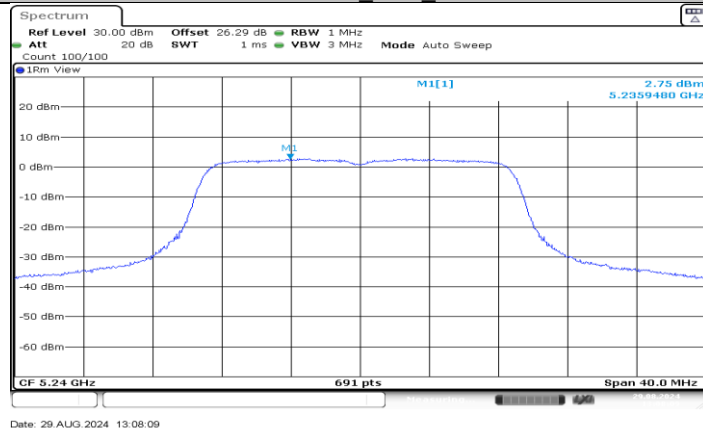


11N20SISO_Ant1_5240

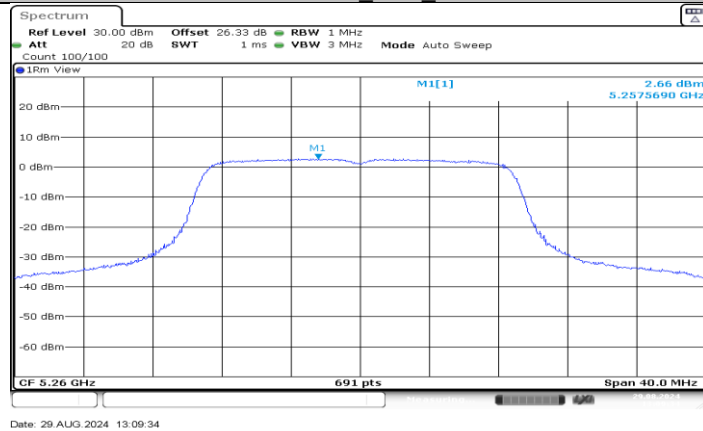


11N20SISO_Ant1_5260

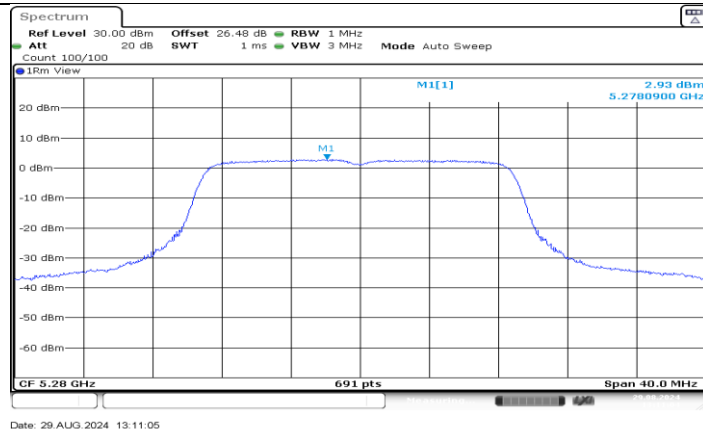


11N20SISO_Ant1_5280

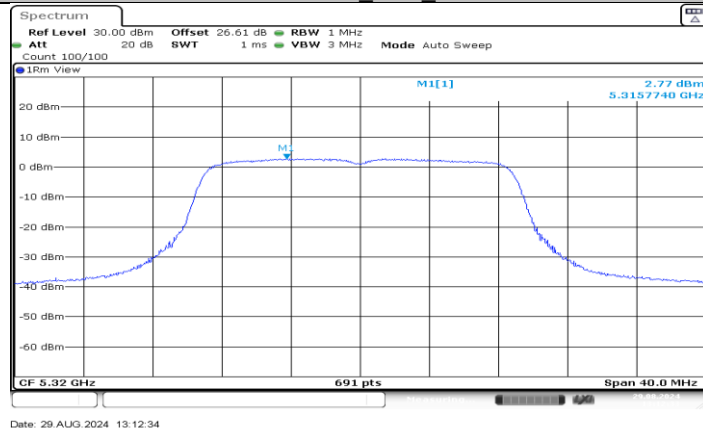


11N20SISO_Ant1_5320

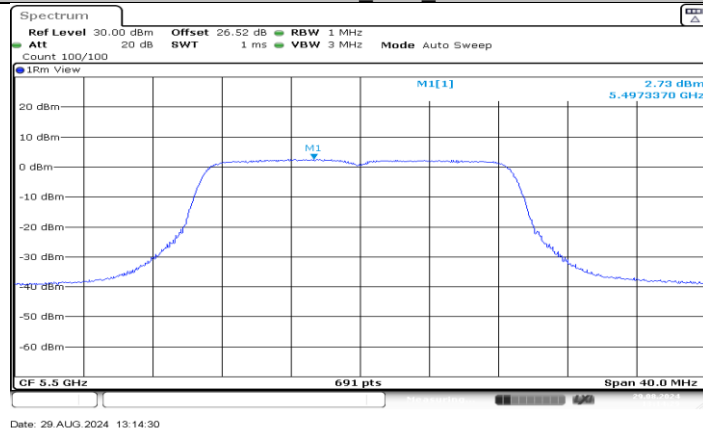


11N20SISO_Ant1_5500

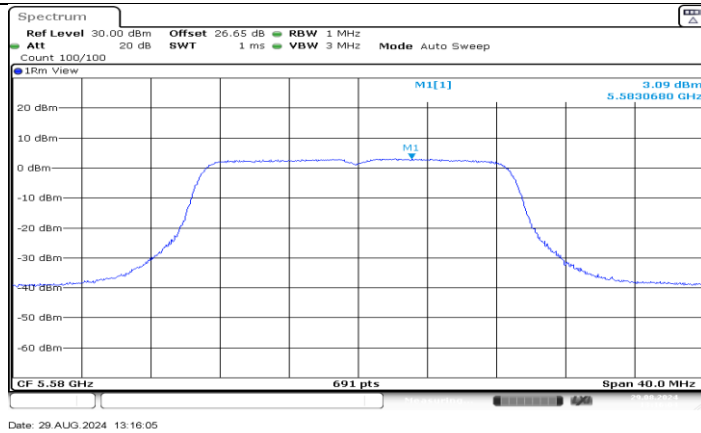


11N20SISO_Ant1_5580

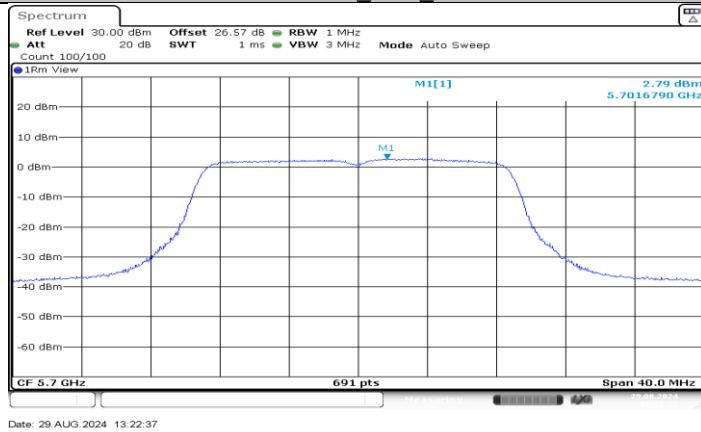


11N20SISO_Ant1_5700

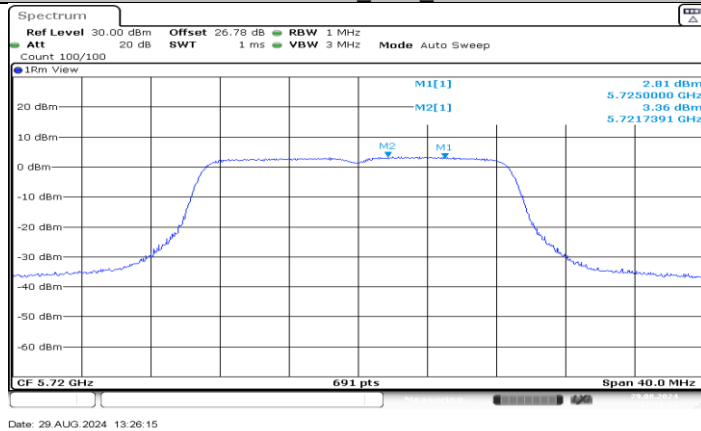


11N20SISO_Ant1_5720_UNII-2C

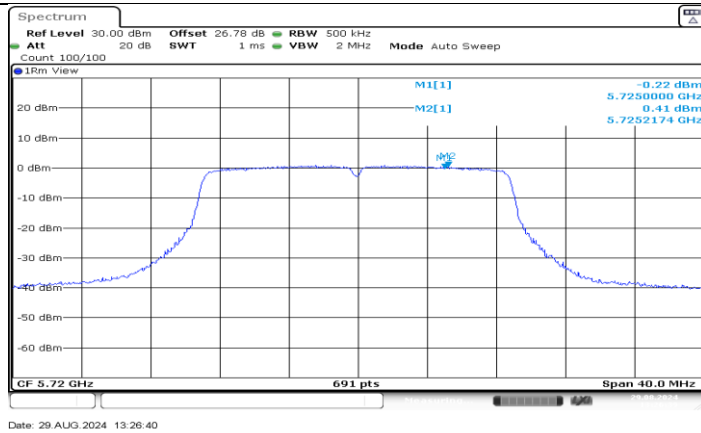


11N20SISO_Ant1_5720_UNII-3

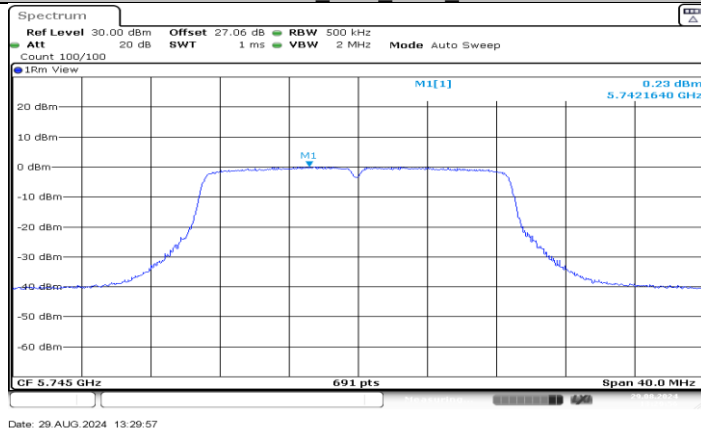


11N20SISO_Ant1_5745

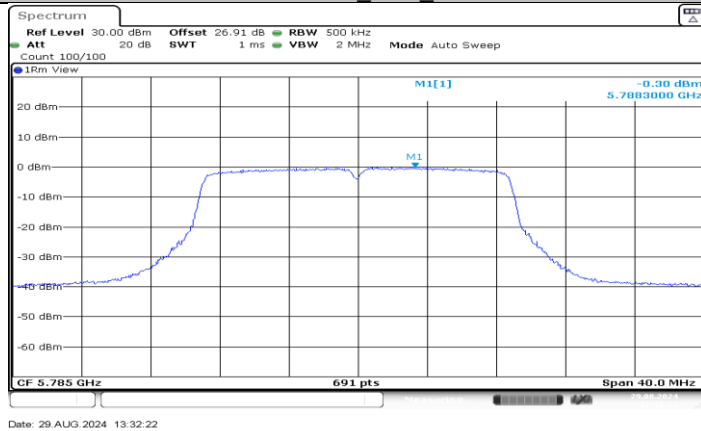


11N20SISO_Ant1_5785

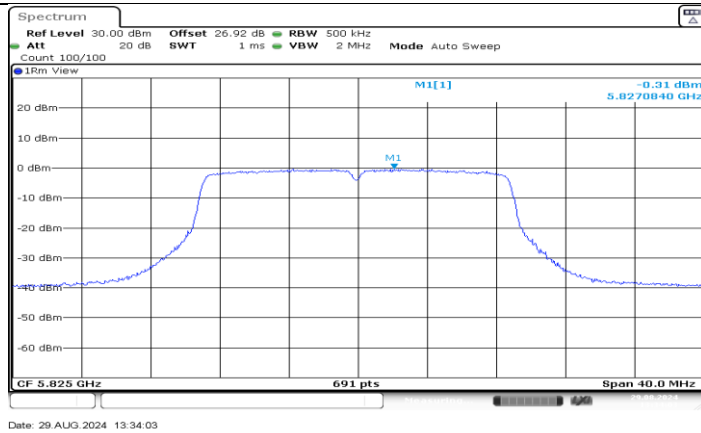


11N20SISO_Ant1_5825

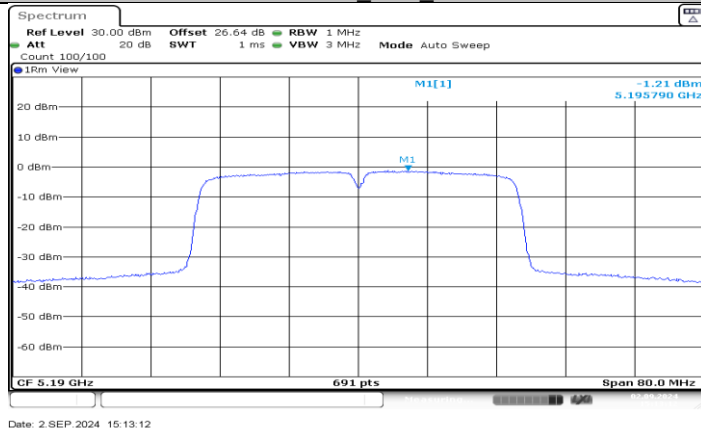

11N40SISO_Ant1_5190

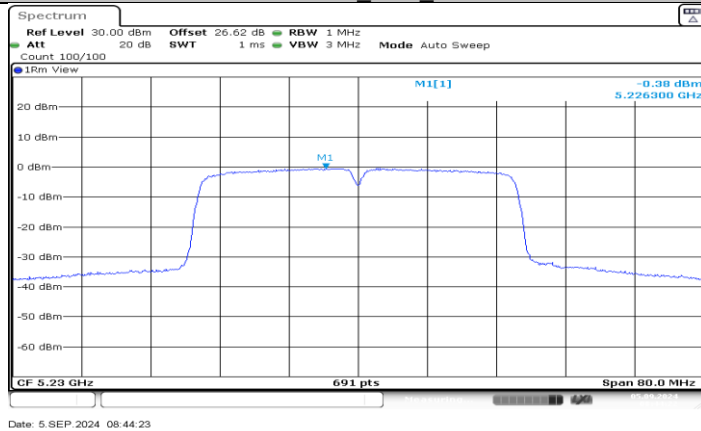


11N40SISO_Ant1_5230

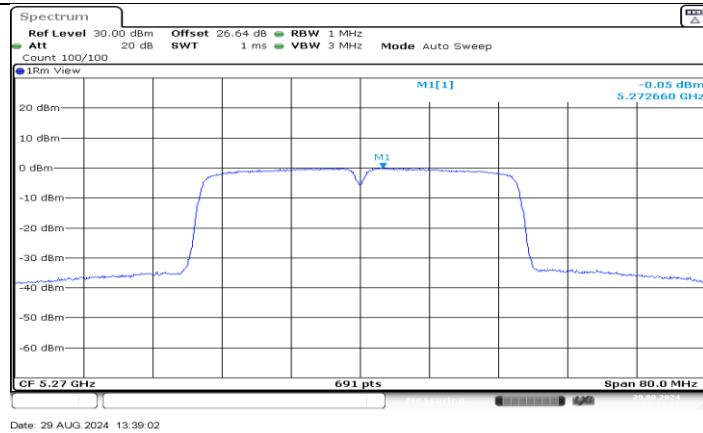


11N40SISO_Ant1_5270




11N40SISO_Ant1_5310

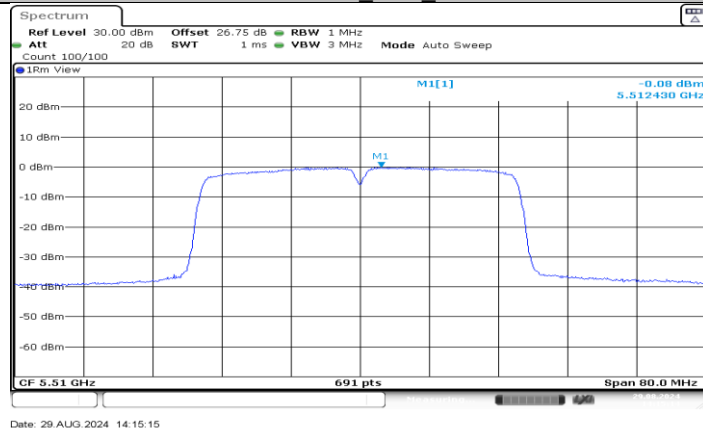

11N40SISO_Ant1_5510

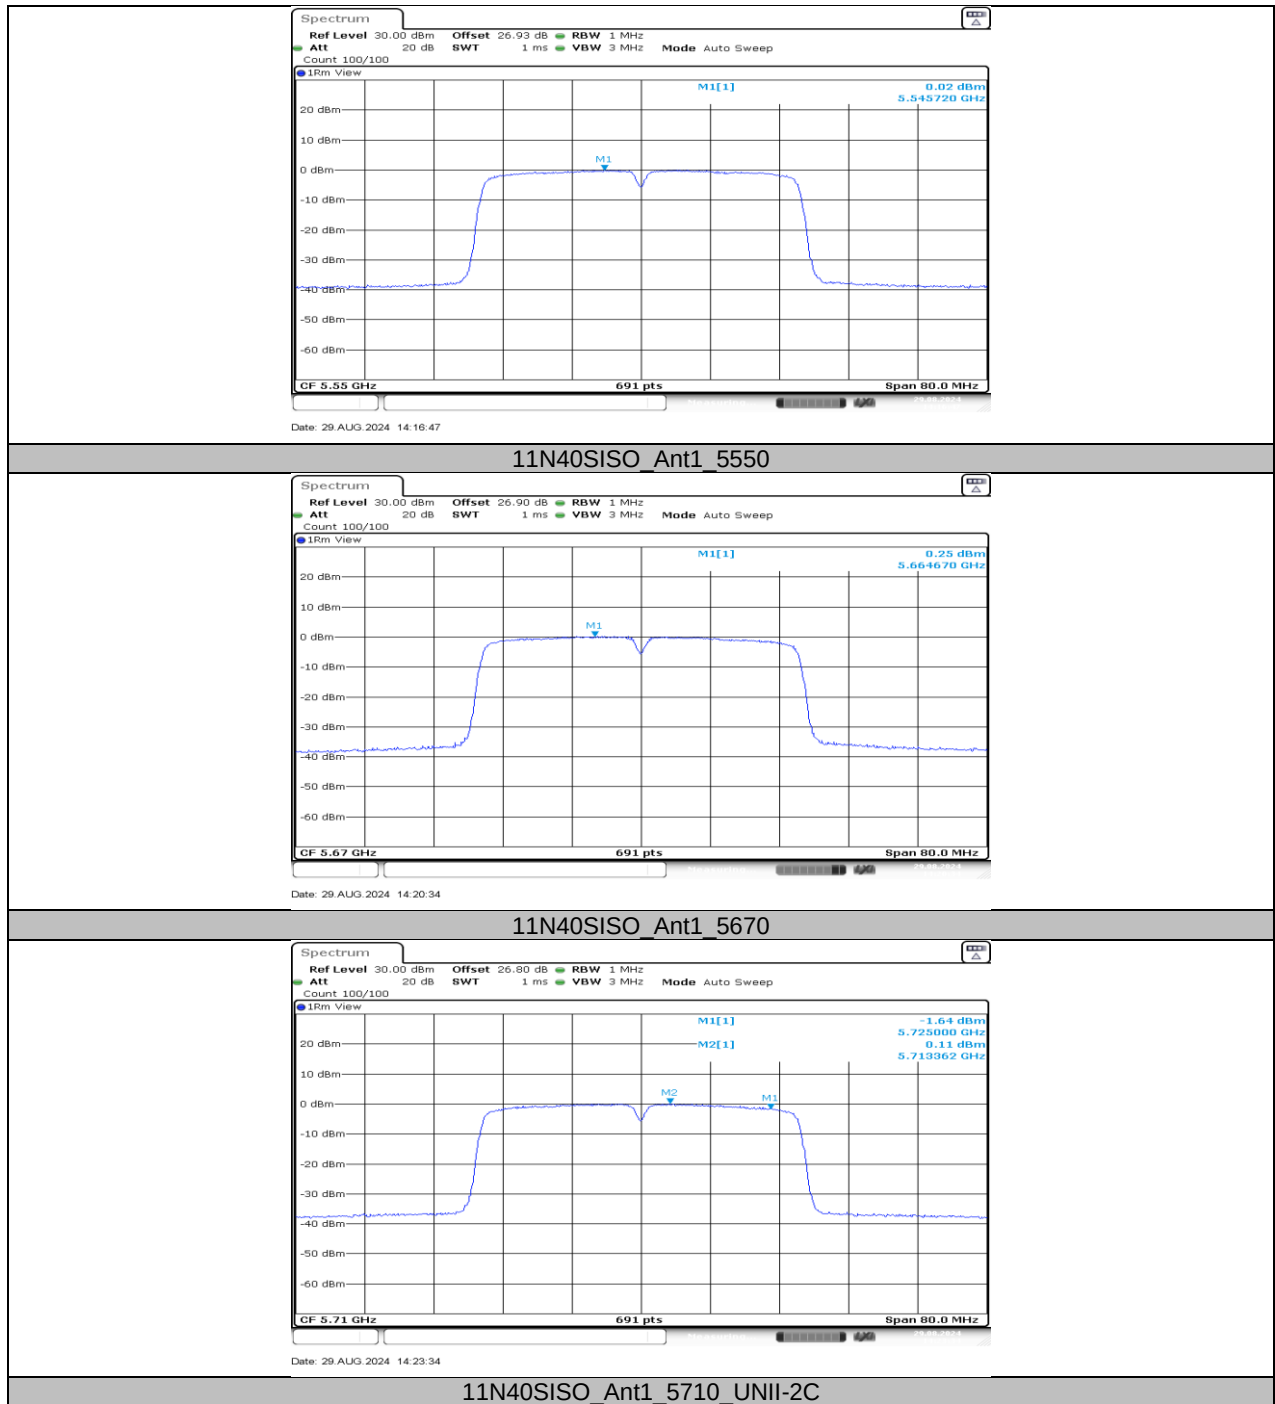

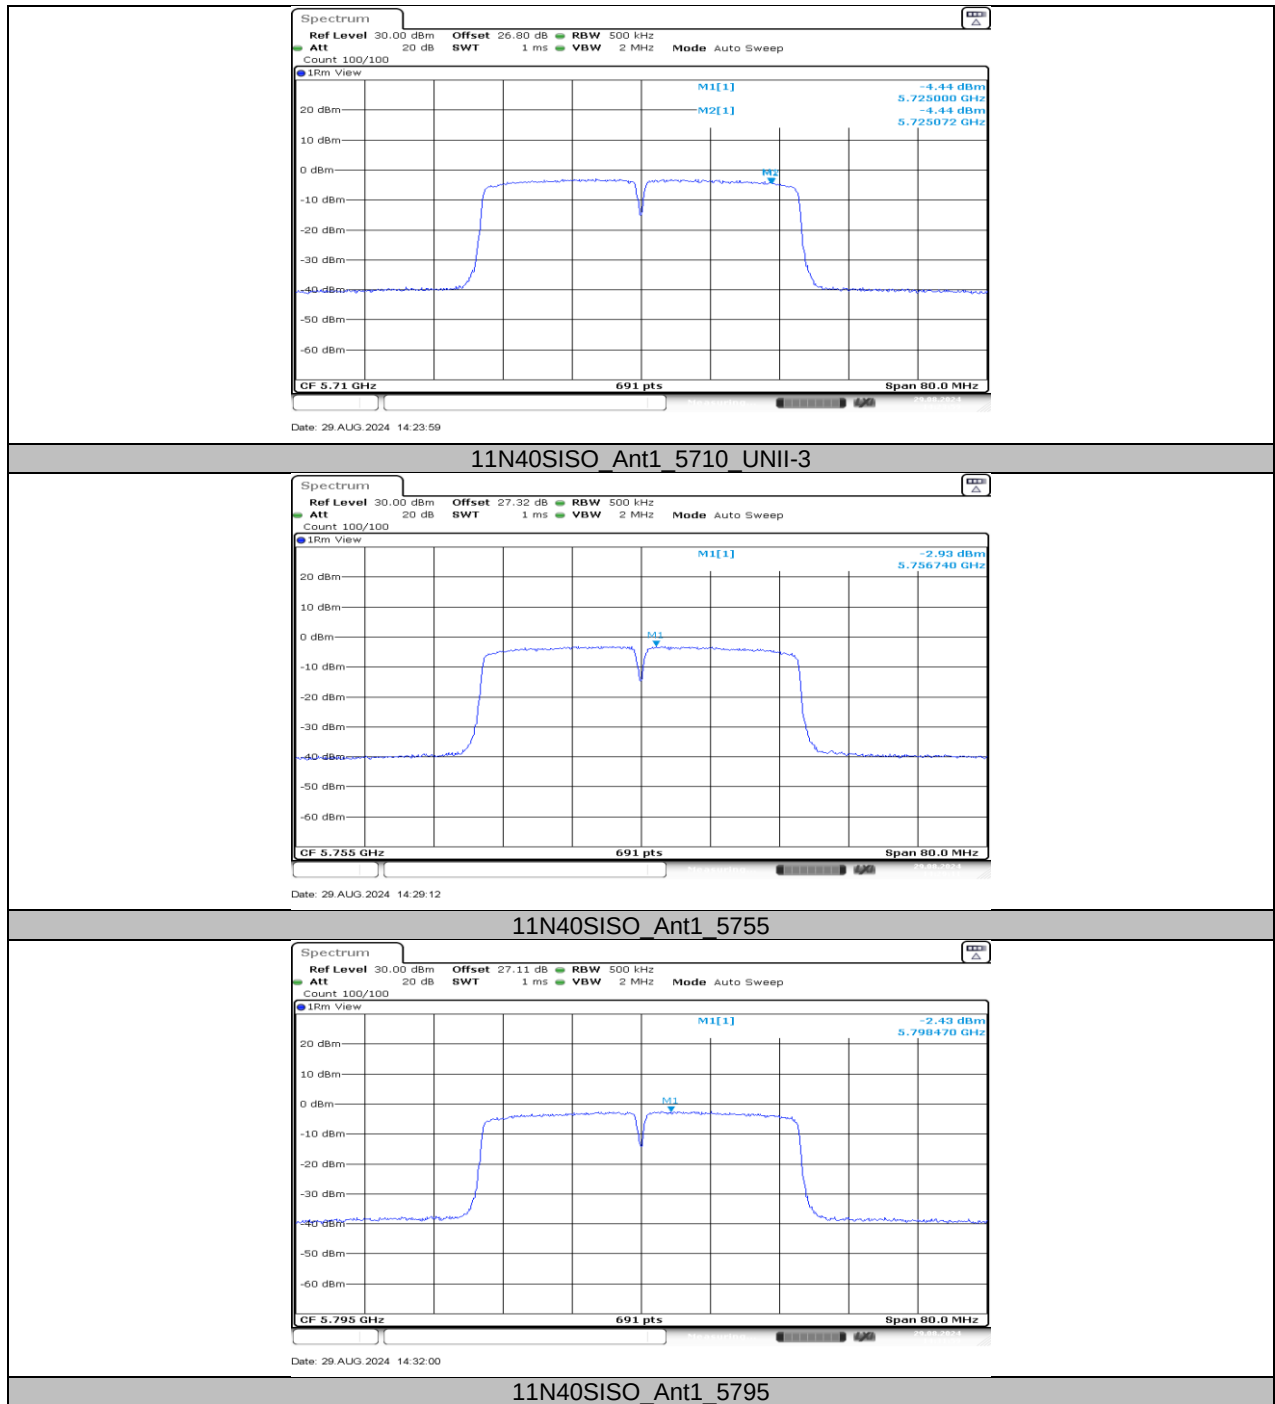

11.6. APPENDIX F: FREQUENCY STABILITY

11.6.1. Test Result

Frequency Error vs. Voltage									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5200.0108	2.09	5199.9752	-4.77	5200.0155	2.98	5200.0178	3.42
TN	VN	5199.9866	-2.58	5199.9773	-4.36	5199.9880	-2.31	5199.9948	-1.01
TN	VH	5199.9986	-0.26	5199.9904	-1.85	5199.9948	-1.00	5199.9984	-0.32
Frequency Error vs. Temperature									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
60	VN	5199.9850	-2.88	5200.0223	4.28	5200.0175	3.36	5200.0128	2.47
50	VN	5200.0228	4.38	5199.9947	-1.01	5199.9852	-2.84	5200.0029	0.57
40	VN	5200.0093	1.78	5200.0098	1.88	5200.0095	1.82	5200.0010	0.20
30	VN	5200.0065	1.26	5199.9800	-3.84	5199.9958	-0.81	5200.0113	2.17
20	VN	5200.0168	3.23	5200.0177	3.41	5199.9851	-2.87	5200.0000	0.00
10	VN	5199.9765	-4.51	5199.9856	-2.77	5199.9758	-4.65	5200.0010	0.19
0	VN	5200.0243	4.67	5200.0217	4.17	5199.9755	-4.71	5199.9818	-3.51

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	2.04	2.17	0.9401	94.01	0.27	0.49	1
11N20SISO	1.90	2.03	0.9360	93.60	0.29	0.53	1
11N40SISO	0.94	1.06	0.8868	88.68	0.52	1.06	2

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs




11.8. APPENDIX H: DFS DETECTION THRESHOLDS

11.8.1. Test Result

Test Mode	Frequency[MHz]	Radar Type	Result	Limit[dbm]	Verdict
11N40SISO	5270	Type0	-62.31	-62.00	PASS

11.8.2. Test Graphs

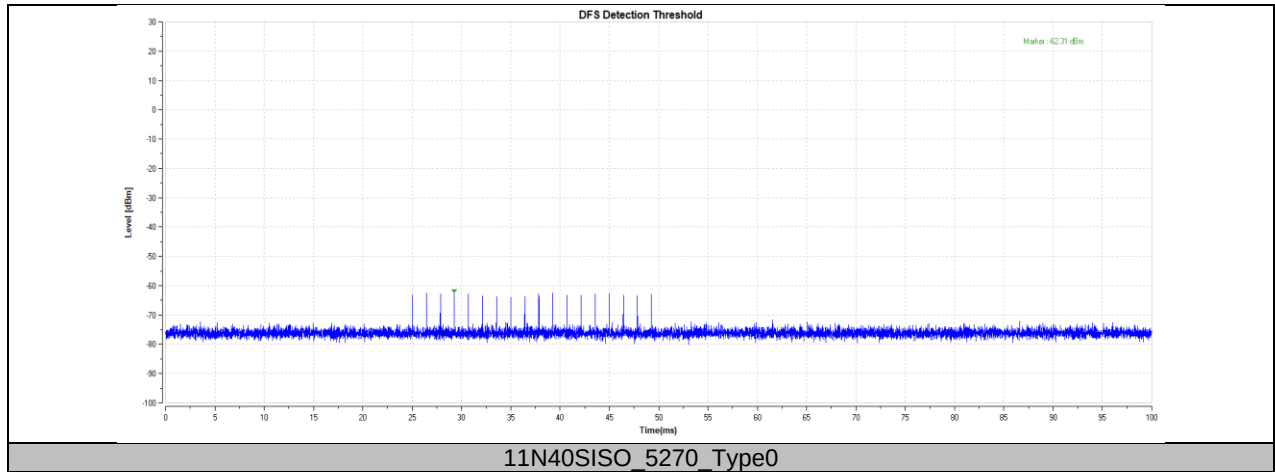


11.9. APPENDIX I: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

11.9.1. Test Result

Test Mode	Frequency[MHz]	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11N40SISO	5270	200+24.7	200+60	620.1	10000	PASS


11.9.2. Test Graphs

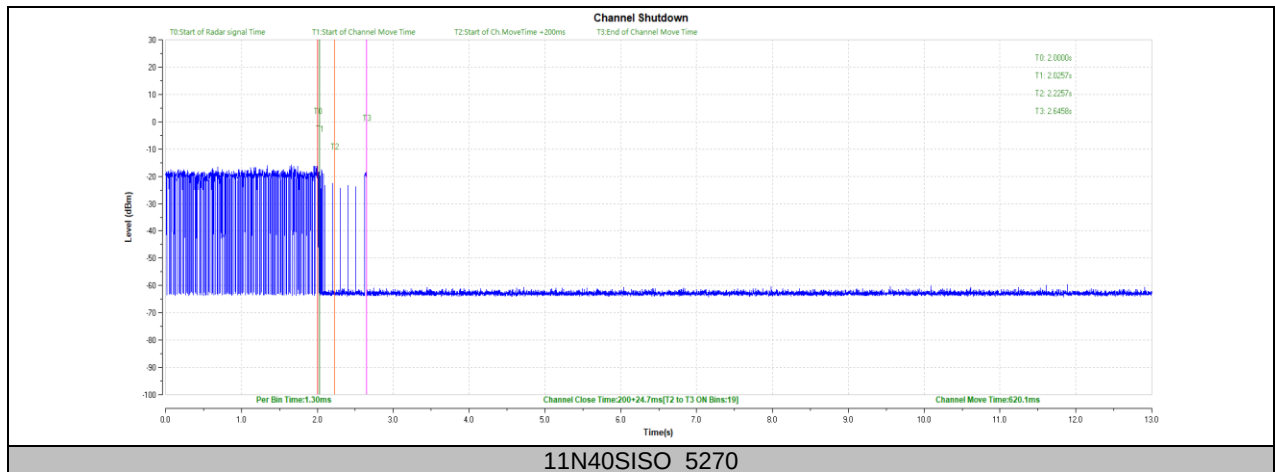

11.10. APPENDIX J: NON-OCCUPANCY PERIOD**11.10.1. Test Result**

Test Mode	Channel	Result	Limit[s]	Verdict
11N40SISO	5270	see test graph	≥ 1800	PASS

11.10.2. Test Graphs

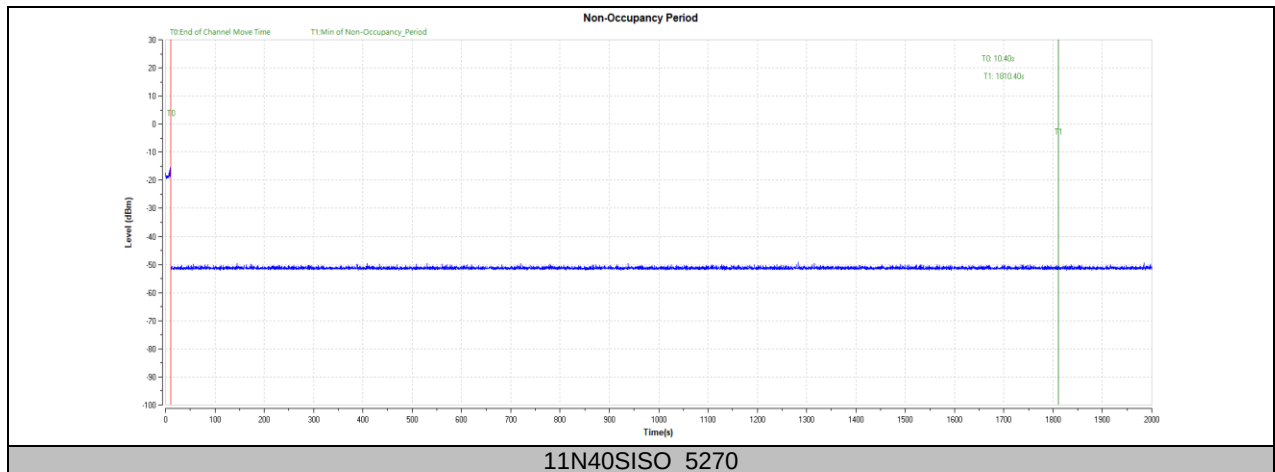

END OF REPORT