



RADIO TEST REPORT

FCC ID : QXO-AP3060
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP3060
Applicant : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Manufacturer : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Standard : 47 CFR FCC Part 15.247

The product was received on Apr. 27, 2026, and testing was started from May 05, 2026 and completed on Jul. 21, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT.....	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration.....	14
2.3 EUT Operation during Test	16
2.4 Accessories	16
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	18
3 Transmitter Test Result	21
3.1 AC Power-line Conducted Emissions	21
3.2 DTS Bandwidth	23
3.3 Maximum Conducted Output Power	24
3.4 Power Spectral Density	27
3.5 Emissions in Non-restricted Frequency Bands	29
3.6 Emissions in Restricted Frequency Bands.....	30
4 Test Equipment and Calibration Data	34
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2462	1-11 [11]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b, 802.11g, 802.11n HT20, VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	1, 2TX
	802.11n HT20-BF, VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	RF Port					Brand Name	Model Name	Ant. Type	Connector	Modes of Operation	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth and IEEE 802.15.4	GPS						
1	1	1	1	-	-	WNC	95XPAM15.GAI	Dipole	I-PEX	WLAN 2.4GHz, WLAN 5GHz UNII 1~2A, WLAN 6GHz UNII 5~8 (Radio 1) WLAN 5GHz UNII 2C~3 or UNII 1~3 (Radio 2) Bluetooth, IEEE 802.15.4 (Radio 3) GPS (Radio 4)	Note 1
2	2	2	2	-	-	WNC	95XPAM15.GAJ	PIFA	I-PEX		
3	-	1	-	1	-	WNC	95XPAM15.GAG	PIFA	I-PEX		
4	-	2	-	1	-	WNC	95XPAM15.GAH	Dipole	I-PEX		
5	-	-	-	1	-	WNC	95XPAM15.GAL	PIFA	I-PEX		
6	-	-	-	-	1	WNC	95XPAM15.GAK	PIFA	I-PEX		

Note 1:

Ant.	Antenna Gain (dBi)						
	WLAN 2.4GHz (Radio 1)	WLAN 5GHz UNII 1~2A (Radio 1)		WLAN 6GHz UNII 5~8 (Radio 1)			
	2.45GHz	5.2GHz	5.3GHz	6.175GHz	6.475GHz	6.695GHz	6.995GHz
1	6.98	5.87	4.98	5.23	5.52	5.33	5.50
2	3.54	3.52	3.51	4.99	3.94	4.00	4.34
Ant.	WLAN 5GHz UNII 1~3 (Radio 2)				Bluetooth, IEEE 802.15.4 (Radio 3)		
	5.2GHz	5.3GHz	5.6GHz	5.785GHz			
3	5.67	5.15	5.66	4.32	5.10		
4	5.18	5.04	4.77	4.66	6.20		
Ant.	Bluetooth, IEEE 802.15.4 (Radio 3)						
5	4.60						
Ant.	GPS (Radio 4)						
6	3.00						



Directional Gain (dBi)							
Item	WLAN 2.4GHz (Radio 1)	WLAN 5GHz UNII 1~2A (Radio 1)		WLAN 6GHz UNII 5~8 (Radio 1)			
	2.45GHz	5.2GHz	5.3GHz	6.175GHz	6.475GHz	6.695GHz	6.995GHz
2T1S	6.98	5.91	5.14	5.40	5.99	5.89	6.58
2T2S	6.98	5.87	4.98	5.23	5.52	5.33	5.50
Item	WLAN 5GHz UNII 1~3 (Radio 2)						
	5.2GHz		5.3GHz		5.6GHz		5.785GHz
2T1S	5.67		5.15		5.88		5.16
2T2S	5.67		5.15		5.66		4.66

Note 2: The above information (excepting Ant. 1-4 (WLAN) antenna gain and directional gain) was declared by Manufacturer.

Note 3: States antenna 6GHz transmission will be restricted per country's regulation.

For Radio 1:

2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (1, 2TX/2RX)

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

5GHz IEEE 802.11a/n/ac/ax/be mode (1, 2TX/2RX)

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

6GHz IEEE 802.11ax/be mode (1, 2TX/2RX)

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:

5GHz IEEE 802.11a/n/ac/ax/be mode (1, 2TX/2RX)

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 3:

Bluetooth, IEEE 802.15.4 mode (1TX/1RX)

The EUT supports all antennas with TX/RX diversity functions.

At once time there is only one antenna port can transmitting/receiving RF signal

For Radio 4:

GPS (1RX)

Only Port 1 can be used as receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.954	0.2	12.422m	100
802.11g_Nss 1,(6D)	0.949	0.23	2.069m	1k
802.11be EHT20_Nss 1,(M0)	0.979	0.09	1.5m	1k
802.11be EHT20_Nss 2,(M0)	0.961	0.17	790.625u	3k
802.11be EHT20-BF_Nss 1,(M0)	0.979	0.09	1.5m	1k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for Radio 1 (n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz) and Radio 2 (n/ac/ax/be in 5GHz).			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	Mtool_3.3.0.9			

Note: The above information was declared by manufacturer.

1.1.5 Table for Radio Function

Function Radio (R)	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	IEEE 802.15.4	GPS
1	V	V (UNII 1~2A)	V	-	-	-
2	-	V (UNII 1~3 or UNII 2C~3)	-	-	-	-
3	-	-	-	V	V	-
4	-	-	-	-	-	V

Note 1: For WLAN 5GHz: The Radio1 and Radio 2 can't operate at the same frequency simultaneously

Note 2: The above information was declared by manufacturer.

**1.1.6 Table for EUT Support Function**

Type of Function	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz
		Radio 1	Radio 2	
AP	V	V (UNII 1~2A)	V (UNII 1~3)	V
Bridge	V	V (UNII 1)	V (UNII 1, 3)	-
Mesh	V	V (UNII 1)	V (UNII 1, 3)	-

Note1: For above table list, only AP mode was tested and recorded in this test.

Note2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Gino Huang	22.3~23.1 / 61~65	May 27, 2026~ Jun. 29, 2026
Radiated below 1GHz	10CH01-CB	Stim Sung	21~22 / 61~62	Jul. 14, 2026
Radiated above 1GHz	03CH05-CB	Lex Lee	24.2~24.4 / 55~62	May 05, 2026~ Jul. 21, 2026
	03CH06-CB	Jimmy Huang	23.7~24.5 / 61~62	
AC Conduction (Test Mode: Mode 1~5)	CO01-CB	Ryan Huang	21~22 / 56~57	Jun. 03, 2026
AC Conduction (Test Mode: Mode 6)	CO01-CB	Allen Chung	23~24 / 58~59	Jul. 04, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before Jul. 01, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%

Test Date: After Jun. 30, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%

Test Date: Before May 28, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%

Test Date: After May 27, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11b_Nss1,(1Mbps)_1TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11g_Nss1,(6Mbps)_1TX
2412MHz
2437MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_1TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11b_Nss1,(1Mbps)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11g_Nss1,(6Mbps)_2TX
2412MHz
2437MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20_Nss2,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
2412MHz
2417MHz



2437MHz
2457MHz
2462MHz

Note:

- ♦ EHT20 covers HT20 / VHT20 / HEW20 due to similar modulation. The power setting for HT20 / VHT20 / HEW20 is the same or lower than EHT20.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT_R1 (2.4GHz)+R2 (5GHz UNII 1~3)+R3 (BT_Ant. 5)+R4 (GPS)+Bracket 1+PoE
2	EUT_R1 (2.4GHz)+R2 (5GHz UNII 1~3)+R3 (BT_Ant. 4)+R4 (GPS)+Bracket 1+PoE
3	EUT_R1 (2.4GHz)+R2 (5GHz UNII 1~3)+R3 (BT_Ant. 3)+R4 (GPS)+Bracket 1+PoE
Mode 1 has been evaluated to be the worst case between Mode 1~3, thus measurement for Mode 4~5 will follow this same test mode.	
4	EUT_R1 (6GHz)+R2 (5GHz UNII 1~3)+R3 (BT_Ant. 5)+R4 (GPS)+Bracket 1+PoE
5	EUT_R1 (5GHz UNII 1~2A)+R2 (5GHz UNII 2C~3)+R3 (BT_Ant. 5)+R4 (GPS)+Bracket 1+PoE
Mode 1 has been evaluated to be the worst case between Mode 1~5, thus measurement for Mode 6 will follow this same test mode.	
6	EUT_R1 (2.4GHz)+R2 (5GHz UNII 1~3)+R3 (802.15.4_Ant. 5)+R4 (GPS)+Bracket 1+PoE
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	EUT_R1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX 1. After evaluating, and the worst case was found as below for radiated above 1GHz test. So the measurement will follow this same test configuration. 2. The EUT supports all antennas with TX/RX diversity functions. At once time there is only one antenna port can transmitting/receiving RF signal. The Ant. 4 generated the worst case, so it was selected for testing.
1	EUT in Y axis_R1 (2.4GHz)+Bracket 1+PoE
2	EUT in Y axis_R1 (2.4GHz)+Bracket 2+PoE
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~7 will follow this same test mode.	
3	EUT in Y axis_R1 (5GHz UNII 1~2A)+Bracket 1+PoE
4	EUT in Y axis_R1 (6GHz)+Bracket 1+PoE
5	EUT in Z axis_R2 (5GHz UNII 1~3)+Bracket 1+PoE
6	EUT in Y axis_R3+Ant. 4 (BT)+Bracket 1+PoE
7	EUT in Y axis_R3+Ant. 4 (802.15.4)+Bracket 1+PoE
For operating mode 5 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Y axis_R1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R1 (2.4GHz) + R2 (5GHz UNII 1~3) + R3 (BT)
2	R1 (6GHz) + R2 (5GHz UNII 1~3) + R3 (BT)
3	R1 (5GHz UNII 1~2A) + R2 (5GHz UNII 2C~3) + R3 (BT)
4	R1 (2.4GHz) + R2 (5GHz UNII 1~3) + R3 (802.15.4)
5	R1 (6GHz) + R2 (5GHz UNII 1~3) + R3 (802.15.4)
6	R1 (5GHz UNII 1~2A) + R2 (5GHz UNII 2C~3) + R3 (802.15.4)
Refer to Sporton Test Report No.: FA631803 for Co-location RF Exposure Evaluation.	



Note1: R means Radio ; BT means Bluetooth.

Note2: The PoE is used for testing purpose; it will not be sold with the EUT

Power	Brand Name	Model Name
PoE 1	Microsemi	PD-9501-10GC/AC
PoE 2	PHIHONG	POE60U-BTA

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
Bracket 1*1
Bracket 2*1
Sealing Collar 1*1
Sealing Collar 2*1



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	PHIHONG	POE60U-BTA	N/A
B	ETH0 PC	ASUS	S300TA	TX2-RTL8821CE
C	R1(2.4G) NB	Lenovo	X260	N/A
D	R2(5G full) NB	Lenovo	X260	N/A
E	Smart phone	Apple	A2403	BCG-E3544A
F	GPS Simulator	WELNAVIGATE	GS-100	N/A


For Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	PHIHONG	POE60U-BTA	N/A
B	PC	ASUS	S300TA	TX2-RTL8821CE

For Radiated (above 1GHz) and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE 1	Microsemi	PD-9501-10GC/AC	N/A


2.6 Test Setup Diagram

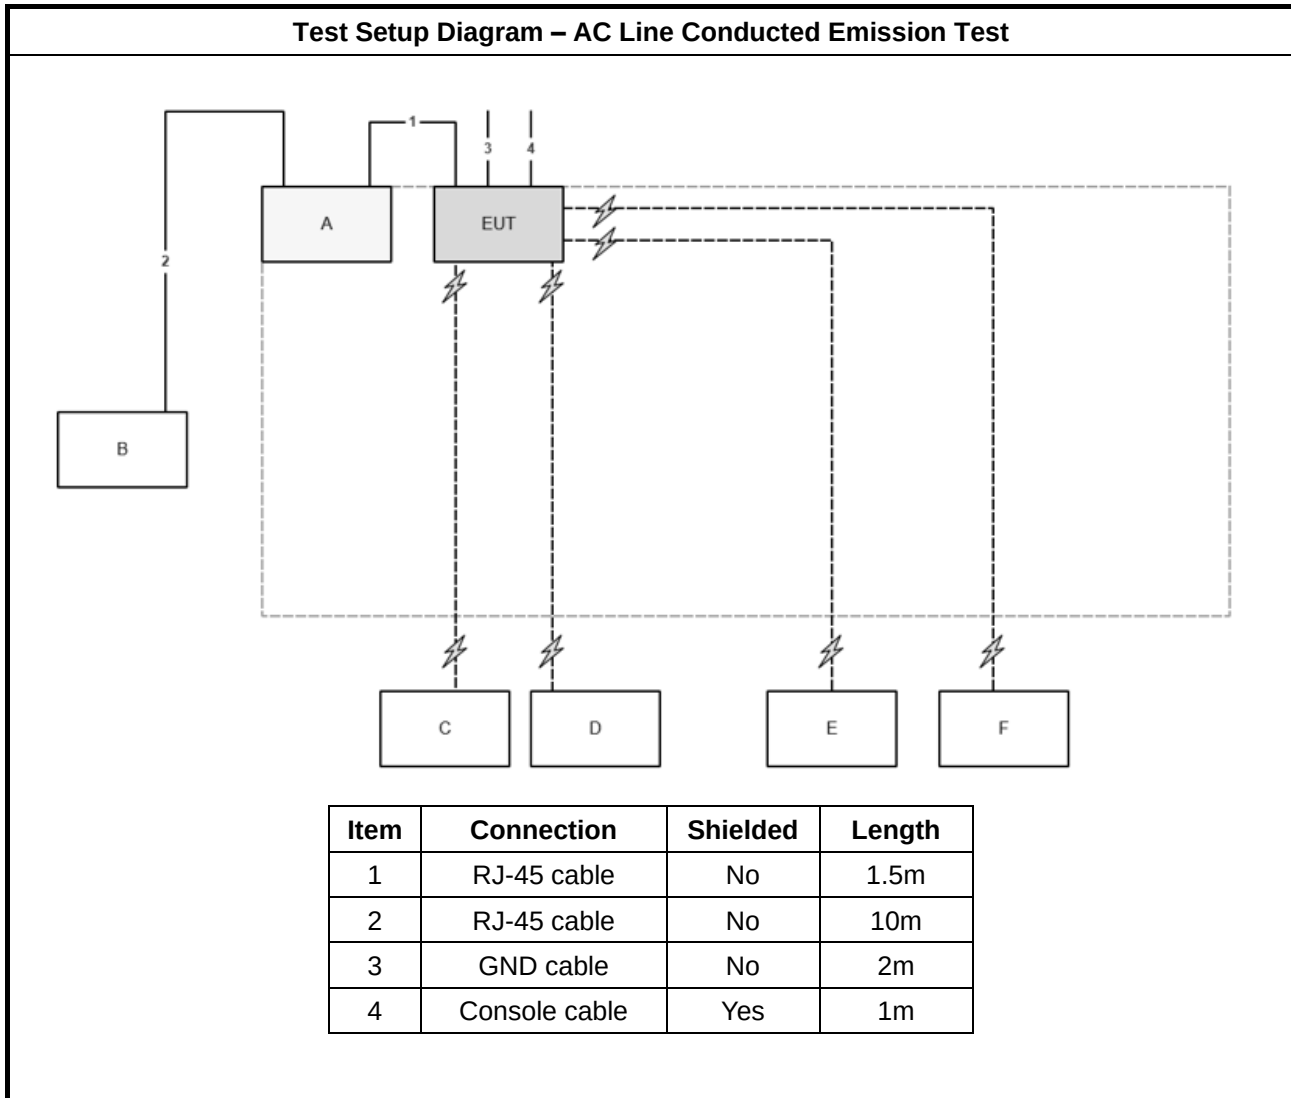

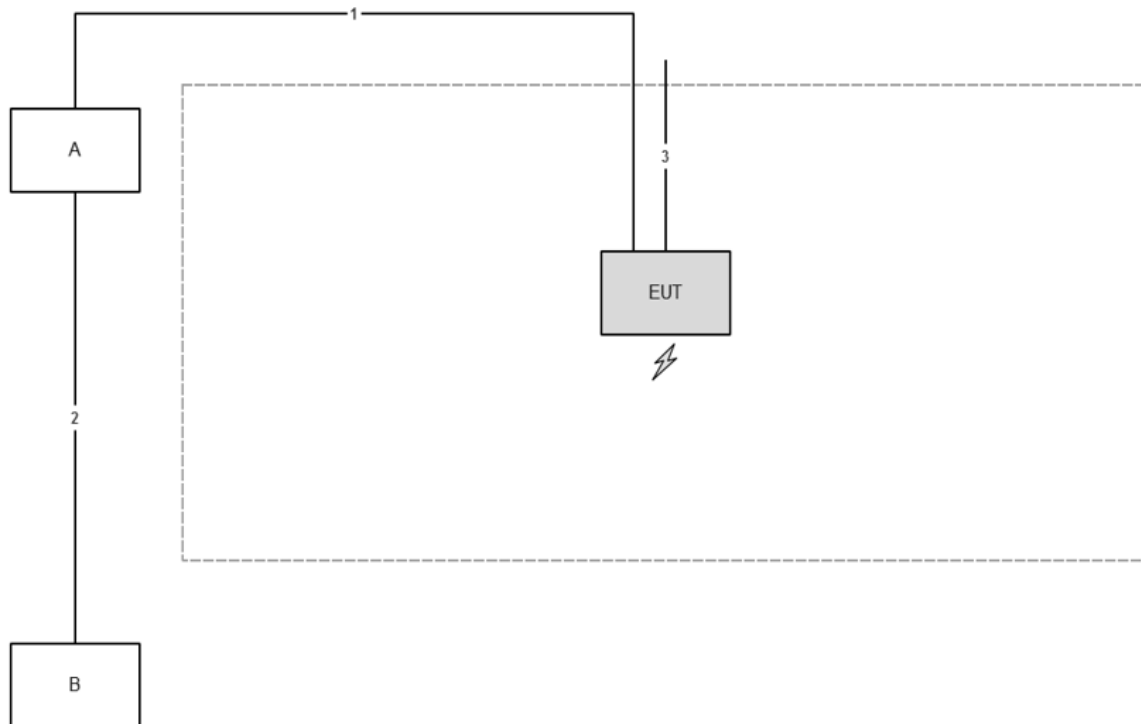Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	3m
3	GND cable	No	2m

Test Setup Diagram - Radiated Test > 1GHz

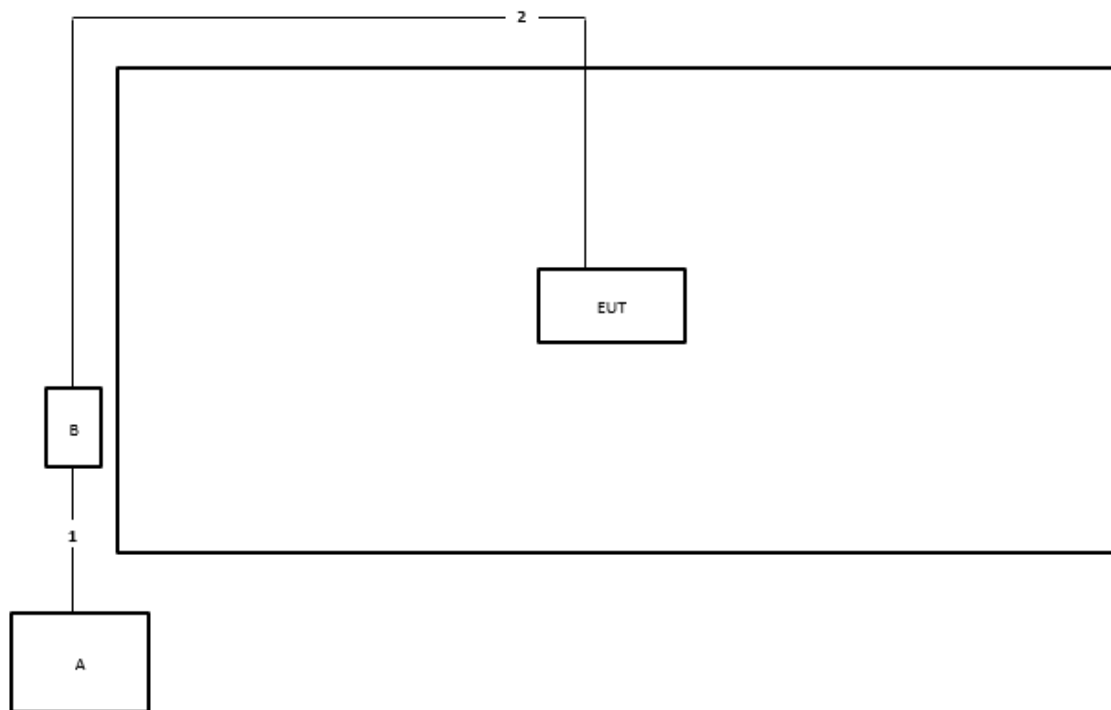

Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

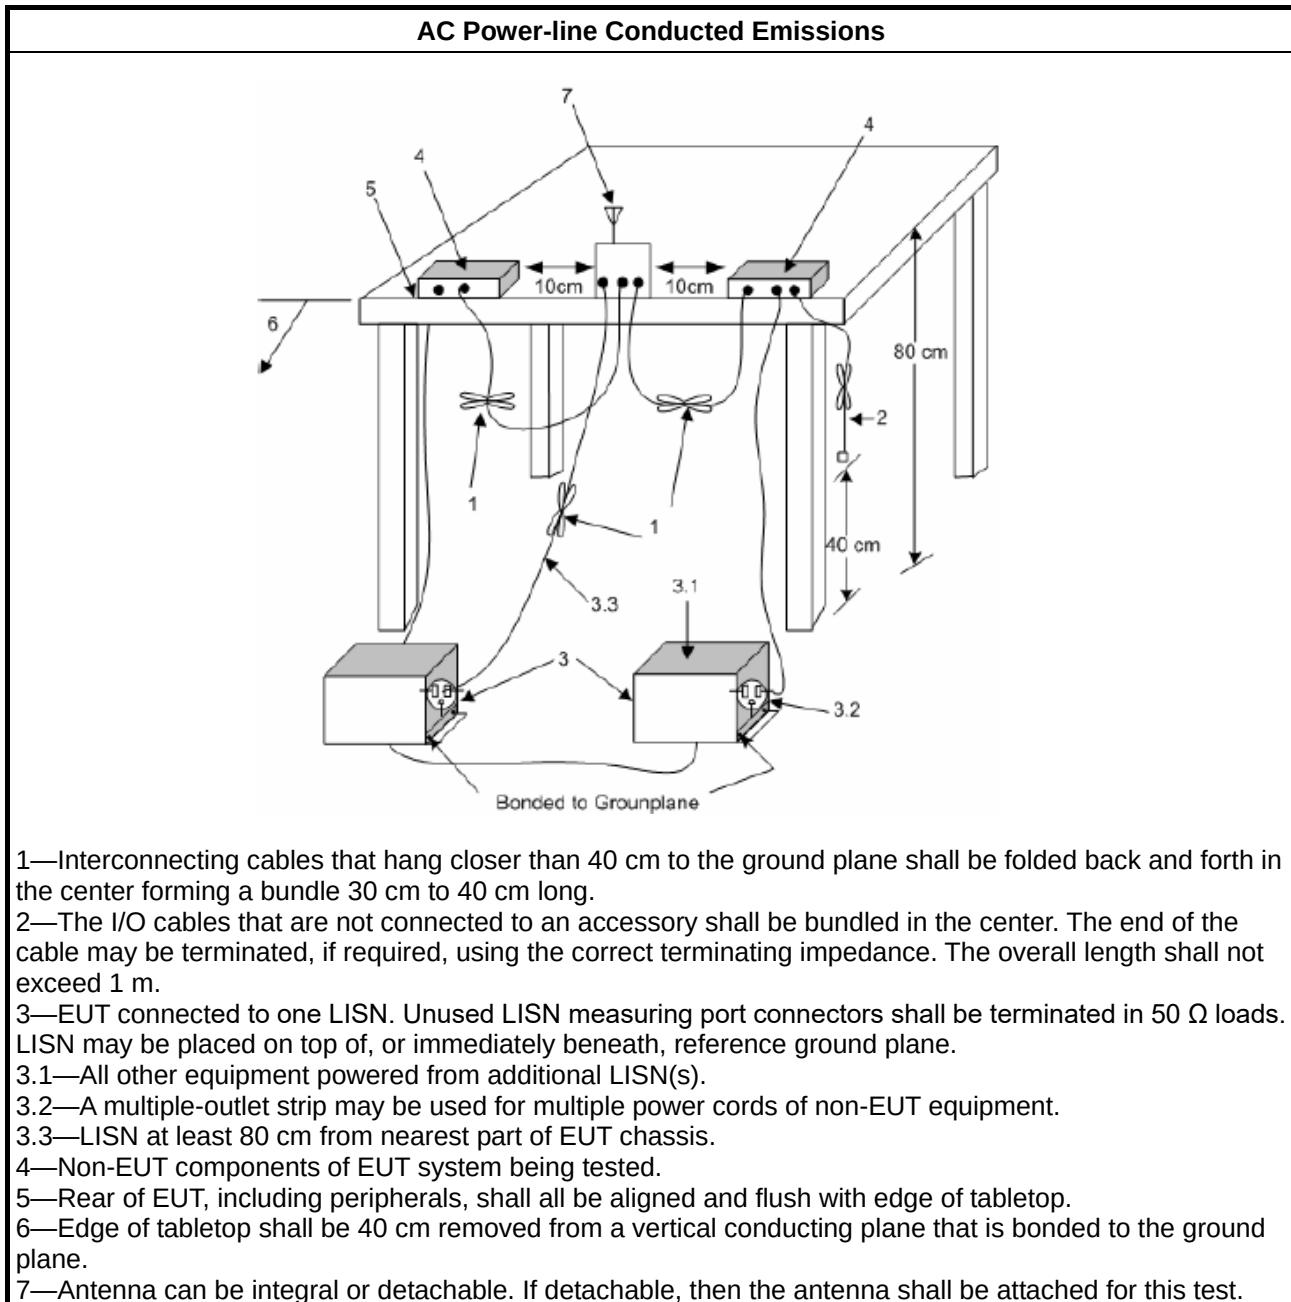

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

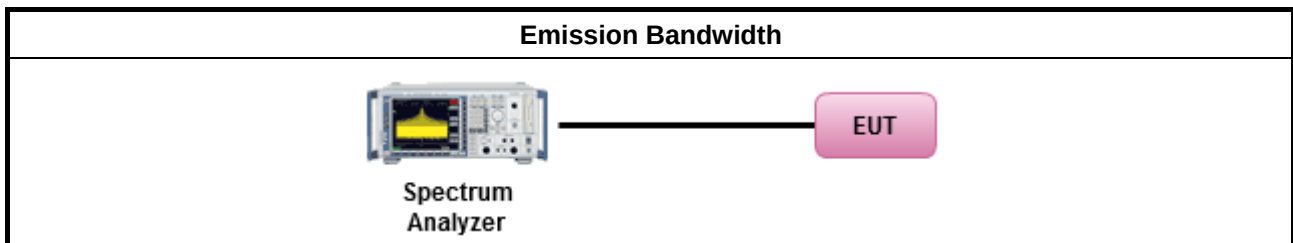

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit						
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)					
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm					
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
	▪ Smart antenna system (SAS):					
	<table> <tr> <td>-</td><td>Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm</td></tr> </table>	-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-
-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm					
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.						


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

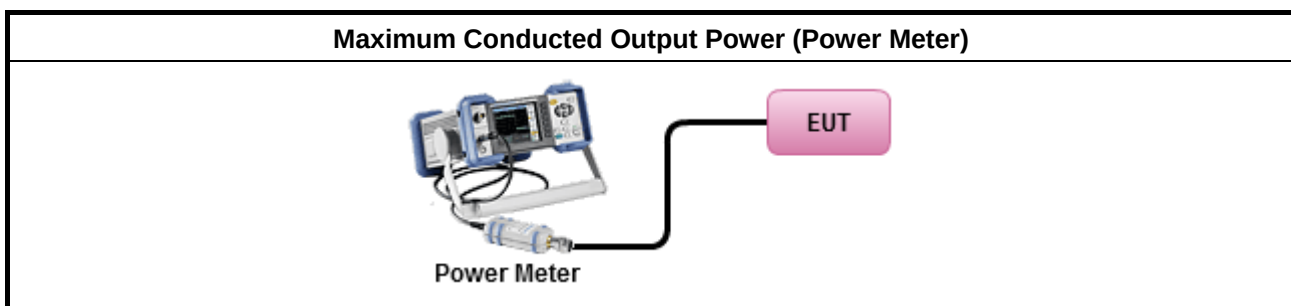



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

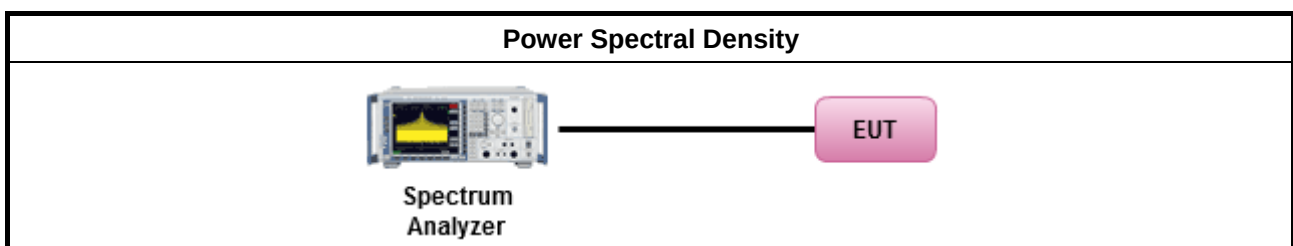



3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

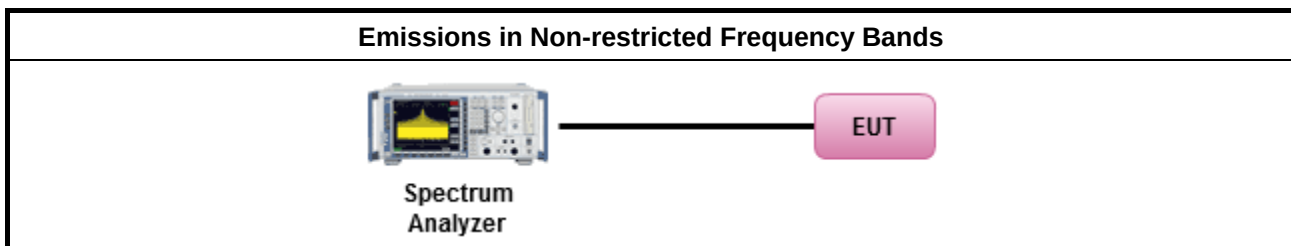

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

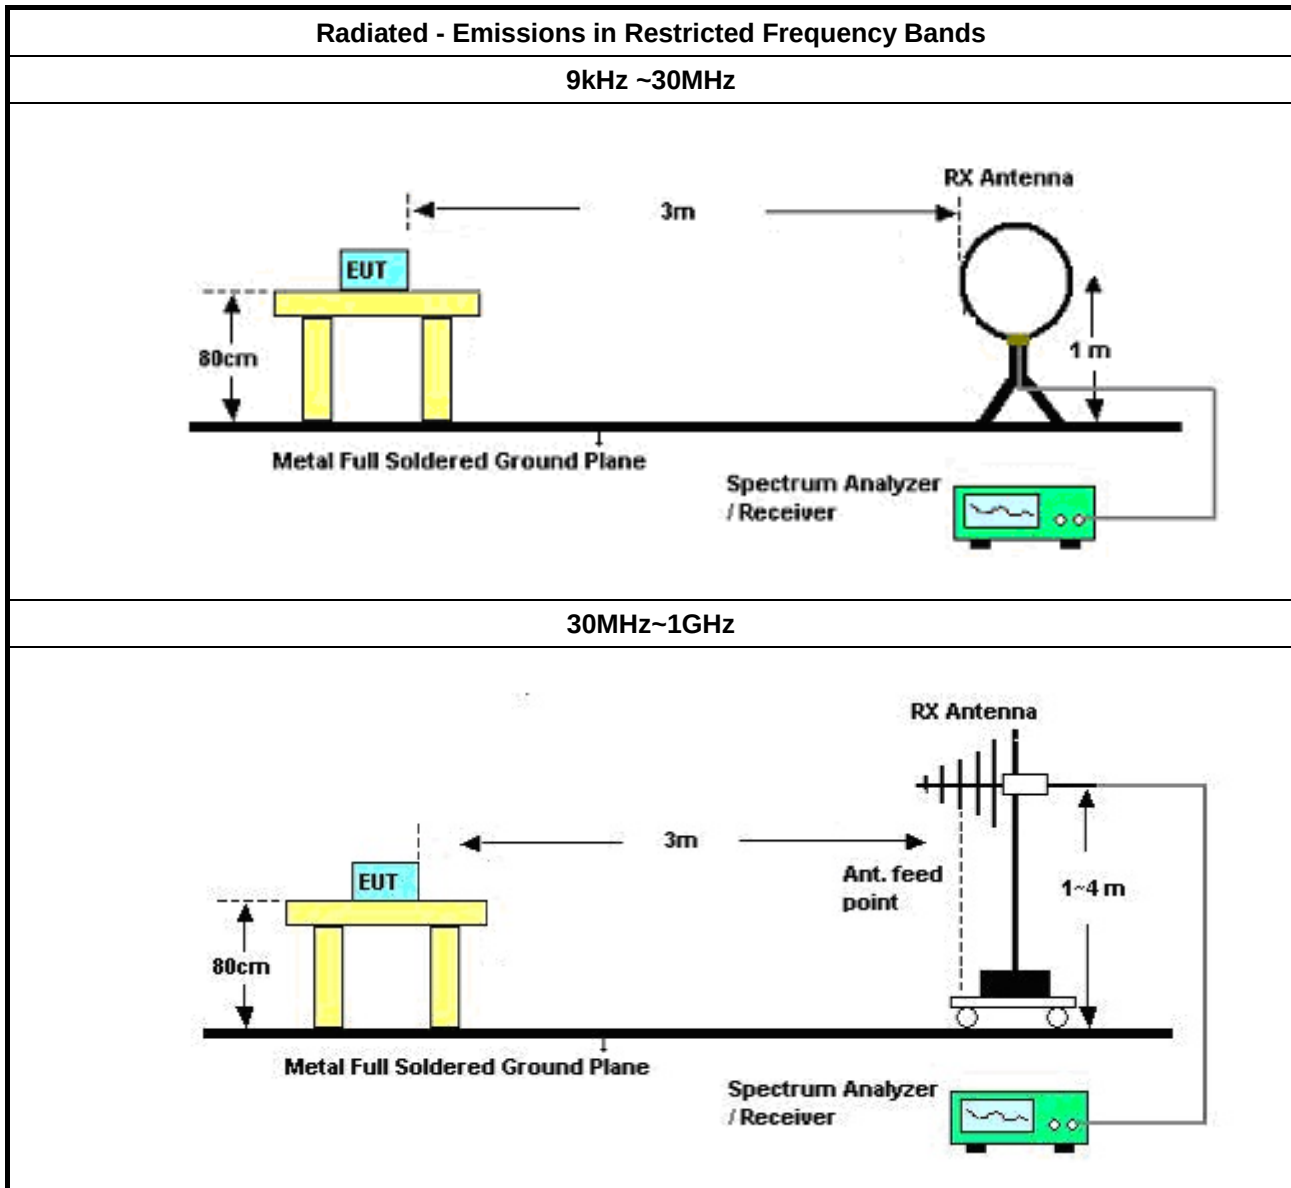

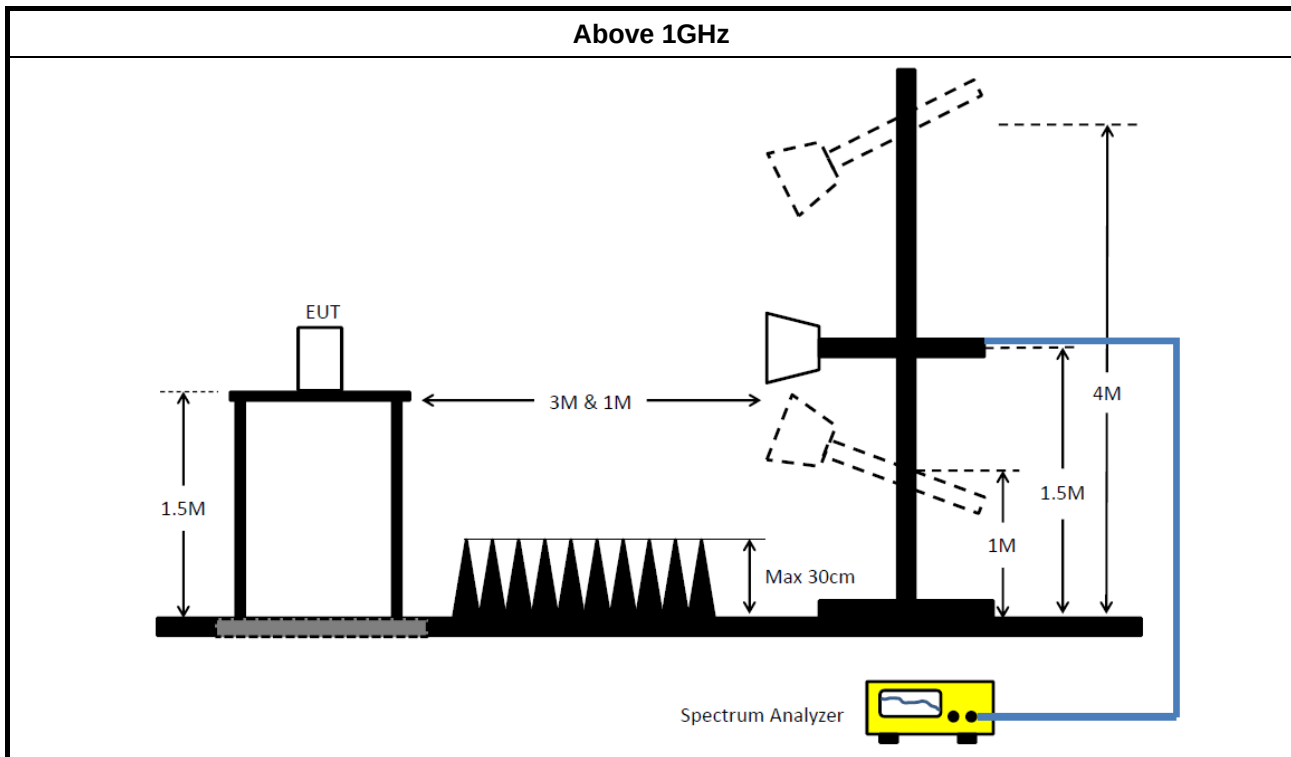

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 12, 2026	Mar. 11, 2027	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 04, 2026	Feb. 03, 2027	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 10, 2026	Apr. 09, 2027	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Biconical Antenna	Schwarzbeck	VHBB 9124	324	30MHz ~ 200MHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (10CH01-CB)
Log Antenna	Schwarzbeck	VUSLP 9111	247	200MHz ~ 1GHz	Sep. 30, 2025	Sep. 29, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde& Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	May 08, 2026	May 07, 2027	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 14, 2026	Jan. 13, 2027	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz –18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable	Woken	RG402	High Cable-12	30MHz –18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz –18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz –18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz –18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	24.954M	41.55	50.00	-8.45	Line

Mode 1

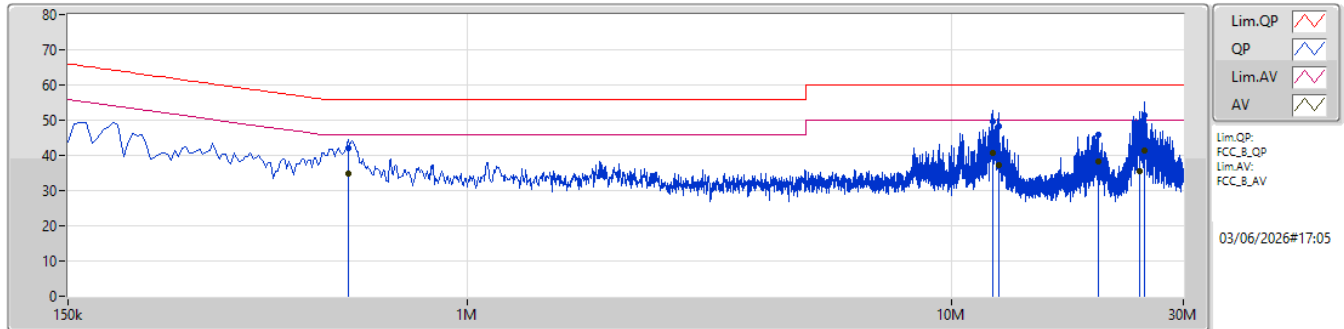

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	568.5k	42.03	56.00	-13.97	10.12	Line	-	31.91	0.09	0.13	9.90						
AV	568.5k	34.87	46.00	-11.13	10.12	Line	-	24.75	0.09	0.13	9.90						
QP	12.129M	49.64	60.00	-10.36	10.78	Line	-	38.86	0.25	0.31	10.22						
AV	12.129M	40.65	50.00	-9.35	10.78	Line	-	29.87	0.25	0.31	10.22						
QP	12.476M	48.21	60.00	-11.79	10.82	Line	-	37.39	0.26	0.32	10.24						
AV	12.476M	37.19	50.00	-12.81	10.82	Line	-	26.37	0.26	0.32	10.24						
QP	20.031M	45.83	60.00	-14.17	11.00	Line	-	34.83	0.29	0.34	10.37						
AV	20.031M	38.42	50.00	-11.58	11.00	Line	-	27.42	0.29	0.34	10.37						
QP	24.36M	45.75	60.00	-14.25	11.04	Line	-	34.71	0.31	0.42	10.31						
AV	24.36M	35.67	50.00	-14.33	11.04	Line	-	24.63	0.31	0.42	10.31						
QP	24.954M	51.24	60.00	-8.76	11.05	Line	-	40.19	0.32	0.43	10.30						
AV	24.954M	41.55	50.00	-8.45	11.05	Line	"Worst"	30.50	0.32	0.43	10.30						

Mode 1

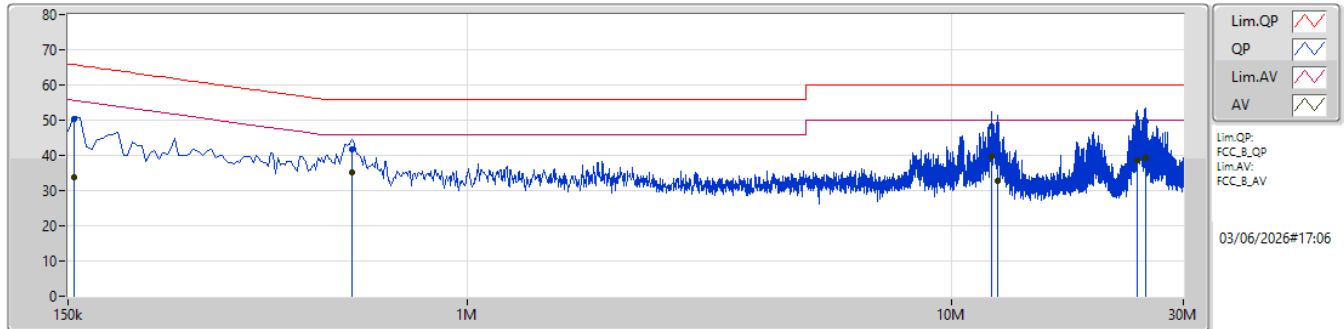

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	50.43	65.75	-15.32	10.01	Neutral	-	40.42	0.06	0.09	9.86						
AV	154.5k	33.76	55.75	-21.99	10.01	Neutral	-	23.75	0.06	0.09	9.86						
QP	577.5k	41.73	56.00	-14.27	10.09	Neutral	-	31.64	0.06	0.13	9.90						
AV	577.5k	35.17	46.00	-10.83	10.09	Neutral	-	25.08	0.06	0.13	9.90						
QP	12.08M	48.36	60.00	-11.64	10.75	Neutral	-	37.61	0.22	0.31	10.22						
AV	12.08M	39.52	50.00	-10.48	10.75	Neutral	"Worst"	28.77	0.22	0.31	10.22						
QP	12.431M	43.31	60.00	-16.69	10.78	Neutral	-	32.53	0.22	0.32	10.24						
AV	12.431M	32.81	50.00	-17.19	10.78	Neutral	-	22.03	0.22	0.32	10.24						
QP	24.158M	47.51	60.00	-12.49	11.04	Neutral	-	36.47	0.31	0.42	10.31						
AV	24.158M	38.68	50.00	-11.32	11.04	Neutral	-	27.64	0.31	0.42	10.31						
QP	25.053M	49.49	60.00	-10.51	11.05	Neutral	-	38.44	0.32	0.43	10.30						
AV	25.053M	39.25	50.00	-10.75	11.05	Neutral	-	28.20	0.32	0.43	10.30						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	7.625M	12.856M	12M9G1D	5.8M	10.232M
802.11b_Nss1,(1Mbps)_2TX	7.575M	12.762M	12M8G1D	6.05M	10.209M
802.11g_Nss1,(6Mbps)_1TX	16.425M	18.021M	18M0D1D	16.35M	16.912M
802.11g_Nss1,(6Mbps)_2TX	16.475M	22.728M	22M7D1D	14.8M	16.746M
802.11be EHT20_Nss1,(MCS0)_1TX	19.305M	21.572M	21M6D1D	18.92M	19.239M
802.11be EHT20_Nss1,(MCS0)_2TX	19.195M	19.585M	19M6D1D	18.755M	19.259M
802.11be EHT20_Nss2,(MCS0)_2TX	18.975M	26.432M	26M4D1D	18.865M	19.248M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	500k	5.8M	10.438M		
2437MHz	Pass	500k	7.625M	12.856M		
2462MHz	Pass	500k	6.575M	10.232M		
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.35M	17.084M		
2437MHz	Pass	500k	16.35M	18.021M		
2462MHz	Pass	500k	16.425M	16.912M		
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
2412MHz	Pass	500k	19.305M	19.349M		
2437MHz	Pass	500k	19.03M	21.572M		
2462MHz	Pass	500k	18.92M	19.239M		
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	6.05M	10.433M	6.525M	10.211M
2437MHz	Pass	500k	7.575M	12.762M	6.625M	12.735M
2462MHz	Pass	500k	6.725M	10.232M	7.075M	10.209M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	14.8M	17.231M	16.4M	16.926M
2437MHz	Pass	500k	16.375M	22.728M	16.325M	16.746M
2462MHz	Pass	500k	16.35M	16.868M	16.475M	16.875M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.865M	19.377M	19.14M	19.259M
2437MHz	Pass	500k	18.755M	19.585M	19.195M	19.296M
2462MHz	Pass	500k	19.03M	19.342M	19.14M	19.284M
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.92M	19.418M	18.975M	19.265M
2437MHz	Pass	500k	18.975M	26.432M	18.865M	19.248M
2462MHz	Pass	500k	18.92M	19.324M	18.92M	19.313M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX
EBW
2412MHz

27/05/2026

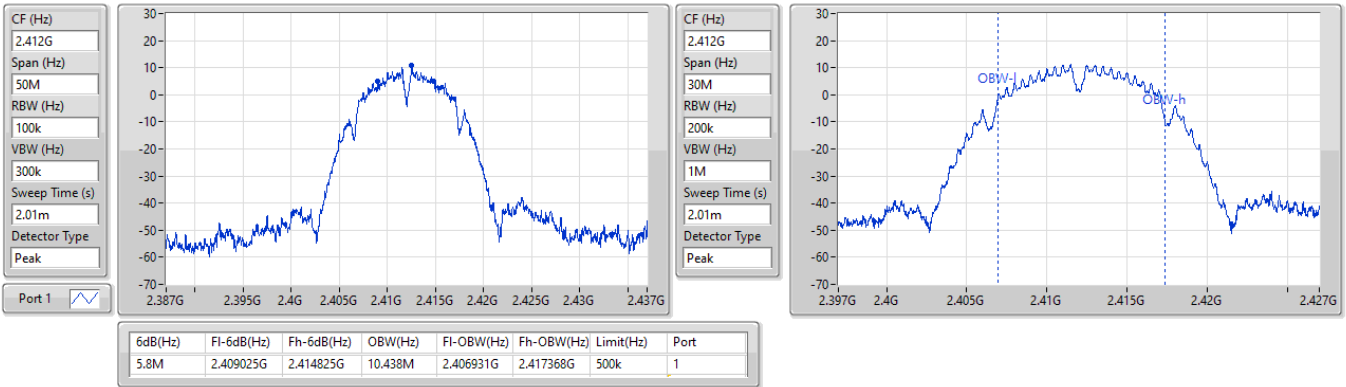
2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX
EBW
2437MHz

27/05/2026


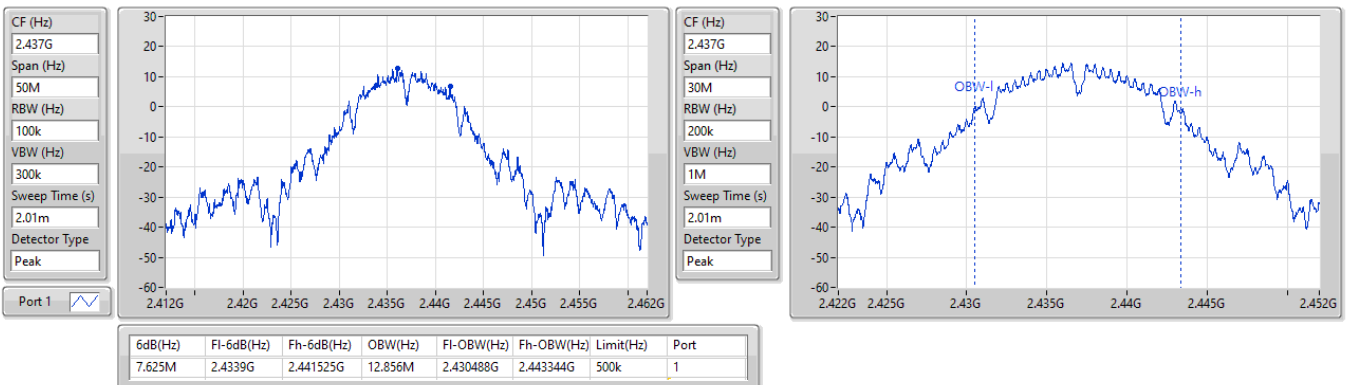


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW

2462MHz

27/05/2026

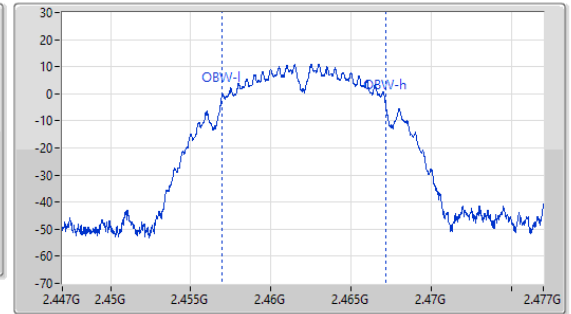
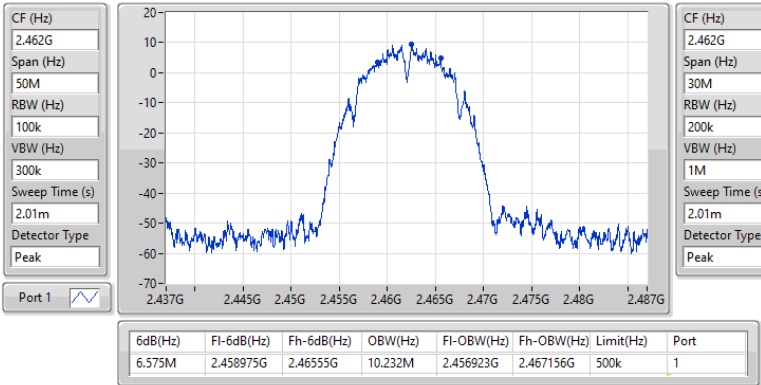


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW

2412MHz

27/05/2026

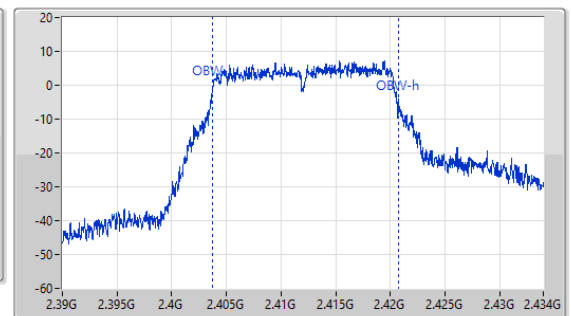
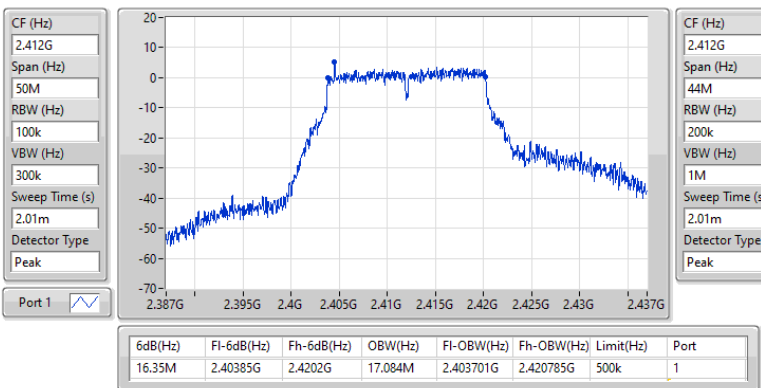


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW

2437MHz

27/05/2026

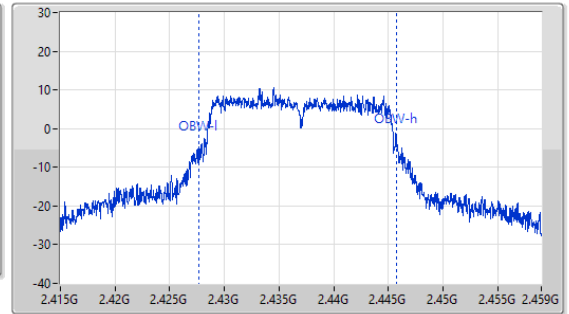
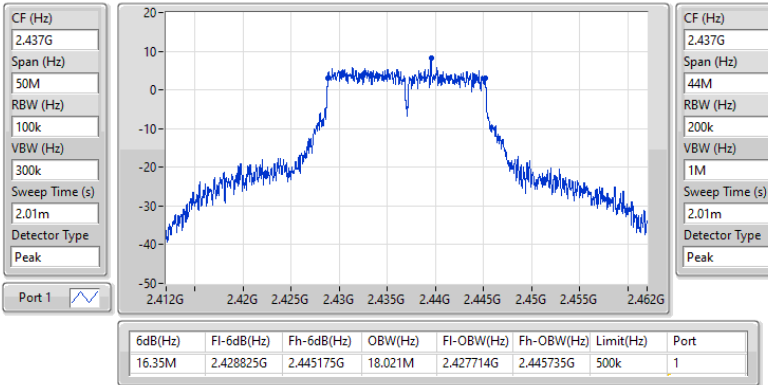


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW


2462MHz

27/05/2026

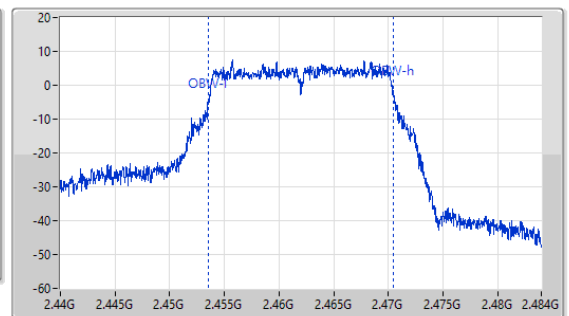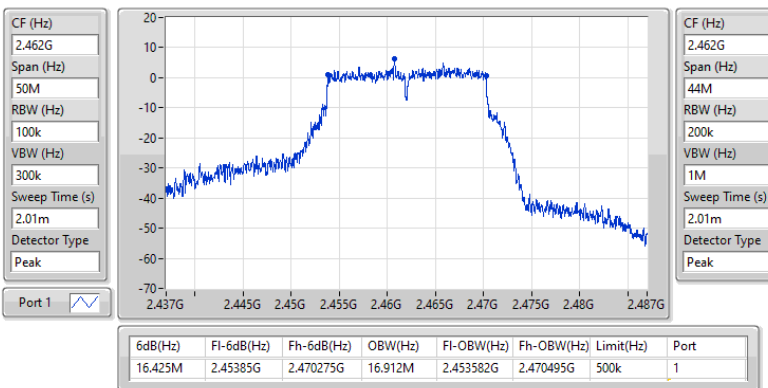


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2412MHz

28/05/2026

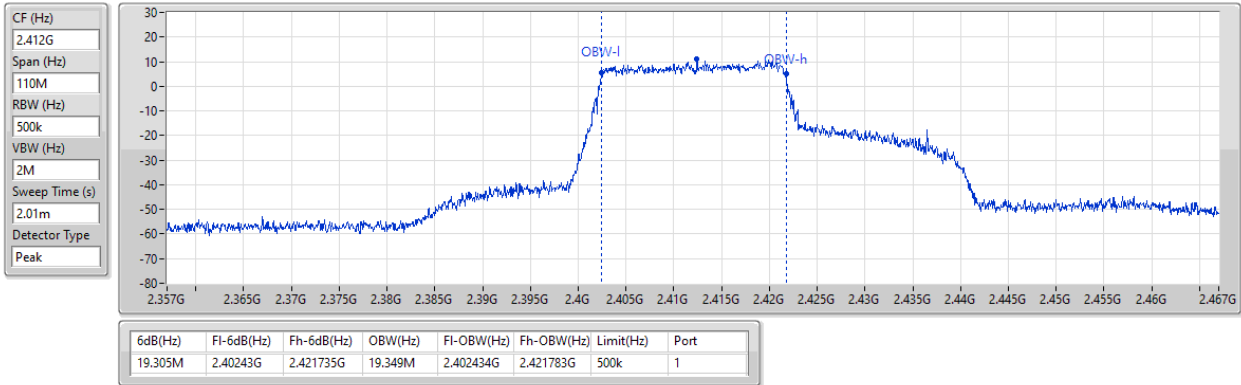

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2437MHz

28/05/2026

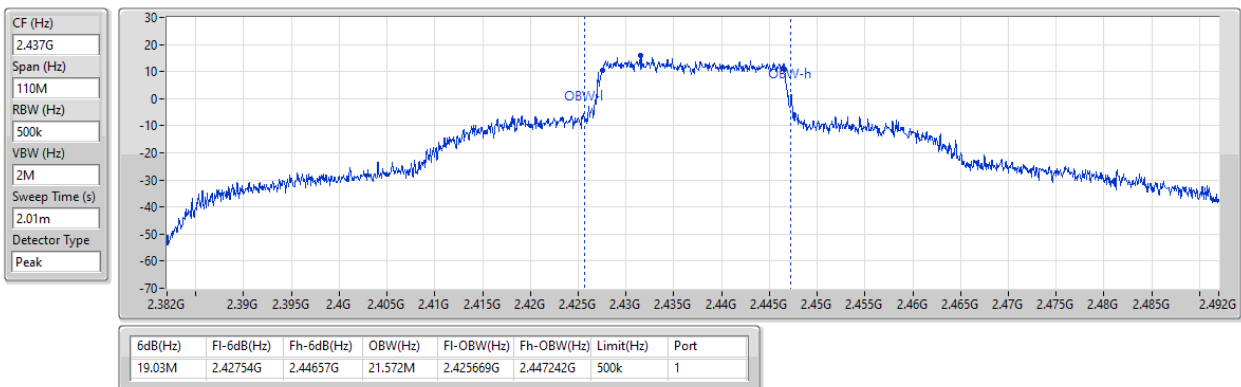


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2462MHz

29/05/2026

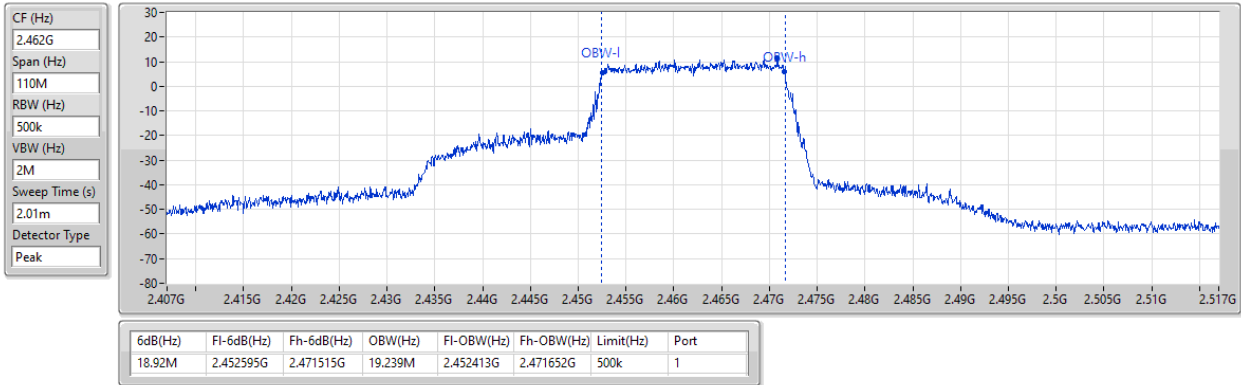

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

27/05/2026

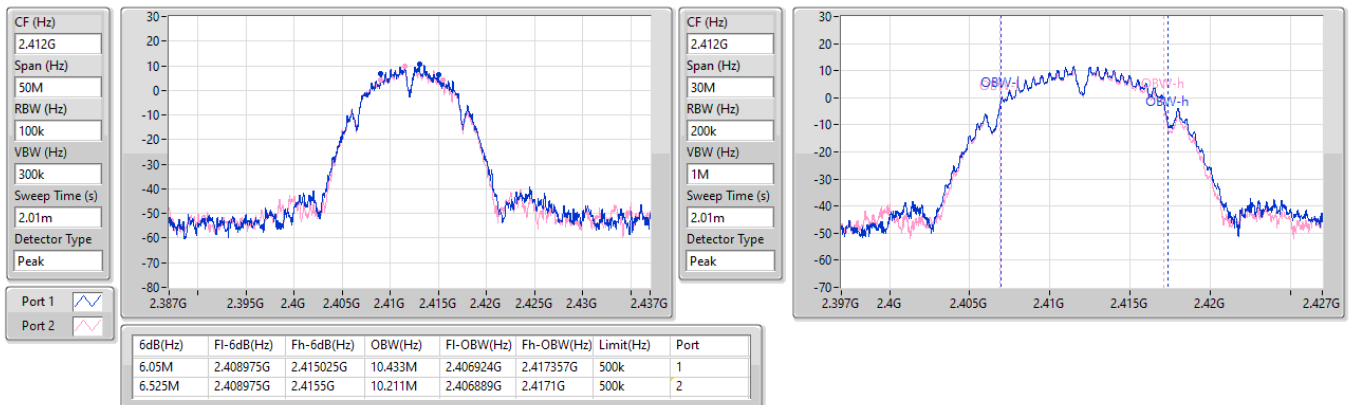


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2437MHz

27/05/2026

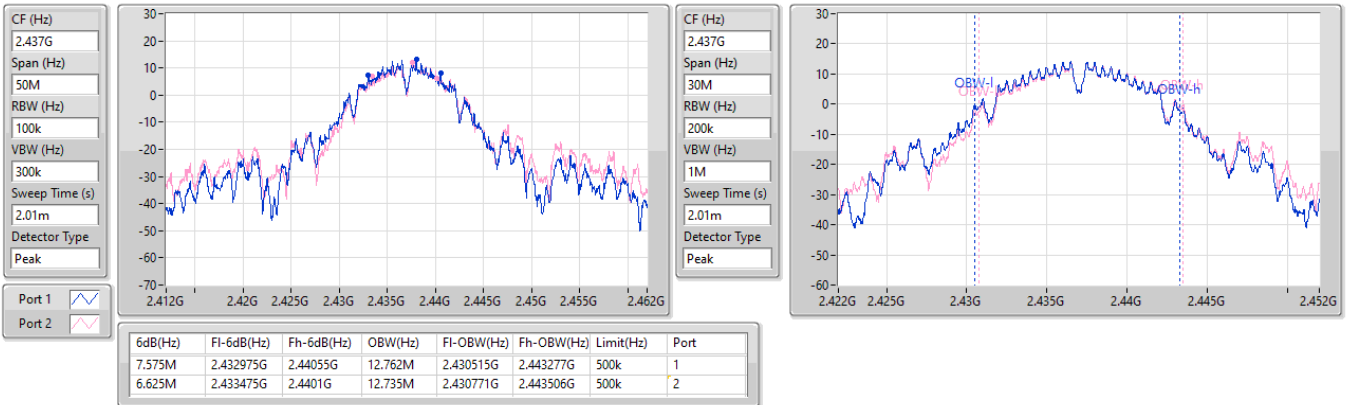

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2462MHz

27/05/2026

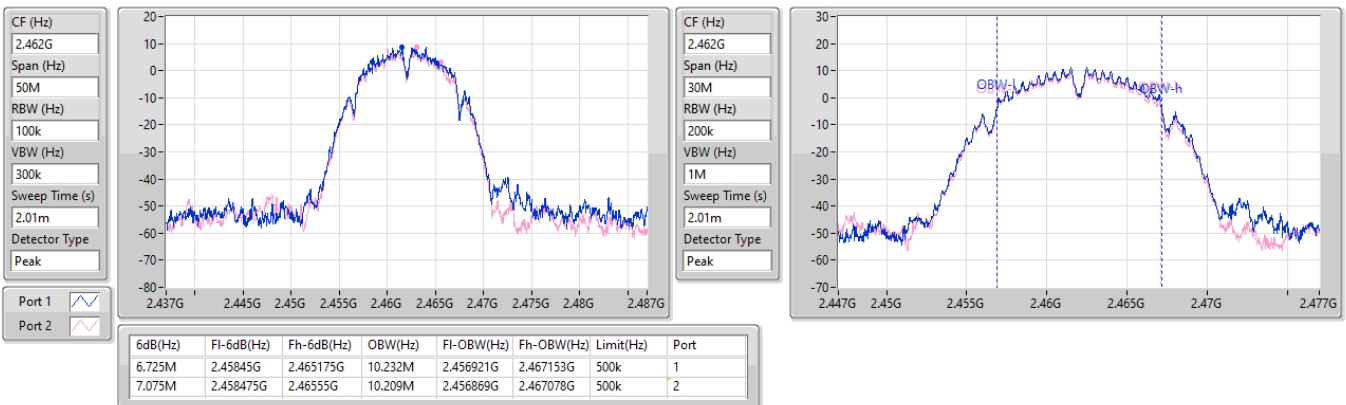


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2412MHz

27/05/2026

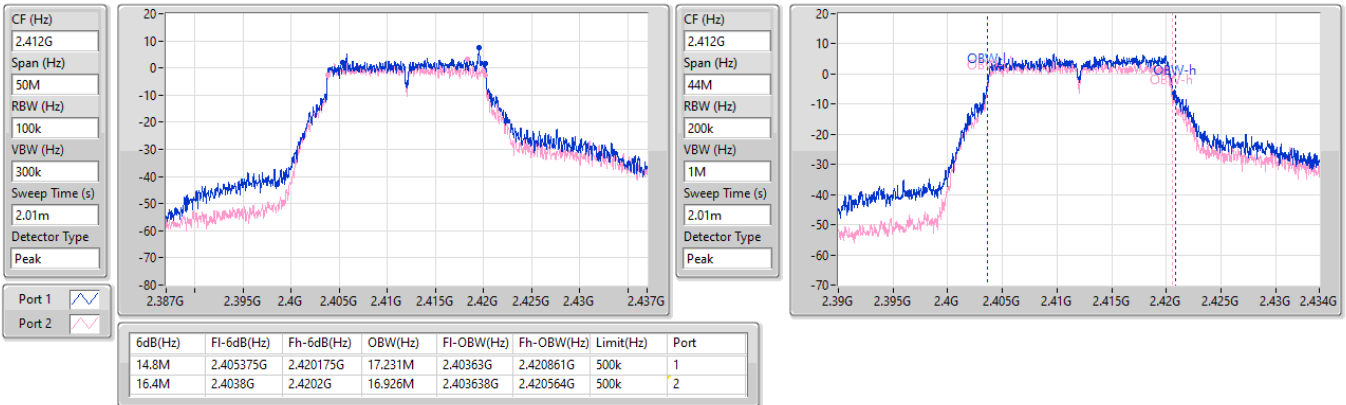

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2437MHz

27/05/2026

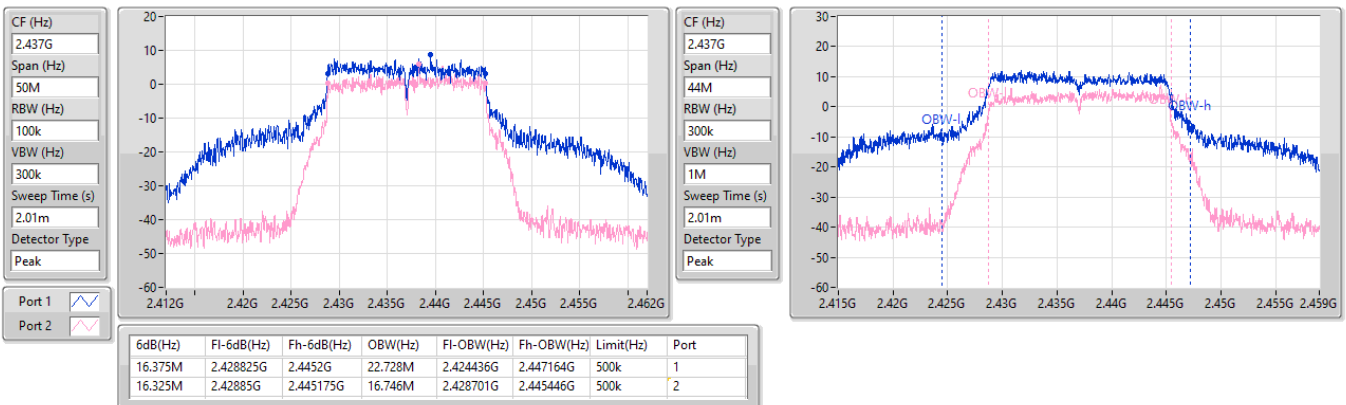


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2462MHz

27/05/2026

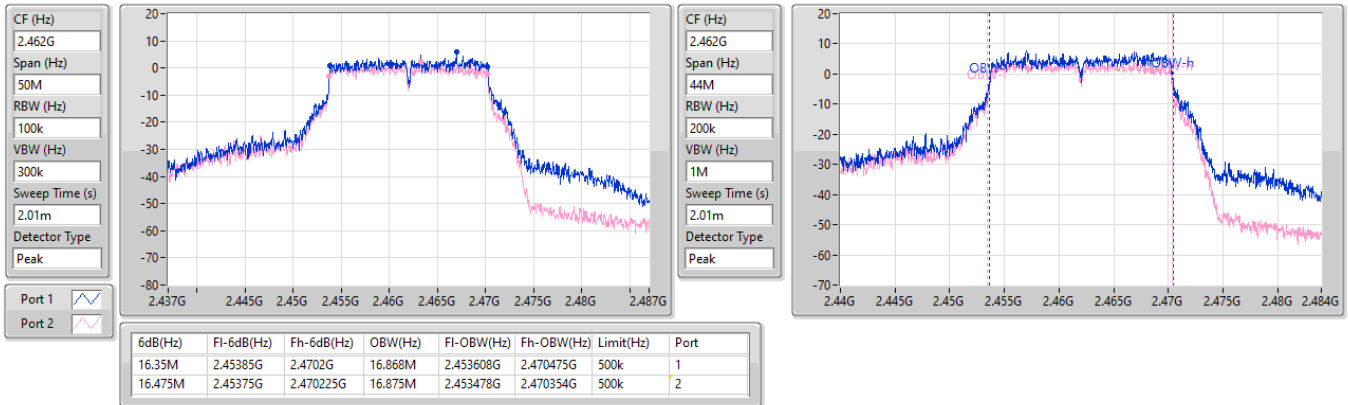
2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
2412MHz

29/05/2026

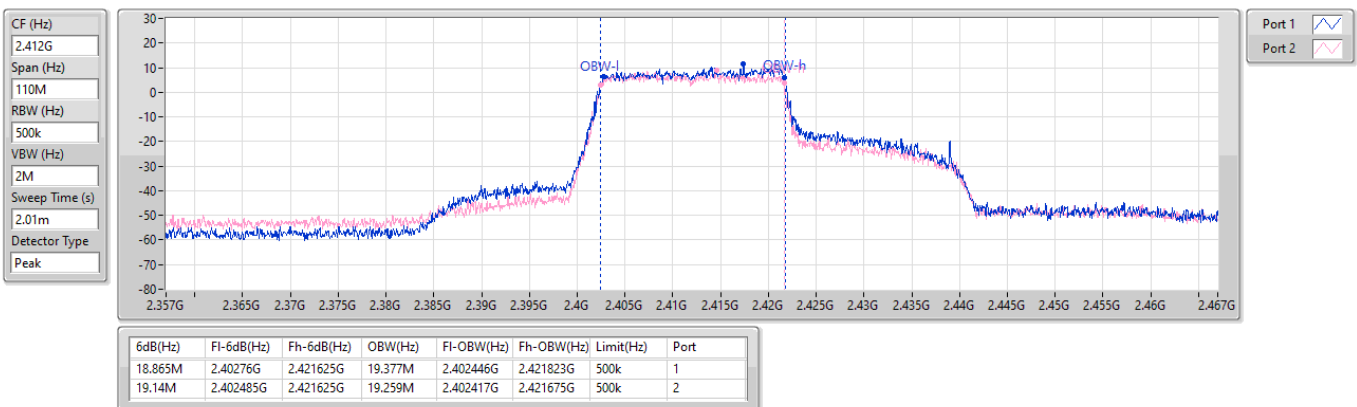

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

2437MHz

29/05/2026

CF (Hz)
2.437G


Span (Hz)
110M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

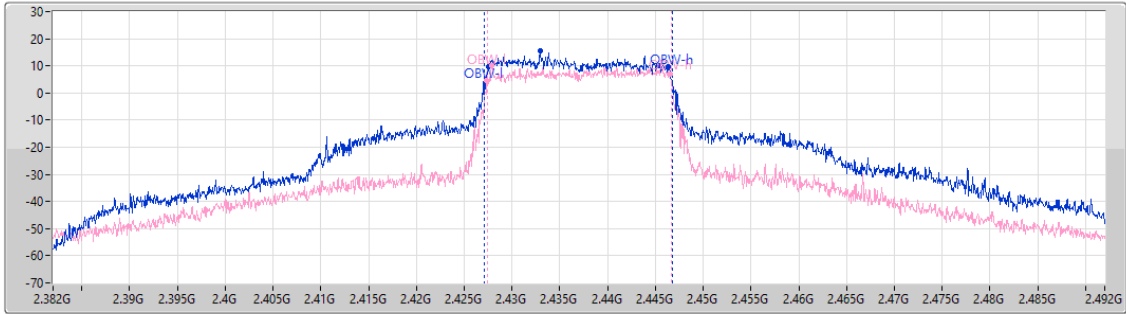

Port 1 

Port 2 

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.755M	2.427595G	2.44635G	19.585M	2.42715G	2.446735G	500k	1
19.195M	2.427375G	2.44657G	19.296M	2.427394G	2.44669G	500k	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

2462MHz

29/05/2026

CF (Hz)
2.462G


Span (Hz)
110M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

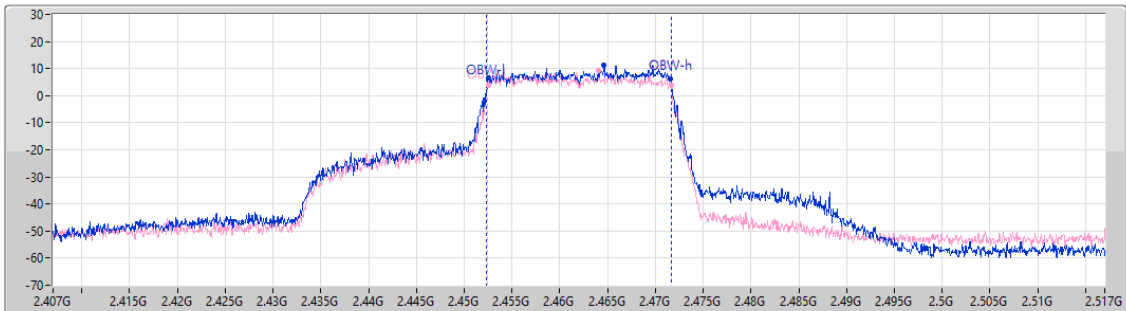


Port 1 

Port 2 


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.03M	2.45254G	2.47157G	19.342M	2.452321G	2.471663G	500k	1
19.14M	2.45254G	2.47168G	19.284M	2.452399G	2.471683G	500k	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
2412MHz

29/05/2026

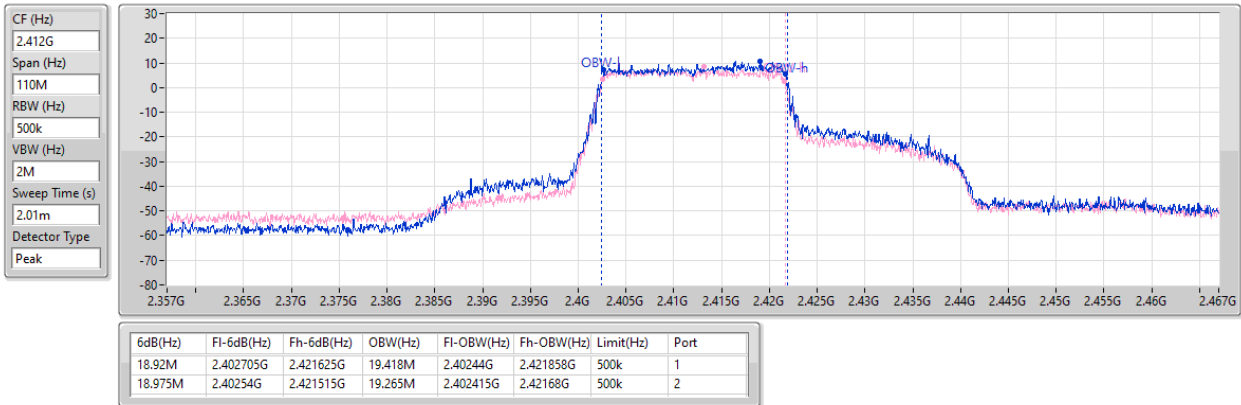
2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
2437MHz

29/05/2026

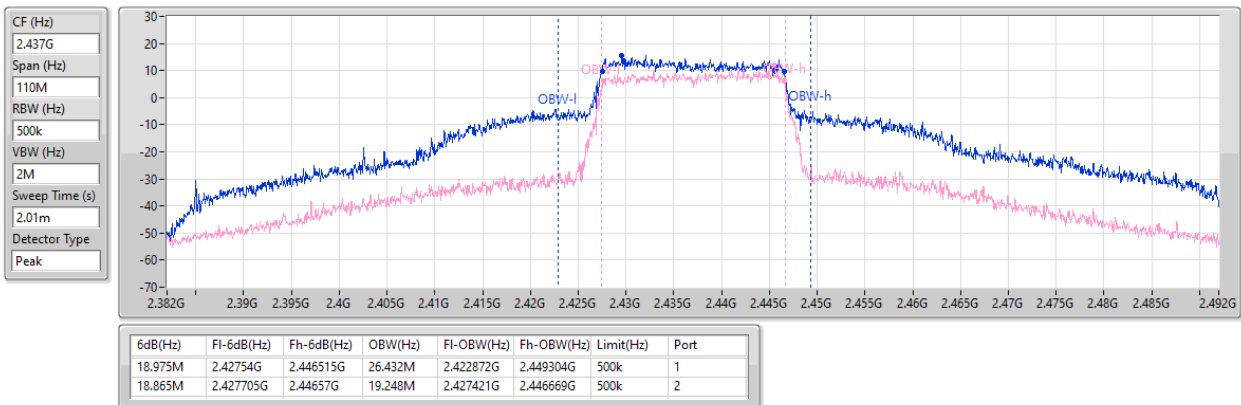

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

2462MHz

29/05/2026

CF (Hz)
2.462G


Span (Hz)
110M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

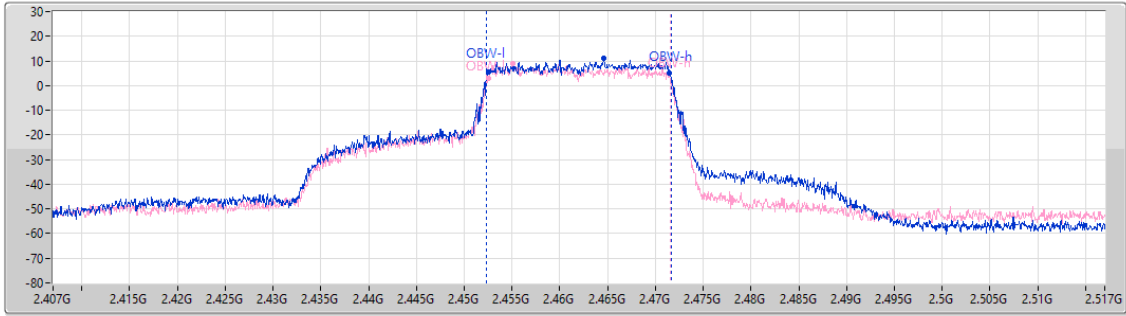

Port 1 

Port 2 

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.92M	2.45254G	2.47146G	19.324M	2.452317G	2.471642G	500k	1
18.92M	2.45254G	2.47146G	19.313M	2.452285G	2.471598G	500k	2

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	21.90	0.15488
802.11b_Nss1,(1Mbps)_2TX	24.19	0.26242
802.11g_Nss1,(6Mbps)_1TX	19.61	0.09141
802.11g_Nss1,(6Mbps)_2TX	22.45	0.17579
802.11be EHT20_Nss1,(MCS0)_1TX	21.57	0.14355
802.11be EHT20_Nss1,(MCS0)_2TX	21.77	0.15031
802.11be EHT20_Nss2,(MCS0)_2TX	22.72	0.18707
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.77	0.15031

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	18.79		18.79	29.02
2417MHz	Pass	6.98	19.77		19.77	29.02
2437MHz	Pass	6.98	21.90		21.90	29.02
2457MHz	Pass	6.98	18.60		18.60	29.02
2462MHz	Pass	6.98	18.14		18.14	29.02
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	17.31		17.31	29.02
2437MHz	Pass	6.98	19.61		19.61	29.02
2462MHz	Pass	6.98	17.63		17.63	29.02
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	17.20		17.20	29.02
2417MHz	Pass	6.98	19.85		19.85	29.02
2437MHz	Pass	6.98	21.57		21.57	29.02
2457MHz	Pass	6.98	19.04		19.04	29.02
2462MHz	Pass	6.98	17.29		17.29	29.02
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	18.79	18.55	21.68	29.02
2417MHz	Pass	6.98	19.54	17.95	21.83	29.02
2437MHz	Pass	6.98	21.32	21.04	24.19	29.02
2457MHz	Pass	6.98	19.18	18.11	21.69	29.02
2462MHz	Pass	6.98	18.29	17.45	20.90	29.02
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	17.80	16.33	20.14	29.02
2437MHz	Pass	6.98	20.93	17.14	22.45	29.02
2462MHz	Pass	6.98	17.83	16.15	20.08	29.02
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	16.85	15.43	19.21	29.02
2417MHz	Pass	6.98	19.23	17.27	21.37	29.02
2437MHz	Pass	6.98	20.22	16.56	21.77	29.02
2457MHz	Pass	6.98	19.13	17.23	21.29	29.02
2462MHz	Pass	6.98	16.86	15.28	19.15	29.02
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	16.97	15.42	19.27	29.02
2417MHz	Pass	6.98	20.02	17.00	21.78	29.02
2437MHz	Pass	6.98	21.35	17.04	22.72	29.02
2457MHz	Pass	6.98	18.49	16.70	20.70	29.02
2462MHz	Pass	6.98	16.80	15.17	19.07	29.02
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	16.85	15.43	19.21	29.02
2417MHz	Pass	6.98	19.23	17.27	21.37	29.02
2437MHz	Pass	6.98	20.22	16.56	21.77	29.02
2457MHz	Pass	6.98	19.13	17.23	21.29	29.02
2462MHz	Pass	6.98	16.86	15.28	19.15	29.02

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-1.08
802.11b_Nss1,(1Mbps)_2TX	0.32
802.11g_Nss1,(6Mbps)_1TX	-5.85
802.11g_Nss1,(6Mbps)_2TX	-4.62
802.11be EHT20_Nss1,(MCS0)_1TX	-6.68
802.11be EHT20_Nss1,(MCS0)_2TX	-6.67
802.11be EHT20_Nss2,(MCS0)_2TX	-5.34

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-4.44		-4.44	7.02
2437MHz	Pass	6.98	-1.08		-1.08	7.02
2462MHz	Pass	6.98	-5.04		-5.04	7.02
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-7.79		-7.79	7.02
2437MHz	Pass	6.98	-5.85		-5.85	7.02
2462MHz	Pass	6.98	-8.33		-8.33	7.02
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-10.80		-10.80	7.02
2437MHz	Pass	6.98	-6.68		-6.68	7.02
2462MHz	Pass	6.98	-11.29		-11.29	7.02
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-3.86	-3.36	-1.12	7.02
2437MHz	Pass	6.98	-0.86	-1.87	0.32	7.02
2462MHz	Pass	6.98	-4.13	-4.75	-1.83	7.02
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-8.59	-9.73	-7.94	7.02
2437MHz	Pass	6.98	-5.65	-9.38	-4.62	7.02
2462MHz	Pass	6.98	-8.01	-9.39	-7.15	7.02
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-11.57	-12.59	-10.21	7.02
2437MHz	Pass	6.98	-7.00	-11.97	-6.67	7.02
2462MHz	Pass	6.98	-11.52	-13.43	-9.83	7.02
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.98	-10.77	-13.25	-10.10	7.02
2437MHz	Pass	6.98	-6.13	-10.07	-5.34	7.02
2462MHz	Pass	6.98	-10.59	-11.42	-9.66	7.02


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2412MHz

27/05/2026

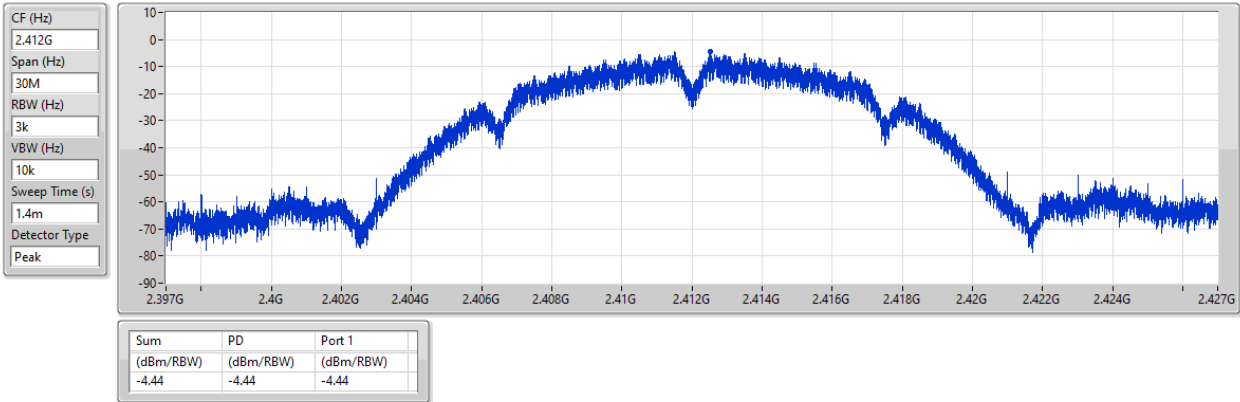


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

27/05/2026

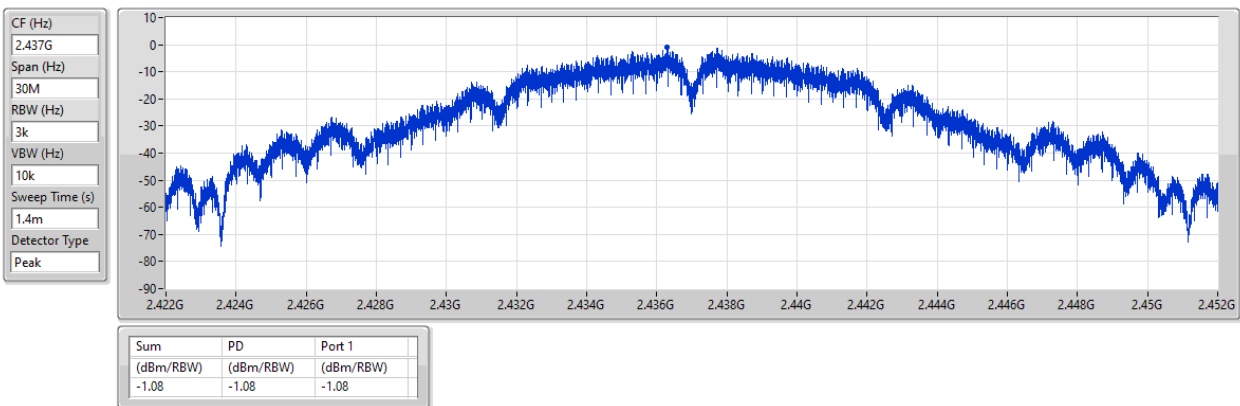


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2462MHz

27/05/2026

CF (Hz)
2.462G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
1.4m
Detector Type
Peak

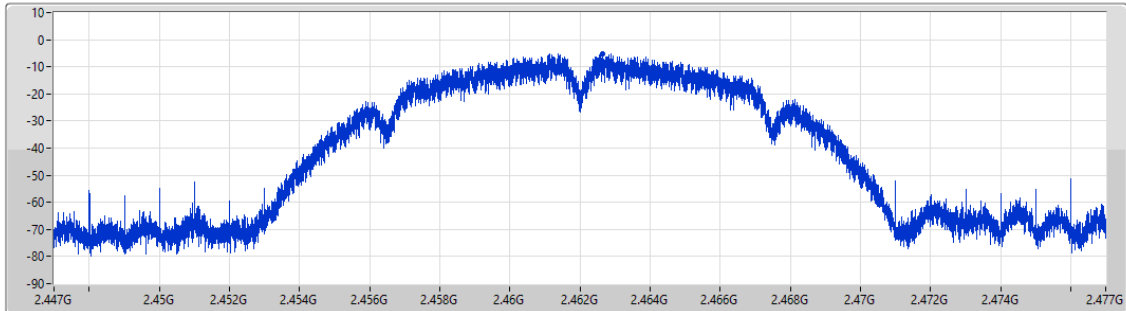

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)
-5.04	-5.04	-5.04


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

27/05/2026

CF (Hz)
2.412G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
1.4m
Detector Type
Peak

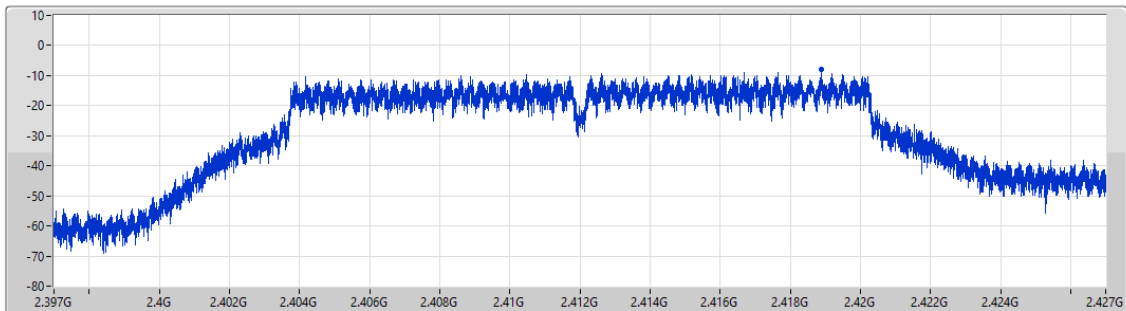


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)
-7.79	-7.79	-7.79

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2437MHz

27/05/2026

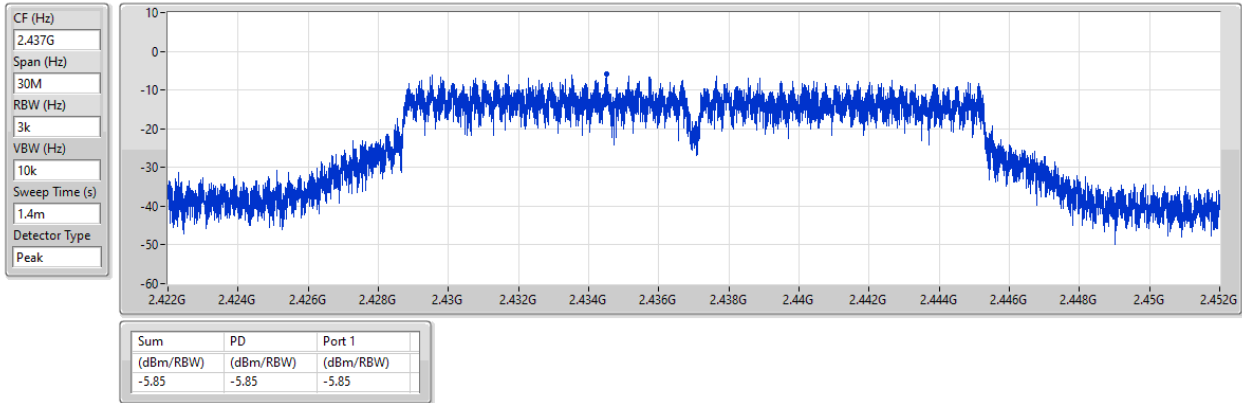


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

27/05/2026

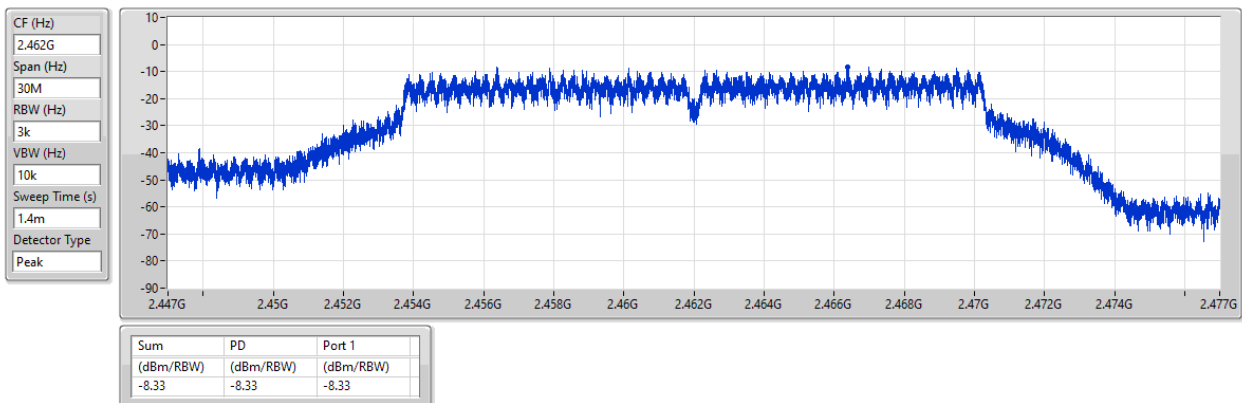


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2412MHz

28/05/2026

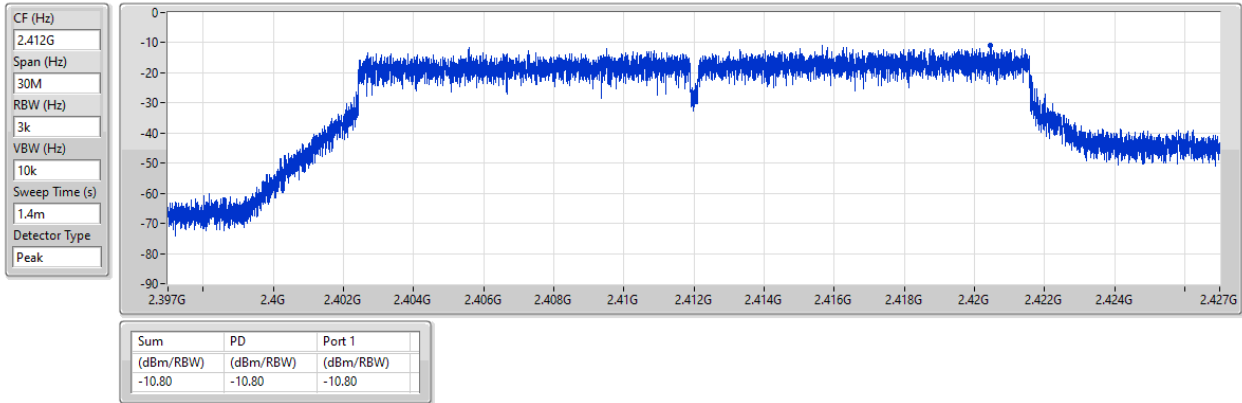


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2437MHz

29/05/2026

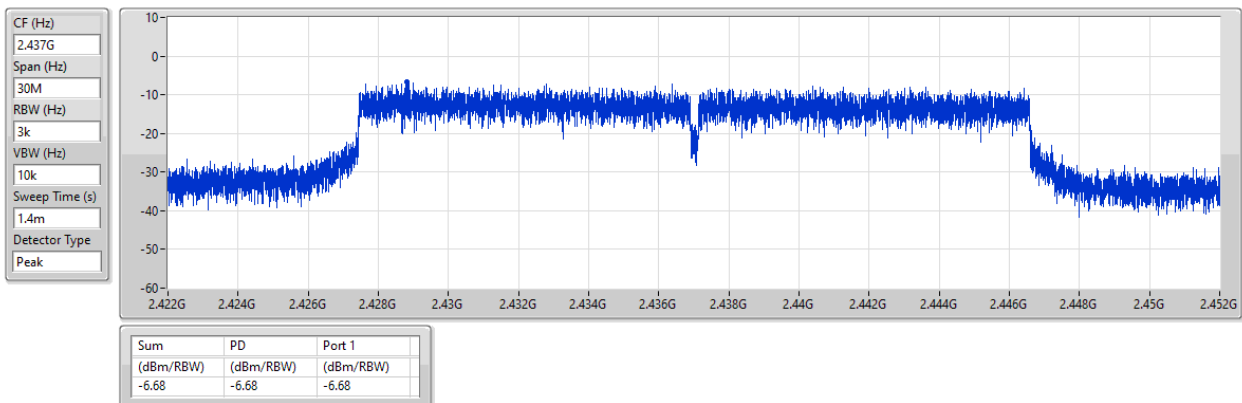


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2462MHz

29/05/2026

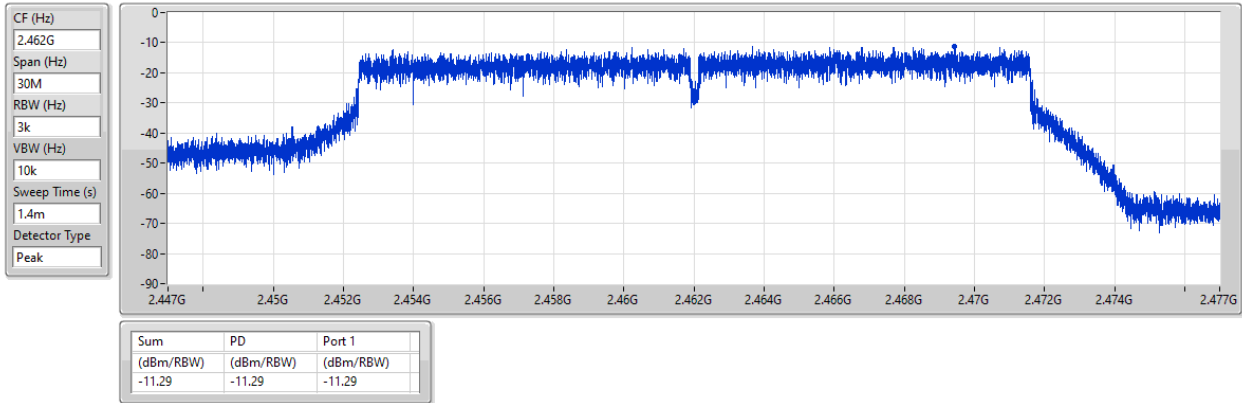


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

27/05/2026

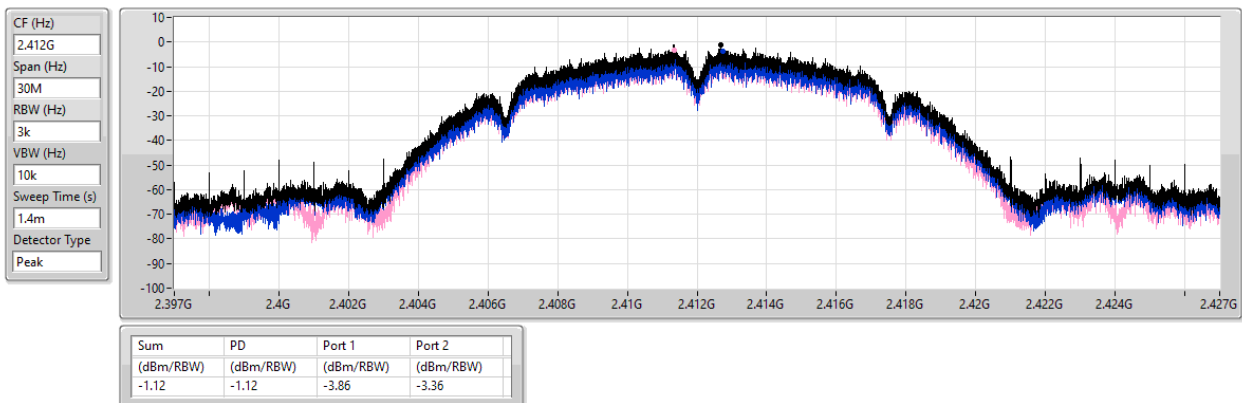


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

27/05/2026

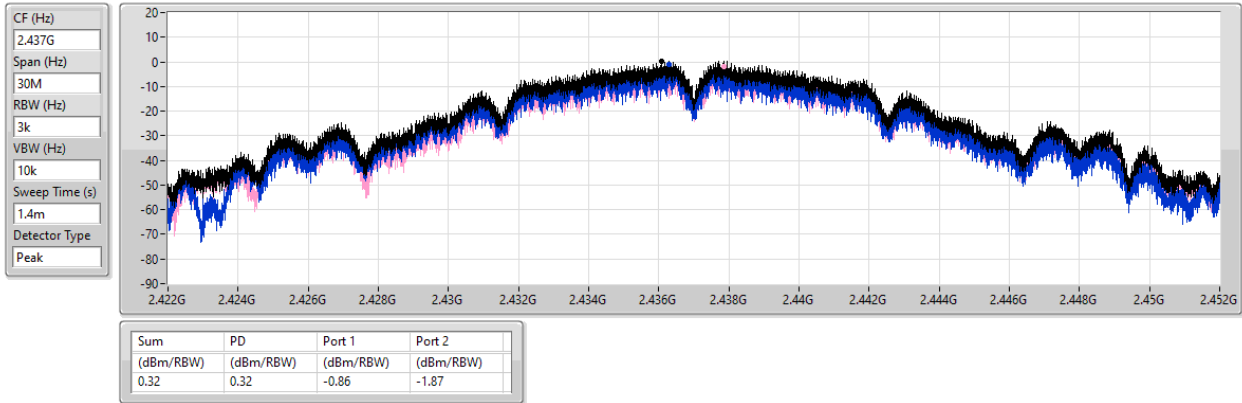


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

27/05/2026

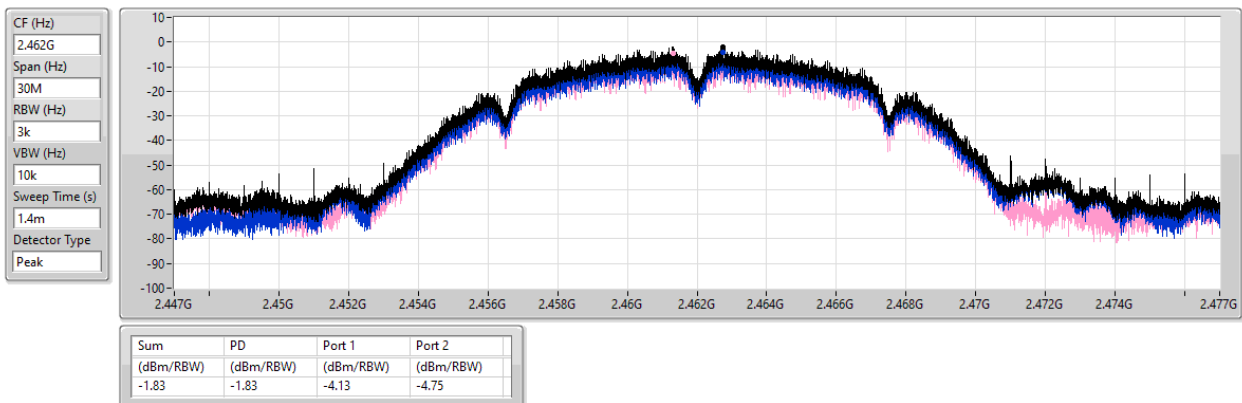


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

27/05/2026

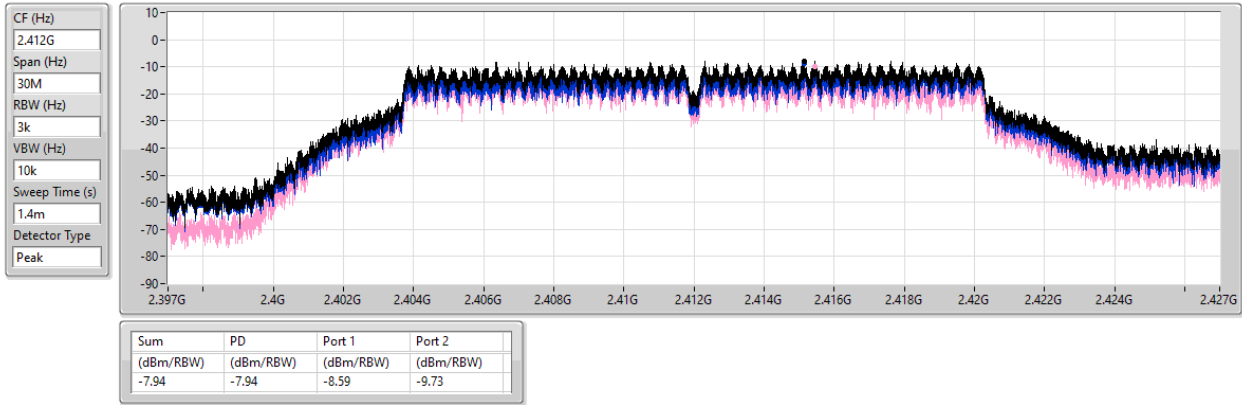


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

27/05/2026

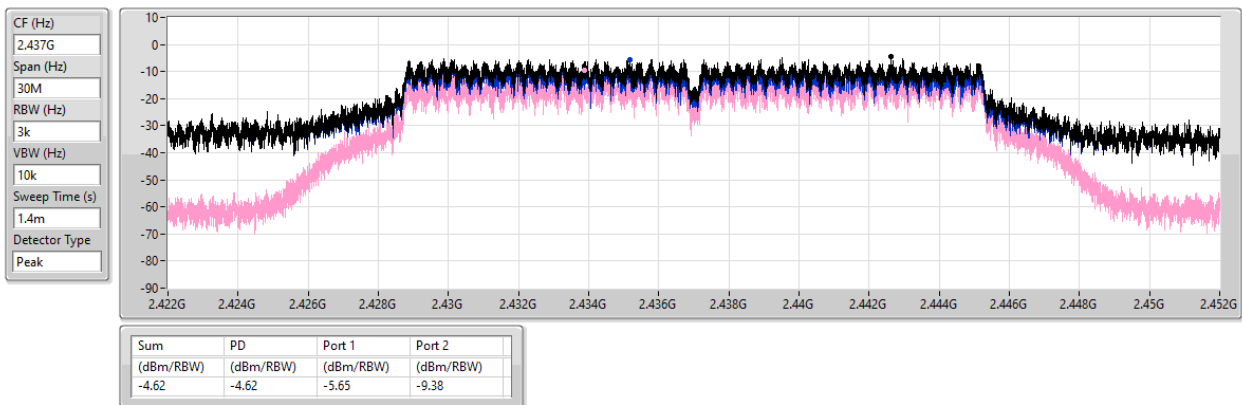


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

27/05/2026

CF (Hz)
2.462G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
1.4m
Detector Type
Peak

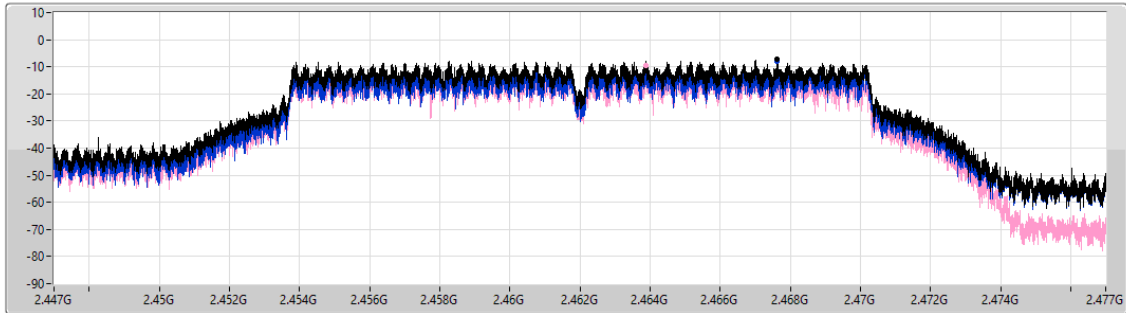

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.15	-7.15	-8.01	-9.39

Sum
Port 1
Port 2


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2412MHz

29/05/2026

CF (Hz)
2.412G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
1.4m
Detector Type
Peak

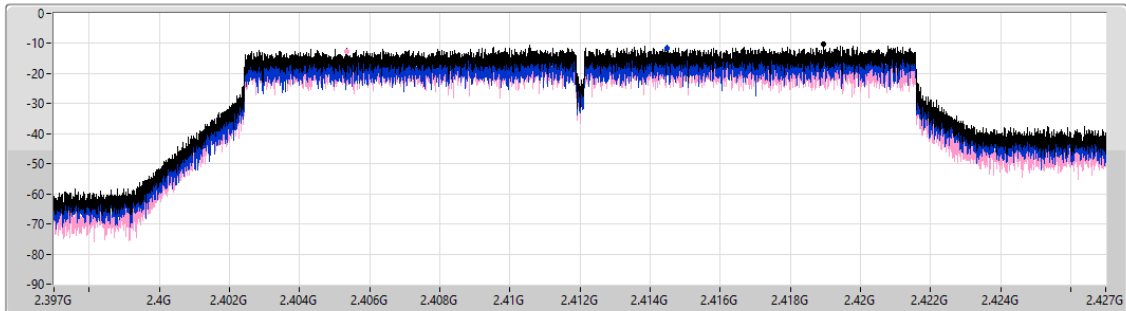

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.21	-10.21	-11.57	-12.59


Sum
Port 1
Port 2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2437MHz

29/05/2026

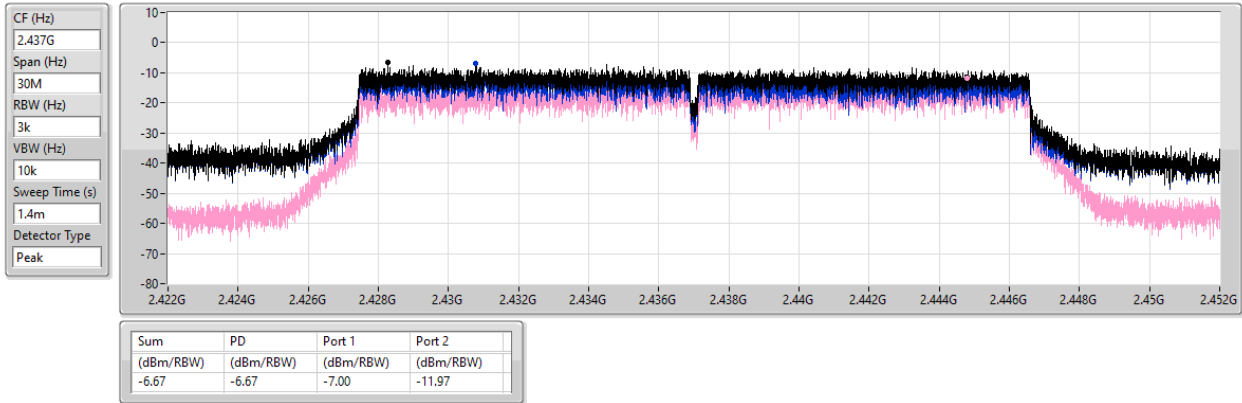


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2462MHz

29/05/2026

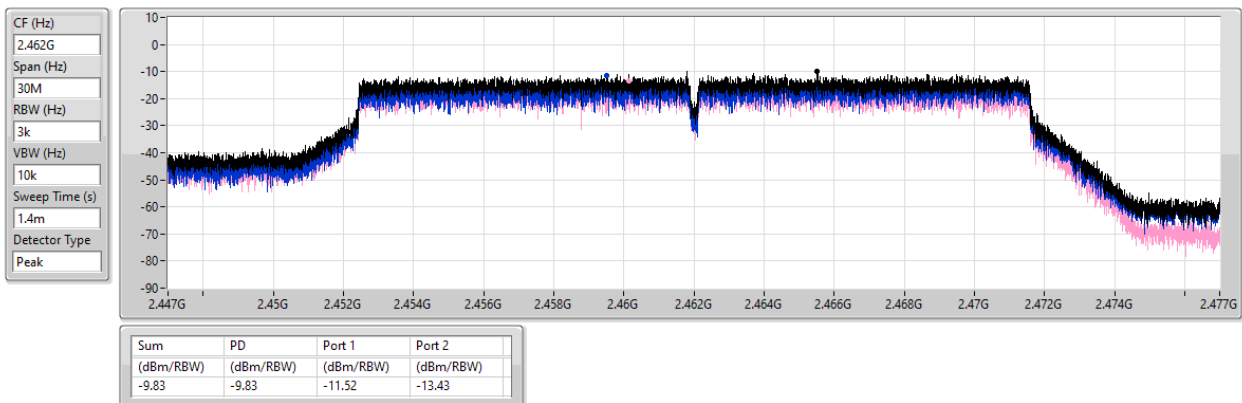


2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

2412MHz

29/05/2026

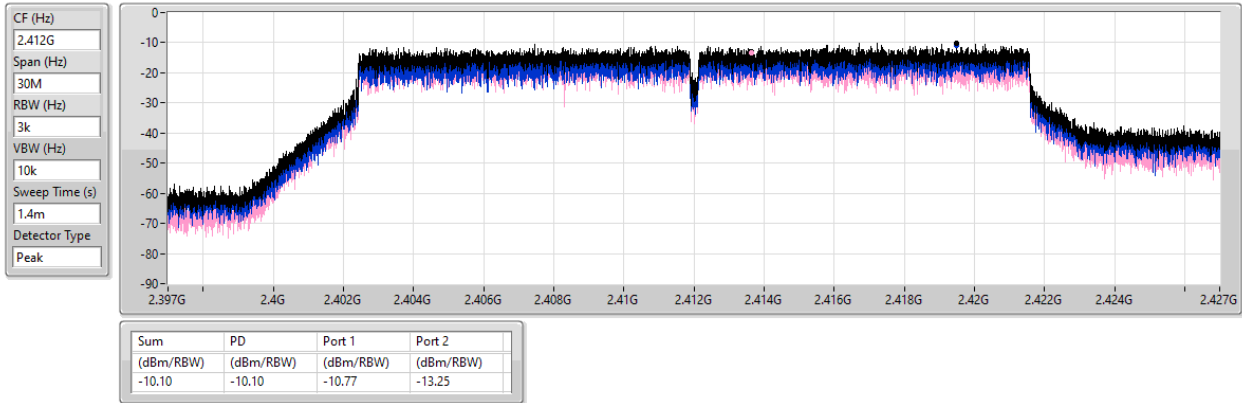


2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

2437MHz

29/05/2026

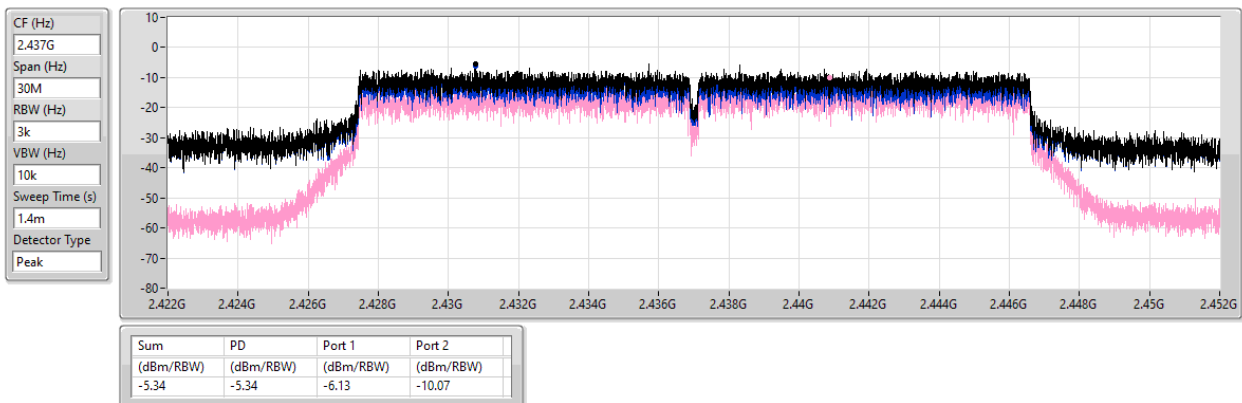


2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

2462MHz

29/05/2026

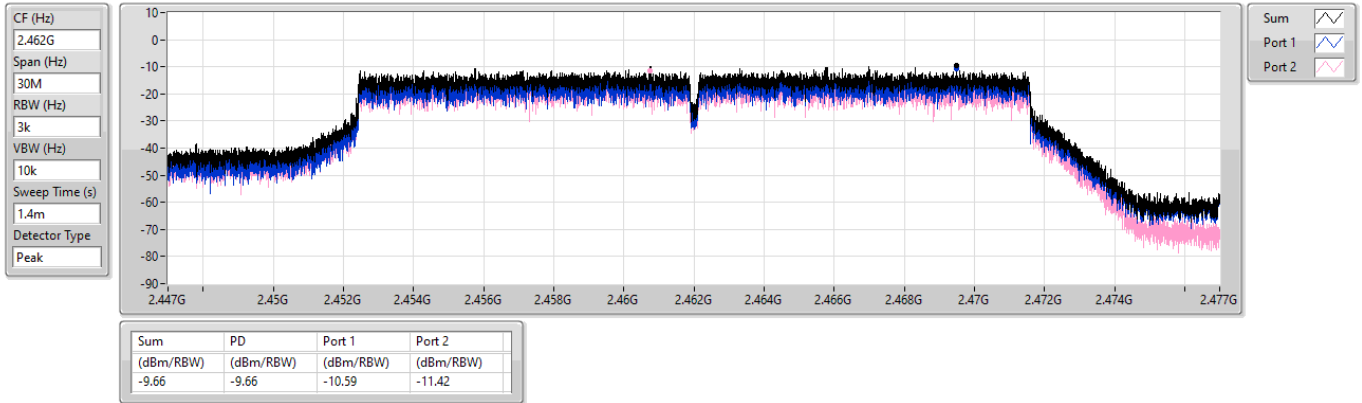

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.43657G	13.58	-16.42	2.10137G	-53.86	2.39952G	-39.49	2.4G	-44.73	2.52326G	-53.87	21.51895G	-44.88	1
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43758G	14.10	-15.90	2.0804G	-53.02	2.3996G	-31.01	2.4G	-32.52	2.52246G	-53.40	21.80553G	-45.57	2
802.11g_Nss1,(6Mbps)_1TX	Pass	2.43206G	10.11	-19.89	1.63304G	-52.74	2.39992G	-34.01	2.4G	-31.22	2.50902G	-54.20	21.85329G	-45.58	1
802.11g_Nss1,(6Mbps)_2TX	Pass	2.43073G	11.49	-18.51	1.81828G	-52.93	2.39992G	-33.90	2.4G	-32.39	2.50918G	-53.36	21.96005G	-45.73	1
802.11be EHT20_Nss1,(MCS0)_1TX	Pass	2.43206G	10.97	-19.03	1.88585G	-54.58	2.4G	-33.45	2.4G	-34.42	2.52142G	-54.19	21.88139G	-46.67	1
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	2.43073G	9.92	-20.08	42.82M	-54.95	2.4G	-34.53	2.4G	-34.33	2.5147G	-53.07	22.00501G	-46.76	1
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	2.43073G	11.09	-18.91	2.14681G	-54.99	2.39992G	-31.16	2.4G	-32.95	2.51582G	-54.09	21.94882G	-46.75	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43657G	13.58	-16.42	2.0338G	-53.96	2.4G	-43.43	2.4G	-42.24	2.5099G	-53.52	21.75215G	-45.52	1
2437MHz	Pass	2.43657G	13.58	-16.42	2.10137G	-53.86	2.39952G	-39.49	2.4G	-44.73	2.52326G	-53.87	21.51895G	-44.88	1
2462MHz	Pass	2.43657G	13.58	-16.42	2.11885G	-52.26	2.3964G	-52.89	2.4G	-55.24	2.51918G	-53.34	21.79991G	-45.41	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43206G	10.11	-19.89	1.63304G	-52.74	2.39992G	-34.01	2.4G	-31.22	2.50902G	-54.20	21.85329G	-45.58	1
2437MHz	Pass	2.43206G	10.11	-19.89	1.93245G	-53.32	2.39984G	-40.91	2.4G	-40.75	2.50998G	-54.11	21.89262G	-45.49	1
2462MHz	Pass	2.43206G	10.11	-19.89	1.89517G	-52.97	2.39264G	-52.93	2.4G	-54.13	2.50398G	-53.38	21.84486G	-45.86	1
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43206G	10.97	-19.03	1.83575G	-54.93	2.4G	-34.82	2.4G	-35.07	2.52318G	-54.86	21.86734G	-46.47	1
2437MHz	Pass	2.43206G	10.97	-19.03	1.88585G	-54.58	2.4G	-33.45	2.4G	-34.42	2.52142G	-54.19	21.88139G	-46.67	1
2462MHz	Pass	2.43206G	10.97	-19.03	2.15147G	-53.82	2.398G	-53.52	2.4G	-55.45	2.50158G	-54.51	21.96286G	-45.73	1
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43758G	14.10	-15.90	2.16894G	-54.04	2.39856G	-43.89	2.4G	-45.87	2.50086G	-53.48	21.48243G	-46.00	1
2412MHz	Pass	2.43758G	14.10	-15.90	1.99536G	-53.87	2.4G	-45.14	2.4G	-44.58	2.50694G	-53.76	21.85329G	-46.10	2
2437MHz	Pass	2.43657G	13.94	-16.06	1.81478G	-53.93	2.39656G	-40.84	2.4G	-47.53	2.51494G	-53.64	21.94601G	-45.89	1
2437MHz	Pass	2.43758G	14.10	-15.90	2.0804G	-53.02	2.3996G	-31.01	2.4G	-32.52	2.52246G	-53.40	21.80553G	-45.57	2
2462MHz	Pass	2.43758G	14.10	-15.90	1.84041G	-54.38	2.39808G	-53.05	2.4G	-53.77	2.51894G	-53.58	21.89543G	-45.85	1
2462MHz	Pass	2.43758G	14.10	-15.90	1.81595G	-53.95	2.39272G	-53.26	2.4G	-55.49	2.5231G	-53.00	21.54424G	-45.76	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	11.49	-18.51	1.81828G	-52.93	2.39992G	-33.90	2.4G	-32.39	2.50918G	-53.36	21.96005G	-45.73	1
2412MHz	Pass	2.43073G	11.49	-18.51	1.77168G	-53.72	2.39992G	-37.31	2.4G	-34.99	2.51254G	-53.55	21.99377G	-45.81	2
2437MHz	Pass	2.43073G	11.49	-18.51	1.89517G	-53.93	2.39984G	-35.09	2.4G	-37.18	2.52246G	-53.31	21.90105G	-45.69	1
2437MHz	Pass	2.44208G	7.26	-22.74	1.95924G	-53.34	2.39984G	-46.77	2.4G	-48.08	2.50166G	-54.17	21.96286G	-45.52	2
2462MHz	Pass	2.43073G	11.49	-18.51	1.74022G	-53.63	2.39816G	-53.20	2.4G	-54.49	2.52102G	-53.88	21.8561G	-46.15	1
2462MHz	Pass	2.43073G	11.49	-18.51	2.00351G	-52.87	2.39336G	-52.39	2.4G	-55.13	2.52334G	-54.02	21.51614G	-45.75	2
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	9.92	-20.08	42.82M	-54.95	2.4G	-34.53	2.4G	-34.33	2.5147G	-53.07	22.00501G	-46.76	1
2412MHz	Pass	2.43073G	9.92	-20.08	2.12001G	-54.47	2.4G	-38.15	2.4G	-37.98	2.51646G	-53.87	21.84205G	-46.89	2
2437MHz	Pass	2.43073G	9.92	-20.08	2.17127G	-54.90	2.39968G	-39.36	2.4G	-40.07	2.52318G	-54.88	21.89824G	-46.54	1
2437MHz	Pass	2.43073G	9.92	-20.08	2.11302G	-55.08	2.4G	-45.03	2.4G	-47.71	2.50718G	-54.82	21.769G	-45.76	2
2462MHz	Pass	2.43073G	9.92	-20.08	1.26956G	-55.22	2.39888G	-53.12	2.4G	-55.28	2.52038G	-54.27	21.99096G	-47.08	1
2462MHz	Pass	2.43073G	9.92	-20.08	2.14098G	-54.29	2.3964G	-54.03	2.4G	-55.77	2.51918G	-54.65	21.85891G	-47.04	2
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	11.09	-18.91	2.18409G	-55.30	2.39992G	-35.51	2.4G	-33.78	2.52326G	-53.95	21.72686G	-45.86	1
2412MHz	Pass	2.43073G	11.09	-18.91	1.79964G	-54.63	2.4G	-38.81	2.4G	-35.17	2.50534G	-54.47	21.96567G	-46.47	2
2437MHz	Pass	2.43073G	11.09	-18.91	2.14681G	-54.99	2.39992G	-31.16	2.4G	-32.95	2.51582G	-54.09	21.94882G	-46.75	1
2437MHz	Pass	2.43073G	11.09	-18.91	2.19341G	-54.58	2.39976G	-45.53	2.4G	-46.22	2.51574G	-53.84	21.5611G	-46.20	2
2462MHz	Pass	2.43073G	11.09	-18.91	2.01633G	-54.52	2.3988G	-53.69	2.4G	-56.26	2.51014G	-54.23	21.86734G	-45.90	1
2462MHz	Pass	2.43073G	11.09	-18.91	2.127G	-54.32	2.39296G	-54.04	2.4G	-56.42	2.5135G	-54.65	21.92072G	-46.63	2


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2412MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

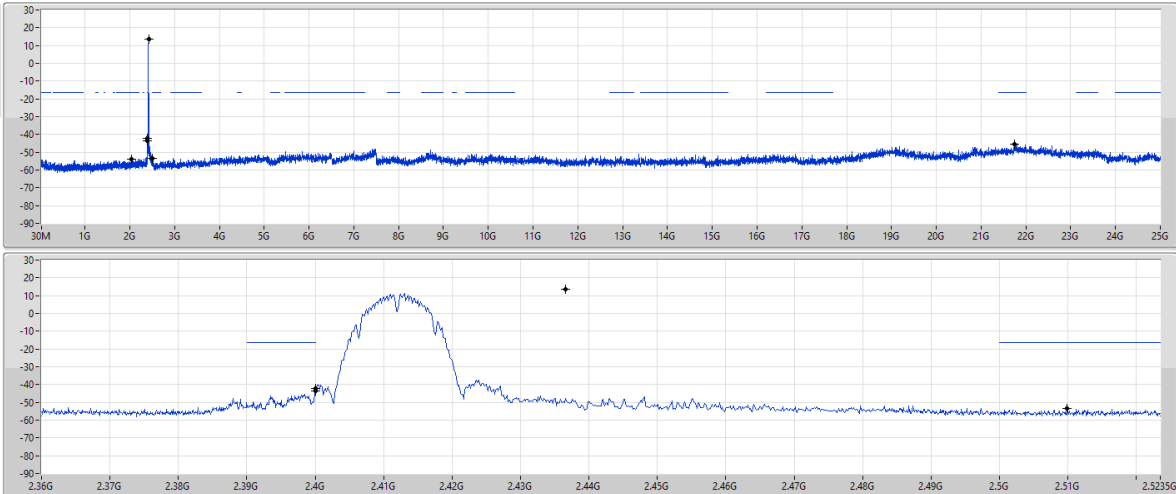

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	13.58	-16.42	2.0338G	-53.96	2.4G	-43.43	2.4G	-42.24	2.5099G	-53.52	21.75215G	-45.52	1


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2437MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

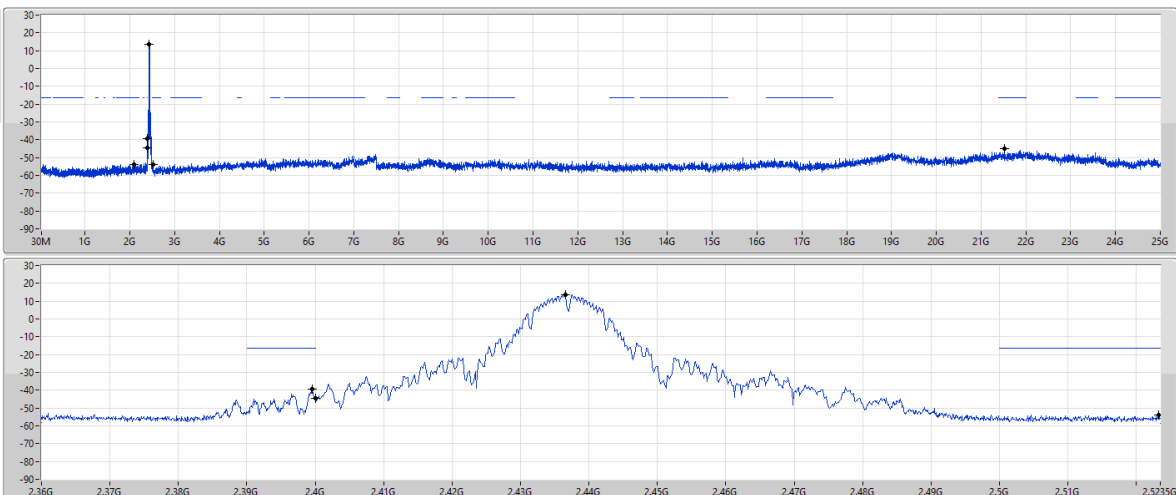


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	13.58	-16.42	2.10137G	-53.86	2.39952G	-39.49	2.4G	-44.73	2.52326G	-53.87	21.51895G	-44.88	1

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2462MHz

27/05/2026

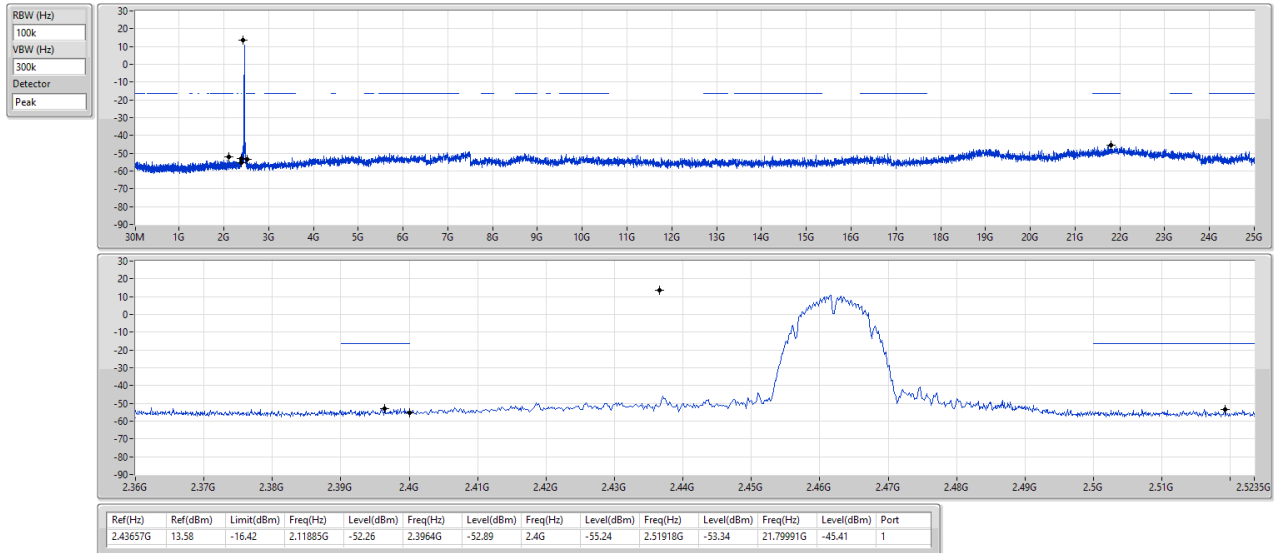


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2412MHz

27/05/2026

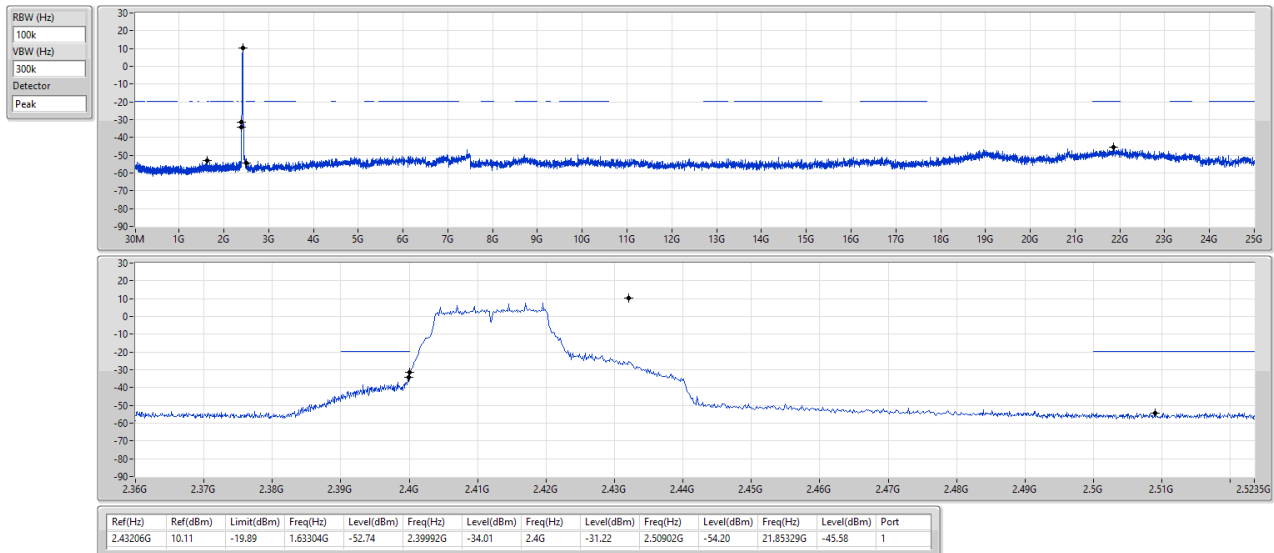


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2437MHz

27/05/2026

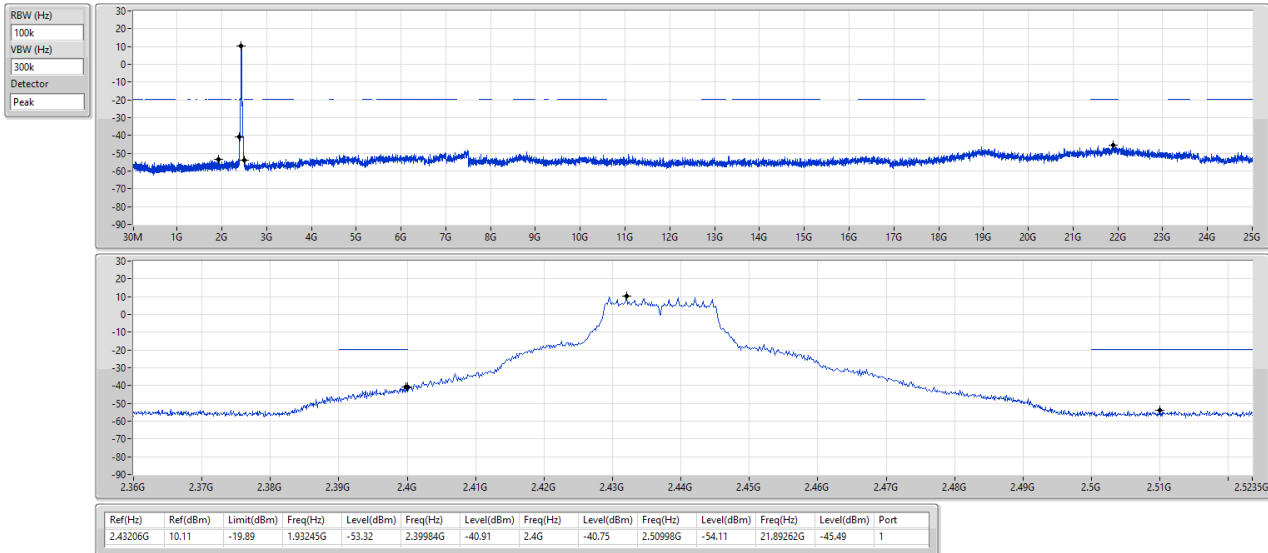


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2462MHz

27/05/2026

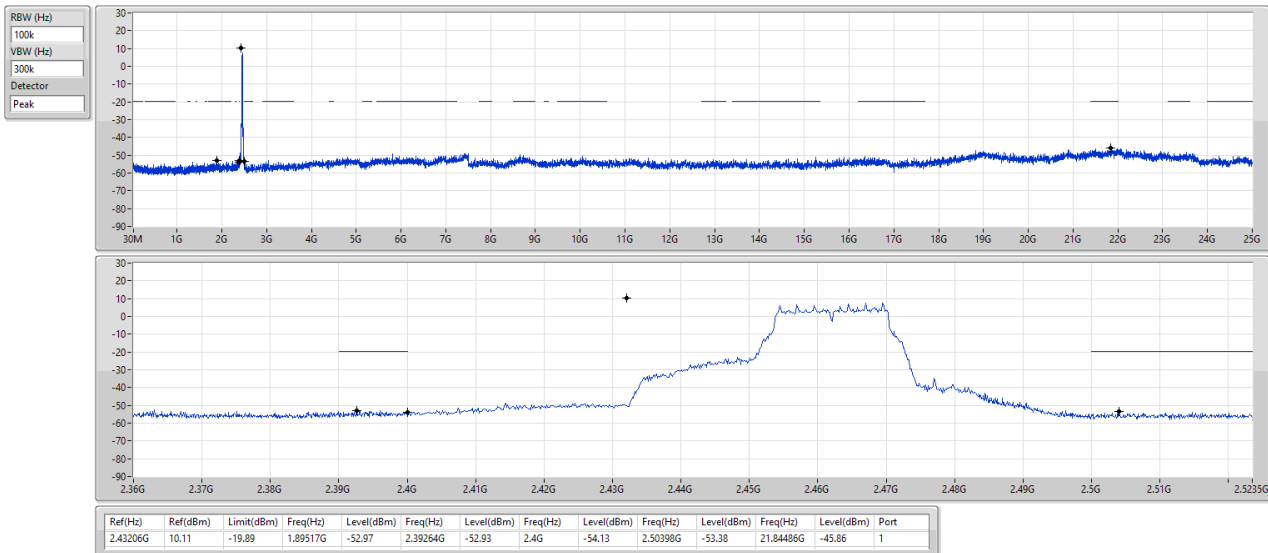

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX


CSEndB

2412MHz

28/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

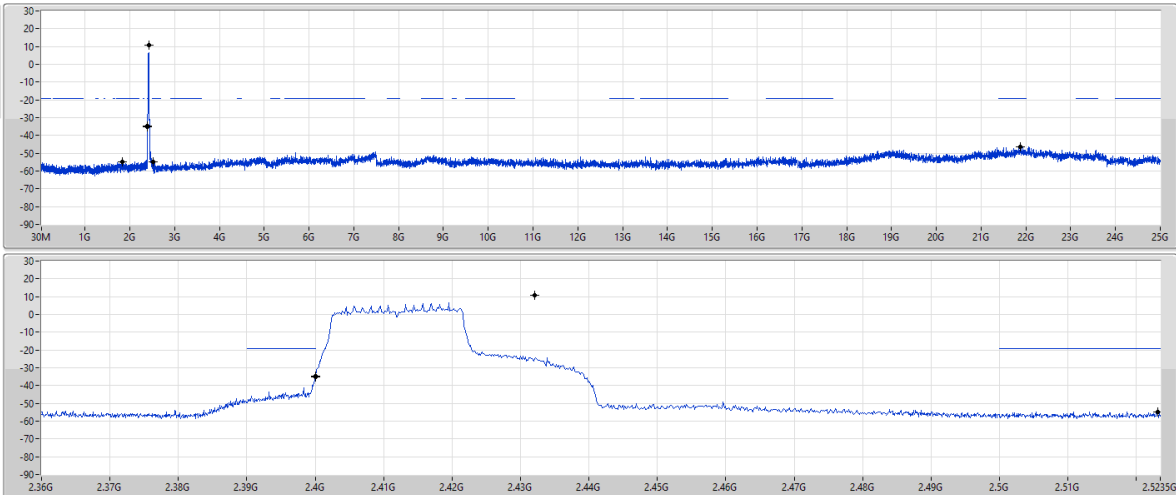

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43206G	10.97	-19.03	1.83575G	-54.93	2.4G	-34.82	2.4G	-35.07	2.52318G	-54.86	21.86734G	-46.47	1

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX


CSEndB

2437MHz

28/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

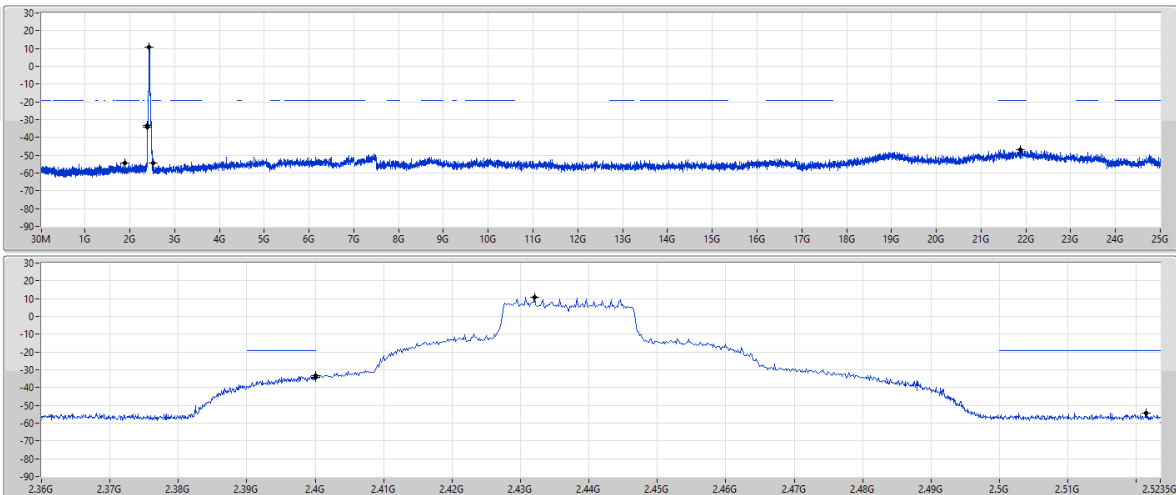


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43206G	10.97	-19.03	1.88585G	-54.58	2.4G	-33.45	2.4G	-34.42	2.52142G	-54.19	21.88139G	-46.67	1

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSEndB

2462MHz

29/05/2026

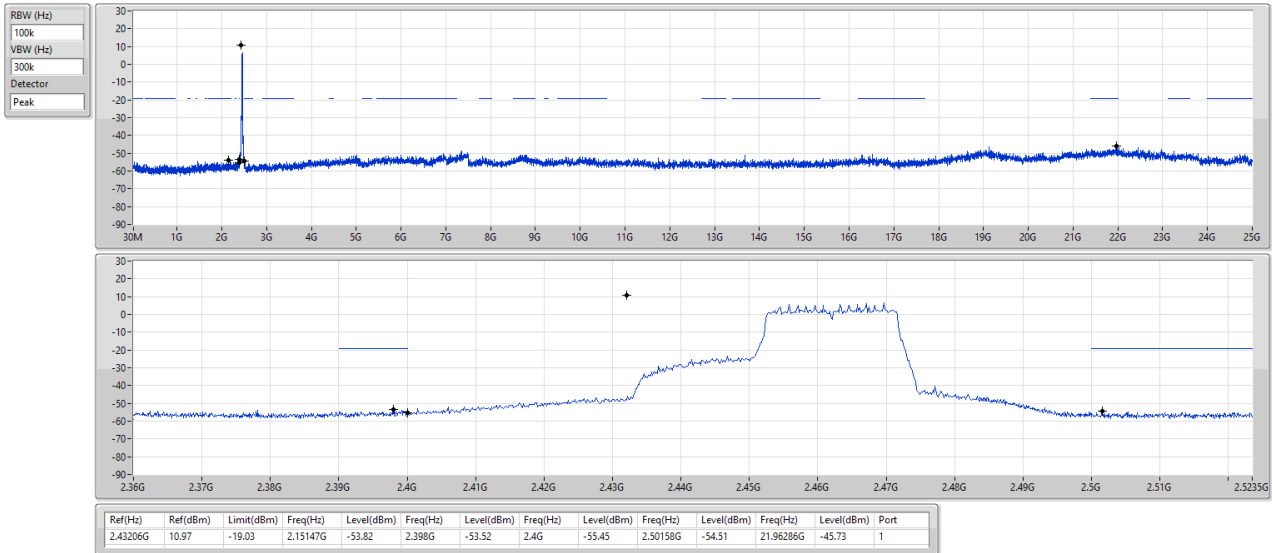


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2412MHz

27/05/2026

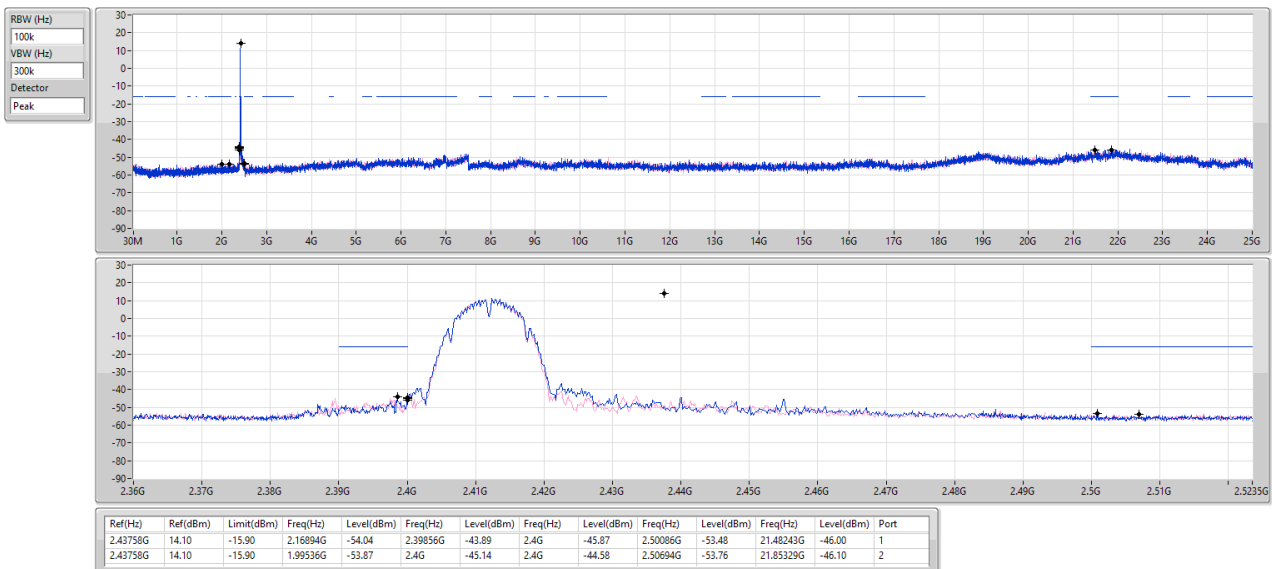

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2437MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

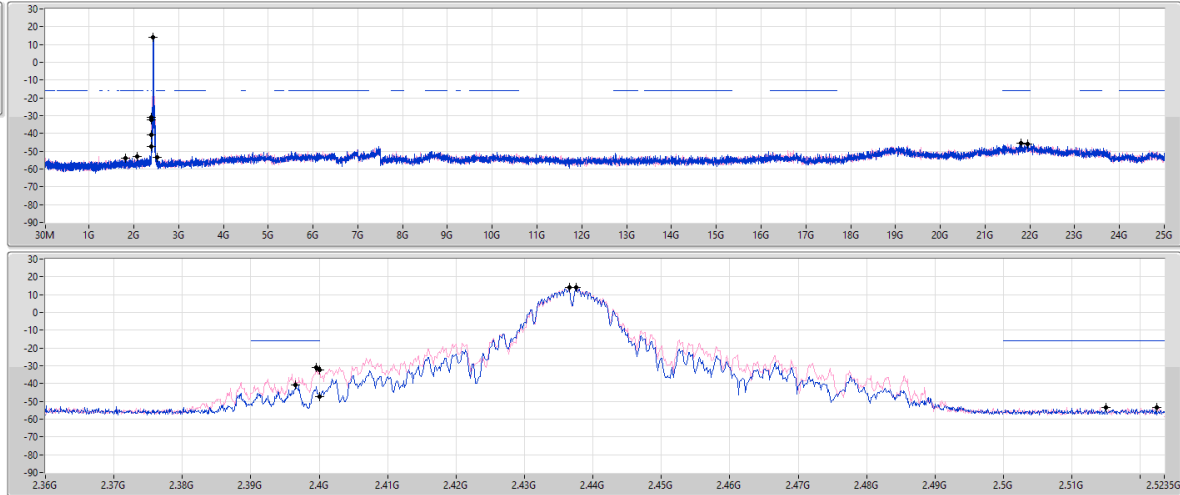

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	13.94	-16.06	1.81478G	-53.93	2.39656G	-40.84	2.4G	-47.53	2.51494G	-53.64	21.94601G	-45.89	1
2.43758G	14.10	-15.90	2.0804G	-53.02	2.3996G	-31.01	2.4G	-32.52	2.52246G	-53.40	21.80553G	-45.57	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2462MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

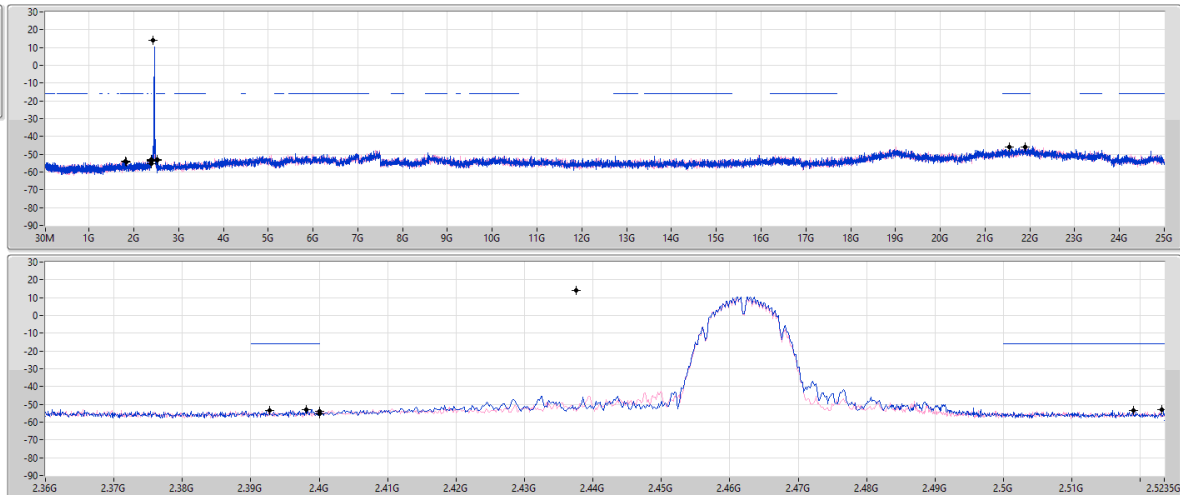

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43758G	14.10	-15.90	1.84041G	-54.38	2.39808G	-53.05	2.4G	-53.77	2.51894G	-53.58	21.89543G	-45.85	1
2.43758G	14.10	-15.90	1.81995G	-53.95	2.39272G	-53.26	2.4G	-55.49	2.5231G	-53.00	21.54424G	-45.76	2

2.4-2.4835GHz_802.11g_(6Mbps)_2TX


CSEndB

2412MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

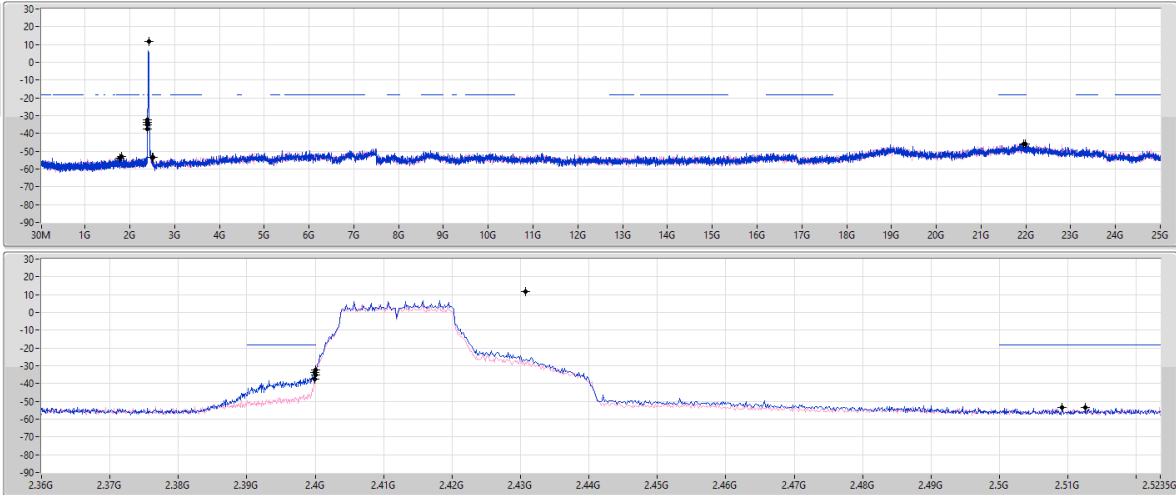

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	11.49	-18.51	1.81828G	-52.93	2.39992G	-33.90	2.4G	-32.39	2.50918G	-53.36	21.96005G	-45.73	1
2.43073G	11.49	-18.51	1.77168G	-53.72	2.39992G	-37.31	2.4G	-34.99	2.51254G	-53.55	21.99377G	-45.81	2

2.4-2.4835GHz_802.11g_(6Mbps)_2TX


CSEndB

2437MHz

27/05/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

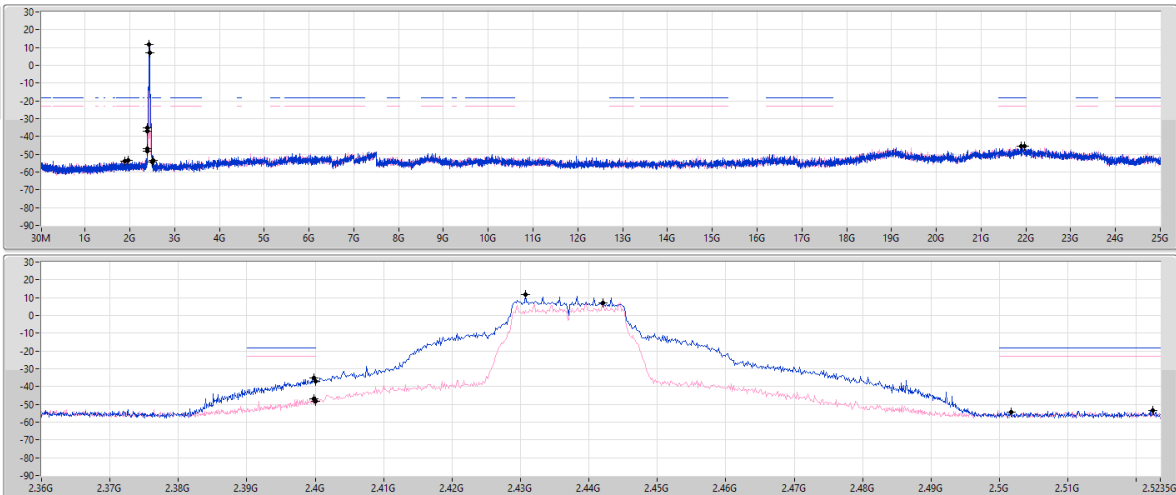


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	11.49	-18.51	1.89517G	-53.93	2.39984G	-35.09	2.4G	-37.18	2.52246G	-53.31	21.90105G	-45.69	1
2.44208G	7.26	-22.74	1.95924G	-53.34	2.39984G	-46.77	2.4G	-48.08	2.50166G	-54.17	21.96286G	-45.52	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

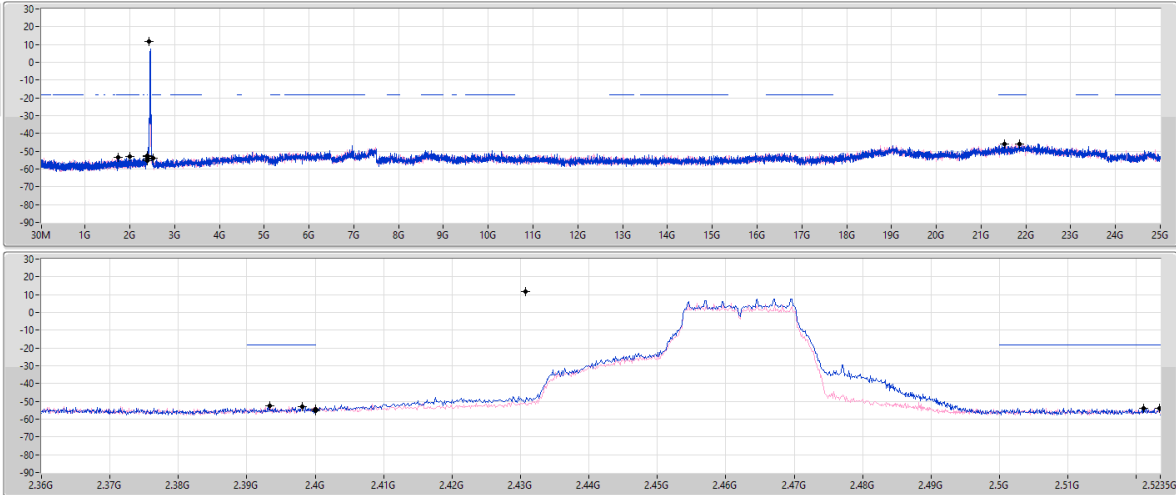


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	11.49	-18.51	1.74022G	-53.63	2.39816G	-53.20	2.4G	-54.49	2.52102G	-53.88	21.8561G	-46.15	1
2.43073G	11.49	-18.51	2.00351G	-52.87	2.39336G	-52.39	2.4G	-55.13	2.52334G	-54.02	21.51614G	-45.75	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

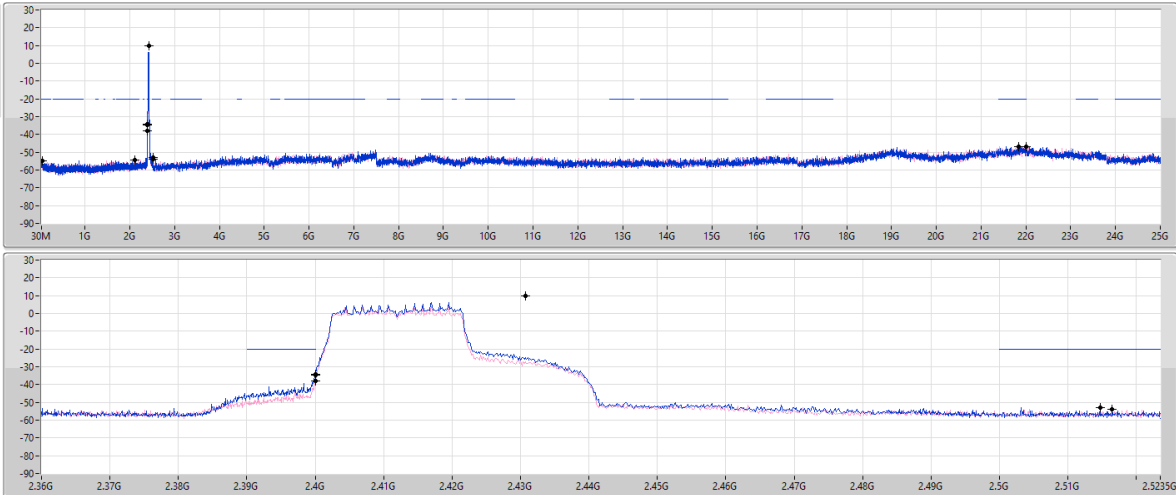


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	9.92	-20.08	42.82M	-54.95	2.4G	-34.53	2.4G	-34.33	2.5147G	-53.07	22.00501G	-46.76	1
2.43073G	9.92	-20.08	2.12001G	-54.47	2.4G	-38.15	2.4G	-37.98	2.51646G	-53.87	21.84205G	-46.89	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2437MHz

29/05/2026

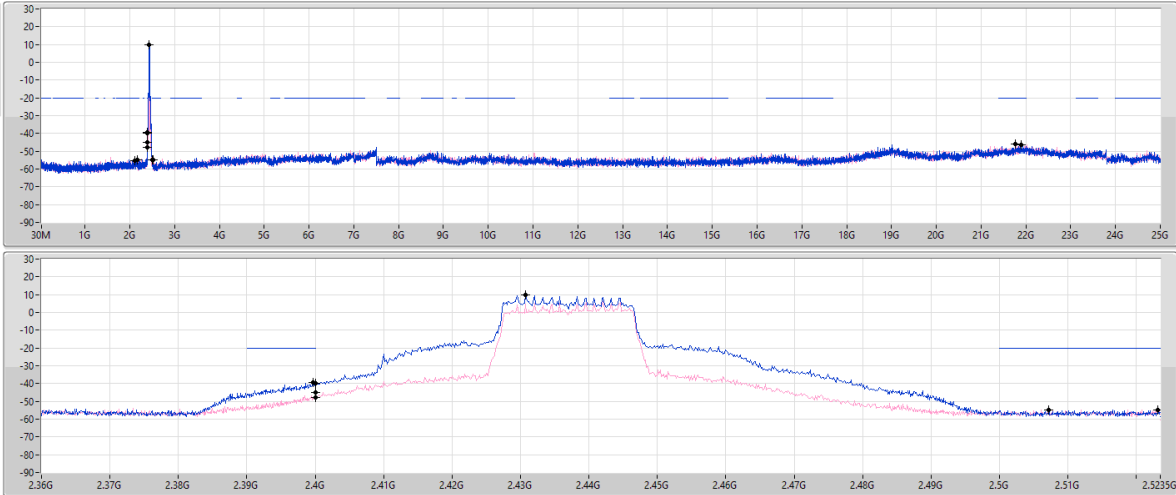RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	9.92	-20.08	2.17127G	-54.90	2.39968G	-39.36	2.4G	-40.07	2.52318G	-54.88	21.89824G	-46.54	1
2.43073G	9.92	-20.08	2.11302G	-55.08	2.4G	-45.03	2.4G	-47.71	2.50718G	-54.82	21.769G	-45.76	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2462MHz

29/05/2026

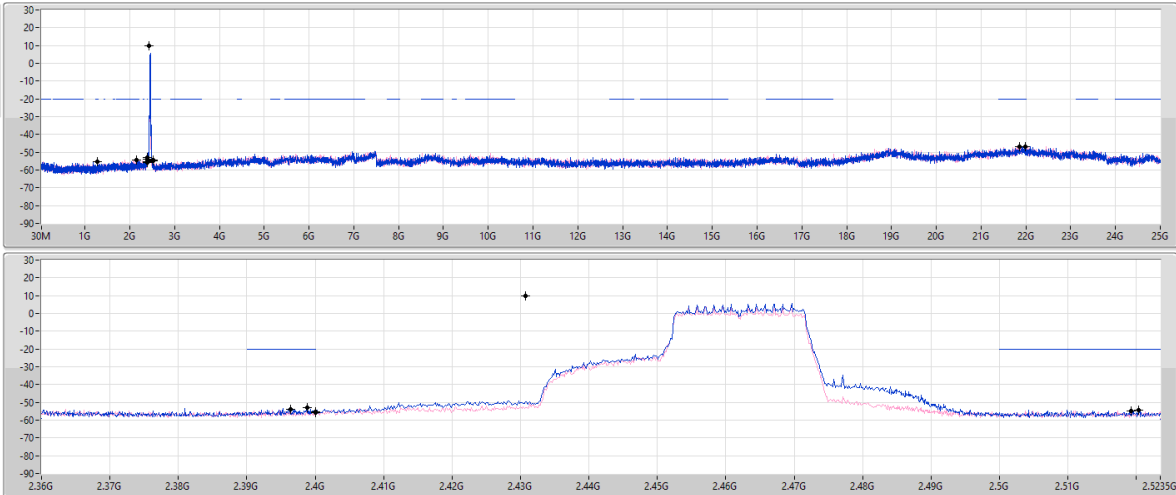RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	9.92	-20.08	1.26956G	-55.22	2.39888G	-53.12	2.4G	-55.28	2.52038G	-54.27	21.99096G	-47.08	1
2.43073G	9.92	-20.08	2.14098G	-54.29	2.3964G	-54.03	2.4G	-55.77	2.51918G	-54.65	21.85891G	-47.04	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2412MHz

29/05/2026

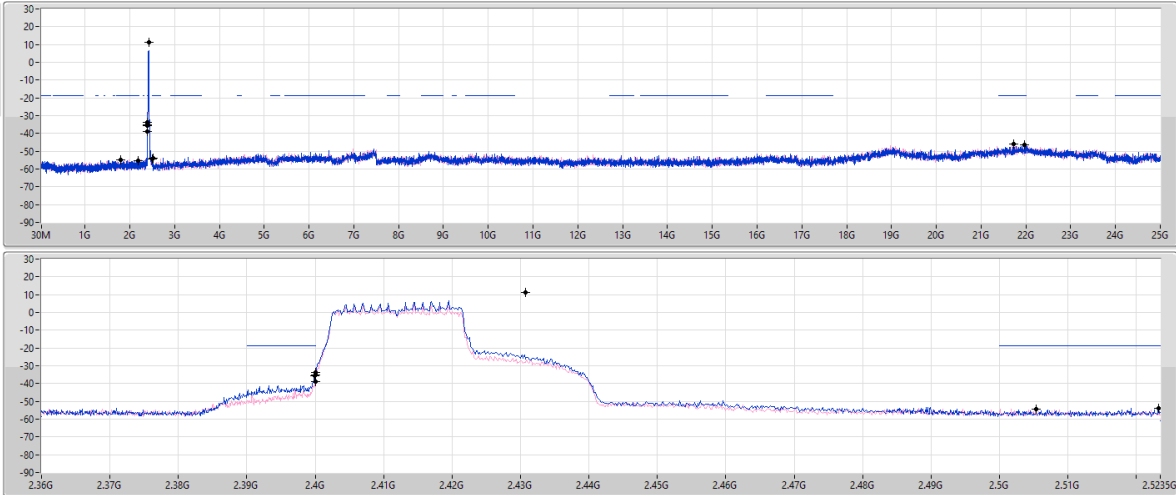RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4073G	11.09	-18.91	2.18409G	-55.30	2.39992G	-35.51	2.4G	-33.78	2.52326G	-53.95	2.172686G	-45.86	1
2.43073G	11.09	-18.91	1.79964G	-54.63	2.4G	-38.81	2.4G	-35.17	2.50534G	-54.47	2.196567G	-46.47	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2437MHz

29/05/2026

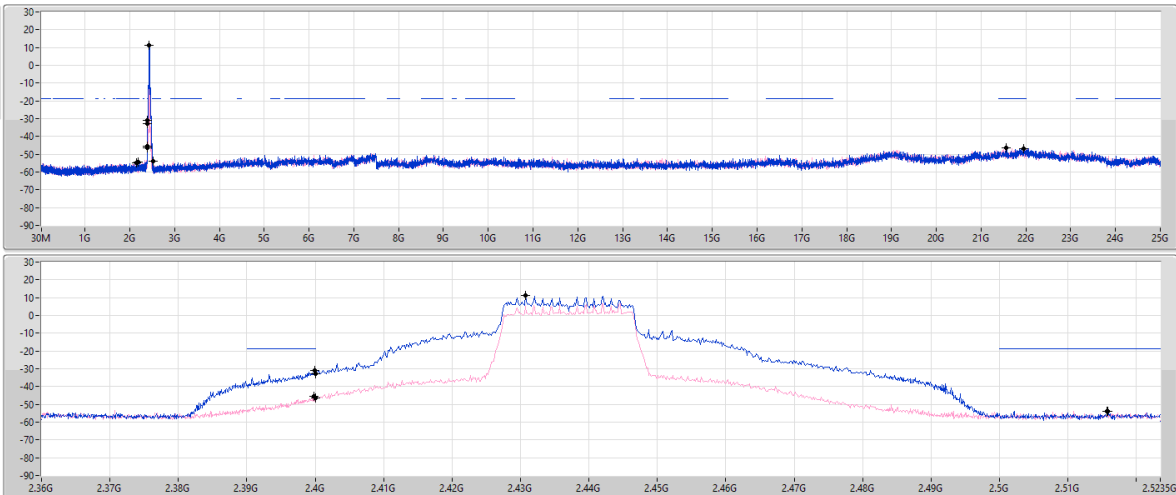RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4073G	11.09	-18.91	2.14681G	-54.99	2.39992G	-31.16	2.4G	-32.95	2.51582G	-54.09	2.194882G	-46.75	1
2.43073G	11.09	-18.91	2.19341G	-54.58	2.39976G	-45.53	2.4G	-46.22	2.51574G	-53.84	2.15611G	-46.20	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2462MHz

29/05/2026

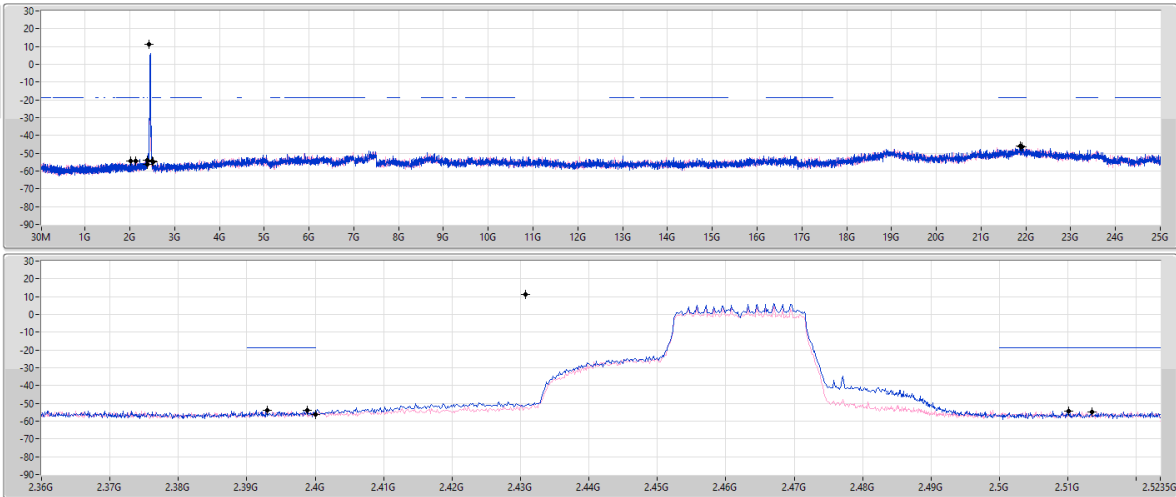
RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 5	Pass	PK	46.98M	35.41	40.00	-4.59	Vertical

Mode 5

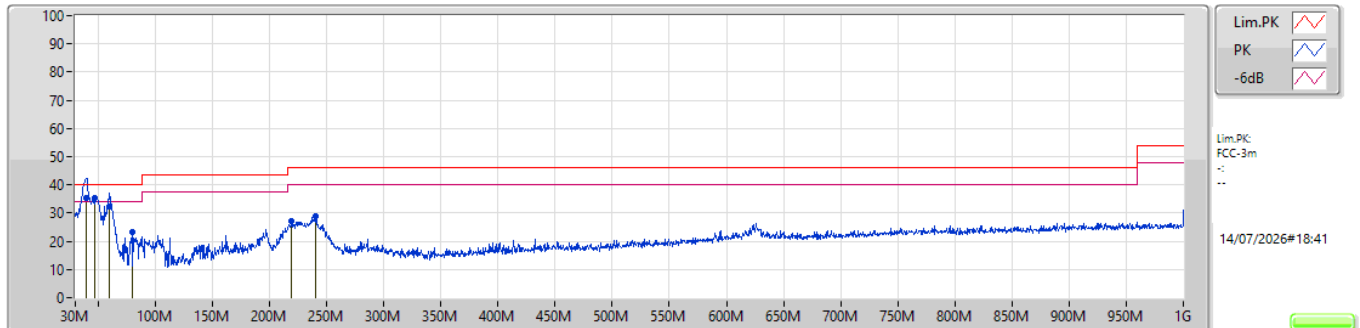

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
QP	39.7M	35.22	40.00	-4.78	-34.48	3	Vertical	254	1.00	-	69.70	18.91	0.20	53.59		
PK	46.98M	35.41	40.00	-4.59	-34.20	3	Vertical	103	1.00	"Worst"	69.61	19.45	0.27	53.92		
QP	60.07M	32.35	40.00	-7.65	-34.55	3	Vertical	0	3.00	-	66.90	18.90	0.50	53.95		
PK	79.96M	23.30	40.00	-16.70	-38.78	3	Vertical	155	4.00	-	62.08	14.76	0.38	53.92		
PK	219.64M	27.31	46.00	-18.69	-36.58	3	Vertical	0	2.00	-	63.89	15.44	1.76	53.78		
PK	240.01M	28.83	46.00	-17.17	-34.48	3	Vertical	95	2.00	-	63.31	17.30	1.85	53.63		

Mode 5

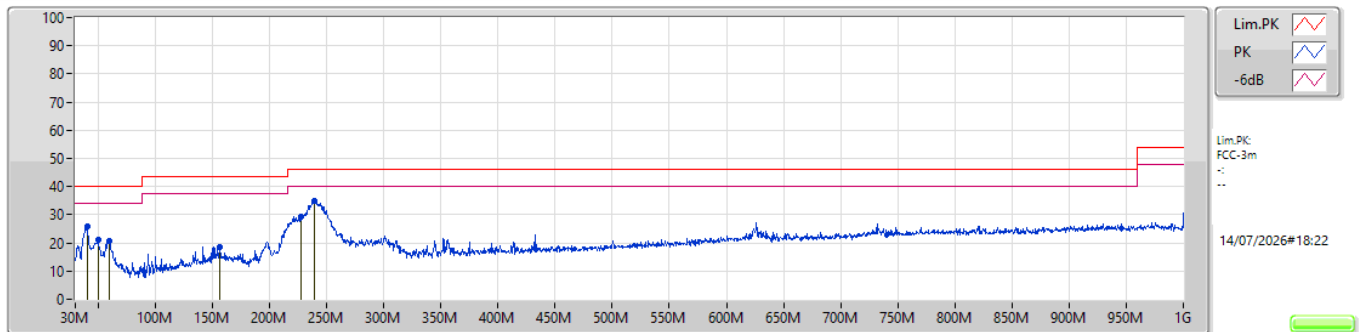

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	40.19M	26.06	40.00	-13.94	-34.32	3	Horizontal	332	1.00	-	60.38	18.99	0.20	53.51		
PK	49.89M	21.03	40.00	-18.97	-34.15	3	Horizontal	135	1.00	-	55.18	19.66	0.35	54.16		
PK	59.59M	20.85	40.00	-19.15	-34.56	3	Horizontal	96	2.00	-	55.41	18.91	0.49	53.96		
PK	156.59M	18.69	43.50	-24.81	-33.05	3	Horizontal	71	3.00	-	51.74	19.19	1.48	53.72		
PK	227.88M	29.31	46.00	-16.69	-36.13	3	Horizontal	250	2.00	-	65.44	15.79	1.80	53.72		
PK	239.04M	34.93	46.00	-11.07	-34.58	3	Horizontal	98	1.00	"Worst"	69.51	17.22	1.84	53.64		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	AV	2.39G	53.94	54.00	-0.06	3	Vertical	331	1.80	66

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

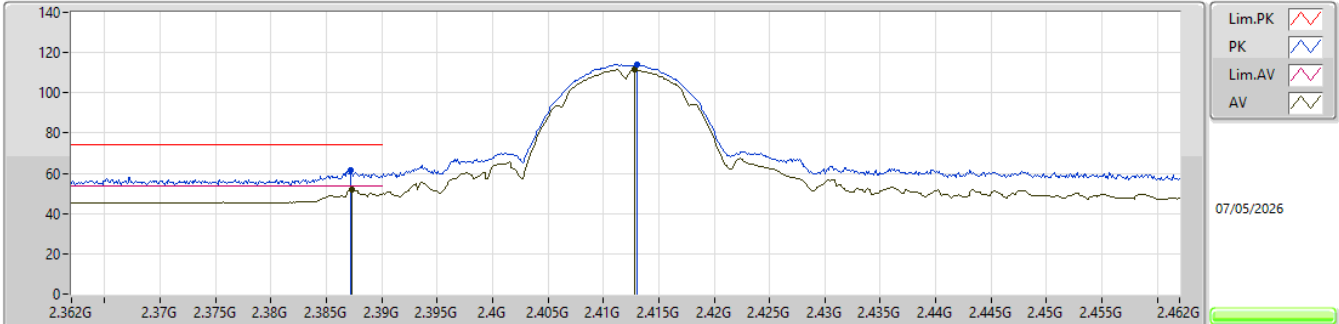


EUT_Y_1TX
SET 71
80\40\71\84\78\75\74\73\61\67\70\71
-11.36\7.86\2.12\11.78\11.72\3.29\2.14\6.65\6.62\3.72\2.71\2.21

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3872G	61.27	74.00	-12.73	29.00	3	Vertical	333	1.80	71	27.27	5.00	-				
AV	2.3873G	51.79	54.00	-2.21	19.52	3	Vertical	333	1.80	71	27.27	5.00	-				
PK	2.413G	114.05	Inf	-Inf	81.52	3	Vertical	333	1.80	71	27.50	5.03	-				
AV	2.4128G	111.53	Inf	-Inf	79.00	3	Vertical	333	1.80	71	27.50	5.03	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

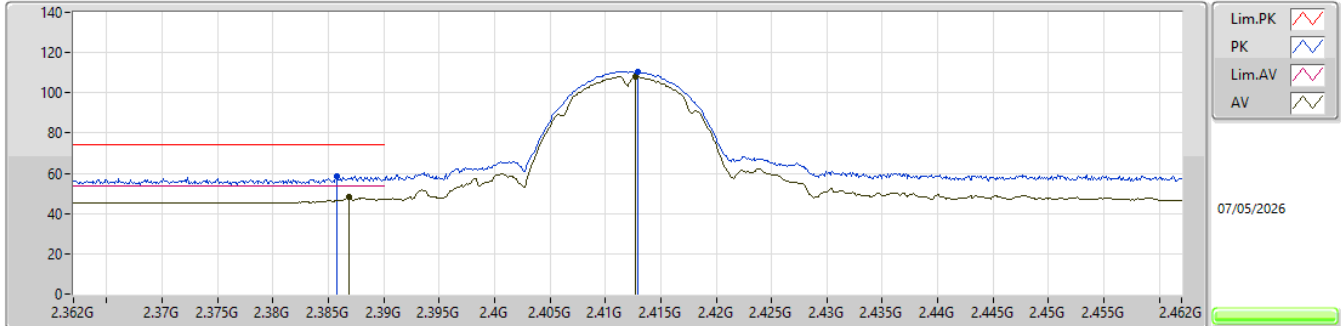


EUT Y_1TX
SET 71
71
5.83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3858G	58.45	74.00	-15.55	26.19	3	Horizontal	344	1.94	71	27.26	5.00	-			
AV	2.3869G	48.17	54.00	-5.83	15.90	3	Horizontal	344	1.94	71	27.27	5.00	-			
PK	2.4129G	110.60	Inf	-Inf	78.07	3	Horizontal	344	1.94	71	27.50	5.03	-			
AV	2.4127G	108.07	Inf	-Inf	75.54	3	Horizontal	344	1.94	71	27.50	5.03	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

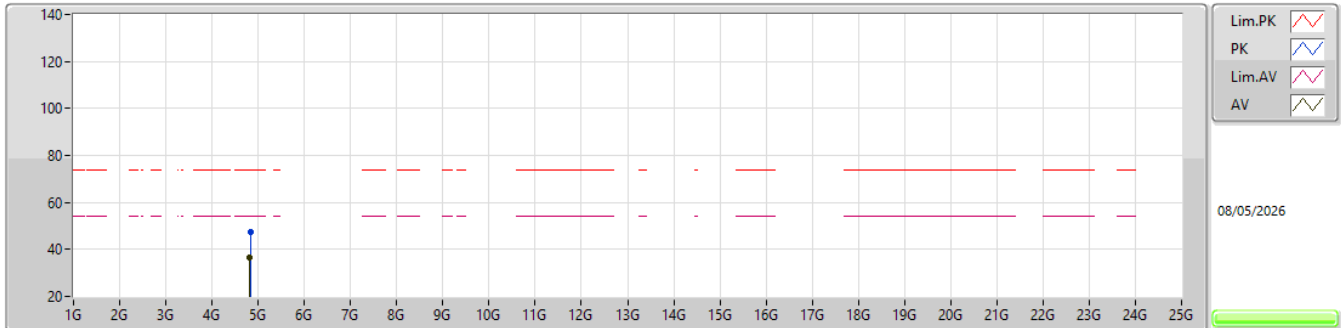


EUT_Y_1TX
SET 71
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83295G	47.52	74.00	-26.48	41.96	3	Vertical	9	1.80	71	32.56	8.18	35.18			
AV	4.82396G	36.57	54.00	-17.43	31.08	3	Vertical	9	1.80	71	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

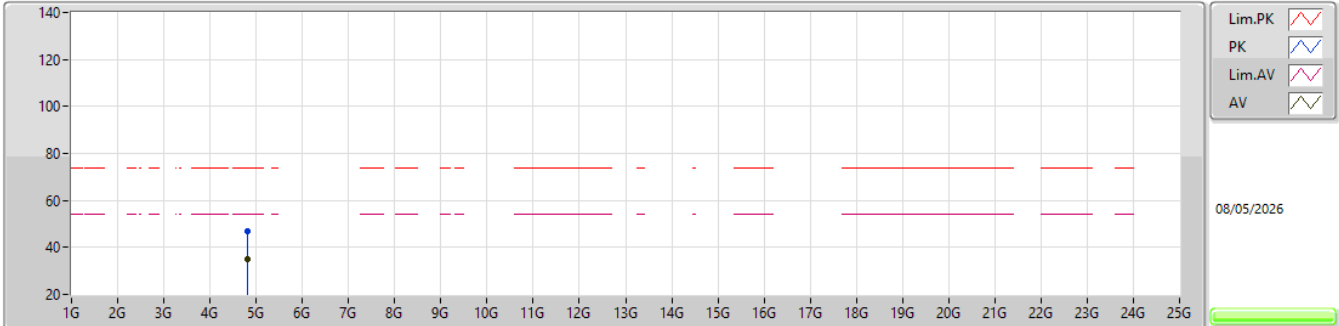


EUT_Y_1TX
SET 71
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81769G	47.10	74.00	-26.90	41.66	3	Horizontal	355	2.15	71	32.44	8.18	35.18			
AV	4.82396G	35.00	54.00	-19.00	29.51	3	Horizontal	355	2.15	71	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2417MHz_TX

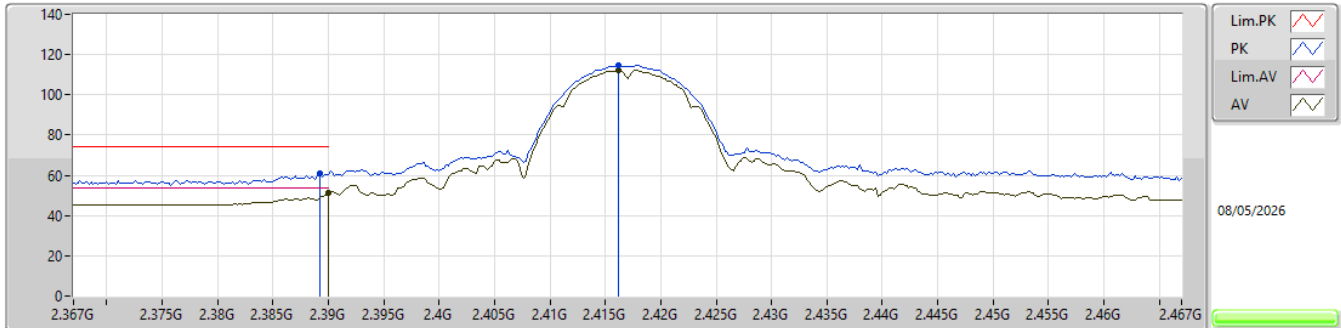


EUT Y_1TX
Setting 71
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3892G	60.67	74.00	-13.33	28.38	3	Vertical	340	1.80	-	27.29	5.00	-				
AV	2.39G	51.55	54.00	-2.45	19.25	3	Vertical	340	1.80	-	27.30	5.00	-				
PK	2.4162G	114.55	Inf	-Inf	82.02	3	Vertical	340	1.80	-	27.50	5.03	-				
AV	2.4162G	112.34	Inf	-Inf	79.81	3	Vertical	340	1.80	-	27.50	5.03	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2417MHz_TX

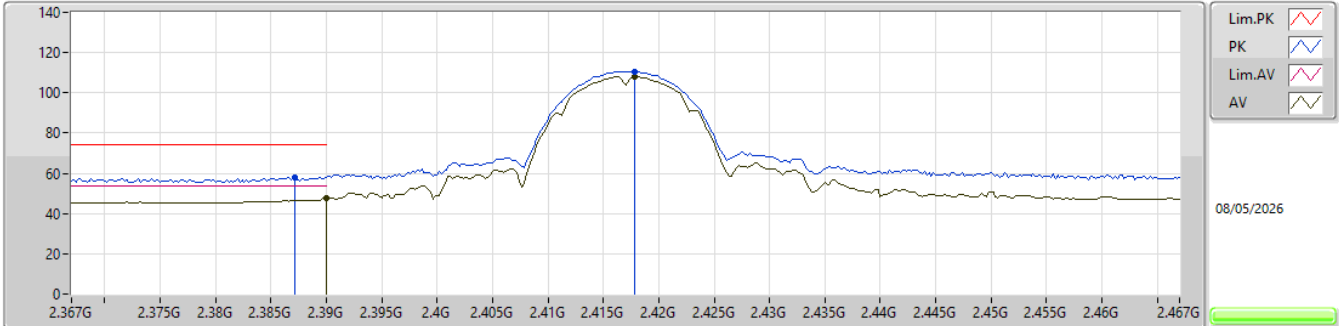


EUT_Y_1TX
Setting 71
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3872G	58.10	74.00	-15.90	25.83	3	Horizontal	356	1.80	-	27.27	5.00	-			
AV	2.39G	47.77	54.00	-6.23	15.47	3	Horizontal	356	1.80	-	27.30	5.00	-			
PK	2.4178G	110.73	Inf	-Inf	78.20	3	Horizontal	356	1.80	-	27.50	5.03	-			
AV	2.4178G	108.16	Inf	-Inf	75.63	3	Horizontal	356	1.80	-	27.50	5.03	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

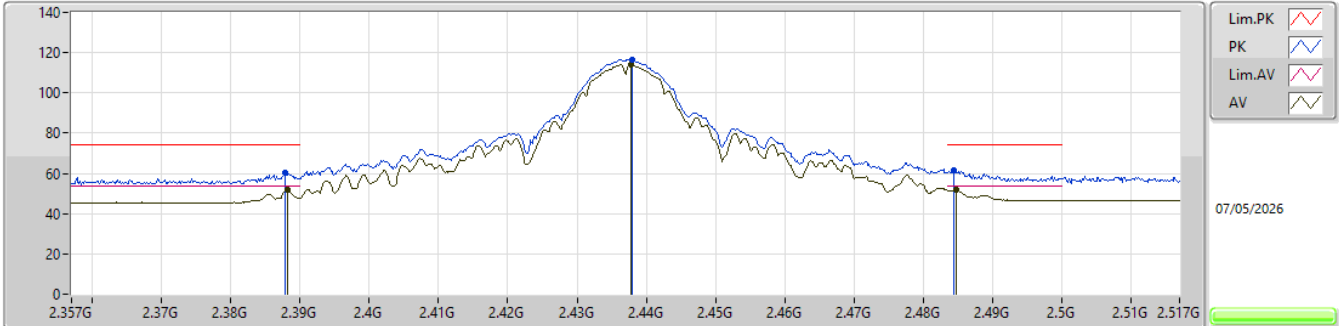


EUT_Y_1TX
SET 108
71\90\99\103\105\106\107\108
4.92\2.24\2.14\2.21\2.19\2.15\2.19\2.22

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38788G	60.31	74.00	-13.69	28.03	3	Vertical	332	1.99	108	27.28	5.00	-				
AV	2.3882G	51.78	54.00	-2.22	19.50	3	Vertical	332	1.99	108	27.28	5.00	-				
PK	2.43796G	116.43	Inf	-Inf	83.85	3	Vertical	332	1.99	108	27.52	5.06	-				
AV	2.4378G	114.03	Inf	-Inf	81.45	3	Vertical	332	1.99	108	27.52	5.06	-				
PK	2.48436G	61.45	74.00	-12.55	28.48	3	Vertical	332	1.99	108	27.84	5.13	-				
AV	2.48484G	51.71	54.00	-2.29	18.73	3	Vertical	332	1.99	108	27.85	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

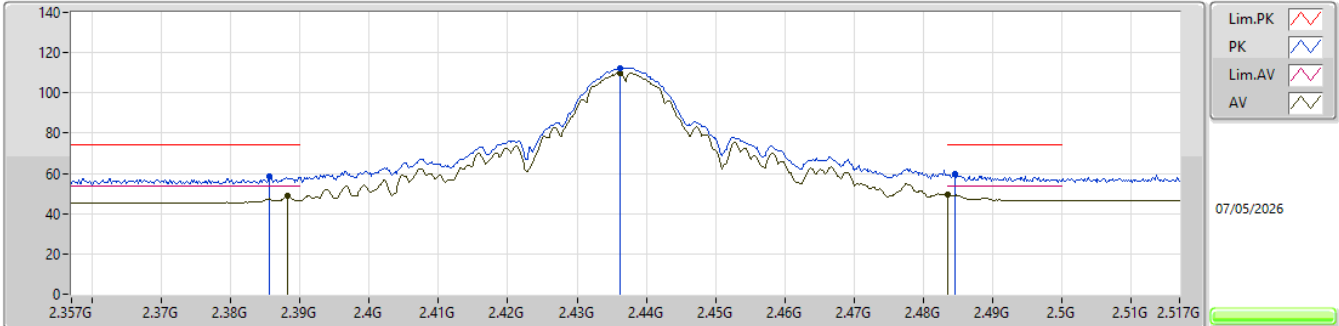


EUT_Y_1TX
SET 108
108
4.68

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38548G	58.25	74.00	-15.75	26.00	3	Horizontal	328	1.80	108	27.25	5.00	-				
AV	2.3882G	48.77	54.00	-5.23	16.49	3	Horizontal	328	1.80	108	27.28	5.00	-				
PK	2.4362G	112.52	Inf	-Inf	79.92	3	Horizontal	328	1.80	108	27.54	5.06	-				
AV	2.4362G	110.11	Inf	-Inf	77.51	3	Horizontal	328	1.80	108	27.54	5.06	-				
PK	2.48452G	59.53	74.00	-14.47	26.55	3	Horizontal	328	1.80	108	27.85	5.13	-				
AV	2.4835G	49.32	54.00	-4.68	16.35	3	Horizontal	328	1.80	108	27.84	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

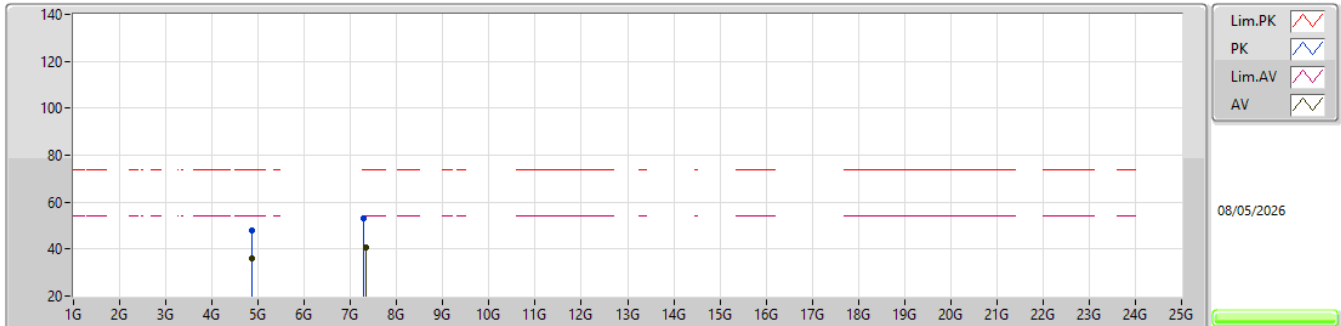


EUT Y_1TX
SET 108
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86493G	47.95	74.00	-26.05	42.18	3	Vertical	333	1.80	108	32.76	8.18	35.17				
AV	4.874G	35.96	54.00	-18.04	30.15	3	Vertical	333	1.80	108	32.80	8.18	35.17				
PK	7.29486G	53.00	74.00	-21.00	40.34	3	Vertical	325	1.07	108	37.09	9.68	34.11				
AV	7.33054G	40.72	54.00	-13.28	28.04	3	Vertical	325	1.07	108	37.04	9.71	34.07				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

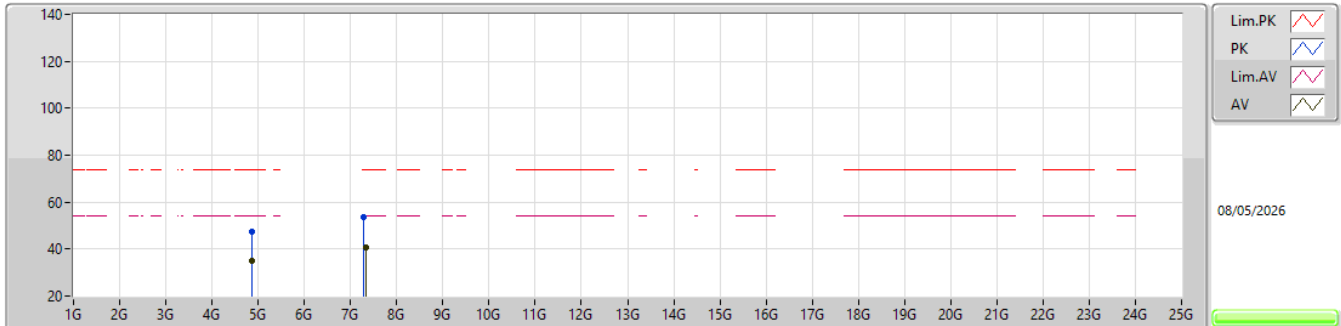


EUT Y_1TX
SET 108
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87348G	47.56	74.00	-26.44	41.76	3	Horizontal	340	1.77	108	32.79	8.18	35.17				
AV	4.87388G	35.18	54.00	-18.82	29.37	3	Horizontal	340	1.77	108	32.80	8.18	35.17				
PK	7.29322G	53.83	74.00	-20.17	41.18	3	Horizontal	325	1.80	108	37.09	9.67	34.11				
AV	7.32958G	40.69	54.00	-13.31	28.01	3	Horizontal	325	1.80	108	37.04	9.71	34.07				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2457MHz_TX

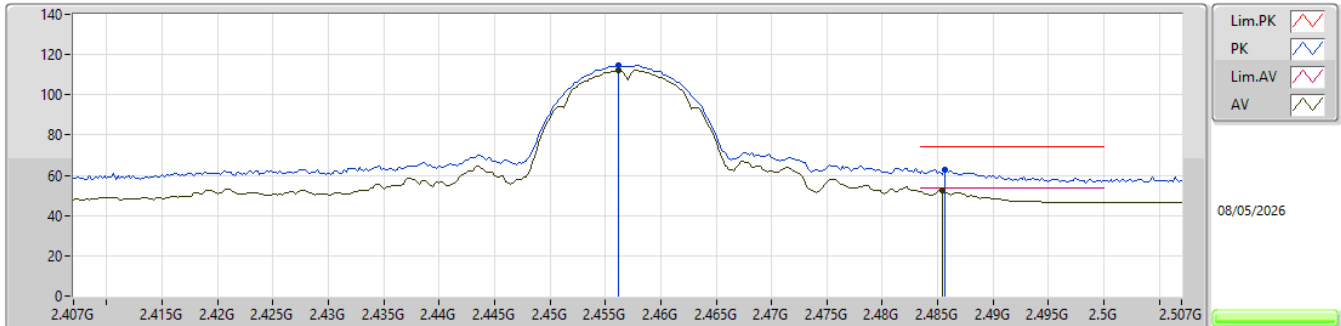


EUT_Y_1TX
SET 69
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4562G	114.51	Inf	-Inf	81.82	3	Vertical	344	1.80	-	27.60	5.09	-			
AV	2.4562G	112.12	Inf	-Inf	79.43	3	Vertical	344	1.80	-	27.60	5.09	-			
PK	2.4856G	62.55	74.00	-11.45	29.56	3	Vertical	344	1.80	-	27.86	5.13	-			
AV	2.4854G	52.72	54.00	-1.28	19.74	3	Vertical	344	1.80	-	27.85	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2457MHz_TX

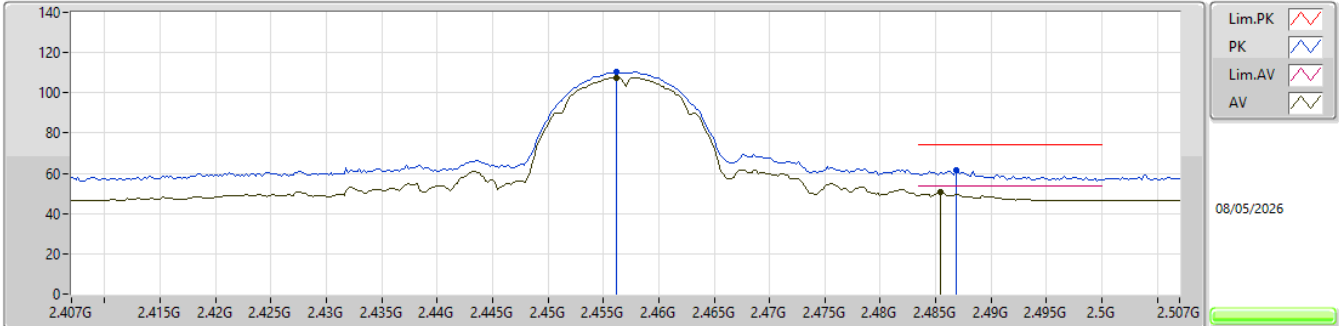


EUT_Y_1TX
SET 69
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4562G	110.28	Inf	-Inf	77.59	3	Horizontal	340	1.80	-	27.60	5.09	-			
AV	2.4562G	107.71	Inf	-Inf	75.02	3	Horizontal	340	1.80	-	27.60	5.09	-			
PK	2.4868G	61.35	74.00	-12.65	28.35	3	Horizontal	340	1.80	-	27.87	5.13	-			
AV	2.4854G	50.50	54.00	-3.50	17.52	3	Horizontal	340	1.80	-	27.85	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

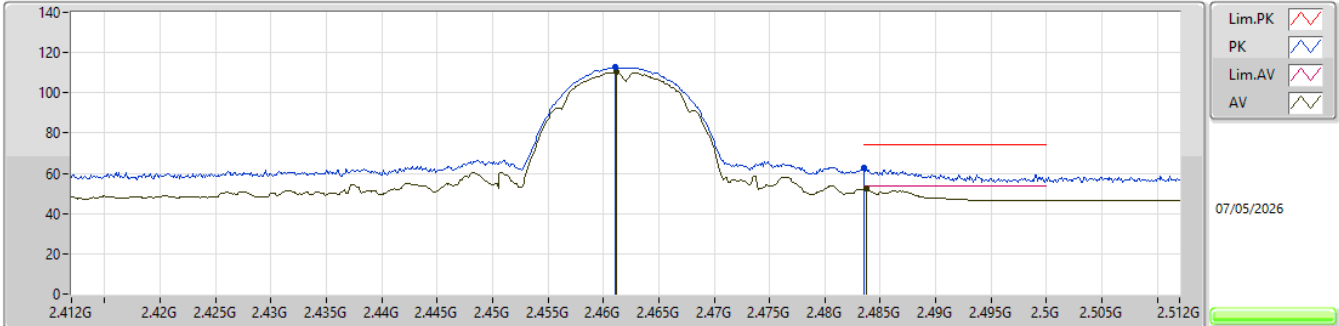

EUT_Y_1TX

SET 68


71\47\74\61\67\64\65\75\70\68\69\68

-5.78\6.86\ -17.35\5.03\ -0.57\3.86\4.28\ -18.24\ -3.93\0.73\ -0.21\1.77

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.4611G	112.84	Inf	-Inf	80.13	3	Vertical	333	1.80	68	27.61	5.10	-			
AV	2.4612G	110.35	Inf	-Inf	77.64	3	Vertical	333	1.80	68	27.61	5.10	-			
PK	2.4835G	62.80	74.00	-11.20	29.83	3	Vertical	333	1.80	68	27.84	5.13	-			
AV	2.4837G	52.23	54.00	-1.77	19.26	3	Vertical	333	1.80	68	27.84	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

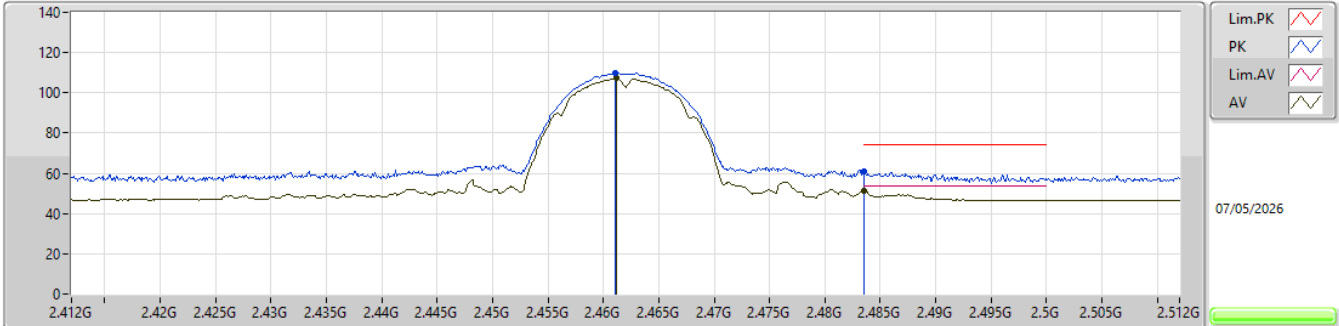


EUT_Y_1TX
SET 68
68
2.78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4611G	109.89	Inf	-Inf	77.18	3	Horizontal	339	1.89	68	27.61	5.10	-			
AV	2.4612G	107.25	Inf	-Inf	74.54	3	Horizontal	339	1.89	68	27.61	5.10	-			
PK	2.4835G	60.81	74.00	-13.19	27.84	3	Horizontal	339	1.89	68	27.84	5.13	-			
AV	2.4835G	51.22	54.00	-2.78	18.25	3	Horizontal	339	1.89	68	27.84	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

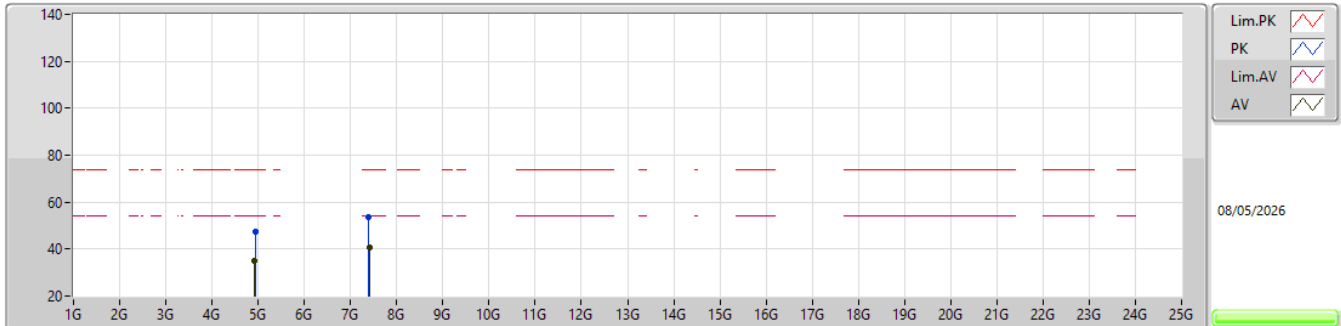


EUT_Y_1TX
SET 68
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93463G	47.56	74.00	-26.44	41.59	3	Vertical	238	1.80	68	32.97	8.17	35.17				
AV	4.92004G	34.96	54.00	-19.04	29.02	3	Vertical	238	1.80	68	32.94	8.17	35.17				
PK	7.39271G	53.40	74.00	-20.60	40.97	3	Vertical	346	2.27	68	36.66	9.76	33.99				
AV	7.4059G	40.71	54.00	-13.29	28.33	3	Vertical	346	2.27	68	36.59	9.77	33.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

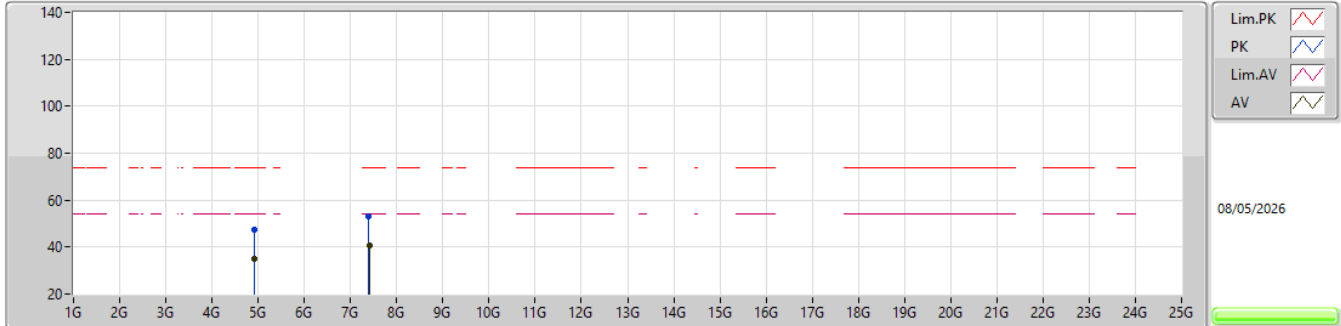


EUT_Y_1TX
SET 68
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9077G	47.63	74.00	-26.37	41.71	3	Horizontal	345	1.80	68	32.92	8.17	35.17				
AV	4.92112G	34.96	54.00	-19.04	29.02	3	Horizontal	345	1.80	68	32.94	8.17	35.17				
PK	7.387G	53.25	74.00	-20.75	40.79	3	Horizontal	358	2.89	68	36.70	9.76	34.00				
AV	7.4059G	40.72	54.00	-13.28	28.34	3	Horizontal	358	2.89	68	36.59	9.77	33.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

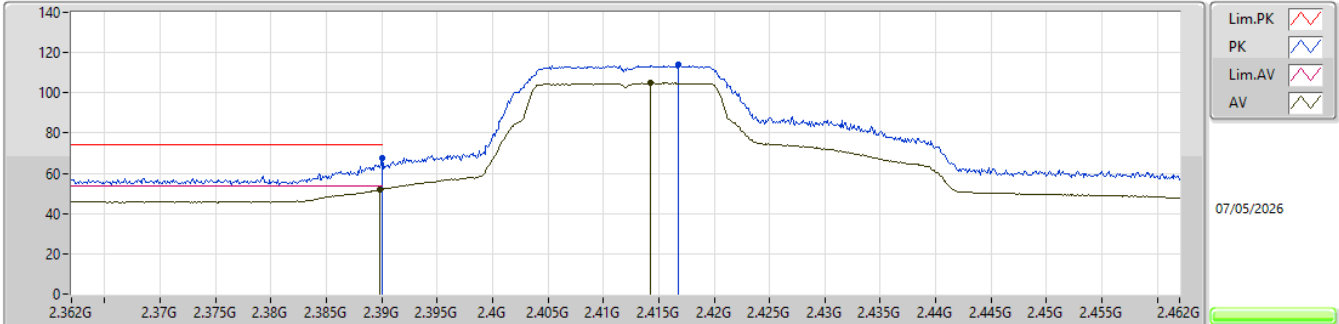


EUT_Y_1TX
SET 67
80\40\70\55\62\65\66\78\72\69\68\67
-21.07\7.52\6.01\6.70\5.31\4.54\3.22\21.26\20.90\4.87\1.99\2.22

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.39G	67.36	74.00	-6.64	35.06	3	Vertical	330	1.80	67	27.30	5.00	-			
AV	2.3898G	51.78	54.00	-2.22	19.48	3	Vertical	330	1.80	67	27.30	5.00	-			
PK	2.4168G	113.91	Inf	-Inf	81.38	3	Vertical	330	1.80	67	27.50	5.03	-			
AV	2.4143G	104.88	Inf	-Inf	72.35	3	Vertical	330	1.80	67	27.50	5.03	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

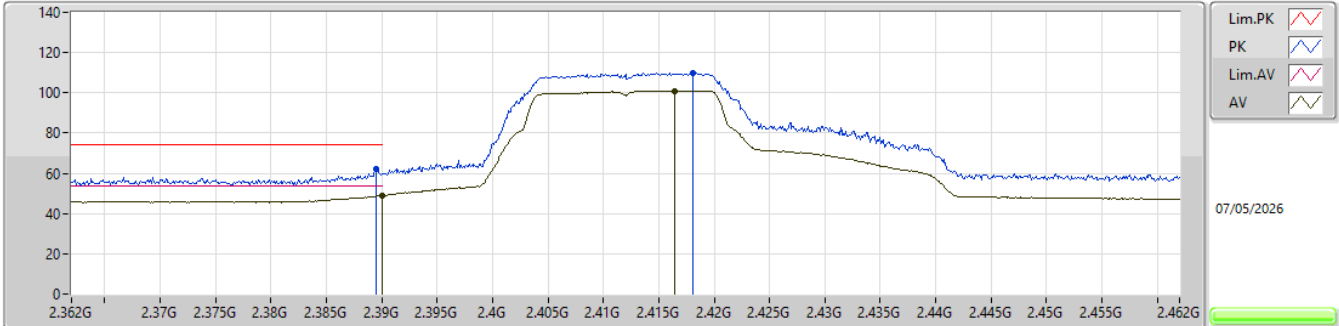


EUT_Y_1TX
SET 67
67
5.10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3895G	61.92	74.00	-12.08	29.63	3	Horizontal	340	1.80	67	27.29	5.00	-			
AV	2.39G	48.90	54.00	-5.10	16.60	3	Horizontal	340	1.80	67	27.30	5.00	-			
PK	2.4181G	109.93	Inf	-Inf	77.39	3	Horizontal	340	1.80	67	27.50	5.04	-			
AV	2.4164G	101.04	Inf	-Inf	68.51	3	Horizontal	340	1.80	67	27.50	5.03	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

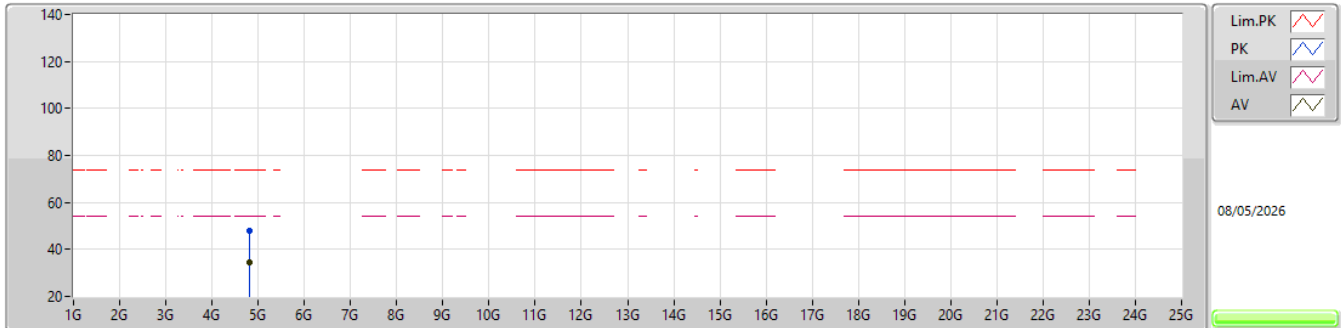


EUT_Y_1TX
SET 67
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.80662G	47.78	74.00	-26.22	42.43	3	Vertical	205	1.84	67	32.35	8.18	35.18			
AV	4.80834G	34.70	54.00	-19.30	29.33	3	Vertical	205	1.84	67	32.37	8.18	35.18			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX


2412MHz_TX

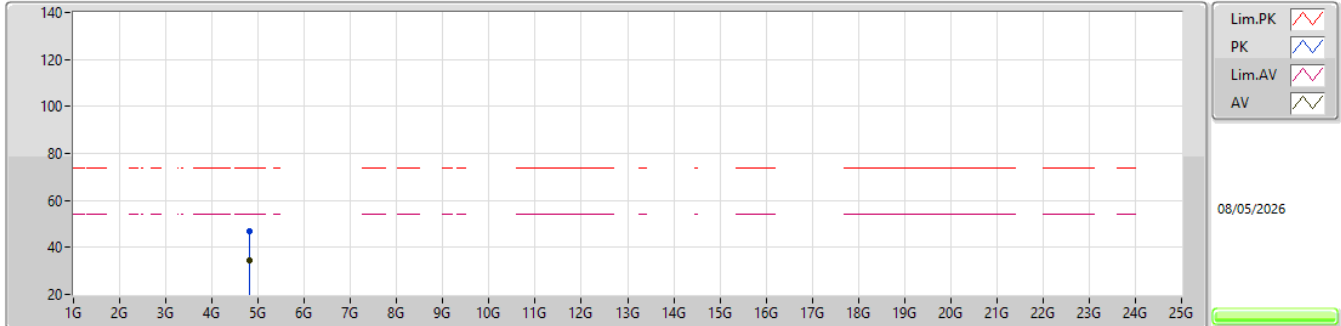
EUT_Y_1TX
SET 67
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81437G	46.93	74.00	-27.07	41.52	3	Horizontal	355	1.59	67	32.41	8.18	35.18			
AV	4.80786G	34.73	54.00	-19.27	29.37	3	Horizontal	355	1.59	67	32.36	8.18	35.18			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2417MHz_TX

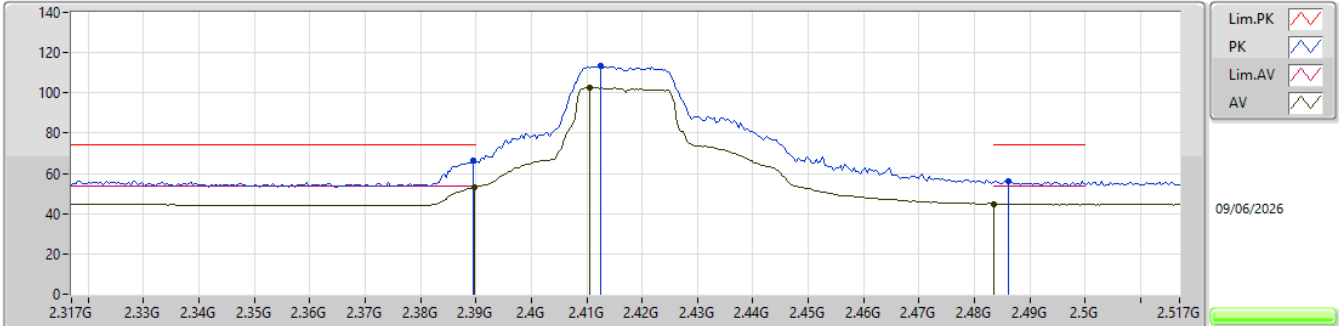


EUT_Y_1TX
Setting 70
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	66.18	74.00	-7.82	34.05	3	Vertical	344	1.89	-	27.60	4.53	-				
AV	2.3898G	52.90	54.00	-1.10	20.77	3	Vertical	344	1.89	-	27.60	4.53	-				
PK	2.4126G	113.45	Inf	-Inf	81.39	3	Vertical	344	1.89	-	27.50	4.56	-				
AV	2.4106G	102.44	Inf	-Inf	70.38	3	Vertical	344	1.89	-	27.50	4.56	-				
PK	2.4862G	56.10	74.00	-17.90	23.97	3	Vertical	344	1.89	-	27.46	4.67	-				
AV	2.4835G	44.82	54.00	-9.18	12.71	3	Vertical	344	1.89	-	27.44	4.67	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2417MHz_TX

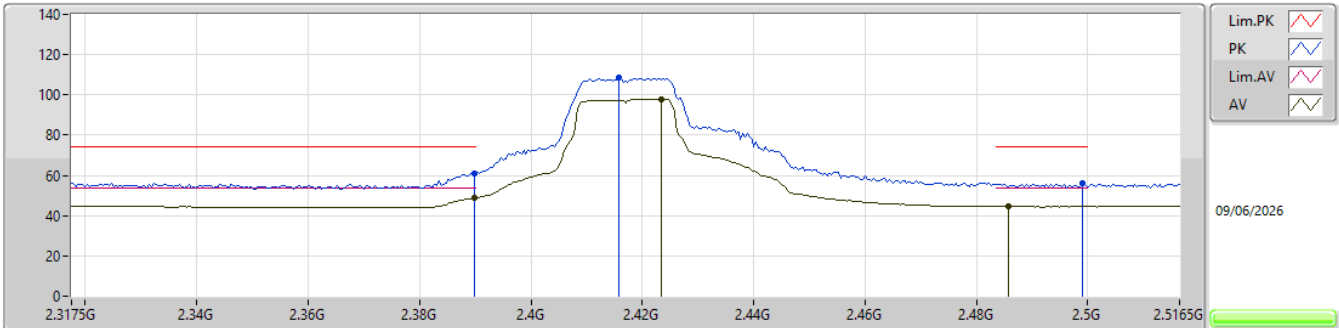


EUT Y_1TX
Setting 70
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38994G	60.80	74.00	-13.20	28.67	3	Horizontal	328	1.95	-	27.60	4.53	-			
AV	2.38994G	48.73	54.00	-5.27	16.60	3	Horizontal	328	1.95	-	27.60	4.53	-			
PK	2.41581G	108.51	Inf	-Inf	76.45	3	Horizontal	328	1.95	-	27.50	4.56	-			
AV	2.42337G	97.82	Inf	-Inf	65.74	3	Horizontal	328	1.95	-	27.50	4.58	-			
PK	2.49899G	56.19	74.00	-17.81	24.00	3	Horizontal	328	1.95	-	27.50	4.69	-			
AV	2.48585G	44.62	54.00	-9.38	12.49	3	Horizontal	328	1.95	-	27.46	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

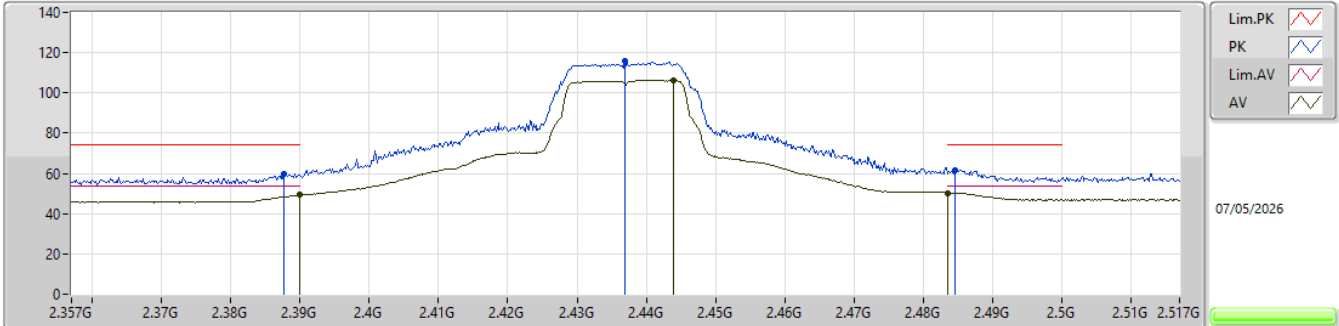

EUT_Y_1TX

SET 69


67\89\65\77\71\68\69\81\75\72\69

5.71\6.20\6.06\6.27\6.26\4.90\3.53\6.29\6.36\6.36\3.66

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.38772G	59.89	74.00	-14.11	27.61	3	Vertical	337	2.00	69	27.28	5.00	-
AV	2.38996G	49.30	54.00	-4.70	17.00	3	Vertical	337	2.00	69	27.30	5.00	-
PK	2.43684G	115.99	Inf	-Inf	83.40	3	Vertical	337	2.00	69	27.53	5.06	-
AV	2.44388G	106.13	Inf	-Inf	73.52	3	Vertical	337	2.00	69	27.54	5.07	-
PK	2.48452G	61.61	74.00	-12.39	28.63	3	Vertical	337	2.00	69	27.85	5.13	-
AV	2.4835G	50.34	54.00	-3.66	17.37	3	Vertical	337	2.00	69	27.84	5.13	-

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

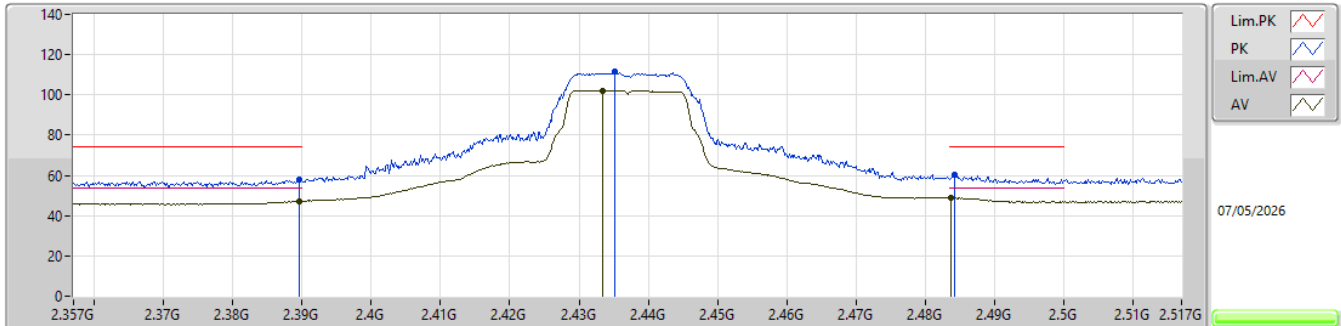


EUT_Y_1TX
SET 69
69
5.16

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38964G	57.72	74.00	-16.28	25.42	3	Horizontal	329	1.80	69	27.30	5.00	-				
AV	2.38964G	47.28	54.00	-6.72	14.98	3	Horizontal	329	1.80	69	27.30	5.00	-				
PK	2.43524G	111.58	Inf	-Inf	78.97	3	Horizontal	329	1.80	69	27.55	5.06	-				
AV	2.43332G	102.21	Inf	-Inf	69.58	3	Horizontal	329	1.80	69	27.57	5.06	-				
PK	2.4842G	60.18	74.00	-13.82	27.21	3	Horizontal	329	1.80	69	27.84	5.13	-				
AV	2.48372G	48.84	54.00	-5.16	15.87	3	Horizontal	329	1.80	69	27.84	5.13	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

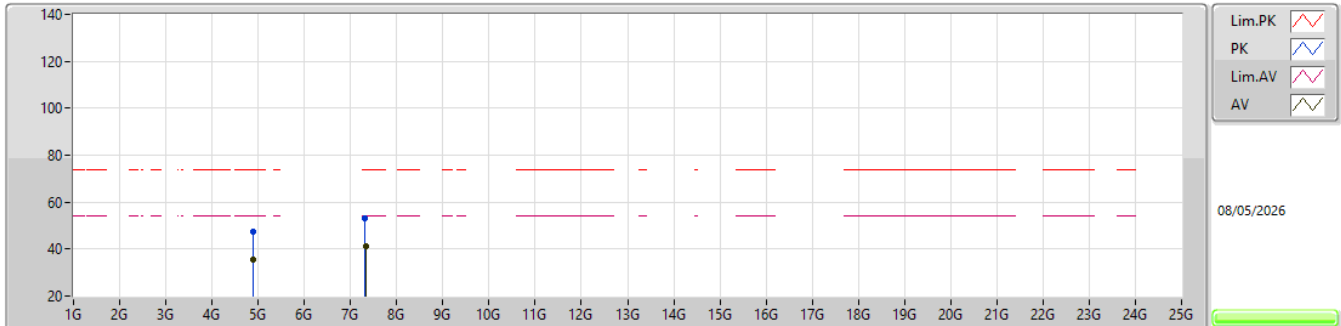


EUT_Y_1TX
SET 69
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.88315G	47.28	74.00	-26.72	41.44	3	Vertical	273	1.80	69	32.83	8.18	35.17				
AV	4.88163G	35.37	54.00	-18.63	29.53	3	Vertical	273	1.80	69	32.83	8.18	35.17				
PK	7.29821G	52.92	74.00	-21.08	40.24	3	Vertical	125	2.32	69	37.10	9.68	34.10				
AV	7.33018G	41.05	54.00	-12.95	28.37	3	Vertical	125	2.32	69	37.04	9.71	34.07				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

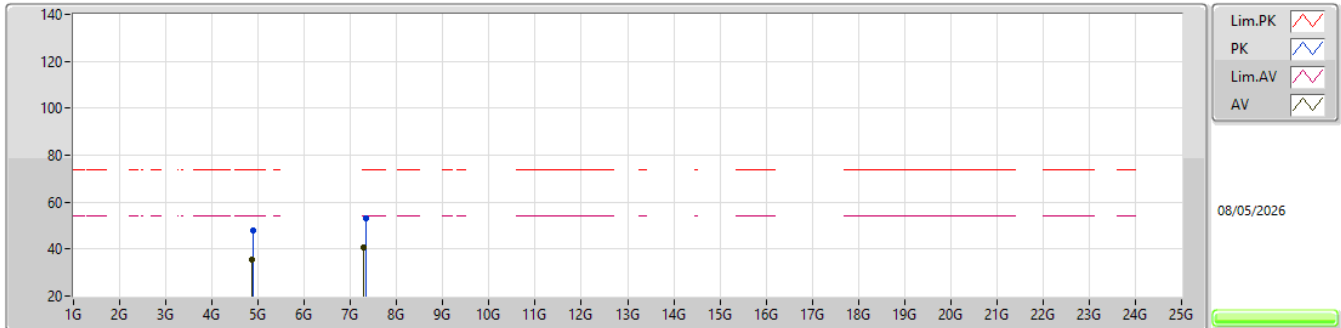


EUT_Y_1TX
SET 69
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.88183G	47.75	74.00	-26.25	41.91	3	Horizontal	297	1.80	69	32.83	8.18	35.17				
AV	4.86697G	35.34	54.00	-18.66	29.56	3	Horizontal	297	1.80	69	32.77	8.18	35.17				
PK	7.32367G	52.89	74.00	-21.11	40.21	3	Horizontal	159	1.64	69	37.05	9.70	34.07				
AV	7.29154G	40.94	54.00	-13.06	28.30	3	Horizontal	159	1.64	69	37.08	9.67	34.11				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2457MHz_TX

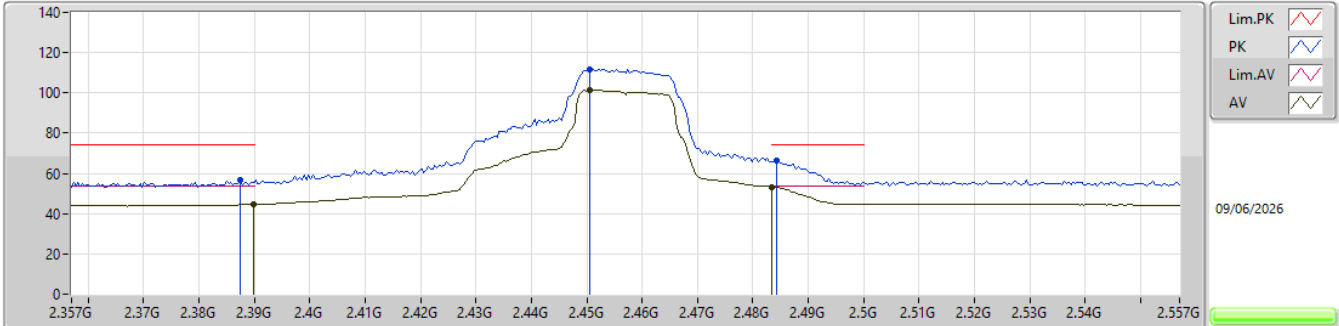


EUT_Y_1TX
Setting 67
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3874G	56.46	74.00	-17.54	24.33	3	Vertical	340	2.02	-	27.60	4.53	-			
AV	2.3898G	44.58	54.00	-9.42	12.45	3	Vertical	340	2.02	-	27.60	4.53	-			
PK	2.4506G	111.90	Inf	-Inf	79.88	3	Vertical	340	2.02	-	27.40	4.62	-			
AV	2.4506G	101.43	Inf	-Inf	69.41	3	Vertical	340	2.02	-	27.40	4.62	-			
PK	2.4842G	66.58	74.00	-7.42	34.47	3	Vertical	340	2.02	-	27.44	4.67	-			
AV	2.4835G	53.39	54.00	-0.61	21.28	3	Vertical	340	2.02	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2457MHz_TX

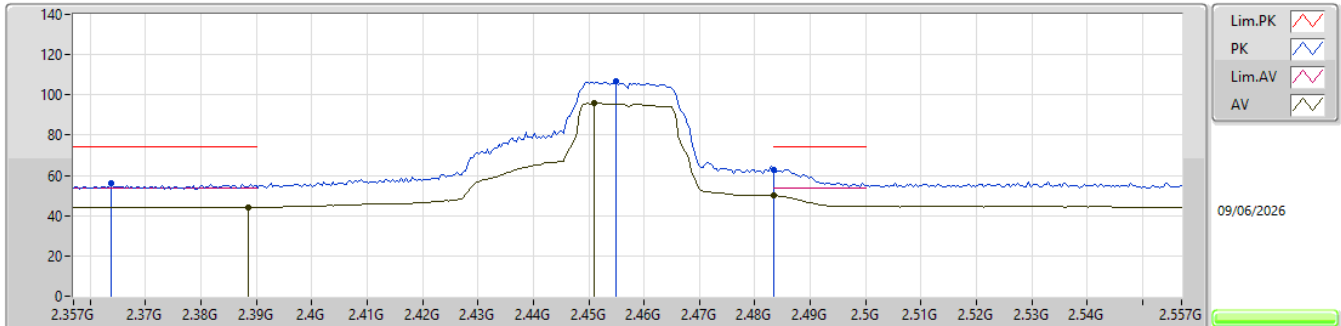


EUT_Y_1TX
Setting 67
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3638G	55.88	74.00	-18.12	23.70	3	Horizontal	322	1.90	-	27.66	4.52	-			
AV	2.3886G	44.17	54.00	-9.83	12.04	3	Horizontal	322	1.90	-	27.60	4.53	-			
PK	2.455G	107.11	Inf	-Inf	75.09	3	Horizontal	322	1.90	-	27.40	4.62	-			
AV	2.451G	95.91	Inf	-Inf	63.89	3	Horizontal	322	1.90	-	27.40	4.62	-			
PK	2.4835G	62.91	74.00	-11.09	30.80	3	Horizontal	322	1.90	-	27.44	4.67	-			
AV	2.4835G	49.90	54.00	-4.10	17.79	3	Horizontal	322	1.90	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

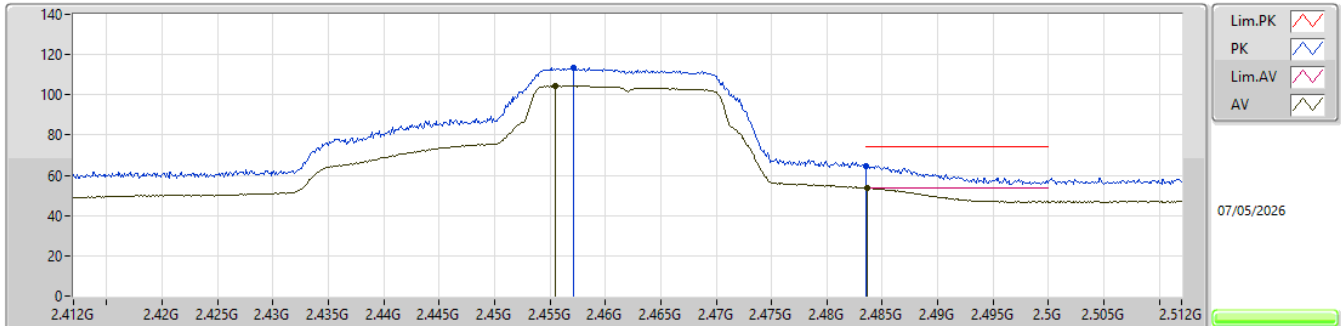


EUT Y_1TX
SET 66
67\61\71\66
-1.39\4.80\22.99\0.09

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4571G	113.40	Inf	-Inf	80.71	3	Vertical	331	1.80	66	27.60	5.09	-			
AV	2.4555G	104.40	Inf	-Inf	71.71	3	Vertical	331	1.80	66	27.60	5.09	-			
PK	2.4835G	64.51	74.00	-9.49	31.54	3	Vertical	331	1.80	66	27.84	5.13	-			
AV	2.4836G	53.91	54.00	-0.09	20.94	3	Vertical	331	1.80	66	27.84	5.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

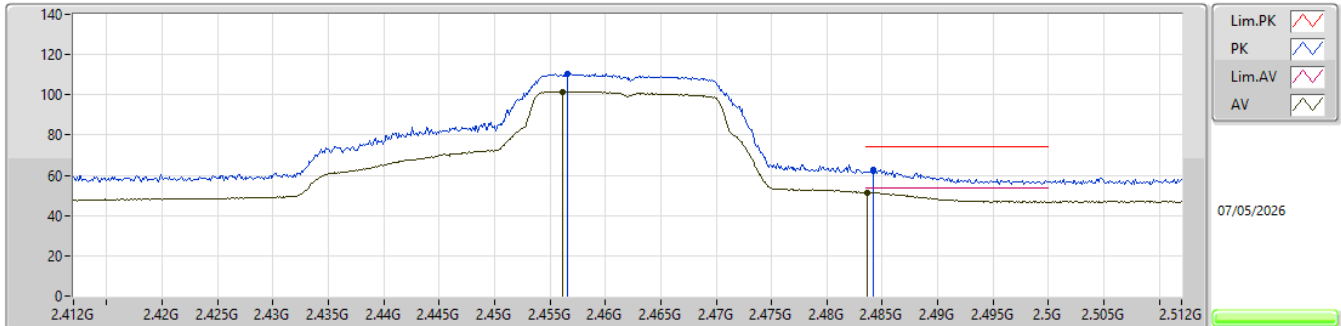


EUT_Y_1TX
SET 66
66
2.49

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4566G	110.56	Inf	-Inf	77.87	3	Horizontal	349	1.91	66	27.60	5.09	-			
AV	2.4561G	101.57	Inf	-Inf	68.88	3	Horizontal	349	1.91	66	27.60	5.09	-			
PK	2.4842G	62.71	74.00	-11.29	29.74	3	Horizontal	349	1.91	66	27.84	5.13	-			
AV	2.4836G	51.51	54.00	-2.49	18.54	3	Horizontal	349	1.91	66	27.84	5.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

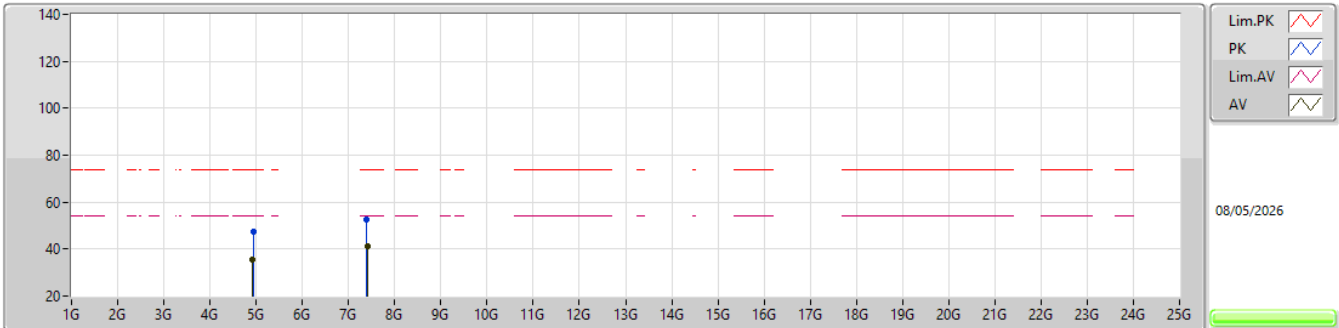


EUT_Y_1TX
SET 66
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93319G	47.61	74.00	-26.39	41.64	3	Vertical	16	1.79	66	32.97	8.17	35.17				
AV	4.91141G	35.39	54.00	-18.61	29.47	3	Vertical	16	1.79	66	32.92	8.17	35.17				
PK	7.39783G	52.51	74.00	-21.49	40.11	3	Vertical	129	2.44	66	36.62	9.77	33.99				
AV	7.40482G	41.04	54.00	-12.96	28.66	3	Vertical	129	2.44	66	36.59	9.77	33.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

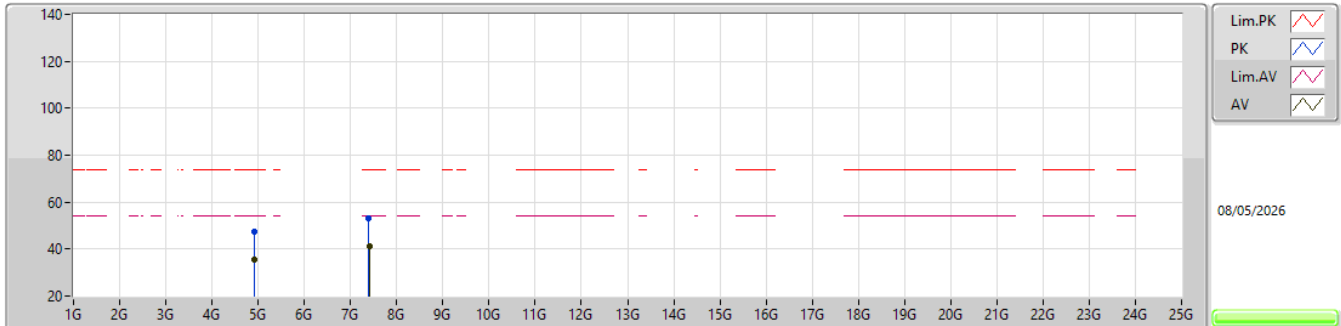


EUT_Y_1TX
SET 66
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.90574G	47.49	74.00	-26.51	41.58	3	Horizontal	244	1.76	66	32.91	8.17	35.17			
AV	4.92064G	35.35	54.00	-18.65	29.41	3	Horizontal	244	1.76	66	32.94	8.17	35.17			
PK	7.39971G	53.05	74.00	-20.95	40.67	3	Horizontal	72	1.80	66	36.60	9.77	33.99			
AV	7.40482G	41.03	54.00	-12.97	28.65	3	Horizontal	72	1.80	66	36.59	9.77	33.98			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

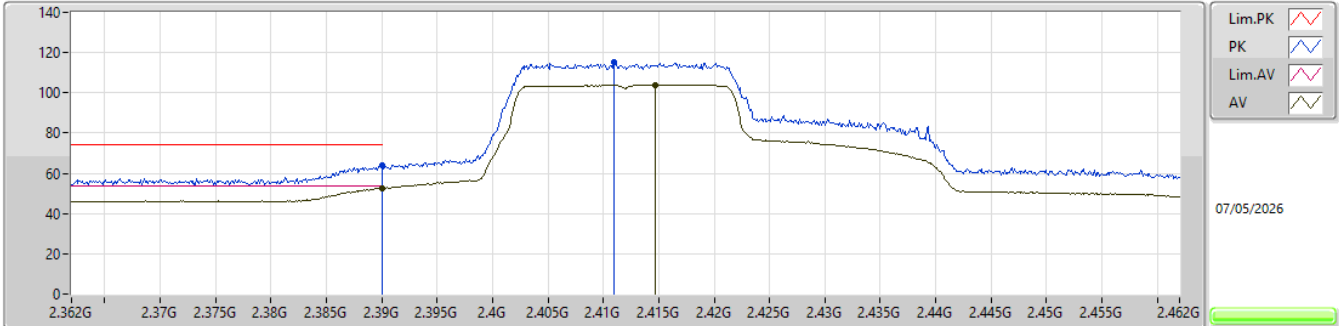


EUT_Y_1TX
SET 67
80\40\67\79\73\70\69\57\63\66\67
-25.59\6.95\1.46\ -25.54\ -25.68\ -9.99\ -7.08\5.97\5.08\1.90\1.47

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.39G	64.19	74.00	-9.81	31.89	3	Vertical	327	1.80	67	27.30	5.00	-			
AV	2.39G	52.53	54.00	-1.47	20.23	3	Vertical	327	1.80	67	27.30	5.00	-			
PK	2.411G	115.39	Inf	-Inf	82.86	3	Vertical	327	1.80	67	27.50	5.03	-			
AV	2.4147G	104.05	Inf	-Inf	71.52	3	Vertical	327	1.80	67	27.50	5.03	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

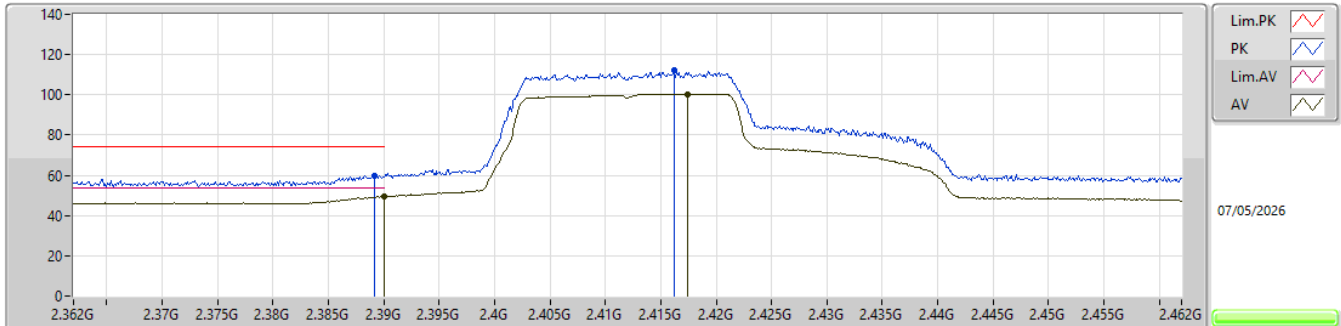


EUT_Y_1TX
SET 67
67
4.67

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3892G	59.94	74.00	-14.06	27.65	3	Horizontal	344	1.80	67	27.29	5.00	-			
AV	2.39G	49.33	54.00	-4.67	17.03	3	Horizontal	344	1.80	67	27.30	5.00	-			
PK	2.4162G	111.97	Inf	-Inf	79.44	3	Horizontal	344	1.80	67	27.50	5.03	-			
AV	2.4174G	100.43	Inf	-Inf	67.90	3	Horizontal	344	1.80	67	27.50	5.03	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

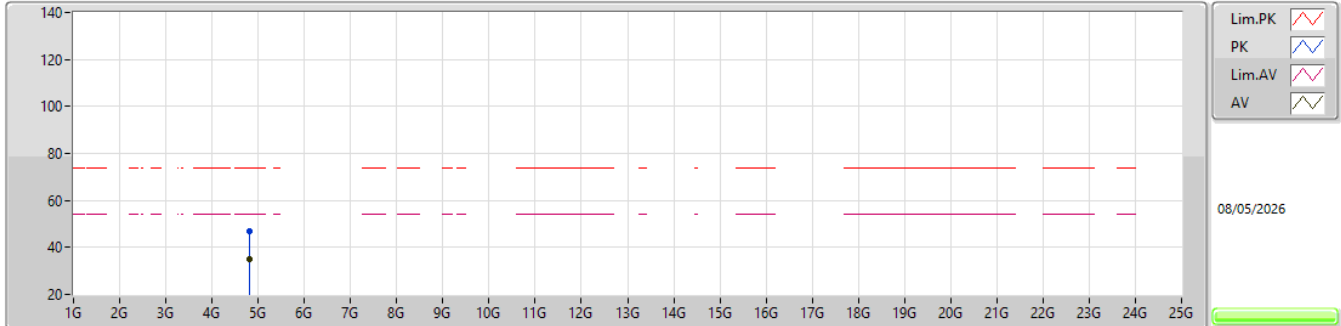


EUT_Y_1TX
SET 67
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82304G	47.06	74.00	-26.94	41.58	3	Vertical	271	1.05	67	32.48	8.18	35.18			
AV	4.80718G	35.15	54.00	-18.85	29.79	3	Vertical	271	1.05	67	32.36	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

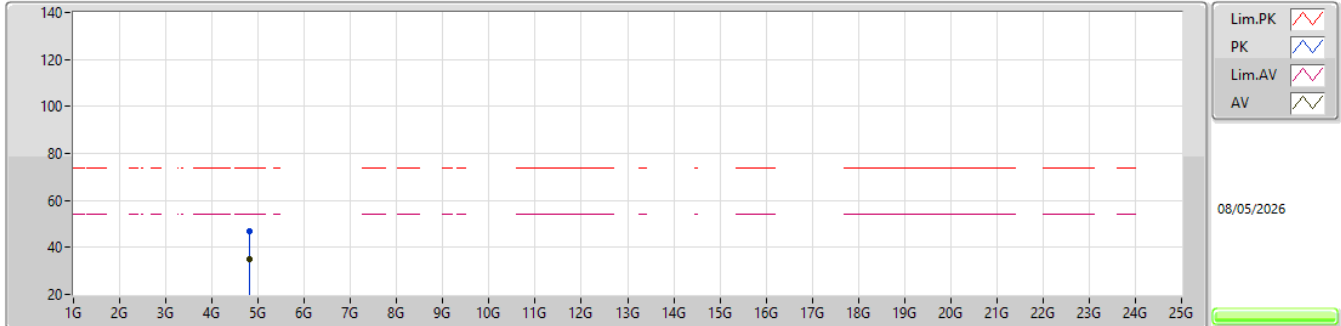


EUT_Y_1TX
SET 67
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82408G	47.01	74.00	-26.99	41.52	3	Horizontal	346	1.05	67	32.49	8.18	35.18			
AV	4.80973G	34.95	54.00	-19.05	29.57	3	Horizontal	346	1.05	67	32.38	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2417MHz_TX

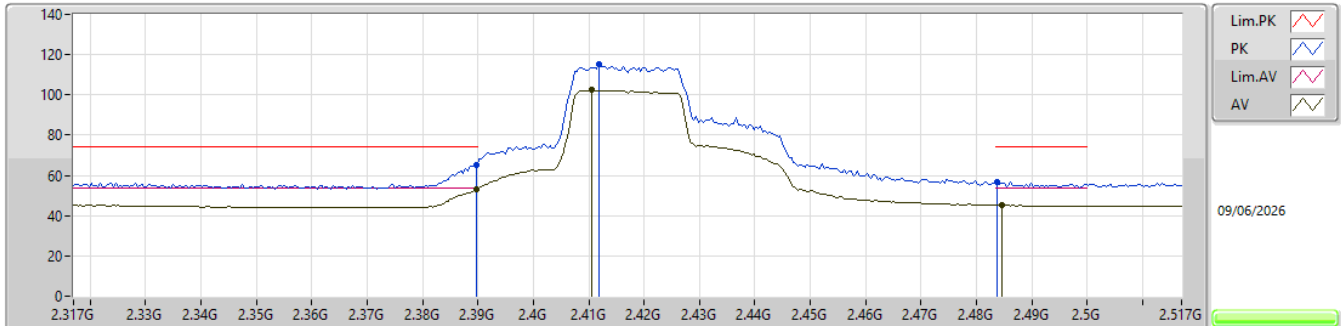


EUT_Y_1TX
Setting 69
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3898G	65.03	74.00	-8.97	32.90	3	Vertical	338	2.09	-	27.60	4.53	-				
AV	2.3898G	52.97	54.00	-1.03	20.84	3	Vertical	338	2.09	-	27.60	4.53	-				
PK	2.4118G	115.21	Inf	-Inf	83.15	3	Vertical	338	2.09	-	27.50	4.56	-				
AV	2.4106G	102.35	Inf	-Inf	70.29	3	Vertical	338	2.09	-	27.50	4.56	-				
PK	2.4838G	56.90	74.00	-17.10	24.79	3	Vertical	338	2.09	-	27.44	4.67	-				
AV	2.4846G	45.26	54.00	-8.74	13.14	3	Vertical	338	2.09	-	27.45	4.67	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2417MHz_TX

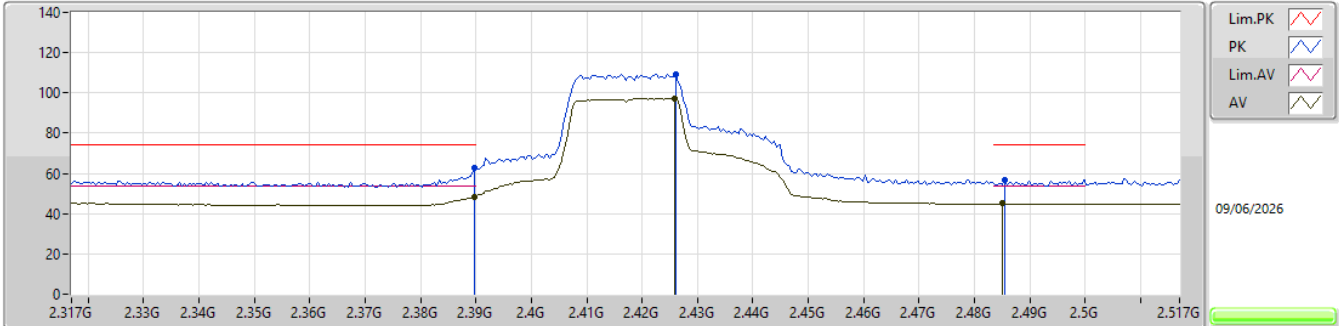


EUT_Y_1TX
Setting 69
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	62.76	74.00	-11.24	30.63	3	Horizontal	329	1.96	-	27.60	4.53	-			
AV	2.3898G	47.99	54.00	-6.01	15.86	3	Horizontal	329	1.96	-	27.60	4.53	-			
PK	2.4262G	109.29	Inf	-Inf	77.21	3	Horizontal	329	1.96	-	27.50	4.58	-			
AV	2.4258G	97.17	Inf	-Inf	65.09	3	Horizontal	329	1.96	-	27.50	4.58	-			
PK	2.4854G	56.49	74.00	-17.51	24.37	3	Horizontal	329	1.96	-	27.45	4.67	-			
AV	2.485G	44.98	54.00	-9.02	12.86	3	Horizontal	329	1.96	-	27.45	4.67	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

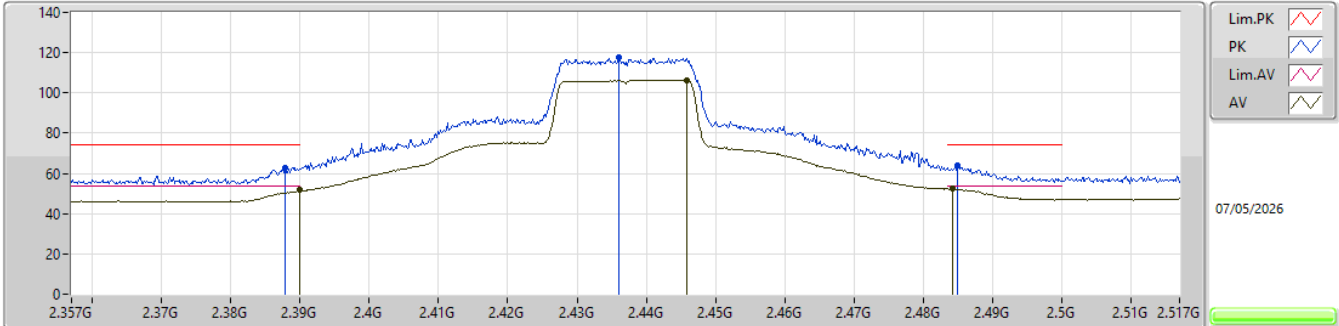


EUT_Y_1TX
SET 70
67\84\63\73\68\70\71\70
4.37\ -11.22\5.45\ -11.10\3.73\2.13\ -2.46\1.75

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38788G	62.94	74.00	-11.06	30.66	3	Vertical	330	1.99	70	27.28	5.00	-				
AV	2.38996G	51.76	54.00	-2.24	19.46	3	Vertical	330	1.99	70	27.30	5.00	-				
PK	2.43604G	117.82	Inf	-Inf	85.22	3	Vertical	330	1.99	70	27.54	5.06	-				
AV	2.4458G	106.39	Inf	-Inf	73.76	3	Vertical	330	1.99	70	27.56	5.07	-				
PK	2.485G	63.97	74.00	-10.03	30.99	3	Vertical	330	1.99	70	27.85	5.13	-				
AV	2.4842G	52.25	54.00	-1.75	19.28	3	Vertical	330	1.99	70	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

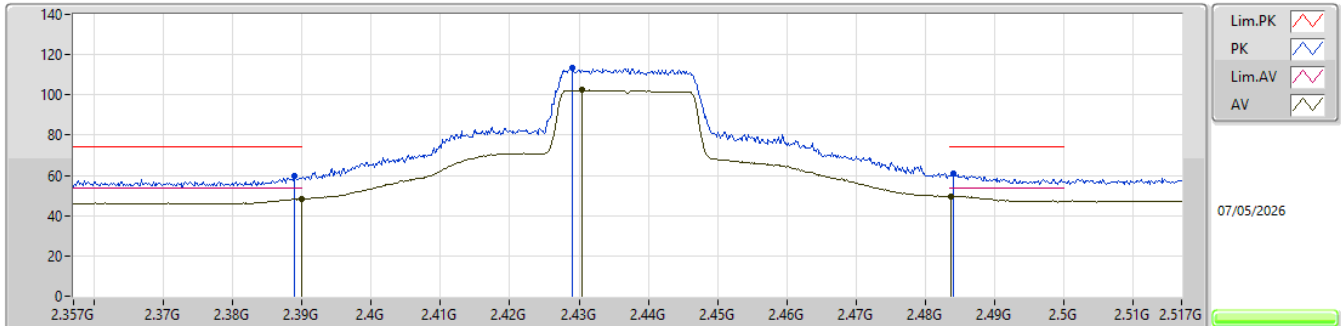


EUT_Y_1TX
SET 70
70
4.28

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38884G	59.84	74.00	-14.16	27.55	3	Horizontal	330	1.80	70	27.29	5.00	-				
AV	2.38996G	48.37	54.00	-5.63	16.07	3	Horizontal	330	1.80	70	27.30	5.00	-				
PK	2.429G	113.29	Inf	-Inf	80.65	3	Horizontal	330	1.80	70	27.59	5.05	-				
AV	2.43044G	102.30	Inf	-Inf	69.65	3	Horizontal	330	1.80	70	27.60	5.05	-				
PK	2.48404G	61.13	74.00	-12.87	28.16	3	Horizontal	330	1.80	70	27.84	5.13	-				
AV	2.48372G	49.72	54.00	-4.28	16.75	3	Horizontal	330	1.80	70	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

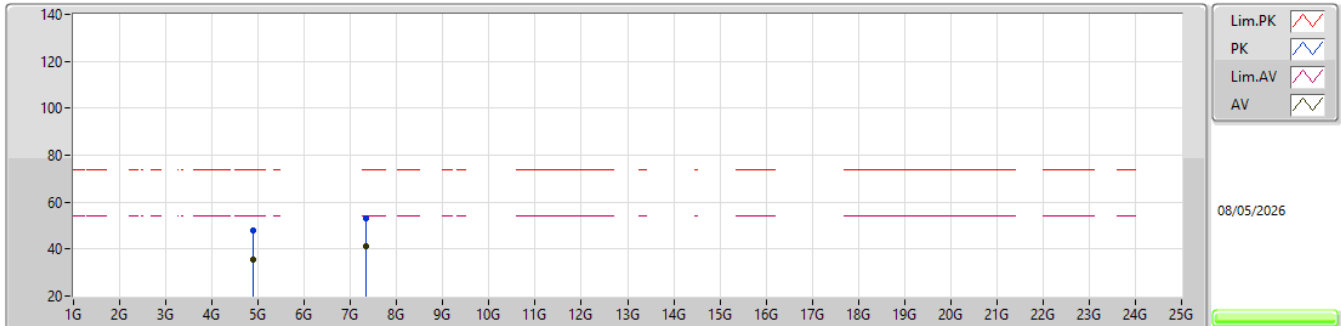


EUT Y_1TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.88347G	47.77	74.00	-26.23	41.93	3	Vertical	250	1.82	70	32.83	8.18	35.17				
AV	4.89034G	35.73	54.00	-18.27	29.86	3	Vertical	250	1.82	70	32.86	8.18	35.17				
PK	7.32527G	53.31	74.00	-20.69	40.63	3	Vertical	30	1.80	70	37.05	9.70	34.07				
AV	7.33042G	41.42	54.00	-12.58	28.74	3	Vertical	30	1.80	70	37.04	9.71	34.07				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

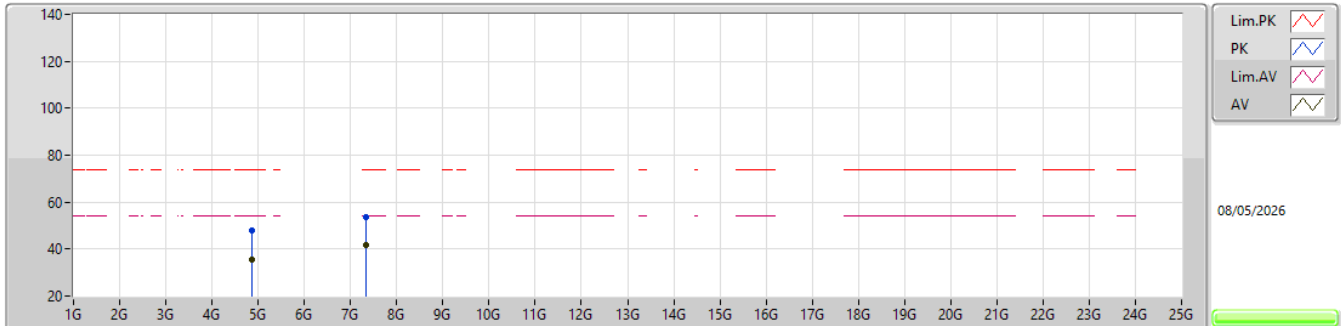


EUT Y_1TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87696G	47.78	74.00	-26.22	41.96	3	Horizontal	351	1.06	70	32.81	8.18	35.17				
AV	4.87048G	35.63	54.00	-18.37	29.84	3	Horizontal	351	1.06	70	32.78	8.18	35.17				
PK	7.32303G	53.45	74.00	-20.55	40.78	3	Horizontal	192	1.80	70	37.05	9.70	34.08				
AV	7.33002G	41.54	54.00	-12.46	28.86	3	Horizontal	192	1.80	70	37.04	9.71	34.07				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2457MHz_TX

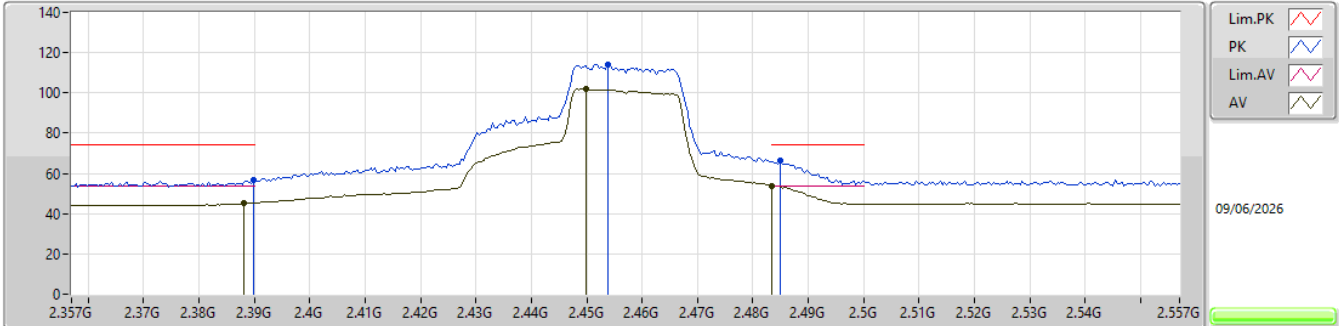


EUT_Y_1TX
Setting 68
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	56.64	74.00	-17.36	24.51	3	Vertical	339	2.00	-	27.60	4.53	-			
AV	2.3882G	45.27	54.00	-8.73	13.14	3	Vertical	339	2.00	-	27.60	4.53	-			
PK	2.4538G	114.21	Inf	-Inf	82.19	3	Vertical	339	2.00	-	27.40	4.62	-			
AV	2.4498G	101.91	Inf	-Inf	69.90	3	Vertical	339	2.00	-	27.40	4.61	-			
PK	2.485G	66.43	74.00	-7.57	34.31	3	Vertical	339	2.00	-	27.45	4.67	-			
AV	2.4835G	53.90	54.00	-0.10	21.79	3	Vertical	339	2.00	-	27.44	4.67	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2457MHz_TX

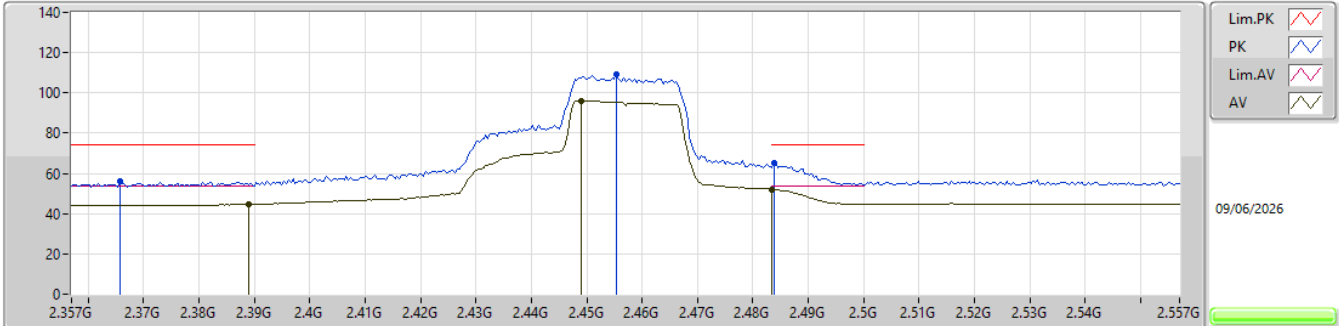


EUT_Y_1TX
Setting 68
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3658G	55.96	74.00	-18.04	23.80	3	Horizontal	324	1.70	-	27.64	4.52	-			
AV	2.389G	44.68	54.00	-9.32	12.55	3	Horizontal	324	1.70	-	27.60	4.53	-			
PK	2.4554G	109.12	Inf	-Inf	77.10	3	Horizontal	324	1.70	-	27.40	4.62	-			
AV	2.449G	96.13	Inf	-Inf	64.12	3	Horizontal	324	1.70	-	27.40	4.61	-			
PK	2.4838G	65.29	74.00	-8.71	33.18	3	Horizontal	324	1.70	-	27.44	4.67	-			
AV	2.4835G	52.01	54.00	-1.99	19.90	3	Horizontal	324	1.70	-	27.44	4.67	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

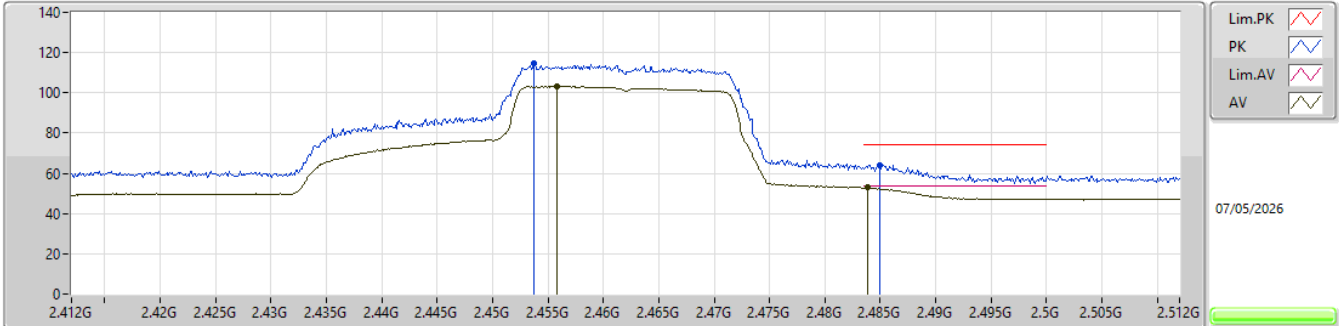


EUT_Y_1TX
SET 65
67.60\71\66\64\65
-1.52\4.46\ -26.66\ -0.66\1.70\1.09

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4537G	114.68	Inf	-Inf	81.99	3	Vertical	333	1.80	65	27.60	5.09	-				
AV	2.4558G	103.06	Inf	-Inf	70.37	3	Vertical	333	1.80	65	27.60	5.09	-				
PK	2.4849G	64.21	74.00	-9.79	31.23	3	Vertical	333	1.80	65	27.85	5.13	-				
AV	2.4839G	52.91	54.00	-1.09	19.94	3	Vertical	333	1.80	65	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

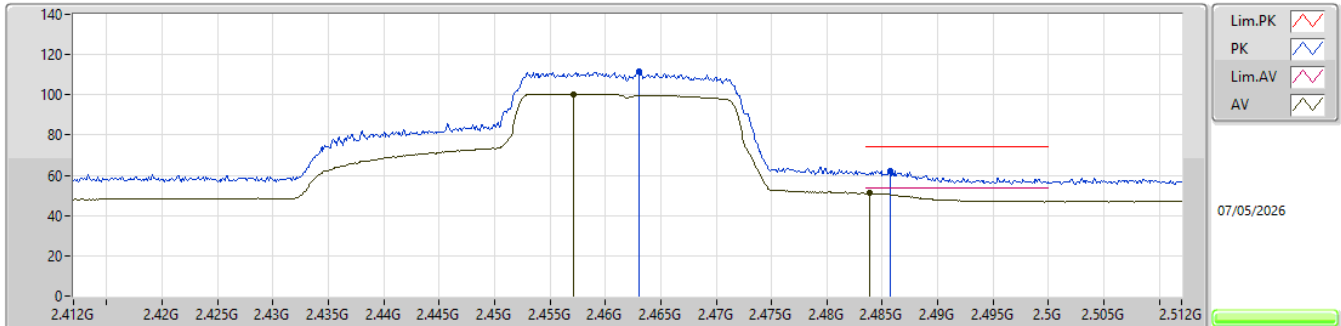


EUT_Y_1TX
SET 65
65
3.00

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.463G	111.53	Inf	-Inf	78.80	3	Horizontal	330	1.91	65	27.63	5.10	-			
AV	2.4571G	100.42	Inf	-Inf	67.73	3	Horizontal	330	1.91	65	27.60	5.09	-			
PK	2.4857G	62.23	74.00	-11.77	29.24	3	Horizontal	330	1.91	65	27.86	5.13	-			
AV	2.4839G	51.00	54.00	-3.00	18.03	3	Horizontal	330	1.91	65	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

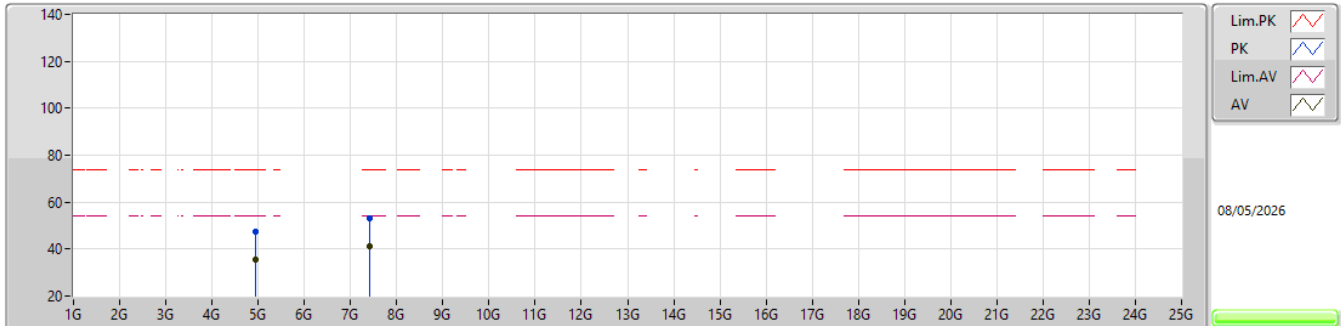


EUT Y_1TX
SET 65
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.94126G	47.45	74.00	-26.55	41.47	3	Vertical	272	1.10	65	32.98	8.17	35.17				
AV	4.93939G	35.72	54.00	-18.28	29.74	3	Vertical	272	1.10	65	32.98	8.17	35.17				
PK	7.40139G	53.07	74.00	-20.93	40.68	3	Vertical	346	1.80	65	36.60	9.77	33.98				
AV	7.40406G	41.31	54.00	-12.69	28.93	3	Vertical	346	1.80	65	36.59	9.77	33.98				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

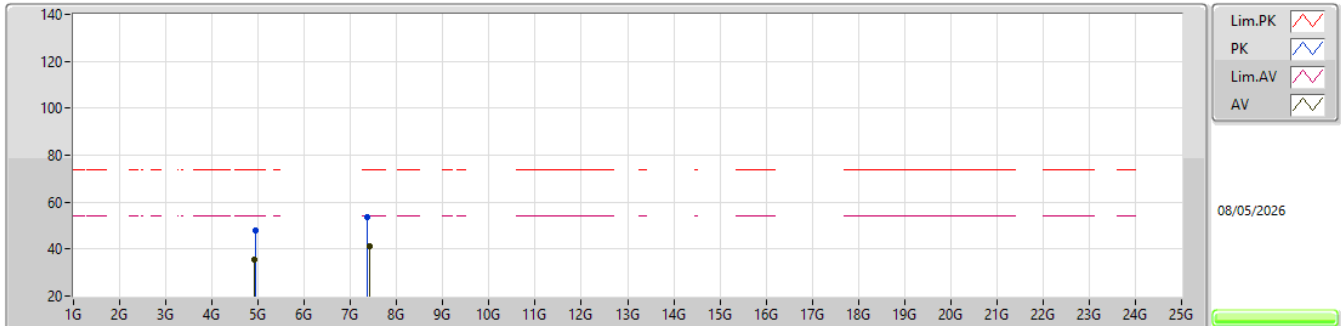


EUT Y_1TX
SET 65
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93835G	48.11	74.00	-25.89	42.13	3	Horizontal	154	2.04	65	32.98	8.17	35.17				
AV	4.92072G	35.73	54.00	-18.27	29.79	3	Horizontal	154	2.04	65	32.94	8.17	35.17				
PK	7.37161G	53.41	74.00	-20.59	40.86	3	Horizontal	194.1	1.80	65	36.83	9.74	34.02				
AV	7.40466G	41.33	54.00	-12.67	28.95	3	Horizontal	194.1	1.80	65	36.59	9.77	33.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

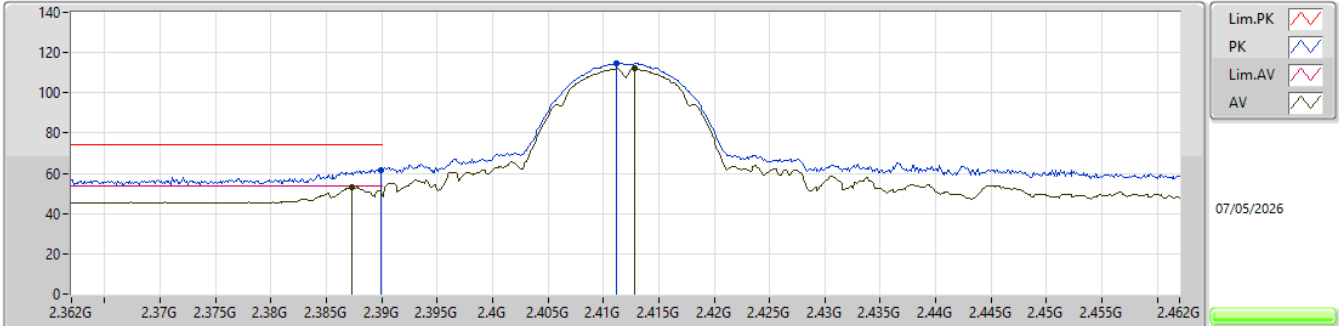


EUT_Y_2TX
SET 71
80\40\72\56\64\68\70\71
-14.08\8.03\ -4.39\7.14\5.23\3.72\3.67\0.88

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3899G	61.63	74.00	-12.37	29.33	3	Vertical	342	1.89	71	27.30	5.00	-			
AV	2.3873G	53.12	54.00	-0.88	20.85	3	Vertical	342	1.89	71	27.27	5.00	-			
PK	2.4112G	114.69	Inf	-Inf	82.16	3	Vertical	342	1.89	71	27.50	5.03	-			
AV	2.4128G	112.20	Inf	-Inf	79.67	3	Vertical	342	1.89	71	27.50	5.03	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

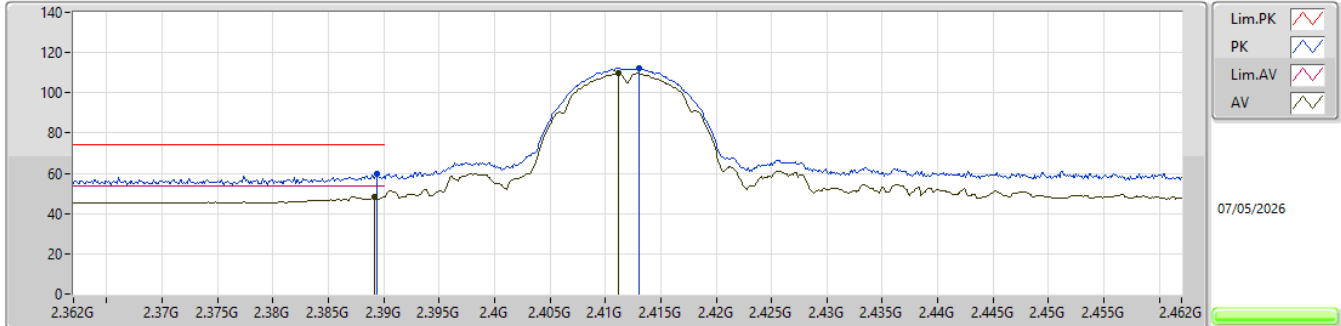


EUT_Y_2TX
SET 71
71
5.69

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	59.45	74.00	-14.55	27.16	3	Horizontal	27	2.00	71	27.29	5.00	-			
AV	2.3892G	48.31	54.00	-5.69	16.02	3	Horizontal	27	2.00	71	27.29	5.00	-			
PK	2.413G	112.17	Inf	-Inf	79.64	3	Horizontal	27	2.00	71	27.50	5.03	-			
AV	2.4112G	109.61	Inf	-Inf	77.08	3	Horizontal	27	2.00	71	27.50	5.03	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

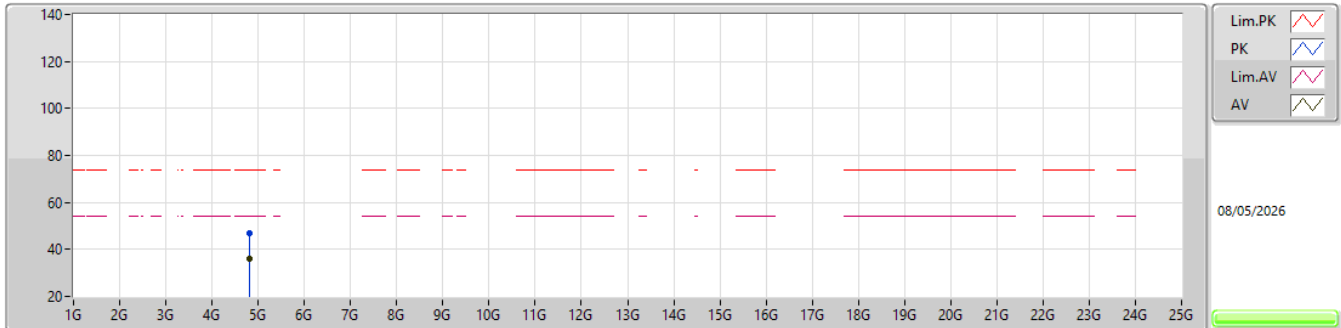


EUT_Y_2TX
SET 71
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81413G	47.05	74.00	-26.95	41.64	3	Vertical	358	1.80	71	32.41	8.18	35.18			
AV	4.82396G	35.84	54.00	-18.16	30.35	3	Vertical	358	1.80	71	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

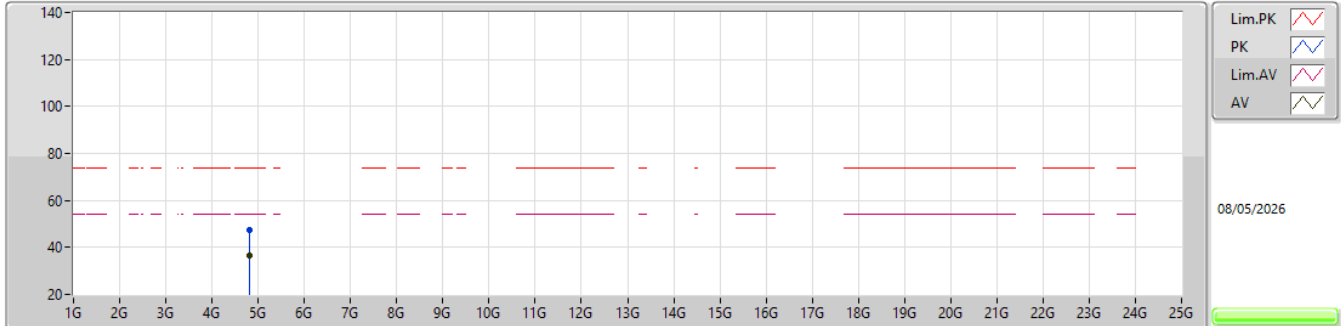


EUT_Y_2TX
SET 71
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82392G	47.51	74.00	-26.49	42.02	3	Horizontal	344	1.75	71	32.49	8.18	35.18			
AV	4.824G	36.70	54.00	-17.30	31.21	3	Horizontal	344	1.75	71	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

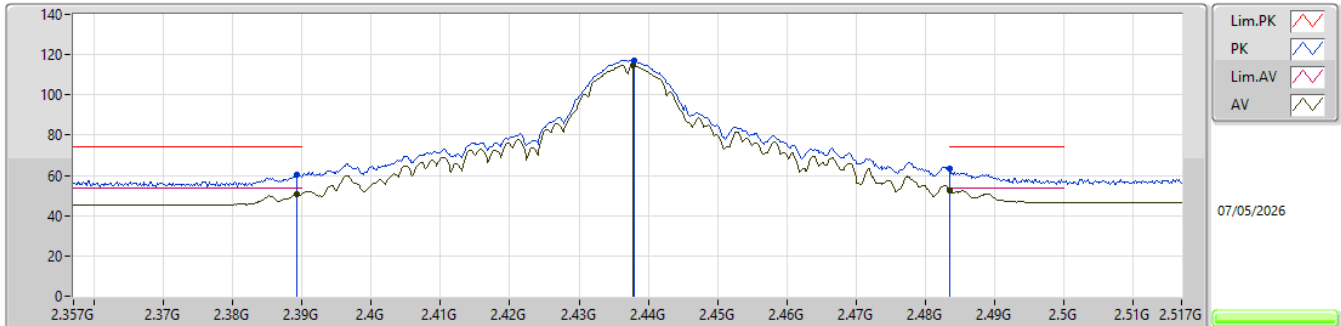


EUT_Y_2TX
SET 108
71\91\101\106\108
5.14\1.11\1.78\1.12\1.56

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38916G	60.19	74.00	-13.81	27.90	3	Vertical	334	1.99	108	27.29	5.00	-			
AV	2.38916G	50.98	54.00	-3.02	18.69	3	Vertical	334	1.99	108	27.29	5.00	-			
PK	2.43796G	117.08	Inf	-Inf	84.50	3	Vertical	334	1.99	108	27.52	5.06	-			
AV	2.4378G	114.81	Inf	-Inf	82.23	3	Vertical	334	1.99	108	27.52	5.06	-			
PK	2.4835G	63.34	74.00	-10.66	30.37	3	Vertical	334	1.99	108	27.84	5.13	-			
AV	2.4835G	52.44	54.00	-1.56	19.47	3	Vertical	334	1.99	108	27.84	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

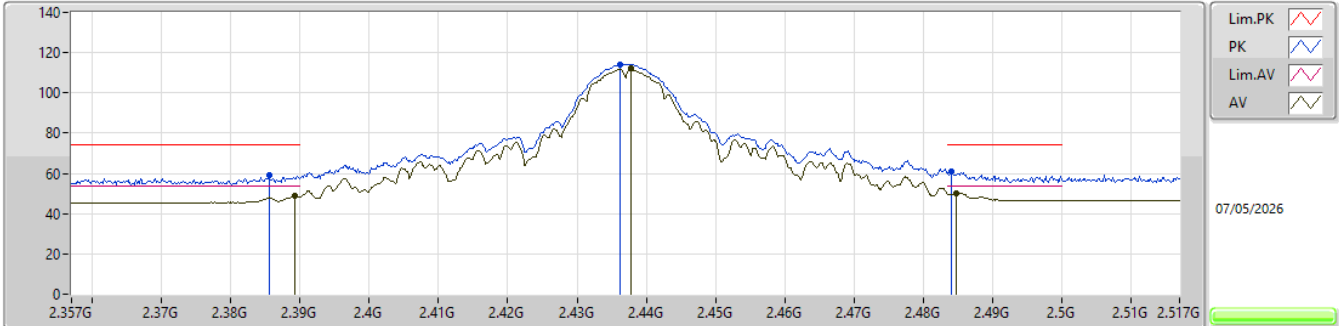

EUT_V_2TX

SET 83


108\99\95\93\92\91\90\89\88\87\86\85\73\79\82\83\84\83

-2.11\ -2.15\ -1.11\ -1.69\ -1.24\ -1.66\ -1.99\ -1.12\ -2.02\ -2.12\ -1.33\ -3.66\ 3.85\ 4.74\ 2.69\ 2.29\ -0.11\ 3.65

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.38548G	59.04	74.00	-14.96	26.79	3	Horizontal	21	2.00	83	27.25	5.00	-					
AV	2.38932G	48.60	54.00	-5.40	16.31	3	Horizontal	21	2.00	83	27.29	5.00	-					
PK	2.4362G	114.28	Inf	-Inf	81.68	3	Horizontal	21	2.00	83	27.54	5.06	-					
AV	2.4378G	111.95	Inf	-Inf	79.37	3	Horizontal	21	2.00	83	27.52	5.06	-					
PK	2.48404G	60.82	74.00	-13.18	27.85	3	Horizontal	21	2.00	83	27.84	5.13	-					
AV	2.48468G	50.35	54.00	-3.65	17.37	3	Horizontal	21	2.00	83	27.85	5.13	-					

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

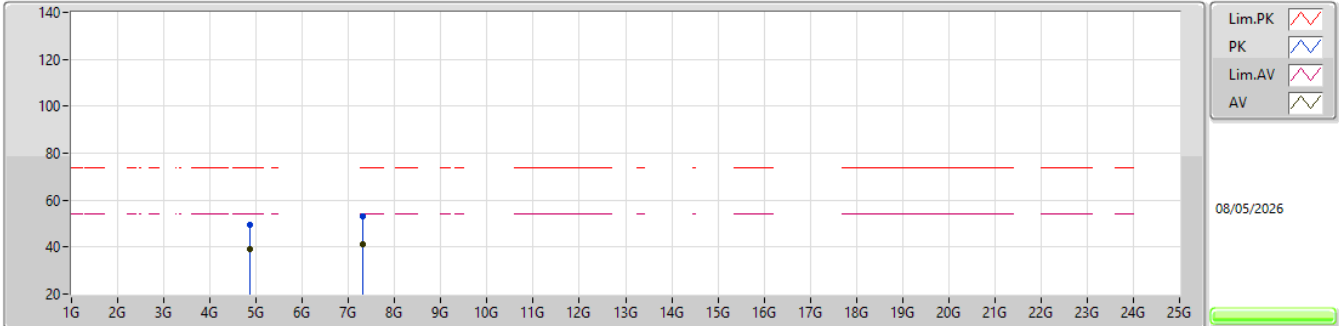


EUT V_2TX
SET 83
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87376G	49.65	74.00	-24.35	43.84	3	Vertical	346	2.92	83	32.80	8.18	35.17				
AV	4.87404G	38.95	54.00	-15.05	33.14	3	Vertical	346	2.92	83	32.80	8.18	35.17				
PK	7.31072G	53.33	74.00	-20.67	40.65	3	Vertical	342	1.80	83	37.08	9.69	34.09				
AV	7.31032G	41.00	54.00	-13.00	28.32	3	Vertical	342	1.80	83	37.08	9.69	34.09				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

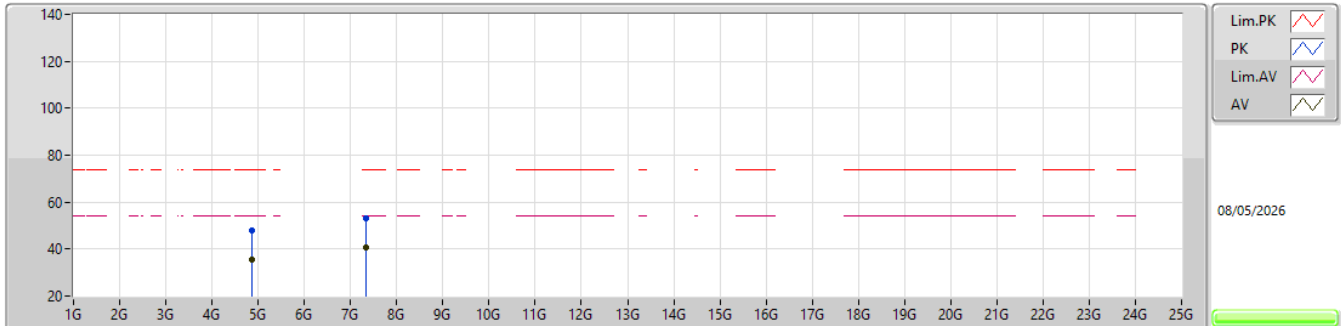


EUT_Y_2TX
SET 83
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86665G	47.89	74.00	-26.11	42.11	3	Horizontal	348	1.80	83	32.77	8.18	35.17				
AV	4.87388G	35.46	54.00	-18.54	29.65	3	Horizontal	348	1.80	83	32.80	8.18	35.17				
PK	7.33078G	53.26	74.00	-20.74	40.58	3	Horizontal	113	1.80	83	37.04	9.71	34.07				
AV	7.33046G	40.67	54.00	-13.33	27.99	3	Horizontal	113	1.80	83	37.04	9.71	34.07				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

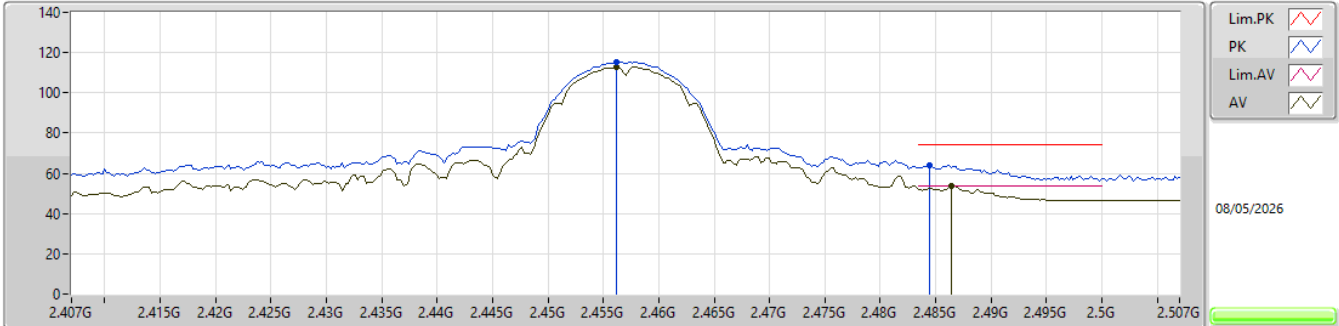


EUT Y_2TX
SET 70
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4562G	115.28	Inf	-Inf	82.59	3	Vertical	351	1.80	-	27.60	5.09	-			
AV	2.4562G	112.91	Inf	-Inf	80.22	3	Vertical	351	1.80	-	27.60	5.09	-			
PK	2.4844G	63.95	74.00	-10.05	30.98	3	Vertical	351	1.80	-	27.84	5.13	-			
AV	2.4864G	53.50	54.00	-0.50	20.51	3	Vertical	351	1.80	-	27.86	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

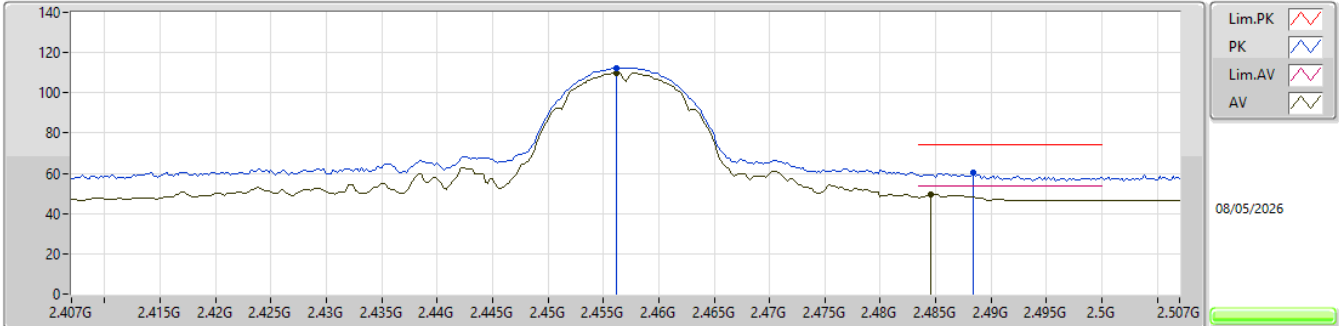


EUT Y_2TX
SET 70
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4562G	112.52	Inf	-Inf	79.83	3	Horizontal	30	2.39	-	27.60	5.09	-				
AV	2.4562G	110.02	Inf	-Inf	77.33	3	Horizontal	30	2.39	-	27.60	5.09	-				
PK	2.4884G	60.08	74.00	-13.92	27.07	3	Horizontal	30	2.39	-	27.88	5.13	-				
AV	2.4846G	49.71	54.00	-4.29	16.73	3	Horizontal	30	2.39	-	27.85	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

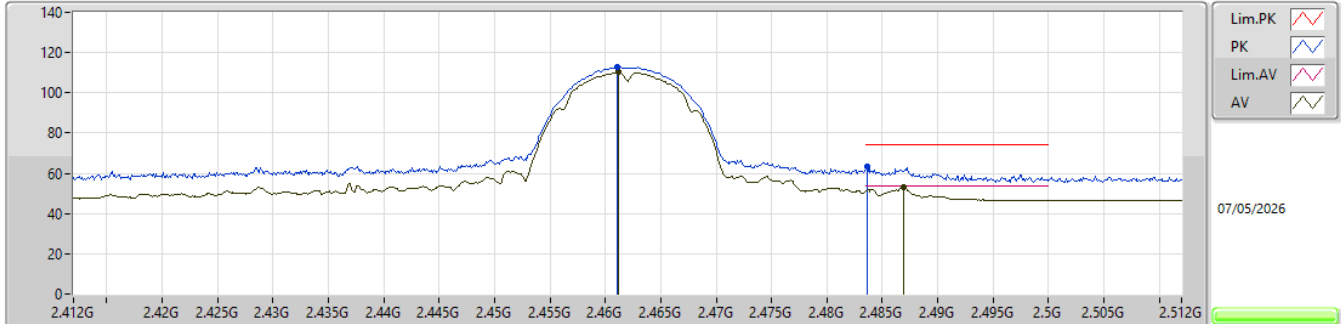


EUT_Y_2TX
SET 68
71\56\75\66\70\68\69\68
-3.63\6.31\19.12\1.21\3.06\1.94\4.16\1.17

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4611G	112.88	Inf	-Inf	80.17	3	Vertical	338	1.80	68	27.61	5.10	-			
AV	2.4612G	110.24	Inf	-Inf	77.53	3	Vertical	338	1.80	68	27.61	5.10	-			
PK	2.4836G	63.20	74.00	-10.80	30.23	3	Vertical	338	1.80	68	27.84	5.13	-			
AV	2.4869G	52.83	54.00	-1.17	19.83	3	Vertical	338	1.80	68	27.87	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

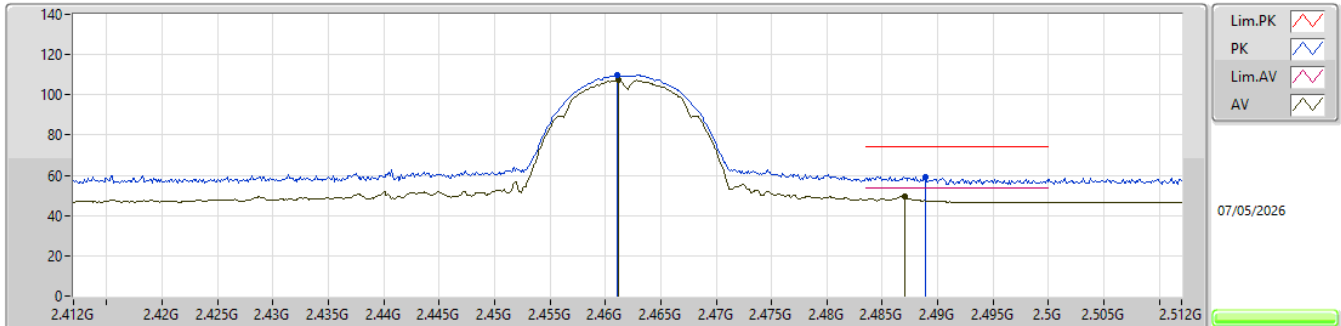


EUT Y_2TX
SET 68
68
4.73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4611G	109.86	Inf	-Inf	77.15	3	Horizontal	27	2.00	68	27.61	5.10	-				
AV	2.4612G	107.21	Inf	-Inf	74.50	3	Horizontal	27	2.00	68	27.61	5.10	-				
PK	2.4889G	59.34	74.00	-14.66	26.32	3	Horizontal	27	2.00	68	27.89	5.13	-				
AV	2.487G	49.27	54.00	-4.73	16.27	3	Horizontal	27	2.00	68	27.87	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

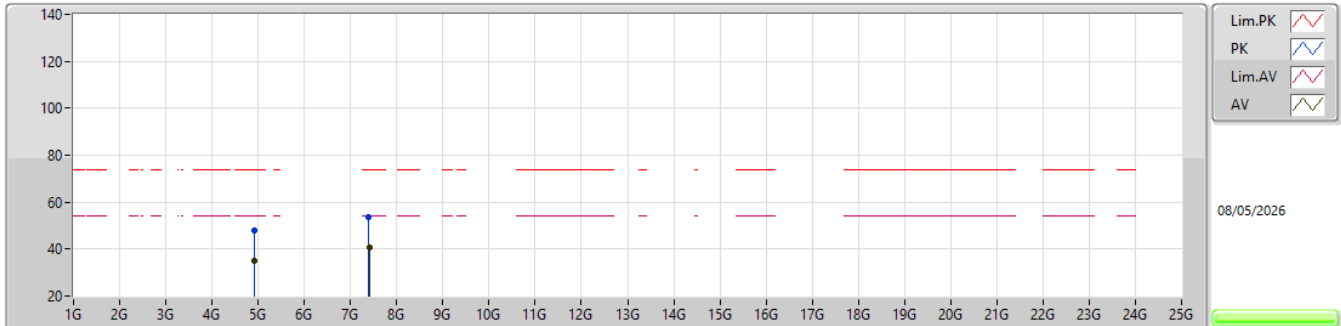


EUT Y_2TX
SET 68
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92128G	48.03	74.00	-25.97	42.09	3	Vertical	195	1.80	68	32.94	8.17	35.17				
AV	4.91165G	35.06	54.00	-18.94	29.14	3	Vertical	195	1.80	68	32.92	8.17	35.17				
PK	7.39847G	53.40	74.00	-20.60	41.01	3	Vertical	8	1.06	68	36.61	9.77	33.99				
AV	7.40498G	40.67	54.00	-13.33	28.29	3	Vertical	8	1.06	68	36.59	9.77	33.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

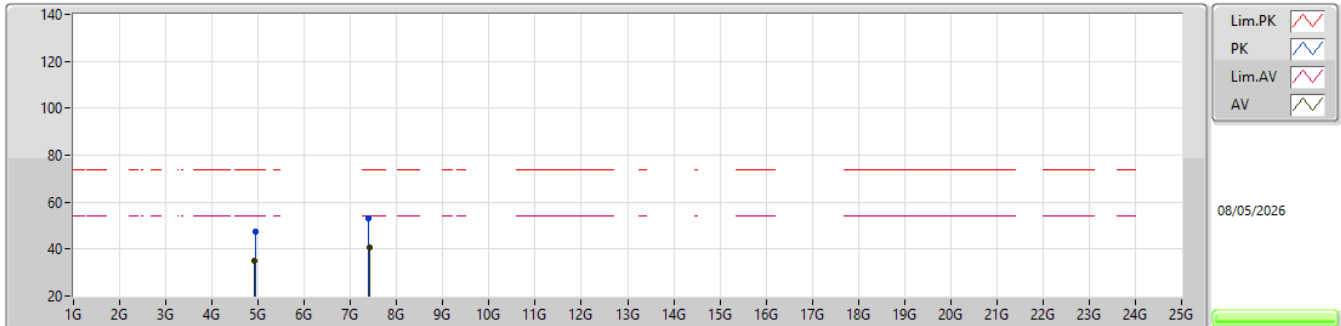


EUT_Y_2TX
SET 68
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93307G	47.27	74.00	-26.73	41.30	3	Horizontal	357	1.75	68	32.97	8.17	35.17				
AV	4.92112G	35.01	54.00	-18.99	29.07	3	Horizontal	357	1.75	68	32.94	8.17	35.17				
PK	7.37645G	53.14	74.00	-20.86	40.61	3	Horizontal	8	1.39	68	36.79	9.75	34.01				
AV	7.4059G	40.75	54.00	-13.25	28.37	3	Horizontal	8	1.39	68	36.59	9.77	33.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

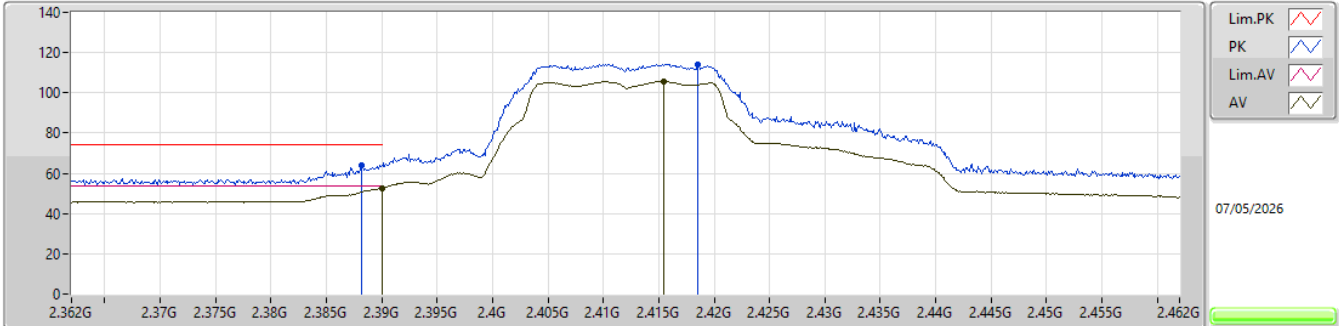


EUT_Y_2TX
SET 67
80\40\69\55\62\65\66\67\68\67
-22.43\7.34\4.36\6.33\4.98\4.04\2.59\1.24\1.42\1.34

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3882G	64.13	74.00	-9.87	31.85	3	Vertical	328	1.80	67	27.28	5.00	-			
AV	2.39G	52.66	54.00	-1.34	20.36	3	Vertical	328	1.80	67	27.30	5.00	-			
PK	2.4185G	114.20	Inf	-Inf	81.66	3	Vertical	328	1.80	67	27.50	5.04	-			
AV	2.4155G	105.61	Inf	-Inf	73.08	3	Vertical	328	1.80	67	27.50	5.03	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

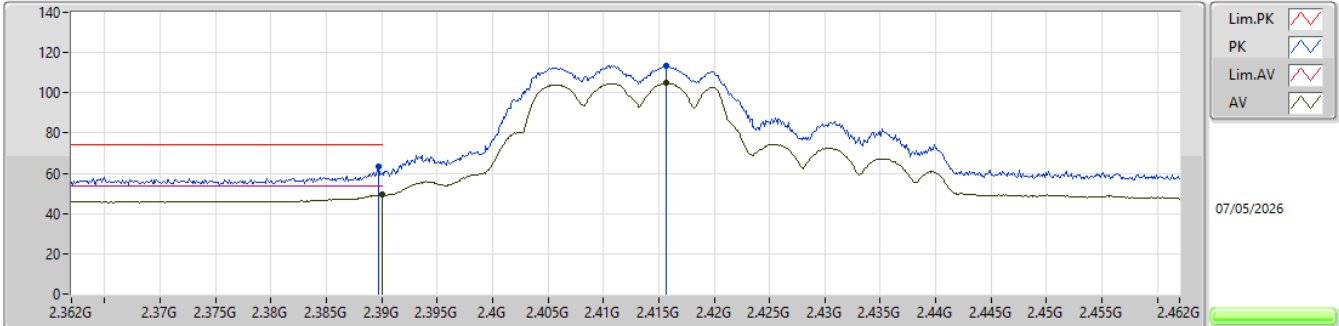


EUT_Y_2TX
SET 67
67
4.81

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3897G	63.32	74.00	-10.68	31.02	3	Horizontal	21	2.00	67	27.30	5.00	-			
AV	2.39G	49.19	54.00	-4.81	16.89	3	Horizontal	21	2.00	67	27.30	5.00	-			
PK	2.4157G	113.73	Inf	-Inf	81.20	3	Horizontal	21	2.00	67	27.50	5.03	-			
AV	2.4157G	104.75	Inf	-Inf	72.22	3	Horizontal	21	2.00	67	27.50	5.03	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

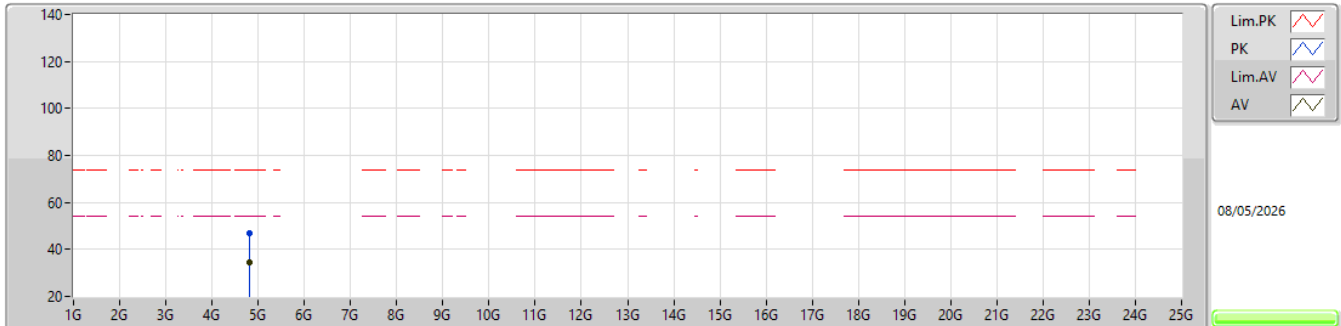


EUT_Y_2TX
SET 67
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8065G	47.15	74.00	-26.85	41.80	3	Vertical	53	2.86	67	32.35	8.18	35.18			
AV	4.80698G	34.72	54.00	-19.28	29.36	3	Vertical	53	2.86	67	32.36	8.18	35.18			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

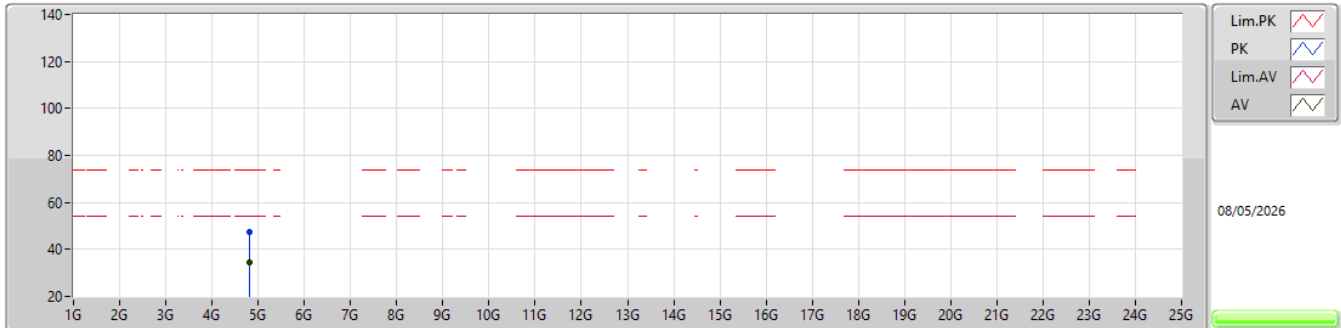


EUT_V_2TX
SET 67
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81913G	47.20	74.00	-26.80	41.75	3	Horizontal	187.1	1.80	67	32.45	8.18	35.18			
AV	4.80878G	34.74	54.00	-19.26	29.37	3	Horizontal	187.1	1.80	67	32.37	8.18	35.18			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

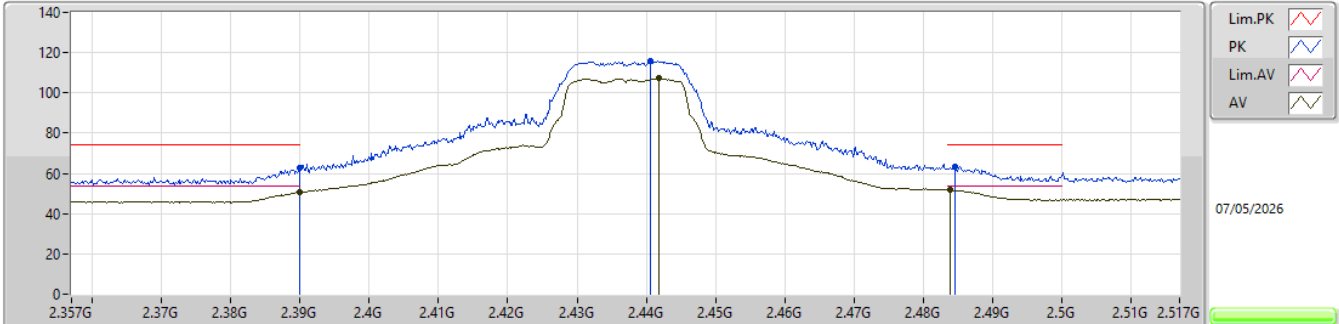


EUT_Y_2TX
SET 70
67\88\64\76\70\73\72\63\70
5.30\6.15\5.98\5.73\1.83\5.51\5.91\6.26\2.21

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.38996G	62.87	74.00	-11.13	30.57	3	Vertical	336	2.00	70	27.30	5.00	-
AV	2.38996G	50.53	54.00	-3.47	18.23	3	Vertical	336	2.00	70	27.30	5.00	-
PK	2.44068G	115.74	Inf	-Inf	83.16	3	Vertical	336	2.00	70	27.51	5.07	-
AV	2.4418G	107.13	Inf	-Inf	74.54	3	Vertical	336	2.00	70	27.52	5.07	-
PK	2.48452G	63.65	74.00	-10.35	30.67	3	Vertical	336	2.00	70	27.85	5.13	-
AV	2.48388G	51.79	54.00	-2.21	18.82	3	Vertical	336	2.00	70	27.84	5.13	-

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

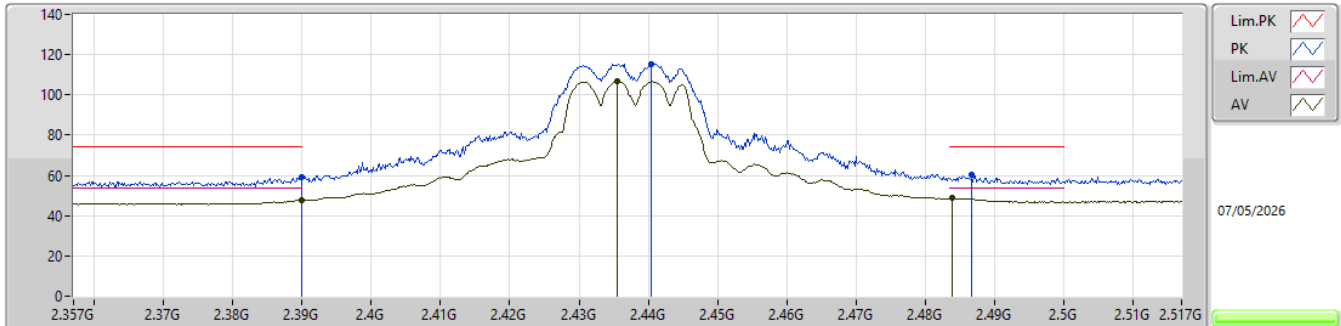


EUT_V_2TX
SET 70
70
5.34

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38996G	59.00	74.00	-15.00	26.70	3	Horizontal	22	2.00	70	27.30	5.00	-				
AV	2.38996G	47.85	54.00	-6.15	15.55	3	Horizontal	22	2.00	70	27.30	5.00	-				
PK	2.44036G	115.14	Inf	-Inf	82.57	3	Horizontal	22	2.00	70	27.50	5.07	-				
AV	2.43556G	106.66	Inf	-Inf	74.06	3	Horizontal	22	2.00	70	27.54	5.06	-				
PK	2.48676G	60.64	74.00	-13.36	27.64	3	Horizontal	22	2.00	70	27.87	5.13	-				
AV	2.48388G	48.66	54.00	-5.34	15.69	3	Horizontal	22	2.00	70	27.84	5.13	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

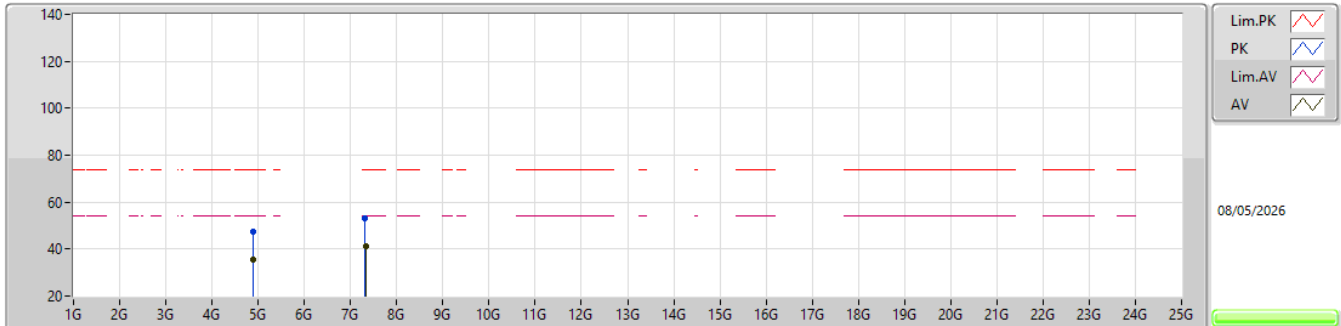


EUT Y_2TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.8776G	47.49	74.00	-26.51	41.67	3	Vertical	147	1.80	70	32.81	8.18	35.17				
AV	4.89094G	35.47	54.00	-18.53	29.60	3	Vertical	147	1.80	70	32.86	8.18	35.17				
PK	7.31779G	53.33	74.00	-20.67	40.65	3	Vertical	142	1.80	70	37.06	9.70	34.08				
AV	7.3291G	41.10	54.00	-12.90	28.42	3	Vertical	142	1.80	70	37.04	9.71	34.07				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

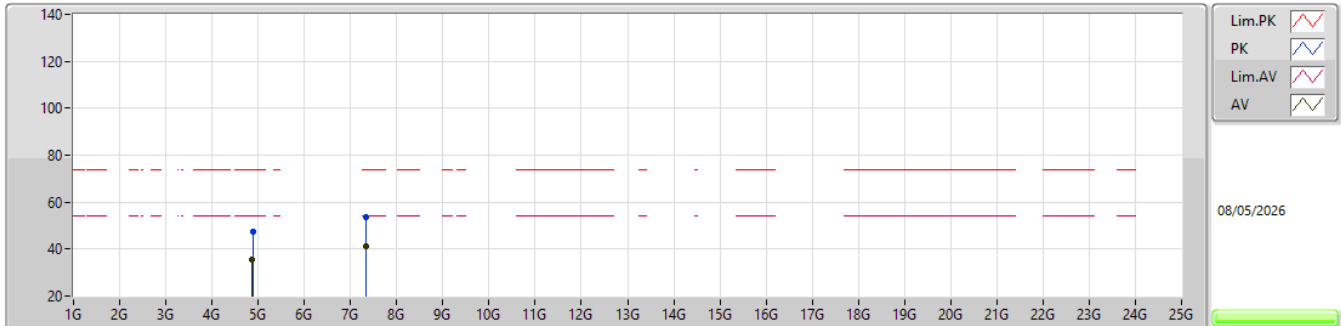


EUT Y_2TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.88035G	47.63	74.00	-26.37	41.80	3	Horizontal	205	2.12	70	32.82	8.18	35.17			
AV	4.87172G	35.31	54.00	-18.69	29.51	3	Horizontal	205	2.12	70	32.79	8.18	35.17			
PK	7.32974G	53.84	74.00	-20.16	41.16	3	Horizontal	167	1.31	70	37.04	9.71	34.07			
AV	7.32986G	41.02	54.00	-12.98	28.34	3	Horizontal	167	1.31	70	37.04	9.71	34.07			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

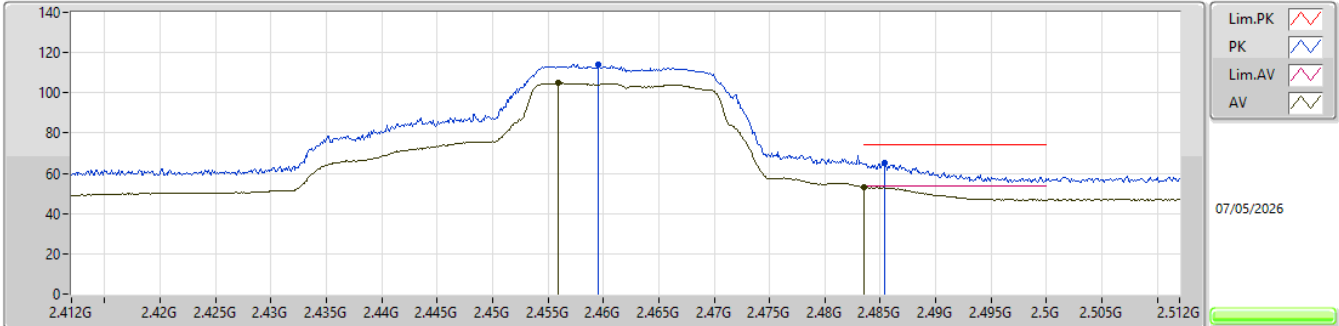


EUT_Y_2TX
SET 66
67.65\66
-0.26\2.63\0.85

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4595G	114.07	Inf	-Inf	81.38	3	Vertical	339	1.80	66	27.60	5.09	-			
AV	2.4595G	104.84	Inf	-Inf	72.15	3	Vertical	339	1.80	66	27.60	5.09	-			
PK	2.4835G	65.19	74.00	-8.81	32.21	3	Vertical	339	1.80	66	27.85	5.13	-			
AV	2.4835G	53.15	54.00	-0.85	20.18	3	Vertical	339	1.80	66	27.84	5.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

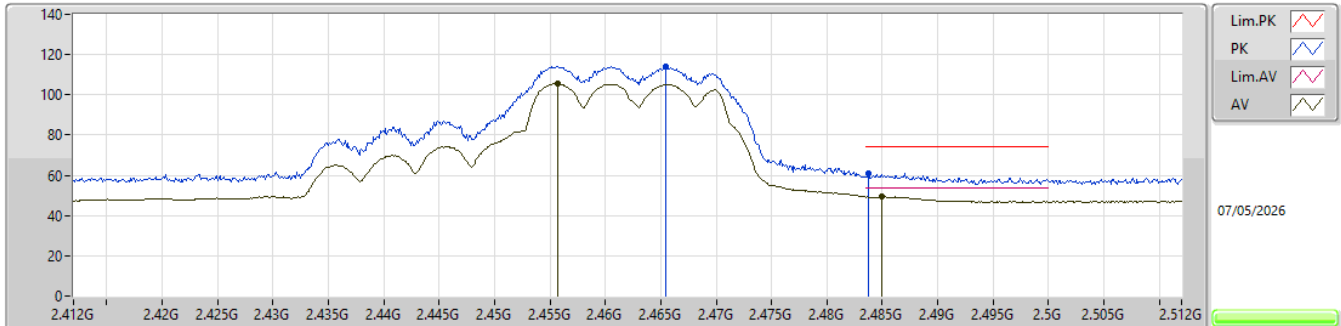


EUT_Y_2TX
SET 66
66
4.74

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4654G	113.94	Inf	-Inf	81.19	3	Horizontal	16	2.00	66	27.65	5.10	-			
AV	2.4557G	105.48	Inf	-Inf	72.79	3	Horizontal	16	2.00	66	27.60	5.09	-			
PK	2.4837G	61.06	74.00	-12.94	28.09	3	Horizontal	16	2.00	66	27.84	5.13	-			
AV	2.4849G	49.26	54.00	-4.74	16.28	3	Horizontal	16	2.00	66	27.85	5.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

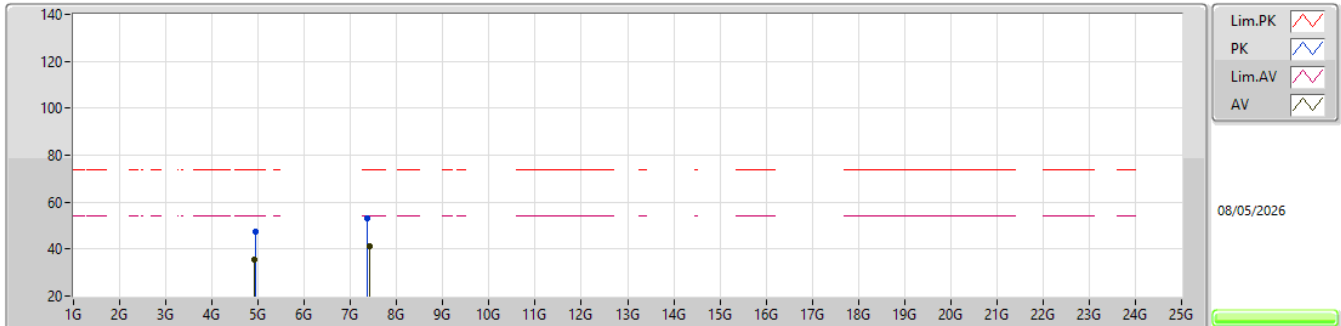


EUT_Y_2TX
SET 66
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93259G	47.42	74.00	-26.58	41.45	3	Vertical	258	1.80	66	32.97	8.17	35.17				
AV	4.92124G	35.43	54.00	-18.57	29.49	3	Vertical	258	1.80	66	32.94	8.17	35.17				
PK	7.37289G	53.05	74.00	-20.95	40.50	3	Vertical	144	1.80	66	36.82	9.75	34.02				
AV	7.4055G	41.04	54.00	-12.96	28.66	3	Vertical	144	1.80	66	36.59	9.77	33.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

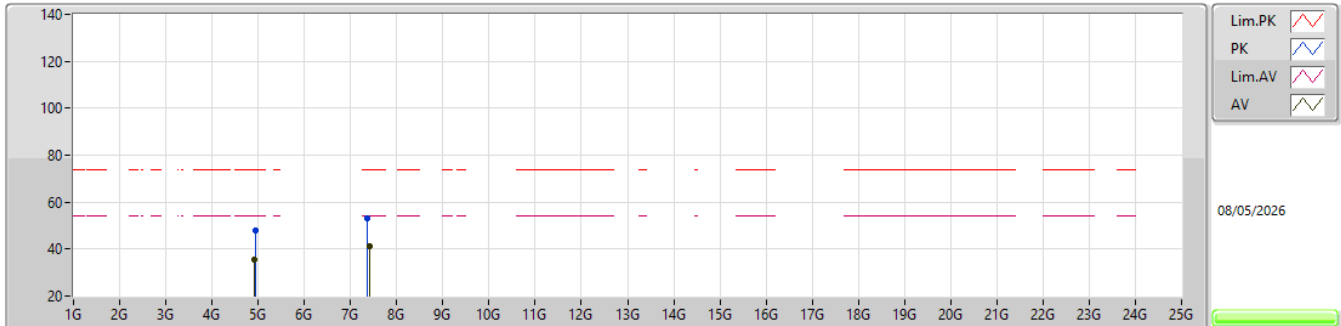


EUT_Y_2TX
SET 66
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93887G	47.92	74.00	-26.08	41.94	3	Horizontal	242	2.00	66	32.98	8.17	35.17				
AV	4.91949G	35.41	54.00	-18.59	29.47	3	Horizontal	242	2.00	66	32.94	8.17	35.17				
PK	7.36962G	53.25	74.00	-20.75	40.69	3	Horizontal	1	1.80	66	36.84	9.74	34.02				
AV	7.40582G	41.05	54.00	-12.95	28.67	3	Horizontal	1	1.80	66	36.59	9.77	33.98				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

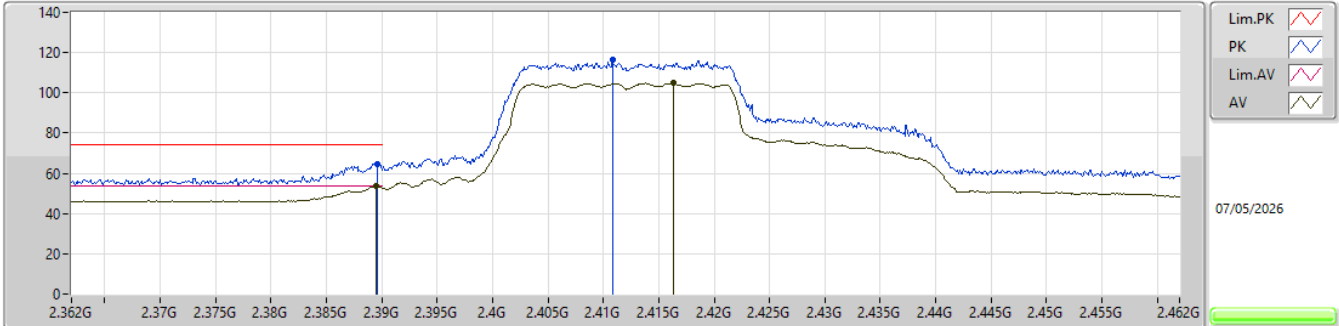


EUT_Y_2TX
 SET 66
 80\40\68\54\61\64\65\66
 -25.04\7.19\3.60\5.40\3.59\1.81\1.39\0.50

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3896G	64.61	74.00	-9.39	32.31	3	Vertical	326	1.80	66	27.30	5.00	-			
AV	2.3895G	53.50	54.00	-0.50	21.21	3	Vertical	326	1.80	66	27.29	5.00	-			
PK	2.4108G	116.40	Inf	-Inf	83.87	3	Vertical	326	1.80	66	27.50	5.03	-			
AV	2.4163G	104.77	Inf	-Inf	72.24	3	Vertical	326	1.80	66	27.50	5.03	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

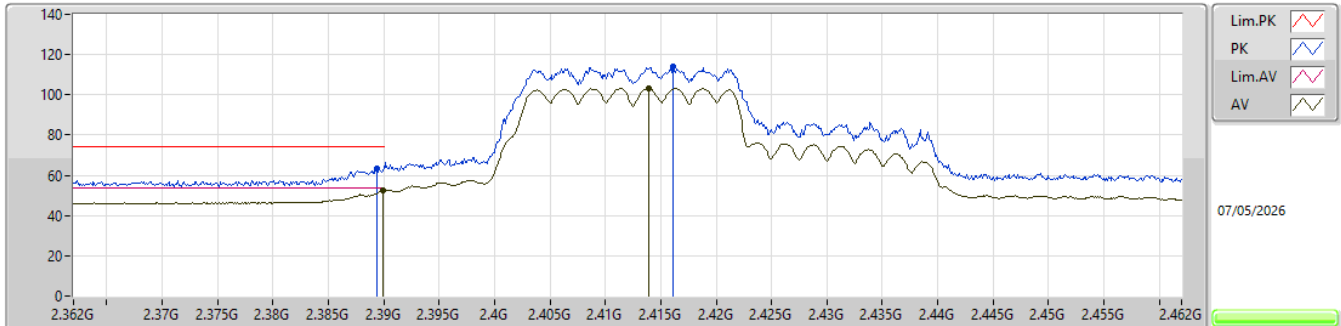


EUT Y_2TX
SET 66
66
1.77

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	63.66	74.00	-10.34	31.37	3	Horizontal	16	1.99	66	27.29	5.00	-			
AV	2.3899G	52.23	54.00	-1.77	19.93	3	Horizontal	16	1.99	66	27.30	5.00	-			
PK	2.4161G	114.27	Inf	-Inf	81.74	3	Horizontal	16	1.99	66	27.50	5.03	-			
AV	2.4139G	103.14	Inf	-Inf	70.61	3	Horizontal	16	1.99	66	27.50	5.03	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

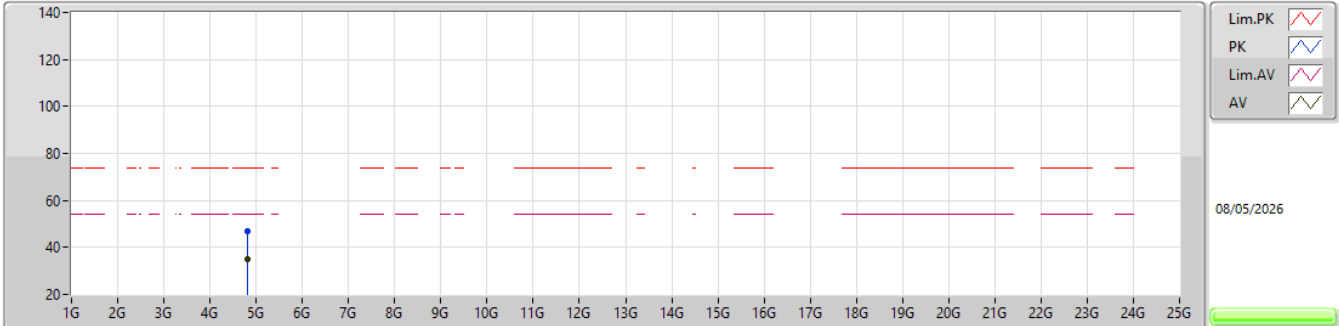


EUT_V_2TX
SET 66
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81845G	46.79	74.00	-27.21	41.34	3	Vertical	73	1.87	66	32.45	8.18	35.18			
AV	4.80598G	35.10	54.00	-18.90	29.75	3	Vertical	73	1.87	66	32.35	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

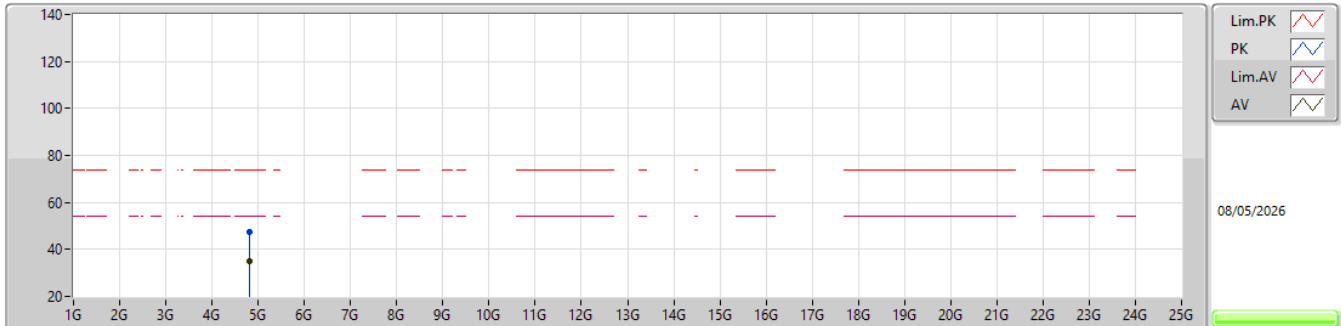


EUT_V_2TX
SET 66
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82344G	47.26	74.00	-26.74	41.77	3	Horizontal	312	1.58	66	32.49	8.18	35.18			
AV	4.80658G	35.11	54.00	-18.89	29.76	3	Horizontal	312	1.58	66	32.35	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

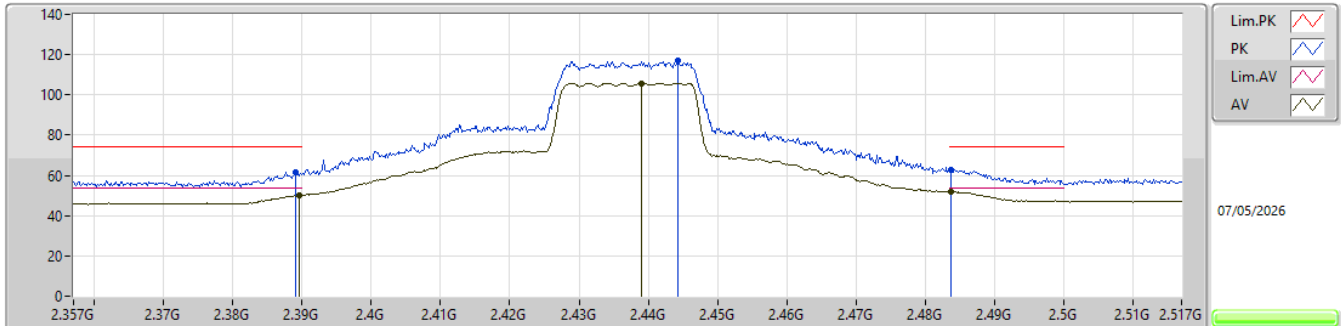


EUT_V_2TX
SET 69
66\82\62\72\67\69\70\71\70\69
4.23\ -11.17\5.38\ -11.19\3.85\2.04\1.39\ -4.04\ -2.52\2.10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	61.83	74.00	-12.17	29.54	3	Vertical	326	1.99	69	27.29	5.00	-			
AV	2.38964G	50.13	54.00	-3.87	17.83	3	Vertical	326	1.99	69	27.30	5.00	-			
PK	2.4442G	116.95	Inf	-Inf	84.34	3	Vertical	326	1.99	69	27.54	5.07	-			
AV	2.43908G	105.90	Inf	-Inf	73.33	3	Vertical	326	1.99	69	27.51	5.06	-			
PK	2.48372G	62.69	74.00	-11.31	29.72	3	Vertical	326	1.99	69	27.84	5.13	-			
AV	2.48372G	51.90	54.00	-2.10	18.93	3	Vertical	326	1.99	69	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

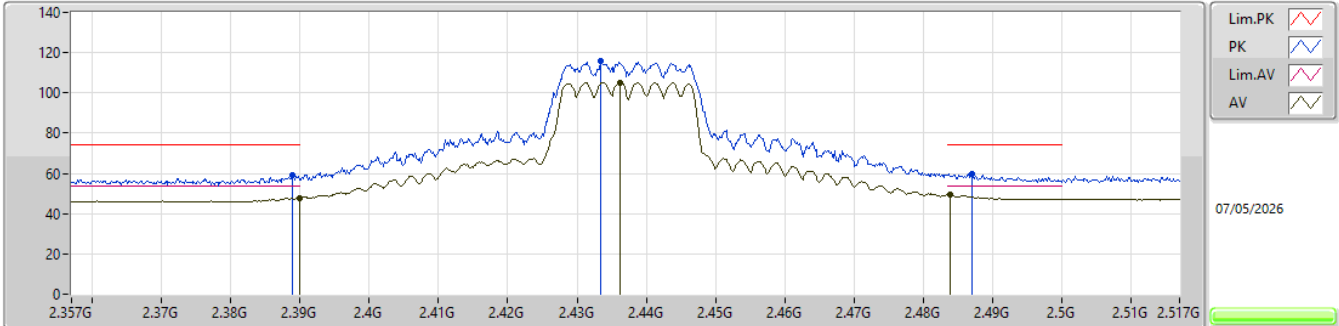


EUT_V_2TX
SET 69
69
4.77

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38884G	58.84	74.00	-15.16	26.55	3	Horizontal	14	1.80	69	27.29	5.00	-			
AV	2.38996G	47.77	54.00	-6.23	15.47	3	Horizontal	14	1.80	69	27.30	5.00	-			
PK	2.43332G	115.83	Inf	-Inf	83.20	3	Horizontal	14	1.80	69	27.57	5.06	-			
AV	2.4362G	105.28	Inf	-Inf	72.68	3	Horizontal	14	1.80	69	27.54	5.06	-			
PK	2.48708G	59.89	74.00	-14.11	26.89	3	Horizontal	14	1.80	69	27.87	5.13	-			
AV	2.48388G	49.23	54.00	-4.77	16.26	3	Horizontal	14	1.80	69	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

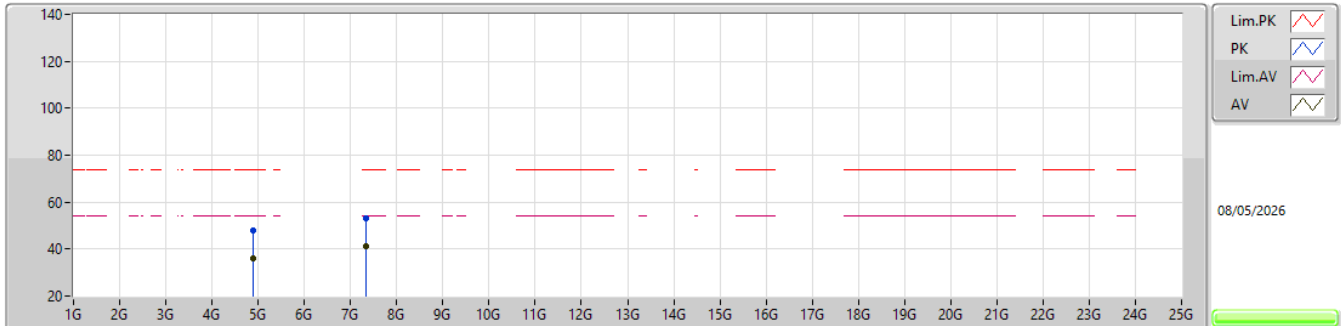


EUT_Y_2TX
SET 69
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87804G	47.70	74.00	-26.30	41.88	3	Vertical	142	1.71	69	32.81	8.18	35.17			
AV	4.89062G	35.81	54.00	-18.19	29.94	3	Vertical	142	1.71	69	32.86	8.18	35.17			
PK	7.3295G	53.03	74.00	-20.97	40.35	3	Vertical	0	2.66	69	37.04	9.71	34.07			
AV	7.33054G	41.33	54.00	-12.67	28.65	3	Vertical	0	2.66	69	37.04	9.71	34.07			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

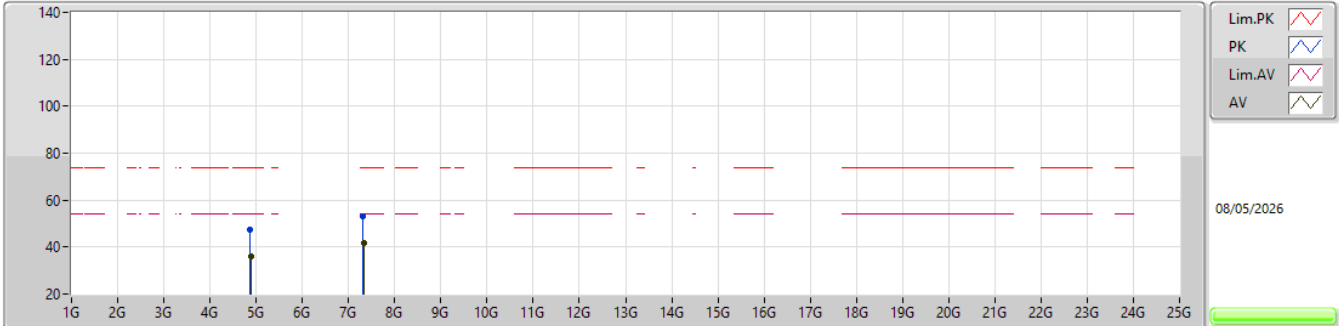


EUT_Y_2TX
SET 69
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86937G	47.49	74.00	-26.51	41.70	3	Horizontal	329	1.80	69	32.78	8.18	35.17				
AV	4.88063G	35.82	54.00	-18.18	29.99	3	Horizontal	329	1.80	69	32.82	8.18	35.17				
PK	7.30145G	52.89	74.00	-21.11	40.21	3	Horizontal	115	1.80	69	37.10	9.68	34.10				
AV	7.3293G	41.54	54.00	-12.46	28.86	3	Horizontal	115	1.80	69	37.04	9.71	34.07				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

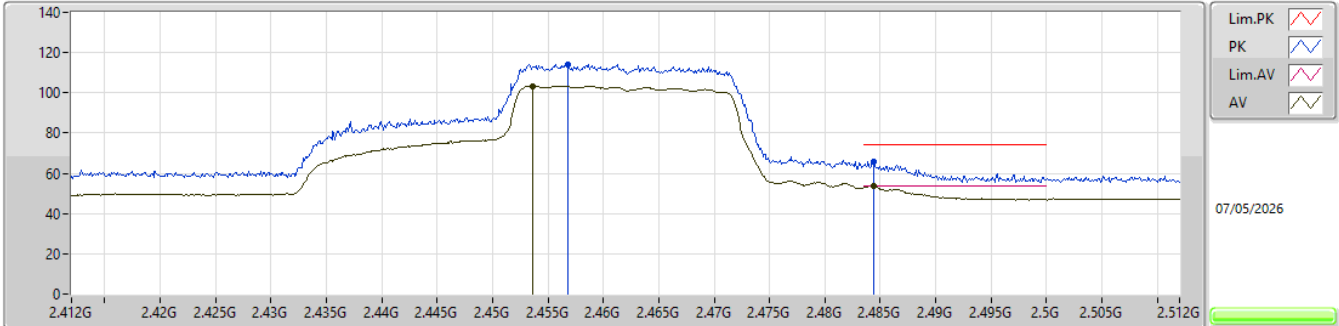


EUT_Y_2TX
SET 64
66\58\70\64
-1.84\4.25\ -21.39\0.09

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.4568G	113.96	Inf	-Inf	81.27	3	Vertical	332	1.80	64	27.60	5.09	-			
AV	2.4536G	103.25	Inf	-Inf	70.56	3	Vertical	332	1.80	64	27.60	5.09	-			
PK	2.4844G	65.86	74.00	-8.14	32.89	3	Vertical	332	1.80	64	27.84	5.13	-			
AV	2.4844G	53.91	54.00	-0.09	20.94	3	Vertical	332	1.80	64	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

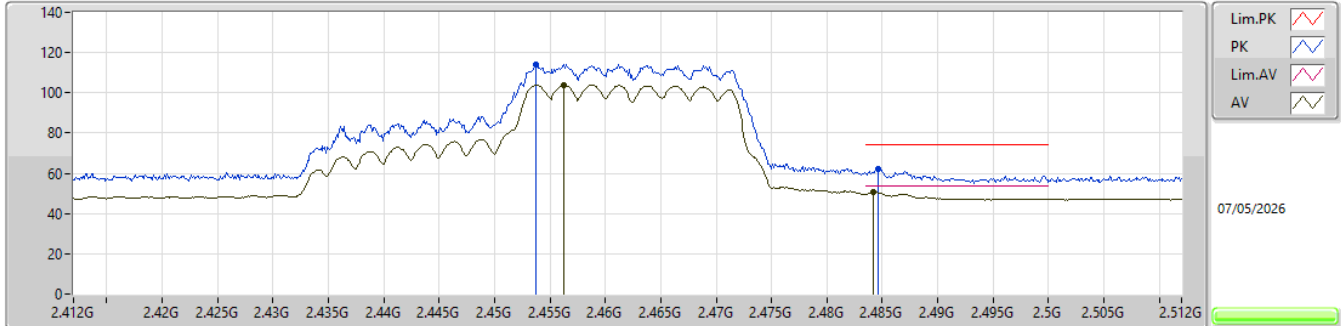


EUT Y_2TX
SET 64
64
3.46

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4537G	114.16	Inf	-Inf	81.47	3	Horizontal	16	1.99	64	27.60	5.09	-			
AV	2.4562G	103.88	Inf	-Inf	71.19	3	Horizontal	16	1.99	64	27.60	5.09	-			
PK	2.4846G	62.12	74.00	-11.88	29.14	3	Horizontal	16	1.99	64	27.85	5.13	-			
AV	2.4842G	50.54	54.00	-3.46	17.57	3	Horizontal	16	1.99	64	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

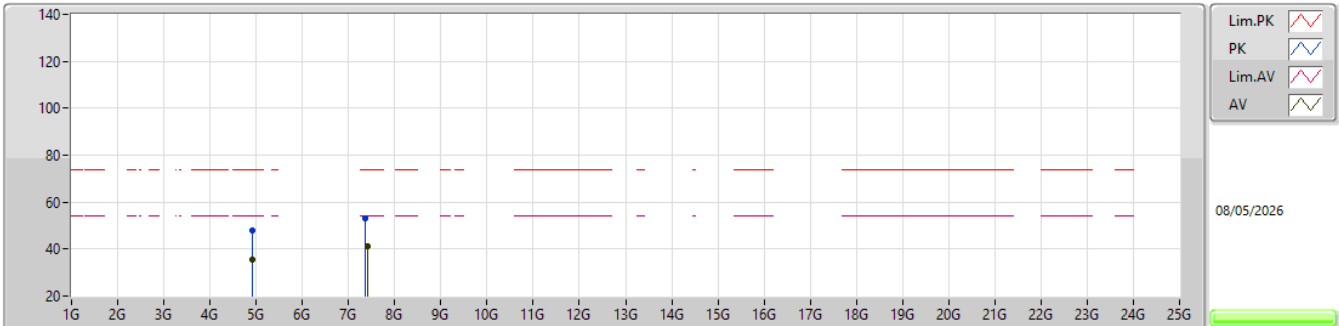


EUT Y_2TX
SET 64
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92312G	48.02	74.00	-25.98	42.07	3	Vertical	298	1.80	64	32.95	8.17	35.17				
AV	4.91541G	35.69	54.00	-18.31	29.76	3	Vertical	298	1.80	64	32.93	8.17	35.17				
PK	7.36982G	53.19	74.00	-20.81	40.63	3	Vertical	87	1.80	64	36.84	9.74	34.02				
AV	7.40438G	41.26	54.00	-12.74	28.88	3	Vertical	87	1.80	64	36.59	9.77	33.98				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

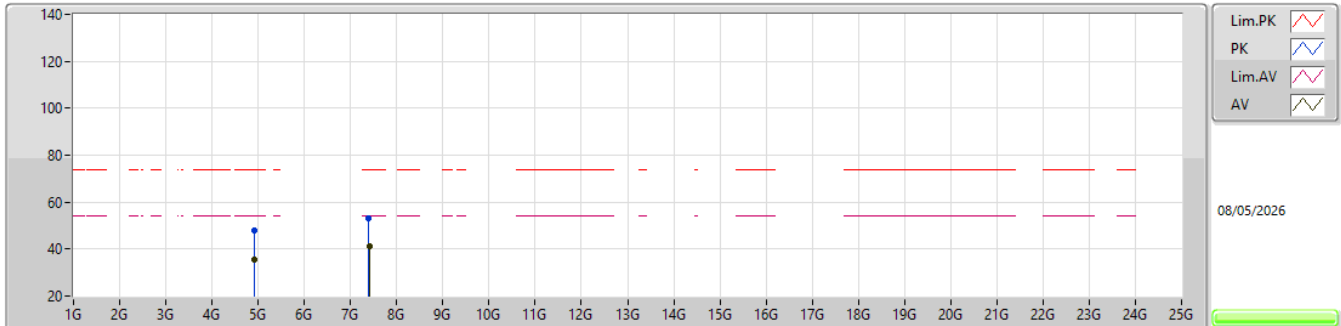


EUT_Y_2TX
SET 64
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91473G	47.93	74.00	-26.07	42.00	3	Horizontal	166.1	1.80	64	32.93	8.17	35.17				
AV	4.91321G	35.59	54.00	-18.41	29.66	3	Horizontal	166.1	1.80	64	32.93	8.17	35.17				
PK	7.38053G	53.11	74.00	-20.89	40.61	3	Horizontal	40	2.95	64	36.76	9.75	34.01				
AV	7.4049G	41.25	54.00	-12.75	28.87	3	Horizontal	40	2.95	64	36.59	9.77	33.98				

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2412MHz_TX

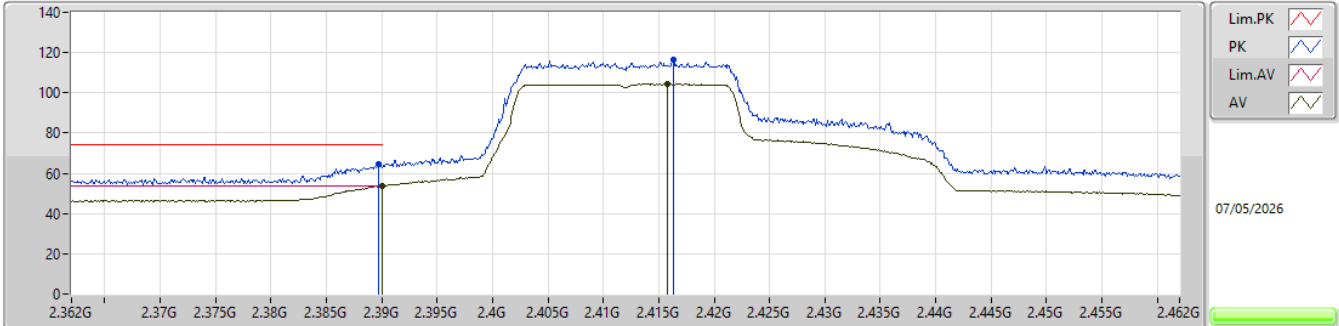


EUT_V_2TX
SET 66
80\40\66
-25.90\6.51\0.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3897G	64.57	74.00	-9.43	32.27	3	Vertical	331	1.80	66	27.30	5.00	-			
AV	2.39G	53.94	54.00	-0.06	21.64	3	Vertical	331	1.80	66	27.30	5.00	-			
PK	2.4163G	116.36	Inf	-Inf	83.83	3	Vertical	331	1.80	66	27.50	5.03	-			
AV	2.4158G	104.35	Inf	-Inf	71.82	3	Vertical	331	1.80	66	27.50	5.03	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2412MHz_TX

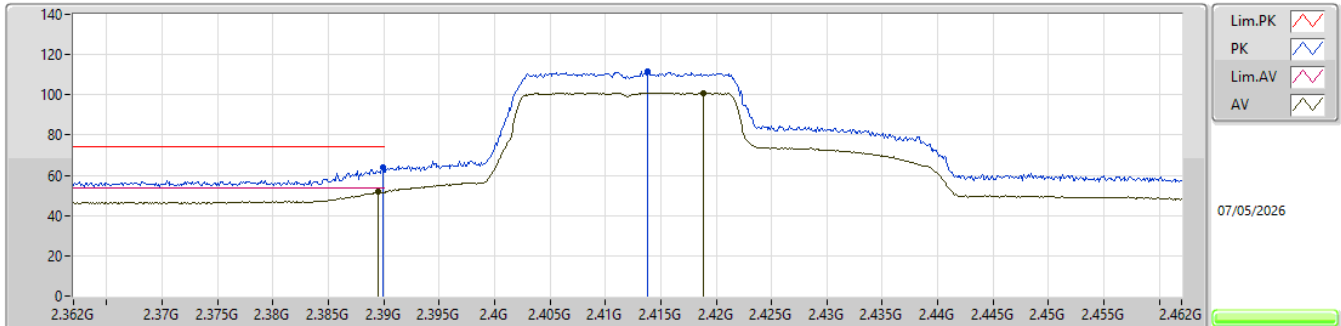


EUT_Y_2TX
SET 66
66
2.02

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3899G	63.88	74.00	-10.12	31.58	3	Horizontal	17	1.80	66	27.30	5.00	-			
AV	2.3895G	51.98	54.00	-2.02	19.69	3	Horizontal	17	1.80	66	27.29	5.00	-			
PK	2.4138G	111.62	Inf	-Inf	79.09	3	Horizontal	17	1.80	66	27.50	5.03	-			
AV	2.4189G	101.05	Inf	-Inf	68.51	3	Horizontal	17	1.80	66	27.50	5.04	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2412MHz_TX

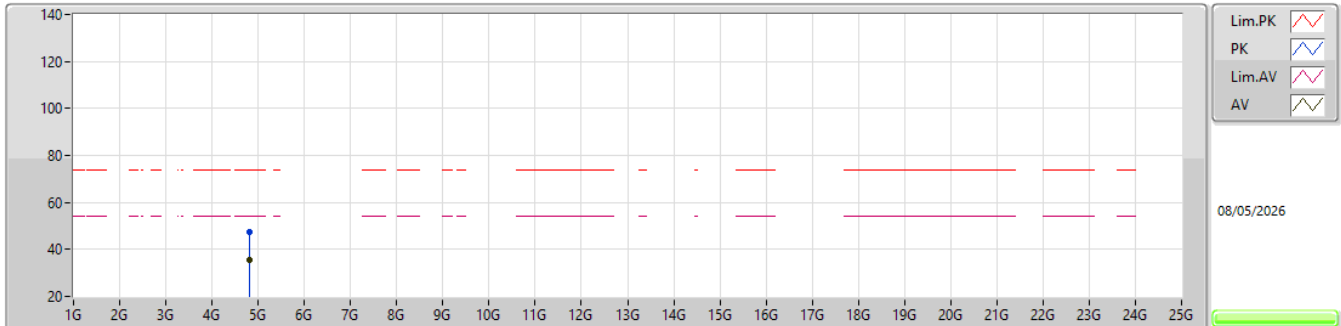


EUT_V_2TX
SET 66
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.80802G	47.18	74.00	-26.82	41.82	3	Vertical	228	2.31	66	32.36	8.18	35.18			
AV	4.80454G	35.51	54.00	-18.49	30.17	3	Vertical	228	2.31	66	32.34	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2412MHz_TX

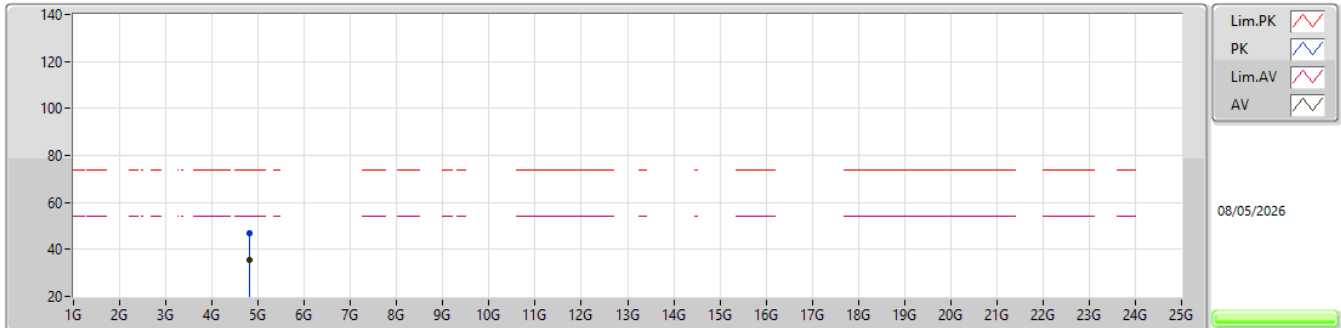


EUT_V_2TX
SET 66
03-W---

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8095G	46.72	74.00	-27.28	41.34	3	Horizontal	28	1.25	66	32.38	8.18	35.18			
AV	4.80706G	35.41	54.00	-18.59	30.05	3	Horizontal	28	1.25	66	32.36	8.18	35.18			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2417MHz_TX

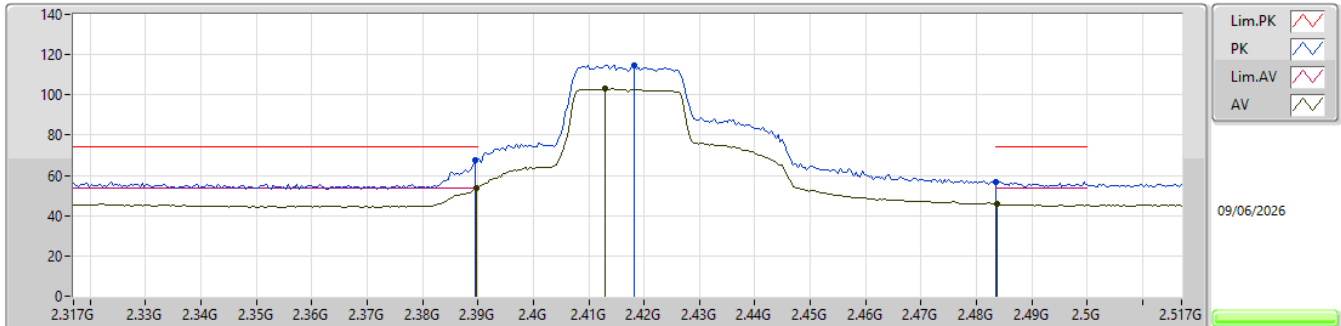


EUT_Y_2TX
Setting 69
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	67.52	74.00	-6.48	35.39	3	Vertical	336	2.10	-	27.60	4.53	-			
AV	2.3898G	53.59	54.00	-0.41	21.46	3	Vertical	336	2.10	-	27.60	4.53	-			
PK	2.4182G	114.86	Inf	-Inf	82.79	3	Vertical	336	2.10	-	27.50	4.57	-			
AV	2.413G	103.06	Inf	-Inf	71.00	3	Vertical	336	2.10	-	27.50	4.56	-			
PK	2.4835G	56.91	74.00	-17.09	24.80	3	Vertical	336	2.10	-	27.44	4.67	-			
AV	2.4838G	45.73	54.00	-8.27	13.62	3	Vertical	336	2.10	-	27.44	4.67	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2417MHz_TX

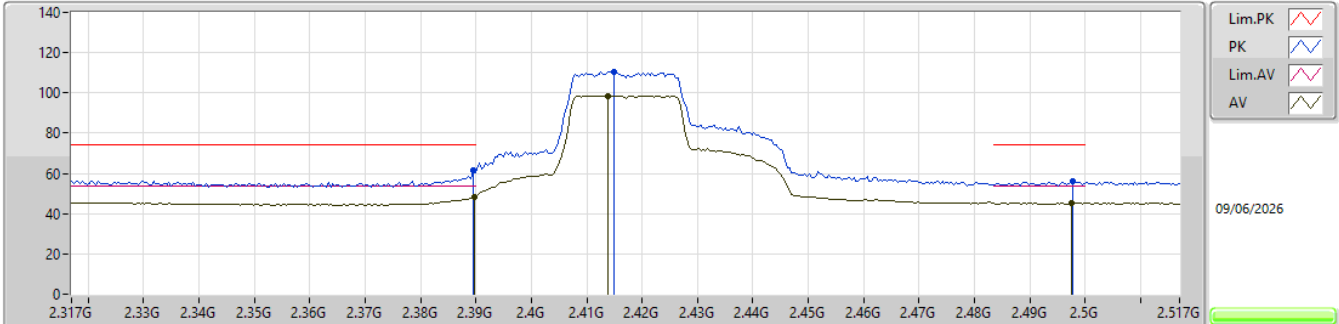


EUT_Y_2TX
Setting 69
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	61.30	74.00	-12.70	29.17	3	Horizontal	307	2.21	-	27.60	4.53	-			
AV	2.3898G	48.38	54.00	-5.62	16.25	3	Horizontal	307	2.21	-	27.60	4.53	-			
PK	2.415G	110.39	Inf	-Inf	78.33	3	Horizontal	307	2.21	-	27.50	4.56	-			
AV	2.4138G	98.63	Inf	-Inf	66.57	3	Horizontal	307	2.21	-	27.50	4.56	-			
PK	2.4978G	55.88	74.00	-18.12	23.69	3	Horizontal	307	2.21	-	27.50	4.69	-			
AV	2.4974G	45.33	54.00	-8.67	13.14	3	Horizontal	307	2.21	-	27.50	4.69	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2437MHz_TX

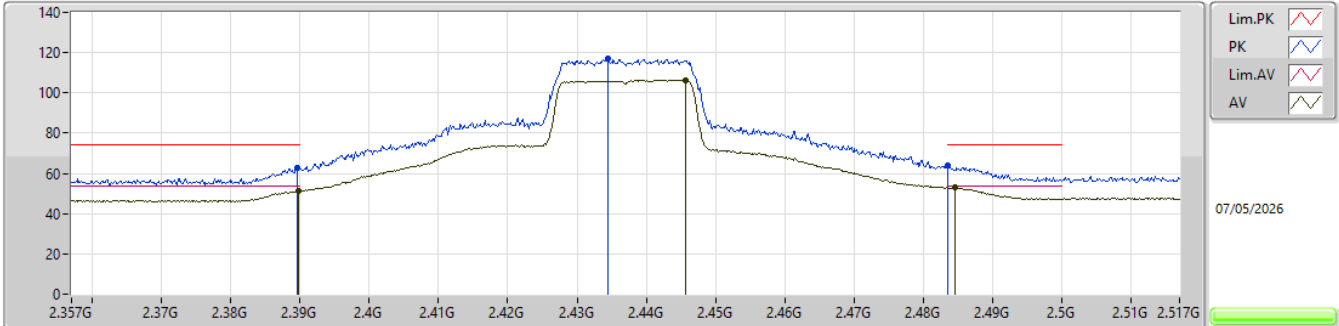


EUT_Y_2TX
SET 70
66\80\62\71\67\69\70
3.72\10.14\5.28\2.43\3.82\1.99\1.18

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38964G	62.52	74.00	-11.48	30.22	3	Vertical	333	1.99	70	27.30	5.00	-			
AV	2.3898G	51.56	54.00	-2.44	19.26	3	Vertical	333	1.99	70	27.30	5.00	-			
PK	2.43444G	116.82	Inf	-Inf	84.20	3	Vertical	333	1.99	70	27.56	5.06	-			
AV	2.44564G	106.19	Inf	-Inf	73.56	3	Vertical	333	1.99	70	27.56	5.07	-			
PK	2.4835G	64.19	74.00	-9.81	31.22	3	Vertical	333	1.99	70	27.84	5.13	-			
AV	2.48452G	52.82	54.00	-1.18	19.84	3	Vertical	333	1.99	70	27.85	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2437MHz_TX

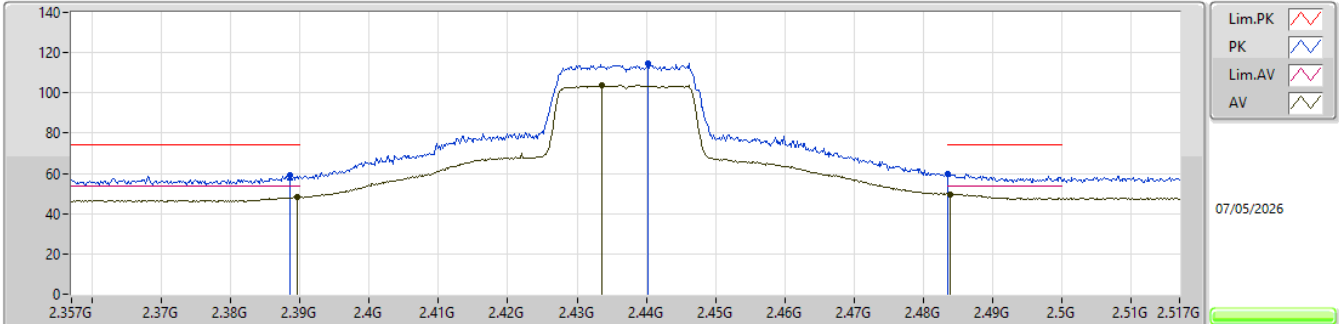


EUT Y_2TX
SET 70
70
4.46

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38852G	59.19	74.00	-14.81	26.90	3	Horizontal	12	1.80	70	27.29	5.00	-			
AV	2.38964G	48.39	54.00	-5.61	16.09	3	Horizontal	12	1.80	70	27.30	5.00	-			
PK	2.4402G	114.68	Inf	-Inf	82.11	3	Horizontal	12	1.80	70	27.50	5.07	-			
AV	2.43364G	103.73	Inf	-Inf	71.11	3	Horizontal	12	1.80	70	27.56	5.06	-			
PK	2.4835G	59.83	74.00	-14.17	26.86	3	Horizontal	12	1.80	70	27.84	5.13	-			
AV	2.48388G	49.54	54.00	-4.46	16.57	3	Horizontal	12	1.80	70	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2437MHz_TX

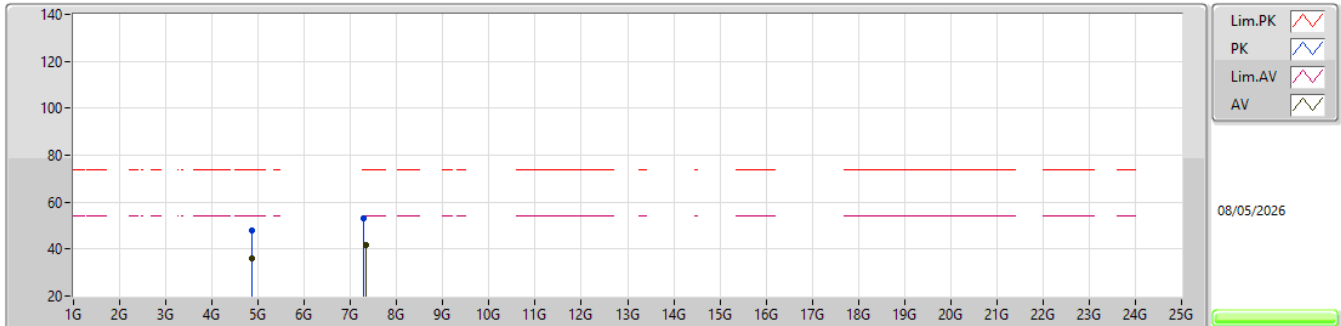


EUT Y_2TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87556G	47.83	74.00	-26.17	42.02	3	Vertical	0	1.80	70	32.80	8.18	35.17				
AV	4.86177G	36.07	54.00	-17.93	30.31	3	Vertical	0	1.80	70	32.75	8.18	35.17				
PK	7.29382G	53.14	74.00	-20.86	40.49	3	Vertical	178	1.80	70	37.09	9.67	34.11				
AV	7.33042G	41.79	54.00	-12.21	29.11	3	Vertical	178	1.80	70	37.04	9.71	34.07				

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2437MHz_TX

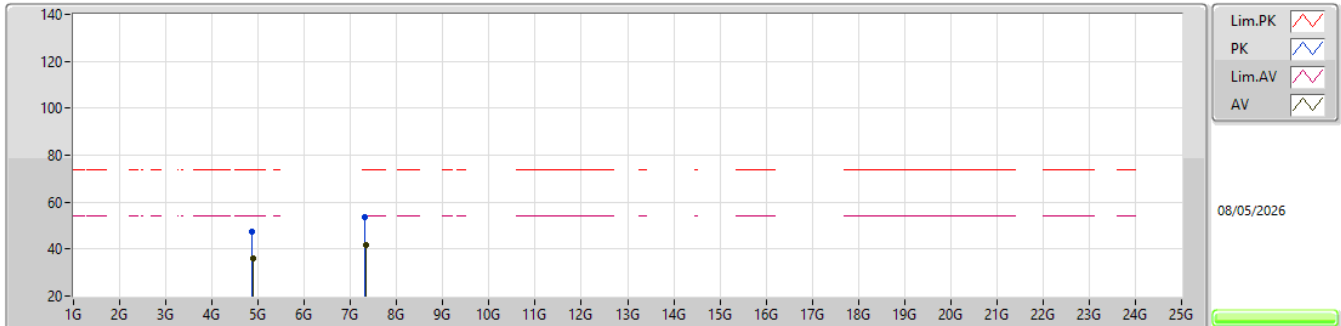


EUT Y_2TX
SET 70
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86497G	47.59	74.00	-26.41	41.82	3	Horizontal	0	1.80	70	32.76	8.18	35.17				
AV	4.88207G	36.10	54.00	-17.90	30.26	3	Horizontal	0	1.80	70	32.83	8.18	35.17				
PK	7.31308G	53.44	74.00	-20.56	40.77	3	Horizontal	45	2.14	70	37.07	9.69	34.09				
AV	7.32475G	41.75	54.00	-12.25	29.07	3	Horizontal	45	2.14	70	37.05	9.70	34.07				

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2457MHz_TX

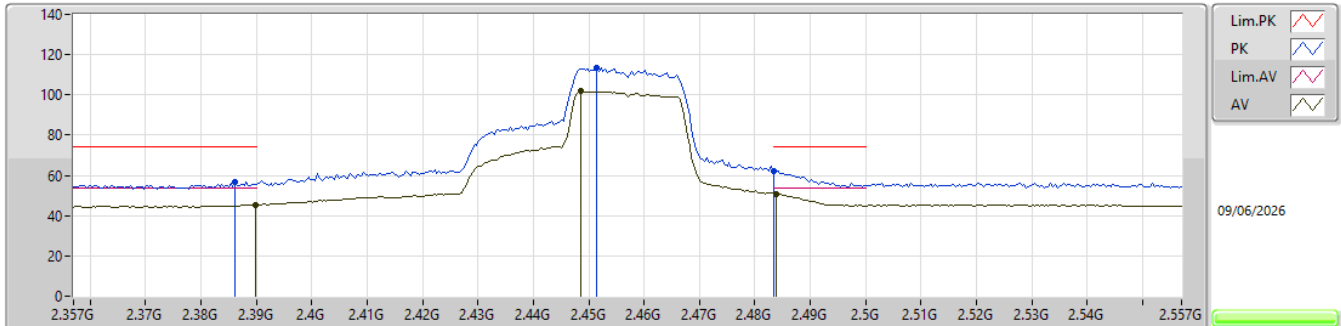


EUT_Y_2TX
Setting 67
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3862G	56.78	74.00	-17.22	24.65	3	Vertical	341	1.60	-	27.60	4.53	-				
AV	2.3898G	45.52	54.00	-8.48	13.39	3	Vertical	341	1.60	-	27.60	4.53	-				
PK	2.4514G	113.60	Inf	-Inf	81.58	3	Vertical	341	1.60	-	27.40	4.62	-				
AV	2.4486G	101.80	Inf	-Inf	69.79	3	Vertical	341	1.60	-	27.40	4.61	-				
PK	2.4835G	62.02	74.00	-11.98	29.91	3	Vertical	341	1.60	-	27.44	4.67	-				
AV	2.4838G	50.92	54.00	-3.08	18.81	3	Vertical	341	1.60	-	27.44	4.67	-				

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2457MHz_TX

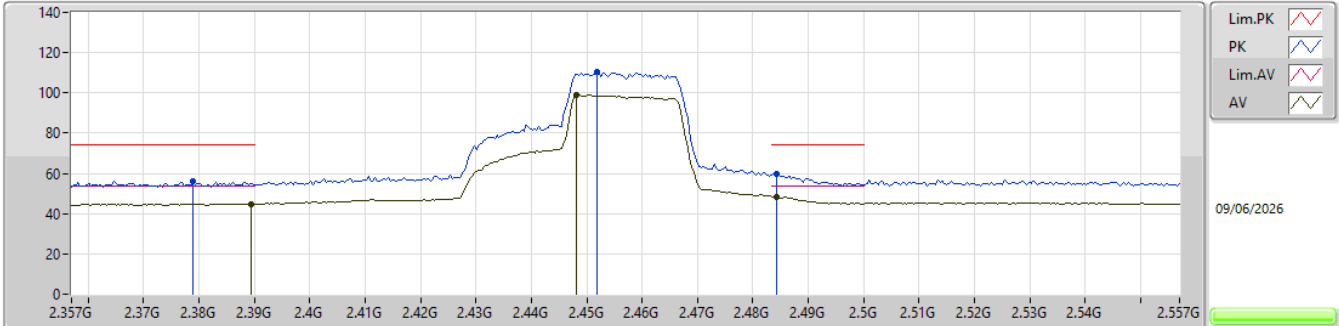


EUT_Y_2TX
Setting 67
06-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.379G	55.92	74.00	-18.08	23.79	3	Horizontal	306	2.27	-	27.60	4.53	-			
AV	2.3894G	44.90	54.00	-9.10	12.77	3	Horizontal	306	2.27	-	27.60	4.53	-			
PK	2.4518G	110.16	Inf	-Inf	78.14	3	Horizontal	306	2.27	-	27.40	4.62	-			
AV	2.4482G	98.99	Inf	-Inf	66.98	3	Horizontal	306	2.27	-	27.40	4.61	-			
PK	2.4842G	59.82	74.00	-14.18	27.71	3	Horizontal	306	2.27	-	27.44	4.67	-			
AV	2.4842G	48.55	54.00	-5.45	16.44	3	Horizontal	306	2.27	-	27.44	4.67	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2462MHz_TX

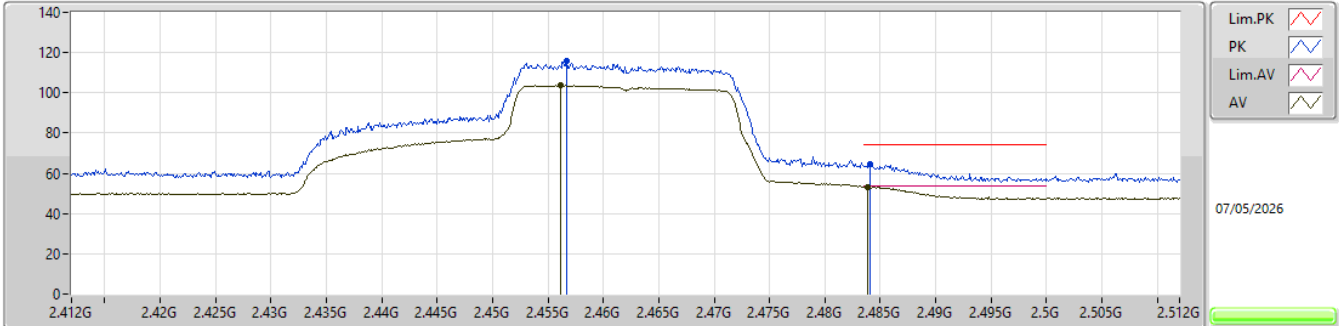


EUT_Y_2TX
SET 64
66\55\70\63\65\64
-2.70\4.55\ -19.64\1.65\ -1.50\0.63

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4567G	115.67	Inf	-Inf	82.98	3	Vertical	329	1.99	64	27.60	5.09	-			
AV	2.4561G	103.53	Inf	-Inf	70.84	3	Vertical	329	1.99	64	27.60	5.09	-			
PK	2.4841G	64.48	74.00	-9.52	31.51	3	Vertical	329	1.99	64	27.84	5.13	-			
AV	2.4838G	53.37	54.00	-0.63	20.40	3	Vertical	329	1.99	64	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2462MHz_TX

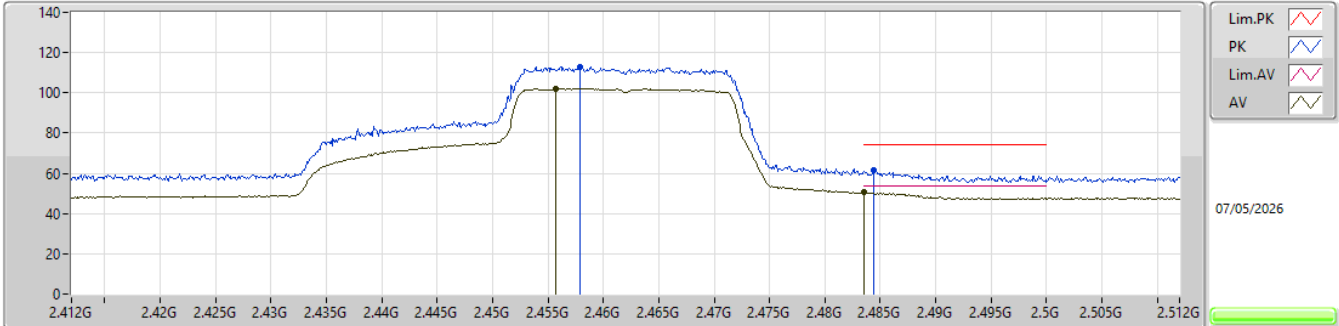


EUT Y_2TX
SET 64
64
3.51

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4579G	112.96	Inf	-Inf	80.27	3	Horizontal	17	1.99	64	27.60	5.09	-			
AV	2.4557G	102.26	Inf	-Inf	69.57	3	Horizontal	17	1.99	64	27.60	5.09	-			
PK	2.4844G	61.47	74.00	-12.53	28.50	3	Horizontal	17	1.99	64	27.84	5.13	-			
AV	2.4835G	50.49	54.00	-3.51	17.52	3	Horizontal	17	1.99	64	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2462MHz_TX

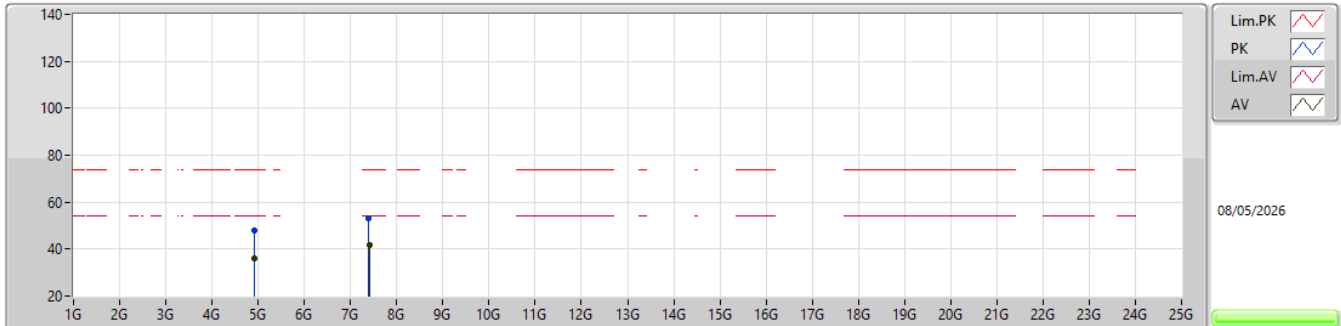


EUT Y_2TX
SET 64
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91853G	48.09	74.00	-25.91	42.15	3	Vertical	36	2.14	64	32.94	8.17	35.17				
AV	4.9208G	36.11	54.00	-17.89	30.17	3	Vertical	36	2.14	64	32.94	8.17	35.17				
PK	7.40019G	53.27	74.00	-20.73	40.89	3	Vertical	141	1.80	64	36.60	9.77	33.99				
AV	7.40478G	41.68	54.00	-12.32	29.30	3	Vertical	141	1.80	64	36.59	9.77	33.98				

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

2462MHz_TX

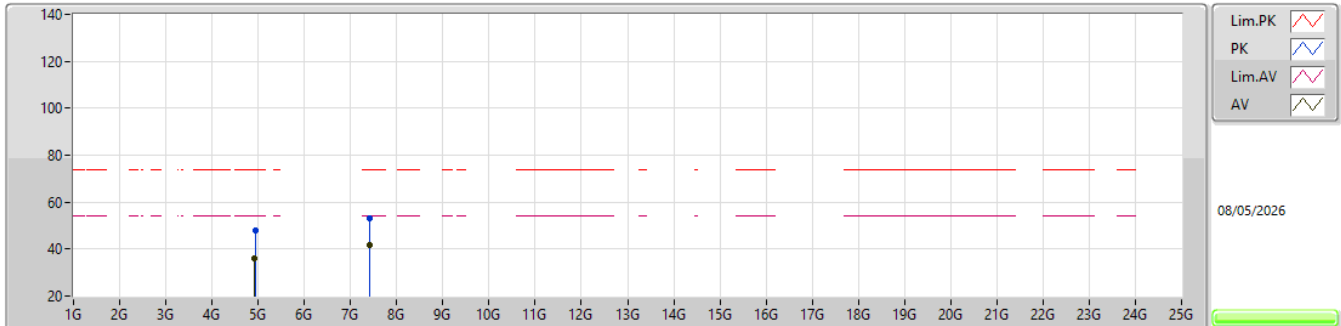

EUT Y_2TX
SET 64
03-W---

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.94138G	48.13	74.00	-25.87	42.15	3	Horizontal	0	1.08	64	32.98	8.17	35.17			
AV	4.91241G	36.08	54.00	-17.92	30.16	3	Horizontal	0	1.08	64	32.92	8.17	35.17			
PK	7.40414G	52.98	74.00	-21.02	40.60	3	Horizontal	2	1.09	64	36.59	9.77	33.98			
AV	7.40538G	41.63	54.00	-12.37	29.25	3	Horizontal	2	1.09	64	36.59	9.77	33.98			