



FCC RADIO TEST REPORT

FCC ID : QXO-AP410
Equipment : Wireless Access Point
Brand Name : Extreme Networks, Inc.
Model Name : AP410i, AP410e
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119, United States
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119, United States
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 20, 2019, and testing was started from Sep. 26, 2019 and completed on Nov. 05, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	11
2.3 EUT Operation during Test	14
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	16
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 DTS Bandwidth	21
3.3 Maximum Conducted Output Power	22
3.4 Power Spectral Density	25
3.5 Emissions in Non-restricted Frequency Bands	27
3.6 Emissions in Restricted Frequency Bands.....	28
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

For Internal antenna EUT:

Ant.	Brand	Model Number (P/N)	Antenna Type	Connector	Antenna Gain (dBi)			Remark
					WLAN 2.4GHz	WLAN 5GHz	BLE/Thread	
1	SENAO	5718A0474300	PIFA	IPEX	4.56	-	-	Radio 1
2	SENAO	5718A0475300	PIFA	IPEX	4.56	-	-	Radio 1
3	SENAO	5718A0476300	PIFA	IPEX	4.47	5.02	-	Radio 3
4	SENAO	5718A0477300	PIFA	IPEX	4.47	5.02	-	Radio 3
5	SENAO	5718A0478300	PIFA	IPEX	-	5.36	-	Radio 2
6	SENAO	5718A0479300	PIFA	IPEX	-	5.36	-	Radio 2
7	SENAO	5718A0480300	PIFA	IPEX	-	5.36	-	Radio 2
8	SENAO	5718A0481300	PIFA	IPEX	-	5.36	-	Radio 2
9	SENAO	5718A0482300	PIFA	IPEX	-	-	4.37	Radio 4

Note: The above information was declared by manufacturer.

For Radio 1 and Radio 3:

For IEEE 802.11a/b/g/n/ac/ax mode (1TX, 2TX/2RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For Radio 2:

For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Radio 4 (1TX/1RX):

Only Port 1 can be use as transmitting/receiving antenna.



For External antenna EUT:

Ant.	Brand	Model Number (P/N)	Antenna Type	Connector	Antenna Gain (dBi)		
					WLAN 2.4GHz	WLAN 5GHz	BLE/Thread
1	Extreme	ML-2452-APA2-01	Omni	RP SMA male	3.17	4.85	-
2	Extreme	ML-2452-APA2-02	Omni	RP SMA male	3.17	4.85	-
3	Extreme	ML-2452-HPA5-036	Omni	RP SMA male	3.9	5.7	-
4	Extreme	ML-2452-HPAG4A6-01	Omni	N male	4.0	7.3	-
5	Extreme	ML-2452-PNA5-01R	Panel	Type N-Male	4.5	5.0	-
6	Extreme	ML-2452-PTA4M4-036	Omni	Rev-Polarity SMA Male 4x	5.0	6.6	-
7	Extreme	ML-2452-HPAG5A8-01	Omni	N male	5.0	8.0	-
8	Extreme	WS-AO-DQ04360N	Omni	N male	5.5	6.0	-
9	Extreme	AI-DQ04360S	Omni	RP SMA male	5.5	6.0	-
10	Extreme	ML-2452-SEC6M4-036 / WS-AI-DQ05120	Panel	RP SMA male	6.92	7.23	-
11	Extreme	WS-AI-DE07025	Panel	RP SMA male	7.50	6.50	-
12	Extreme	ML-2452-PNA7-01R	Panel	Type N-Male	7.8	10.7	7.8
13	Extreme	WS-AI-DE10055	Panel	RP SMA male	10.5	7.5	-
14	Extreme	ML-2499-HPA8-01	Dipole	N male	-	-	8.0

Radio	EUT icon			
	Port 1	Port 2	Port 3	Port 4
1	2.4G/5G-1	2.4G/5G-2	-	-
2	2.4G/5G-1	2.4G/5G-2	5G-3	5G-4
3	2.4G/5G-5	2.4G/5G-6	-	-
4	BLE	-	-	-

Note: 1. The above information was declared by manufacturer.

2. Ant. 1~14 are the different antenna type in the antenna list. Only the highest gain antenna was selected from each different type of antenna to test and record in this report. for 2.4GHz is Ant.7, Ant.12 and Ant.13 and for 5GHz is Ant.7 and Ant.12 and for BTLE/Thread is Ant.12 and Ant.14 were selected to perform the test and recorded in this report.

For Radio 1 and Radio 3:**For IEEE 802.11a/b/g/n/ac/lax mode (1TX, 2TX/2RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

**For Radio 2:****For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Radio 4 (1TX/1RX):

Only Port 1 can be use as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.64	1.94	400u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter or PoE			
Function	☒	Point-to-multipoint	☐	Point-to-point
Test Software Version	Telnet			
Support Mode	☒	LE 1M PHY: 1 Mb/s		
	☐	LE Coded PHY (S=2): 500 Kb/s		
	☐	LE Coded PHY (S=8): 125 Kb/s		
	☐	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	EUT	Description
AP410i	EUT 1	The "i" in AP410i indicates that it comes with internal antennas and the "e" in AP410e indicates that the access point comes with external antenna connectors.
AP410e	EUT 2	



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	TEL : 886-3-327-3456	FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Owen Hsu	24.4~25.2°C / 61~62%	Sep. 26, 2019 ~ Oct. 30, 2019
Radiated<1GHz	03CH05-CB	Bruce Yang	23.4~24°C / 59~62%	Sep. 23, 2019 ~ Oct. 25, 2019
Radiated>1GHz	03CH04-CB	Bruce Yang	24.2~24.9°C / 52~55%	Sep. 23, 2019 ~ Oct. 25, 2019
AC Conduction	CO01-CB	Wei Li	24.3~24.9°C / 55~60%	Nov. 05, 2019

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	2.4 dB	Confidence levels of 95%
Bandwidth Measurement	2%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	PowerSetting
BT-LE(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	EUT 1 (Radio 1 / WLAN 2.4GHz) + Adapter
2	EUT 1 (Radio 2 / WLAN 5GHz) + Adapter
3	EUT 1 (Radio 3 / WLAN 2.4GHz) + Adapter
4	EUT 1 (Radio 3 / WLAN 5GHz) + Adapter
5	EUT 1 (Radio 4 / BT LE) + Adapter
6	EUT 1 (Radio 4 / Thread) + Adapter
Mode 6 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7 will follow this same test mode.	
7	EUT 1 (Radio 4 / Thread) + PoE
8	EUT 2 (Radio 1 / WLAN 2.4GHz) + Ant.7 + Adapter
9	EUT 2 (Radio 1 / WLAN 2.4GHz) + Ant.12 + Adapter
10	EUT 2 (Radio 1 / WLAN 2.4GHz) + Ant.13 + Adapter
11	EUT 2 (Radio 2 / WLAN 5GHz) + Ant.7 + Adapter
12	EUT 2 (Radio 2 / WLAN 5GHz) + Ant.12 + Adapter
13	EUT 2 (Radio 3 / WLAN 2.4GHz) + Ant.7 + Adapter
14	EUT 2 (Radio 3 / WLAN 2.4GHz) + Ant.12 + Adapter
15	EUT 2 (Radio 3 / WLAN 2.4GHz) + Ant.13 + Adapter
16	EUT 2 (Radio 3 / WLAN 5GHz) + Ant.7 + Adapter
17	EUT 2 (Radio 3 / WLAN 5GHz) + Ant.12 + Adapter
18	EUT 2 (Radio 4 / BT LE) + Ant.14 + Adapter
19	EUT 2 (Radio 4 / BT LE) + Ant.12 + Adapter
20	EUT 2 (Radio 4 / Thread) + Ant.14 + Adapter
21	EUT 2 (Radio 4 / Thread) + Ant.12 + Adapter
Mode 20 has been evaluated to be the worst case among Mode 8~21, thus measurement for Mode 20 will follow this same test mode.	
22	EUT (Radio 4 / Thread) + Ant.14 + PoE
For operating mode 22 is the worst case and it was record in this test report.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	EUT 1
2	EUT 2 + Ant. 12
3	EUT 2 + Ant. 14

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands Intentional above 1GHz test. And the worst case were found as below: For Internal antenna: For Radio 1 WLAN 2.4GHz: was found at Z axis For Radio 2 WLAN 5GHz: was found at Z axis For Radio 3 WLAN 2.4GHz: was found at Z axis For Radio 3 WLAN 5GHz: was found at Z axis For Radio 4 BT LE: was found at Y axis For Radio 4 Thread: was found at X axis For External antennas: For Ant. 7: For Radio 1 WLAN 2.4GHz: was found at X axis For Radio 2 WLAN 5GHz: was found at X axis For Radio 3 WLAN 2.4GHz: was found at Z axis For Radio 3 WLAN 5GHz: was found at Z axis For Ant. 12: For Radio 1 WLAN 2.4GHz: was found at X axis For Radio 2 WLAN 5GHz: was found at X axis For Radio 3 WLAN 2.4GHz: was found at Z axis For Radio 3 WLAN 5GHz: was found at Y axis For Radio 4 BT LE: was found at Z axis For Radio 4 Thread: was found at Z axis For Ant. 13: For Radio 1 WLAN 2.4GHz: was found at Z axis For Radio 3 WLAN 2.4GHz: was found at Z axis For Ant. 14: For Radio 4 BT LE: was found at X axis For Radio 4 Thread: was found at Z axis	
1	EUT 1 in Z axis (Radio 1 / WLAN 2.4GHz) + Adapter



2	EUT 1 in Z axis (Radio 2 / WLAN 5GHz) + Adapter
3	EUT 1 in Z axis (Radio 3 / WLAN 2.4GHz) + Adapter
4	EUT 1 in Z axis (Radio 3 / WLAN 5GHz) + Adapter
5	EUT 1 in Y axis (Radio 4 / BT LE) + Adapter
6	EUT 1 in X axis (Radio 4 / Thread) + Adapter
Mode 3 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7 will follow this same test mode.	
7	EUT 1 in Z axis (Radio 3 / WLAN 2.4GHz) + PoE
8	EUT 2 in X axis (Radio 1 / WLAN 2.4GHz) + Ant.7 + Adapter
9	EUT 2 in X axis (Radio 1 / WLAN 2.4GHz) + Ant.12 + Adapter
10	EUT 2 in Z axis (Radio 1 / WLAN 2.4GHz) + Ant.13 + Adapter
11	EUT 2 in X axis (Radio 2 / WLAN 5GHz) + Ant.7 + Adapter
12	EUT 2 in X axis (Radio 2 / WLAN 5GHz) + Ant.12 + Adapter
13	EUT 2 in Z axis (Radio 3 / WLAN 2.4GHz) + Ant.7 + Adapter
14	EUT 2 in Z axis (Radio 3 / WLAN 2.4GHz) + Ant.12 + Adapter
15	EUT 2 in Z axis (Radio 3 / WLAN 2.4GHz) + Ant.13 + Adapter
16	EUT 2 in Z axis (Radio 3 / WLAN 5GHz) + Ant.7 + Adapter
17	EUT 2 in Y axis (Radio 3 / WLAN 5GHz) + Ant.12 + Adapter
18	EUT 2 in X axis (Radio 4 / BT LE) + Ant.14 + Adapter
19	EUT 2 in Z axis (Radio 4 / BT LE) + Ant.12 + Adapter
20	EUT 2 in Z axis (Radio 4 / Thread) + Ant.14 + Adapter
21	EUT 2 in Z axis (Radio 4 / Thread) + Ant.12 + Adapter
Mode 13 has been evaluated to be the worst case among Mode 8~21, thus measurement for Mode 22 will follow this same test mode.	
22	EUT 2 in Z axis (Radio 3 / WLAN 2.4GHz) + Ant.7 + PoE
For operating mode 22 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands Intentional test. And the worst case were found as below: For Internal antenna: For Radio 4 BT LE: was found at Y axis For External antennas: For Ant. 12: For Radio 4 BT LE: was found at Z axis For Ant. 14: For Radio 4 BT LE: was found at X axis	
1	EUT 1 in Y axis
2	EUT 2 in Z axis + Ant. 12



3	EUT 2 in X axis + Ant. 14
---	---------------------------

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Radio 1 + Radio 2 + Radio 3 (2.4GHz) + Radio 4 (BT LE)
2	Radio 1 + Radio 2 + Radio 3 (5GHz) + Radio 4 (BT LE)
3	Radio 1 + Radio 2 + Radio 3 (2.4GHz) + Radio 4 (Thread)
4	Radio 1 + Radio 2 + Radio 3 (5GHz) + Radio 4 (Thread)
Refer to Sporton Test Report No.: FA970232 for Co-location RF Exposure Evaluation.	

Note: 1.The Adapter and PoE is for measurement only, would not be marketed.

Adapter and PoE information as below:

Power	Brand Holder	Model
Adapter	Powertron Electronics Corp.	PA1024-120IB200
Power	Brand	Model
PoE	EnGenius	EPA5006GP

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



2.4 Accessories

Wall-mounted rack

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	Flash disk3.0	Transcend	639205 7755	N/A
C	PoE	EnGenius	EPA85006GP	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
D	PoE	EnGenius	EPA5006GP	N/A


For Radiated (above 1GHz):


Support Equipment				
No.	Equipment	Brand	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

2.6 Test Setup Diagram

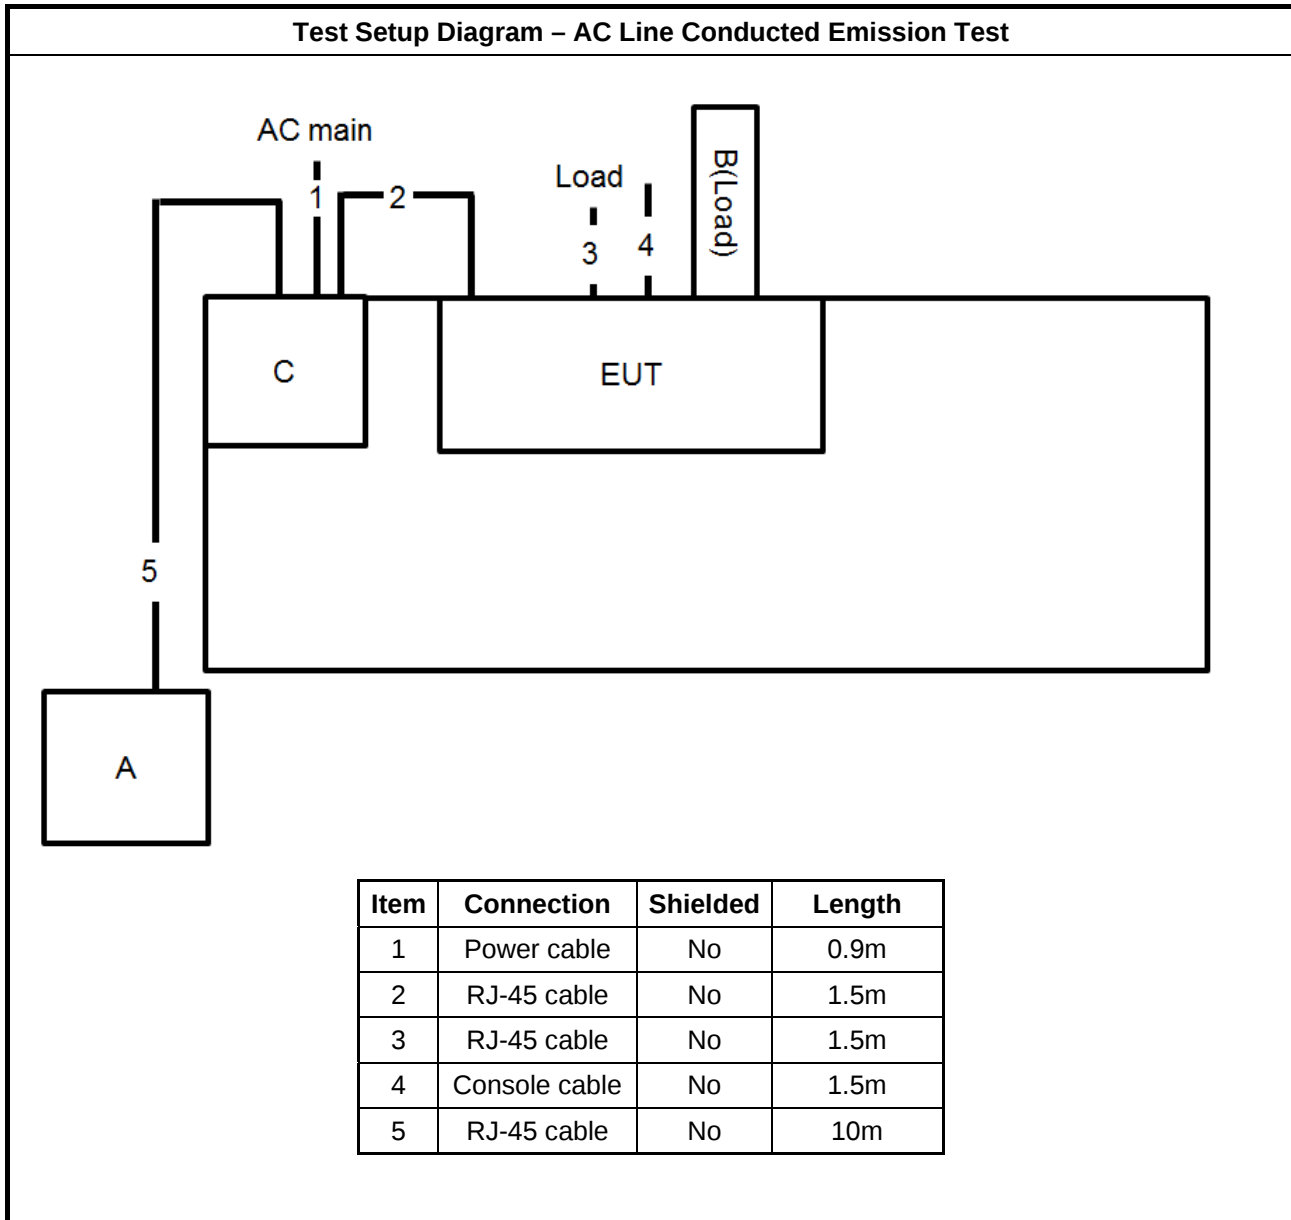

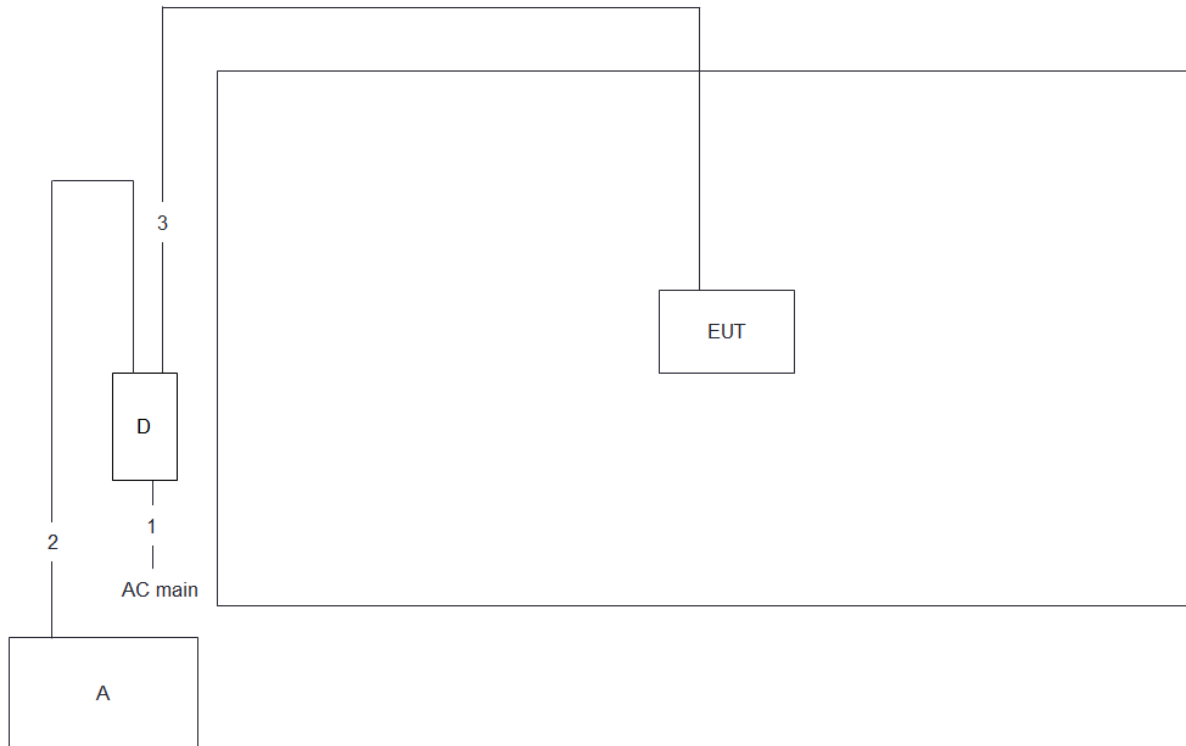Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	0.5m
2	RJ-45 cable	No	1m
3	RJ-45 cable	No	10m

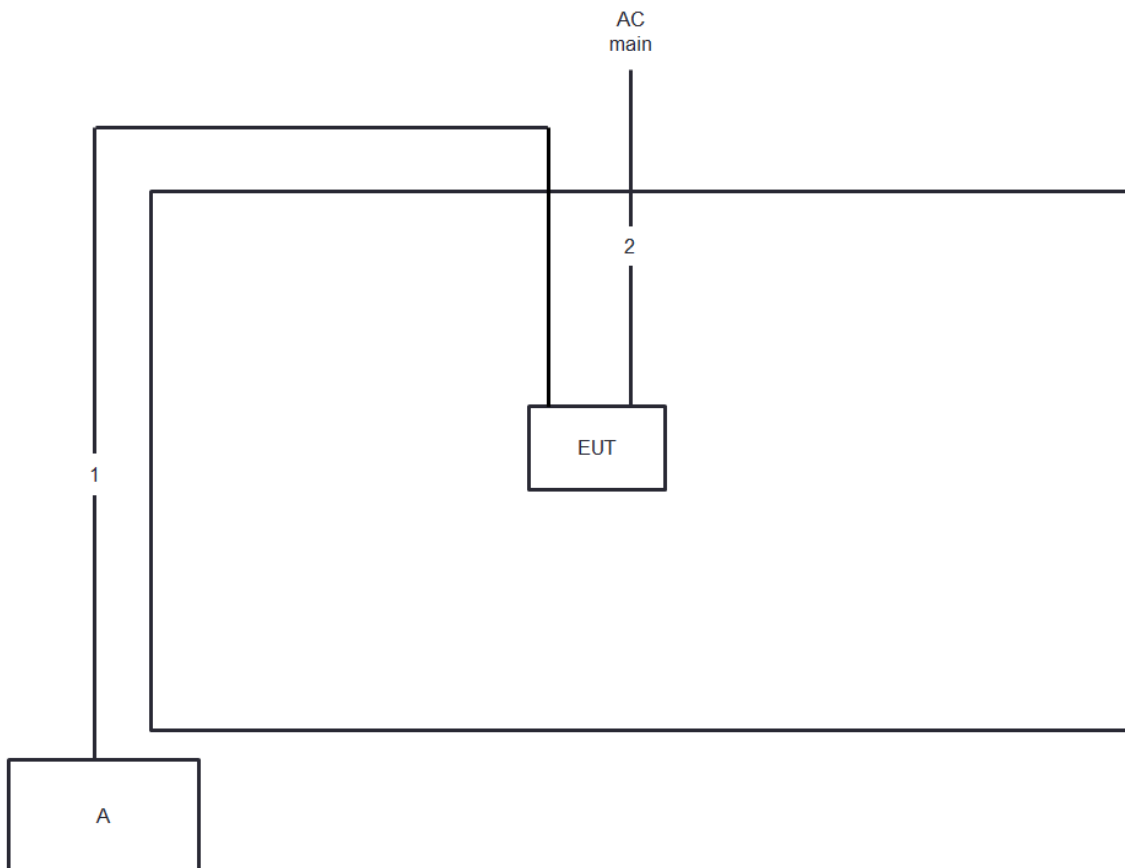Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

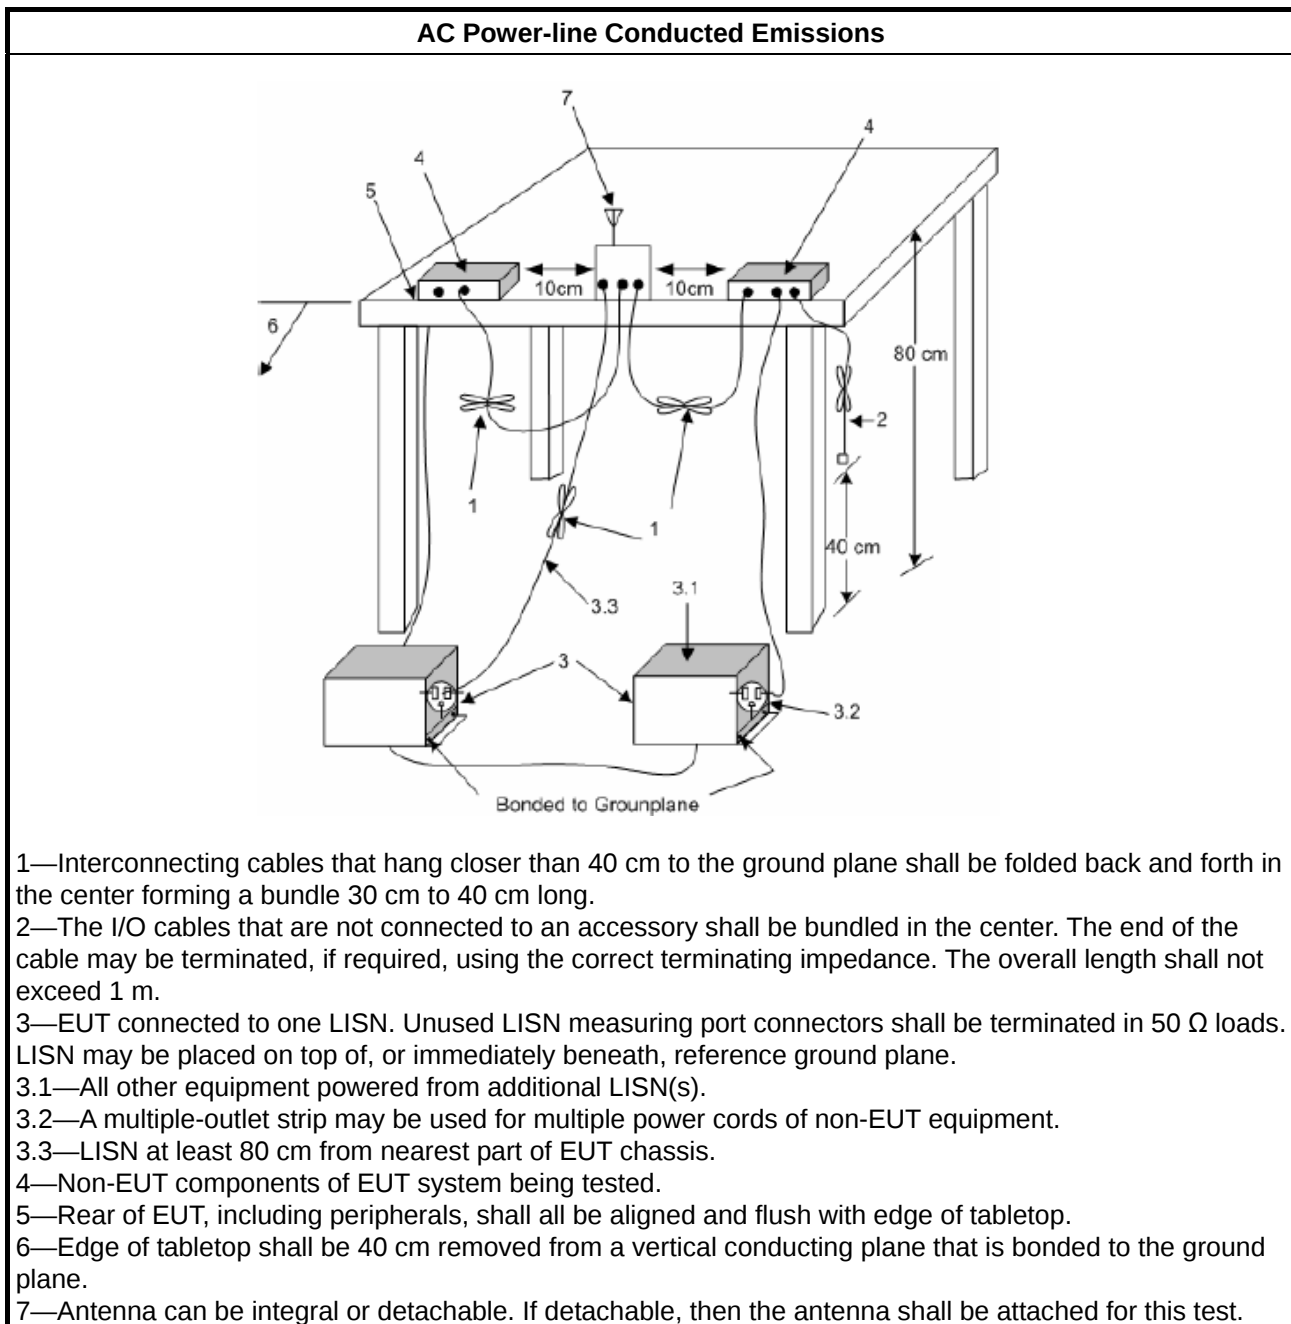

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

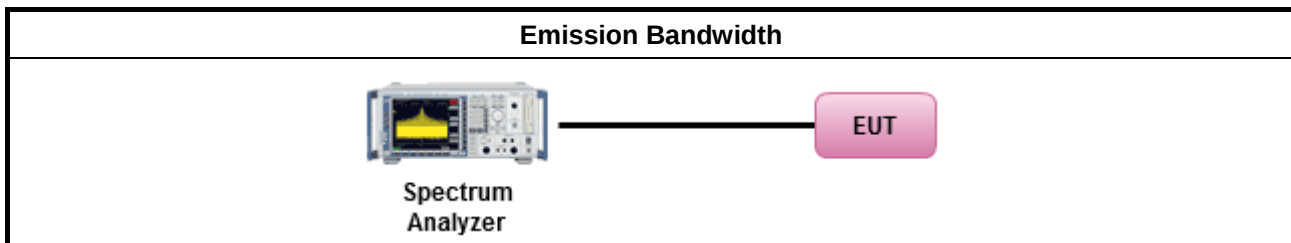

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

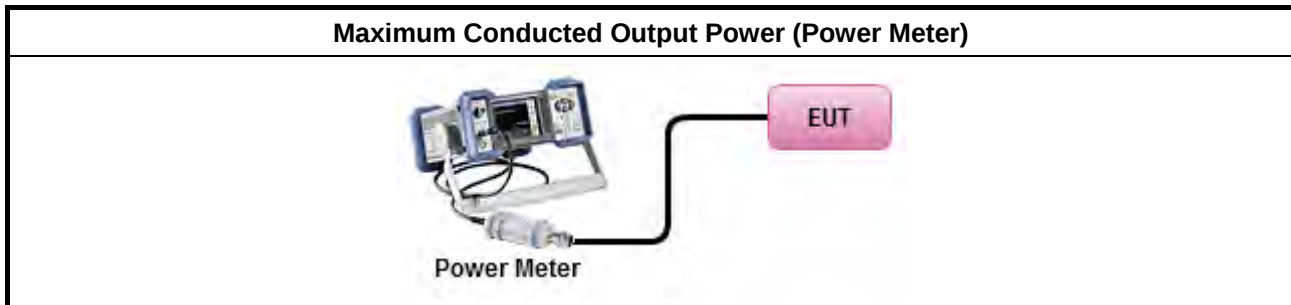

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD. [duty cycle $\geq 98\%$ or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPS-1.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPS-2.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPS-3.
duty cycle $< 98\%$ and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPS-1A. (alternative).
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPS-2A. (alternative)
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPS-3A. (alternative)
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,

- | | |
|--|--|
| | ☐ Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit. |
|--|--|

3.4.4 Test Setup

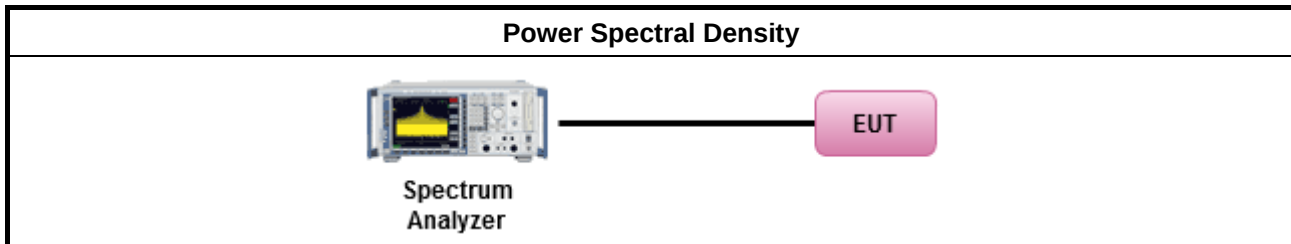

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

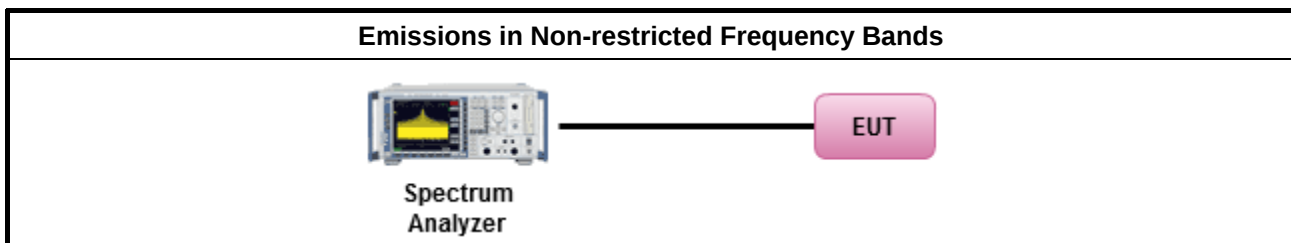

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

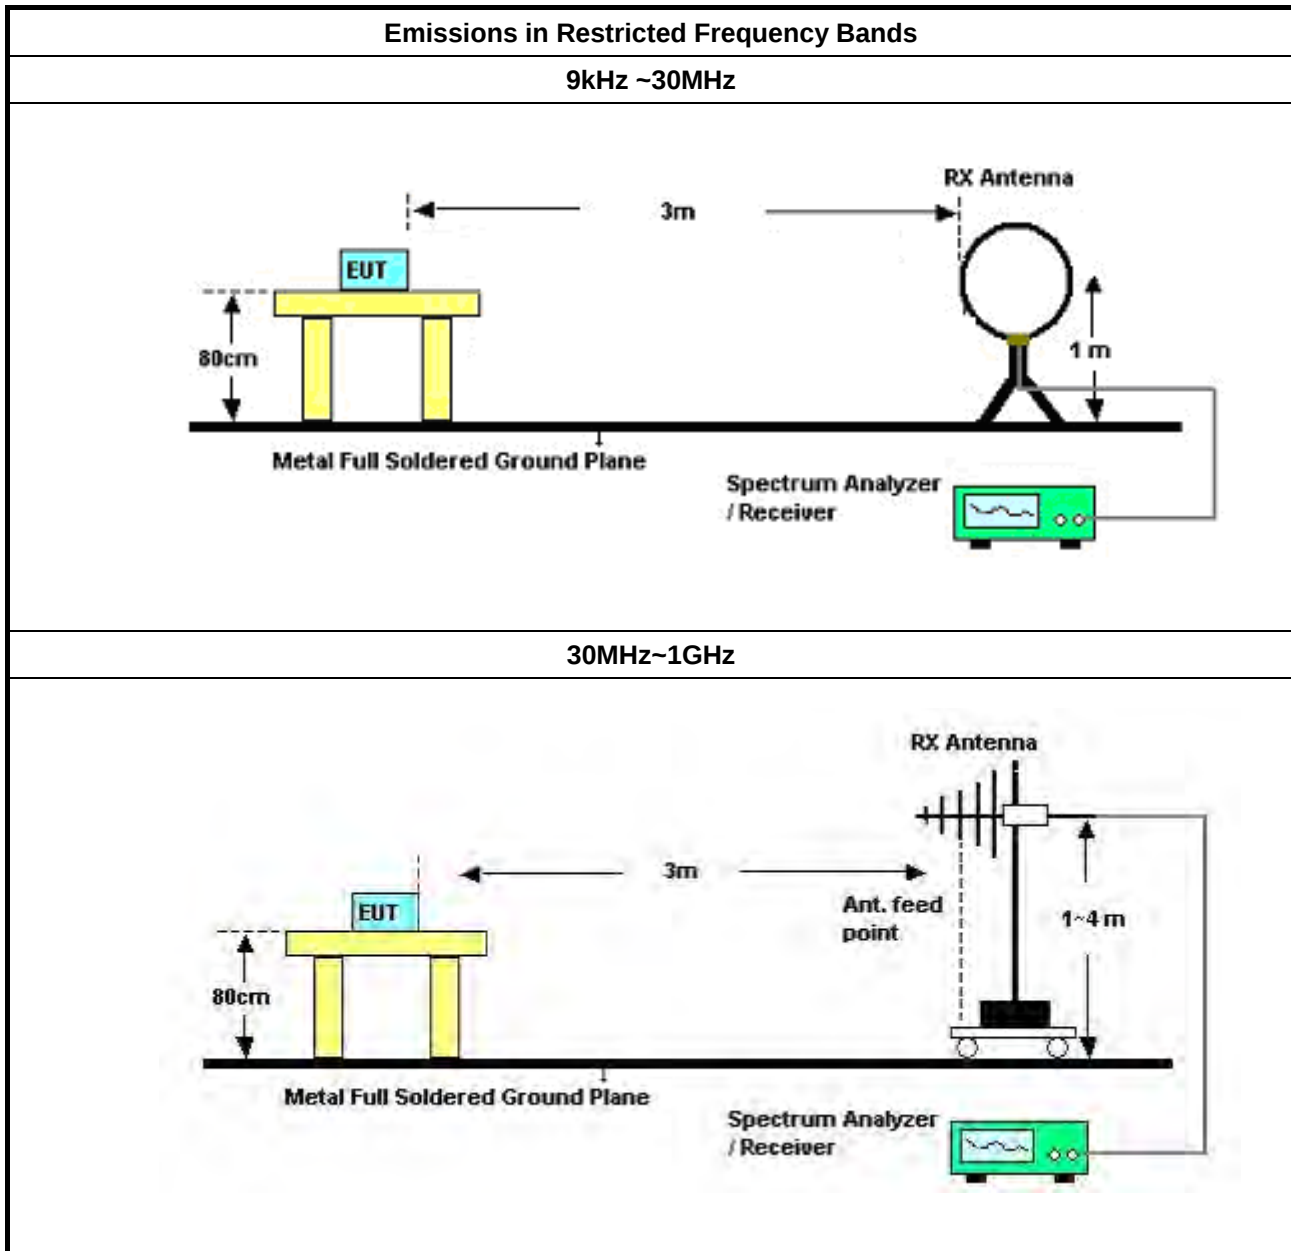

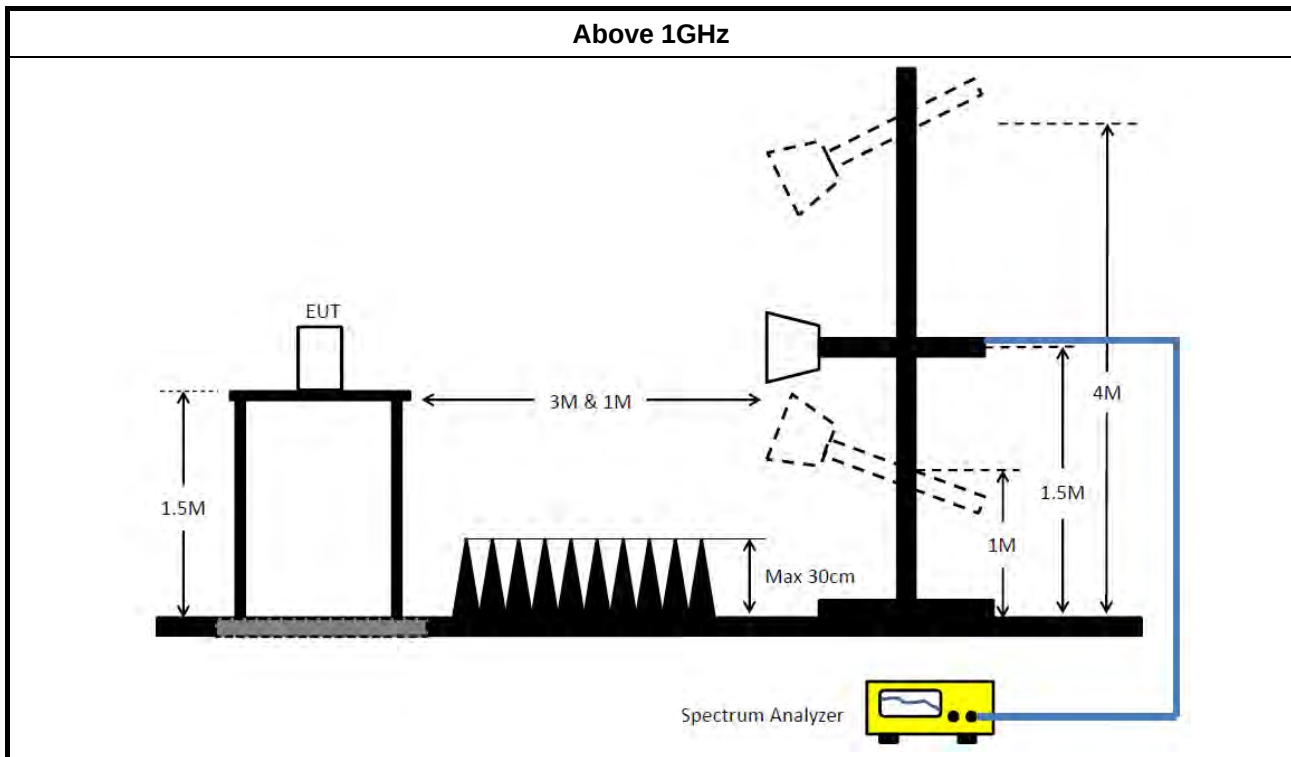

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 28, 2019	Jan. 29, 2020	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 24, 2018	Dec. 23, 2019	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Jan. 11, 2019	Jan. 10, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 21, 2019	May 20, 2020	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 29, 2019	Mar. 28, 2020	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESE & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 28, 2019	Mar. 27, 2020	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 01, 2019	Apr. 30, 2020	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Aug. 15, 2019	Aug. 14, 2020	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 15, 2019	May 14, 2020	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	LOW Cable-04+23	30MHz~1GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	LOW Cable-04+23	30MHz~1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
Horn Antenna	ETS • Lindgren	3115	00143147	750MHz~18GHz	Oct. 26, 2018	Oct. 25, 2019	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 12, 2019	Jun. 11, 2020	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Mar. 19, 2019	Mar. 18, 2020	Radiation (03CH04-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 26, 2018	Dec. 25, 2019	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+22	1GHz - 18GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+22	1GHz - 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH04-CB)




Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz-40GHz	Feb. 25, 2019	Feb. 24, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz ~26.5 GHz	Nov. 19, 2018	Nov. 18, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz ~26.5 GHz	Nov. 19, 2018	Nov. 18, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Jan. 15, 2019	Jan. 14, 2020	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Jan. 15, 2019	Jan. 14, 2020	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.


Test Mode	Mode 22	Frequency Range	0.15 MHz to 30 MHz
-----------	---------	-----------------	--------------------

Line

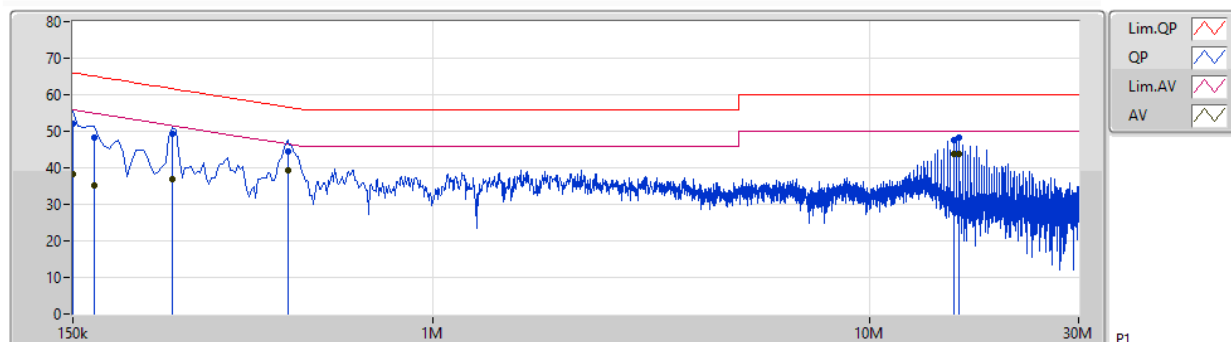

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	150k	52.01	66.00	-13.99	9.90	Line	-	42.11	0.05	0.06	9.79			
AV	150k	38.30	56.00	-17.70	9.90	Line	-	28.40	0.05	0.06	9.79			
QP	168k	48.42	65.06	-16.64	9.90	Line	-	38.52	0.05	0.06	9.79			
AV	168k	35.32	55.06	-19.74	9.90	Line	-	25.42	0.05	0.06	9.79			
QP	253.5k	49.45	61.64	-12.19	9.92	Line	-	39.53	0.06	0.06	9.80			
AV	253.5k	36.91	51.64	-14.73	9.92	Line	-	26.99	0.06	0.06	9.80			
QP	465k	44.37	56.61	-12.24	9.93	Line	-	34.44	0.06	0.06	9.81			
AV	465k	39.36	46.61	-7.25	9.93	Line	-	29.43	0.06	0.06	9.81			
QP	15.527M	47.51	60.00	-12.49	10.41	Line	-	37.10	0.26	0.22	9.93			
AV	15.527M	43.84	50.00	-6.16	10.41	Line	-	33.43	0.26	0.22	9.93			
QP	16.022M	48.34	60.00	-11.66	10.43	Line	-	37.91	0.26	0.23	9.94			
AV	16.022M	43.86	50.00	-6.14	10.43	Line	"Worst"	33.43	0.26	0.23	9.94			

Neutral

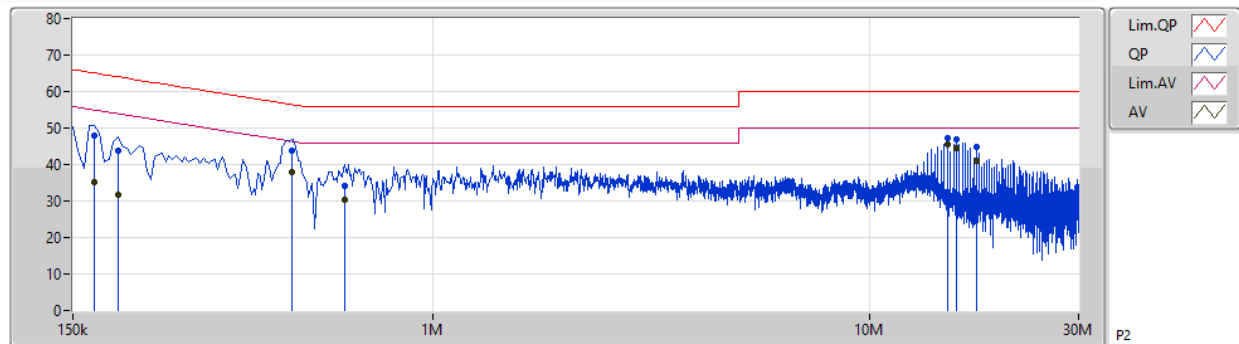

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	168k	47.94	65.06	-17.12	9.89	Neutral	-	38.05	0.04	0.06	9.79			
AV	168k	35.03	55.06	-20.03	9.89	Neutral	-	25.14	0.04	0.06	9.79			
QP	190.5k	43.75	64.01	-20.26	9.89	Neutral	-	33.86	0.04	0.06	9.79			
AV	190.5k	31.69	54.01	-22.32	9.89	Neutral	-	21.80	0.04	0.06	9.79			
QP	474k	43.67	56.44	-12.77	9.92	Neutral	-	33.75	0.04	0.07	9.81			
AV	474k	37.80	46.44	-8.64	9.92	Neutral	-	27.88	0.04	0.07	9.81			
QP	627k	34.27	56.00	-21.73	9.93	Neutral	-	24.34	0.05	0.07	9.81			
AV	627k	30.40	46.00	-15.60	9.93	Neutral	-	20.47	0.05	0.07	9.81			
QP	15.032M	47.34	60.00	-12.66	10.37	Neutral	-	36.97	0.23	0.22	9.92			
AV	15.032M	45.40	50.00	-4.60	10.37	Neutral	"Worst"	35.03	0.23	0.22	9.92			
QP	15.77M	47.04	60.00	-12.96	10.39	Neutral	-	36.65	0.23	0.23	9.93			
AV	15.77M	44.49	50.00	-5.51	10.39	Neutral	-	34.10	0.23	0.23	9.93			
QP	17.493M	44.91	60.00	-15.09	10.44	Neutral	-	34.47	0.24	0.24	9.96			
AV	17.493M	41.13	50.00	-8.87	10.44	Neutral	-	30.69	0.24	0.24	9.96			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	696.25k	1.033M	1M03F1D	690k	1.028M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	696.25k	1.033M
2440MHz	Pass	500k	693.75k	1.028M
2480MHz	Pass	500k	690k	1.029M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz
EBW

08/10/2019

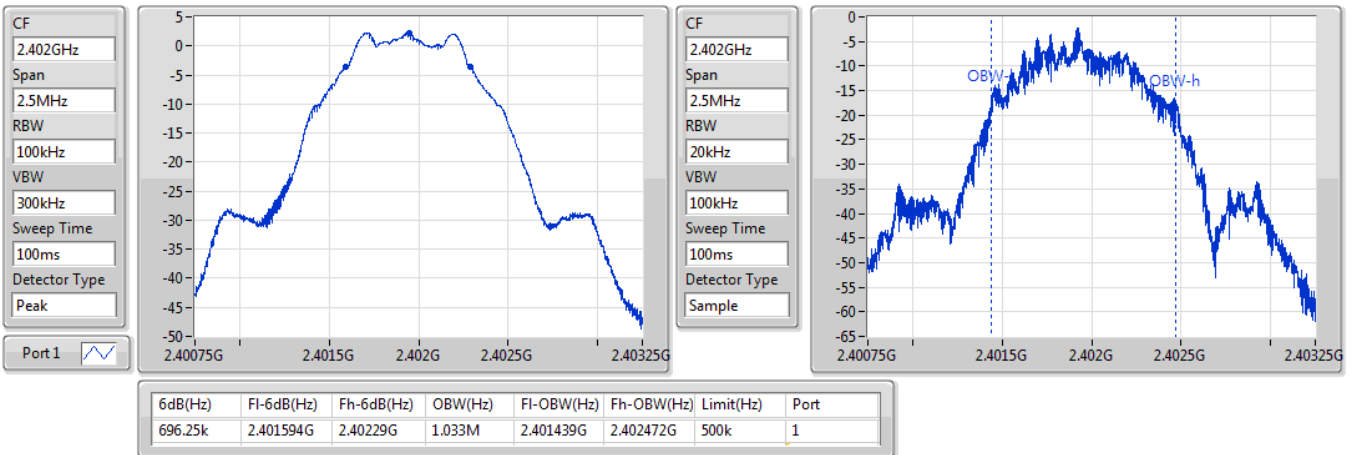
BT-LE(1Mbps)
2440MHz
EBW

08/10/2019

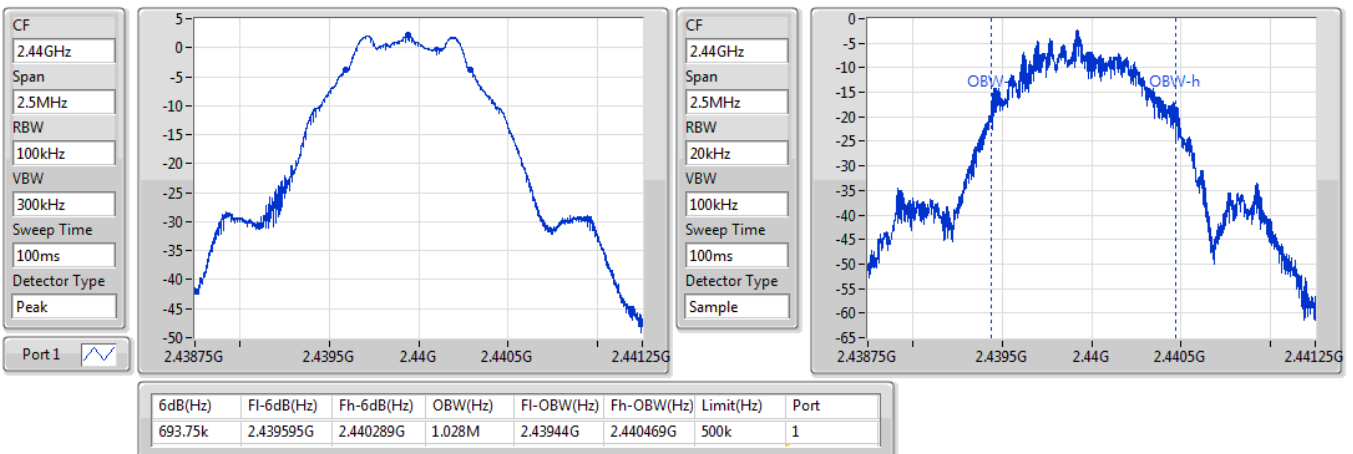


BT-LE(1Mbps)

2480MHz

EBW

08/10/2019

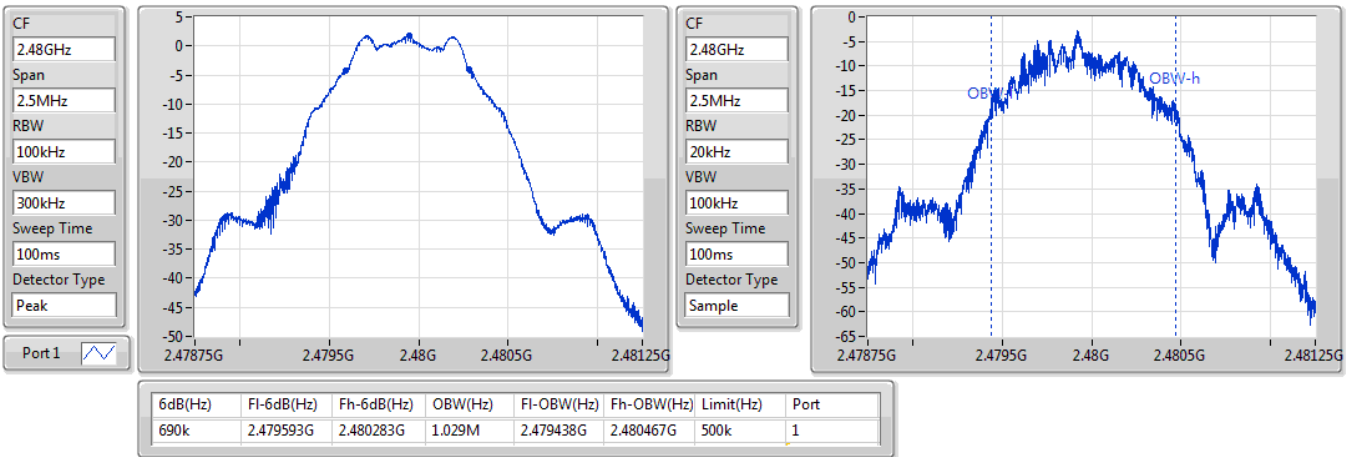

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	702.5k	1.034M	1M03F1D	700k	1.031M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	701.25k	1.033M
2440MHz	Pass	500k	702.5k	1.031M
2480MHz	Pass	500k	700k	1.034M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz
EBW

15/10/2019

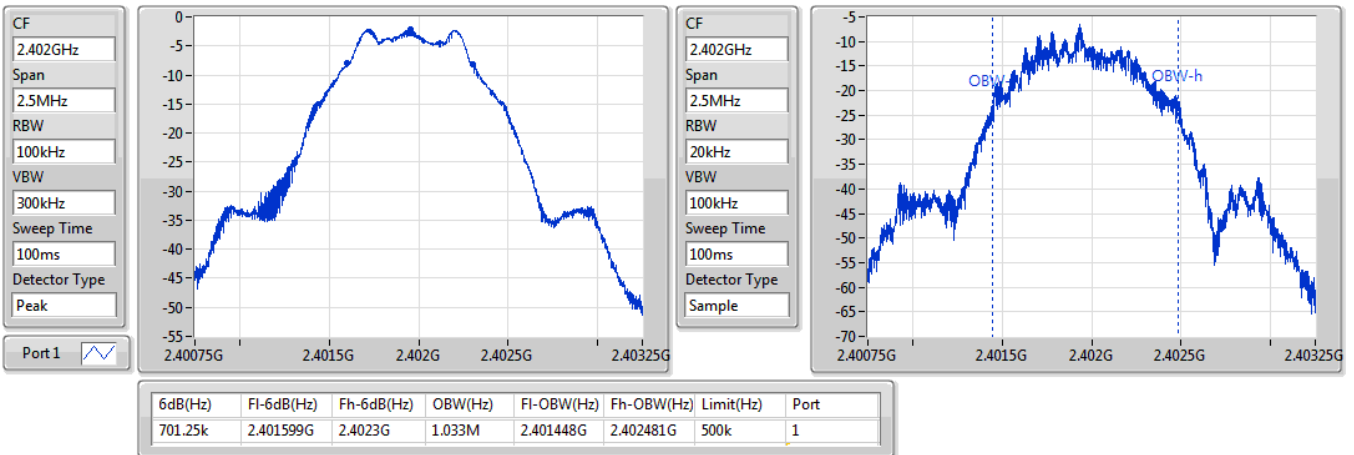
BT-LE(1Mbps)
2440MHz
EBW

15/10/2019

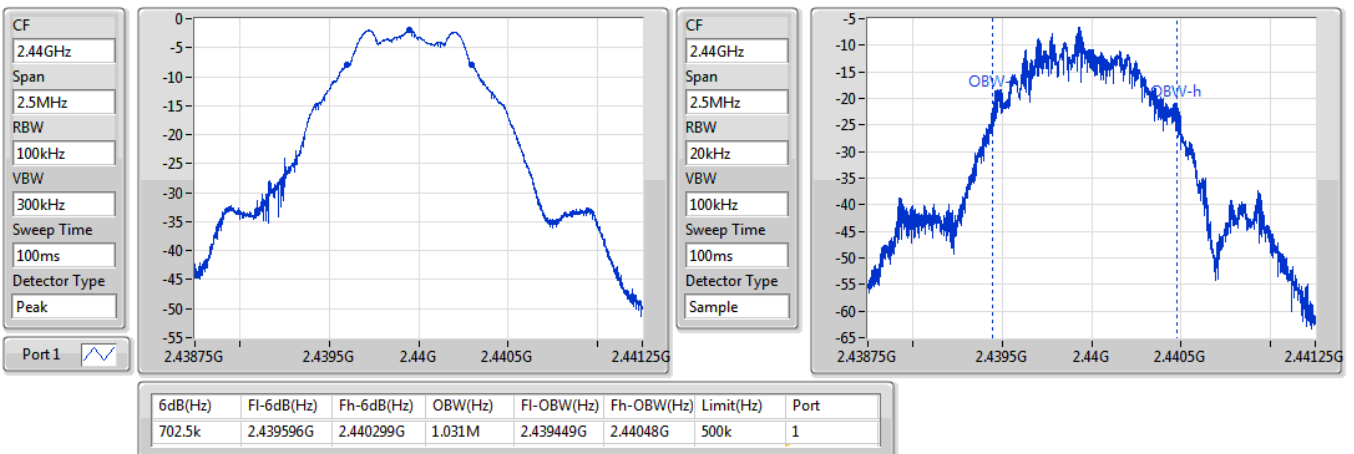


BT-LE(1Mbps)

2480MHz

EBW

15/10/2019

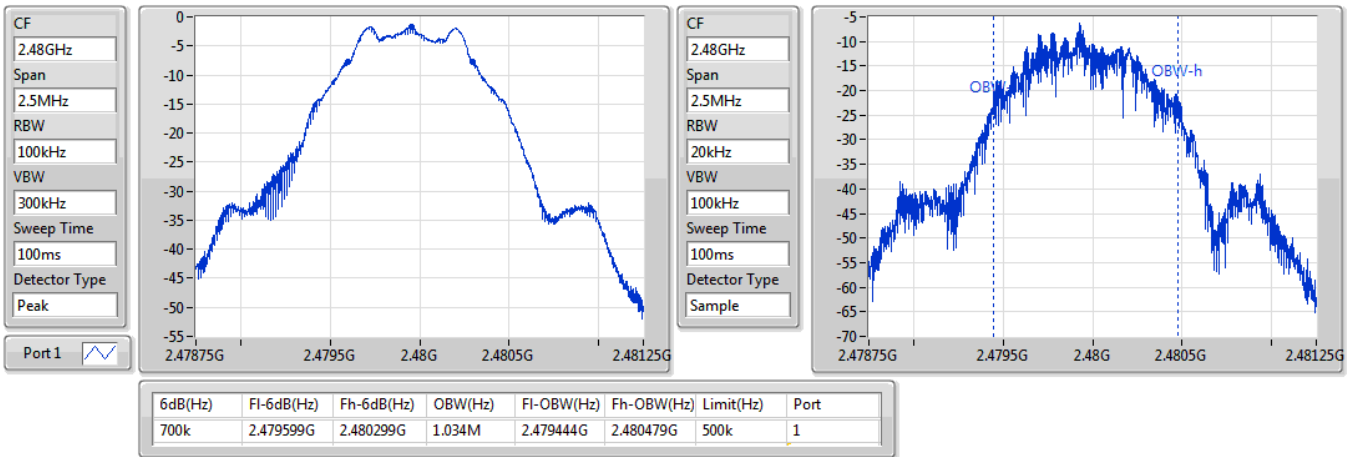

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	702.5k	1.034M	1M03F1D	700k	1.031M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	701.25k	1.033M
2440MHz	Pass	500k	702.5k	1.031M
2480MHz	Pass	500k	700k	1.034M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)
2402MHz
EBW

15/10/2019

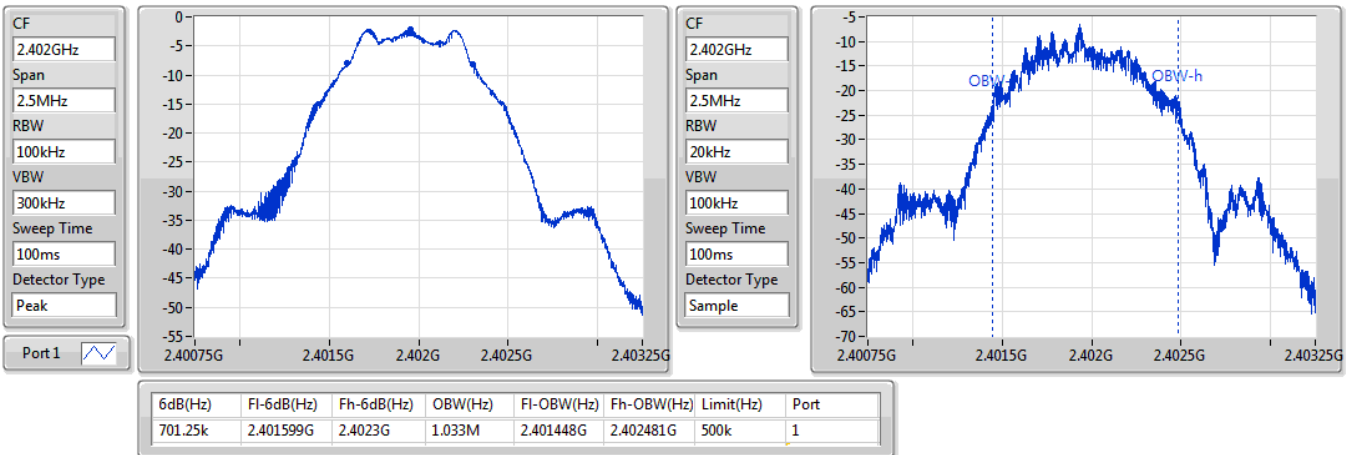
BT-LE(1Mbps)
2440MHz
EBW

15/10/2019

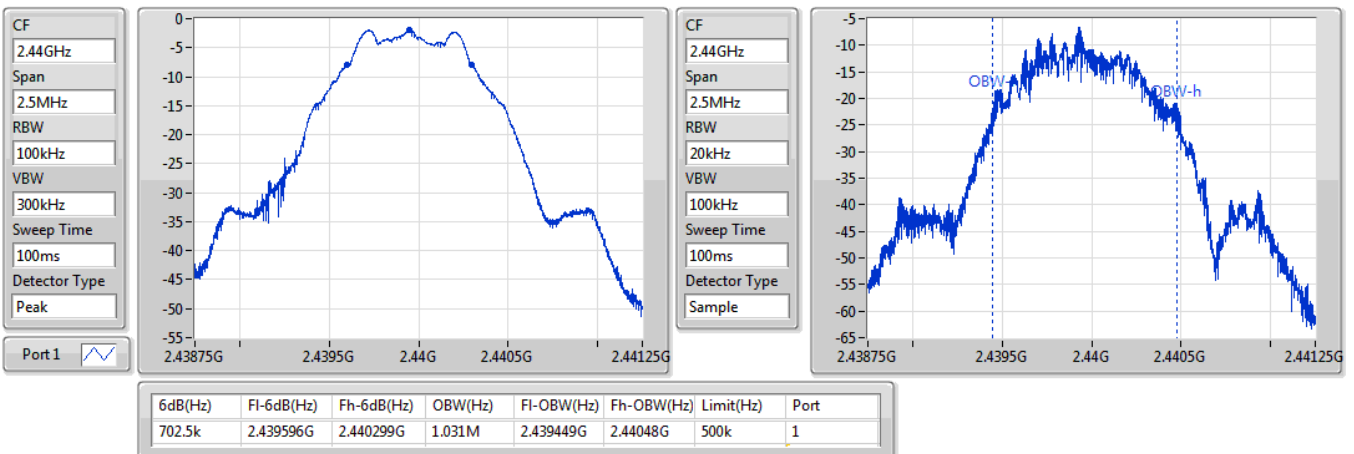


BT-LE(1Mbps)

2480MHz

EBW

15/10/2019

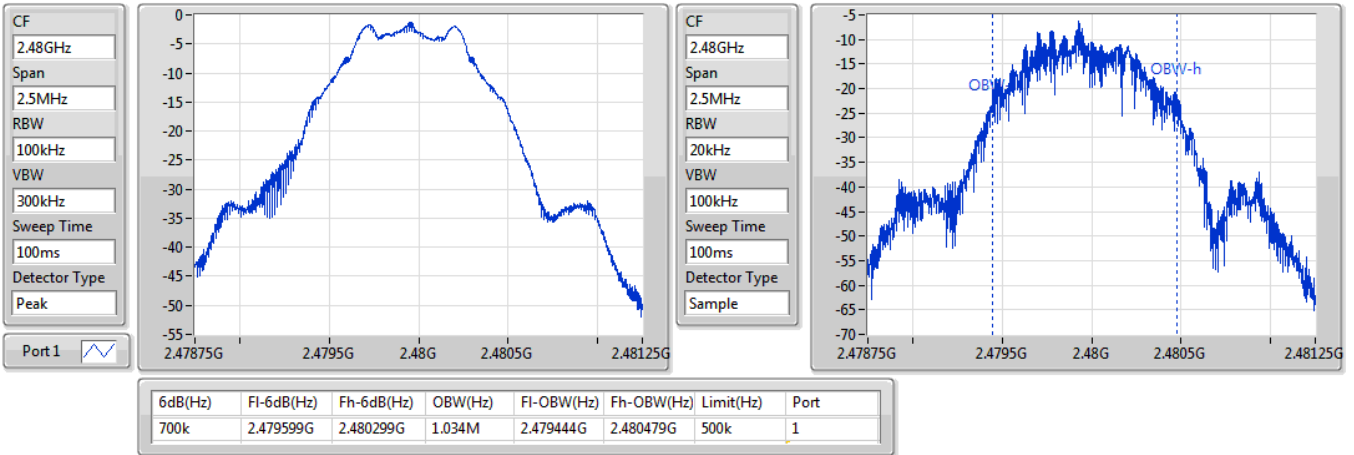



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	1.62	0.00145

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.37	1.62	30.00
2440MHz	Pass	4.37	1.45	30.00
2480MHz	Pass	4.37	1.42	30.00

DG = Directional Gain; **Port X** = Port X output power

**Summary**

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-1.53	0.00070

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	7.80	-1.88	28.20
2440MHz	Pass	7.80	-1.74	28.20
2480MHz	Pass	7.80	-1.53	28.20

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-1.53	0.00070

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	8.00	-1.88	28.00
2440MHz	Pass	8.00	-1.74	28.00
2480MHz	Pass	8.00	-1.53	28.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-13.79

RBW=3 kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.37	-14.17	8.00
2440MHz	Pass	4.37	-13.79	8.00
2480MHz	Pass	4.37	-14.20	8.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

PSD

2402MHz

08/10/2019

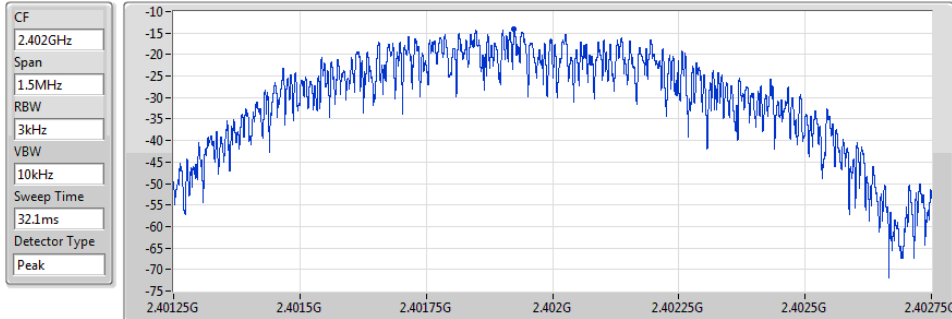


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.17	-14.17	-14.17

BT-LE(1Mbps)

PSD

2440MHz

08/10/2019

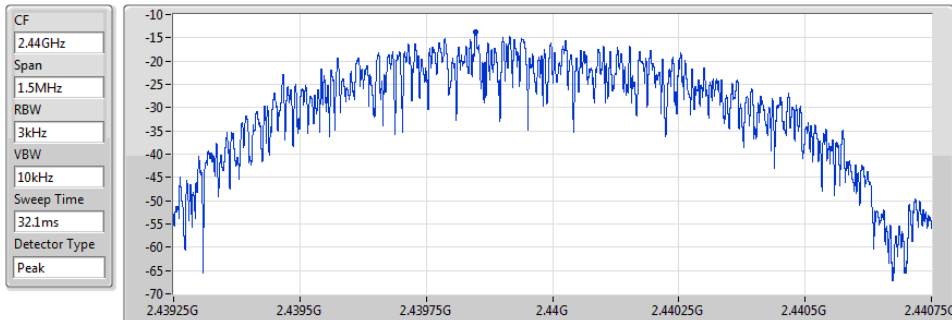


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.79	-13.79	-13.79

BT-LE(1Mbps)

PSD

2480MHz

08/10/2019

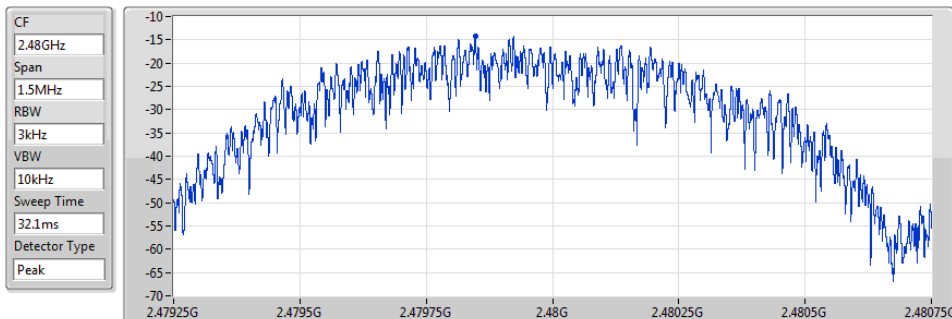

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.20	-14.20	-14.20



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-16.05

RBW=3 kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	7.80	-16.05	6.20
2440MHz	Pass	7.80	-16.10	6.20
2480MHz	Pass	7.80	-18.40	6.20

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

PSD

2402MHz

15/10/2019

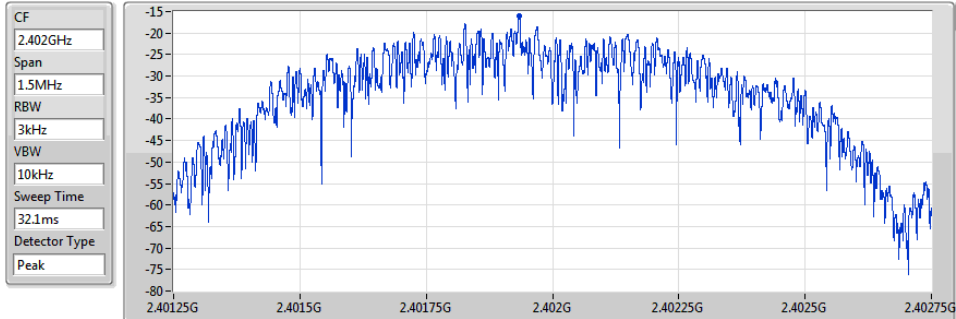


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-16.05	-16.05	-16.05

BT-LE(1Mbps)

PSD

2440MHz

15/10/2019

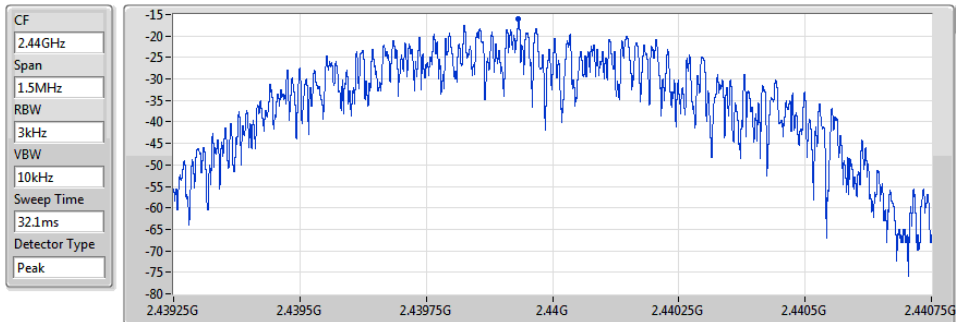


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-16.10	-16.10	-16.10

BT-LE(1Mbps)

PSD

2480MHz

15/10/2019

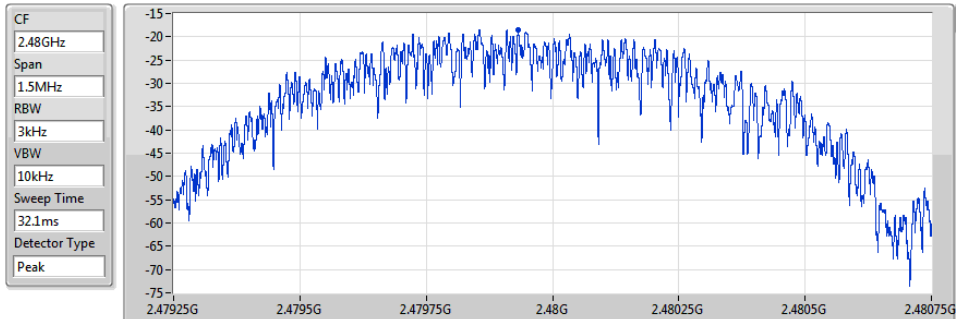

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-18.40	-18.40	-18.40



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-16.05

RBW=3 kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	8.00	-16.05	6.00
2440MHz	Pass	8.00	-16.10	6.00
2480MHz	Pass	8.00	-18.40	6.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

PSD

2402MHz

15/10/2019

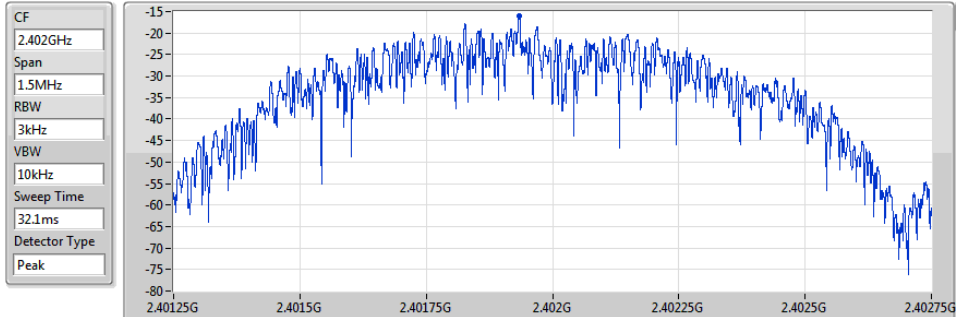


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-16.05	-16.05	-16.05

BT-LE(1Mbps)

PSD

2440MHz

15/10/2019

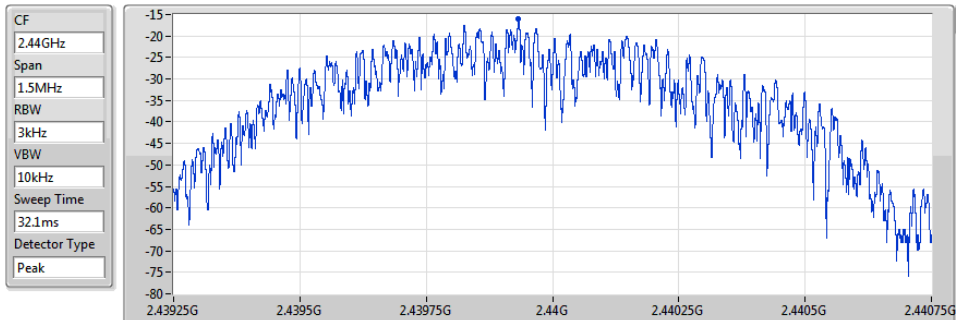


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-16.10	-16.10	-16.10

BT-LE(1Mbps)

PSD

2480MHz

15/10/2019

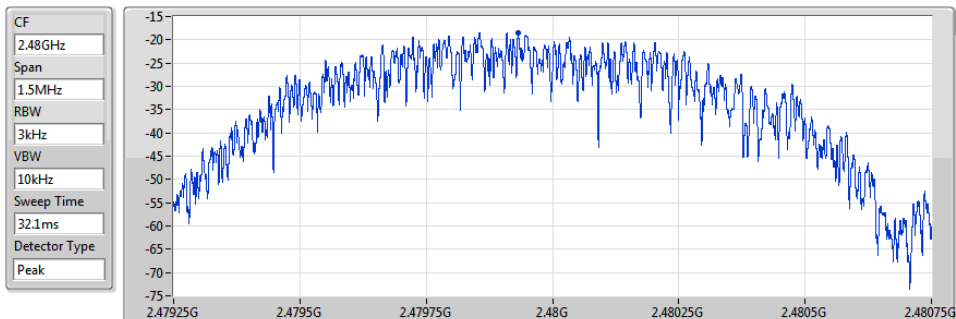

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-18.40	-18.40	-18.40

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.4397G	2.08	-27.92	950.56M	-50.77	2.39906G	-52.08	2.48372G	-41.24	16.75125G	-46.05	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.4397G	2.08	-27.92	2.398G	-43.81	2.39803G	-43.82	2.48353G	-51.69	16.2503G	-46.15	1
2440MHz	Pass	2.4397G	2.08	-27.92	1.89658G	-52.50	2.39958G	-51.78	2.48451G	-50.82	15.06548G	-45.98	1
2480MHz	Pass	2.4397G	2.08	-27.92	950.56M	-50.77	2.39906G	-52.08	2.48372G	-41.24	16.75125G	-46.05	1

BT-LE(1Mbps)


CSE NdB

2402MHz

08/10/2019

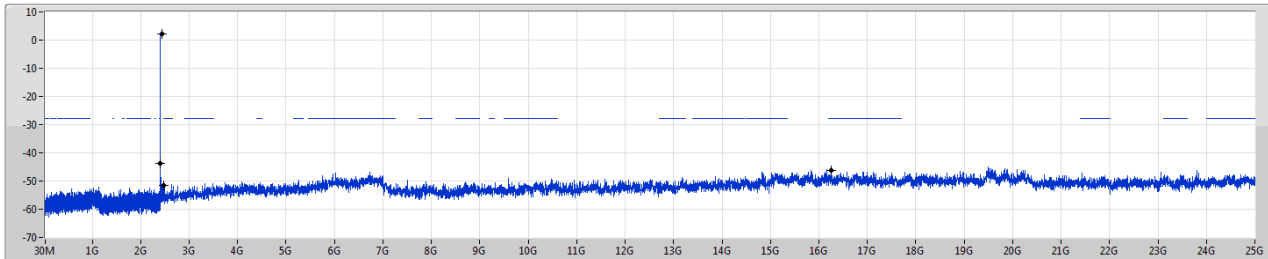

Port1

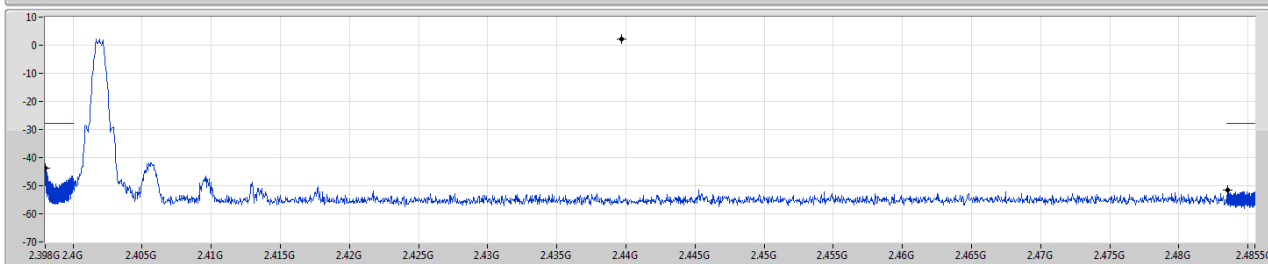

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4397G	2.08	-27.92	2.398G	-43.81	2.39803G	-43.82	2.48353G	-51.69	16.2503G	-46.15	1

BT-LE(1Mbps)


CSE NdB

2440MHz

08/10/2019

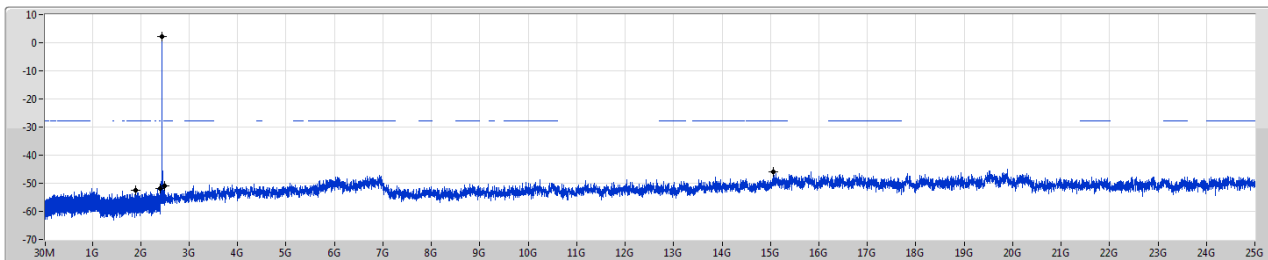


Port1

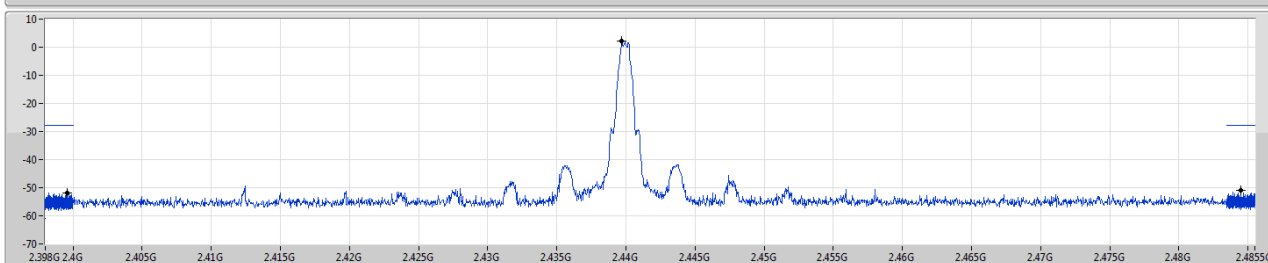

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4397G	2.08	-27.92	1.89658G	-52.50	2.39958G	-51.78	2.48451G	-50.82	15.06548G	-45.98	1

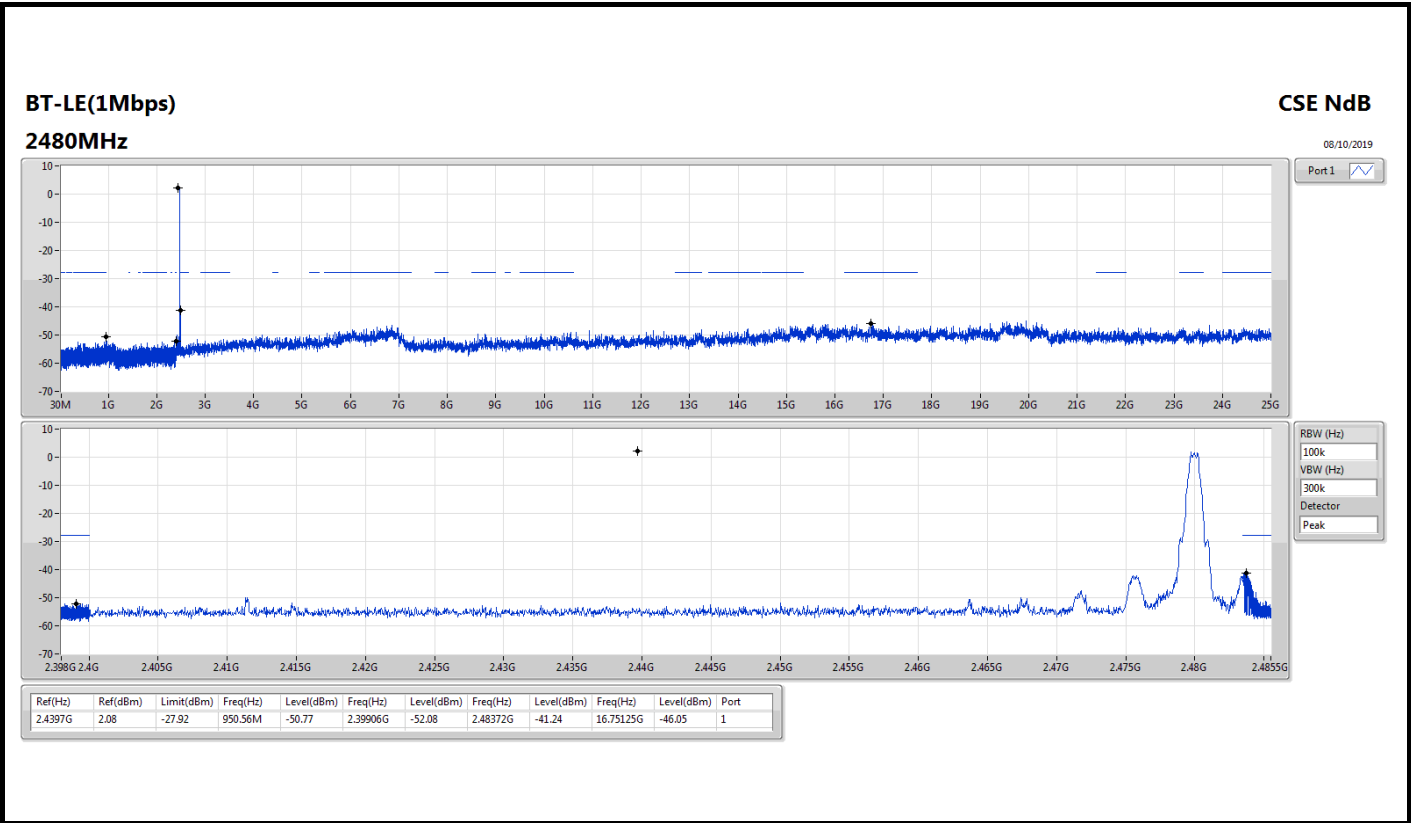



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	24.42588G	-47.23	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.47974G	-1.79	-31.79	2.3977G	-47.97	2.39803G	-46.56	2.48418G	-51.96	21.6172G	-47.29	1
2440MHz	Pass	2.47974G	-1.79	-31.79	675.28M	-53.12	2.39952G	-52.43	2.48414G	-52.10	24.17541G	-47.05	1
2480MHz	Pass	2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	24.42588G	-47.23	1

BT-LE(1Mbps)


CSE NdB

2402MHz

15/10/2019

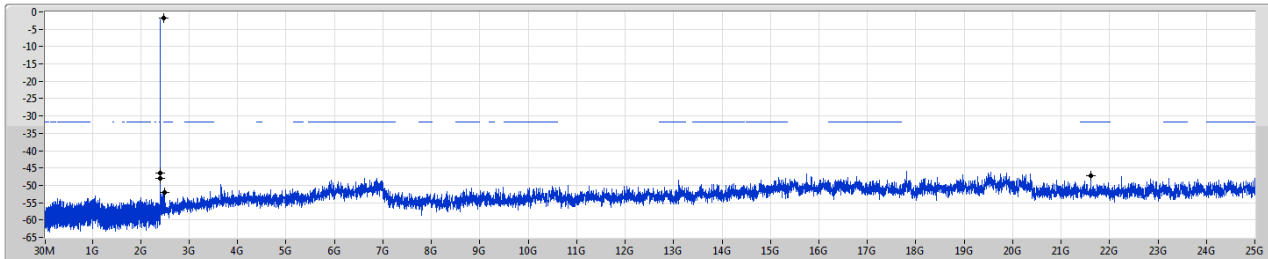

Port 1

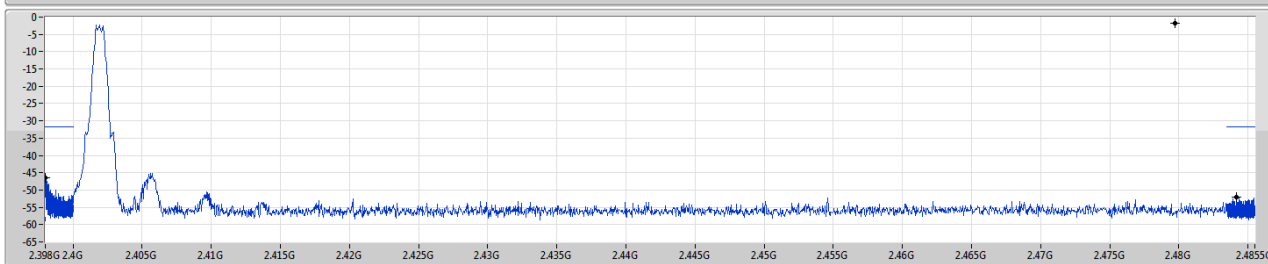

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	2.3977G	-47.97	2.39803G	-46.56	2.48418G	-51.96	2.46172G	-47.29	1

BT-LE(1Mbps)


CSE NdB

2440MHz

15/10/2019

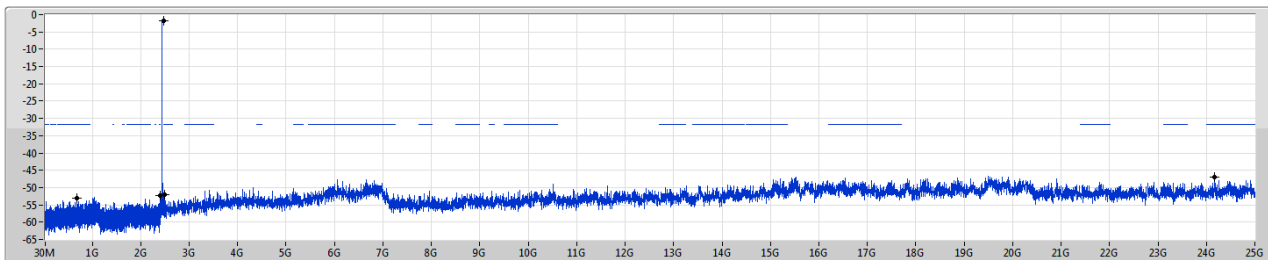

Port 1

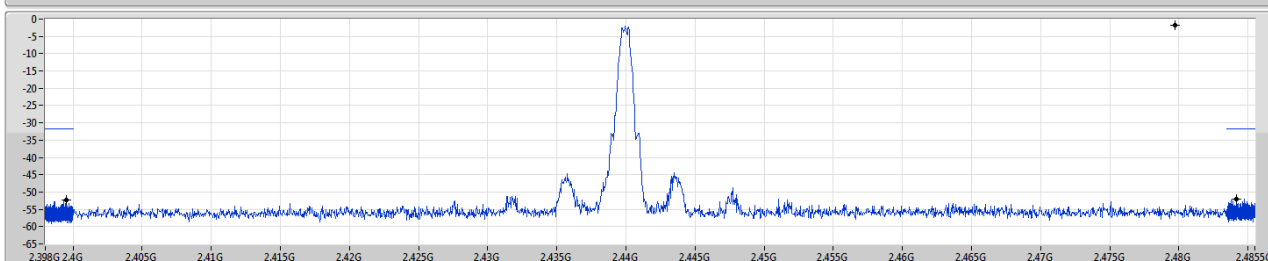

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	675.28M	-53.12	2.39952G	-52.43	2.48414G	-52.10	2.417541G	-47.05	1





BT-LE(1Mbps)

CSE NdB

2480MHz

15/10/2019

Port 1

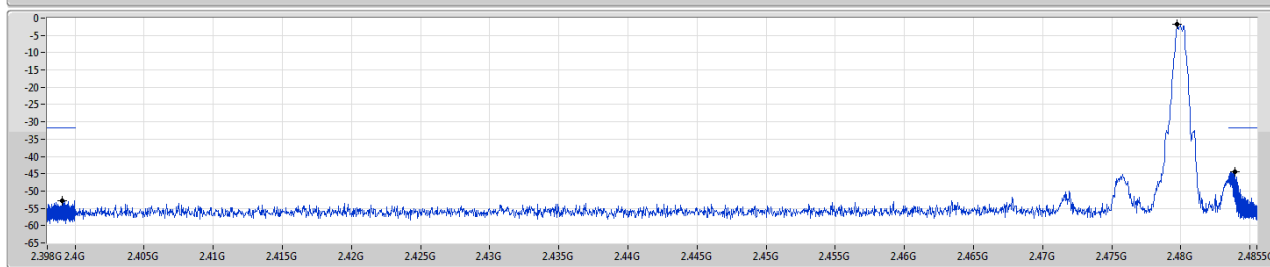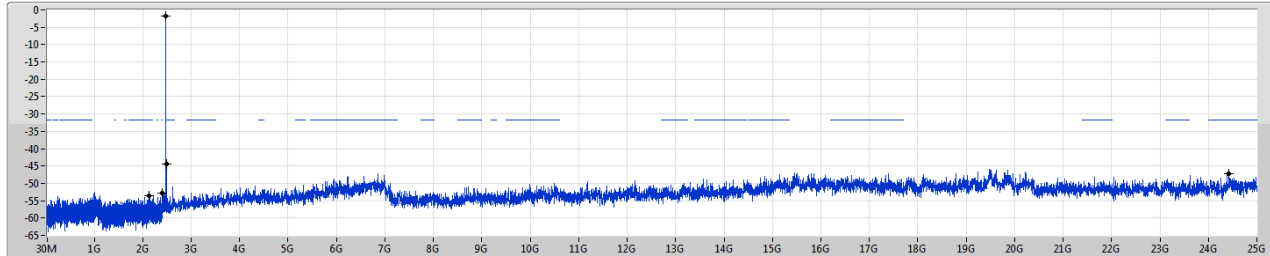

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	2.42588G	-47.23	1

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	24.42588G	-47.23	1

**Result**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.47974G	-1.79	-31.79	2.3977G	-47.97	2.39803G	-46.56	2.48418G	-51.96	21.6172G	-47.29	1
2440MHz	Pass	2.47974G	-1.79	-31.79	675.28M	-53.12	2.39952G	-52.43	2.48414G	-52.10	24.17541G	-47.05	1
2480MHz	Pass	2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	24.42588G	-47.23	1

BT-LE(1Mbps)


CSE NdB

2402MHz

15/10/2019

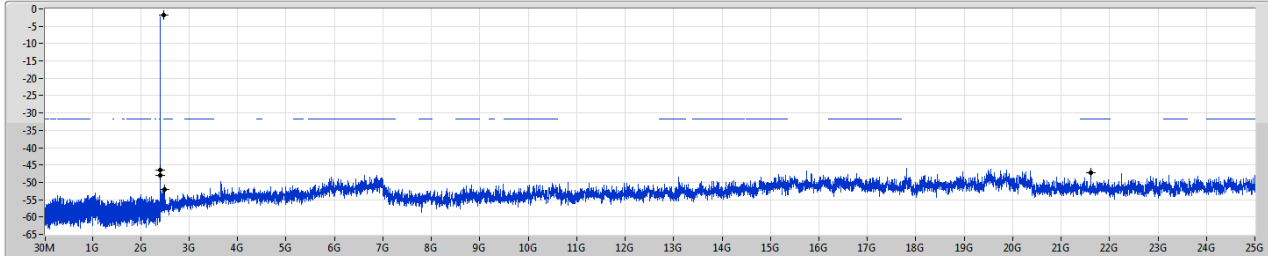

Port 1

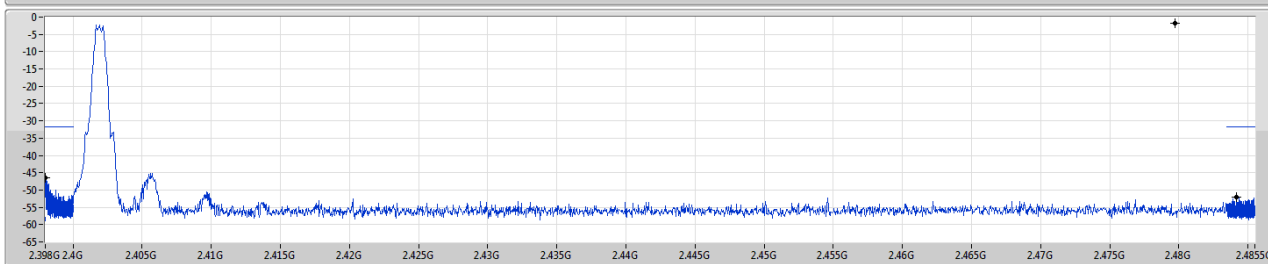

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	2.3977G	-47.97	2.39803G	-46.56	2.48418G	-51.96	2.4172G	-47.29	1

BT-LE(1Mbps)


CSE NdB

2440MHz

15/10/2019

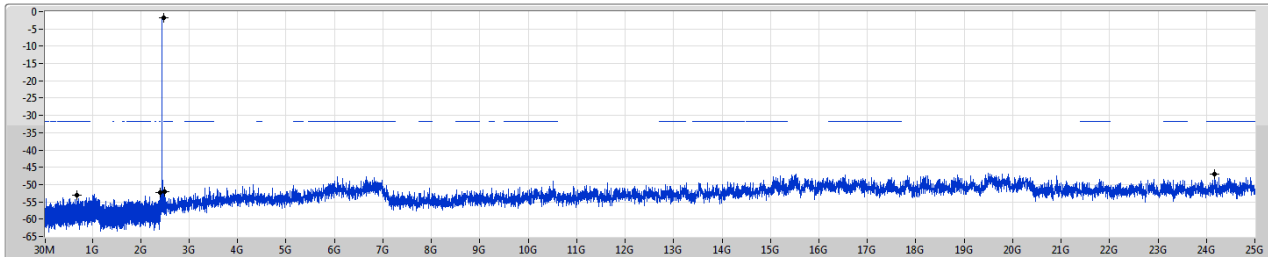

Port 1

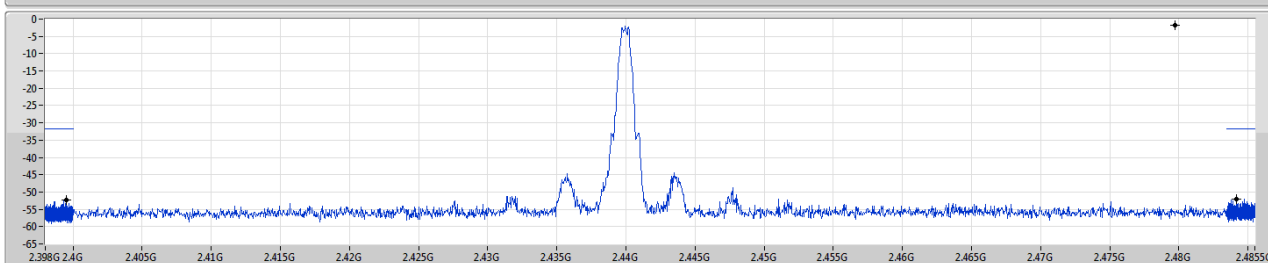

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	675.28M	-53.12	2.39952G	-52.43	2.48414G	-52.10	2.417541G	-47.05	1





BT-LE(1Mbps)

CSE NdB

2480MHz

15/10/2019

Port 1

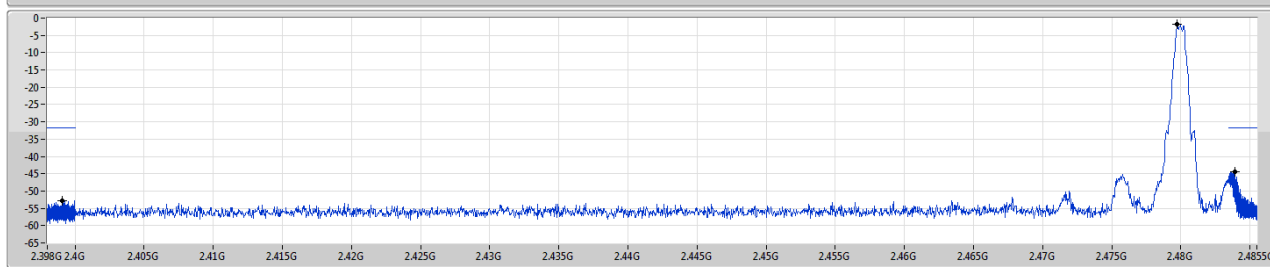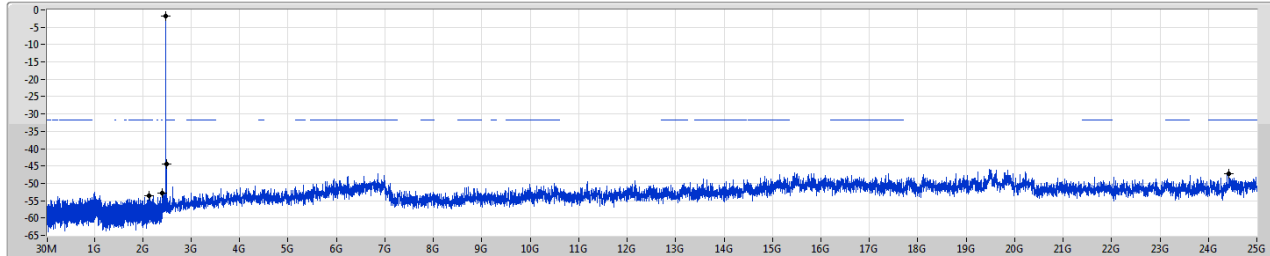


RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.47974G	-1.79	-31.79	2.12775G	-53.49	2.3991G	-52.85	2.48392G	-44.50	2.42588G	-47.23	1


Test Mode	Mode 22	Frequency Range	30 MHz to 1,000 MHz
-----------	---------	-----------------	---------------------

Vertical 30 MHz to 1,000 MHz

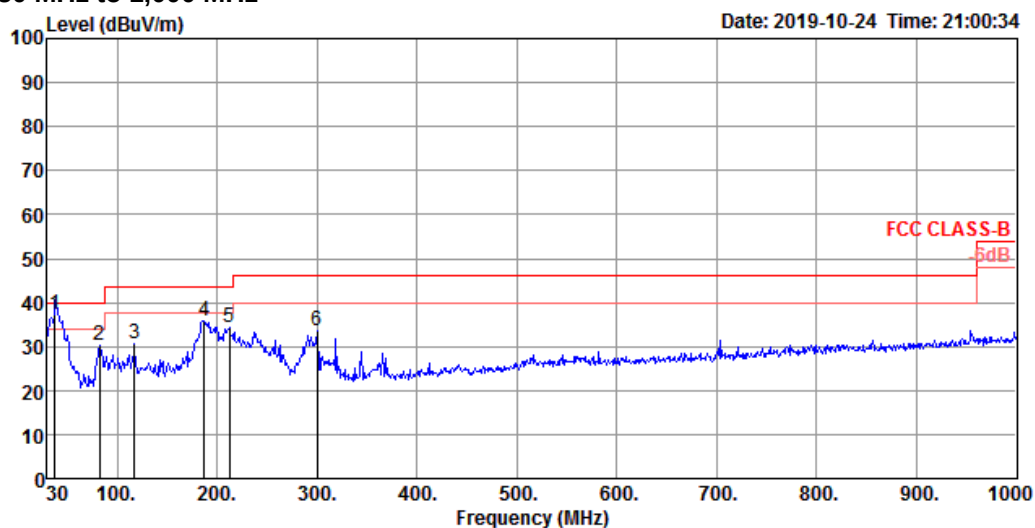

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	37.76	37.41	40.00	-2.59	47.05	0.80	21.06	31.50	100	1 QP	VERTICAL
2	82.38	30.15	40.00	-9.85	47.11	1.14	13.76	31.86	150	153 Peak	VERTICAL
3	117.30	30.53	43.50	-12.97	42.33	1.40	18.58	31.78	100	179 Peak	VERTICAL
4	187.14	35.81	43.50	-7.69	50.56	1.72	15.50	31.97	100	1 Peak	VERTICAL
5	212.36	34.33	43.50	-9.17	48.08	1.81	16.40	31.96	100	47 Peak	VERTICAL
6	299.66	33.50	46.00	-12.50	43.59	2.21	19.78	32.08	200	0 Peak	VERTICAL

Horizontal 30 MHz to 1,000 MHz

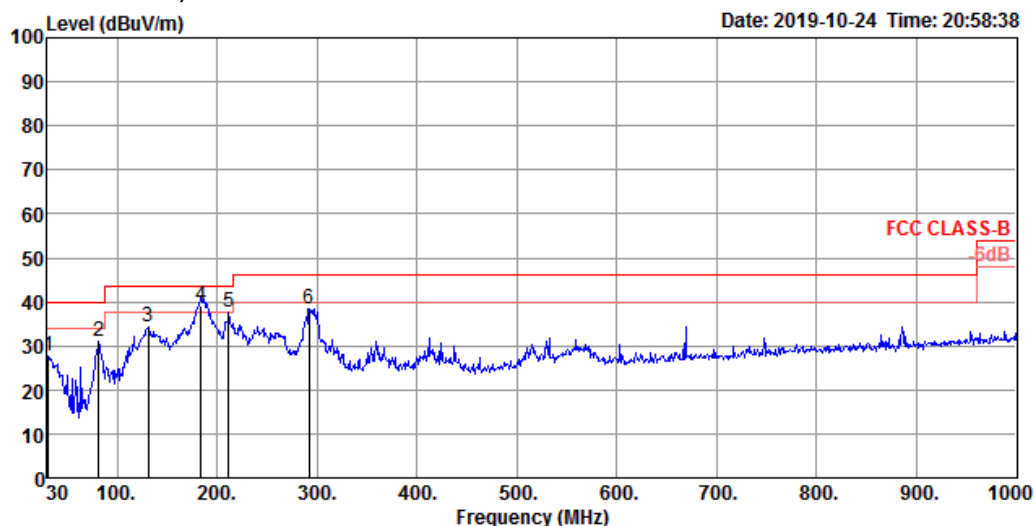

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.97	27.71	40.00	-12.29	33.47	0.69	25.11	31.56	150	246	Peak	HORIZONTAL
2	81.41	30.82	40.00	-9.18	47.94	1.15	13.59	31.86	200	101	Peak	HORIZONTAL
3	130.88	34.29	43.50	-9.21	46.34	1.47	18.43	31.95	300	168	Peak	HORIZONTAL
4	184.23	39.13	43.50	-4.37	53.89	1.72	15.50	31.98	150	17	QP	HORIZONTAL
5	211.39	37.74	43.50	-5.76	51.49	1.81	16.40	31.96	150	40	Peak	HORIZONTAL
6	291.90	38.47	46.00	-7.53	48.71	2.19	19.64	32.07	100	30	Peak	HORIZONTAL




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	2.4835G	68.68	74.00	-5.32	31.39	3	Vertical	360	1.00	-

BT-LE(1Mbps)

03/10/2019

2402MHz_TX

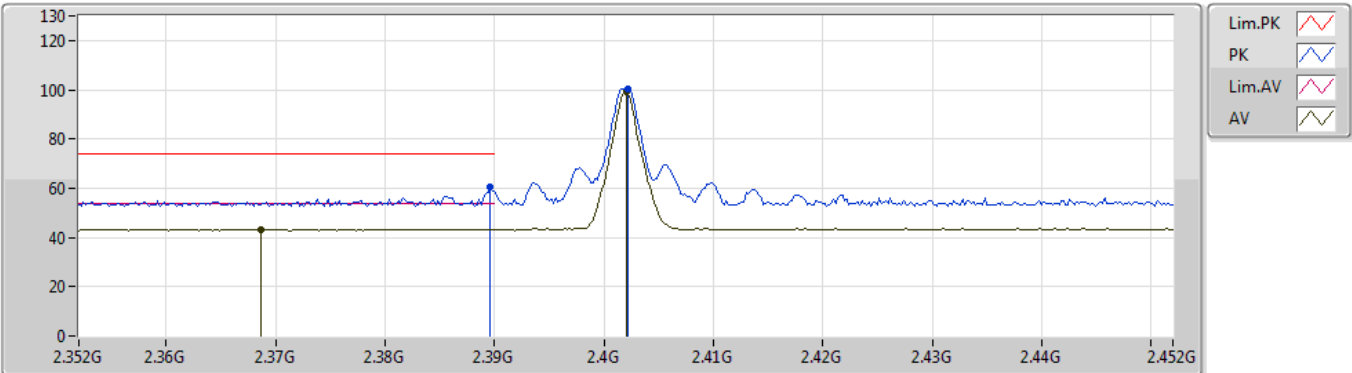


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.3896G	60.27	74.00	-13.73	31.20	3	Vertical	360	1.01	-	29.07			
AV	2.3686G	43.38	54.00	-10.62	31.15	3	Vertical	360	1.01	-	12.23			
PK	2.4022G	100.36	Inf	-Inf	31.23	3	Vertical	360	1.01	-	69.13			
AV	2.402G	98.94	Inf	-Inf	31.23	3	Vertical	360	1.01	-	67.71			

BT-LE(1Mbps)

03/10/2019

2402MHz_TX

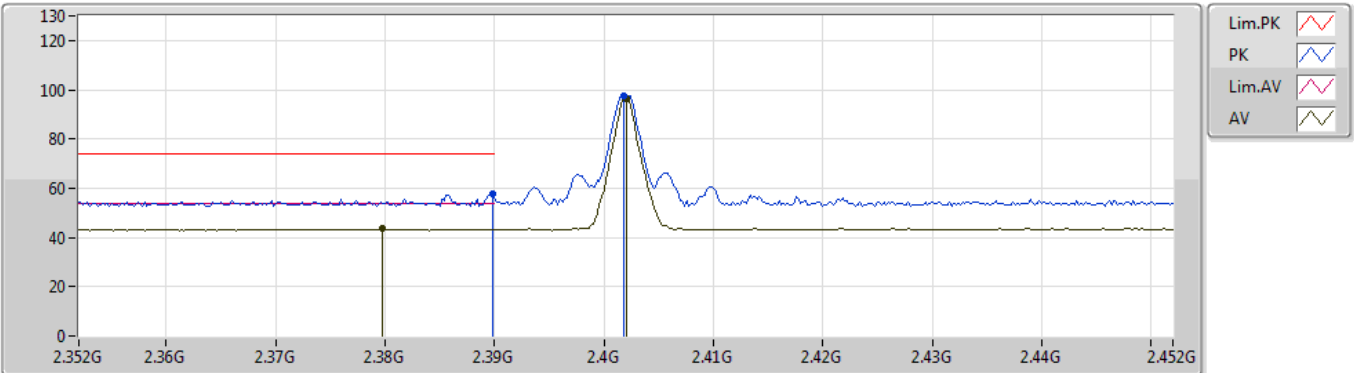


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3898G	57.89	74.00	-16.11	31.20	3	Horizontal	335	2.58	-	26.69
AV	2.3798G	43.56	54.00	-10.44	31.18	3	Horizontal	335	2.58	-	12.38
PK	2.4018G	97.78	Inf	-Inf	31.23	3	Horizontal	335	2.58	-	66.55
AV	2.402G	96.48	Inf	-Inf	31.23	3	Horizontal	335	2.58	-	65.25

BT-LE(1Mbps)

03/10/2019

2402MHz_TX

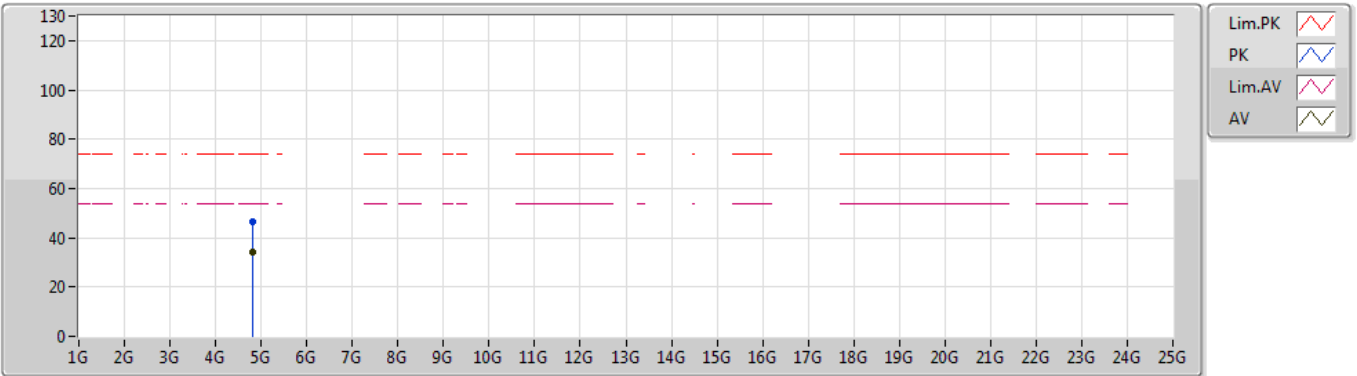


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.8082G	46.77	74.00	-27.23	7.13	3	Vertical	312	2.11	-	39.64			
AV	4.80408G	34.30	54.00	-19.70	7.12	3	Vertical	312	2.11	-	27.18			

BT-LE(1Mbps)

03/10/2019

2402MHz_TX

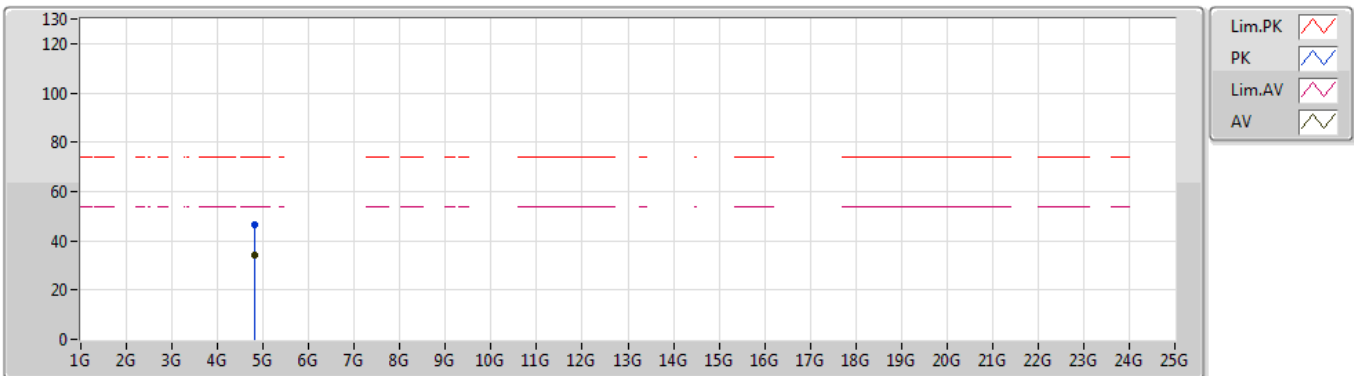


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.80312G	46.69	74.00	-27.31	7.12	3	Horizontal	254	1.57	-	39.57			
AV	4.8018G	34.10	54.00	-19.90	7.11	3	Horizontal	254	1.57	-	26.99			

BT-LE(1Mbps)

03/10/2019

2440MHz_TX

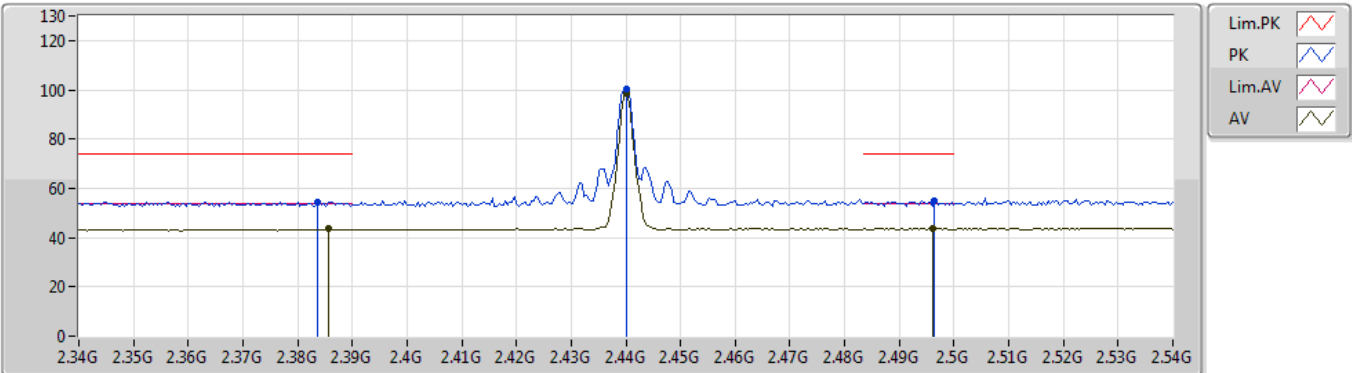


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.3836G	54.62	74.00	-19.38	31.19	3	Vertical	360	3.00	-	23.43			
AV	2.3856G	43.46	54.00	-10.54	31.19	3	Vertical	360	3.00	-	12.27			
PK	2.44G	100.30	Inf	-Inf	31.31	3	Vertical	360	3.00	-	68.99			
AV	2.44G	98.82	Inf	-Inf	31.31	3	Vertical	360	3.00	-	67.51			
PK	2.4964G	55.11	74.00	-18.89	31.42	3	Vertical	360	3.00	-	23.69			
AV	2.496G	43.74	54.00	-10.26	31.42	3	Vertical	360	3.00	-	12.32			

BT-LE(1Mbps)

03/10/2019

2440MHz_TX

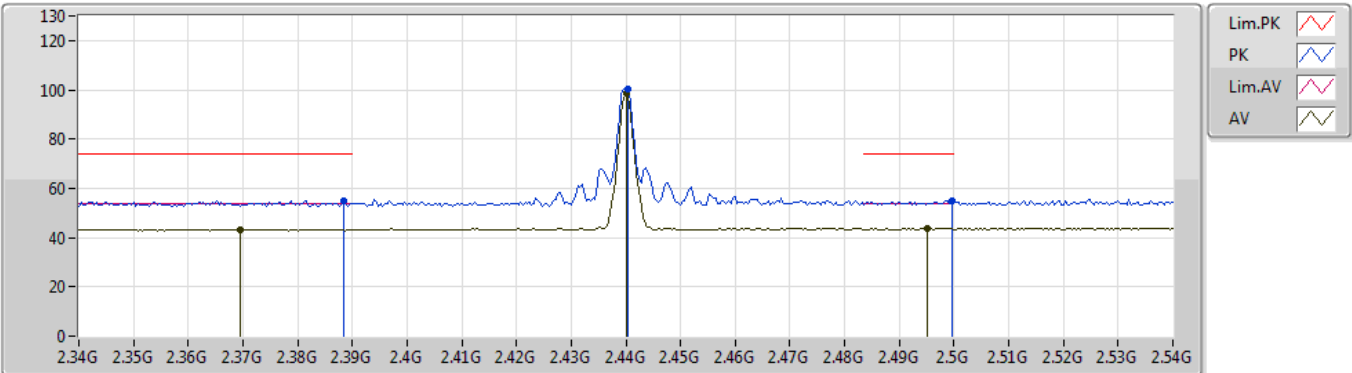

EUT Y_1TX
Setting Default
02-L-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3884G	55.07	74.00	-18.93	31.20	3	Horizontal	43	2.72	-	23.87
AV	2.3696G	43.36	54.00	-10.64	31.16	3	Horizontal	43	2.72	-	12.20
PK	2.4404G	100.14	Inf	-Inf	31.31	3	Horizontal	43	2.72	-	68.83
AV	2.44G	98.58	Inf	-Inf	31.31	3	Horizontal	43	2.72	-	67.27
PK	2.4996G	55.18	74.00	-18.82	31.43	3	Horizontal	43	2.72	-	23.75
AV	2.4952G	43.73	54.00	-10.27	31.42	3	Horizontal	43	2.72	-	12.31



BT-LE(1Mbps)

03/10/2019

2440MHz_TX

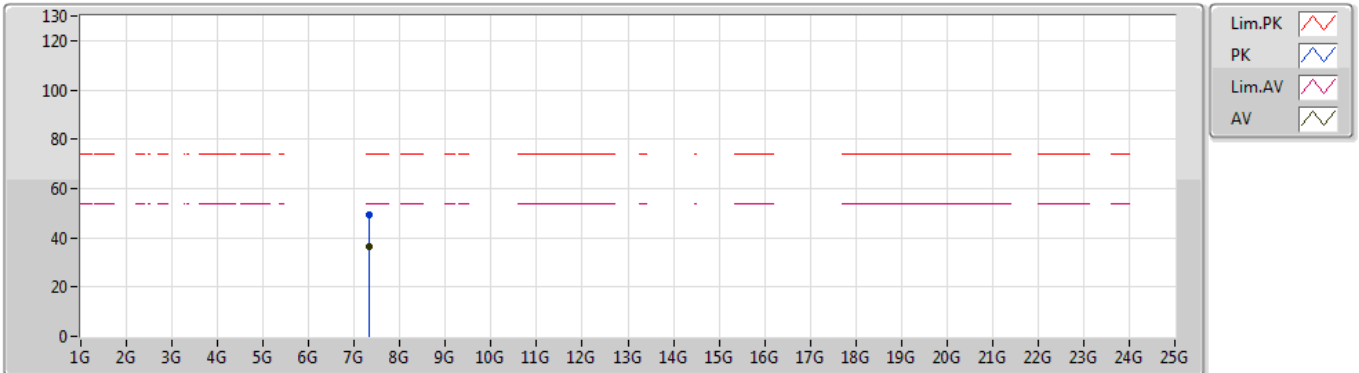

EUT Y_1TX
Setting Default
02-L-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	7.3192G	49.40	74.00	-24.60	10.57	3	Vertical	217	1.58	-	38.83			
AV	7.31616G	36.70	54.00	-17.30	10.57	3	Vertical	217	1.58	-	26.13			



BT-LE(1Mbps)

03/10/2019

2440MHz_TX

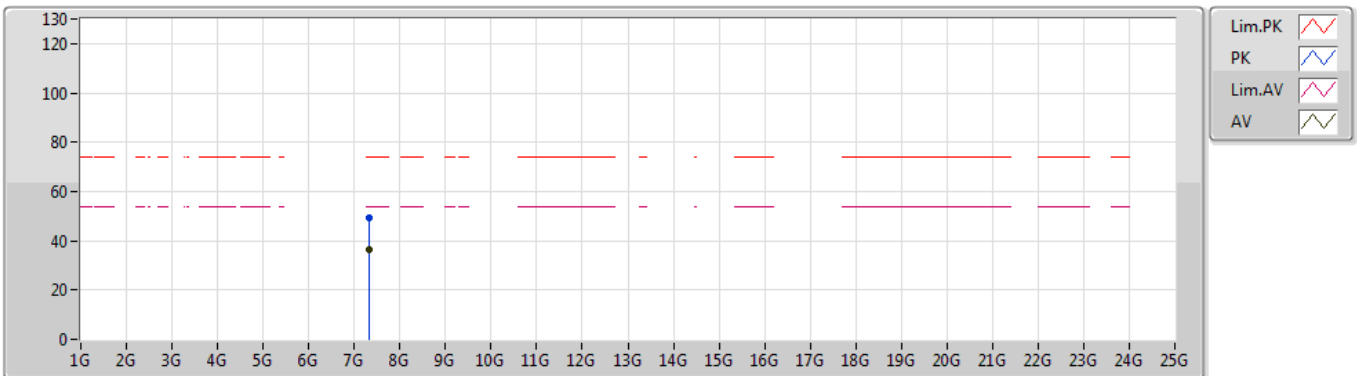

EUT Y_1TX
Setting Default
02-L-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	7.3204G	49.10	74.00	-24.90	10.57	3	Horizontal	197	2.08	-	38.53			
AV	7.32354G	36.60	54.00	-17.40	10.59	3	Horizontal	197	2.08	-	26.01			



BT-LE(1Mbps)

03/10/2019

2480MHz_TX

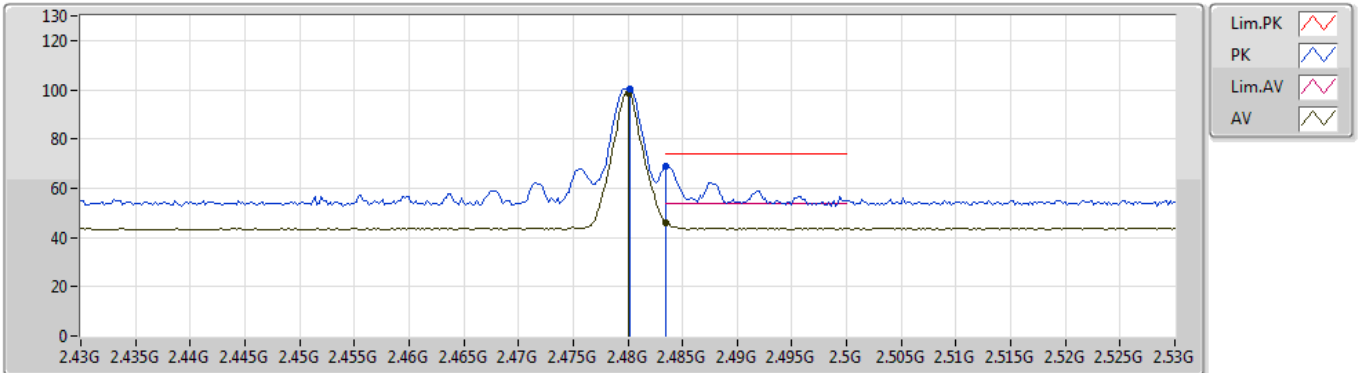


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.4802G	100.29	Inf	-Inf	31.39	3	Vertical	360	1.00	-	68.90			
AV	2.48G	98.87	Inf	-Inf	31.39	3	Vertical	360	1.00	-	67.48			
PK	2.4835G	68.68	74.00	-5.32	31.39	3	Vertical	360	1.00	-	37.29			
AV	2.4835G	46.21	54.00	-7.79	31.39	3	Vertical	360	1.00	-	14.82			

BT-LE(1Mbps)

03/10/2019

2480MHz_TX

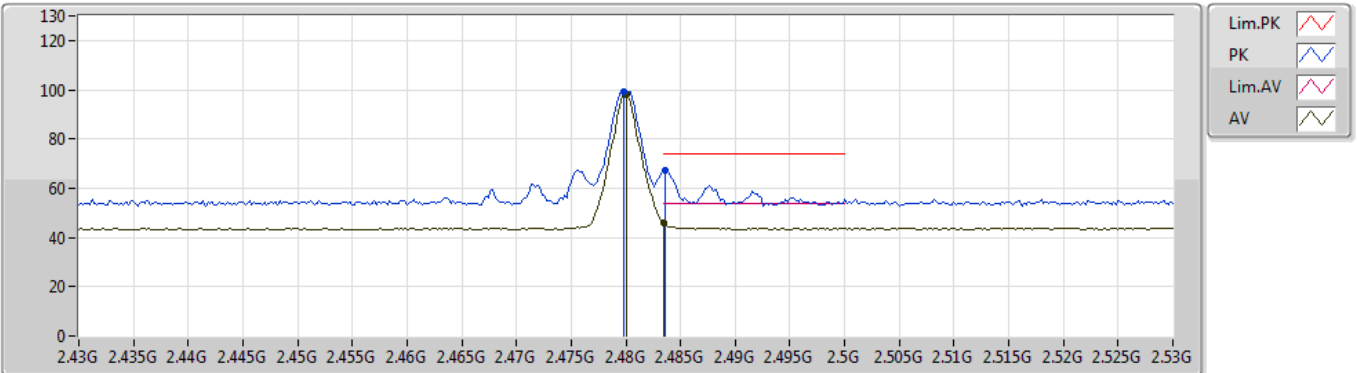

EUT Y_1TX
Setting Default
02-L-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.4798G	99.40	Inf	-Inf	31.39	3	Horizontal	22	2.22	-	68.01
AV	2.48G	98.02	Inf	-Inf	31.39	3	Horizontal	22	2.22	-	66.63
PK	2.4836G	67.39	74.00	-6.61	31.39	3	Horizontal	22	2.22	-	36.00
AV	2.4835G	45.79	54.00	-8.21	31.39	3	Horizontal	22	2.22	-	14.40



BT-LE(1Mbps)

03/10/2019

2480MHz_TX

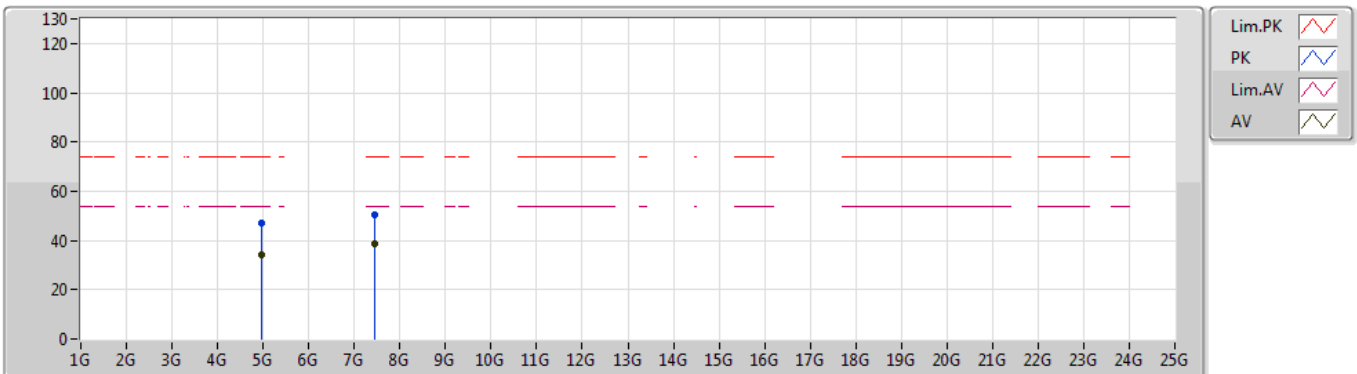


EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.95616G	46.81	74.00	-27.19	7.48	3	Vertical	96	1.93	-	39.33			
AV	4.95698G	33.92	54.00	-20.08	7.48	3	Vertical	96	1.93	-	26.44			
PK	7.43982G	50.67	74.00	-23.33	10.90	3	Vertical	360	2.17	-	39.77			
AV	7.43912G	38.56	54.00	-15.44	10.90	3	Vertical	360	2.17	-	27.66			

BT-LE(1Mbps)

03/10/2019

2480MHz_TX

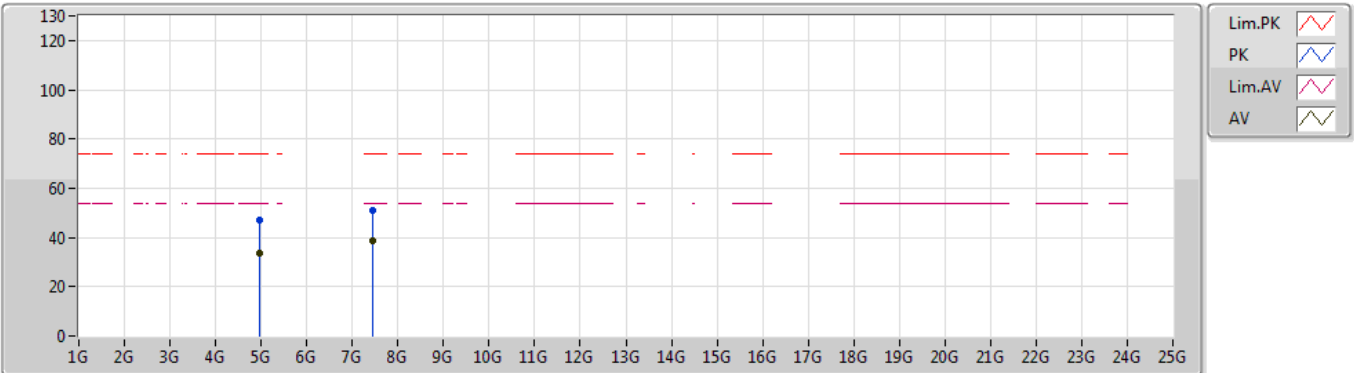

EUT Y_1TX
Setting Default
02-L-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.95546G	47.18	74.00	-26.82	7.48	3	Horizontal	333	1.53	-	39.70			
AV	4.95738G	33.83	54.00	-20.17	7.48	3	Horizontal	333	1.53	-	26.35			
PK	7.44046G	50.82	74.00	-23.18	10.90	3	Horizontal	14	1.45	-	39.92			
AV	7.43908G	38.72	54.00	-15.28	10.90	3	Horizontal	14	1.45	-	27.82			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	2.4836G	70.36	74.00	-3.64	31.39	3	Vertical	4	2.29	-

BT-LE(1Mbps)

07/10/2019

2402MHz_TX

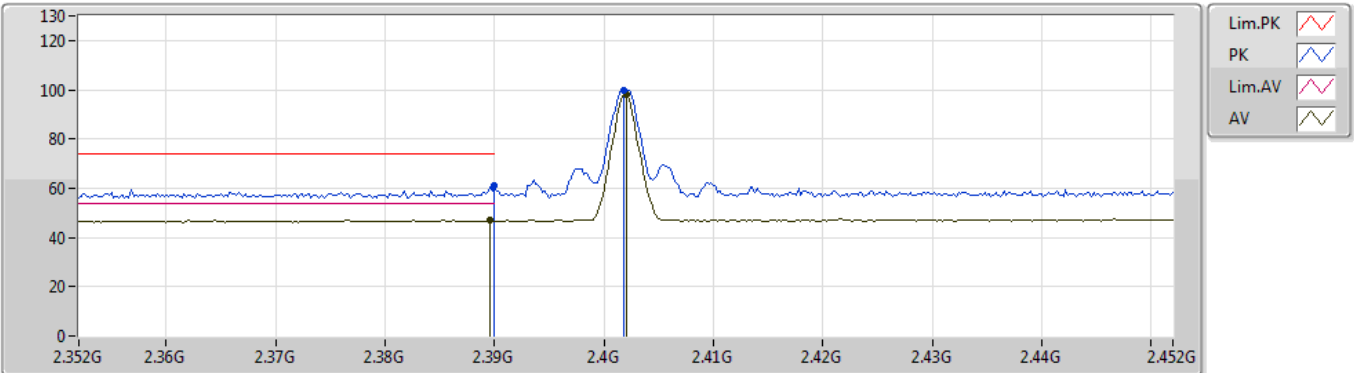


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.39G	61.05	74.00	-12.95	31.20	3	Vertical	8	1.96	-	29.85			
AV	2.3896G	47.02	54.00	-6.98	31.20	3	Vertical	8	1.96	-	15.82			
PK	2.4018G	99.69	Inf	-Inf	31.23	3	Vertical	8	1.96	-	68.46			
AV	2.402G	98.24	Inf	-Inf	31.23	3	Vertical	8	1.96	-	67.01			

BT-LE(1Mbps)

07/10/2019

2402MHz_TX

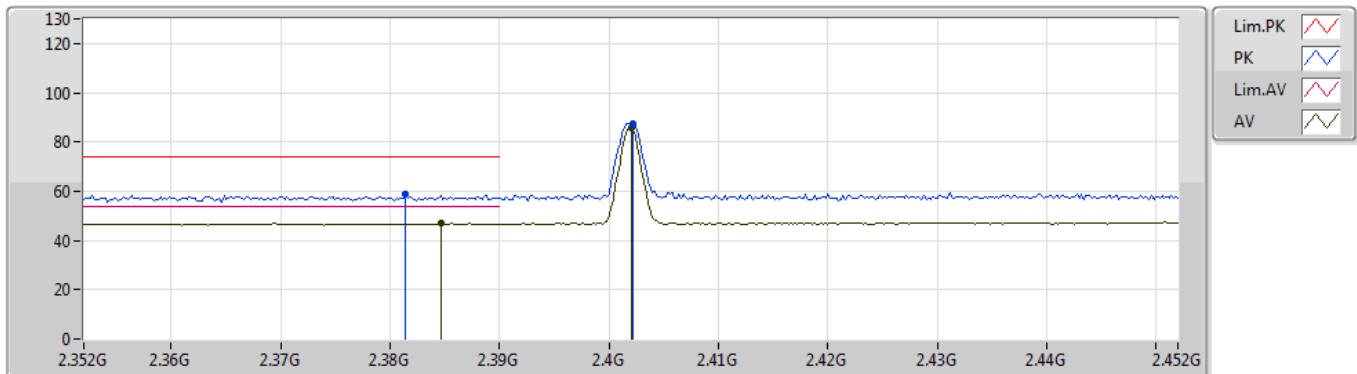

EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3814G	58.92	74.00	-15.08	31.19	3	Horizontal	11	1.66	-	27.73
AV	2.3846G	46.96	54.00	-7.04	31.19	3	Horizontal	11	1.66	-	15.77
PK	2.4022G	87.31	Inf	-Inf	31.23	3	Horizontal	11	1.66	-	56.08
AV	2.402G	85.88	Inf	-Inf	31.23	3	Horizontal	11	1.66	-	54.65



BT-LE(1Mbps)

07/10/2019

2402MHz_TX

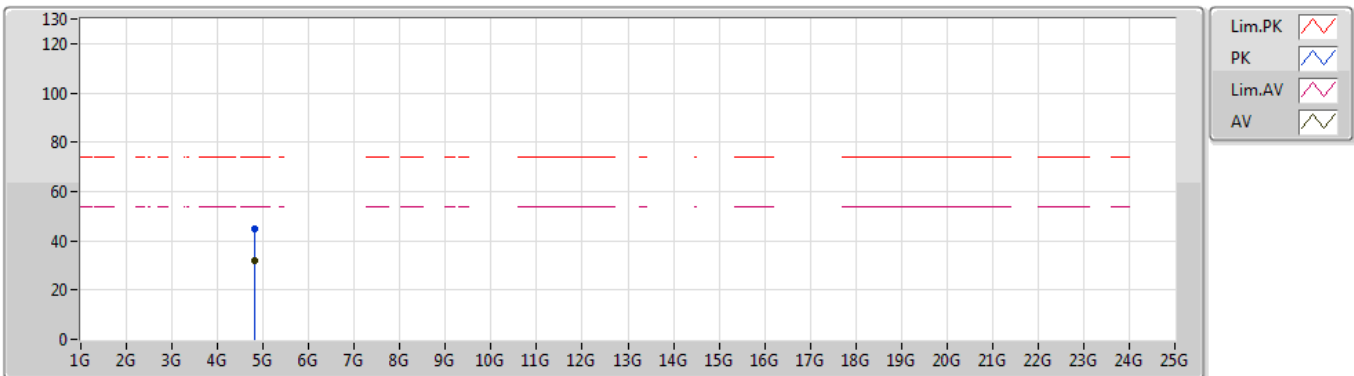

EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.81304G	44.76	74.00	-29.24	7.13	3	Vertical	305	1.49	-	37.63			
AV	4.80412G	32.13	54.00	-21.87	7.12	3	Vertical	305	1.49	-	25.01			



BT-LE(1Mbps)

07/10/2019

2402MHz_TX

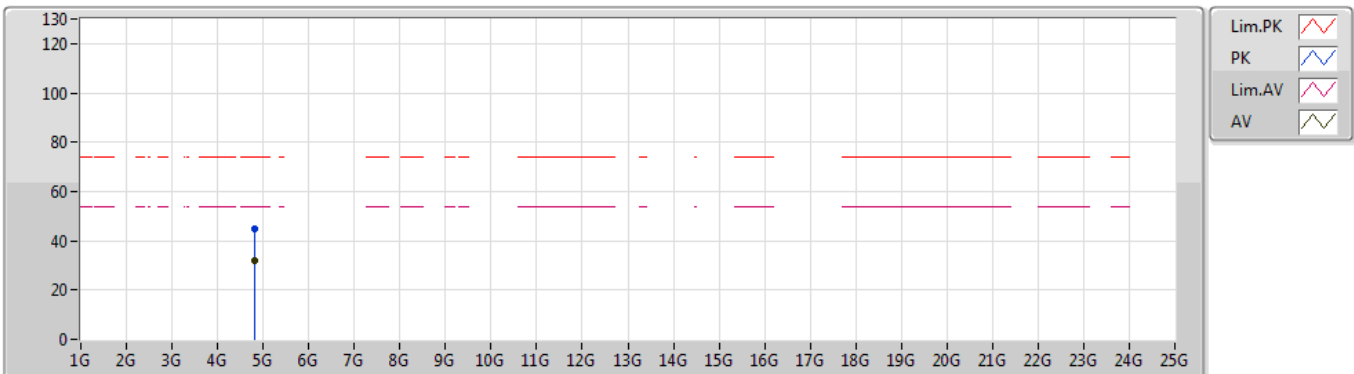


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.80356G	44.95	74.00	-29.05	7.12	3	Horizontal	297	1.65	-	37.83			
AV	4.80708G	32.17	54.00	-21.83	7.12	3	Horizontal	297	1.65	-	25.05			

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

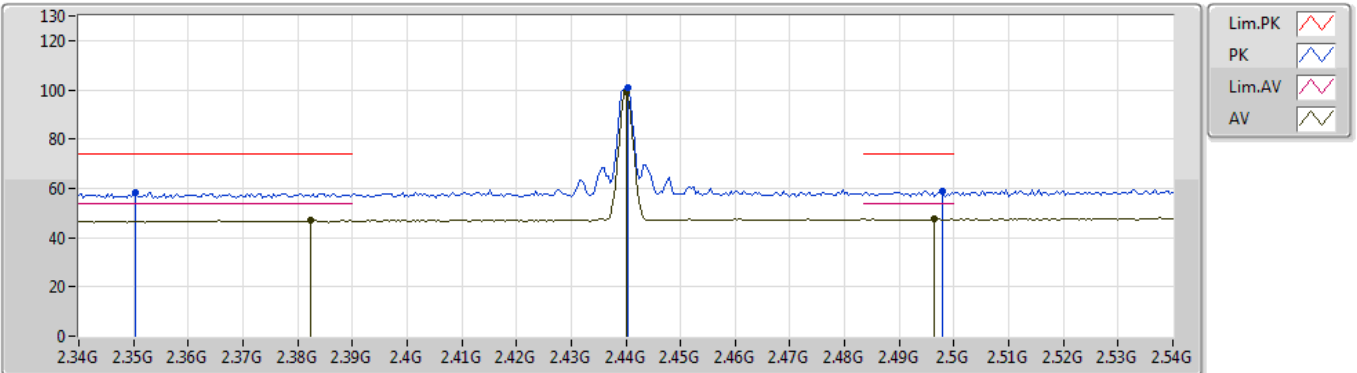


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3504G	58.38	74.00	-15.62	31.11	3	Vertical	360	2.13	-	27.27
AV	2.3824G	46.93	54.00	-7.07	31.19	3	Vertical	360	2.13	-	15.74
PK	2.4404G	100.66	Inf	-Inf	31.31	3	Vertical	360	2.13	-	69.35
AV	2.44G	99.17	Inf	-Inf	31.31	3	Vertical	360	2.13	-	67.86
PK	2.498G	58.65	74.00	-15.35	31.43	3	Vertical	360	2.13	-	27.22
AV	2.4964G	47.52	54.00	-6.48	31.42	3	Vertical	360	2.13	-	16.10

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

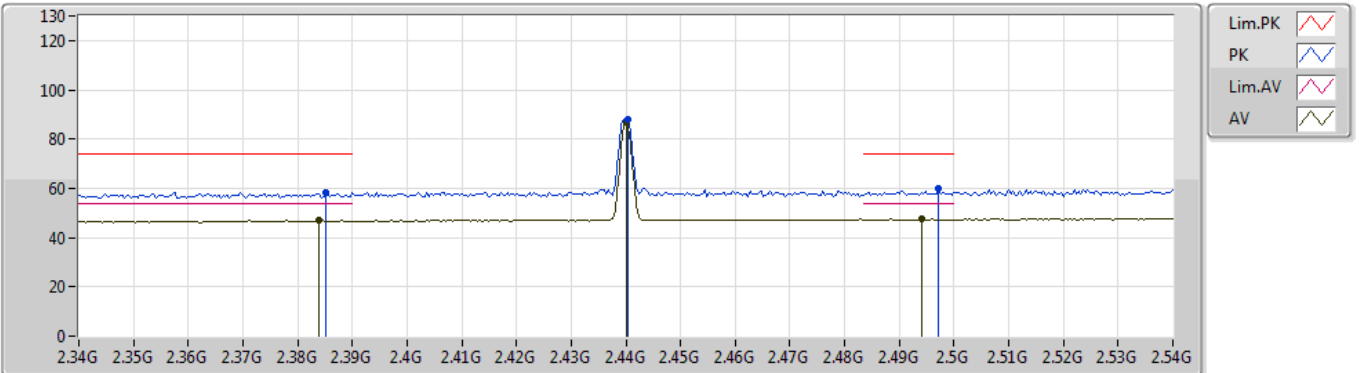


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3852G	58.48	74.00	-15.52	31.19	3	Horizontal	18	1.00	-	27.29
AV	2.384G	46.90	54.00	-7.10	31.19	3	Horizontal	18	1.00	-	15.71
PK	2.4404G	88.16	Inf	-Inf	31.31	3	Horizontal	18	1.00	-	56.85
AV	2.44G	86.74	Inf	-Inf	31.31	3	Horizontal	18	1.00	-	55.43
PK	2.4972G	59.69	74.00	-14.31	31.43	3	Horizontal	18	1.00	-	28.26
AV	2.494G	47.45	54.00	-6.55	31.42	3	Horizontal	18	1.00	-	16.03

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

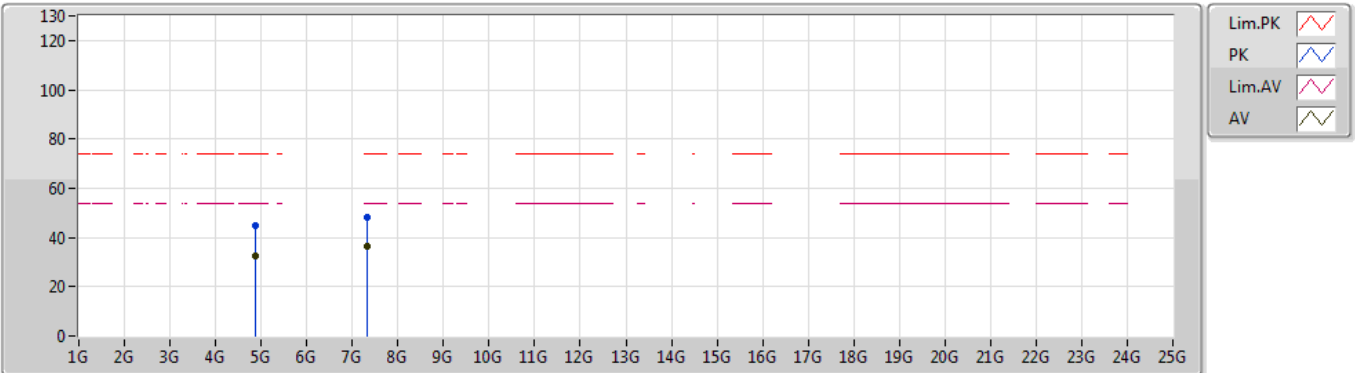


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.87172G	44.62	74.00	-29.38	7.28	3	Vertical	114	1.72	-	37.34			
AV	4.87932G	32.72	54.00	-21.28	7.30	3	Vertical	114	1.72	-	25.42			
PK	7.31716G	48.40	74.00	-25.60	10.57	3	Vertical	320	2.33	-	37.83			
AV	7.32528G	36.21	54.00	-17.79	10.59	3	Vertical	320	2.33	-	25.62			

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

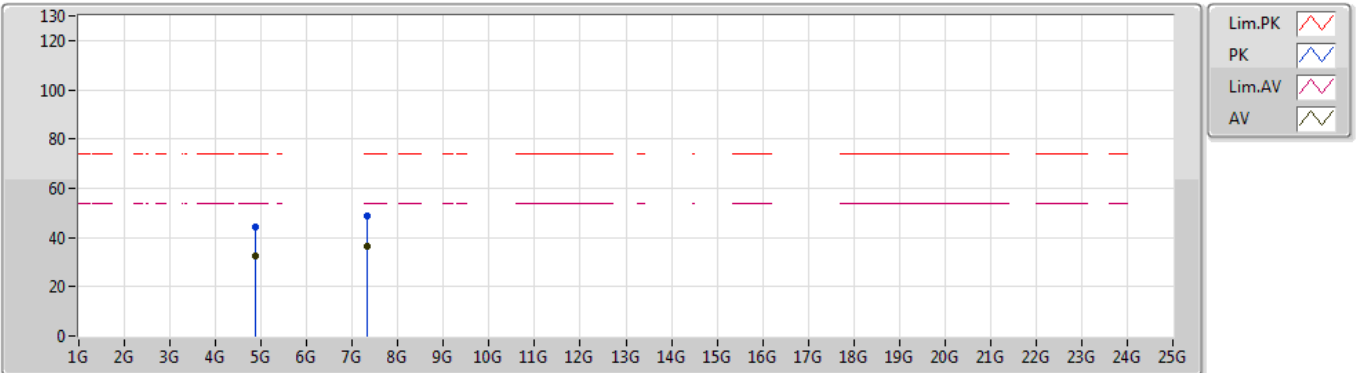


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.87588G	44.39	74.00	-29.61	7.29	3	Horizontal	300	3.00	-	37.10			
AV	4.87968G	32.32	54.00	-21.68	7.30	3	Horizontal	300	3.00	-	25.02			
PK	7.31096G	48.75	74.00	-25.25	10.54	3	Horizontal	22	1.08	-	38.21			
AV	7.32536G	36.60	54.00	-17.40	10.59	3	Horizontal	22	1.08	-	26.01			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

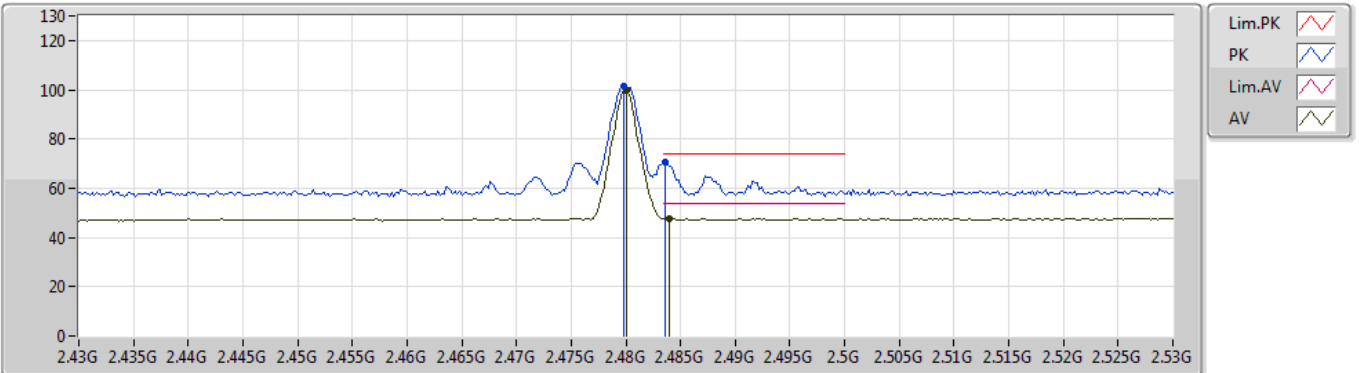


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.4798G	101.31	Inf	-Inf	31.39	3	Vertical	4	2.29	-	69.92			
AV	2.48G	99.83	Inf	-Inf	31.39	3	Vertical	4	2.29	-	68.44			
PK	2.4836G	70.36	74.00	-3.64	31.39	3	Vertical	4	2.29	-	38.97			
AV	2.484G	47.75	54.00	-6.25	31.39	3	Vertical	4	2.29	-	16.36			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

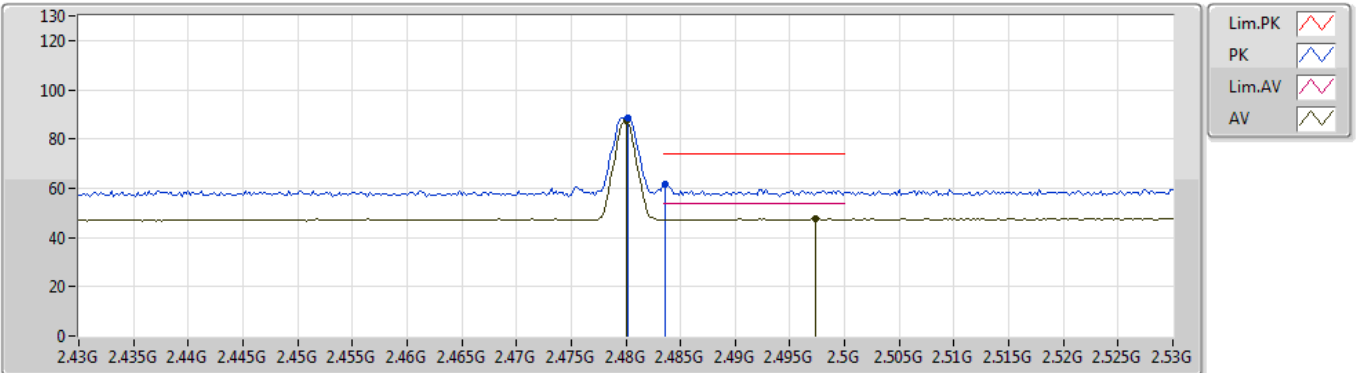


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.4802G	88.66	Inf	-Inf	31.39	3	Horizontal	204	2.93	-	57.27
AV	2.48G	87.17	Inf	-Inf	31.39	3	Horizontal	204	2.93	-	55.78
PK	2.4836G	61.44	74.00	-12.56	31.39	3	Horizontal	204	2.93	-	30.05
AV	2.4974G	47.64	54.00	-6.36	31.43	3	Horizontal	204	2.93	-	16.21

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

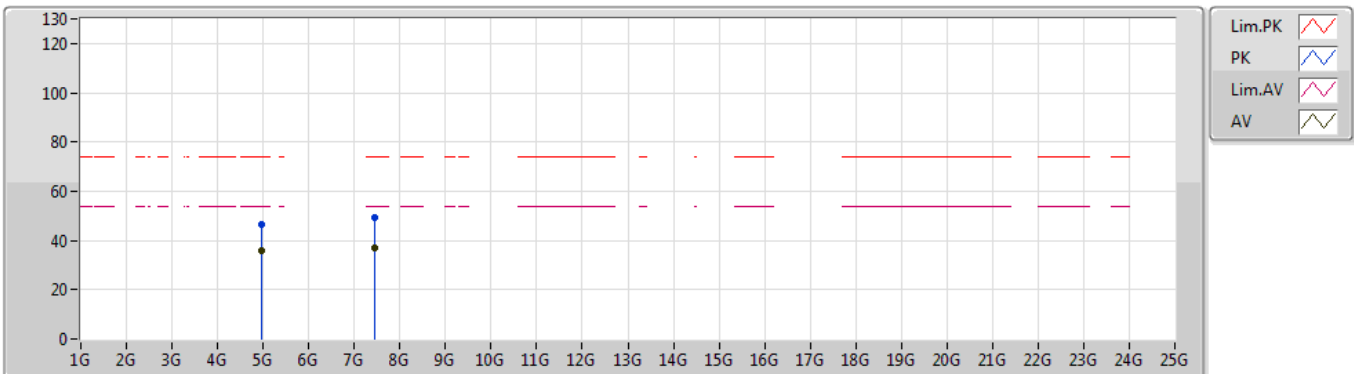


EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.95932G	46.26	74.00	-27.74	7.48	3	Vertical	112	2.20	-	38.78			
AV	4.95946G	35.62	54.00	-18.38	7.48	3	Vertical	112	2.20	-	28.14			
PK	7.44364G	49.21	74.00	-24.79	10.91	3	Vertical	120	1.14	-	38.30			
AV	7.44048G	36.71	54.00	-17.29	10.90	3	Vertical	120	1.14	-	25.81			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

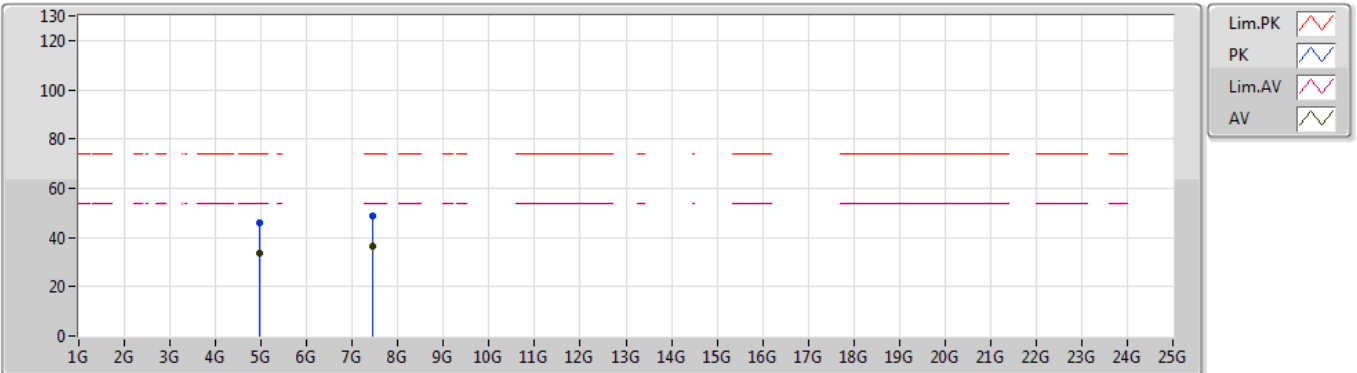

EUT_Z_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.95824G	45.80	74.00	-28.20	7.48	3	Horizontal	159	2.21	-	38.32			
AV	4.95588G	33.64	54.00	-20.36	7.48	3	Horizontal	159	2.21	-	26.16			
PK	7.445G	48.96	74.00	-25.04	10.91	3	Horizontal	191	1.75	-	38.05			
AV	7.43484G	36.29	54.00	-17.71	10.89	3	Horizontal	191	1.75	-	25.40			

**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	2.4835G	70.26	74.00	-3.74	31.39	3	Horizontal	2	2.47	-



BT-LE(1Mbps)

07/10/2019

2402MHz_TX

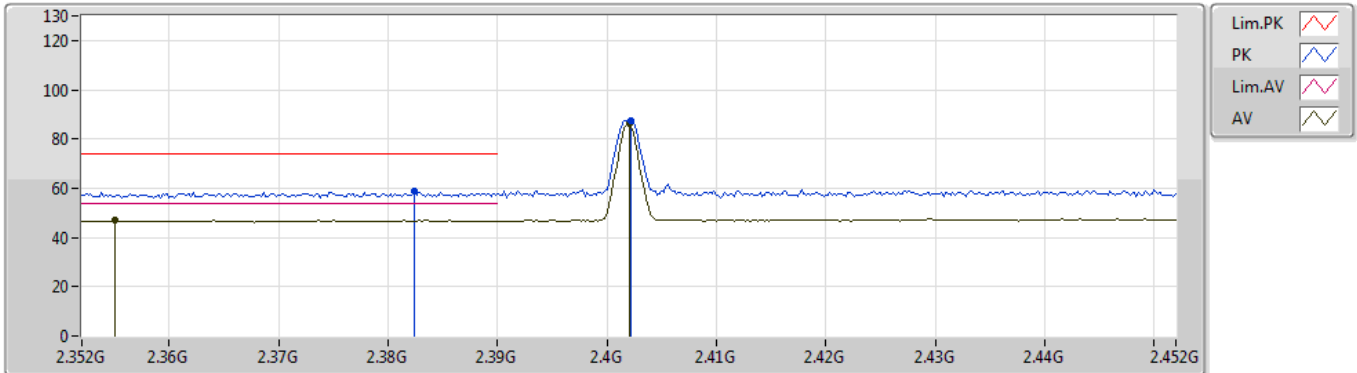


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.3824G	58.91	74.00	-15.09	31.19	3	Vertical	223	2.89	-	27.72			
AV	2.355G	47.11	54.00	-6.89	31.12	3	Vertical	223	2.89	-	15.99			
PK	2.4022G	87.61	Inf	-Inf	31.23	3	Vertical	223	2.89	-	56.38			
AV	2.402G	86.12	Inf	-Inf	31.23	3	Vertical	223	2.89	-	54.89			

BT-LE(1Mbps)

07/10/2019

2402MHz_TX

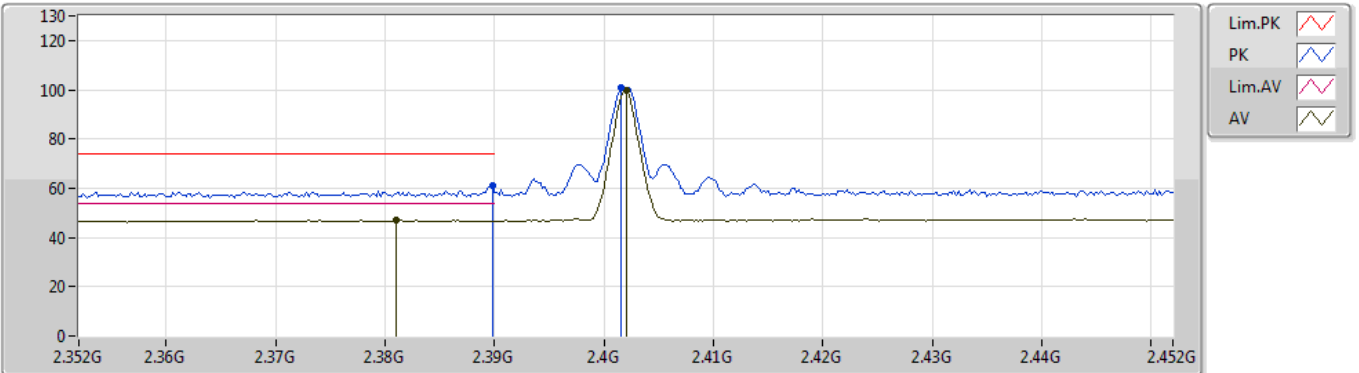


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.3898G	60.92	74.00	-13.08	31.20	3	Horizontal	10	2.89	-	29.72			
AV	2.381G	46.96	54.00	-7.04	31.19	3	Horizontal	10	2.89	-	15.77			
PK	2.4016G	100.97	Inf	-Inf	31.23	3	Horizontal	10	2.89	-	69.74			
AV	2.402G	99.49	Inf	-Inf	31.23	3	Horizontal	10	2.89	-	68.26			

BT-LE(1Mbps)

07/10/2019

2402MHz_TX

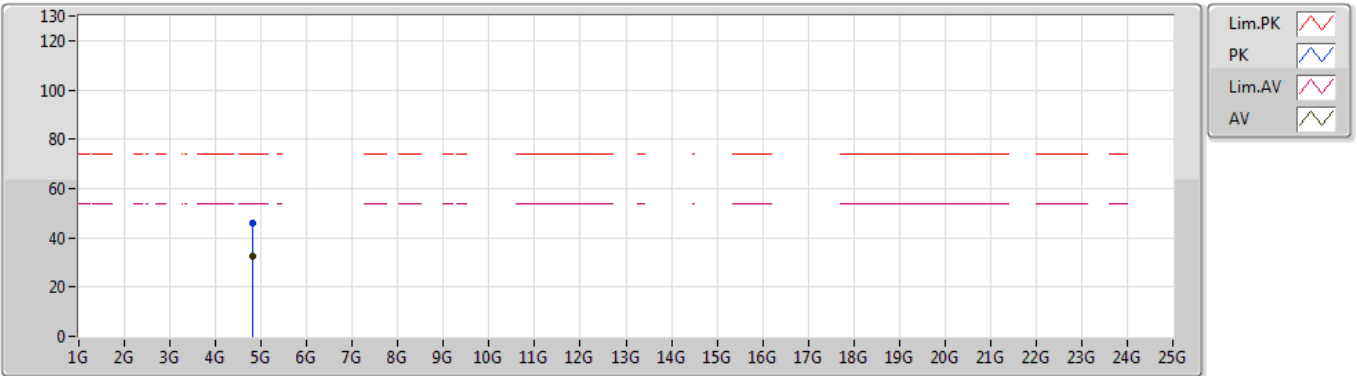


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.79956G	45.94	74.00	-28.06	7.11	3	Vertical	17	1.30	-	38.83			
AV	4.8042G	32.56	54.00	-21.44	7.12	3	Vertical	17	1.30	-	25.44			

BT-LE(1Mbps)

07/10/2019

2402MHz_TX

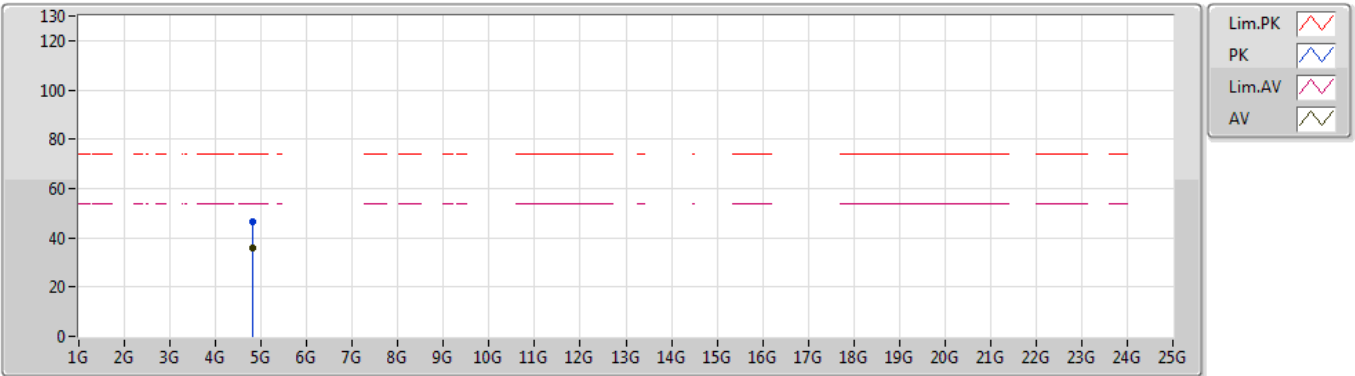


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.80332G	46.58	74.00	-27.42	7.12	3	Horizontal	106	1.31	-	39.46			
AV	4.80351G	35.76	54.00	-18.24	7.12	3	Horizontal	106	1.31	-	28.64			

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

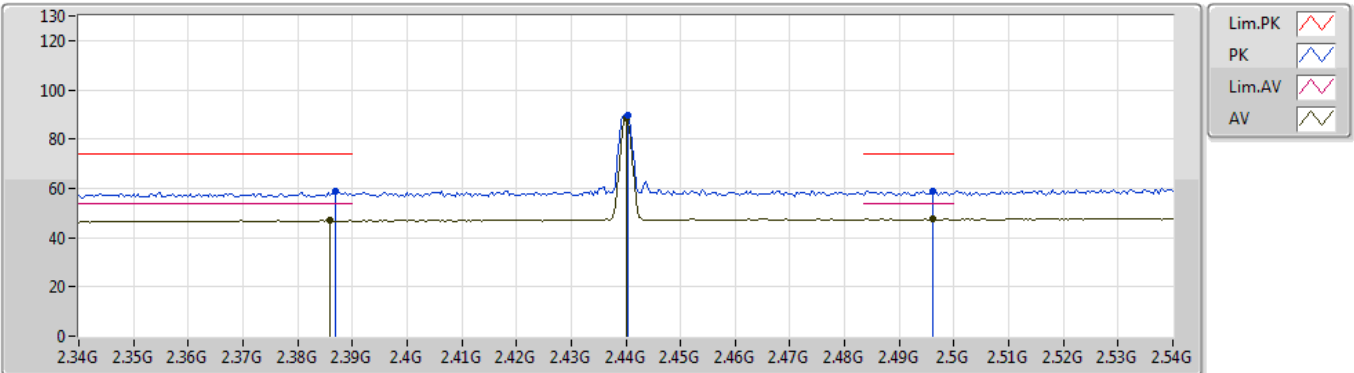


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.3868G	58.68	74.00	-15.32	31.20	3	Vertical	240	2.89	-	27.48			
AV	2.386G	47.06	54.00	-6.94	31.19	3	Vertical	240	2.89	-	15.87			
PK	2.4404G	89.89	Inf	-Inf	31.31	3	Vertical	240	2.89	-	58.58			
AV	2.44G	88.45	Inf	-Inf	31.31	3	Vertical	240	2.89	-	57.14			
PK	2.496G	59.09	74.00	-14.91	31.42	3	Vertical	240	2.89	-	27.67			
AV	2.496G	47.59	54.00	-6.41	31.42	3	Vertical	240	2.89	-	16.17			

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

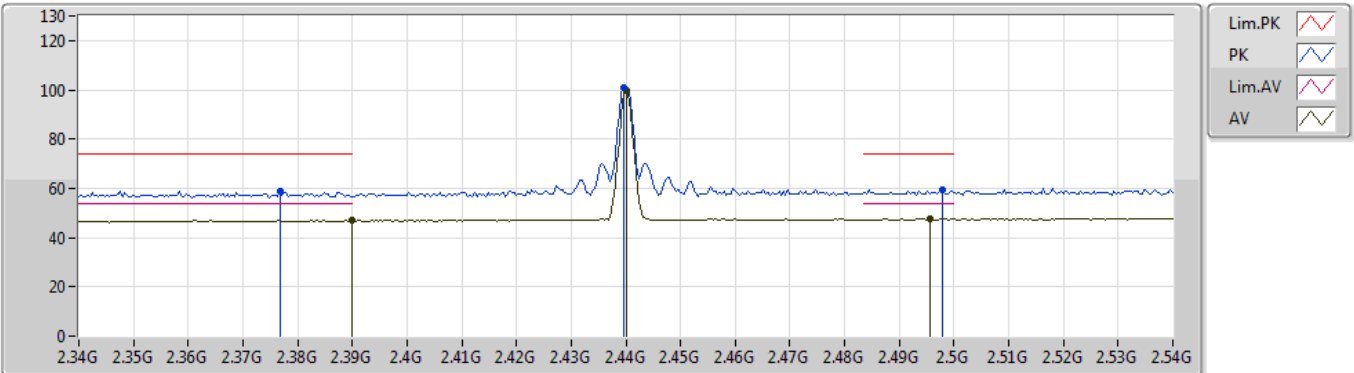


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	2.3768G	59.04	74.00	-14.96	31.17	3	Horizontal	3	2.82	-	27.87
AV	2.39G	47.06	54.00	-6.94	31.20	3	Horizontal	3	2.82	-	15.86
PK	2.4396G	101.13	Inf	-Inf	31.31	3	Horizontal	3	2.82	-	69.82
AV	2.44G	99.71	Inf	-Inf	31.31	3	Horizontal	3	2.82	-	68.40
PK	2.498G	59.46	74.00	-14.54	31.43	3	Horizontal	3	2.82	-	28.03
AV	2.4956G	47.57	54.00	-6.43	31.42	3	Horizontal	3	2.82	-	16.15

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

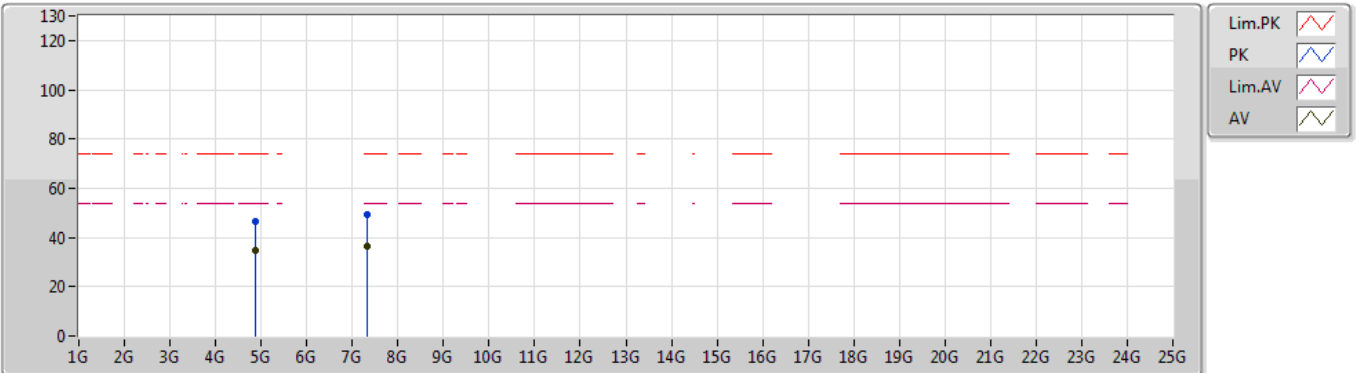


EUT X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.87937G	46.49	74.00	-27.51	7.30	3	Vertical	154	1.27	-	39.19			
AV	4.87964G	34.55	54.00	-19.45	7.30	3	Vertical	154	1.27	-	27.25			
PK	7.31847G	49.21	74.00	-24.79	10.57	3	Vertical	328	2.33	-	38.64			
AV	7.32158G	36.65	54.00	-17.35	10.59	3	Vertical	328	2.33	-	26.06			

BT-LE(1Mbps)

07/10/2019

2440MHz_TX

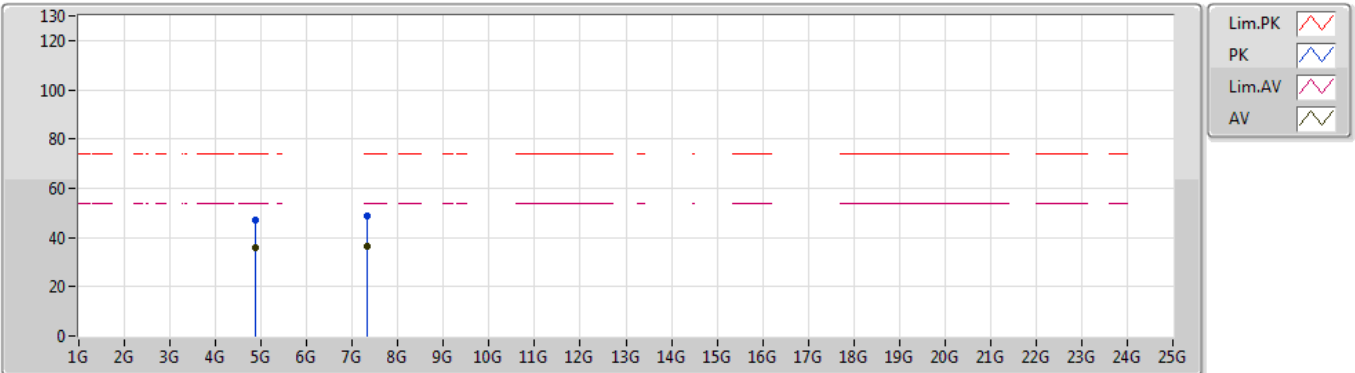


EUT_X_1TX
Setting Default
02-W-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.88028G	47.07	74.00	-26.93	7.30	3	Horizontal	117	1.55	-	39.77			
AV	4.87949G	36.04	54.00	-17.96	7.30	3	Horizontal	117	1.55	-	28.74			
PK	7.31991G	48.97	74.00	-25.03	10.57	3	Horizontal	291	1.65	-	38.40			
AV	7.31862G	36.69	54.00	-17.31	10.57	3	Horizontal	291	1.65	-	26.12			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

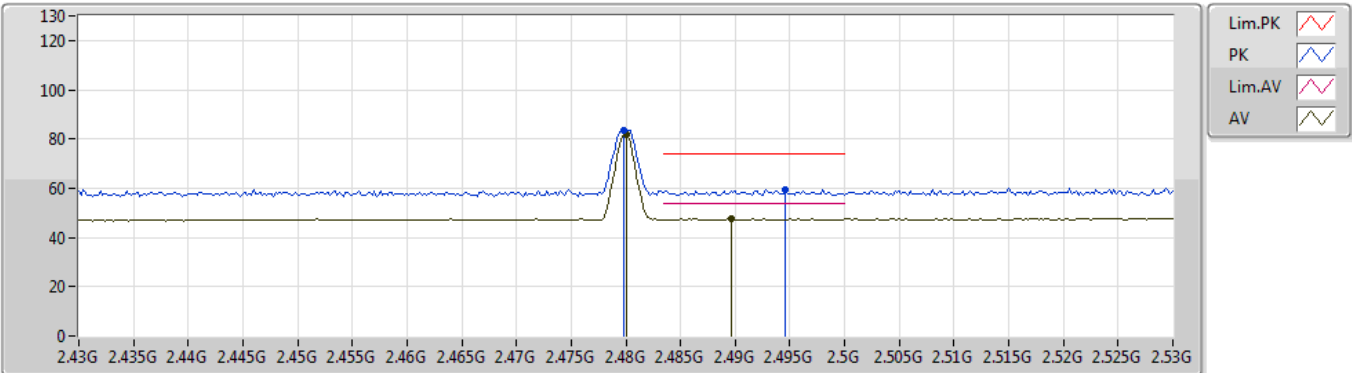


EUT X_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.4798G	83.57	Inf	-Inf	31.39	3	Vertical	179	2.53	-	52.18			
AV	2.48G	82.03	Inf	-Inf	31.39	3	Vertical	179	2.53	-	50.64			
PK	2.4946G	59.44	74.00	-14.56	31.42	3	Vertical	179	2.53	-	28.02			
AV	2.4896G	47.52	54.00	-6.48	31.41	3	Vertical	179	2.53	-	16.11			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

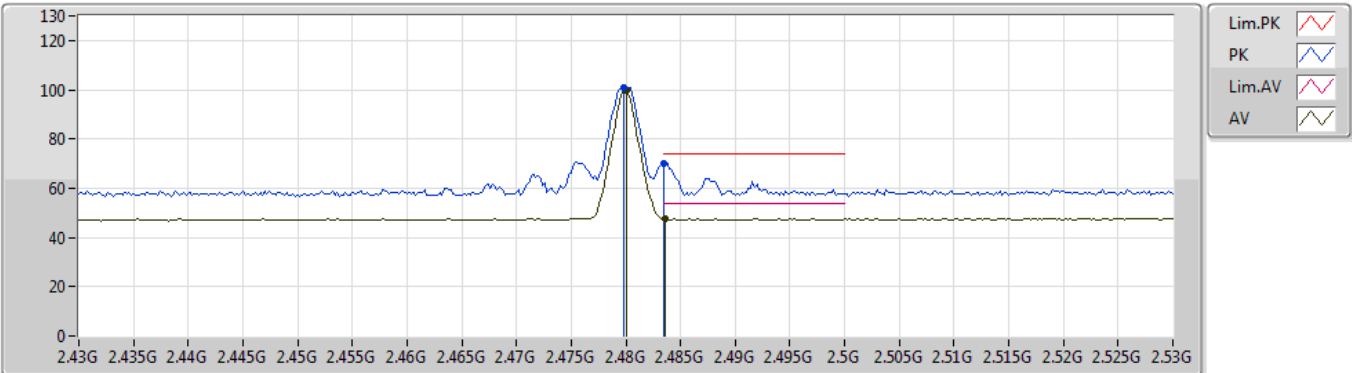


EUT X_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	2.4798G	101.11	Inf	-Inf	31.39	3	Horizontal	2	2.47	-	69.72			
AV	2.48G	99.60	Inf	-Inf	31.39	3	Horizontal	2	2.47	-	68.21			
PK	2.4835G	70.26	74.00	-3.74	31.39	3	Horizontal	2	2.47	-	38.87			
AV	2.4836G	47.68	54.00	-6.32	31.39	3	Horizontal	2	2.47	-	16.29			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

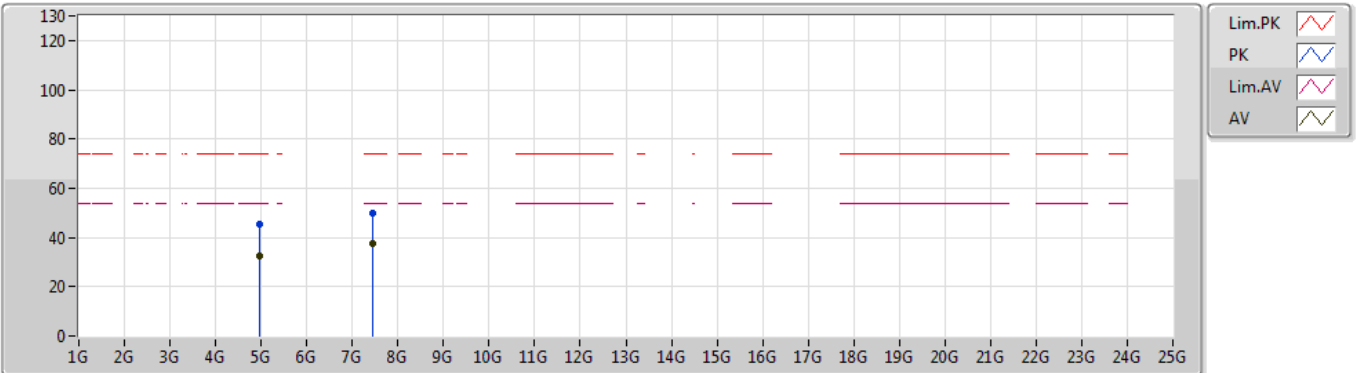


EUT X_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.96752G	45.20	74.00	-28.80	7.50	3	Vertical	103	1.52	-	37.70			
AV	4.96644G	32.45	54.00	-21.55	7.50	3	Vertical	103	1.52	-	24.95			
PK	7.43684G	49.70	74.00	-24.30	10.89	3	Vertical	76	2.53	-	38.81			
AV	7.44812G	37.38	54.00	-16.62	10.92	3	Vertical	76	2.53	-	26.46			

BT-LE(1Mbps)

07/10/2019

2480MHz_TX

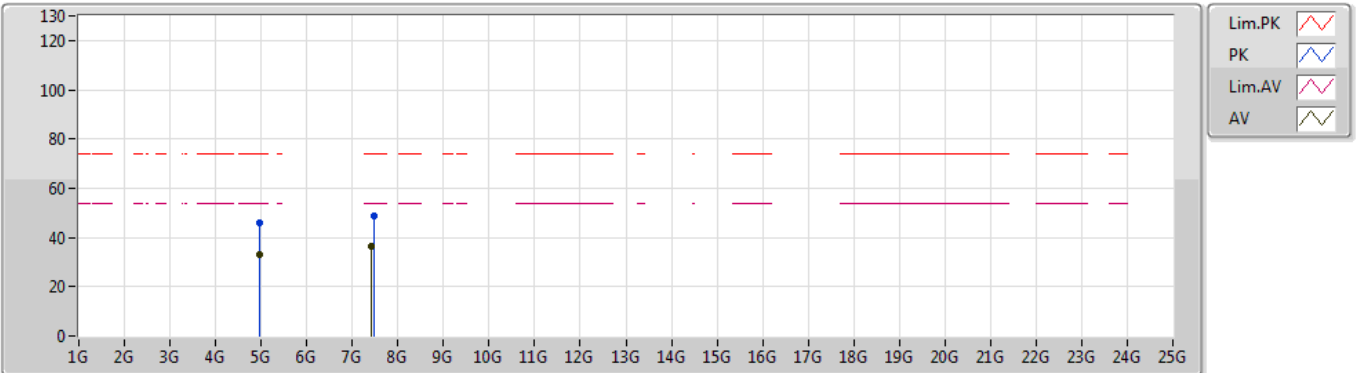

EUT X_1TX
Setting Default
02-G-3
FSU(100015)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)			
PK	4.9666G	45.78	74.00	-28.22	7.50	3	Horizontal	172	1.17	-	38.28			
AV	4.96024G	32.90	54.00	-21.10	7.48	3	Horizontal	172	1.17	-	25.42			
PK	7.478G	48.93	74.00	-25.07	11.00	3	Horizontal	218	2.07	-	37.93			
AV	7.4252G	36.58	54.00	-17.42	10.86	3	Horizontal	218	2.07	-	25.72			