



**Extreme  
AP5060D  
DVT**

# **ANTs Measurement Report**

2025/09/05



# Content

## ■ Summary

- General Information
  - Summary of Antenna Type
  - Test Information
    - Test Equipment
    - Test Procedure
    - Setup Picture
- DVT Antenna Measurement Summary
- Result Table of Antenna Measurement
  - 2D Radiation Pattern & Isolation

## ■ Antenna Result

- Peak Gain
- Radiation Pattern
- Isolation
  - Within Radio
  - Among Radio

## ■ Antenna List

- 2G0~3
- 5GW0~3
- 5GN0~3
- 56GW0~3
- 56GN0~4
- 6GW0~3
- 6GN0~3
- SC0,SC1
- BLE0~2
- GPS

# General Information

## ■ Antenna Information:

— Antenna type and part number :

Show as next page, Summary of Antenna Type

— Brand: WNC

20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

## ■ Test Date and Member

Date: 2025/07/28

Member: Alvin Hsu

# Summary of Antenna Type

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G19    | Patch        | 2G0  |
|       |                 |              | 2G1  |
| WNC   | 95XPAM15.G20    | Patch        | 2G2  |
|       |                 |              | 2G3  |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G21    | Patch        | 5GW0 |
|       |                 |              | 5GW1 |
| WNC   | 95XPAM15.G22    | Patch        | 5GW2 |
|       |                 |              | 5GW3 |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G23    | Patch        | 5GN0 |
|       |                 |              | 5GN1 |
| WNC   | 95XPAM15.G23    | Patch        | 5GN2 |
|       |                 |              | 5GN3 |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G35    | Dipole       | SC0  |
| WNC   | 95XPAM15.G36    | Dipole       | SC1  |

| Brand | WNC Part Number | Antenna Type | Ant.  |
|-------|-----------------|--------------|-------|
| WNC   | 95XPAM15.G25    | Patch        | 56GW0 |
| WNC   | 95XPAM15.G26    | Patch        | 56GW1 |
| WNC   | 95XPAM15.G27    | Patch        | 56GW2 |
| WNC   | 95XPAM15.G28    | Patch        | 56GW3 |

| Brand | WNC Part Number | Antenna Type | Ant.  |
|-------|-----------------|--------------|-------|
| WNC   | 95XPAM15.G29    | Patch        | 56GN0 |
|       |                 |              | 56GN1 |
| WNC   | 95XPAM15.G29    | Patch        | 56GN2 |
|       |                 |              | 56GN3 |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G37    | PIFA         | BLE0 |
| WNC   | 95XPAM15.G38    | PIFA         | BLE1 |
| WNC   | 95XPAM15.G39    | PIFA         | BLE2 |


| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G31    | Patch        | 6GW0 |
|       |                 |              | 6GW1 |
| WNC   | 95XPAM15.G32    | Patch        | 6GW2 |
|       |                 |              | 6GW3 |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G33    | Patch        | 6GN0 |
|       |                 |              | 6GN1 |
| WNC   | 95XPAM15.G34    | Patch        | 6GN2 |
|       |                 |              | 6GN3 |

| Brand | WNC Part Number | Antenna Type | Ant. |
|-------|-----------------|--------------|------|
| WNC   | 95XPAM15.G40    | PIFA         | GPS  |

# Test Information

- Antenna Vendor : WNC
- Test Date ( yyyymmdd ) : 20250728
- Test Engineer : Alvin Hsu
- Measurement System : SATIMO SG24-L
- Software Name : Wave Studio
- Software Version : 22.5.6

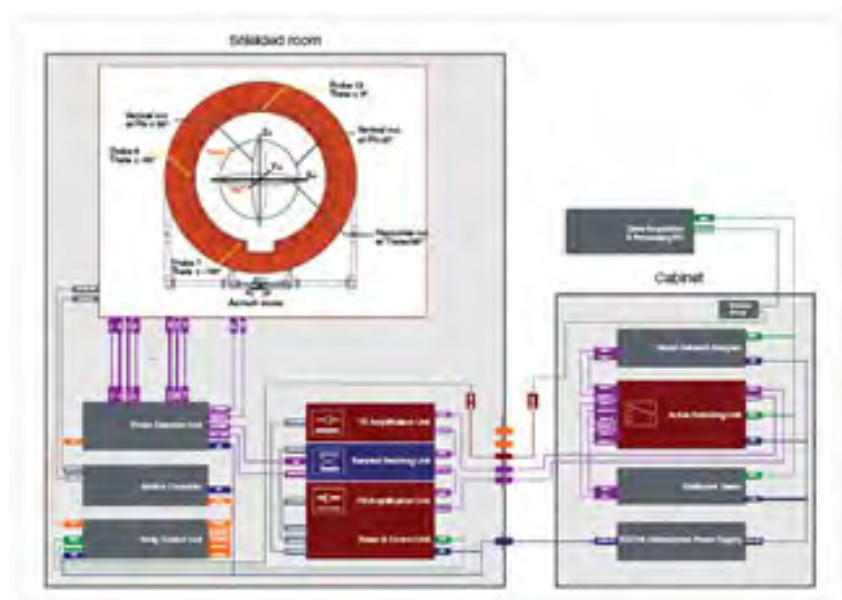

# Test Equipment

- Measurement System: SATIMO SG24-L Chamber

Setup architecture :

SG24-L system :

1. Hardware system ( as Figure.1 )
2. Software system ( Wave Studio )

Test item :

1. Passive radiation properties of antenna

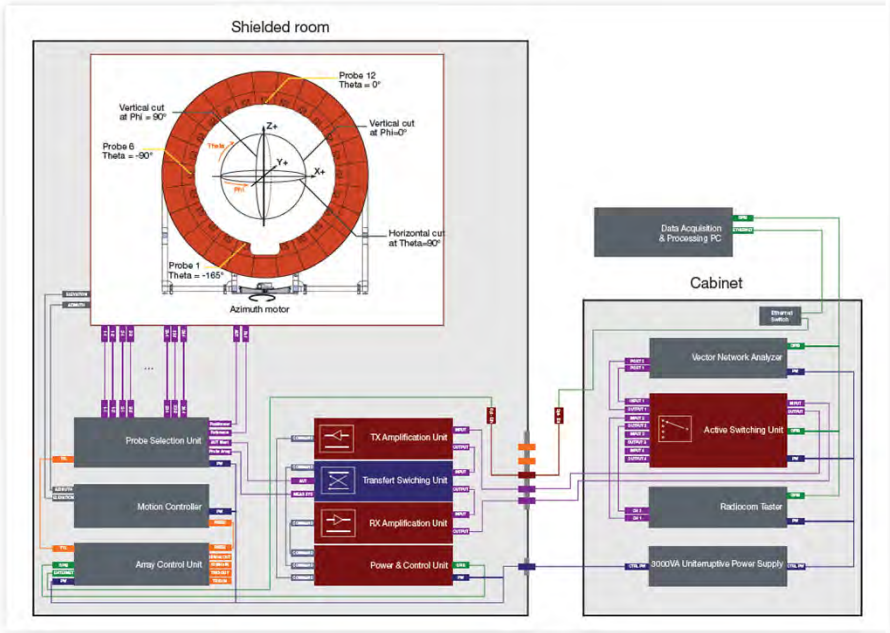



Figure.1 System diagram of SG24-L

- Calibration Information

| Device             | Type / Model    | Serial #   | Manufacture | Cal. Date  | Cal. Until |
|--------------------|-----------------|------------|-------------|------------|------------|
| Measurement System | SG24-L          | HKG1669S   | MVG-SATIMO  | 2024-08-09 | 2025-10-17 |
| Network Analyzer   | Keysight E5080B | MY59203136 | Keysight    | 2024-08-09 | 2025-10-17 |

# Test Procedure

1. Align and fix the DUT in center of the chamber .
2. Connect the DUT with RF connector of test device .
3. Adjust the settings ( name , frequency , dimension ) , and operate the Wave Studio program .
4. Get the 3D data by each 3 degrees one step for phi and theta , including efficiency , peak gain , 2D and 3D radiation pattern .
5. This is near field test for antenna verification .
6. This procedure only for passive mode .

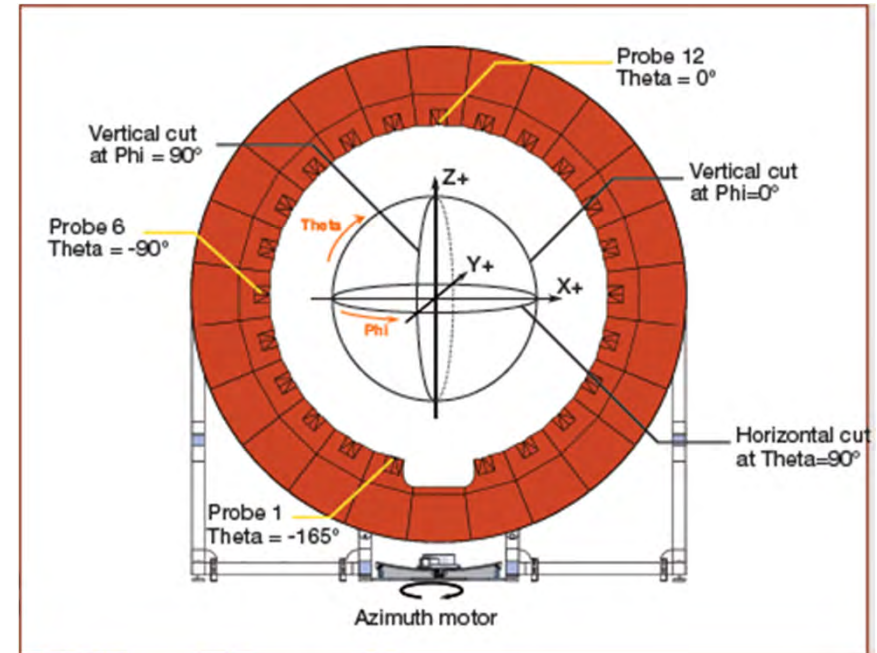

Theta : 0 to 180 degrees

Phi : 0 to 360 degrees

# DVT Antenna Measurement Summary

Base on EVT placement , DVT measure result similar as EVT result .

Antenna of 2G0~3 , 5GW0~3 , 6GW0~3 are metal radiator combine network on PCB , which are similar design as AP5050D .

BLE0~2 , GPS are metal antenna , 56GW0~3 , SC0 and SC1 are PCB antenna , which are located on reflector .

5GN0~3 , 56GN0~3 , and 6GN0~3 are PCB antenna with individual reflector .

Result not including jump cable loss , jump cable loss as below table show .  
SC , BLE and GPS antenna no jump cable .

|                           |             | 2G   | 5GW  | 5GN  | 56GW | 56GN | 6GW  | 6GN  |
|---------------------------|-------------|------|------|------|------|------|------|------|
| Jump cable loss<br>( dB ) | Low band    | 1.83 | 4.24 | 4.42 | 2.94 | 3.02 | 4.25 | 3.91 |
|                           | Middle band | 1.85 | 4.12 | 4.34 | 3.14 | 3.19 | 4.13 | 3.99 |
|                           | High band   | 1.93 | 3.84 | 3.95 | 3.98 | 3.87 | 4.20 | 4.16 |


# Result Table of Antenna Measurement

Composite gain show the max gain of theta and phi


| Radio          |      | Frequency<br>(GHz)                        | Beam Width ( ° )<br>( Composite for Wi-Fi) |                                     | Peak Gain ( dBi )             |                             |         | Isolation<br>(within radio) | Isolation<br>(Among radio)                                                                                                                                                                                                                                                               |
|----------------|------|-------------------------------------------|--------------------------------------------|-------------------------------------|-------------------------------|-----------------------------|---------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |      |                                           | Horizontal<br>( ZX )                       | Vertical<br>( ZY )                  | Single<br>antenna             | Composite<br>( Wi-Fi Radio) |         |                             |                                                                                                                                                                                                                                                                                          |
| Wi-Fi          | 2G   | 2.4 - 2.5                                 | 75°                                        | 69°                                 | 7.9 dBi                       | 10.1 dBi                    | @ theta | 21 dB                       | <b>Wi-Fi 5GW to Wi-Fi 56GW :</b><br>30 dB @ 5-7 GHz<br><b>Wi-Fi 5GW to Wi-Fi 6GW :</b><br>30 dB @ 5-7GHz<br><b>Wi-Fi 56GW to Wi-Fi 6GW :</b><br>30 dB @ 5-7GHz<br><b>GPS to Wide Radio<br/>( including 2G , BLE , SC ) :</b><br>20 dB @ L5 ; 23 dB @ L1<br>22 dB @ 2GHz ; 23 dB @ 5-7GHz |
|                | 5GW  | 5.15 – 5.85                               | 57°                                        | 69°                                 | 7.6 dBi                       | 10.1 dBi                    | @ phi   | 25 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 5GN  | 5.15 – 5.85                               | 21°                                        | 66°                                 | 10.2 dBi                      | 14.7 dBi                    | @ theta | 20 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 56GW | 5.15 - 5.35                               | 69°                                        | 72°                                 | 7.7 dBi                       | 9.6 dBi                     | @ phi   | 33 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 56GN | 5.15 - 5.35                               | 18°                                        | 63°                                 | 10.8 dBi                      | 14.7 dBi                    | @ theta | 20 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 56GW | 6.525-7.125                               | 63°                                        | 69°                                 | 7.5 dBi                       | 10.2 dBi                    | @ phi   | 37 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 56GN | 6.525-7.125                               | 18°                                        | 69°                                 | 11.0 dBi                      | 14.1 dBi                    | @ phi   | 20 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 6GW  | 5.925-7.125                               | 69°                                        | 66°                                 | 6.1 dBi                       | 8.7 dBi                     | @ theta | 20 dB                       |                                                                                                                                                                                                                                                                                          |
|                | 6GN  | 5.925-7.125                               | 18°                                        | 60°                                 | 11.1 dBi                      | 14.3 dBi                    | @ theta | 20 dB                       |                                                                                                                                                                                                                                                                                          |
| Scanning       |      | 2.4 – 2.5<br>5.15 – 5.85<br>5.925 – 7.125 | 69° / 66°<br>66° / 54°<br>66° / 66°        | 60° / 72°<br>51° / 72°<br>63° / 66° | 8.2 dBi<br>8.1 dBi<br>8.8 dBi | NA                          |         | 31 dB<br>35 dB<br>37 dB     | <b>Wi-Fi 5GN to Wi-Fi 56GN :</b><br>39 dB @ 5-7 GHz<br><b>Wi-Fi 5GN to Wi-Fi 6GN :</b><br>30 dB @ 5-7GHz<br><b>Wi-Fi 56GN to Wi-Fi 6GN :</b><br>30 dB @ 5-7GHz<br><b>GPS to Narrow Radio :</b><br>20 dB @ L5 ; 29 dB @ L1<br>37 dB @ 2GHz ; 31 dB @ 5-7GHz                               |
| BLE / 802.15.4 |      | 2.4-2.5                                   | Omni                                       |                                     | 5.3 dBi                       | NA                          |         | 31 dB                       |                                                                                                                                                                                                                                                                                          |
| GPS            |      | 1.16-1.19<br>1.56-1.59                    | Omni                                       |                                     | 3.4 dBi                       | NA                          |         | NA                          |                                                                                                                                                                                                                                                                                          |

# 2D Radiation Pattern & Isolation @ Wi-Fi 2G

2G

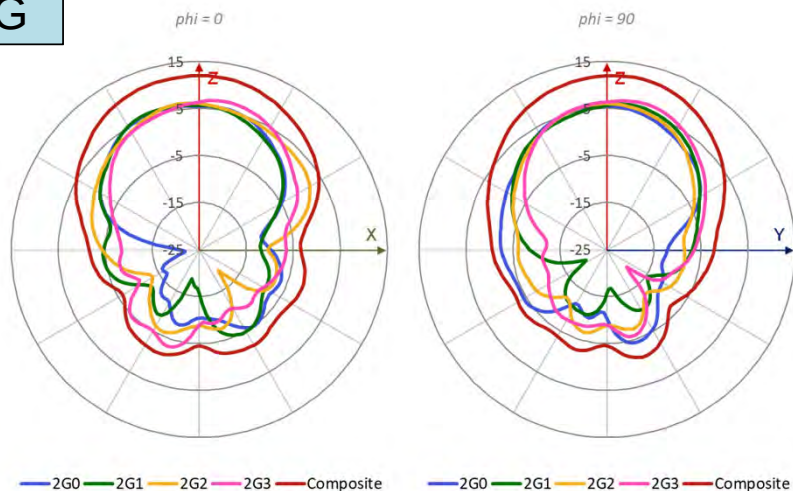


| 2G        | Horizontal BW<br>( $^{\circ}$ ) | Vertical BW<br>( $^{\circ}$ ) | Peak Gain<br>(dBi)       |
|-----------|---------------------------------|-------------------------------|--------------------------|
| 2G0       | 75 $^{\circ}$                   | 69 $^{\circ}$                 | 6.8 dBi                  |
| 2G1       | 66 $^{\circ}$                   | 72 $^{\circ}$                 | 7.3 dBi                  |
| 2G2       | 78 $^{\circ}$                   | 66 $^{\circ}$                 | 7.0 dBi                  |
| 2G3       | 66 $^{\circ}$                   | 63 $^{\circ}$                 | 7.9 dBi                  |
| Composite | 75 $^{\circ}$                   | 69 $^{\circ}$                 | 10.1 dBi<br>@ Gain theta |

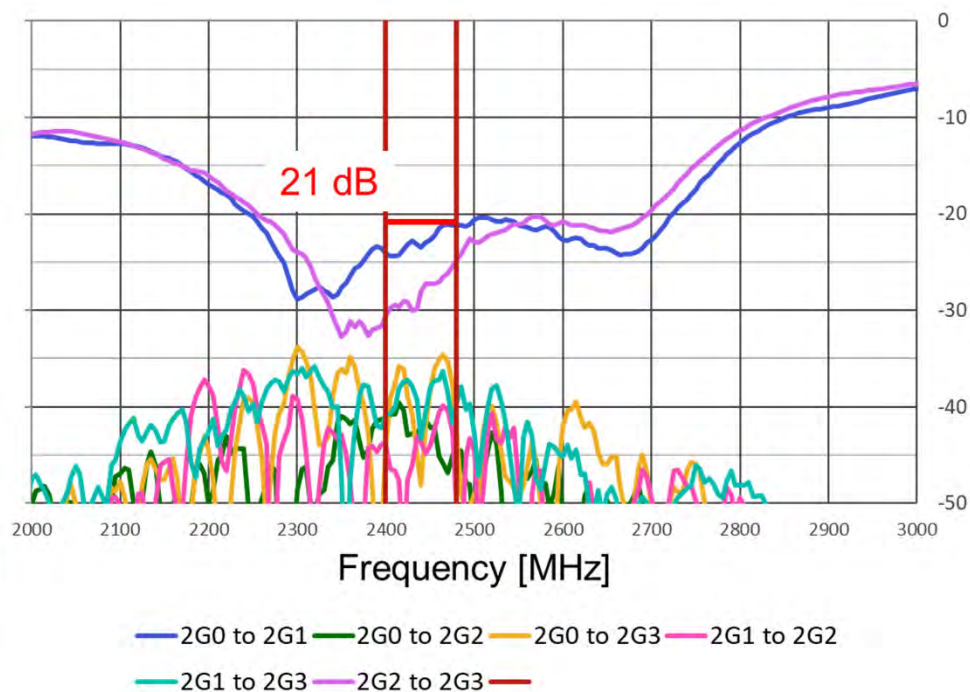


Jump cable loss : 1.83 dB

# 2D Radiation Pattern & Isolation @ Wi-Fi 5GW

5G

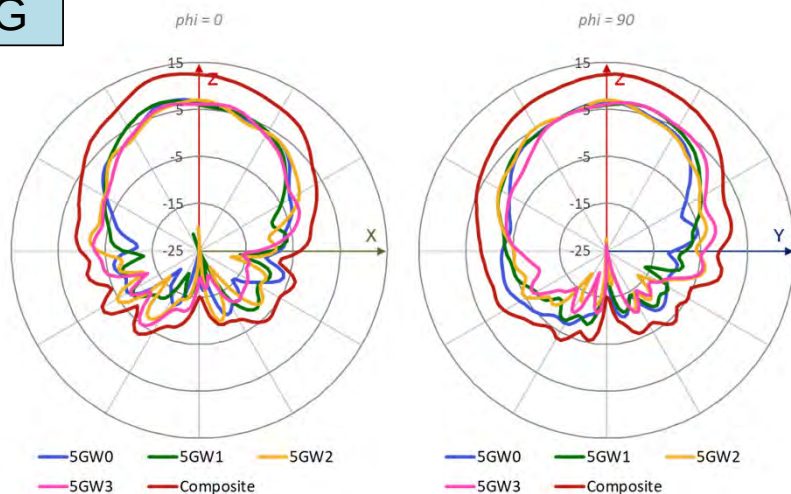


| 5GW       | Horizontal BW<br>( $^{\circ}$ ) | Vertical BW<br>( $^{\circ}$ ) | Peak Gain<br>(dBi)     |
|-----------|---------------------------------|-------------------------------|------------------------|
| 5GW0      | 51 $^{\circ}$                   | 66 $^{\circ}$                 | 7.4 dBi                |
| 5GW1      | 60 $^{\circ}$                   | 69 $^{\circ}$                 | 7.6 dBi                |
| 5GW2      | 51 $^{\circ}$                   | 63 $^{\circ}$                 | 7.0 dBi                |
| 5GW3      | 57 $^{\circ}$                   | 75 $^{\circ}$                 | 7.5 dBi                |
| Composite | 57 $^{\circ}$                   | 69 $^{\circ}$                 | 10.1 dBi<br>@ Gain phi |

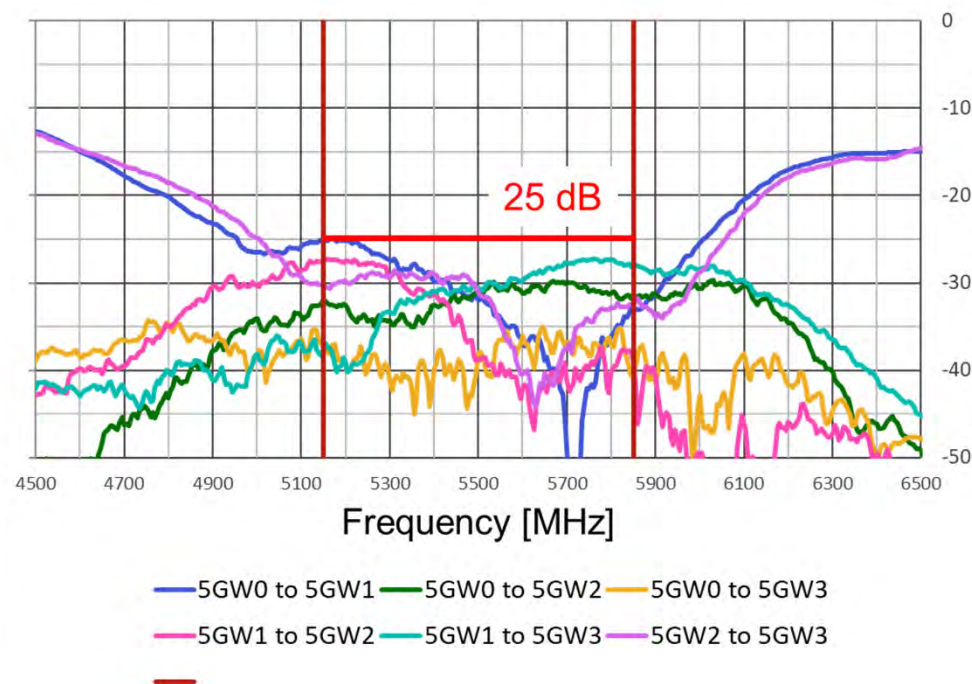


Jump cable loss : 3.84 dB

# 2D Radiation Pattern & Isolation @ Wi-Fi 5GN

5G

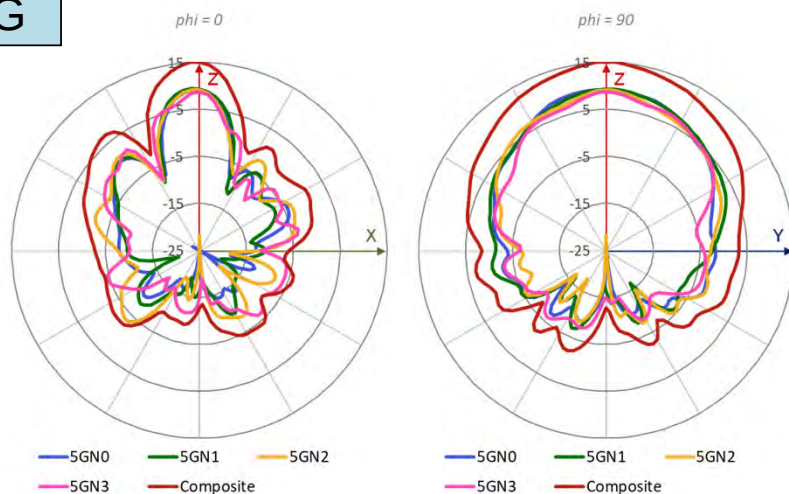



| 5GN       | Horizontal BW<br>( $^{\circ}$ ) | Vertical BW<br>( $^{\circ}$ ) | Peak Gain<br>(dBi)       |
|-----------|---------------------------------|-------------------------------|--------------------------|
| 5GN0      | 18 $^{\circ}$                   | 63 $^{\circ}$                 | 10.1 dBi                 |
| 5GN1      | 21 $^{\circ}$                   | 63 $^{\circ}$                 | 10.1 dBi                 |
| 5GN2      | 21 $^{\circ}$                   | 66 $^{\circ}$                 | 10.2 dBi                 |
| 5GN3      | 21 $^{\circ}$                   | 66 $^{\circ}$                 | 10.1 dBi                 |
| Composite | 21 $^{\circ}$                   | 66 $^{\circ}$                 | 14.7 dBi<br>@ Gain theta |

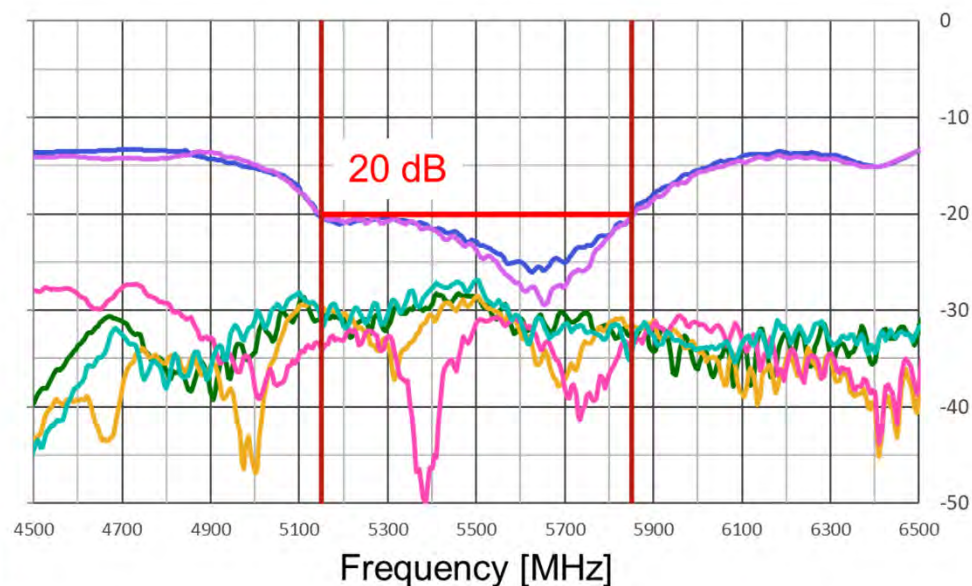

Jump cable loss : 3.95 dB

# 2D Radiation Pattern & Isolation @ Wi-Fi 56GW


5G

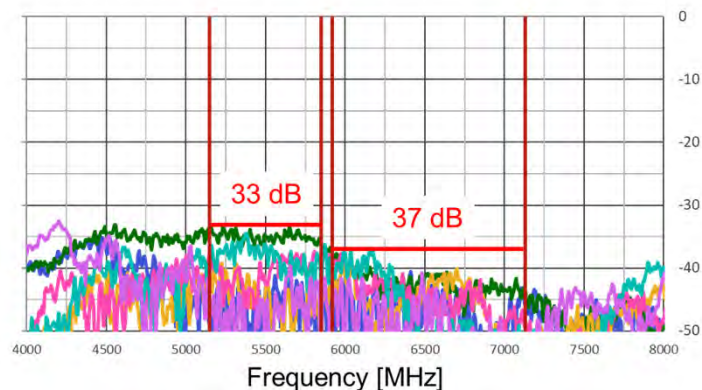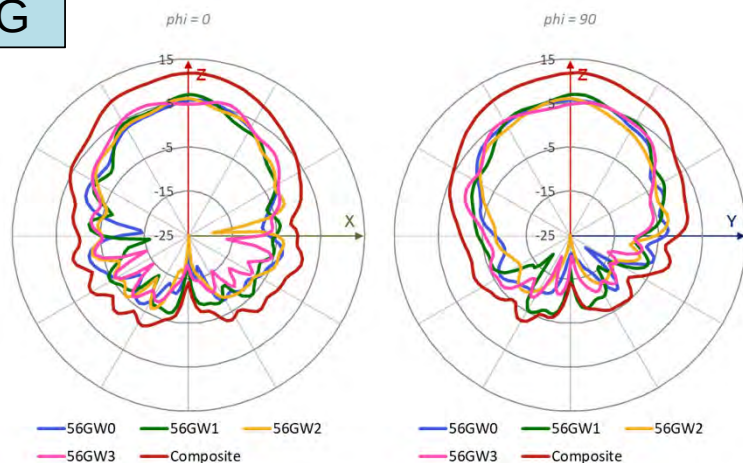

56GW0 to 56GW1 56GW0 to 56GW2 56GW0 to 56GW3  
56GW1 to 56GW2 56GW1 to 56GW3 56GW2 to 56GW3

Jump cable loss :  
2.94 dB



6G

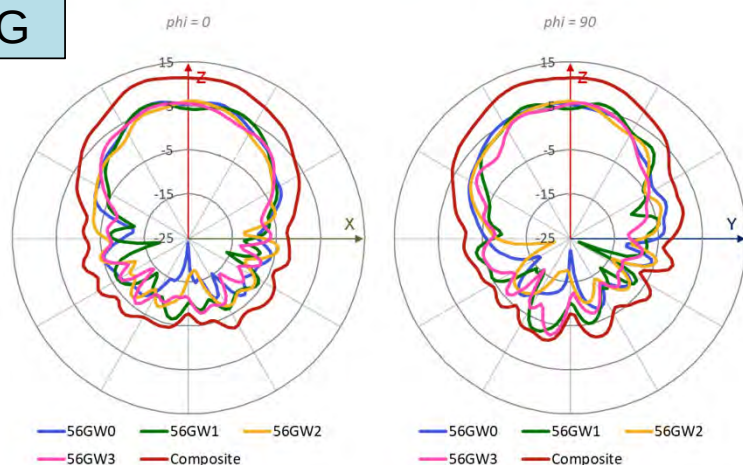

| 5G / 6G   | H BW<br>(°) | V BW<br>(°) | Peak Gain<br>(dBi)                 |
|-----------|-------------|-------------|------------------------------------|
| 56GW0     | 63° / 60°   | 75° / 75°   | 6.4 / 7.4 dBi                      |
| 56GW1     | 51° / 69°   | 66° / 60°   | 7.3 / 7.5 dBi                      |
| 56GW2     | 66° / 54°   | 54° / 60°   | 6.1 / 6.3 dBi                      |
| 56GW3     | 72° / 66°   | 75° / 60°   | 7.7 / 6.8 dBi                      |
| Composite | 69° / 63°   | 72° / 69°   | 9.6 / 10.2 dBi<br>@ Gain phi / phi |


# 2D Radiation Pattern & Isolation @ Wi-Fi 56GN

5G

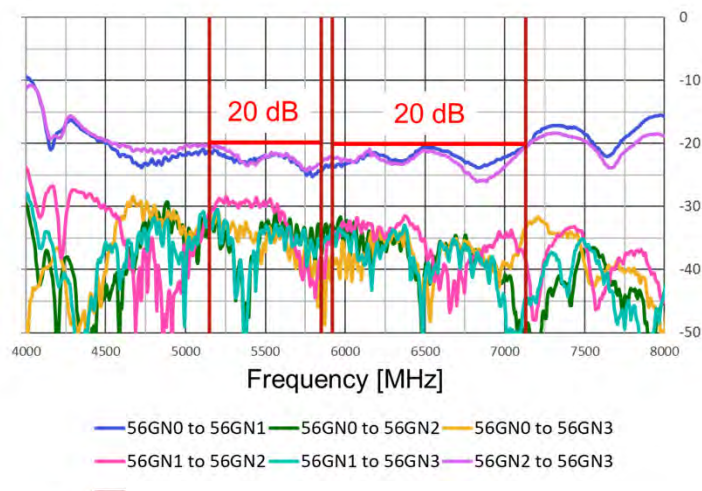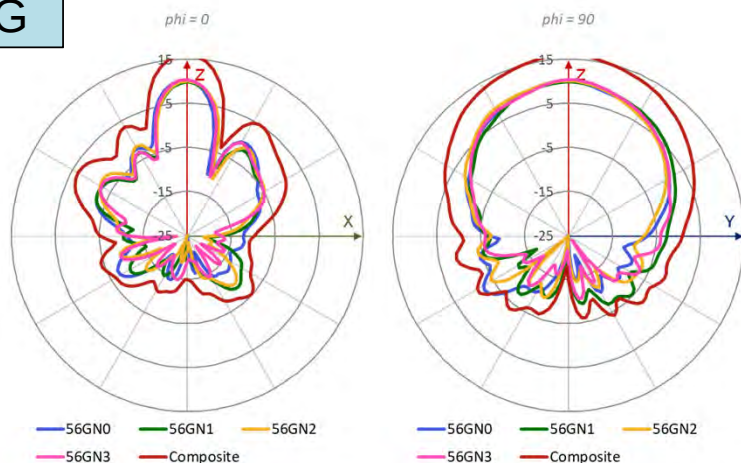

Jump cable loss :  
3.02 dB


6G

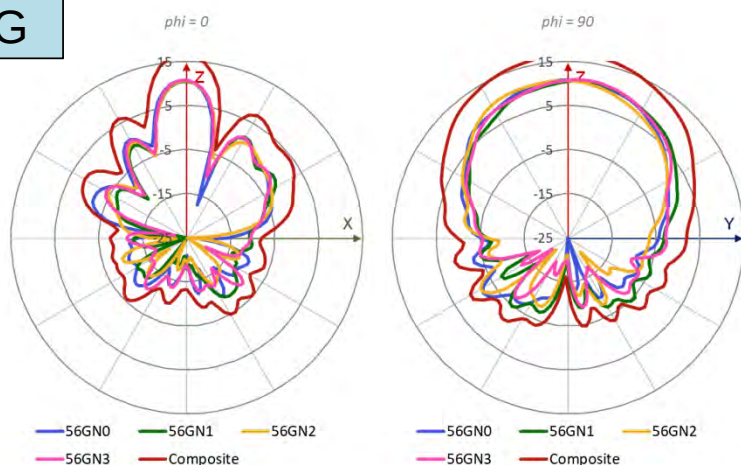


| 5G / 6G   | H BW<br>(°) | V BW<br>(°) | Peak Gain<br>(dBi)                    |
|-----------|-------------|-------------|---------------------------------------|
| 56GN0     | 18° / 18°   | 63° / 69°   | 10.6 / 10.9 dBi                       |
| 56GN1     | 21° / 18°   | 66° / 66°   | 10.3 / 10.8 dBi                       |
| 56GN2     | 21° / 18°   | 66° / 69°   | 10.4 / 10.8 dBi                       |
| 56GN3     | 18° / 18°   | 60° / 66°   | 10.8 / 11.0 dBi                       |
| Composite | 18° / 18°   | 63° / 69°   | 14.7 / 14.1 dBi<br>@ Gain theta / phi |

# 2D Radiation Pattern & Isolation @ Wi-Fi 6G

6G

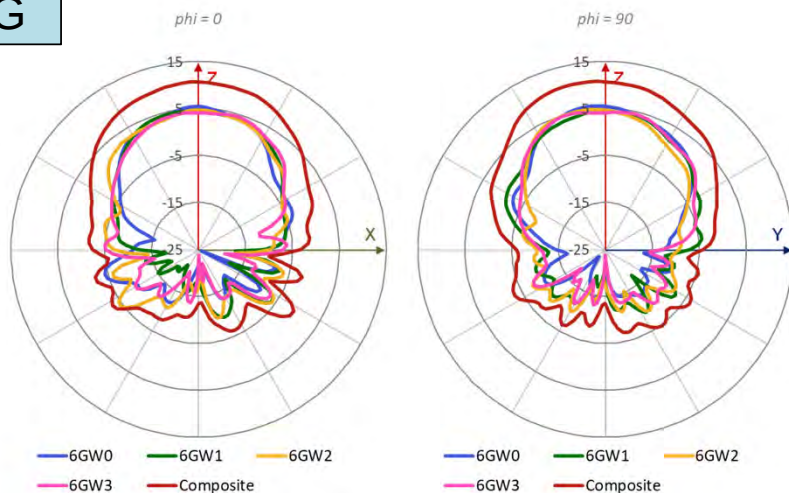


| 6GW       | Horizontal BW<br>( $^{\circ}$ ) | Vertical BW<br>( $^{\circ}$ ) | Peak Gain<br>(dBi)      |
|-----------|---------------------------------|-------------------------------|-------------------------|
| 6GW0      | 60 $^{\circ}$                   | 63 $^{\circ}$                 | 6.1 dBi                 |
| 6GW1      | 72 $^{\circ}$                   | 75 $^{\circ}$                 | 5.6 dBi                 |
| 6GW2      | 75 $^{\circ}$                   | 60 $^{\circ}$                 | 5.5 dBi                 |
| 6GW3      | 75 $^{\circ}$                   | 69 $^{\circ}$                 | 5.4 dBi                 |
| Composite | 69 $^{\circ}$                   | 66 $^{\circ}$                 | 8.7 dBi<br>@ Gain theta |

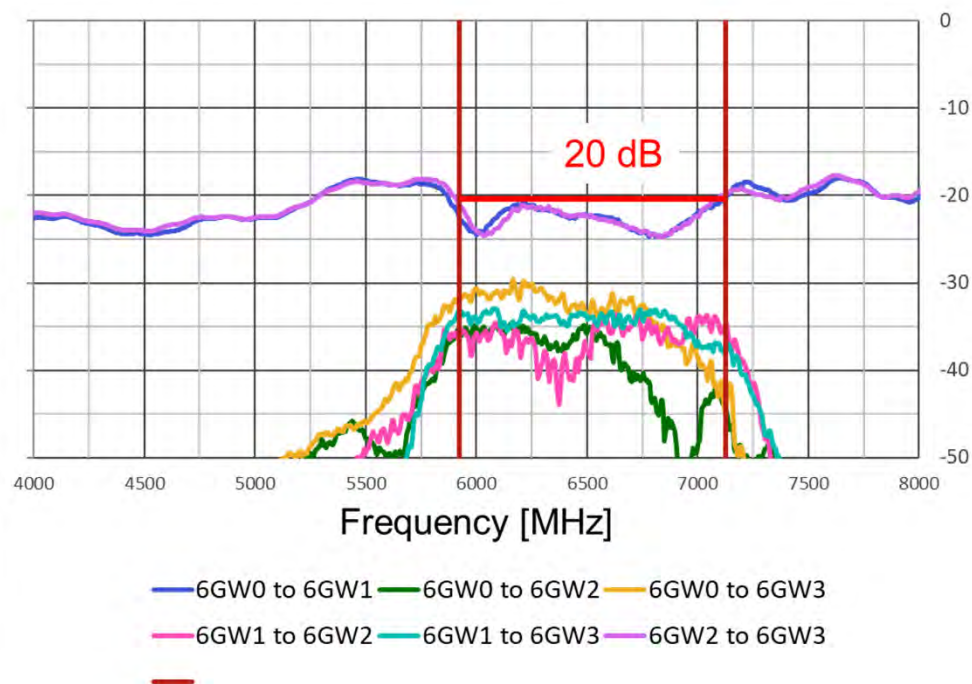


Jump cable loss : 4.13 dB

# 2D Radiation Pattern & Isolation @ Wi-Fi 6GN

6G

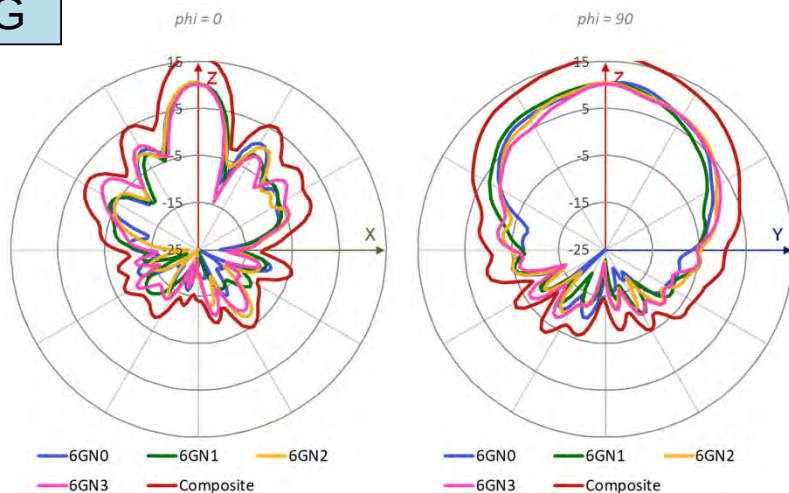


| 6GN       | Horizontal BW (°) | Vertical BW (°) | Peak Gain (dBi)          |
|-----------|-------------------|-----------------|--------------------------|
| 6GN0      | 18°               | 60°             | 11.1 dBi                 |
| 6GN1      | 18°               | 69°             | 10.4 dBi                 |
| 6GN2      | 18°               | 57°             | 10.6 dBi                 |
| 6GN3      | 15°               | 54°             | 10.4 dBi                 |
| Composite | 18°               | 60°             | 14.3 dBi<br>@ Gain theta |

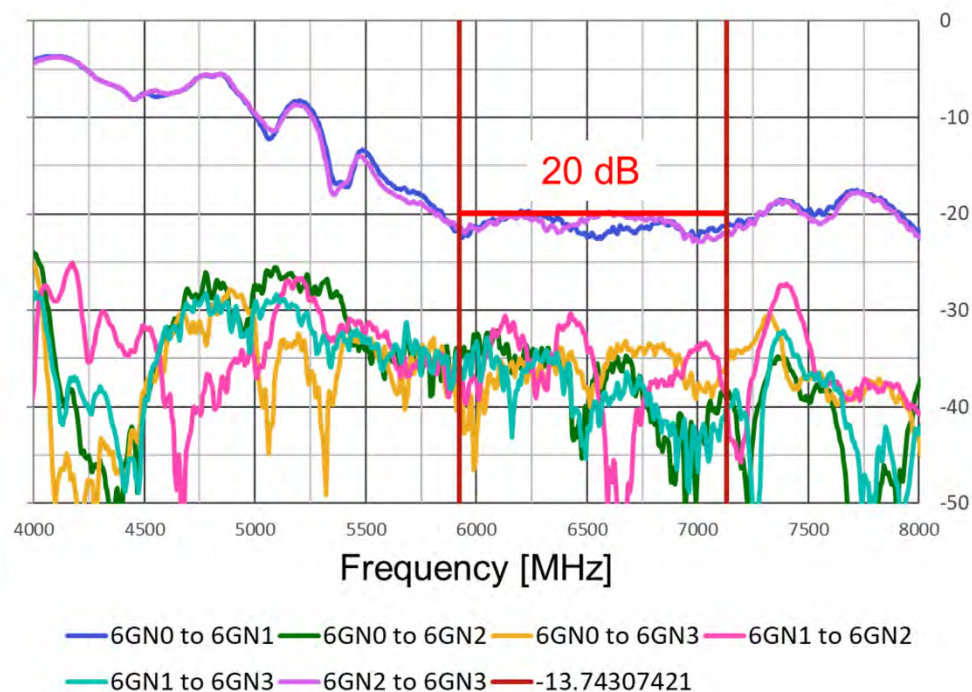

Jump cable loss : 3.91 dB


# 2D Radiation Pattern & Isolation @ SC

2G

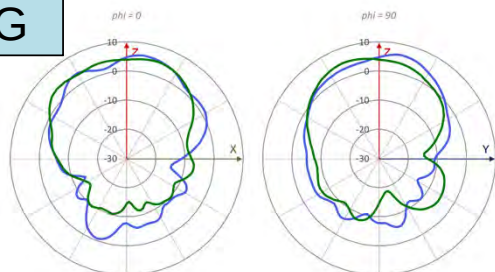


— SC0 — SC1

5G

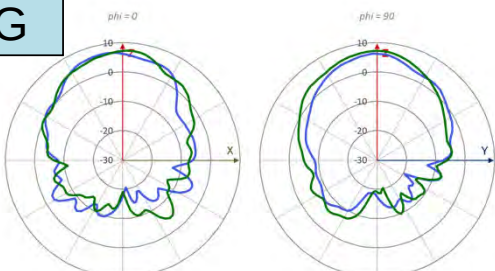


— SC0 — SC1

6G

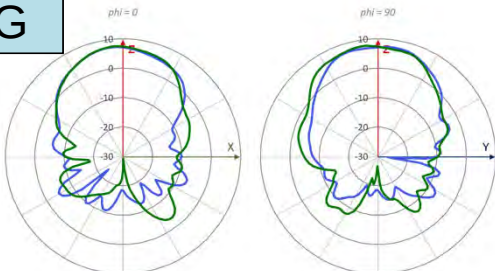

— SC0 — SC1

— SC0  
— SC1

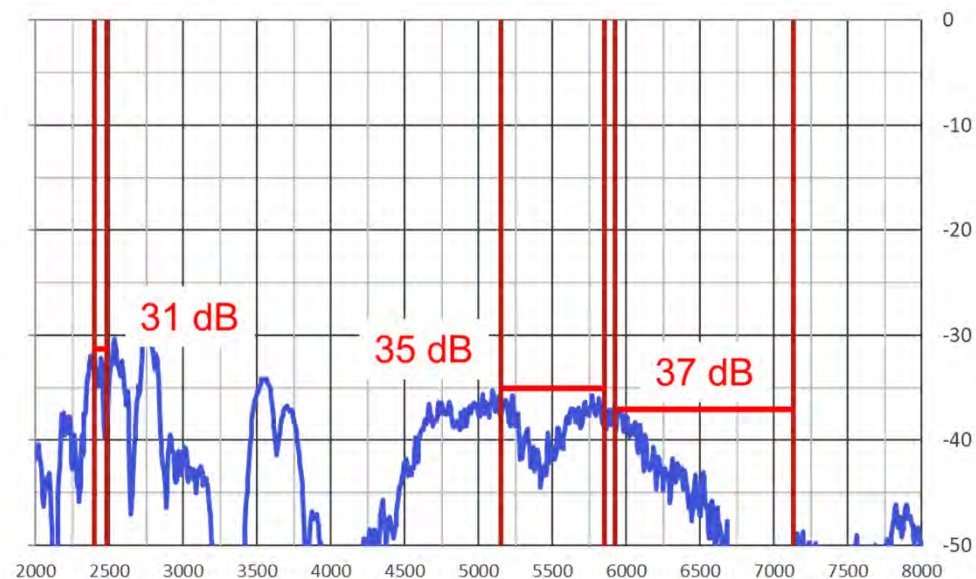


Frequency [MHz]


— SC0 to SC1 —

| 2G / 5G / 6G | Horizontal BW ( ° ) | Vertical BW ( ° ) | Peak Gain ( dBi )   |
|--------------|---------------------|-------------------|---------------------|
| SC0          | 69° / 66° / 66°     | 60° / 51° / 63°   | 8.2 / 7.6 / 8.8 dBi |
| SC1          | 66° / 54° / 66°     | 72° / 72° / 66°   | 6.2 / 8.1 / 8.7 dBi |


## 2D Radiation Pattern & Isolation @ BLE / 802.15.4

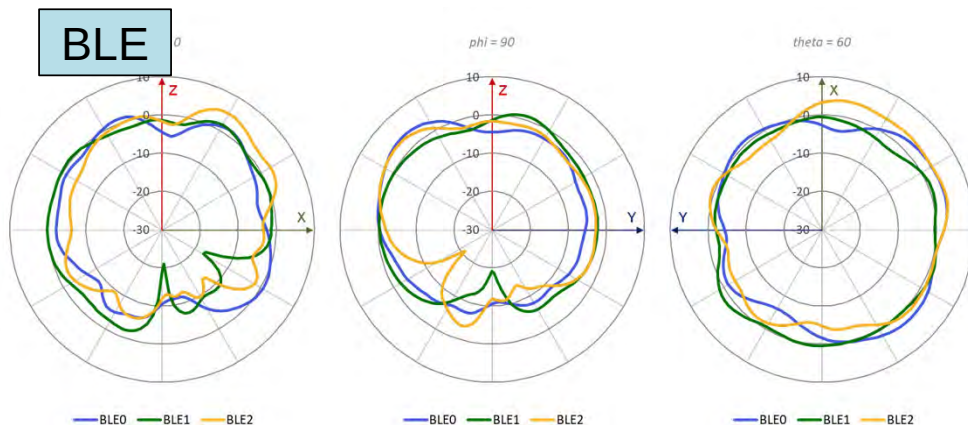

**BLE0**

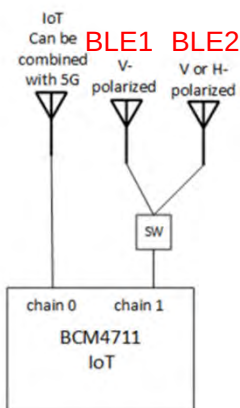


| BLE / 802.15.4 | Peak Gain (dBi) |
|----------------|-----------------|
| BLE0           | 4.8 dBi         |
| BLE1           | 3.3 dBi         |
| BLE2           | 5.3 dBi         |

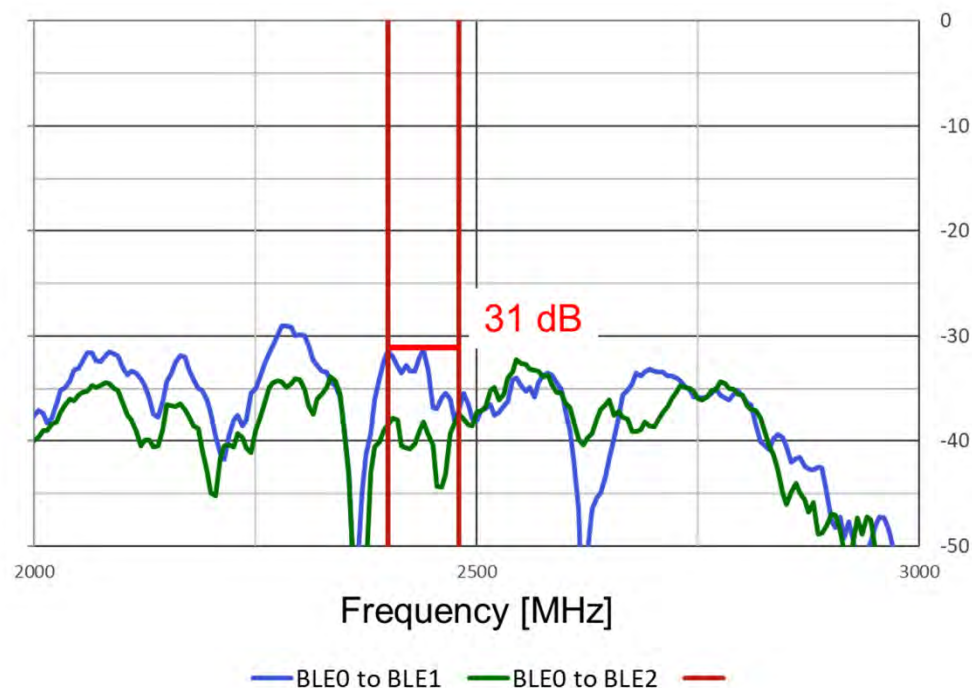

Base on BCM4711 chain 1 setting , BLE1 and BLE2 will not operate in same time by switch controlled .


# 2D Radiation Pattern @ GPS

L5

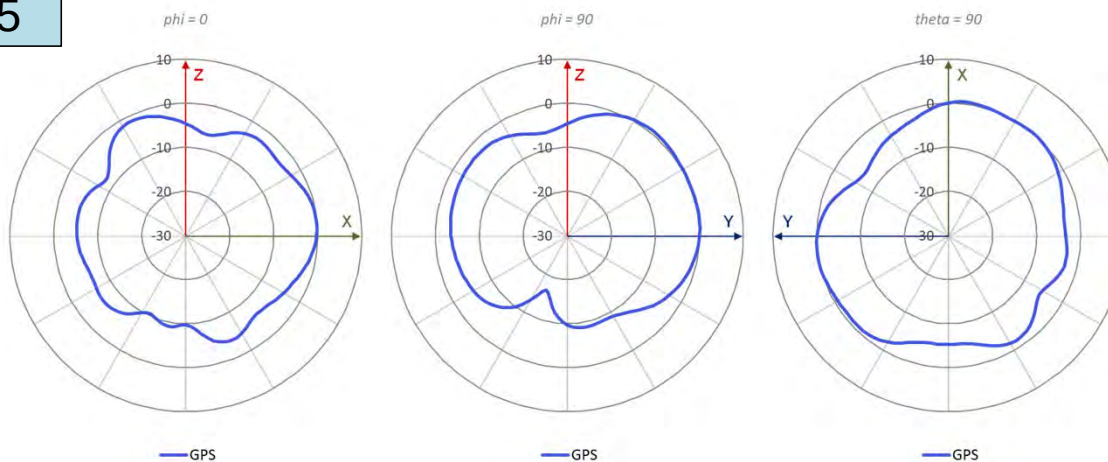


| L5  | Peak Gain ( dBi ) |
|-----|-------------------|
| GPS | 1.3 dBi           |

L1

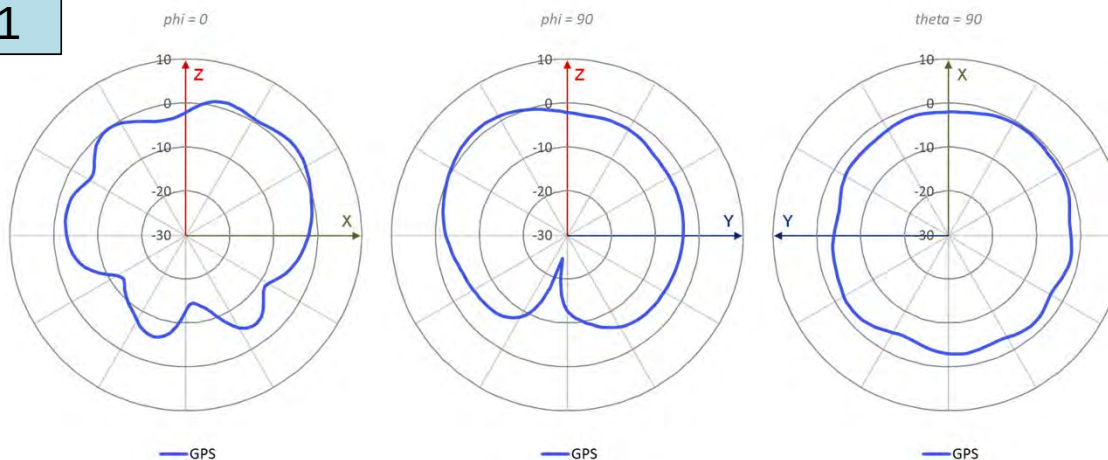


| L1  | Peak Gain ( dBi ) |
|-----|-------------------|
| GPS | 3.4 dBi           |

# Isolation ( Among Radio ) @ 5GW to 56GW

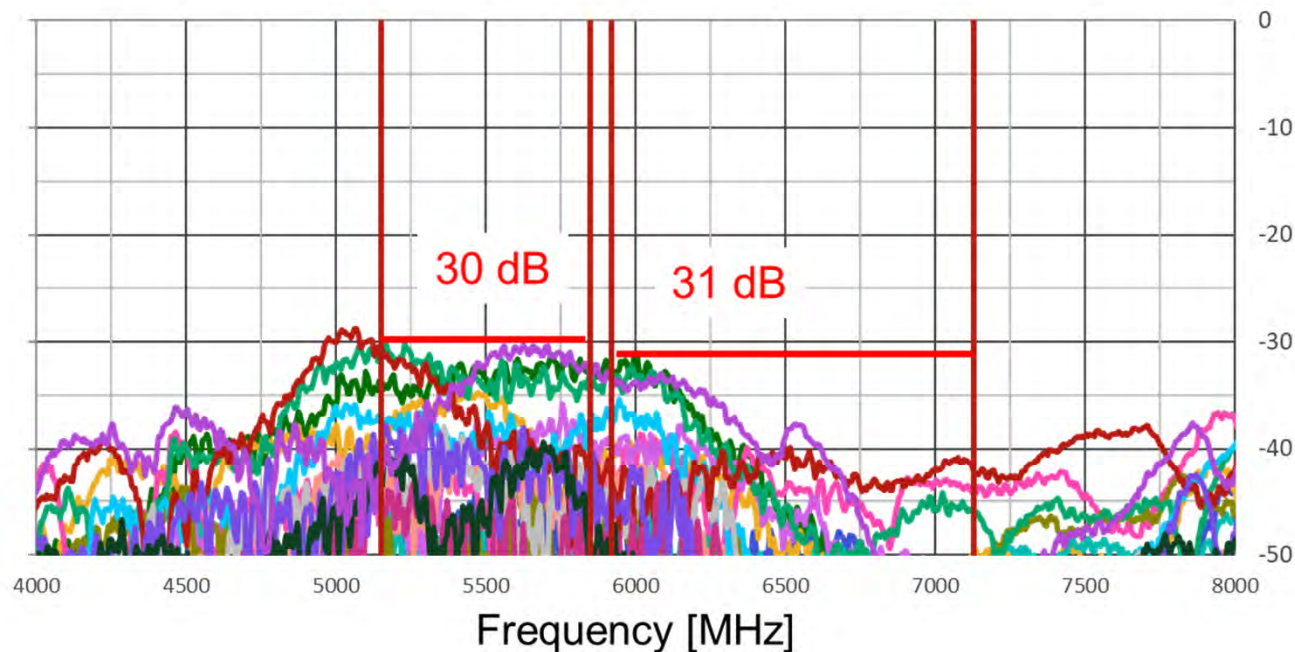


- 5GW0 to 56GW0 — 5GW0 to 56GW1 — 5GW0 to 56GW2 — 5GW0 to 56GW3
- 5GW1 to 56GW0 — 5GW1 to 56GW1 — 5GW1 to 56GW2 — 5GW1 to 56GW3
- 5GW2 to 56GW0 — 5GW2 to 56GW1 — 5GW2 to 56GW2 — 5GW2 to 56GW3
- 5GW3 to 56GW0 — 5GW3 to 56GW1 — 5GW3 to 56GW2 — 5GW3 to 56GW3

# Isolation ( Among Radio ) @ 5GW to 6GW

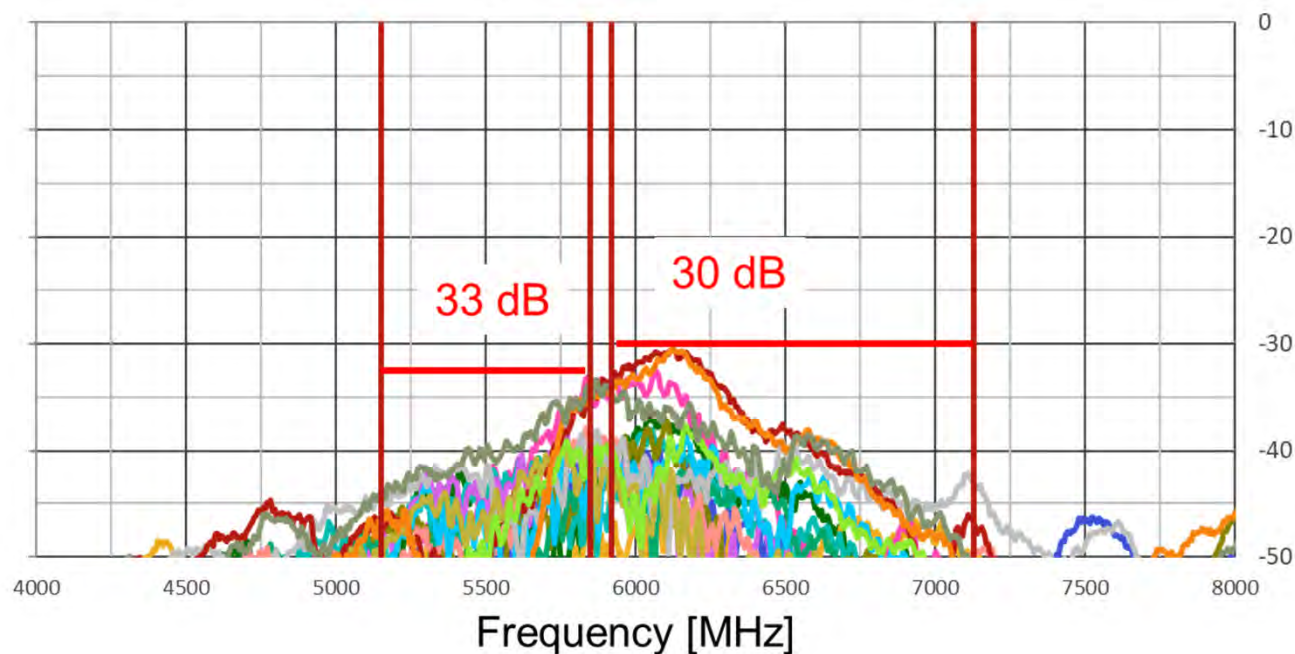


- 5GW0 to 6GW0 5GW0 to 6GW1 5GW0 to 6GW2 5GW0 to 6GW3
- 5GW1 to 6GW0 5GW1 to 6GW1 5GW1 to 6GW2 5GW1 to 6GW3
- 5GW2 to 6GW0 5GW2 to 6GW1 5GW2 to 6GW2 5GW2 to 6GW3
- 5GW3 to 6GW0 5GW3 to 6GW1 5GW3 to 6GW2 5GW3 to 6GW3

# Isolation ( Among Radio ) @ 56GW to 6GW

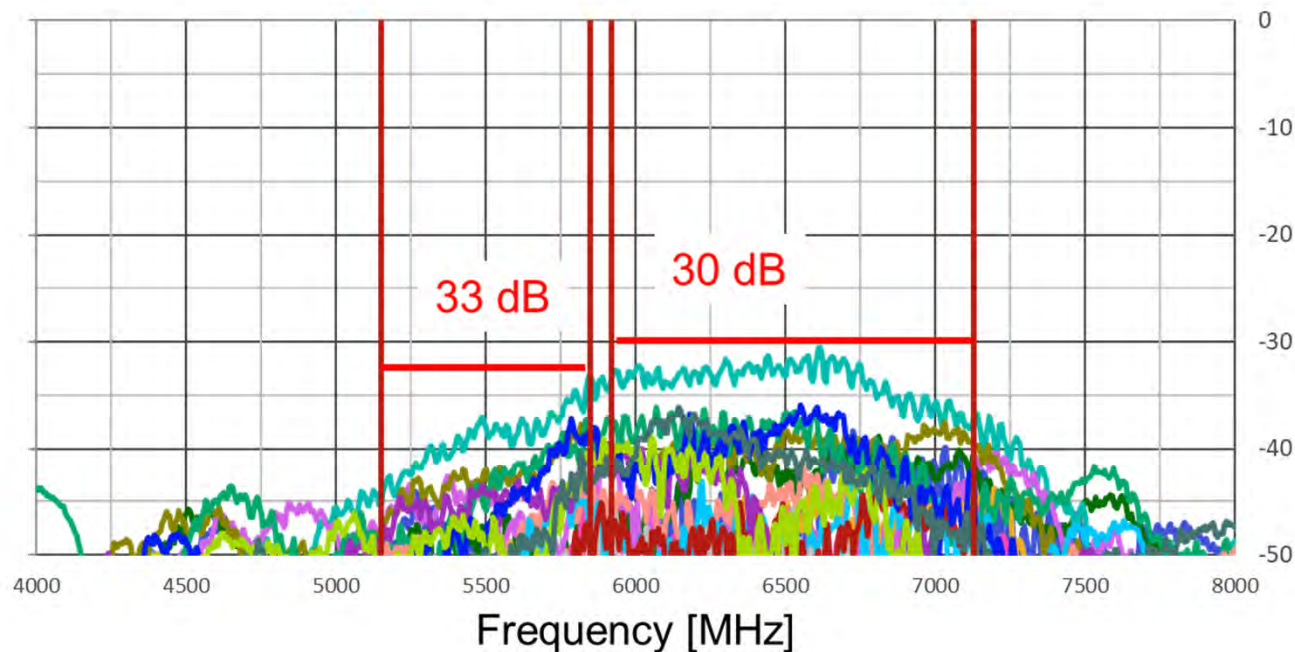

- 56GW0 to 6GW0
- 56GW0 to 6GW1
- 56GW0 to 6GW2
- 56GW0 to 6GW3
- 56GW1 to 6GW0
- 56GW1 to 6GW1
- 56GW1 to 6GW2
- 56GW1 to 6GW3
- 56GW2 to 6GW0
- 56GW2 to 6GW1
- 56GW2 to 6GW2
- 56GW2 to 6GW3
- 56GW3 to 6GW0
- 56GW3 to 6GW1
- 56GW3 to 6GW2
- 56GW3 to 6GW3


# Isolation ( Among Radio ) @ GPS

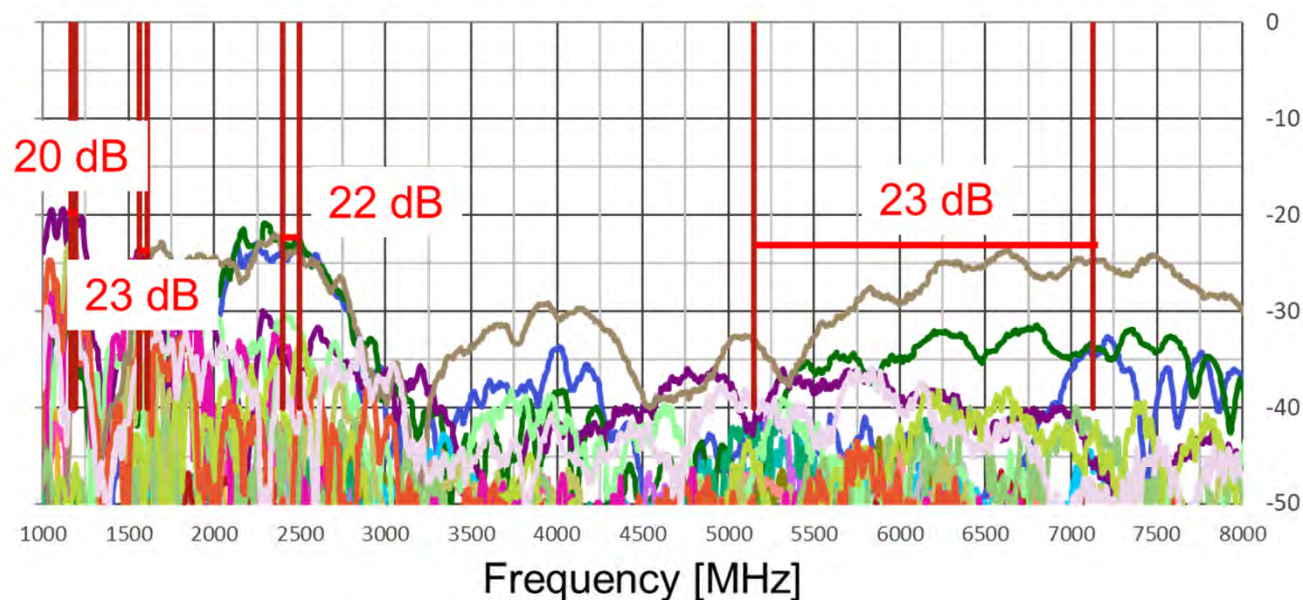

- GPS to 2G0    — GPS to 2G1    — GPS to 2G2    — GPS to 2G3
- GPS to 5GW0    — GPS to 5GW1    — GPS to 5GW2    — GPS to 5GW3
- GPS to 6GW0    — GPS to 6GW1    — GPS to 6GW2    — GPS to 6GW3
- GPS to 56GW0    — GPS to 56GW1    — GPS to 56GW2    — GPS to 56GW3
- GPS to BLE0    — GPS to BLE1    — GPS to BLE2    — GPS to SC0
- GPS to SC1    —


| Isolation radio | Max   |
|-----------------|-------|
| L5              | 20 dB |
| L1              | 23 dB |
| 2GHz            | 22 dB |
| 5-7GHz          | 23 dB |

# Isolation ( Among Radio ) @ 5GN to 56GN

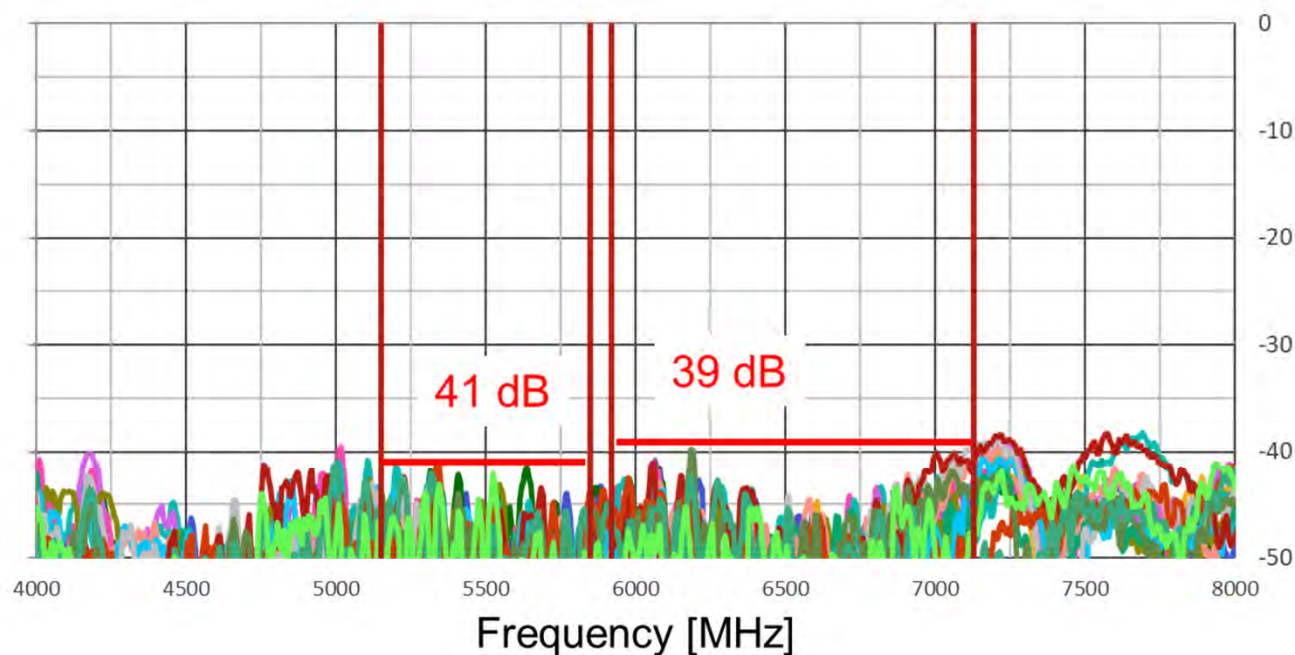


5GN0 to 56GN0 5GN0 to 56GN1 5GN0 to 56GN2 5GN0 to 56GN3  
 5GN1 to 56GN0 5GN1 to 56GN1 5GN1 to 56GN2 5GN1 to 56GN3  
 5GN2 to 56GN0 5GN2 to 56GN1 5GN2 to 56GN2 5GN2 to 56GN3  
 5GN3 to 56GN0 5GN3 to 56GN1 5GN3 to 56GN2 5GN3 to 56GN3

## Isolation ( Among Radio ) @ 5GN to 6GN

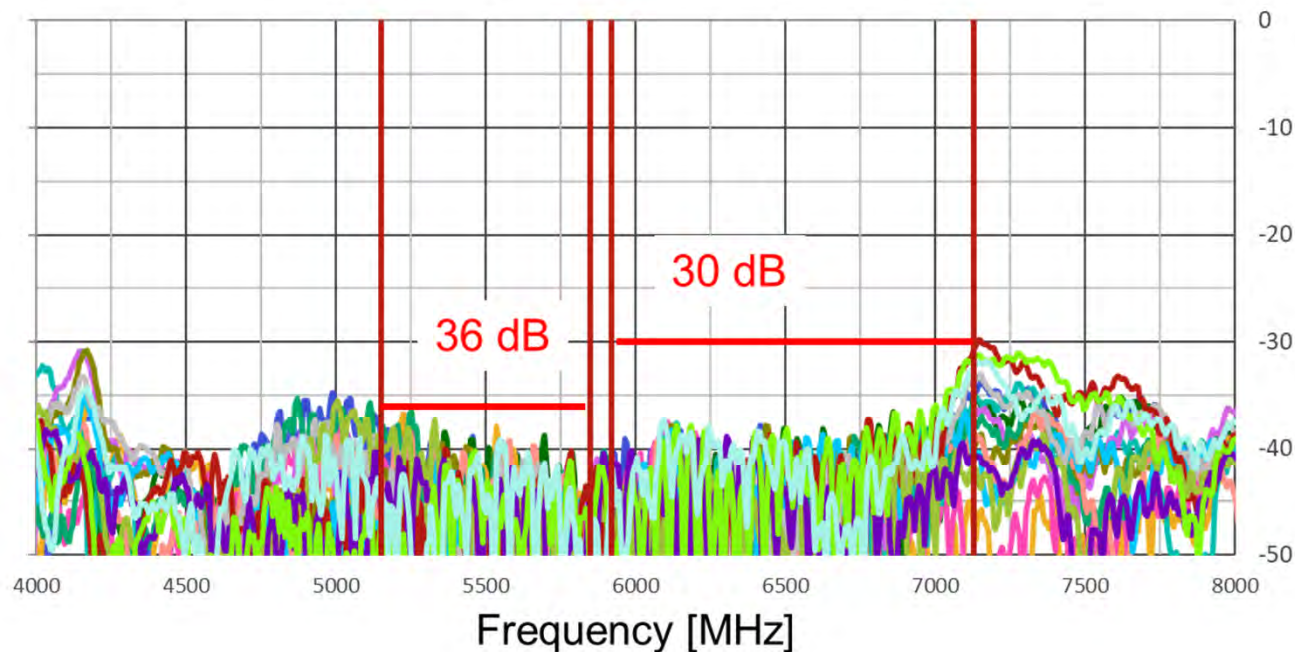


— 5GN0 to 6GN0 — 5GN0 to 6GN1 — 5GN0 to 6GN2 — 5GN0 to 6GN3  
 — 5GN1 to 6GN0 — 5GN1 to 6GN1 — 5GN1 to 6GN2 — 5GN1 to 6GN3  
 — 5GN2 to 6GN0 — 5GN2 to 6GN1 — 5GN2 to 6GN2 — 5GN2 to 6GN3  
 — 5GN3 to 6GN0 — 5GN3 to 6GN1 — 5GN3 to 6GN2 — 5GN3 to 6GN3

# Isolation ( Among Radio ) @ 56GN to 6GN

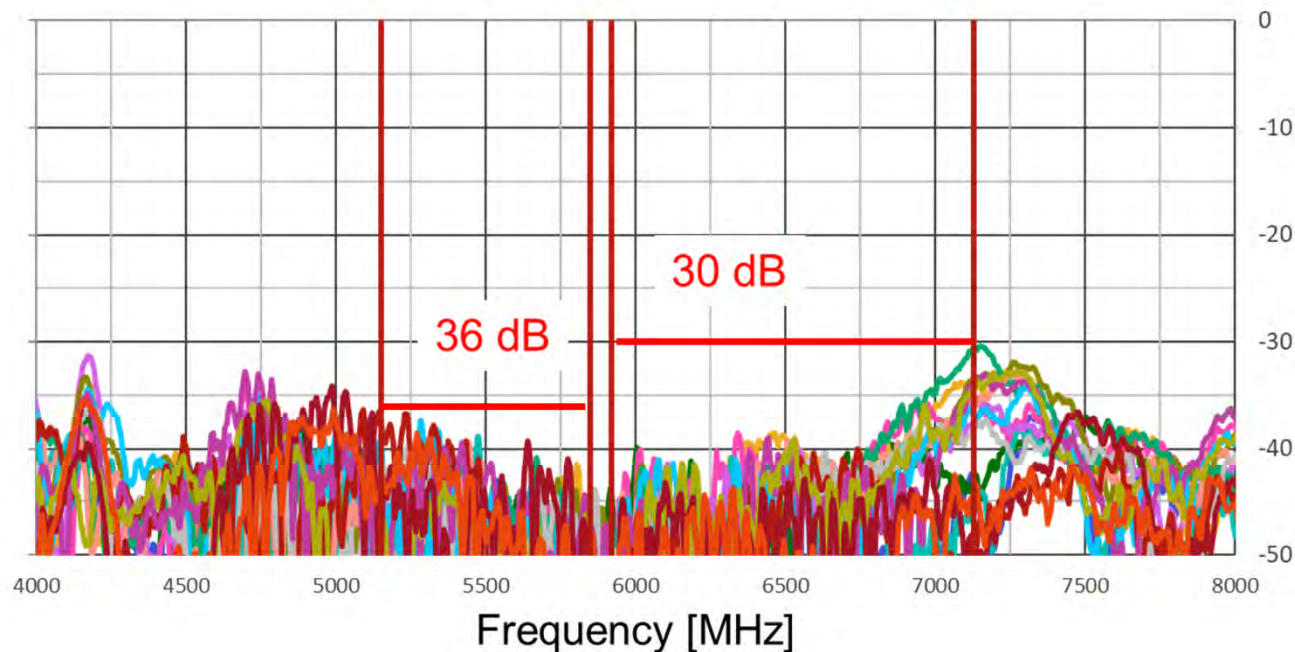

- 56GN0 to 6GN0 56GN0 to 6GN1 56GN0 to 6GN2 56GN0 to 6GN3
- 56GN1 to 6GN0 56GN1 to 6GN1 56GN1 to 6GN2 56GN1 to 6GN3
- 56GN2 to 6GN0 56GN2 to 6GN1 56GN2 to 6GN2 56GN2 to 6GN3
- 56GN3 to 6GN0 56GN3 to 6GN1 56GN3 to 6GN2 56GN3 to 6GN3

# Isolation ( Among Radio ) @ GPS

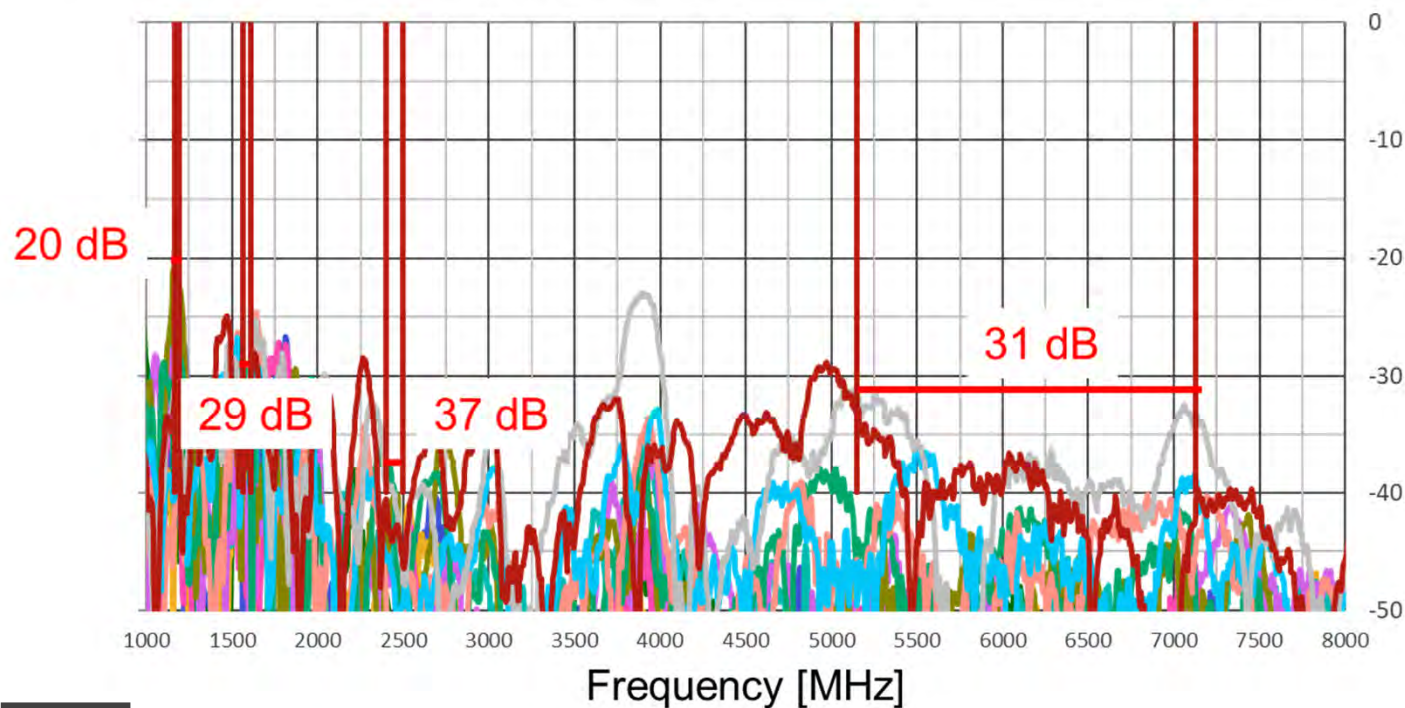

| Isolation radio | Max   |
|-----------------|-------|
| L5              | 20 dB |
| L1              | 29 dB |
| 2GHz            | 37 dB |
| 5-7GHz          | 31 dB |

— GPS to 5GN0    — GPS to 5GN1    — GPS to 5GN2    — GPS to 5GN3  
 — GPS to 6GN0    — GPS to 6GN1    — GPS to 6GN2    — GPS to 6GN3  
 — GPS to 56GN0    — GPS to 56GN1    — GPS to 56GN2    — GPS to 56GN3

The logo consists of the letters 'WNC' in a bold, blue, italicized sans-serif font. The 'W' and 'N' are connected, and the 'C' is a simple curve.

**WNC**

***Wistron NeWeb Corp.***

