
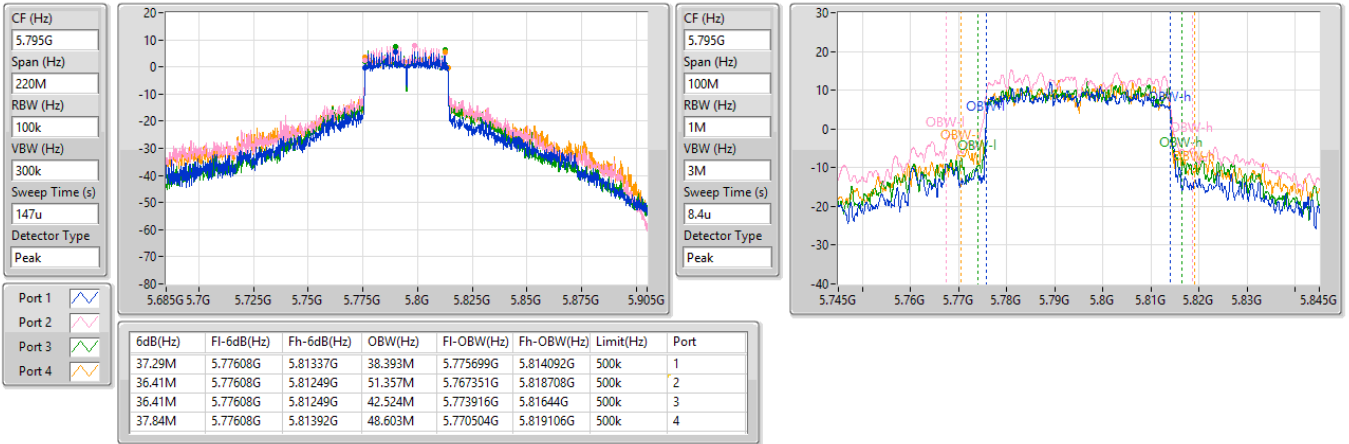


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5795MHz

18/09/2025


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5795MHz

18/09/2025


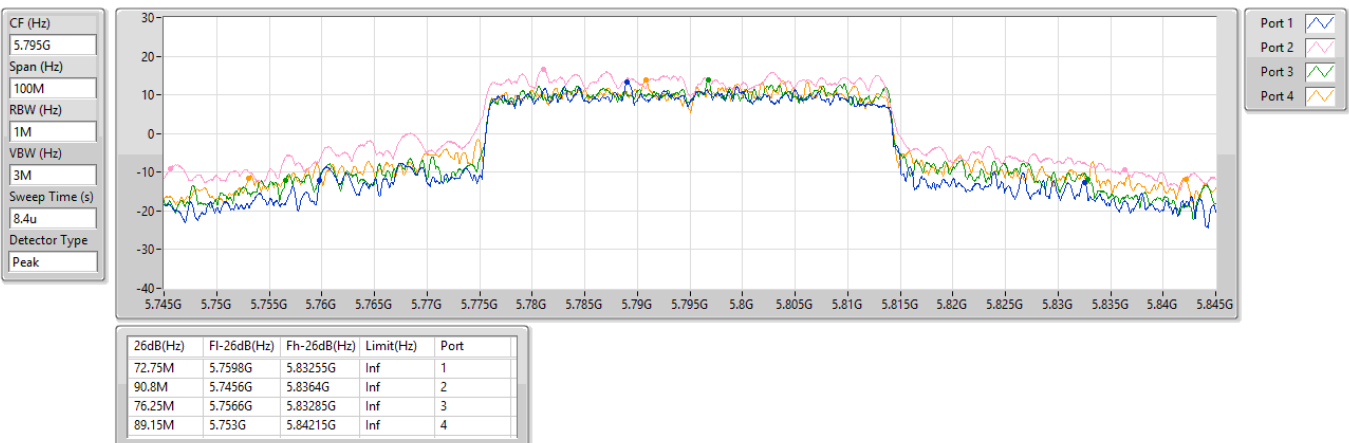


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5210MHz

18/09/2025

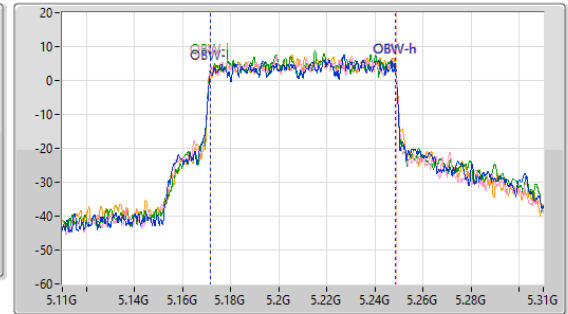
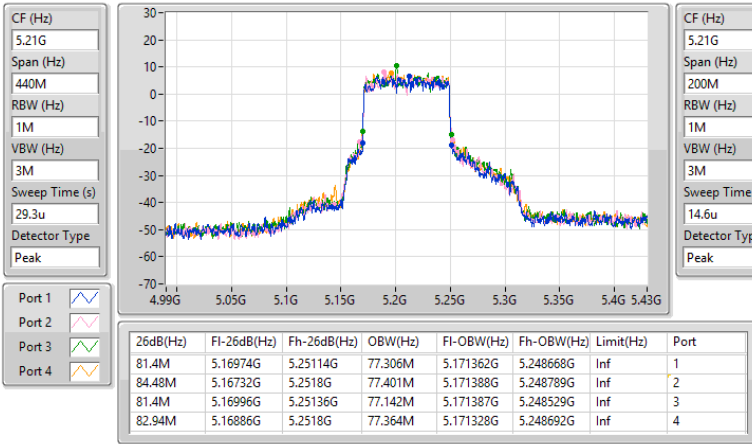


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5775MHz

18/09/2025

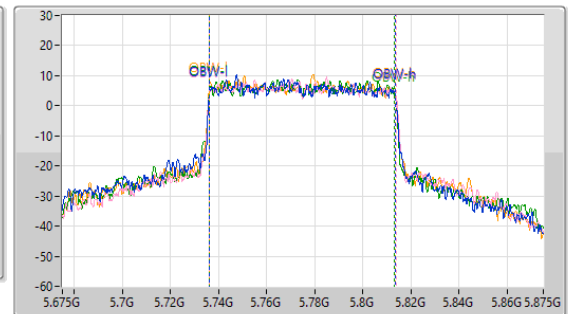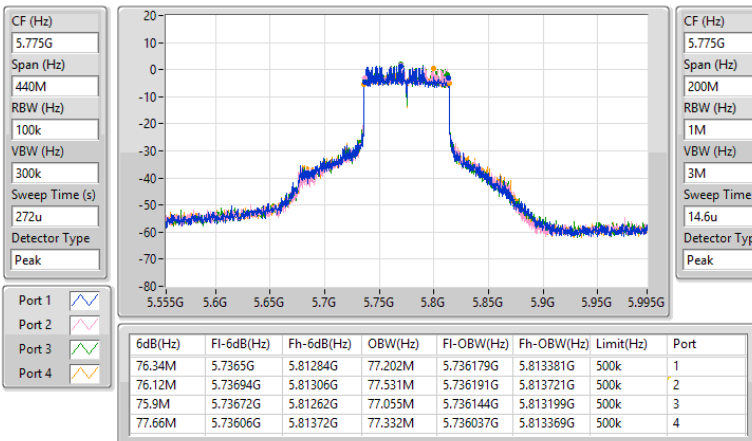


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX
EBW
5775MHz

18/09/2025

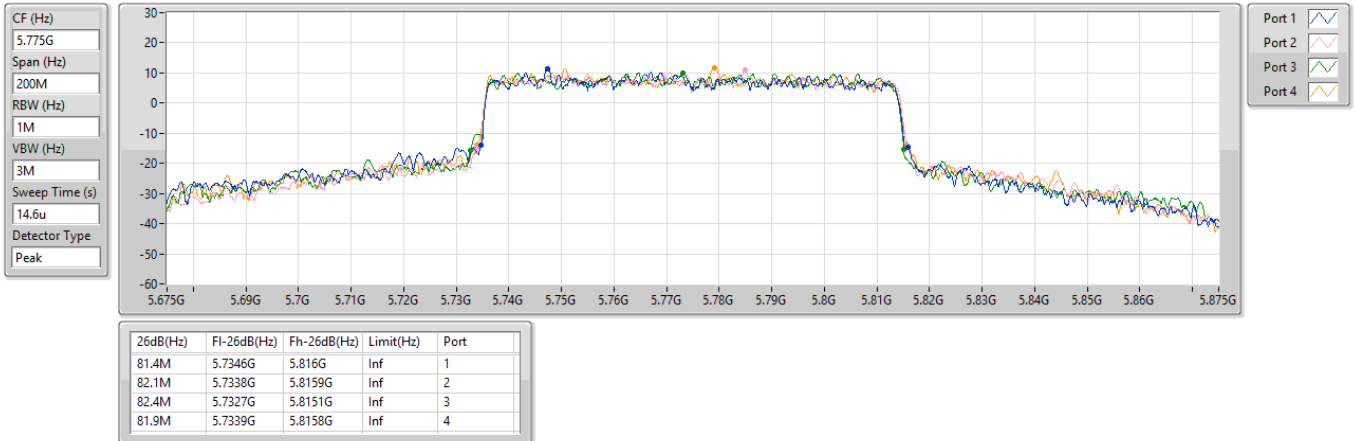
5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX
EBW
5180MHz

18/09/2025


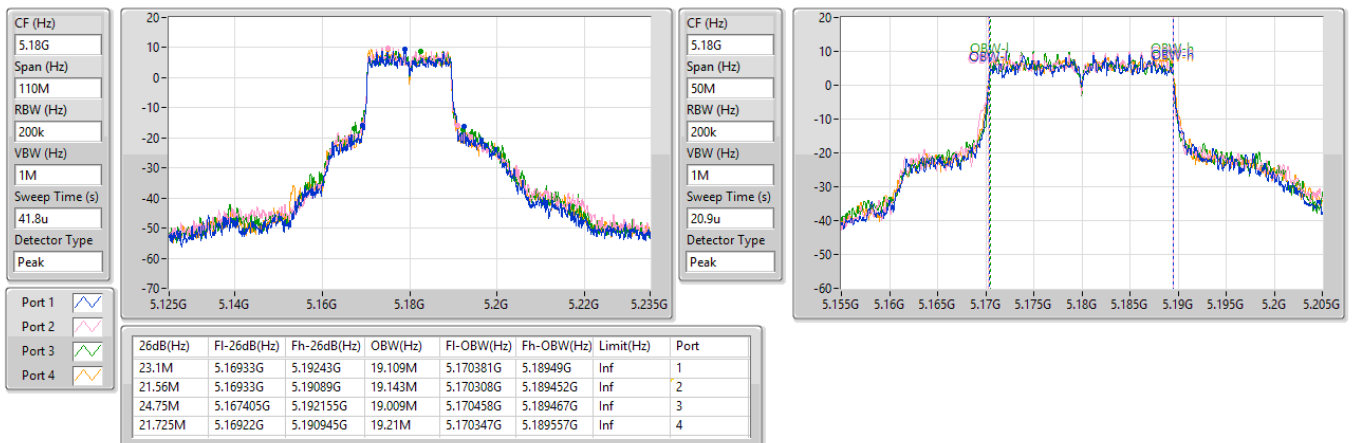


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5200MHz

18/09/2025

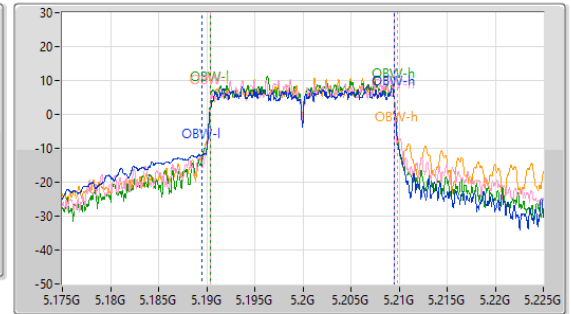
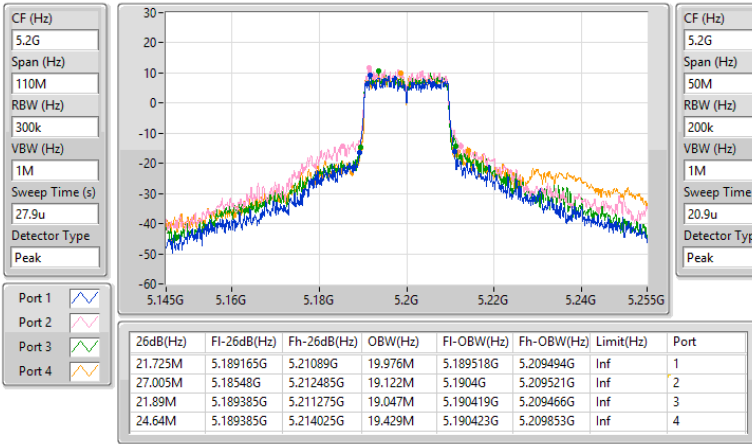


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5240MHz

18/09/2025

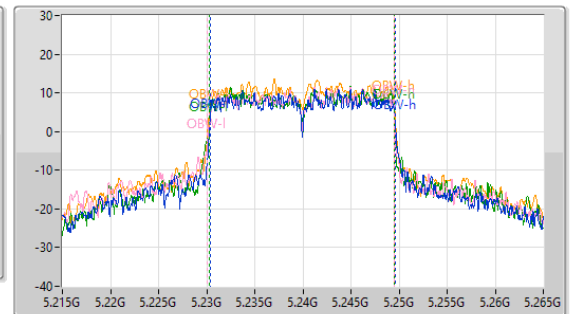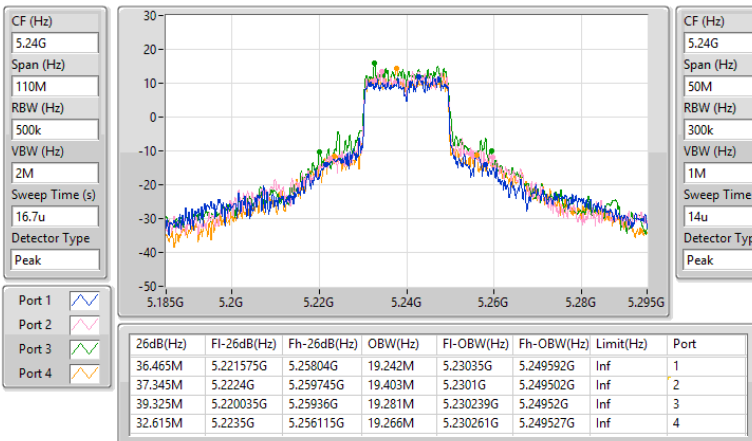


5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5745MHz

18/09/2025

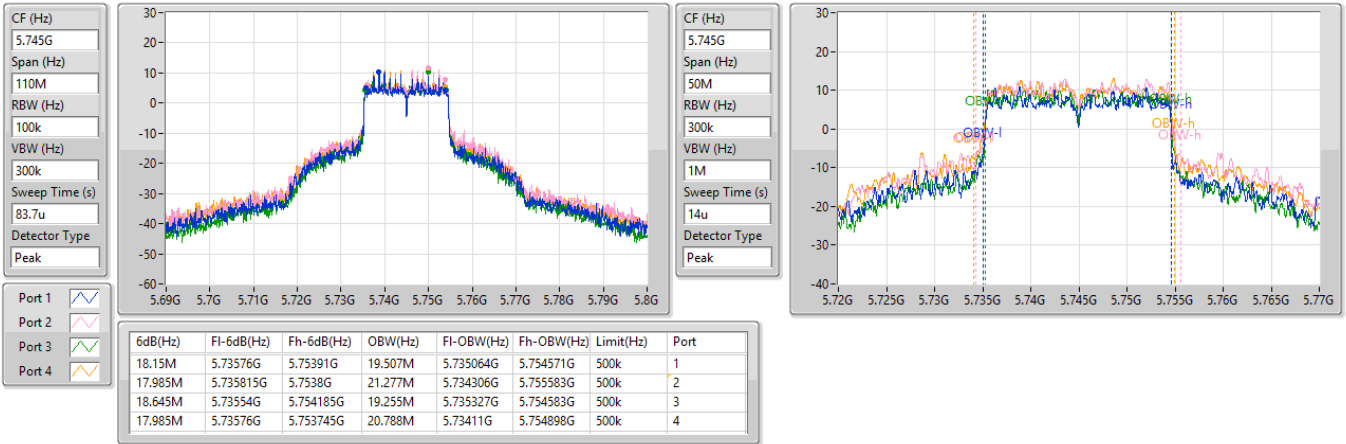

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5745MHz

18/09/2025




5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5785MHz

18/09/2025

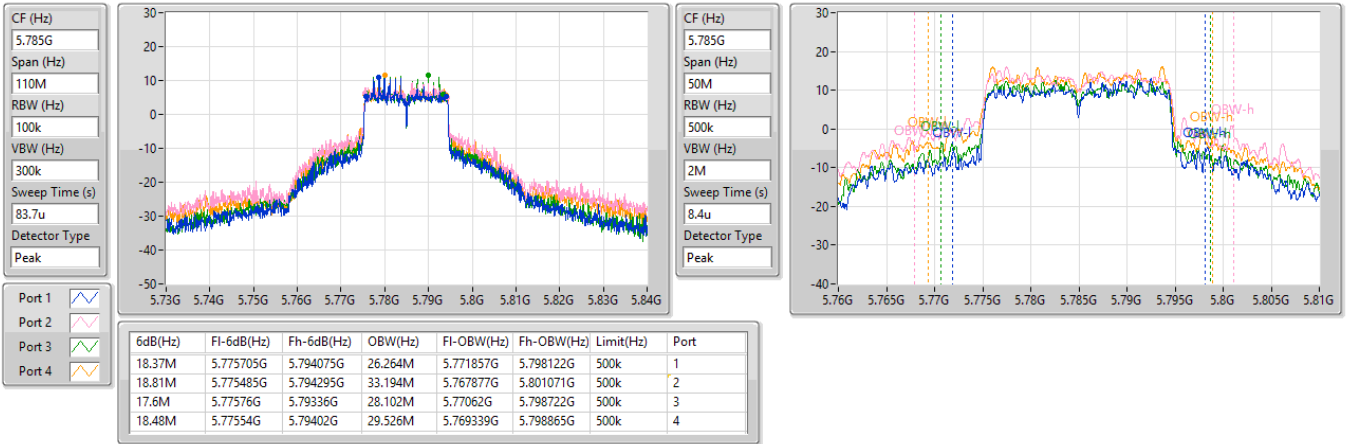

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5785MHz

18/09/2025




5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5825MHz

18/09/2025

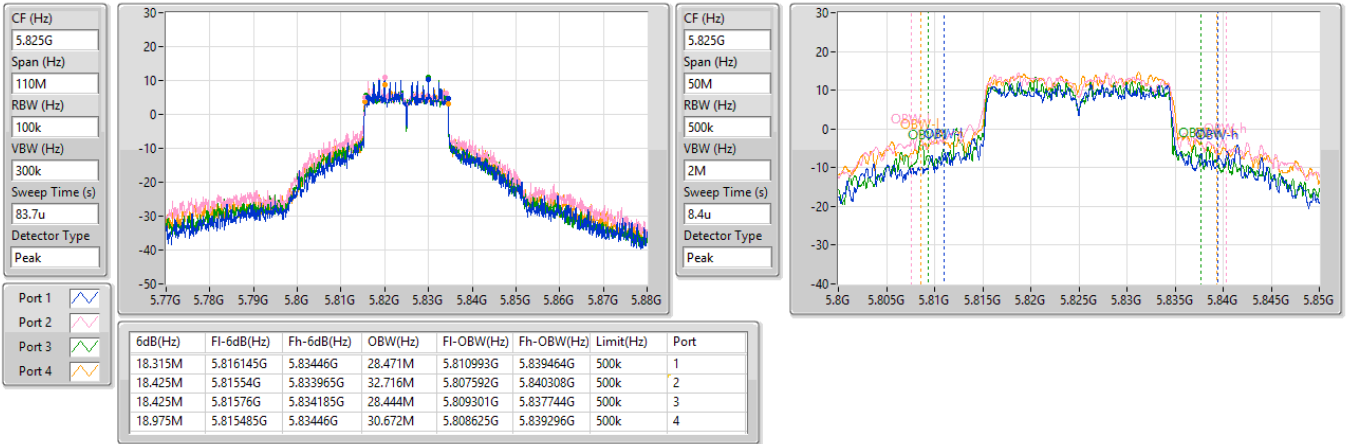

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5825MHz

18/09/2025





5.15-5.25GHz_802.11be EHT40_Nss4_(MCS0)_4TX

EBW

5190MHz

18/09/2025

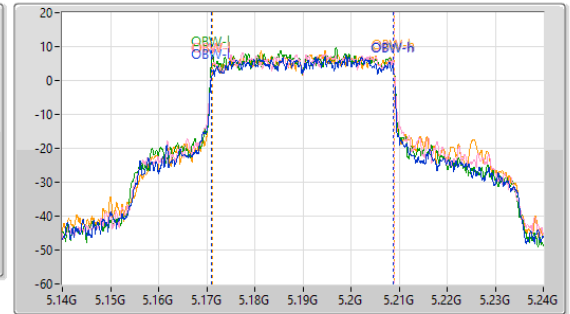
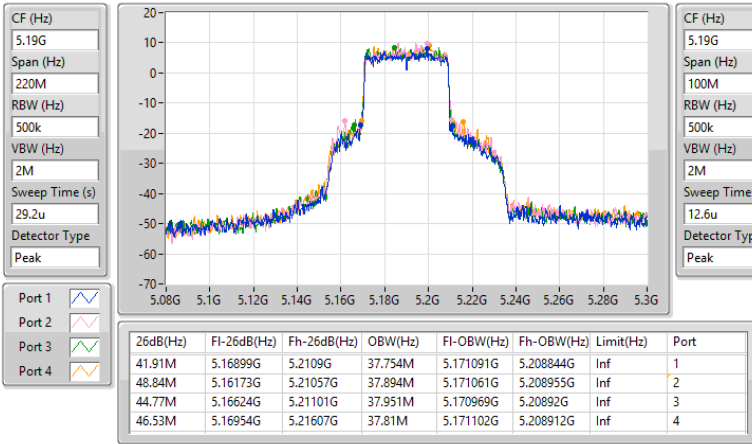


5.15-5.25GHz_802.11be EHT40_Nss4_(MCS0)_4TX

EBW


5230MHz

18/09/2025

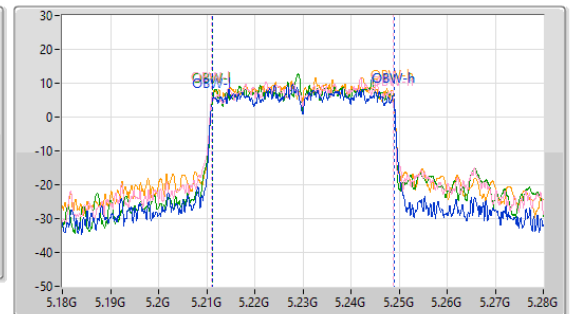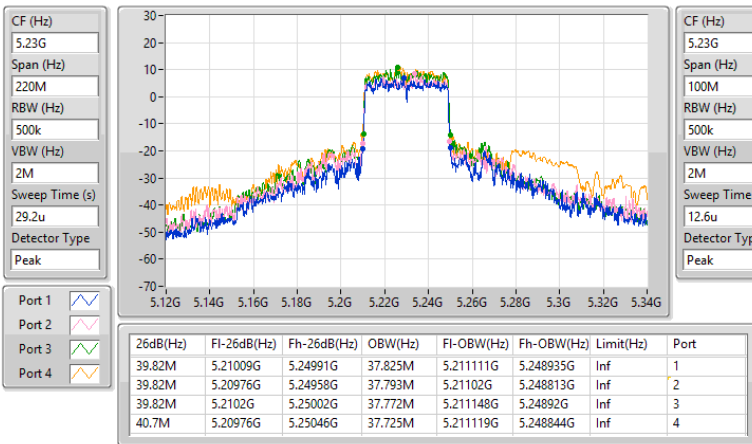


5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX
EBW
5755MHz

18/09/2025

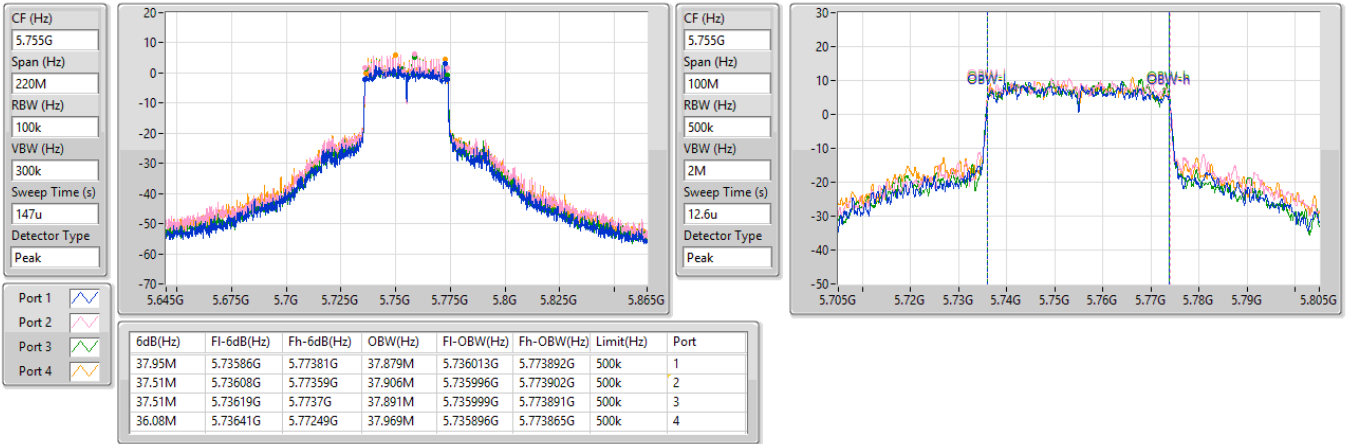

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX
EBW
5755MHz

18/09/2025

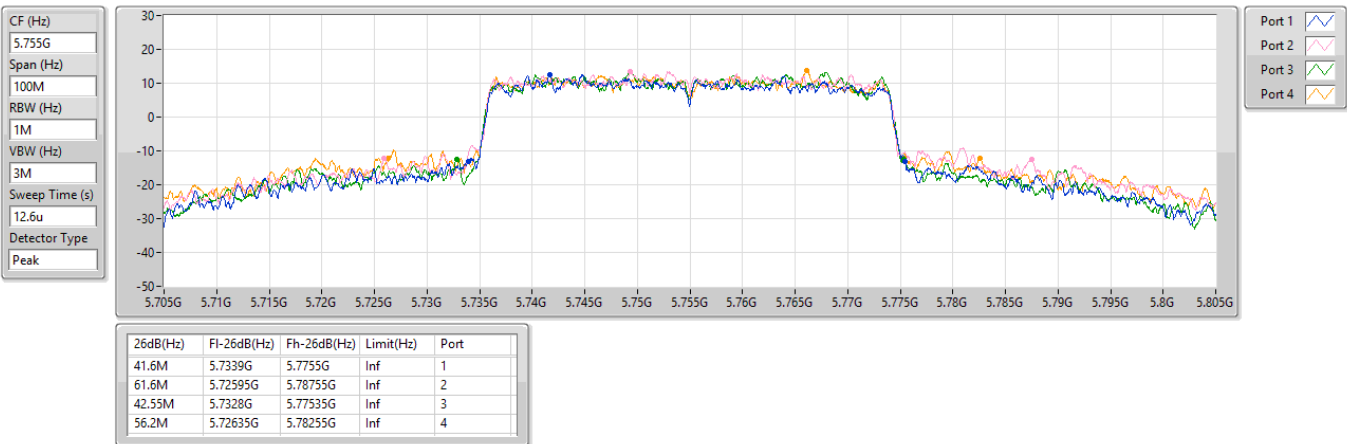

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX
EBW
5795MHz

18/09/2025

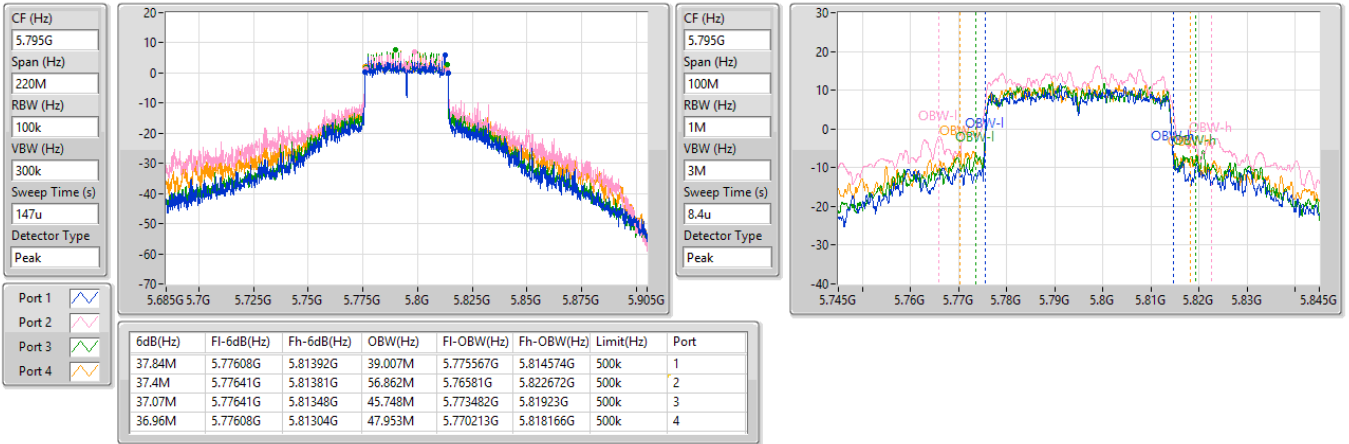
5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX
EBW
5795MHz

18/09/2025





5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

5210MHz

18/09/2025

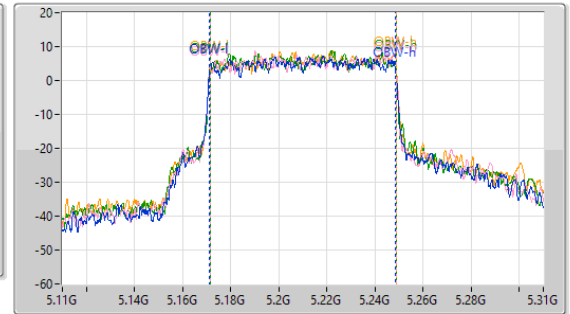
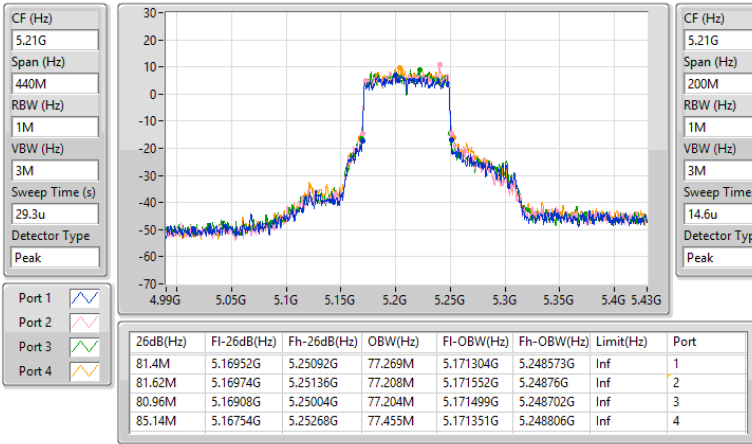


5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

5775MHz

18/09/2025

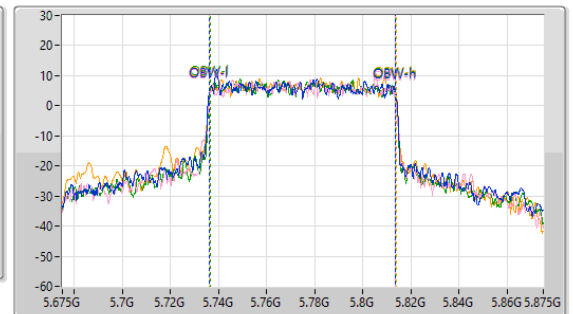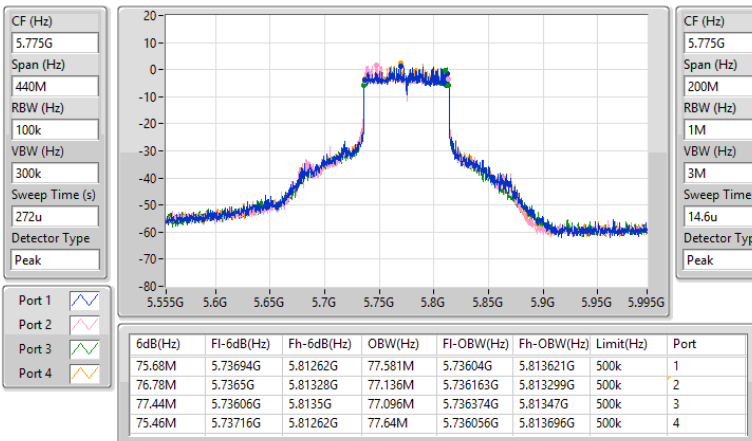


5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

5775MHz

18/09/2025

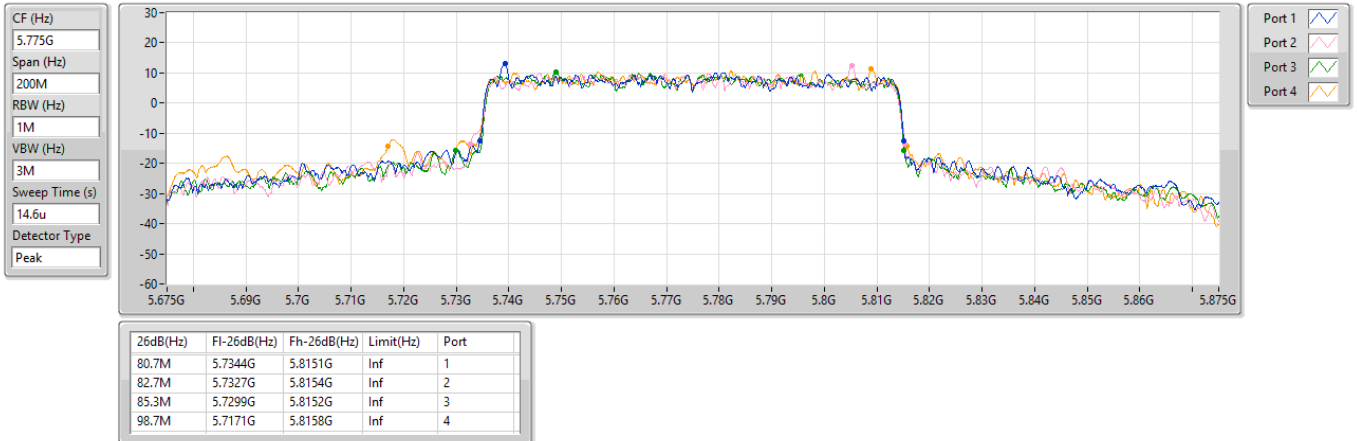

Test Mode: Mode 35

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1.(6Mbps)_1TX	38.28M	19.093M	19M1D1D	19.525M	16.588M
802.11be EHT20_Nss1.(MCS0)_1TX	45.705M	27.228M	27M2D1D	21.835M	19.021M
802.11be EHT40_Nss1.(MCS0)_1TX	62.26M	37.934M	37M9D1D	41.36M	37.819M
802.11be EHT80_Nss1.(MCS0)_1TX	81.62M	77.13M	77M1D1D	81.62M	77.13M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.525M	16.588M
5200MHz	Pass	Inf	38.28M	19.093M
5240MHz	Pass	Inf	37.29M	18.466M
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	21.835M	19.021M
5200MHz	Pass	Inf	45.705M	27.228M
5240MHz	Pass	Inf	36.85M	19.288M
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-
5190MHz	Pass	Inf	41.36M	37.819M
5230MHz	Pass	Inf	62.26M	37.934M
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-
5210MHz	Pass	Inf	81.62M	77.13M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5180MHz

17/09/2025


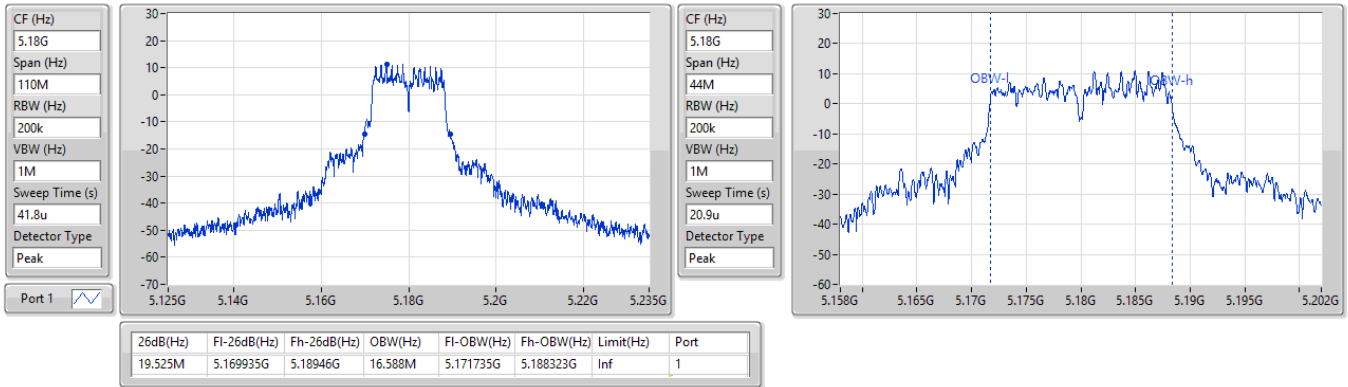

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5200MHz

17/09/2025


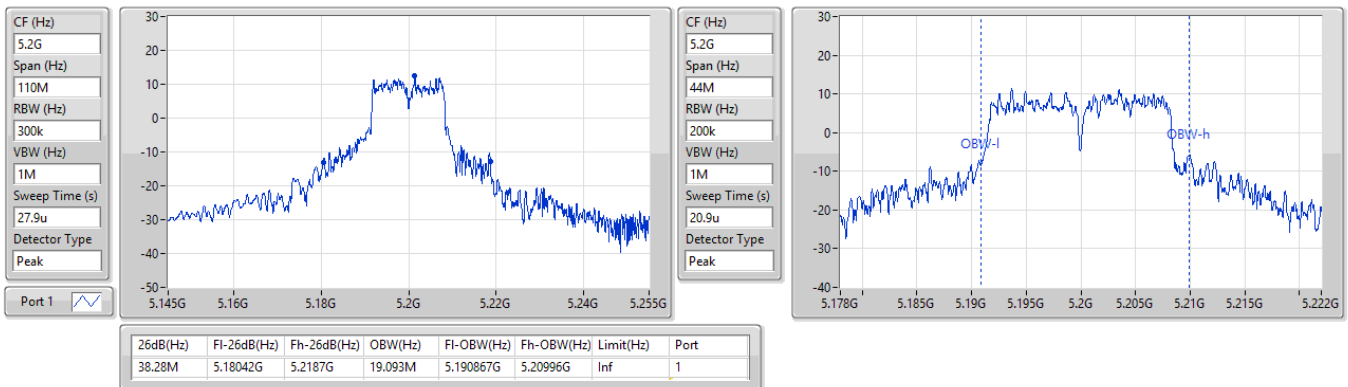


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5240MHz

17/09/2025

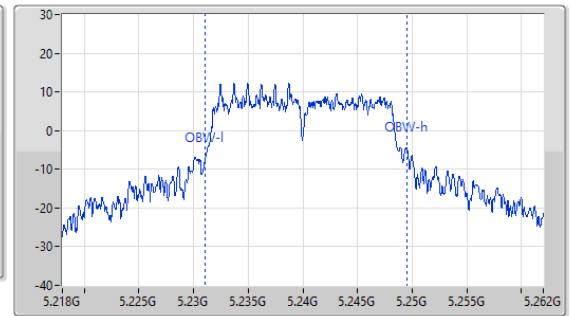
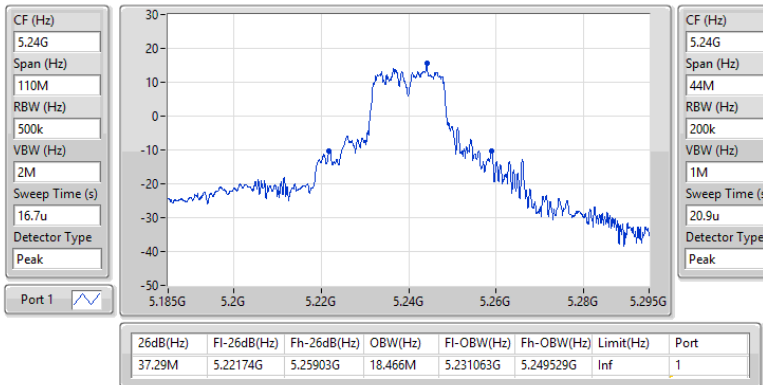

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5180MHz

17/09/2025

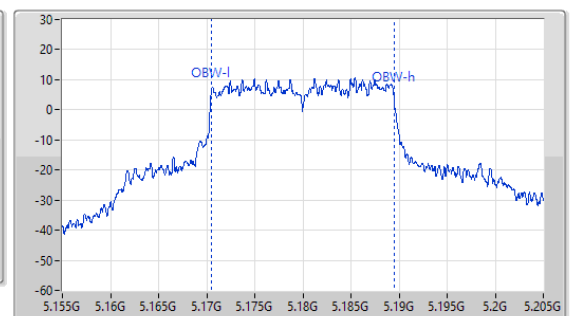
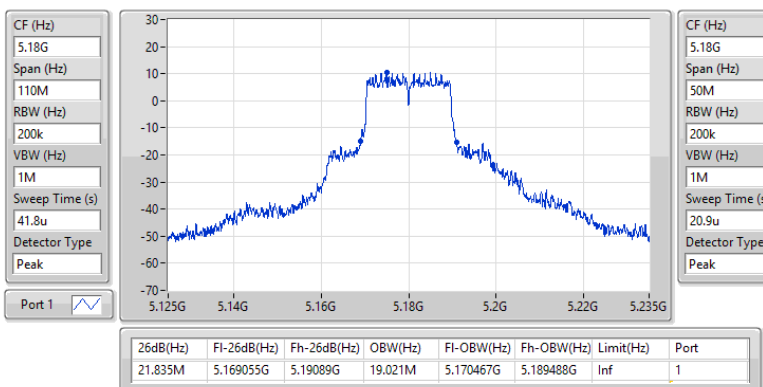


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5200MHz

17/09/2025

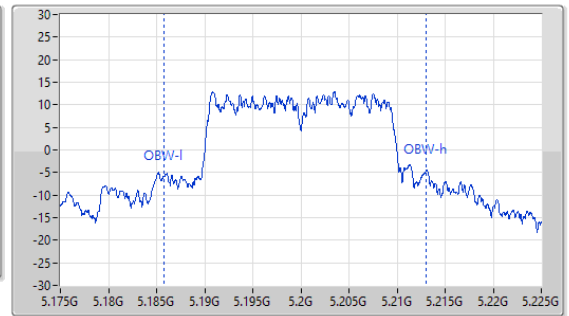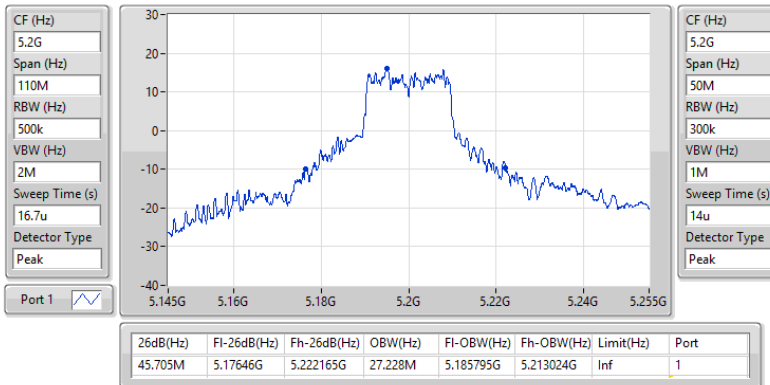
5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5240MHz

17/09/2025

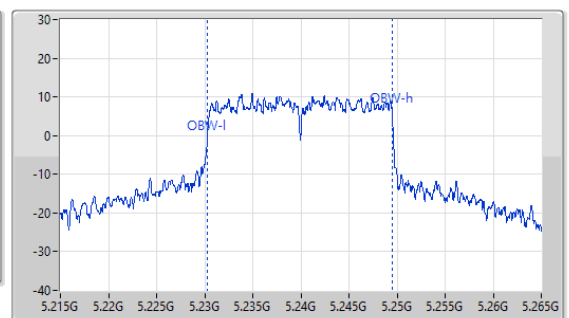
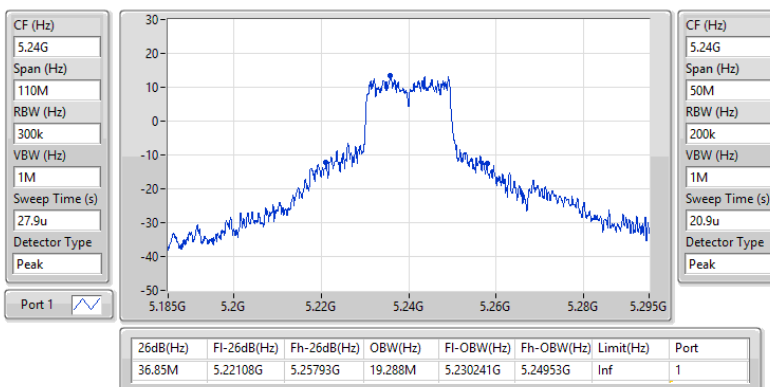


5.15-5.25GHz 802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5190MHz

17/09/2025

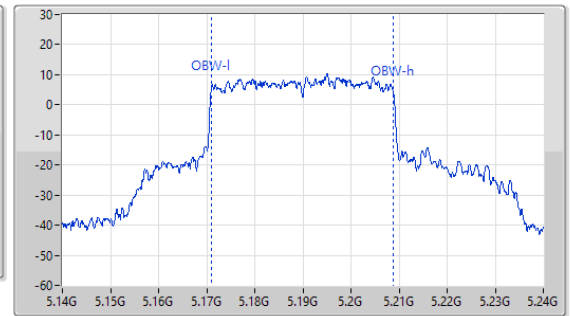
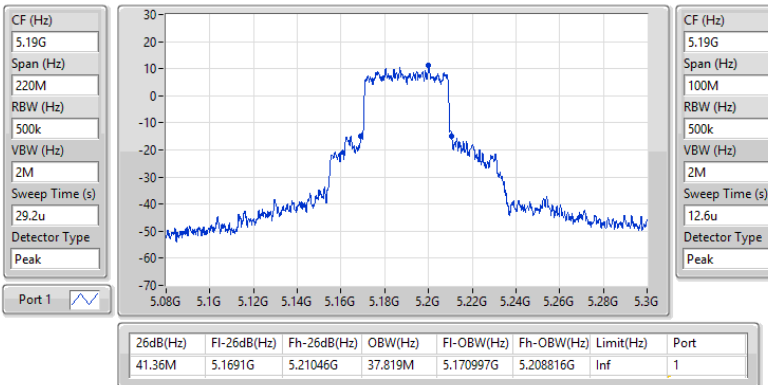


5.15-5.25GHz 802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5230MHz

17/09/2025

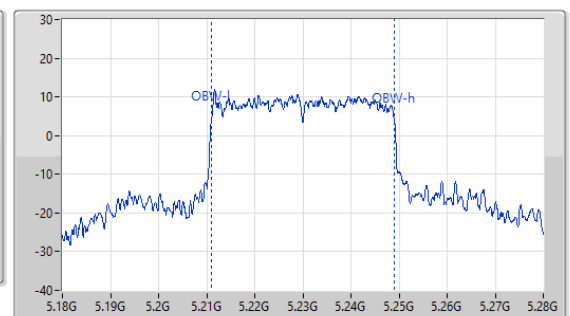
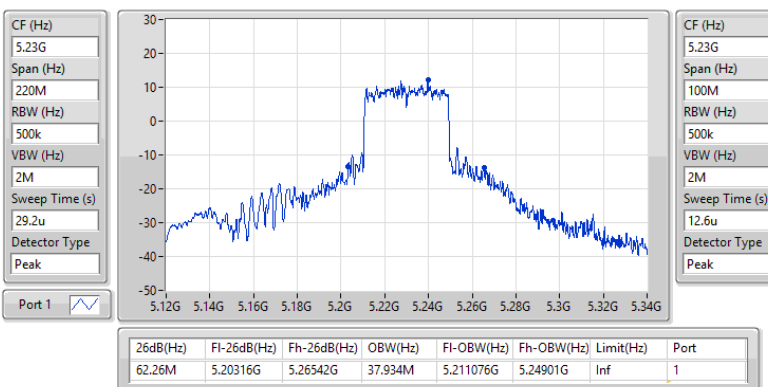


5.15-5.25GHz 802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5210MHz

17/09/2025

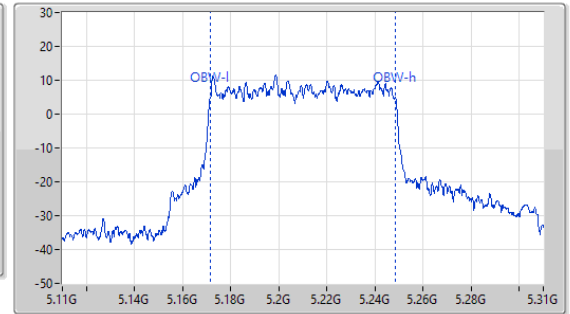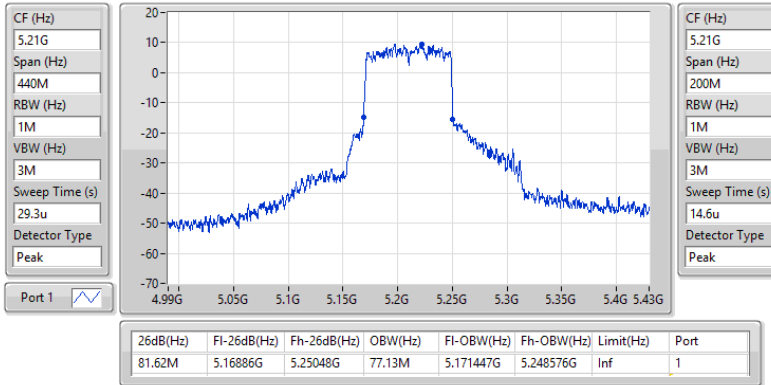

Test Mode: Mode 36

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1_(6Mbps)_2TX	23.98M	16.869M	16M9D1D	20.79M	16.631M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.01M	16.869M	21.835M	16.631M
5200MHz	Pass	Inf	23.98M	16.748M	22.495M	16.703M
5240MHz	Pass	Inf	20.79M	16.789M	23.21M	16.694M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5180MHz

17/09/2025

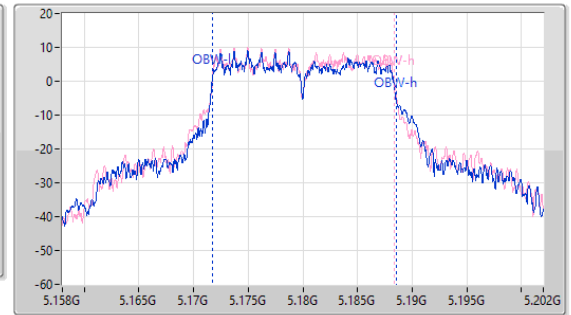
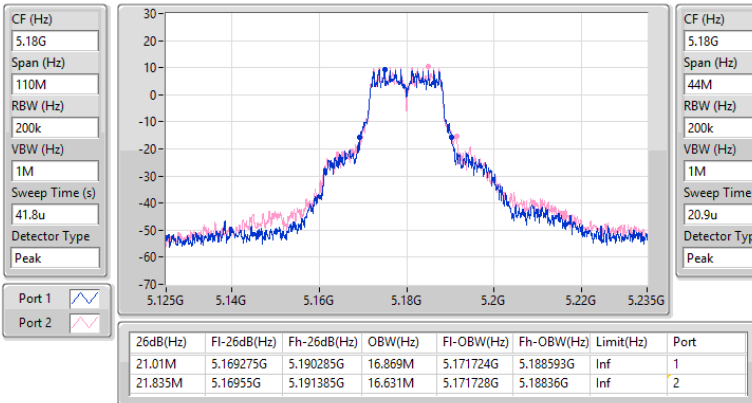


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5200MHz

02/10/2025

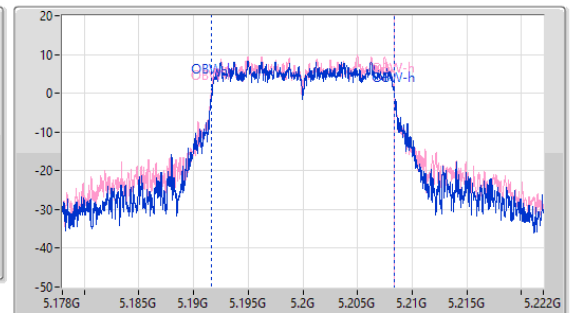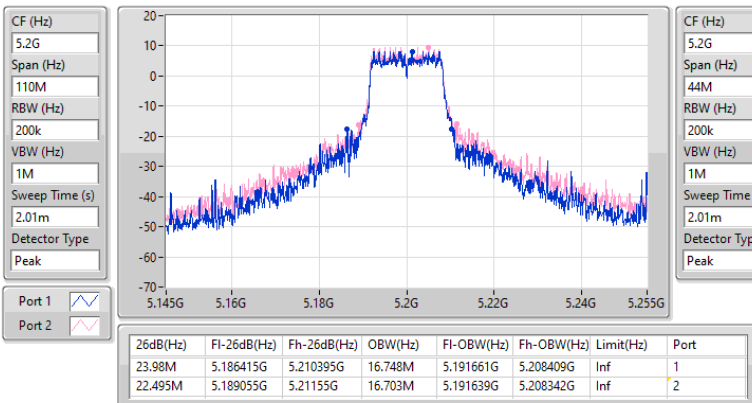


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5240MHz

02/10/2025

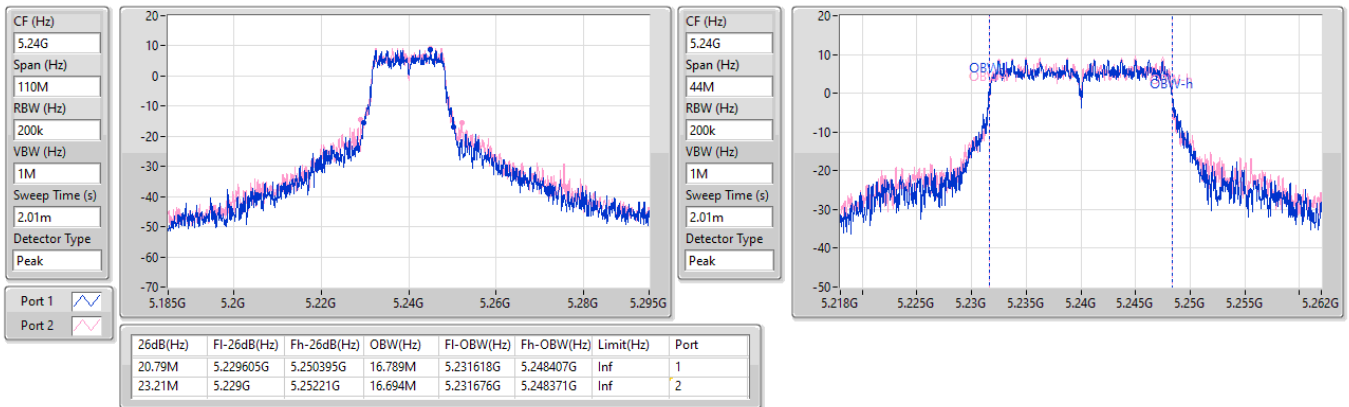

Test Mode: Mode 37

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	30.855M	19.157M	19M2D1D	21.12M	18.984M
802.11be EHT40_Nss2,(MCS0)_2TX	64.24M	38.019M	38M0D1D	40.04M	37.793M
802.11be EHT80_Nss2,(MCS0)_2TX	85.58M	77.281M	77M3D1D	81.4M	77.225M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	24.255M	18.994M	21.67M	19.128M
5200MHz	Pass	Inf	21.12M	18.984M	24.97M	19.071M
5240MHz	Pass	Inf	21.23M	19.046M	30.855M	19.157M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	42.9M	37.973M	44.99M	37.835M
5230MHz	Pass	Inf	40.04M	37.793M	64.24M	38.019M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	85.58M	77.225M	81.4M	77.281M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5180MHz

17/09/2025

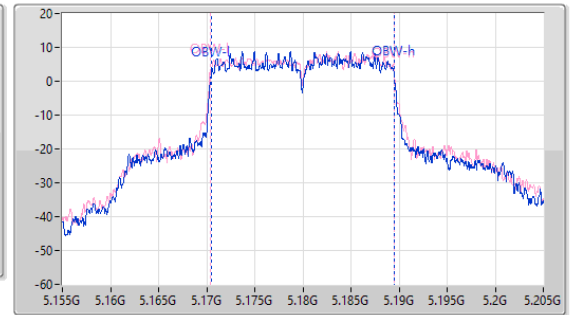
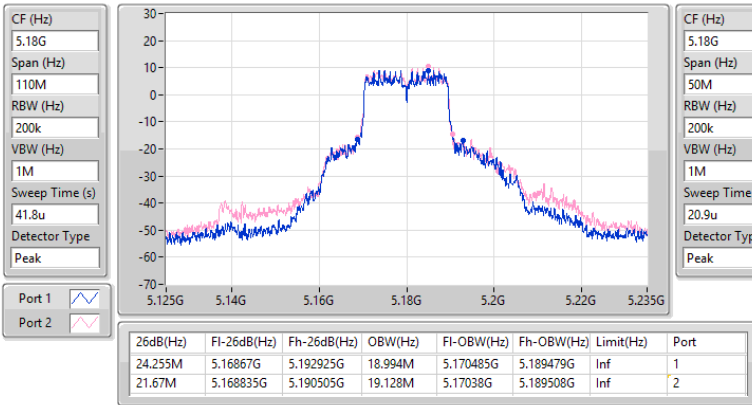


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5200MHz

02/10/2025

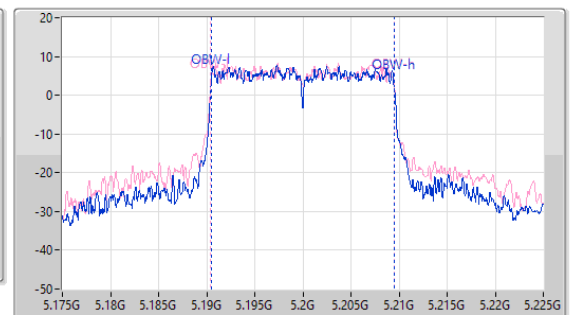
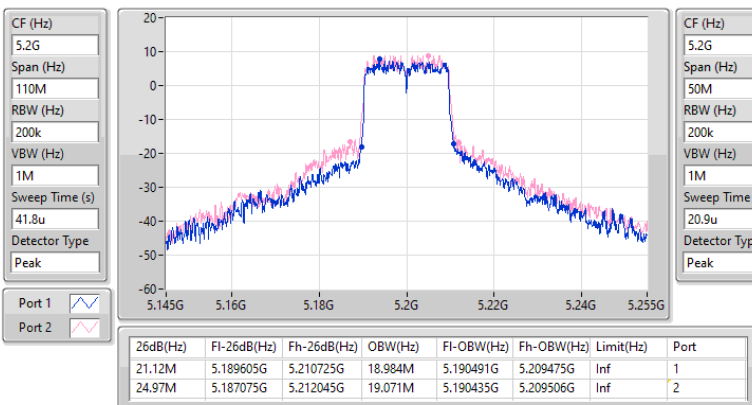


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5240MHz

02/10/2025

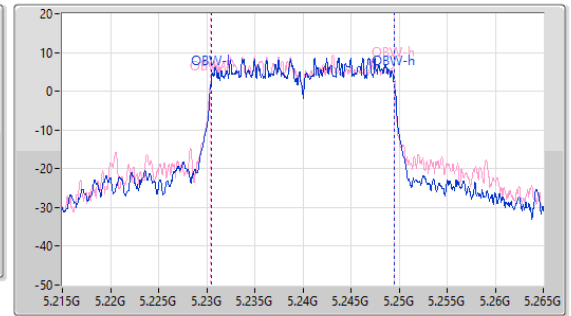
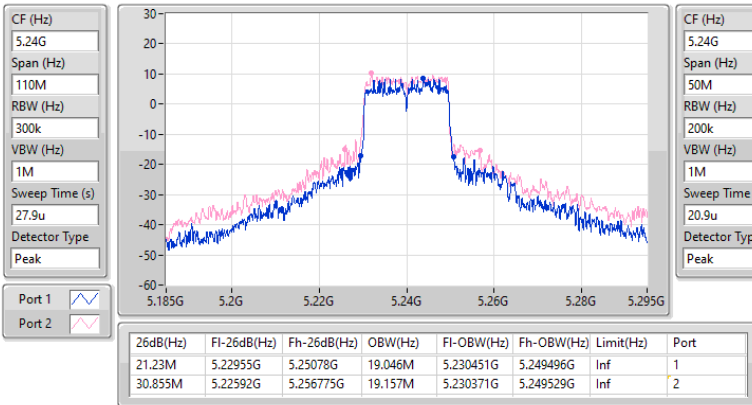


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

5190MHz

17/09/2025

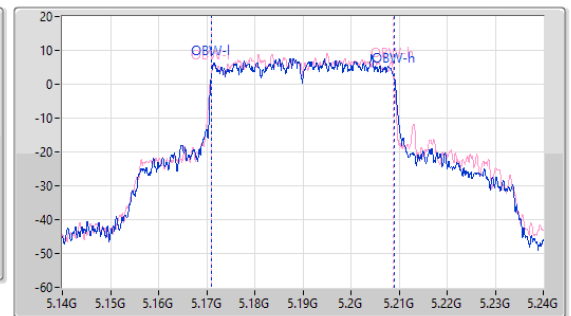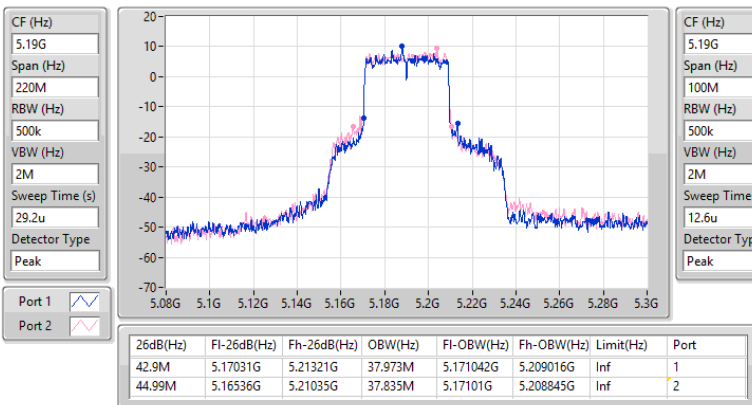


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

5230MHz

02/10/2025

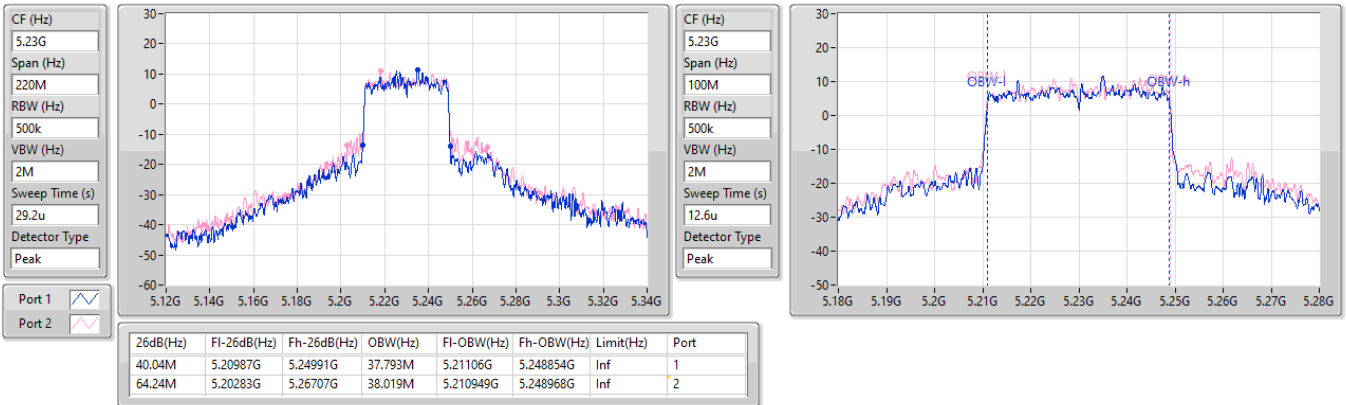


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5210MHz

17/09/2025

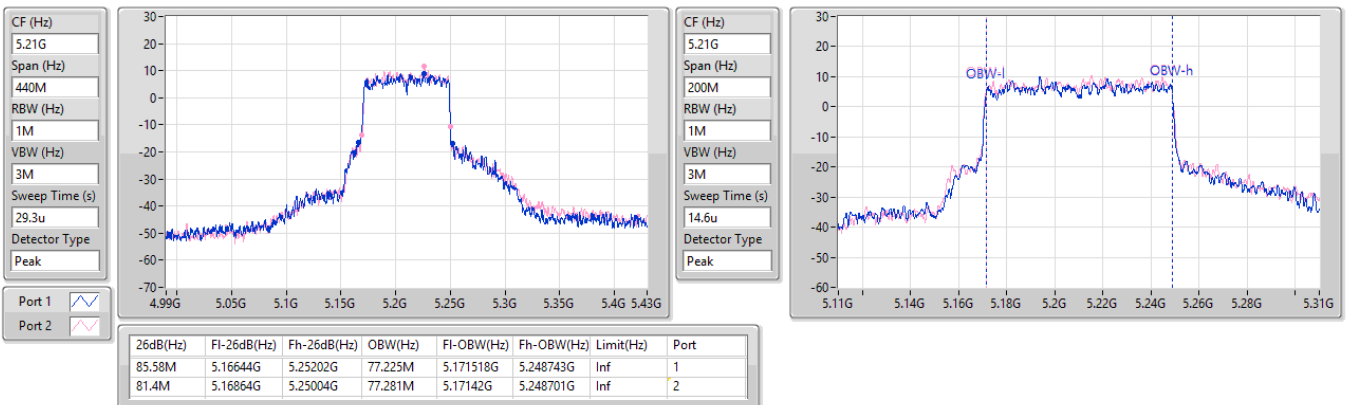

Test Mode: Mode 38

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1.(6Mbps)_4TX	21.615M	16.849M	16M8D1D	20.625M	16.597M
802.11be EHT20_Nss1.(MCS0)_4TX	24.915M	19.207M	19M2D1D	21.065M	18.963M
802.11be EHT40_Nss1.(MCS0)_4TX	47.41M	37.953M	38M0D1D	39.38M	37.692M
802.11be EHT80_Nss1.(MCS0)_4TX	90.42M	77.478M	77M5D1D	86.24M	77.279M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	21.615M	16.821M	21.285M	16.849M	21.56M	16.737M	21.01M	16.78M
5200MHz	Pass	Inf	20.845M	16.676M	21.01M	16.597M	20.735M	16.657M	20.625M	16.6M
5240MHz	Pass	Inf	21.12M	16.697M	21.175M	16.658M	21.01M	16.657M	20.955M	16.614M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22.605M	19.078M	24.915M	19.123M	24.585M	19.1M	22.33M	19.207M
5200MHz	Pass	Inf	21.45M	19.019M	21.395M	19.089M	21.285M	19.032M	21.34M	19.014M
5240MHz	Pass	Inf	21.725M	19.008M	21.395M	19.098M	21.725M	18.963M	21.065M	19.007M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	47.3M	37.953M	46.53M	37.835M	47.08M	37.895M	47.41M	37.838M
5230MHz	Pass	Inf	40.26M	37.728M	40.15M	37.792M	39.82M	37.692M	39.38M	37.749M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	86.24M	77.478M	89.1M	77.392M	90.42M	77.39M	88.22M	77.279M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5180MHz

02/10/2025

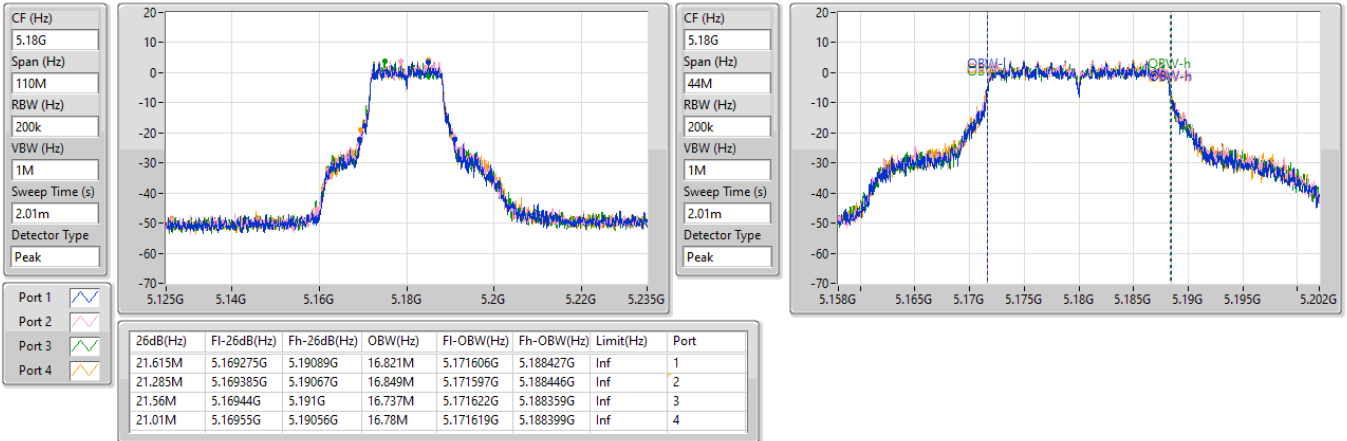


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5200MHz

02/10/2025

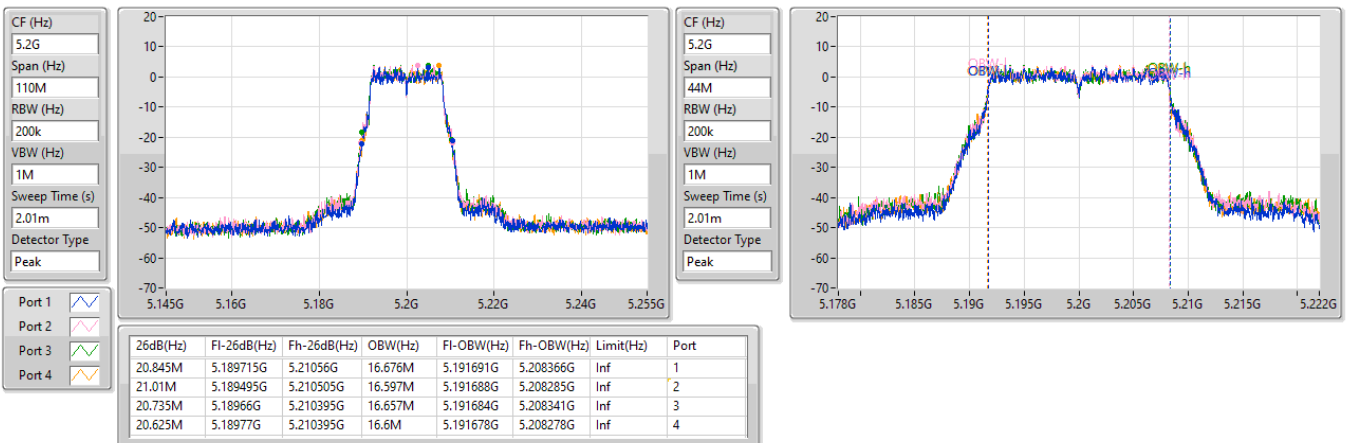


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5240MHz

02/10/2025

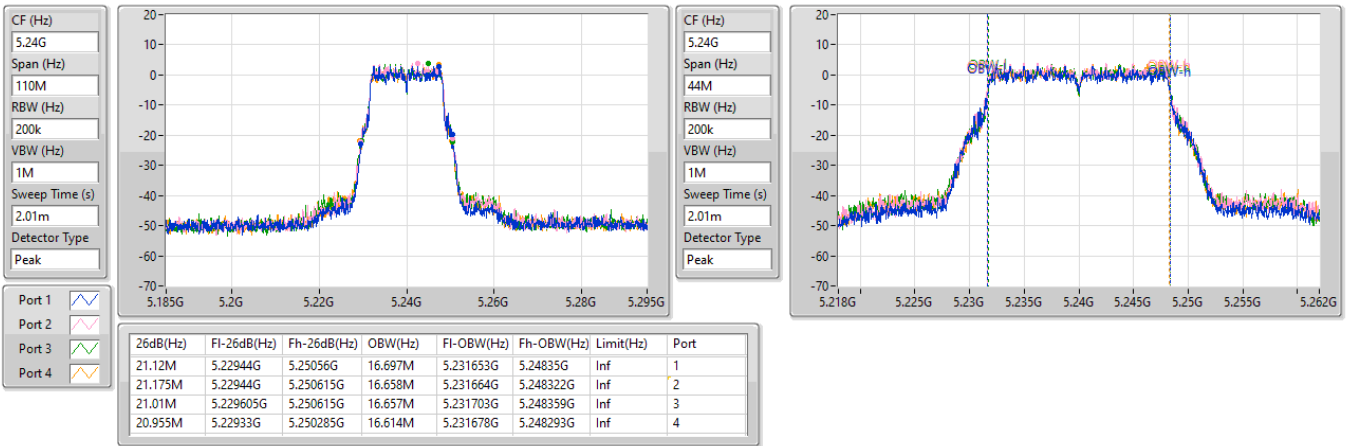


5.15-5.25GHz_802.11be_EHT20_Nss1,(MCS0)_4TX

EBW

5180MHz

02/10/2025

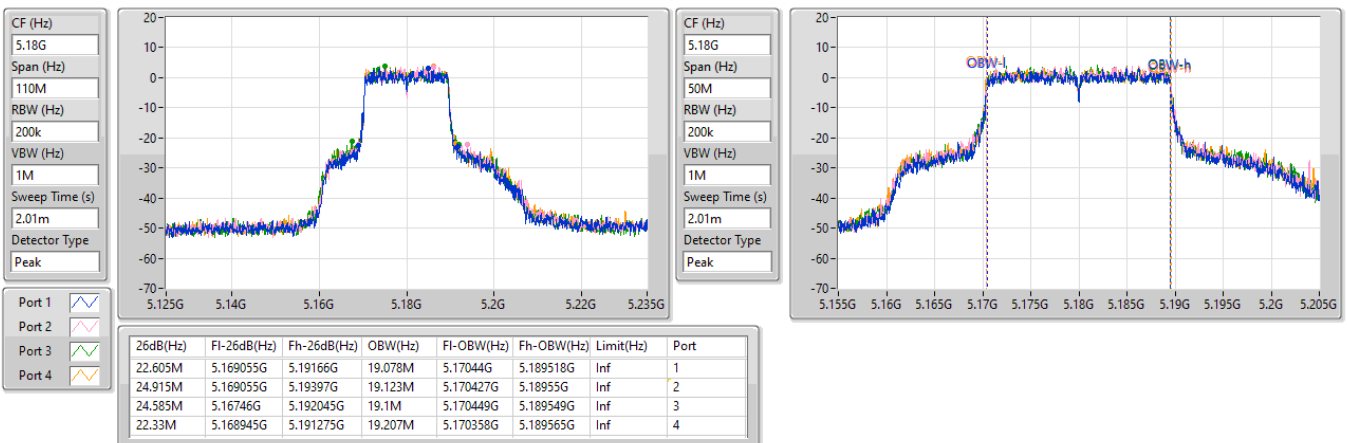


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5200MHz

02/10/2025

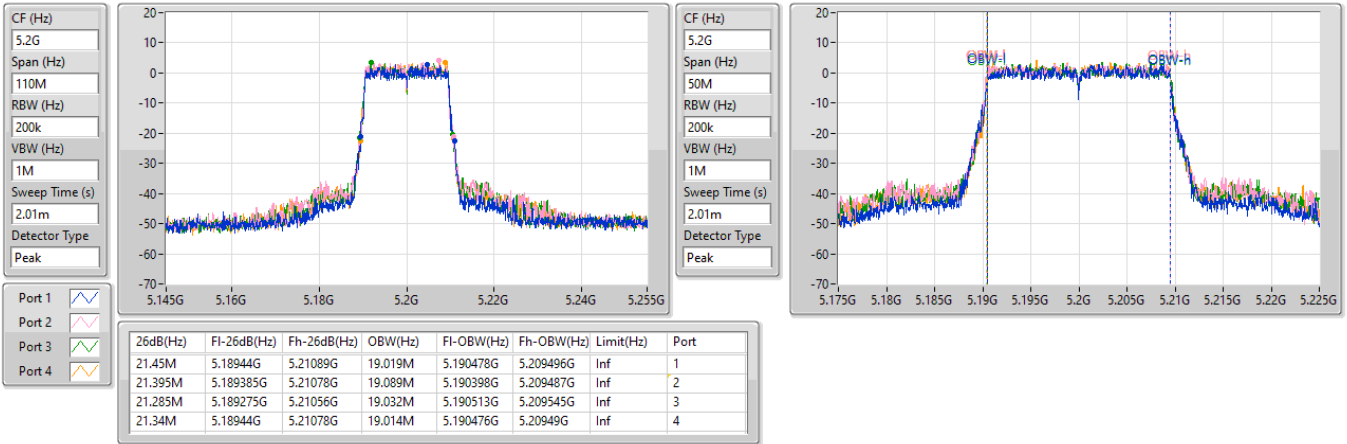


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5240MHz

02/10/2025


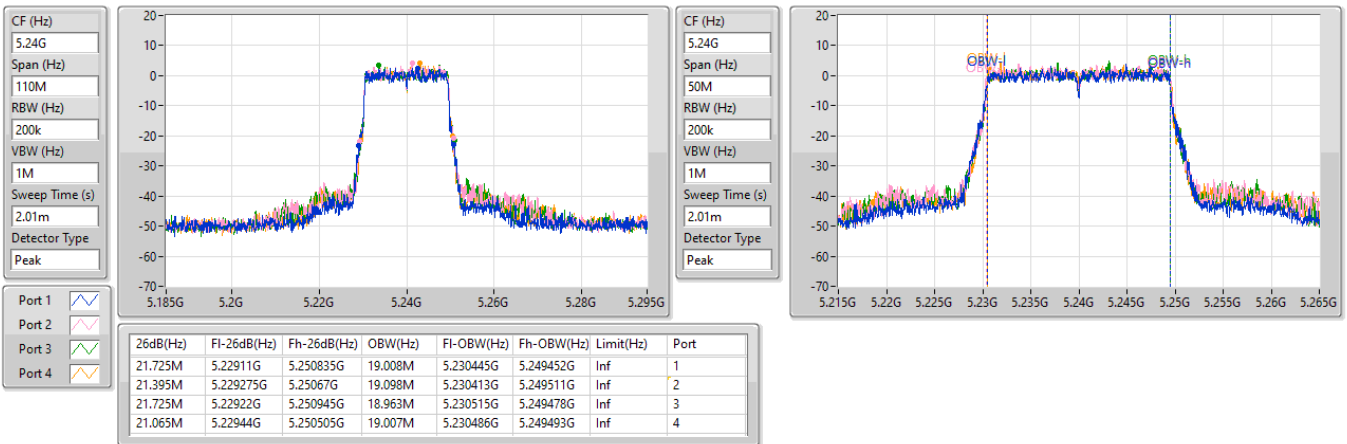


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5190MHz

02/10/2025

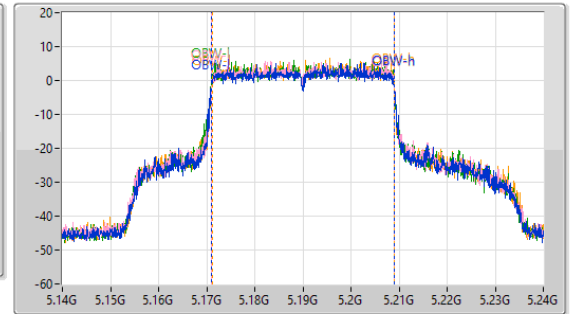
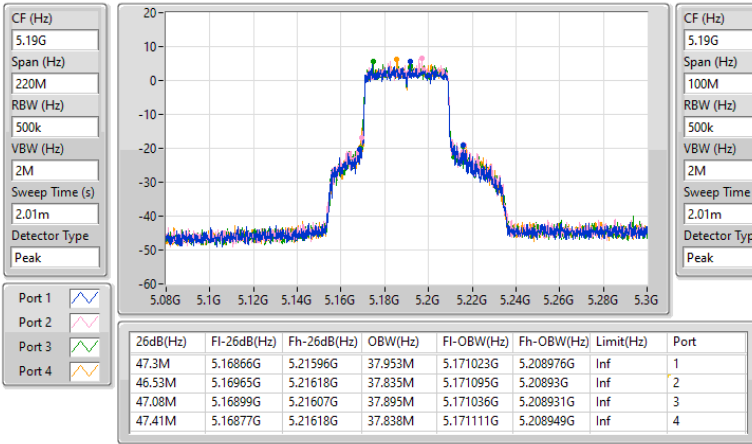


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5230MHz

02/10/2025

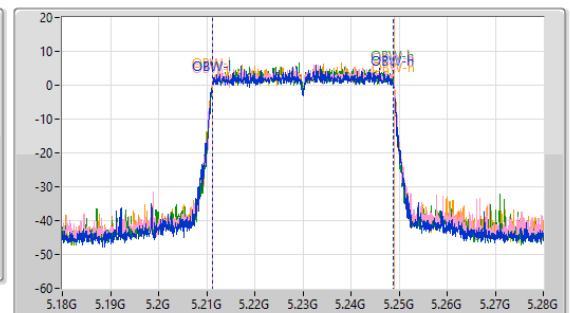
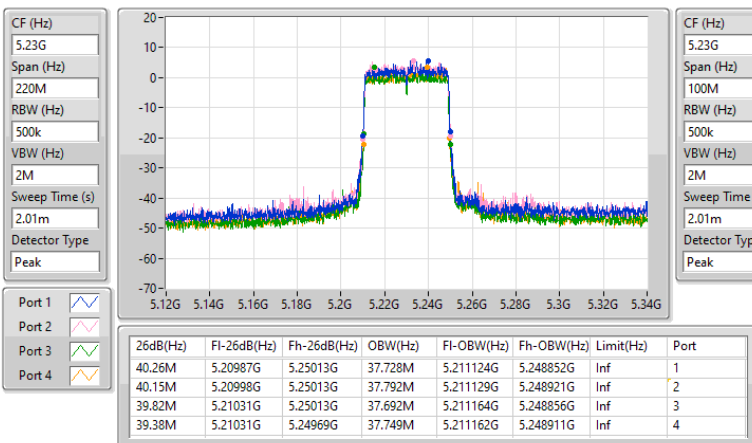


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5210MHz

02/10/2025

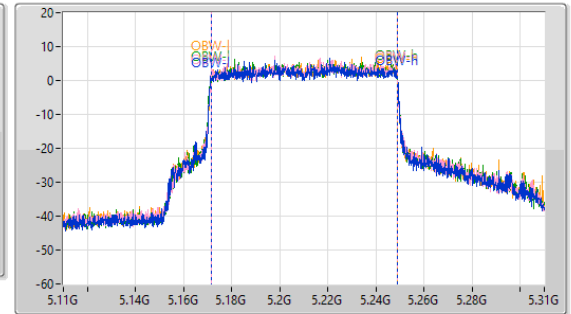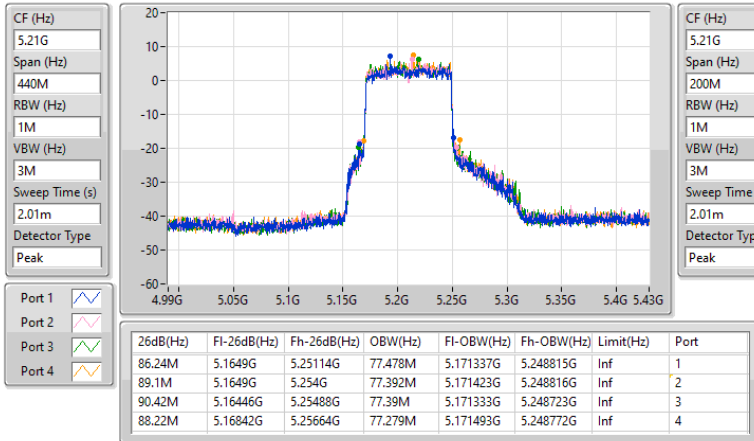

Test Mode: Mode 39

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	25.3M	19.148M	19M1D1D	20.955M	19.02M
802.11be EHT40_Nss4,(MCS0)_4TX	51.04M	37.87M	37M9D1D	39.38M	37.682M
802.11be EHT80_Nss4,(MCS0)_4TX	91.74M	77.435M	77M4D1D	83.6M	77.253M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22.055M	19.112M	25.3M	19.11M	24.255M	19.099M	23.87M	19.148M
5200MHz	Pass	Inf	21.175M	19.04M	21.56M	19.02M	21.45M	19.029M	21.12M	19.026M
5240MHz	Pass	Inf	21.725M	19.053M	21.34M	19.048M	21.45M	19.098M	20.955M	19.033M
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	51.04M	37.827M	45.32M	37.841M	43.45M	37.87M	40.81M	37.828M
5230MHz	Pass	Inf	40.59M	37.815M	40.37M	37.795M	40.48M	37.833M	39.38M	37.682M
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	86.24M	77.27M	84.26M	77.253M	83.6M	77.39M	91.74M	77.435M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5180MHz

02/10/2025

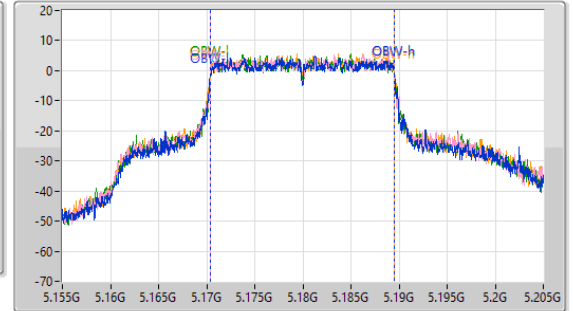
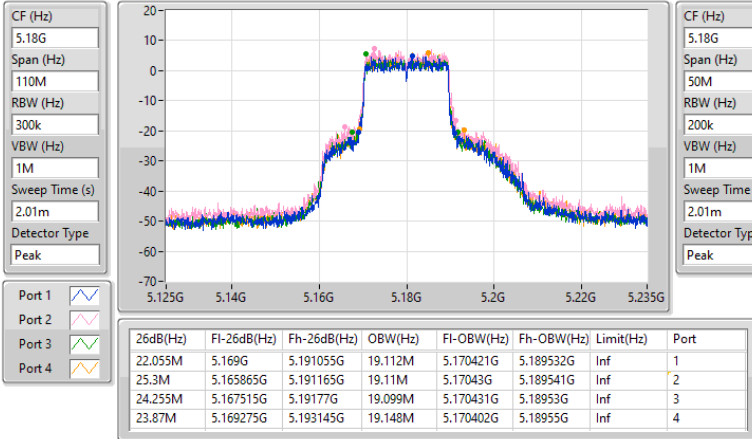


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5200MHz

02/10/2025

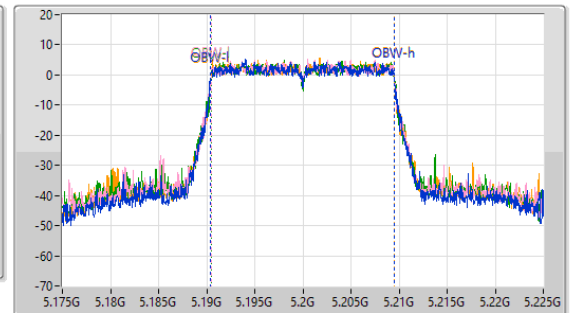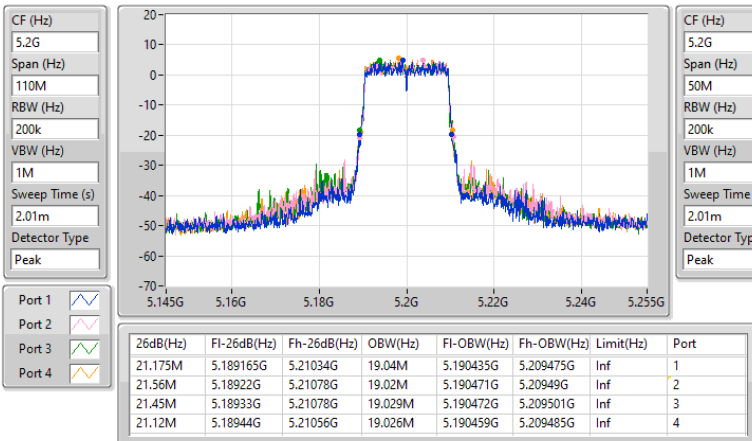


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5240MHz

02/10/2025

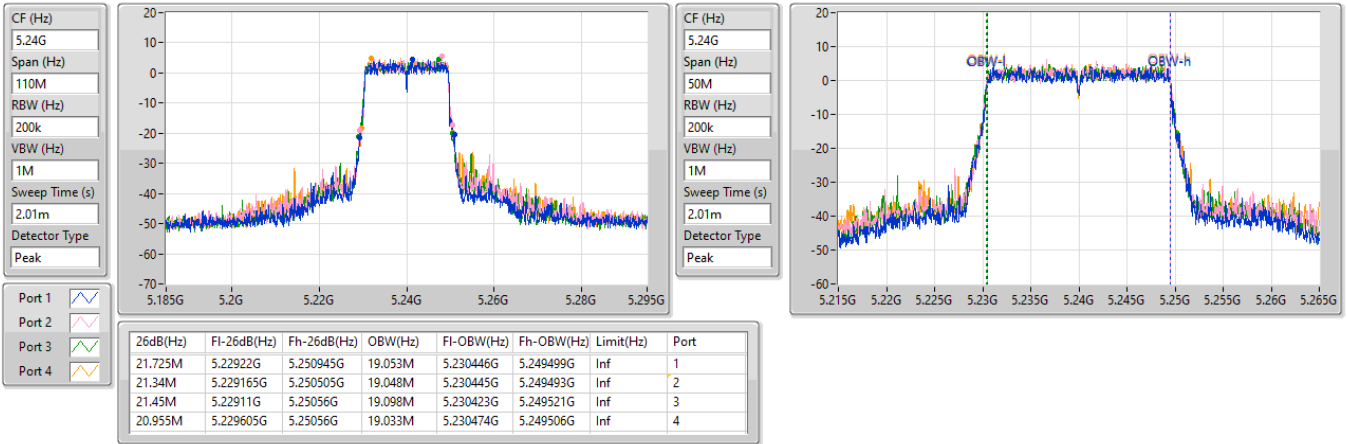


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

5190MHz

02/10/2025


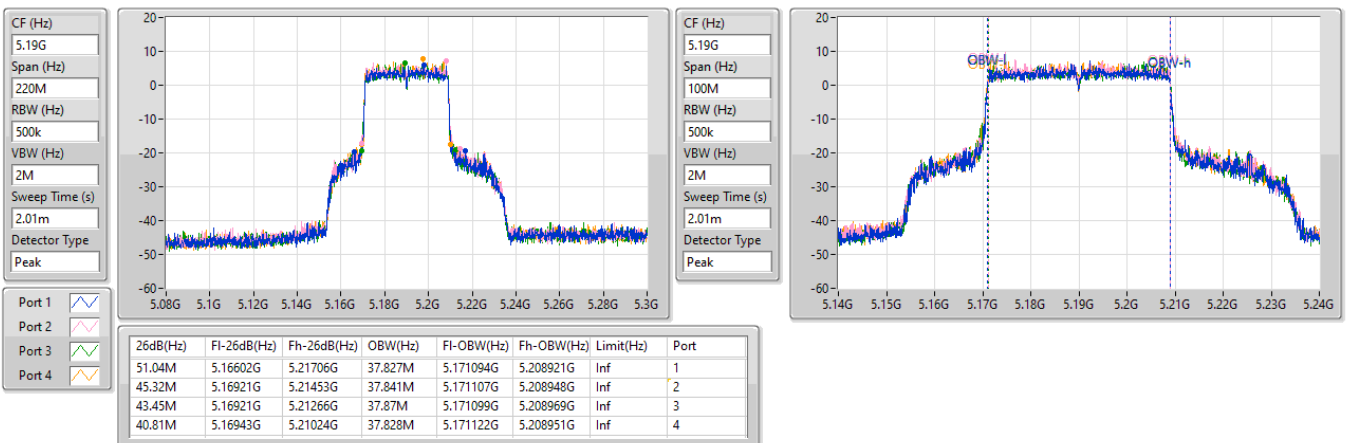


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

5230MHz

02/10/2025

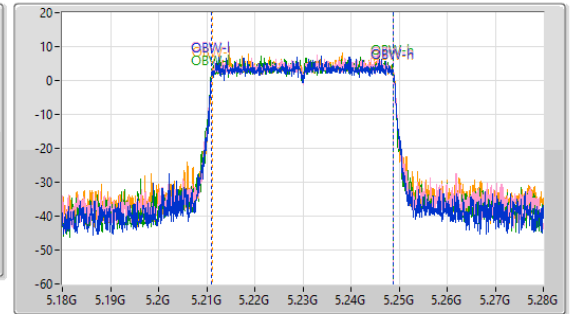
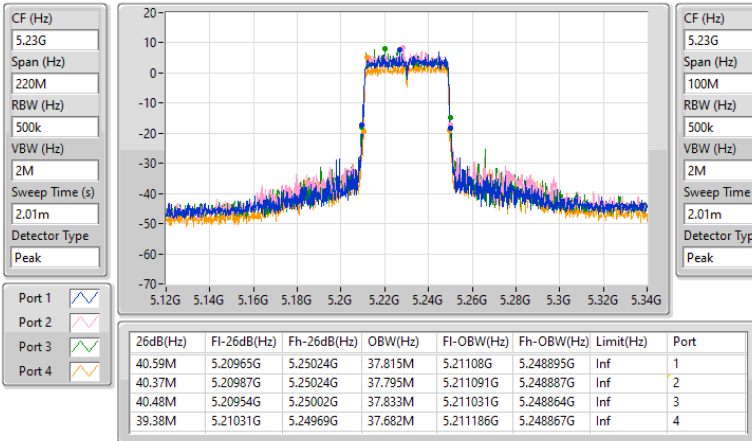


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

5210MHz

02/10/2025

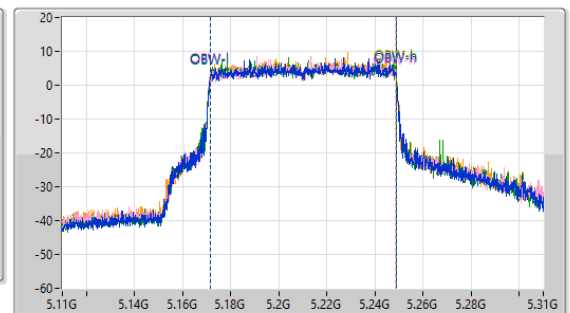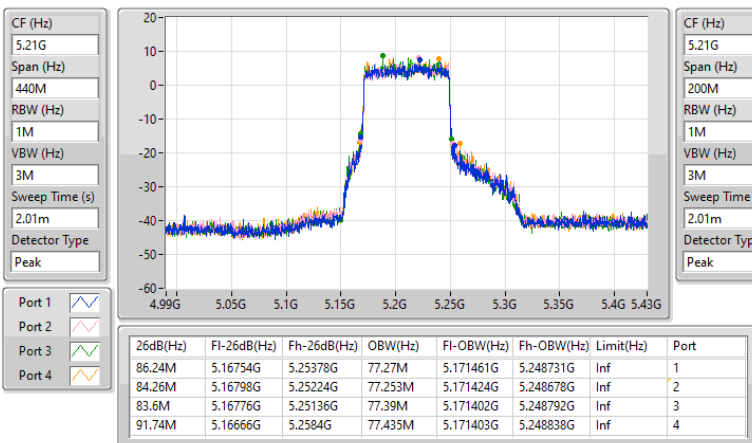

Test Mode: Mode 40

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1.(6Mbps)_1TX	20.845M	17.173M	17M2D1D	20.35M	16.486M
802.11be EHT20_Nss1.(MCS0)_1TX	22.88M	19.276M	19M3D1D	20.955M	19.061M
802.11be EHT40_Nss1.(MCS0)_1TX	47.52M	37.853M	37M9D1D	40.7M	37.811M
802.11be EHT80_Nss1.(MCS0)_1TX	82.28M	77.315M	77M3D1D	82.28M	77.315M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5180MHz	Pass	Inf	20.845M	16.486M
5200MHz	Pass	Inf	20.35M	17.173M
5240MHz	Pass	Inf	20.405M	16.66M
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	22.88M	19.103M
5200MHz	Pass	Inf	20.955M	19.276M
5240MHz	Pass	Inf	21.285M	19.061M
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-
5190MHz	Pass	Inf	47.52M	37.853M
5230MHz	Pass	Inf	40.7M	37.811M
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-
5210MHz	Pass	Inf	82.28M	77.315M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5180MHz

22/09/2025


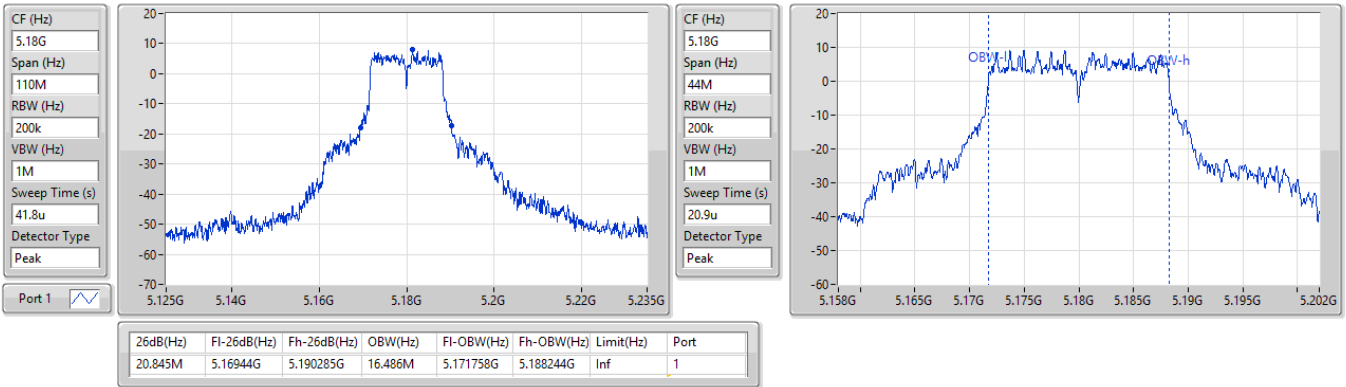

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5200MHz

22/09/2025


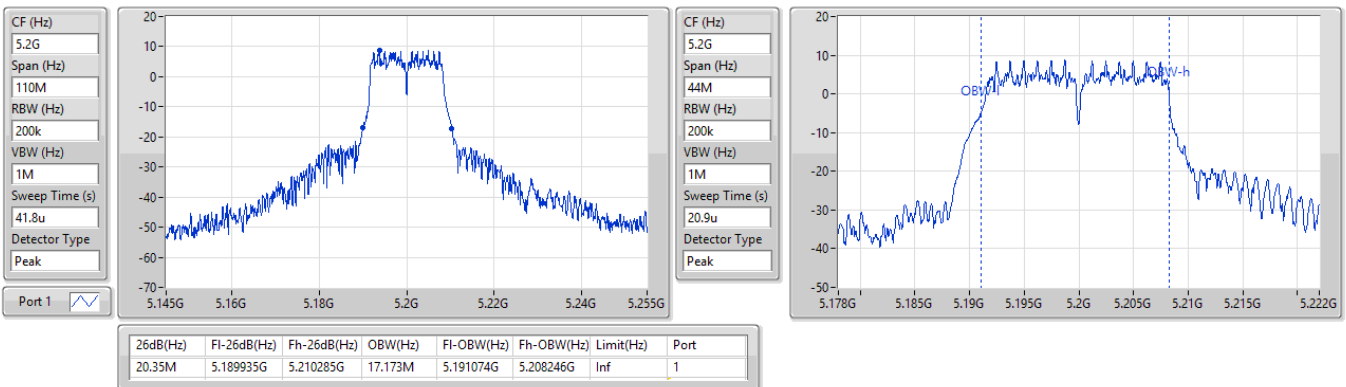


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5240MHz

22/09/2025

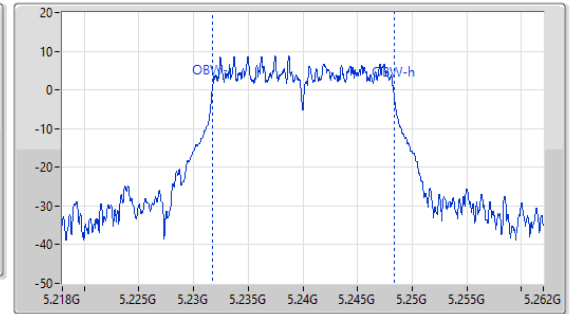
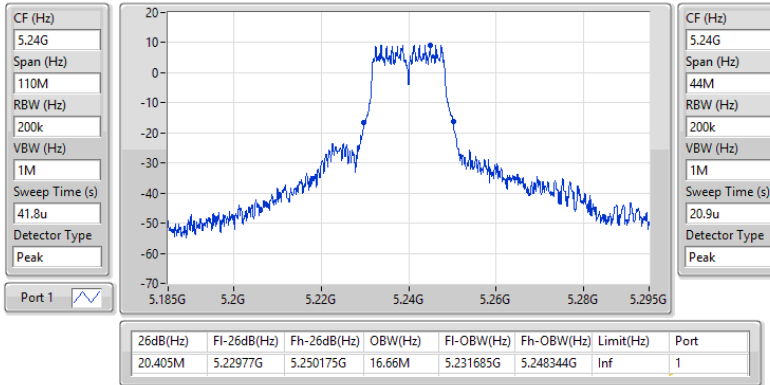

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5180MHz

22/09/2025

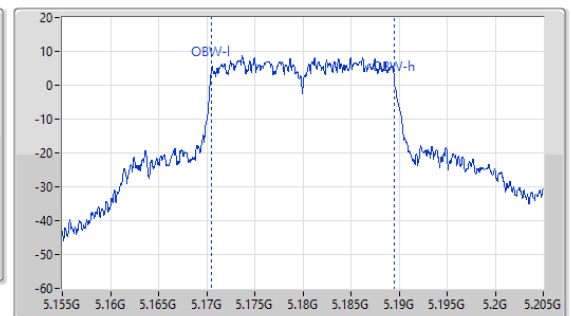
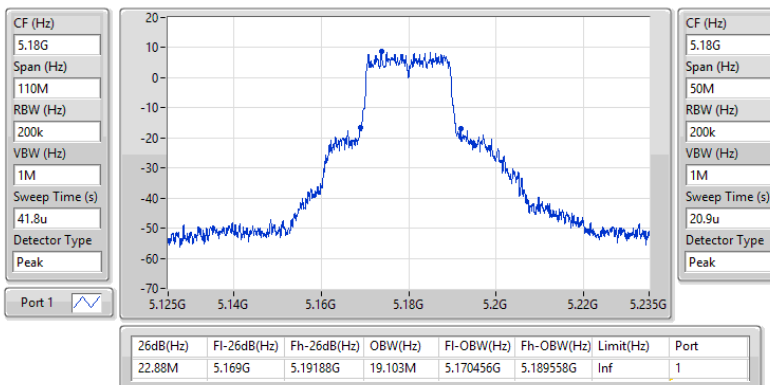


5.15-5.25GHz 802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5200MHz

22/09/2025

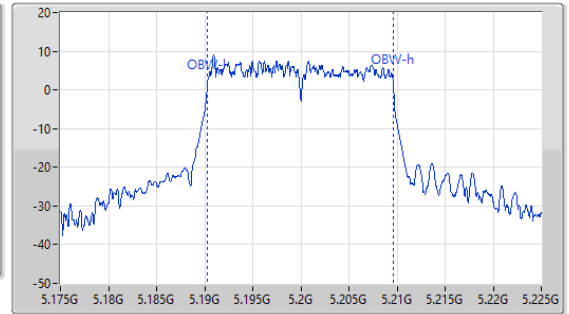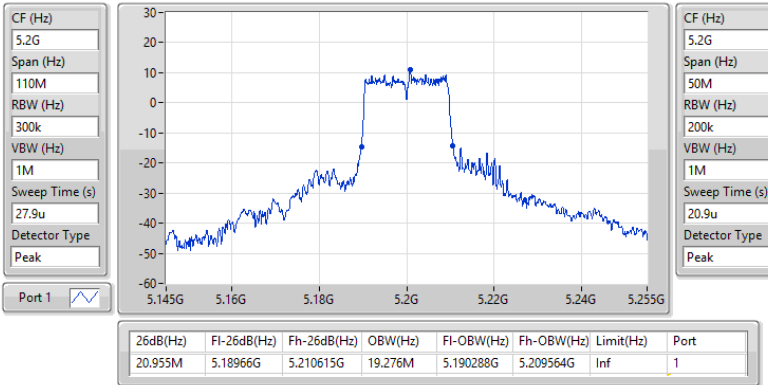
5.15-5.25GHz 802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5240MHz

22/09/2025

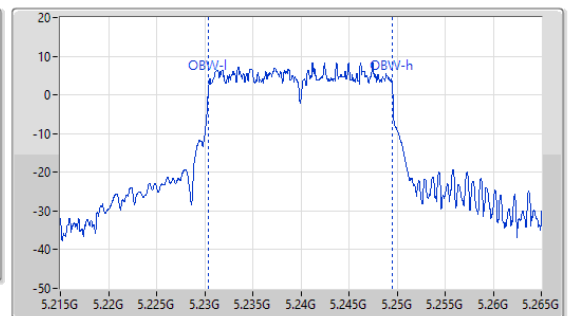
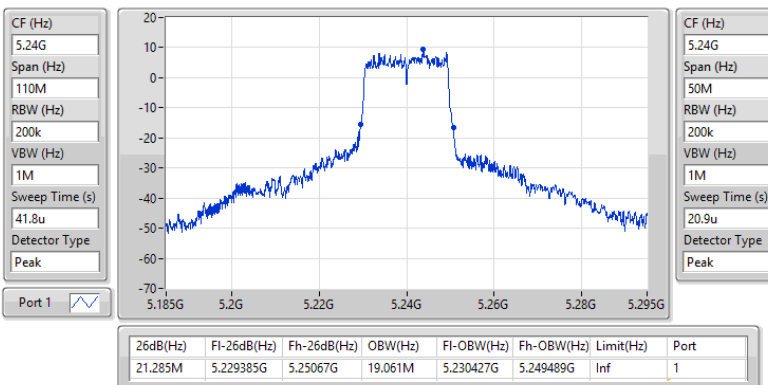


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5190MHz

22/09/2025

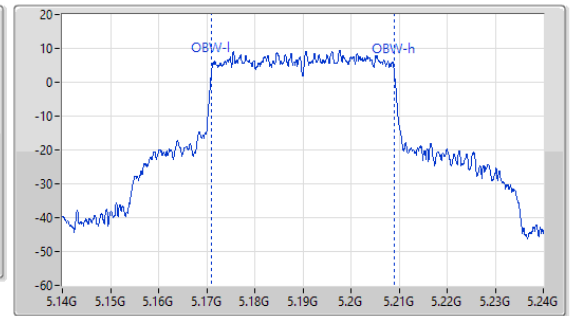
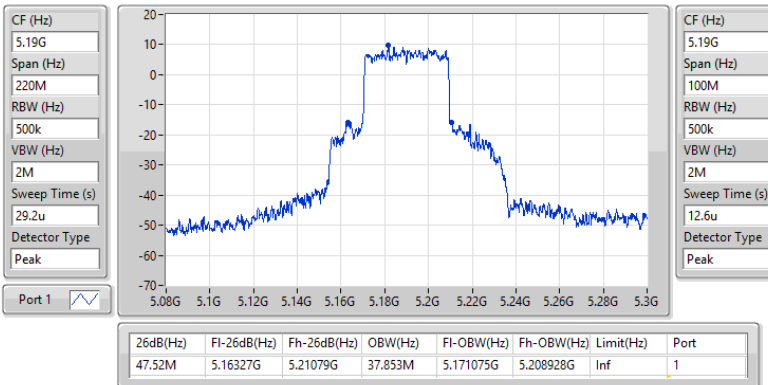


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5230MHz

22/09/2025

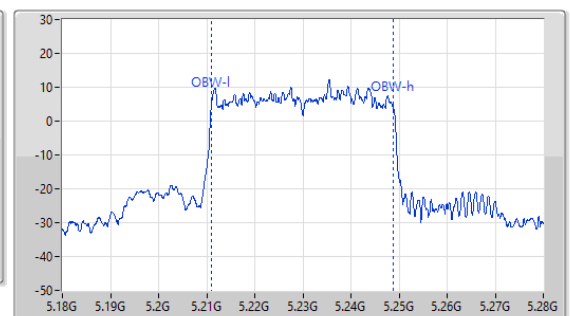
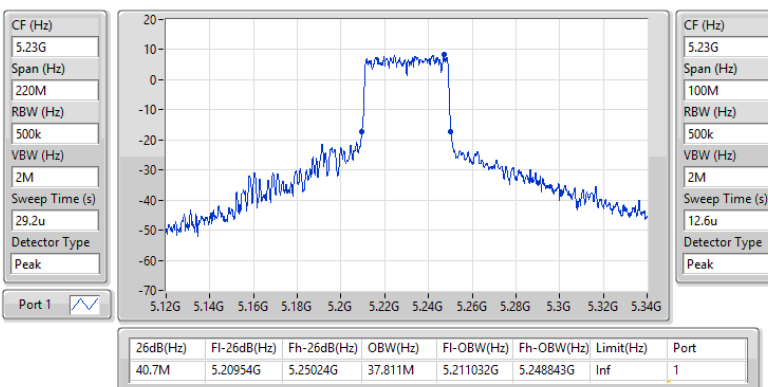


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5210MHz

22/09/2025

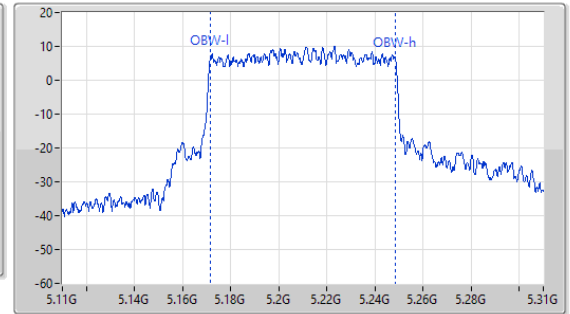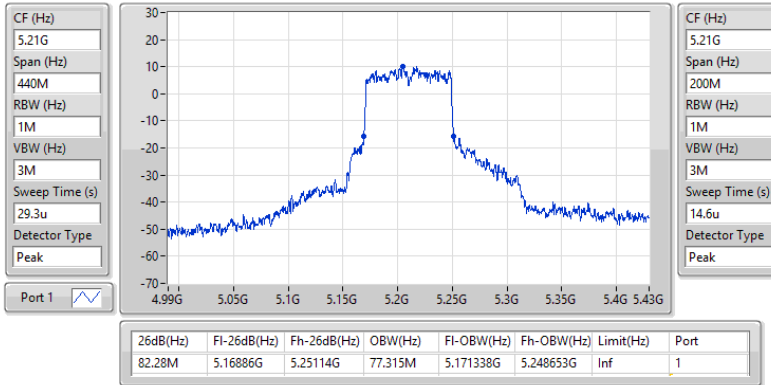

Test Mode: Mode 41

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1_(6Mbps)_2TX	21.175M	16.688M	16M7D1D	20.24M	16.438M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.68M	16.688M	20.57M	16.525M
5200MHz	Pass	Inf	21.175M	16.682M	20.9M	16.438M
5240MHz	Pass	Inf	20.57M	16.678M	20.24M	16.611M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5180MHz

22/09/2025

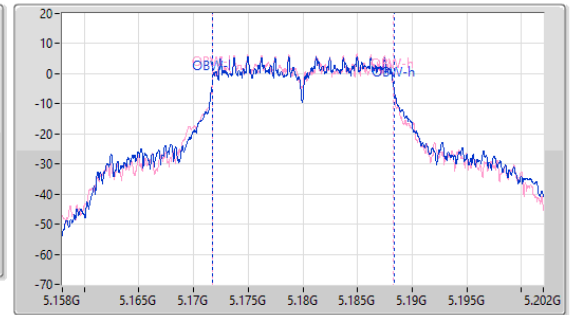
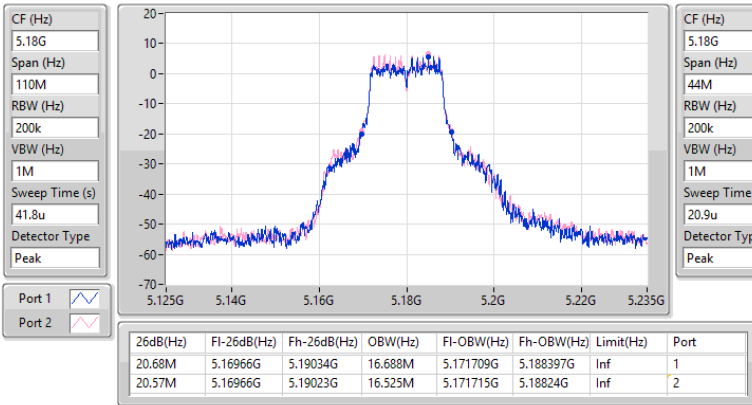


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5200MHz

22/09/2025

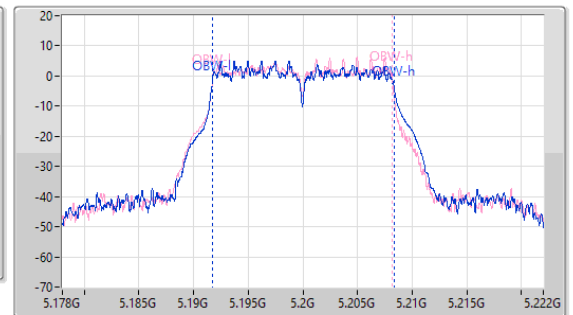
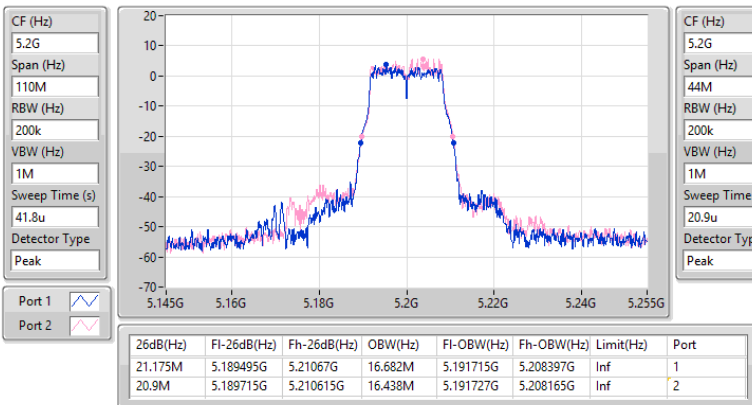


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5240MHz

22/09/2025

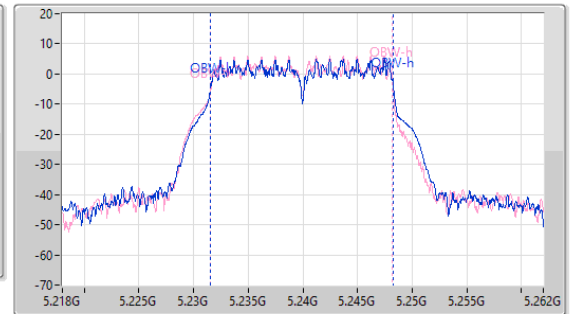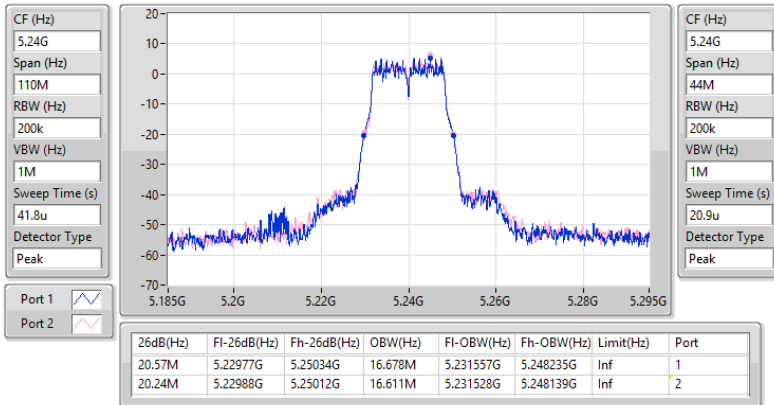

Test Mode: Mode 42

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	25.465M	19.121M	19M1D1D	21.065M	18.938M
802.11be EHT40_Nss2,(MCS0)_2TX	42.35M	37.935M	37M9D1D	39.38M	37.695M
802.11be EHT80_Nss2,(MCS0)_2TX	83.82M	77.555M	77M6D1D	82.28M	77.45M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.935M	19.081M	25.465M	19.121M
5200MHz	Pass	Inf	21.175M	19.008M	21.67M	19.068M
5240MHz	Pass	Inf	21.065M	18.938M	21.34M	19.007M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	41.91M	37.91M	42.35M	37.798M
5230MHz	Pass	Inf	39.38M	37.695M	39.71M	37.935M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	83.82M	77.45M	82.28M	77.555M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5180MHz

22/09/2025

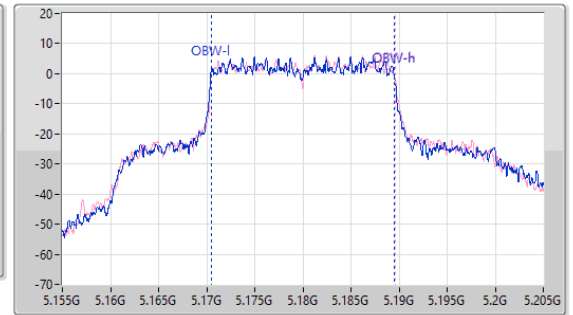
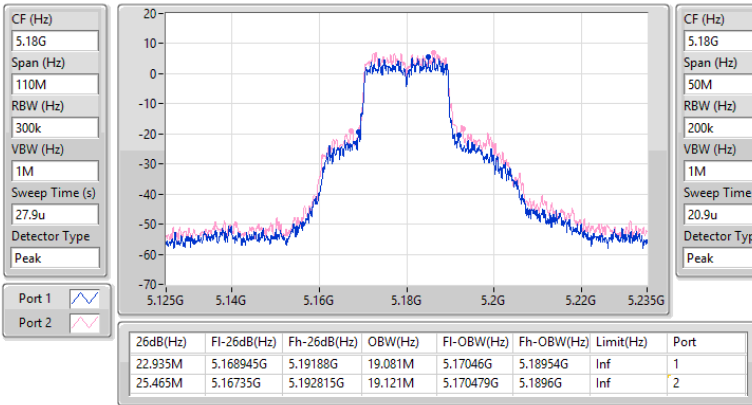

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5200MHz

22/09/2025

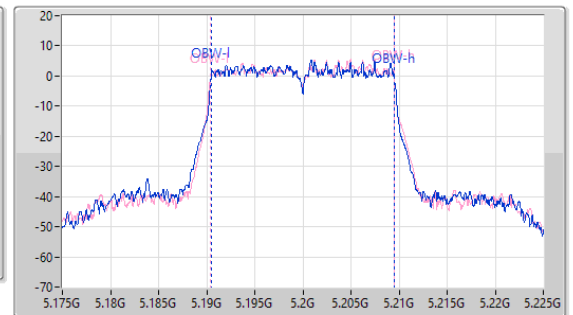
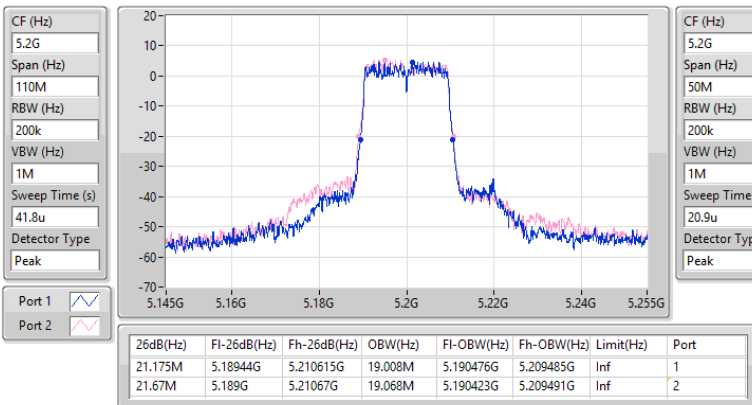


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5240MHz

22/09/2025

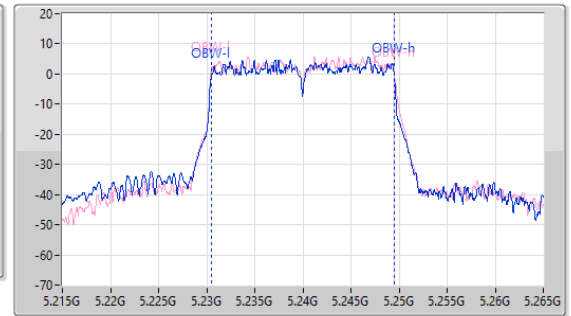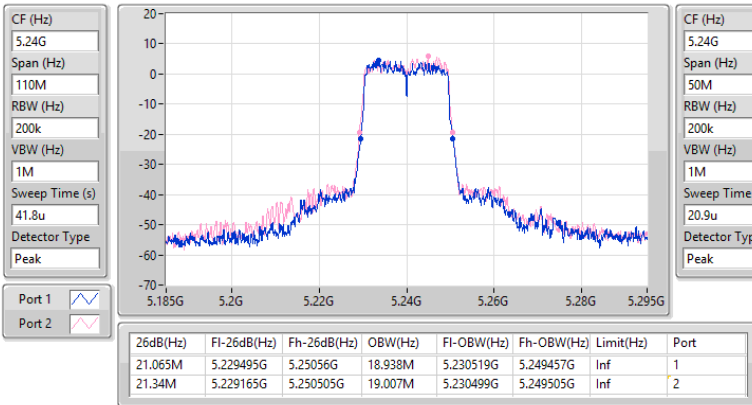

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5190MHz

22/09/2025

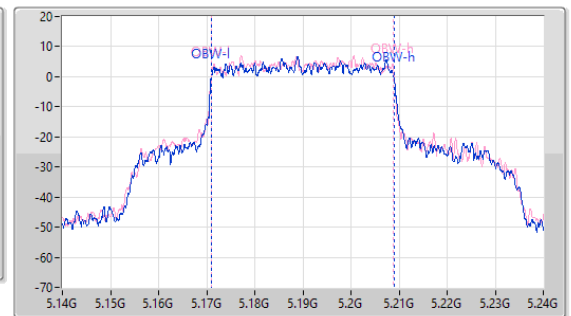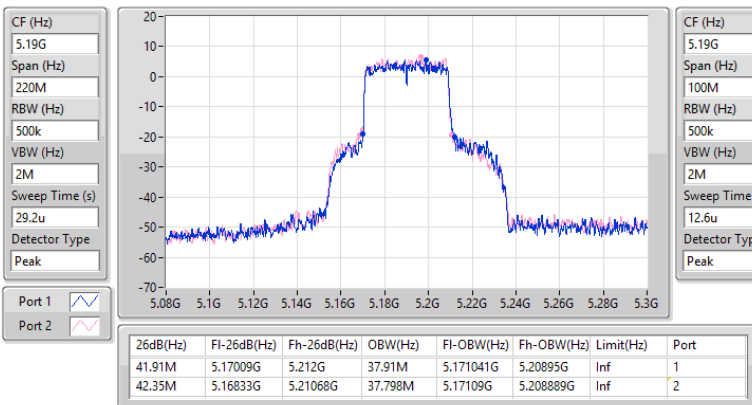


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5230MHz

22/09/2025

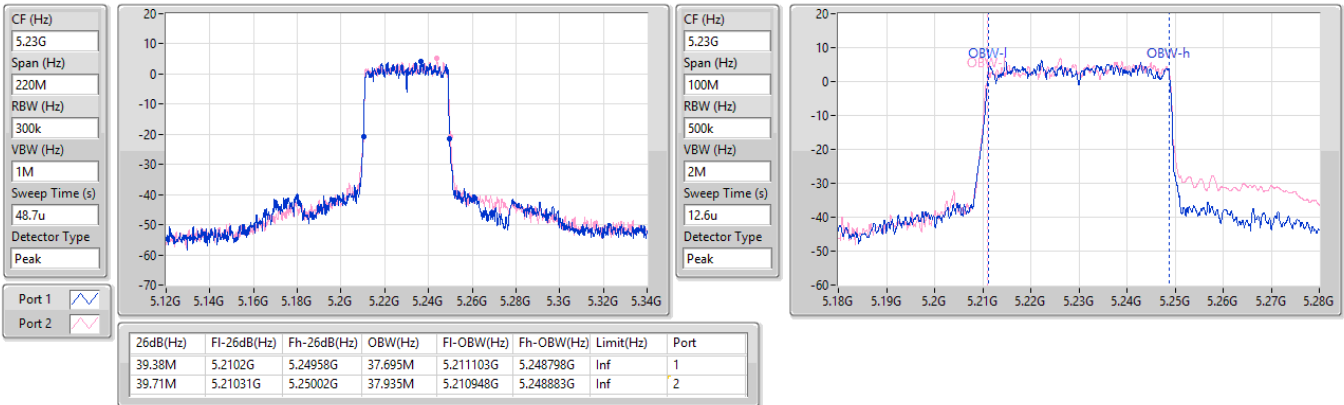
5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
5210MHz

22/09/2025

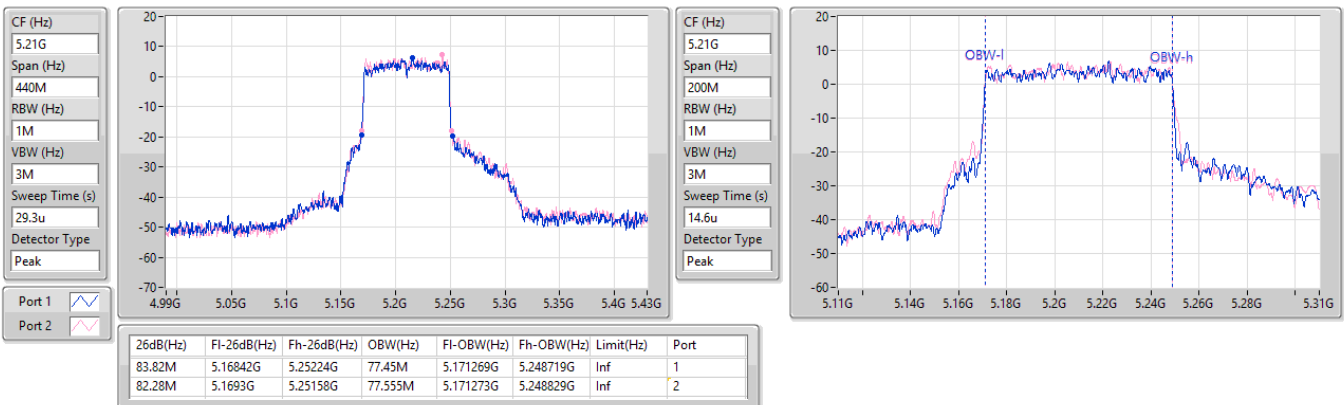

Test Mode: Mode 43

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1.(6Mbps)_4TX	21.23M	17.006M	17M0D1D	20.075M	16.516M
802.11be EHT20_Nss1.(MCS0)_4TX	24.255M	19.167M	19M2D1D	20.845M	18.951M
802.11be EHT40_Nss1.(MCS0)_4TX	44M	37.944M	37M9D1D	39.16M	37.614M
802.11be EHT80_Nss1.(MCS0)_4TX	89.32M	77.49M	77M5D1D	82.94M	77.211M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	20.79M	16.526M	21.065M	16.832M	21.01M	17.006M	21.23M	16.828M
5200MHz	Pass	Inf	20.185M	16.841M	20.57M	16.578M	20.075M	16.602M	20.46M	16.576M
5240MHz	Pass	Inf	20.13M	16.516M	20.845M	16.918M	20.68M	16.525M	20.46M	16.601M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	21.505M	19.049M	23.265M	19.167M	23.045M	19.022M	24.255M	19.075M
5200MHz	Pass	Inf	21.285M	19.006M	21.67M	19.112M	21.065M	19.001M	20.845M	19.007M
5240MHz	Pass	Inf	21.615M	18.951M	20.955M	19.061M	21.45M	19.035M	20.955M	18.978M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	41.03M	37.944M	41.36M	37.865M	44M	37.932M	42.24M	37.735M
5230MHz	Pass	Inf	40.26M	37.614M	40.37M	37.764M	39.16M	37.668M	39.16M	37.632M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	89.32M	77.221M	82.94M	77.49M	85.36M	77.322M	83.82M	77.211M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5180MHz

22/09/2025

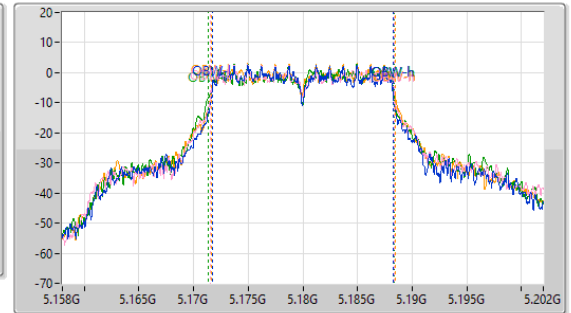
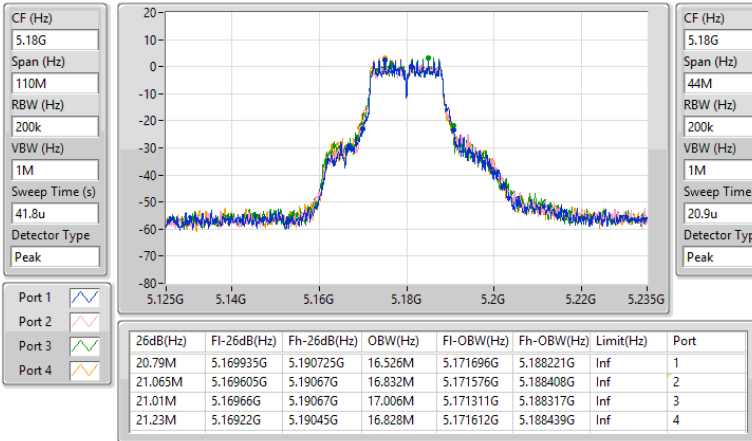


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5200MHz

22/09/2025

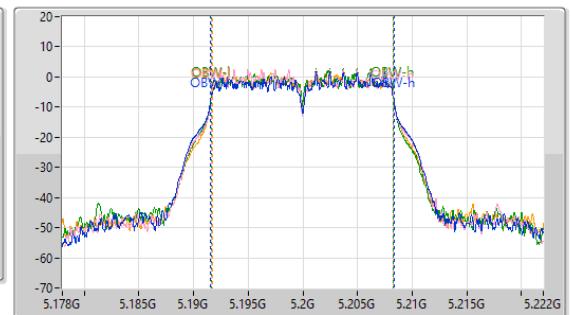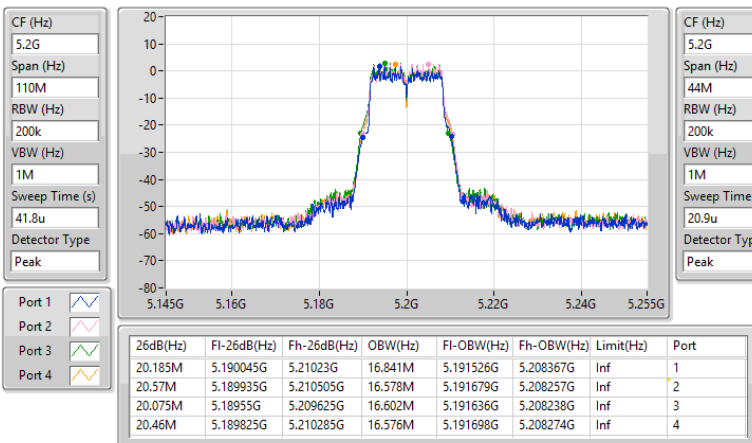


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5240MHz

22/09/2025

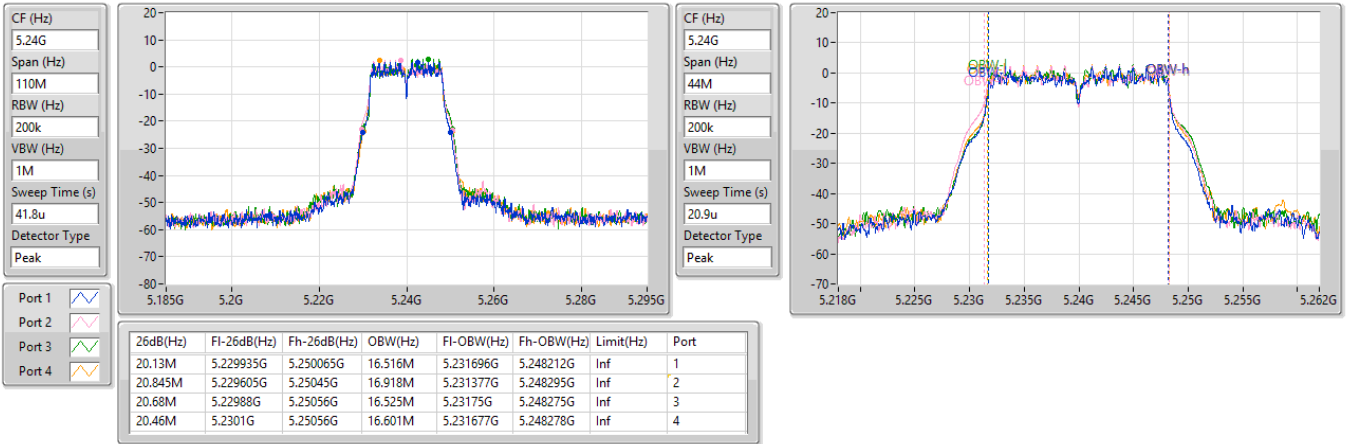


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5180MHz

22/09/2025

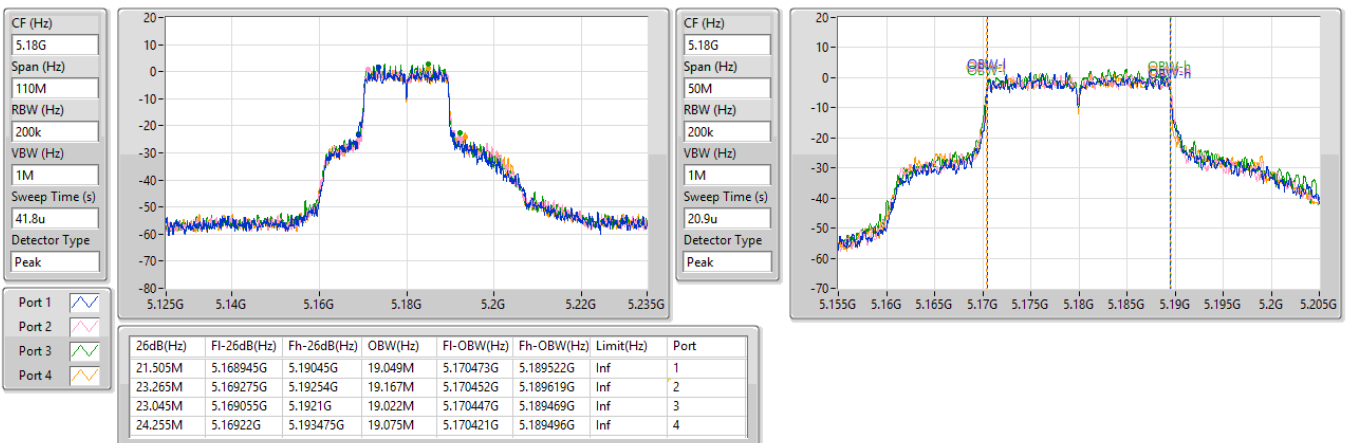


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5200MHz

22/09/2025

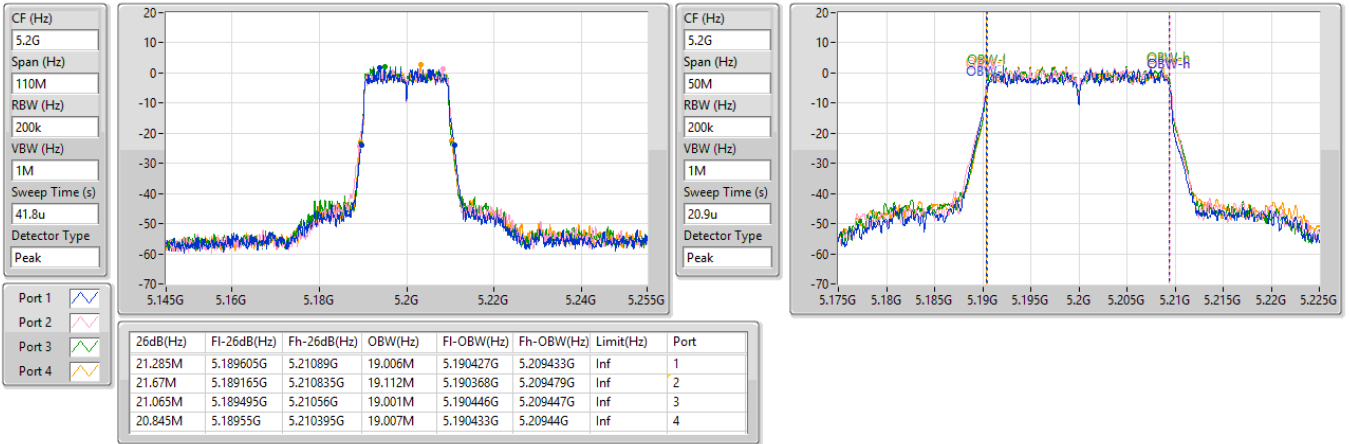


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5240MHz

22/09/2025

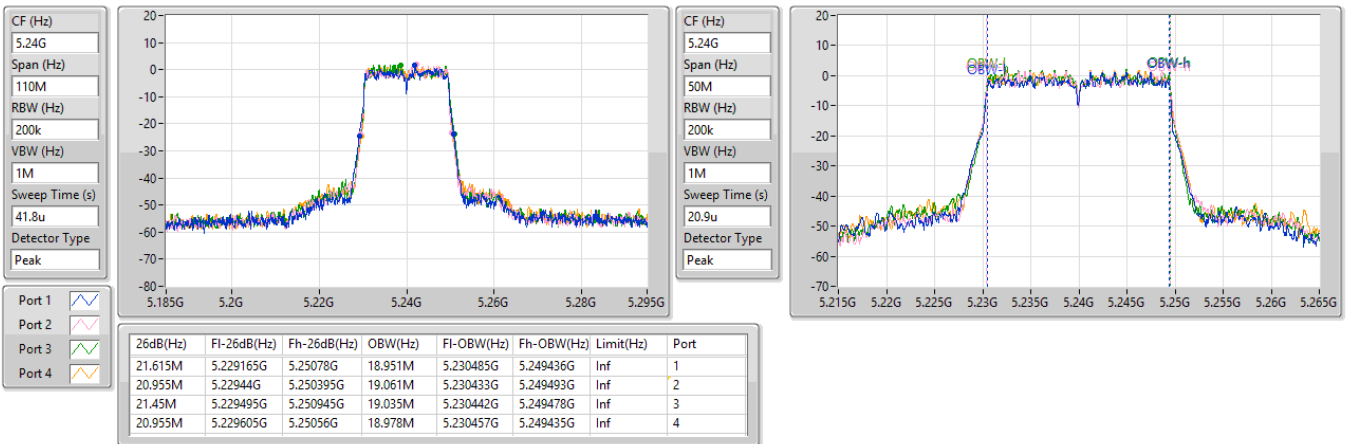


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5190MHz

22/09/2025

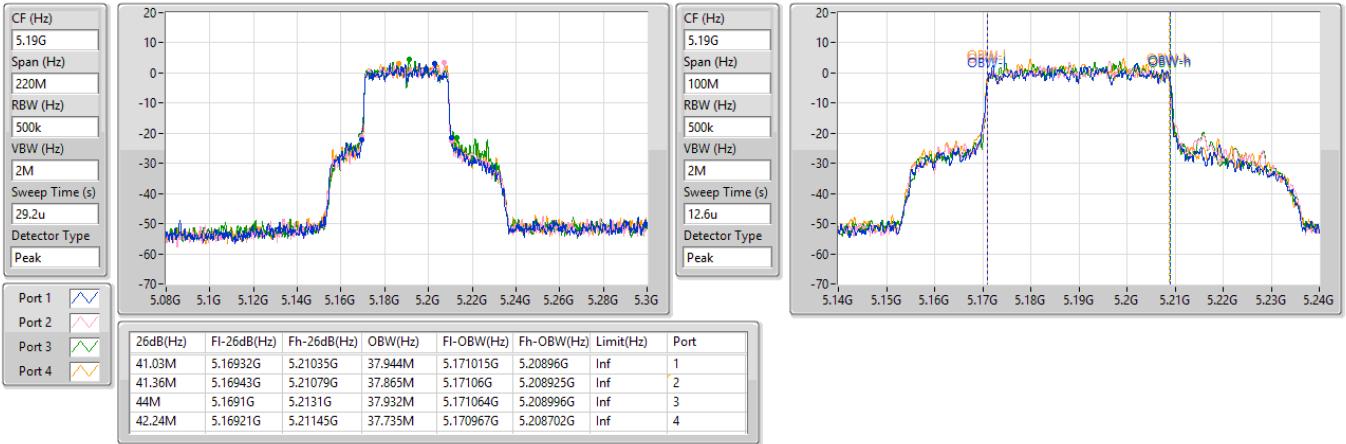


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5230MHz

22/09/2025

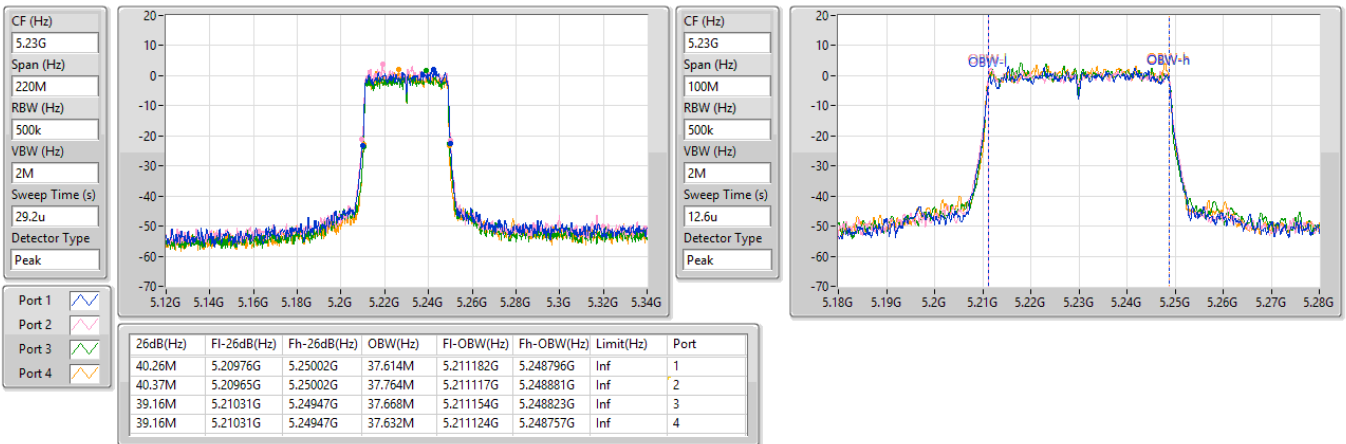


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5210MHz

22/09/2025

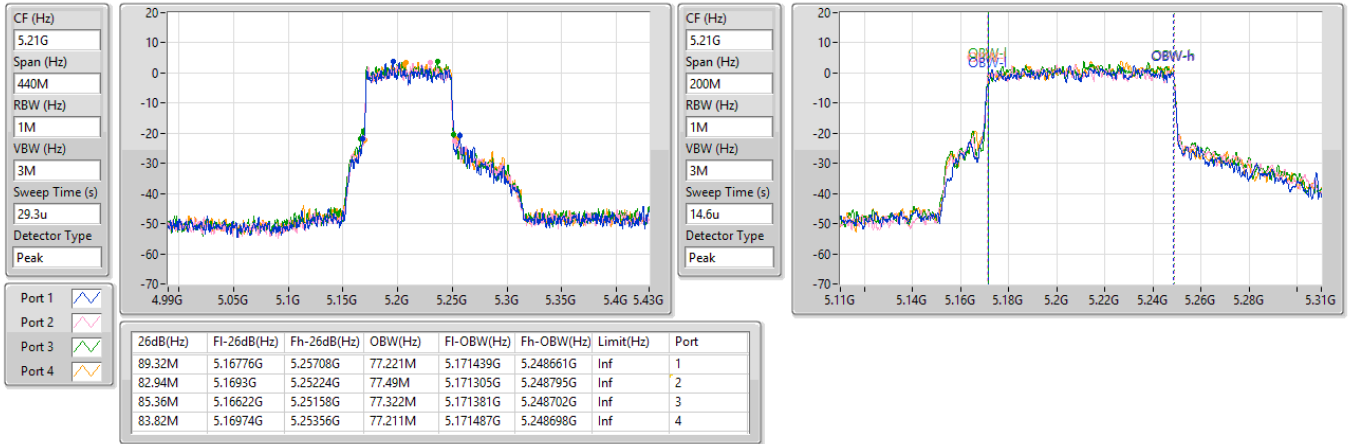

Test Mode: Mode 44

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	24.365M	19.215M	19M2D1D	20.515M	18.974M
802.11be EHT40_Nss4,(MCS0)_4TX	43.12M	37.984M	38M0D1D	39.27M	37.524M
802.11be EHT80_Nss4,(MCS0)_4TX	90.64M	77.366M	77M4D1D	81.4M	77.03M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	24.365M	19.087M	21.45M	19.095M	21.505M	19.215M	21.56M	19.114M
5200MHz	Pass	Inf	21.505M	19.168M	21.175M	19.102M	20.515M	19.035M	21.12M	18.987M
5240MHz	Pass	Inf	21.56M	18.974M	21.12M	18.986M	21.065M	18.987M	21.175M	19.051M
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	42.02M	37.629M	40.7M	37.984M	43.12M	37.76M	41.36M	37.784M
5230MHz	Pass	Inf	40.37M	37.524M	40.15M	37.636M	40.7M	37.59M	39.27M	37.835M
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	81.4M	77.03M	90.64M	77.366M	85.8M	77.265M	83.16M	77.211M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5180MHz

22/09/2025

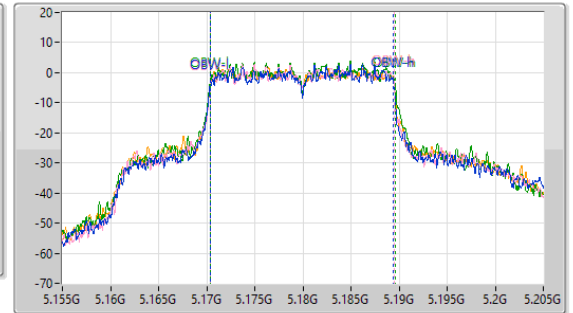
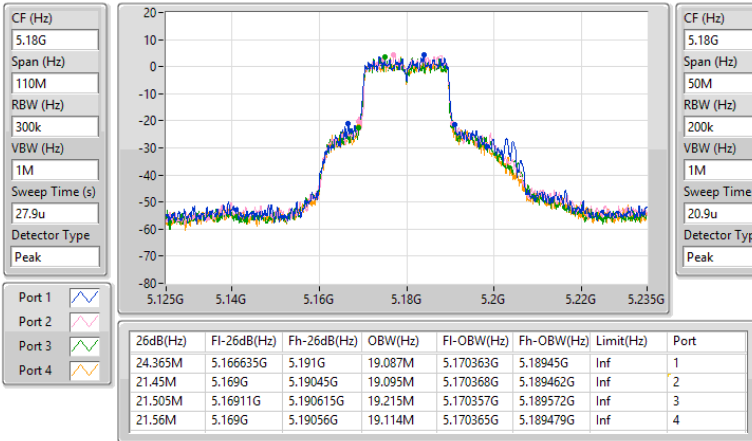


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5200MHz

22/09/2025

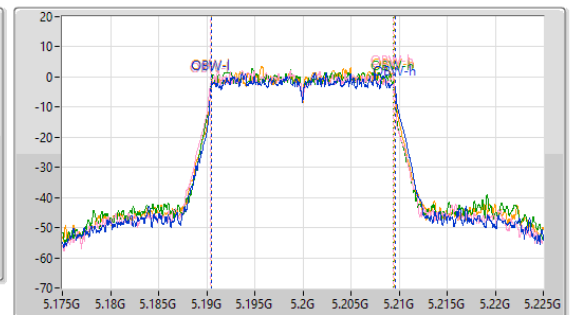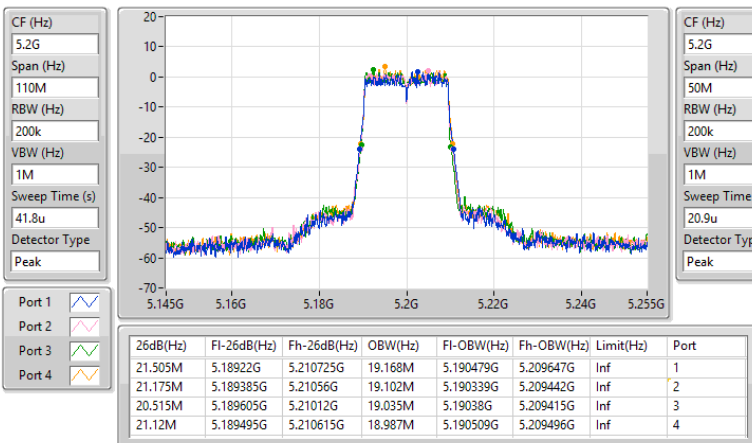


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5240MHz

22/09/2025

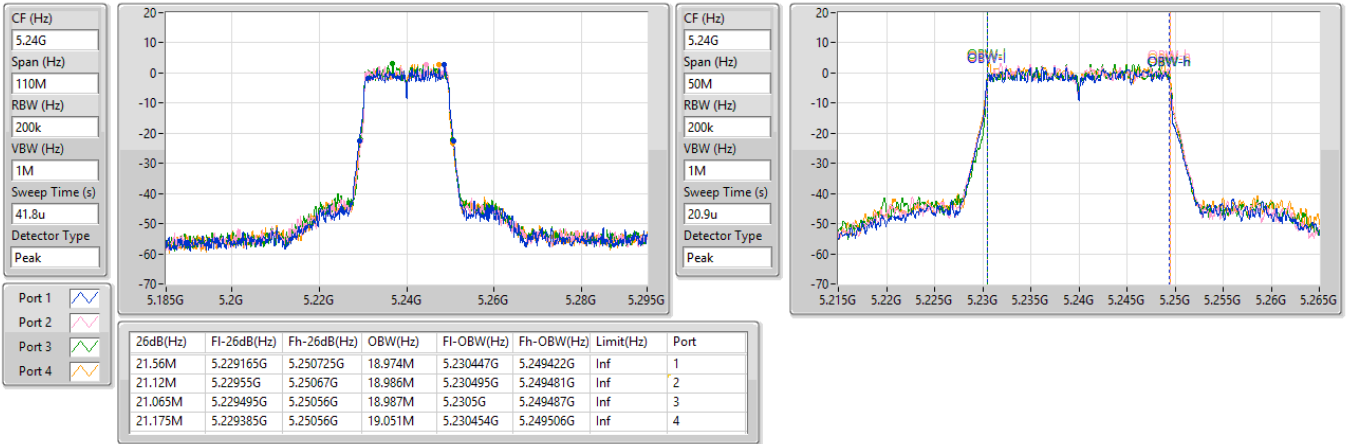


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

5190MHz

22/09/2025


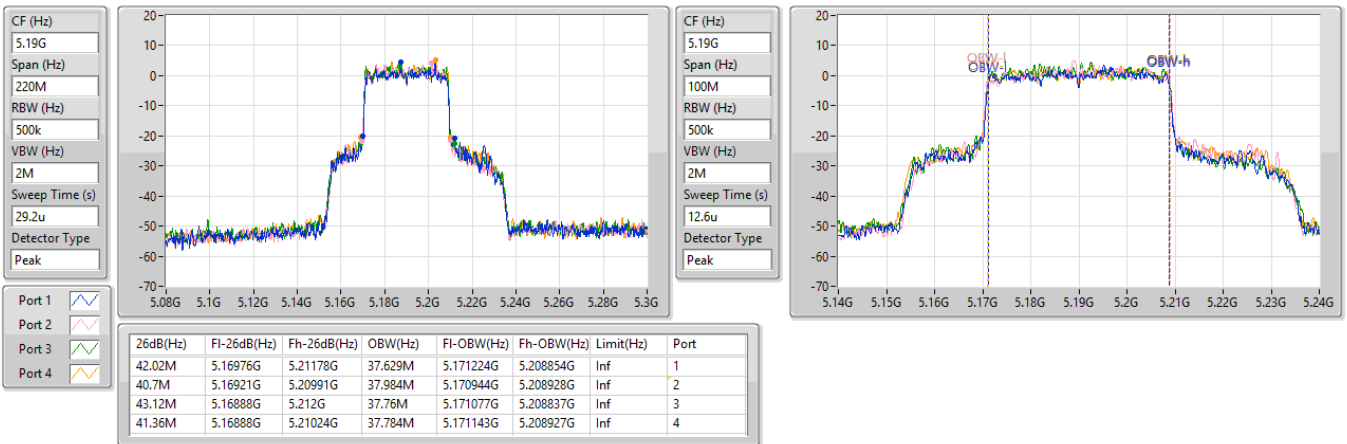


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

5230MHz

22/09/2025

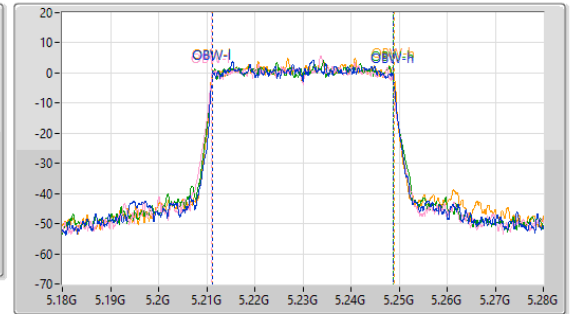
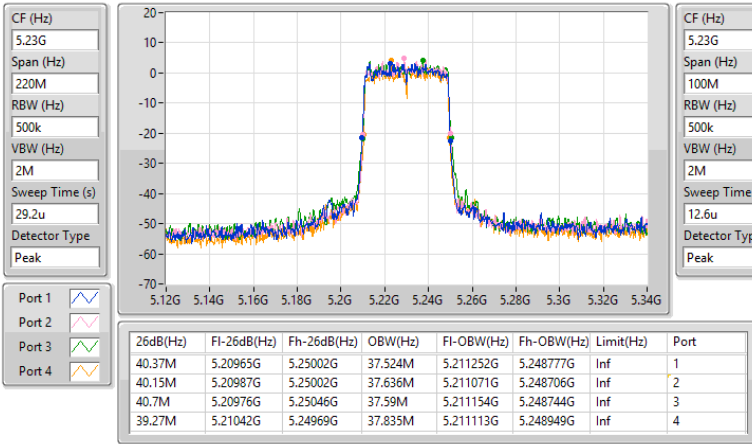


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

5210MHz

23/09/2025

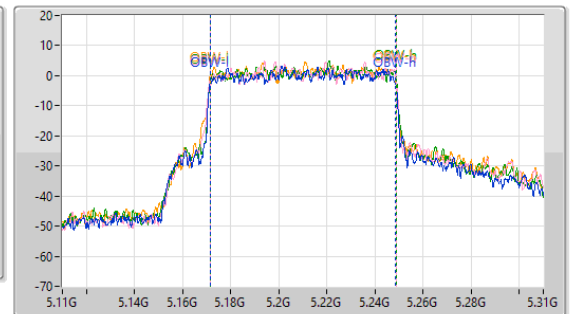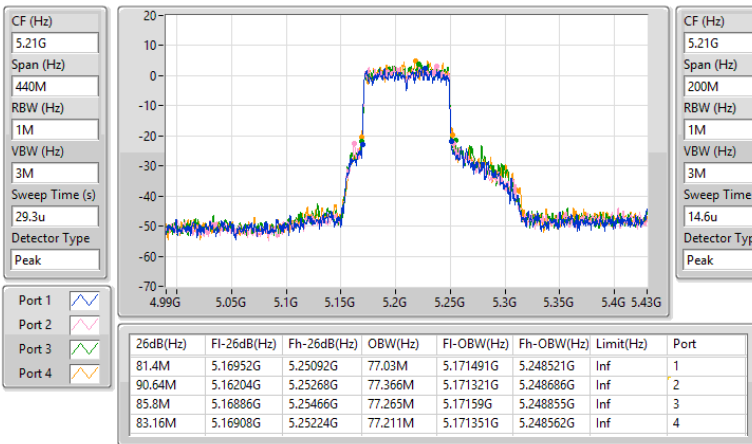

Test Mode: Mode 45

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	29.205M	17.161M	17M2D1D	22.66M	16.967M
802.11be EHT20_Nss2,(MCS0)_2TX	45.87M	19.996M	20M0D1D	25.08M	19.158M
802.11be EHT40_Nss2,(MCS0)_2TX	48.95M	37.913M	37M9D1D	41.03M	37.854M
802.11be EHT80_Nss2,(MCS0)_2TX	93.72M	77.434M	77M4D1D	84.04M	77.365M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.335M	25.002M	25M0D1D	16.06M	18.46M
802.11be EHT20_Nss2,(MCS0)_2TX	18.92M	28.045M	28M0D1D	18.205M	19.398M
802.11be EHT40_Nss2,(MCS0)_2TX	37.73M	38.207M	38M2D1D	37.51M	37.877M
802.11be EHT80_Nss2,(MCS0)_2TX	77.44M	77.387M	77M4D1D	76.56M	77.323M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	25.135M	17.092M	22.66M	16.967M
5200MHz	Pass	Inf	29.205M	17.161M	27.72M	17.028M
5240MHz	Pass	Inf	29.205M	17.145M	27.72M	17.025M
5745MHz	Pass	500k	16.28M	19.458M	16.06M	18.46M
5785MHz	Pass	500k	16.28M	25.002M	16.28M	23.692M
5825MHz	Pass	500k	16.335M	24.83M	16.335M	22.902M
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	25.08M	19.246M	32.01M	19.195M
5200MHz	Pass	Inf	31.13M	19.158M	29.205M	19.223M
5240MHz	Pass	Inf	44.55M	19.523M	45.87M	19.996M
5745MHz	Pass	500k	18.7M	19.407M	18.92M	19.398M
5785MHz	Pass	500k	18.81M	27.185M	18.92M	25.202M
5825MHz	Pass	500k	18.59M	28.045M	18.205M	27.05M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	48.95M	37.913M	47.85M	37.91M
5230MHz	Pass	Inf	41.03M	37.865M	41.91M	37.854M
5755MHz	Pass	500k	37.73M	37.89M	37.51M	37.877M
5795MHz	Pass	500k	37.73M	38.149M	37.62M	38.207M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	93.72M	77.434M	84.04M	77.365M
5775MHz	Pass	500k	77.44M	77.387M	76.56M	77.323M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5180MHz

17/09/2025

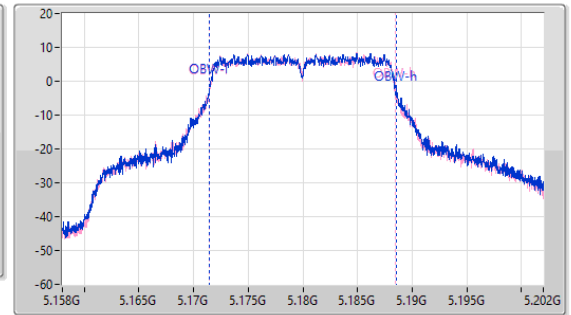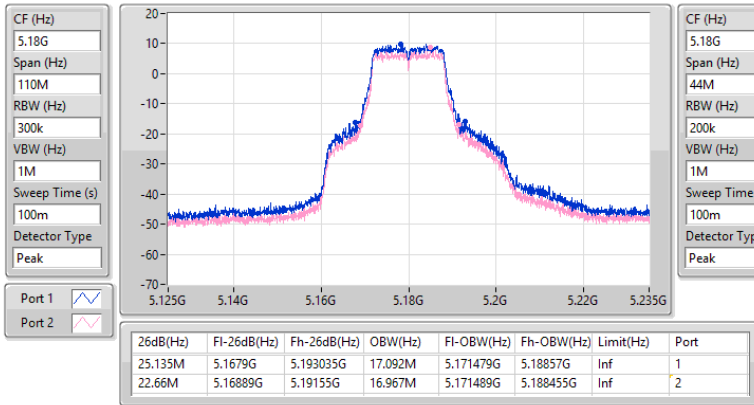

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

17/09/2025

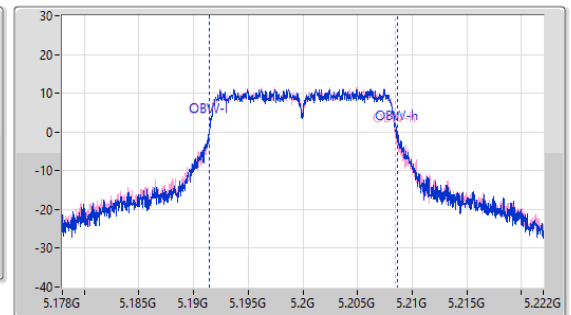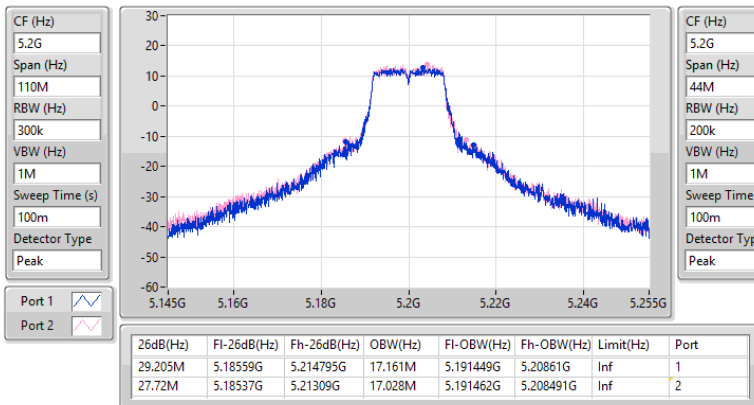


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5240MHz

17/09/2025

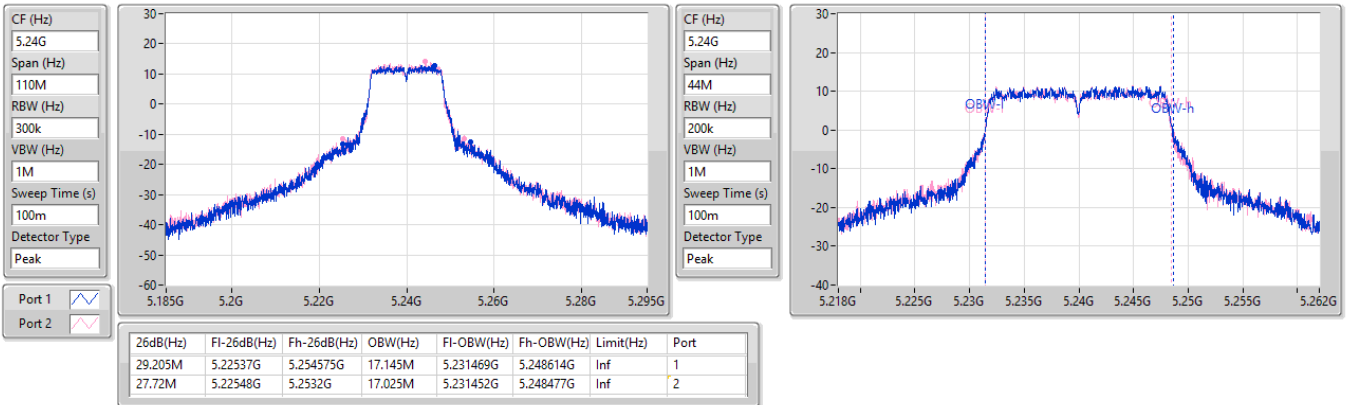
5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5745MHz

17/09/2025

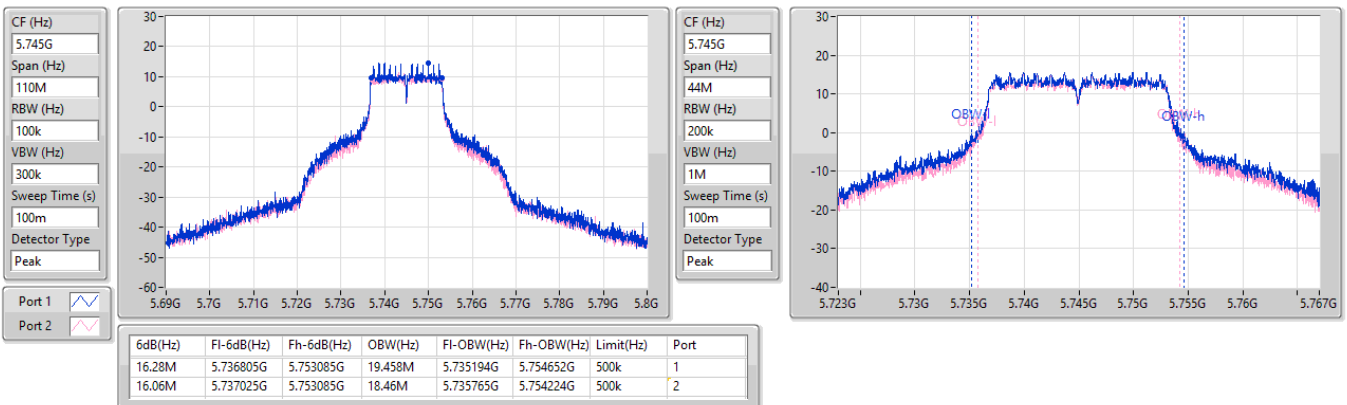


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

17/09/2025

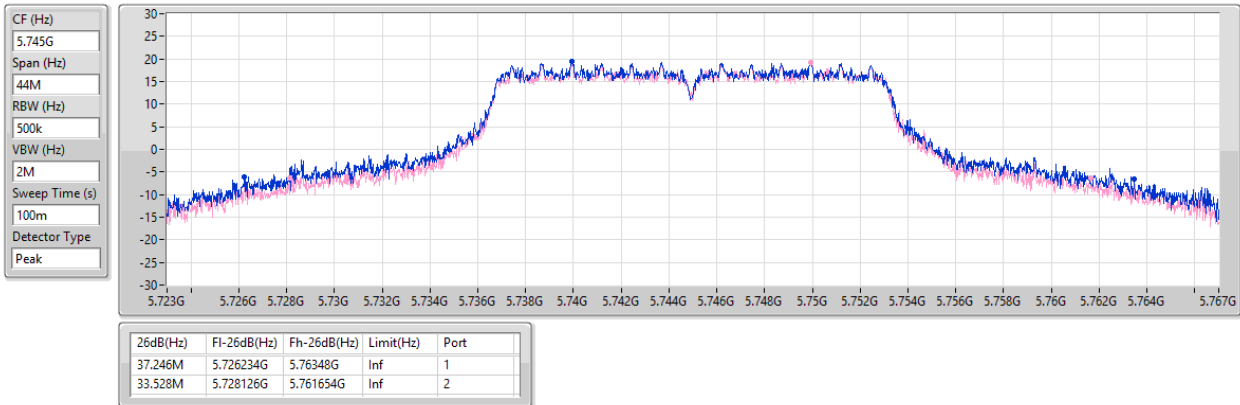


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5785MHz

17/09/2025

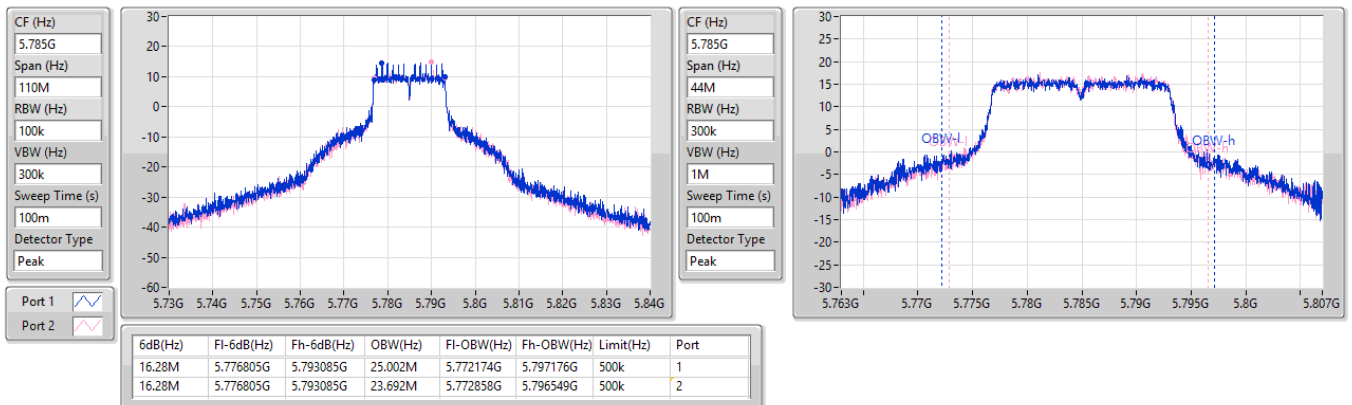


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5785MHz

17/09/2025

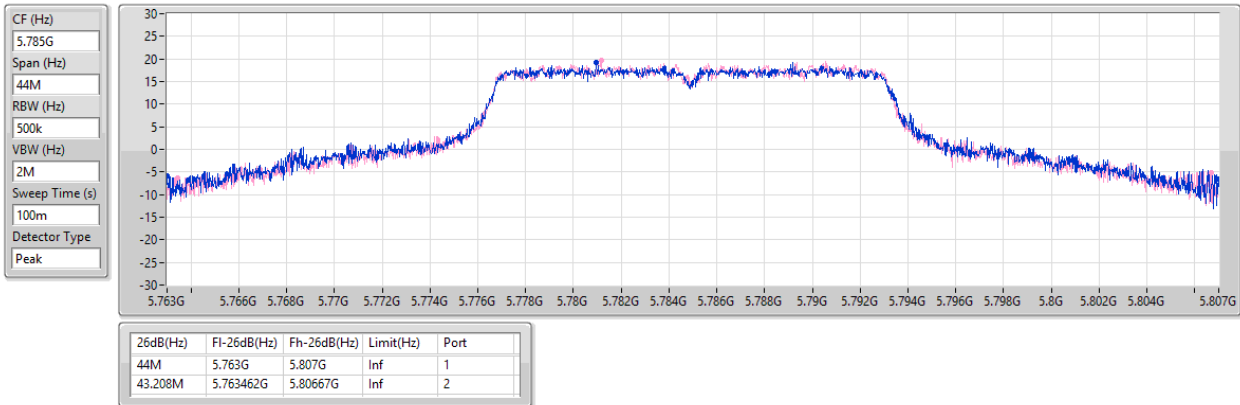


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW


5825MHz

17/09/2025

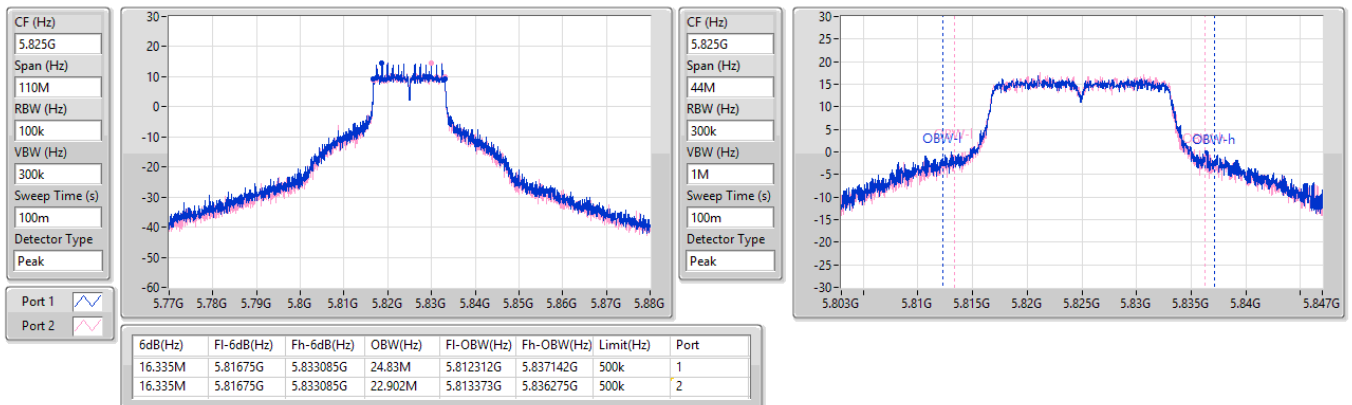


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5825MHz

17/09/2025

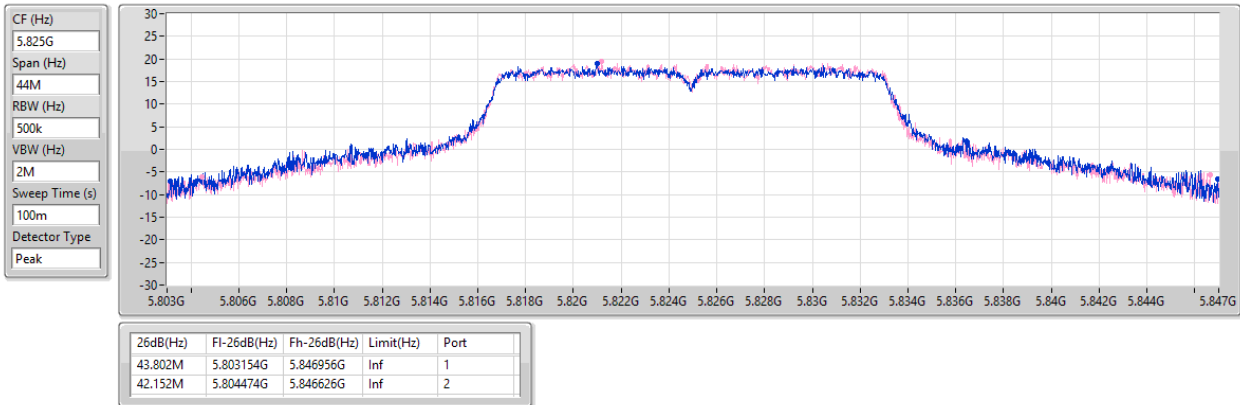

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5180MHz

17/09/2025

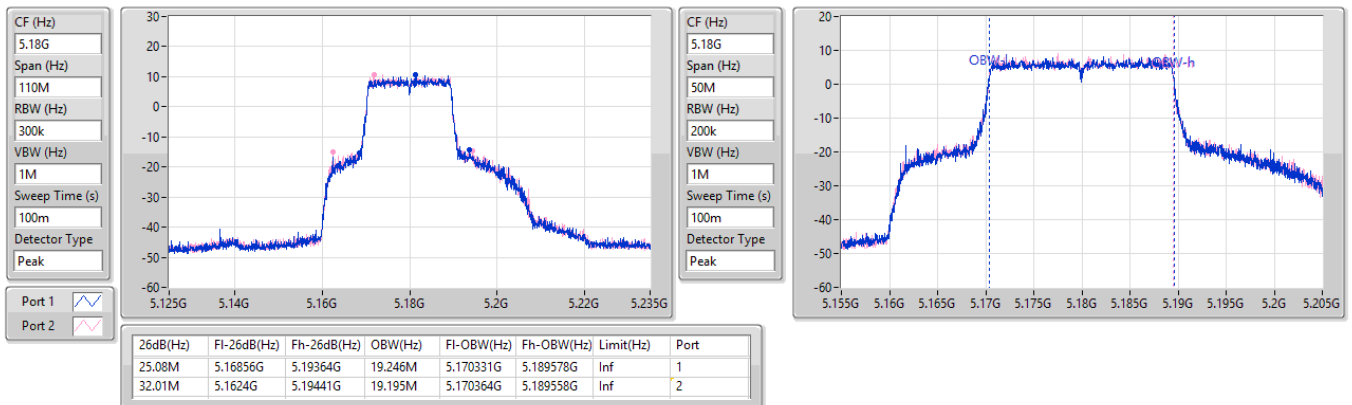


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5200MHz

17/09/2025

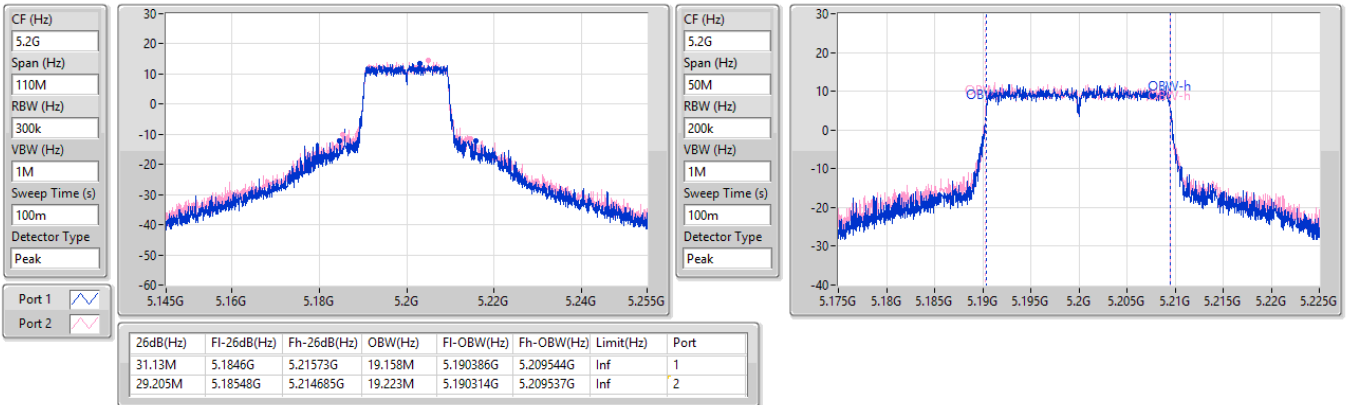

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5240MHz

17/09/2025

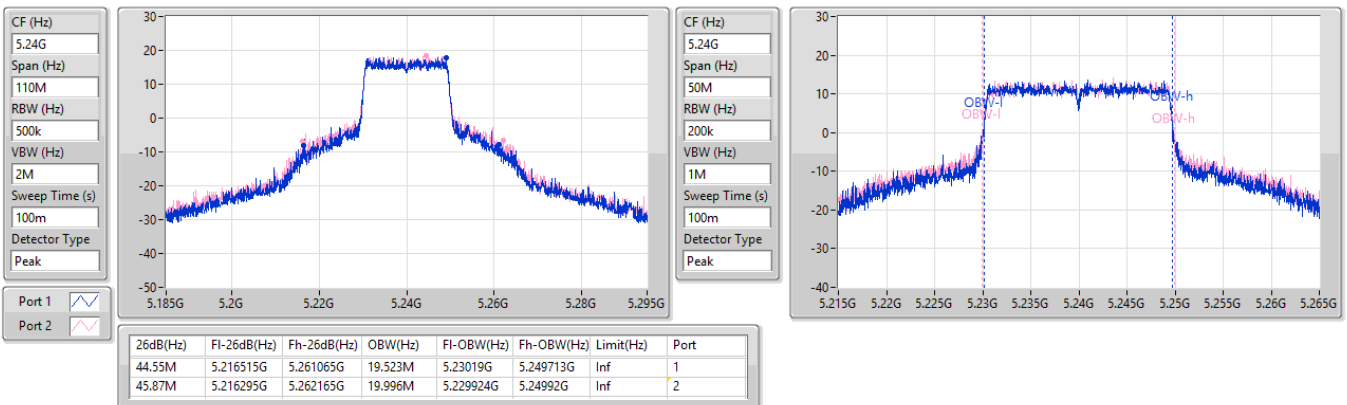


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5745MHz

17/09/2025

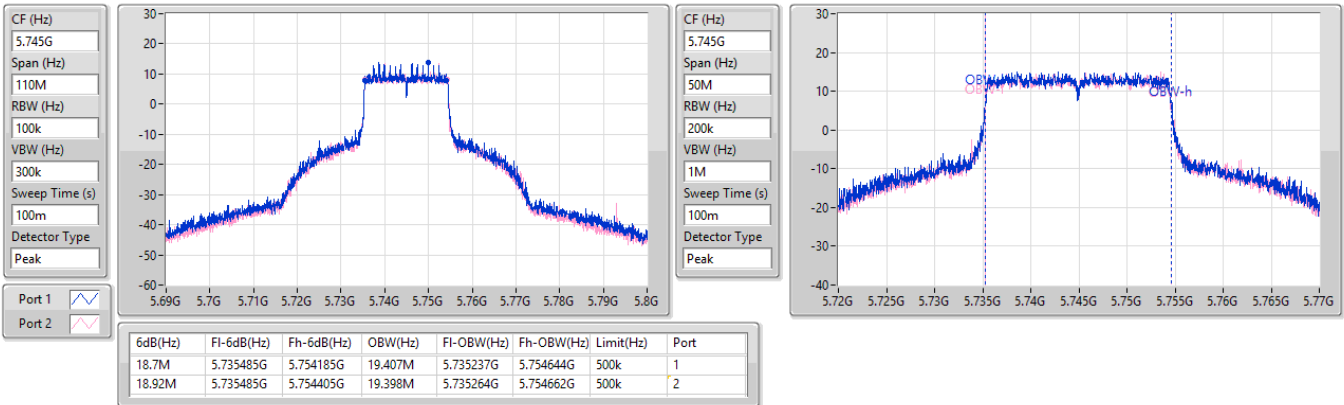
5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5745MHz

17/09/2025

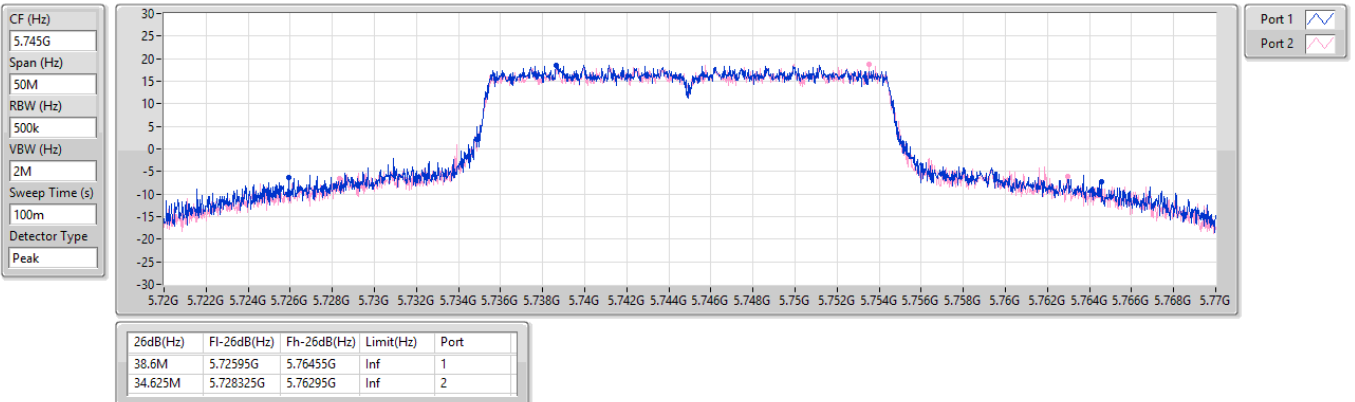


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5785MHz

17/09/2025

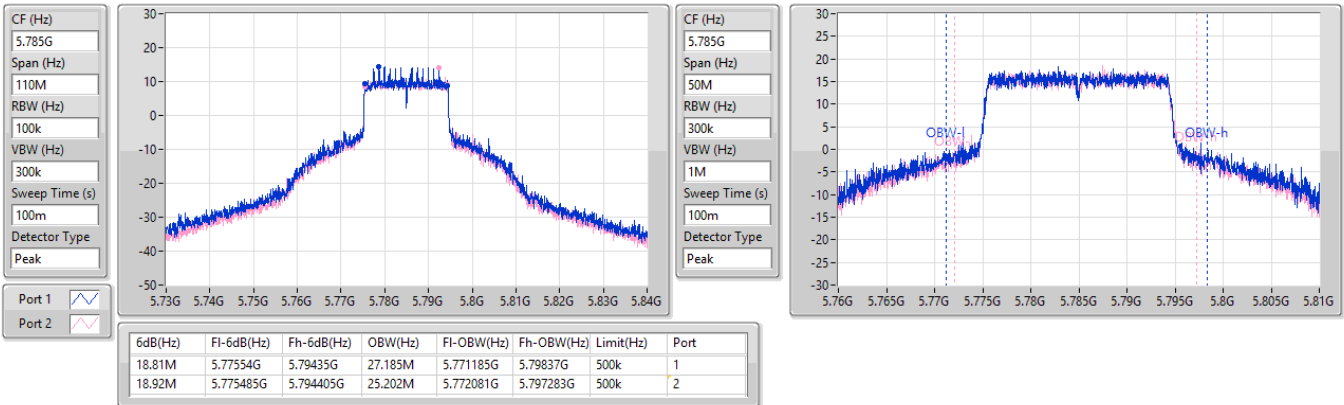


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5785MHz

17/09/2025

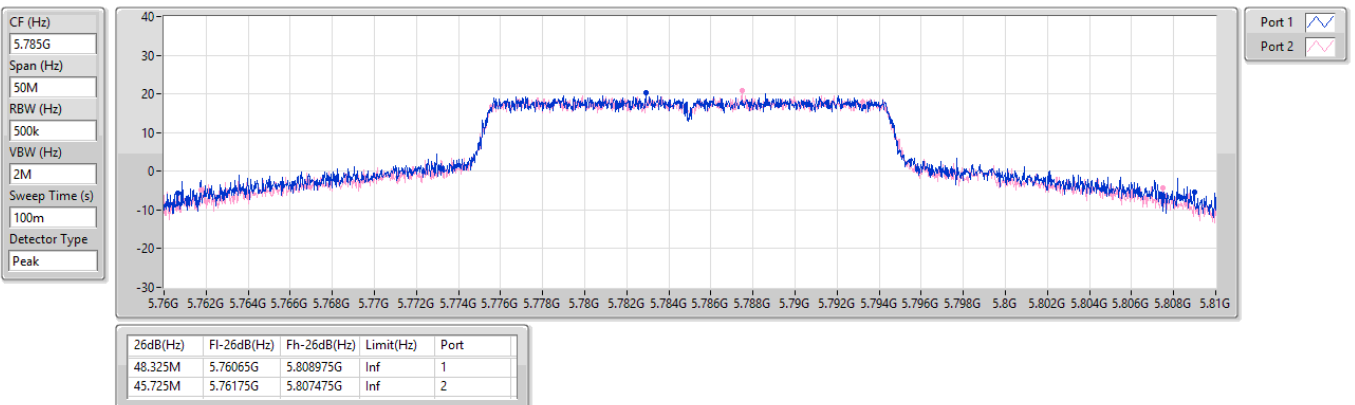


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5825MHz

17/09/2025

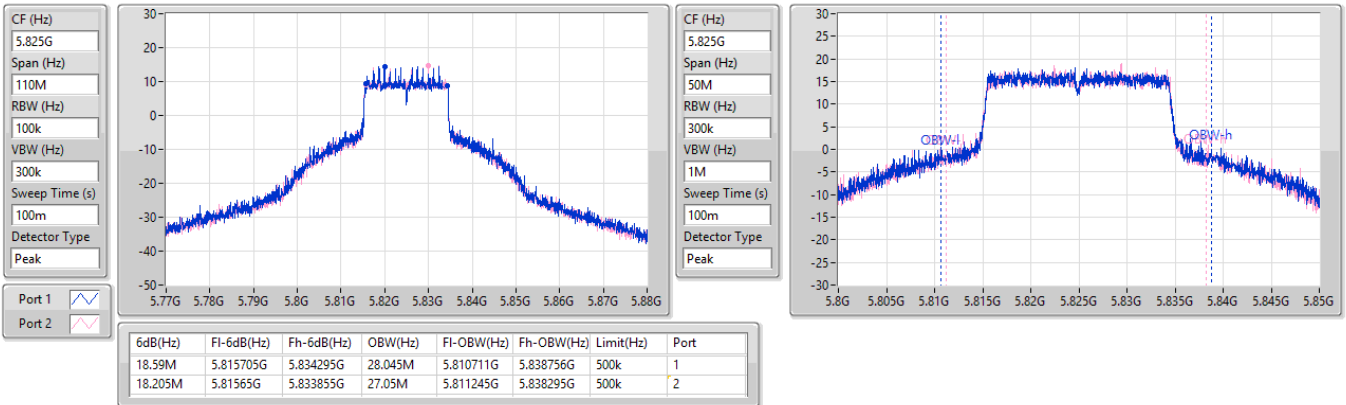


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW


5825MHz

17/09/2025

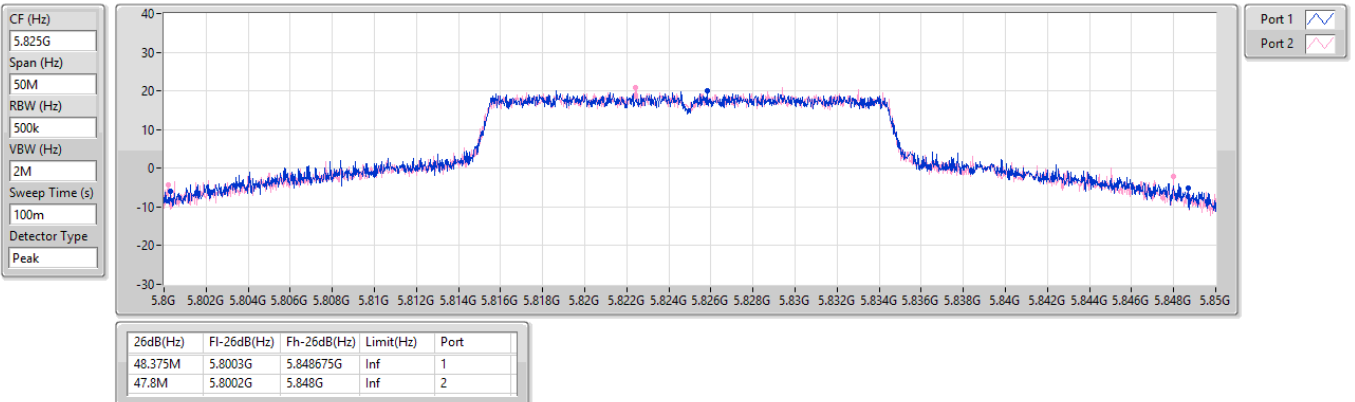


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5190MHz

17/09/2025

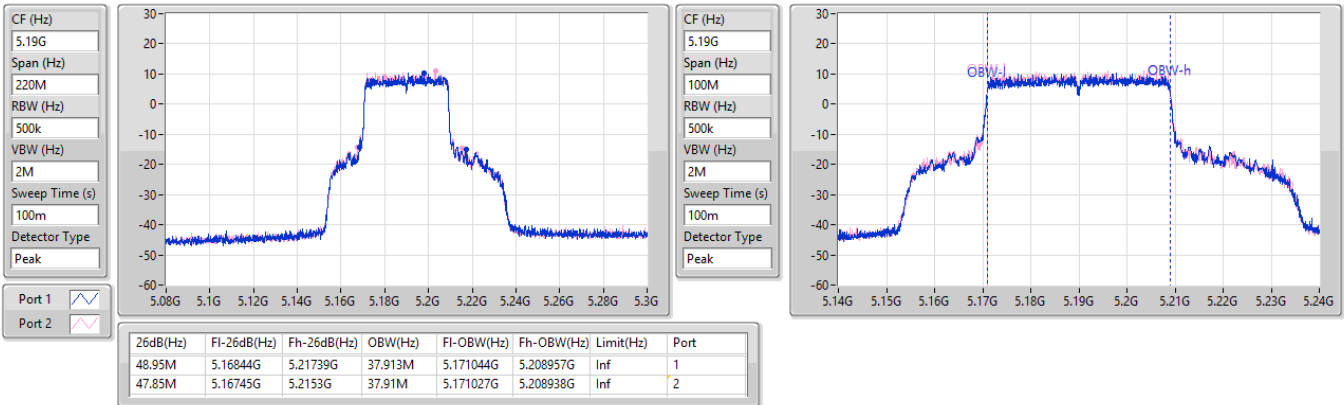

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5230MHz

17/09/2025

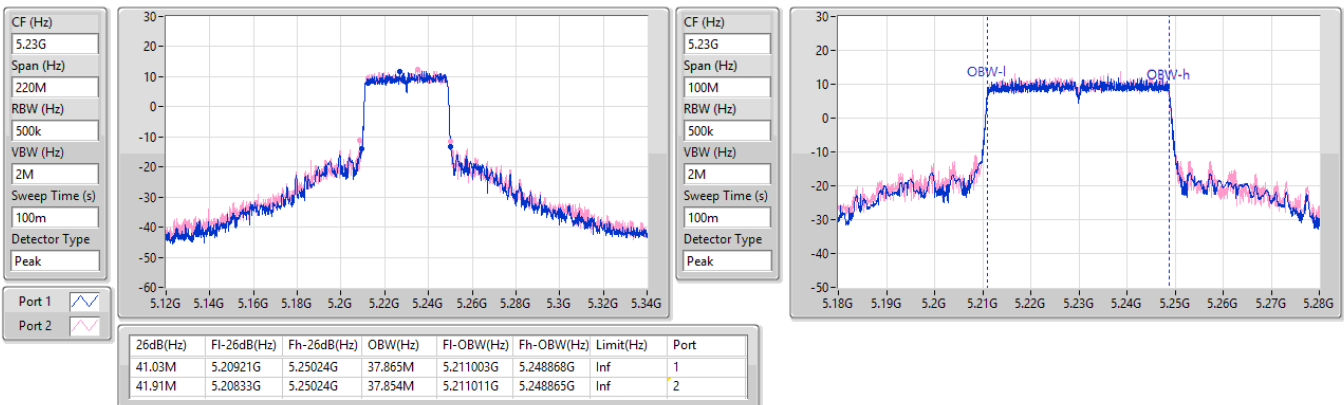


5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5755MHz

17/09/2025

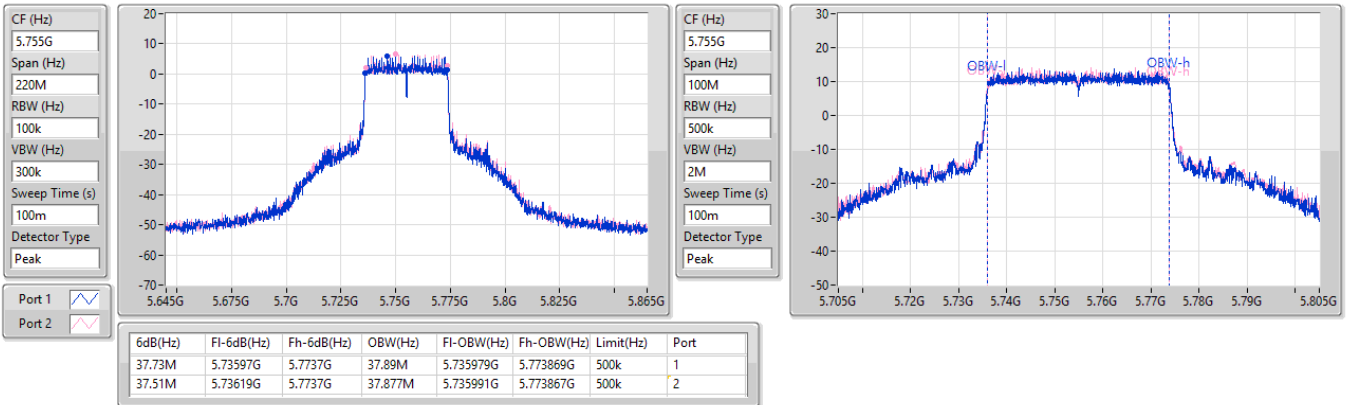

5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5755MHz

17/09/2025

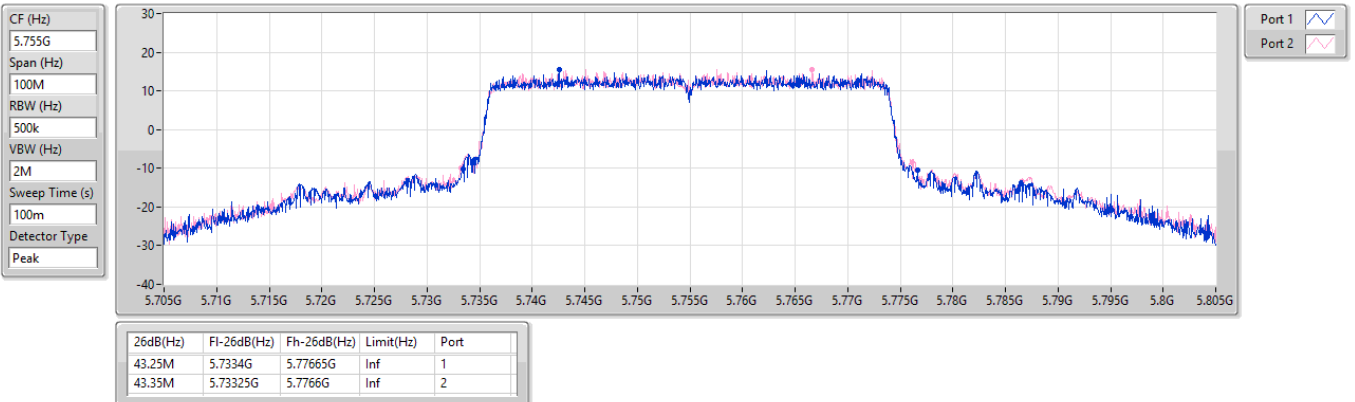


5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5795MHz

17/09/2025

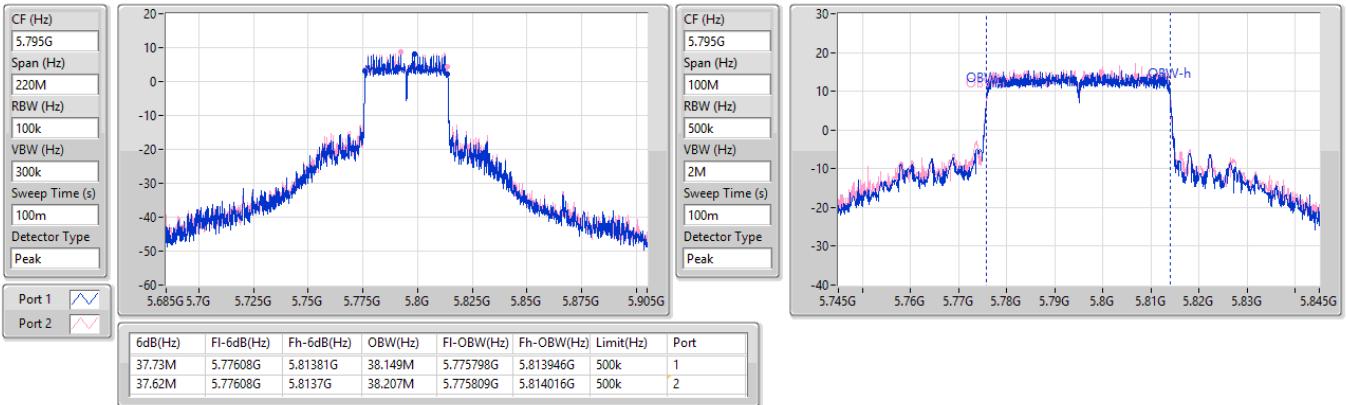
5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5795MHz

17/09/2025


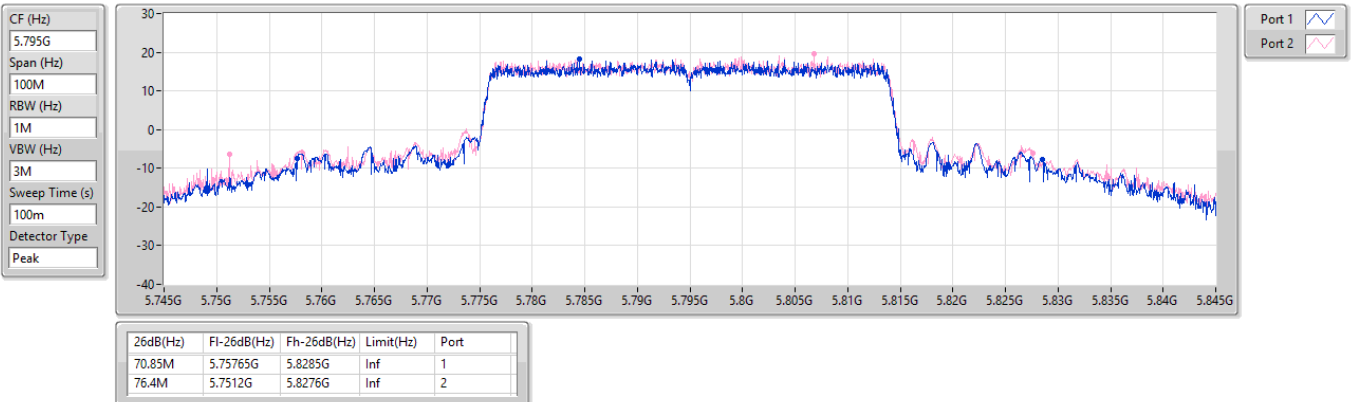


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5210MHz

17/09/2025

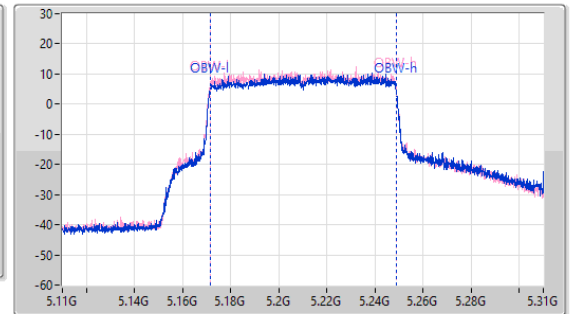
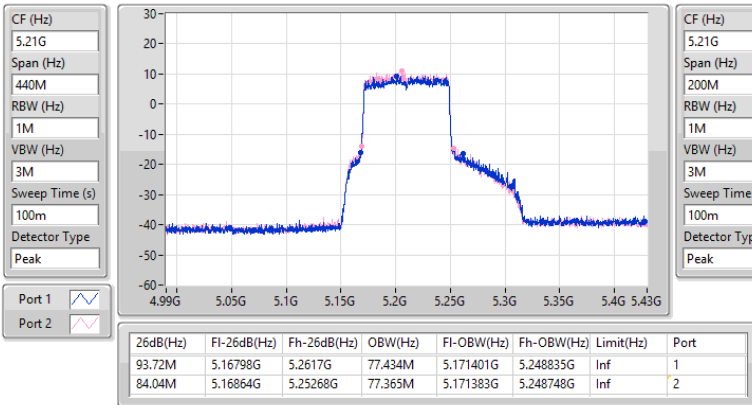


5.725-5.85GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5775MHz

17/09/2025

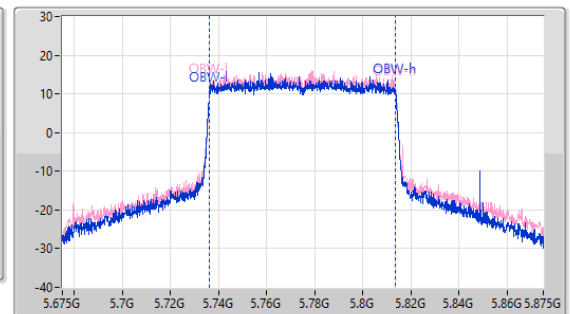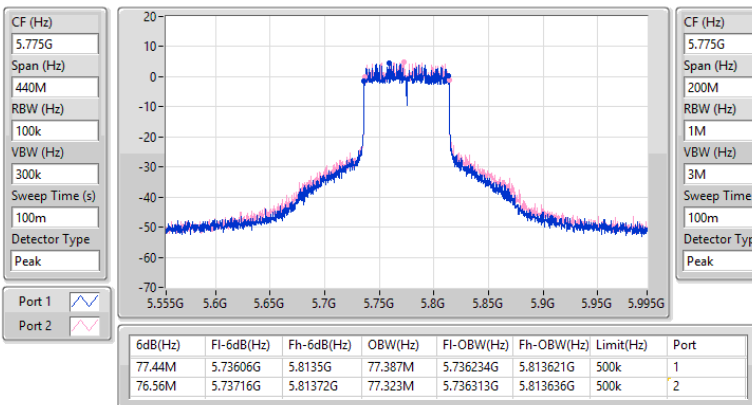


5.725-5.85GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5775MHz

17/09/2025

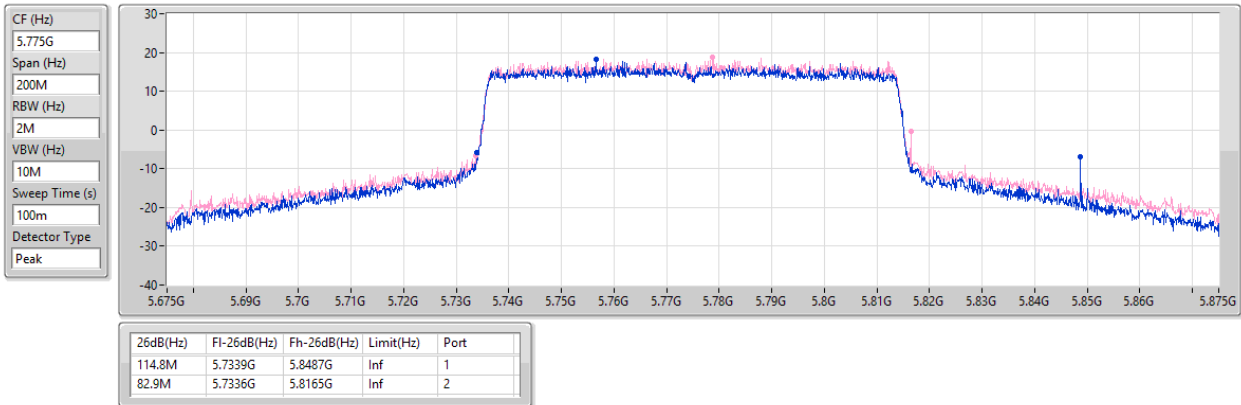

Test Mode: Mode 46

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1_(6Mbps)_2TX	22.605M	16.98M	17M0D1D	21.065M	16.669M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.11M	16.98M	22.605M	16.913M
5200MHz	Pass	Inf	21.34M	16.846M	21.12M	16.669M
5240MHz	Pass	Inf	21.34M	16.834M	21.065M	16.671M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5180MHz

02/10/2025

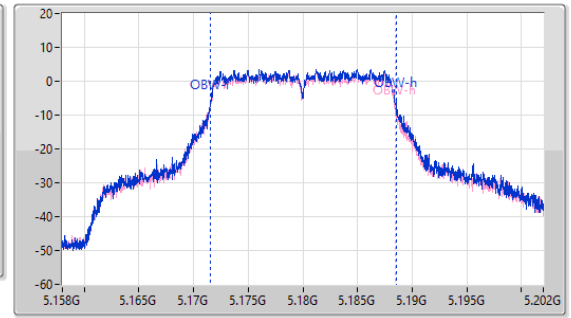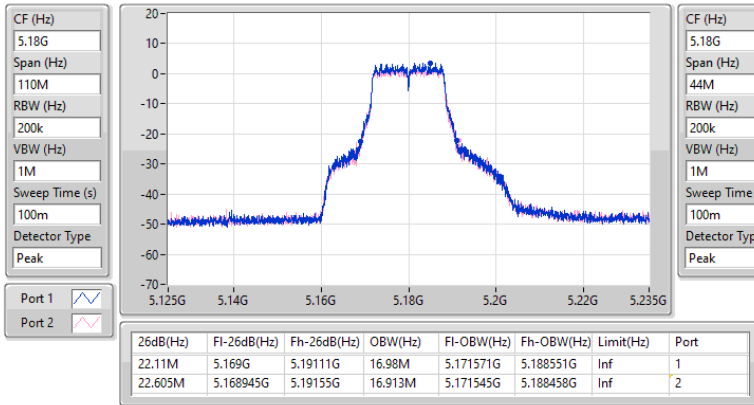
5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

02/10/2025

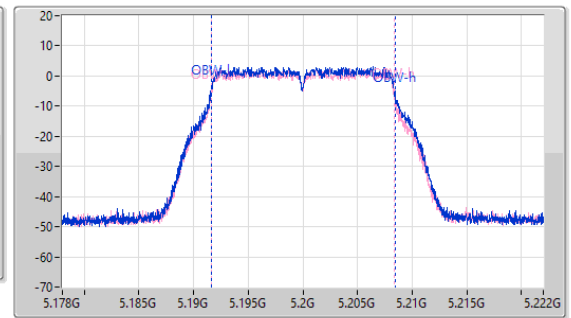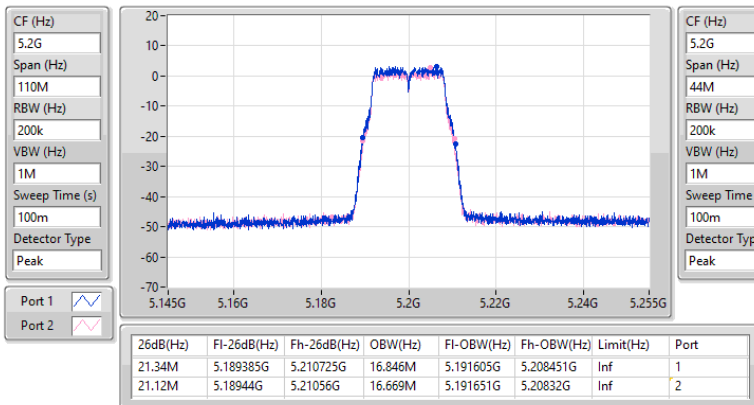


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5240MHz

02/10/2025

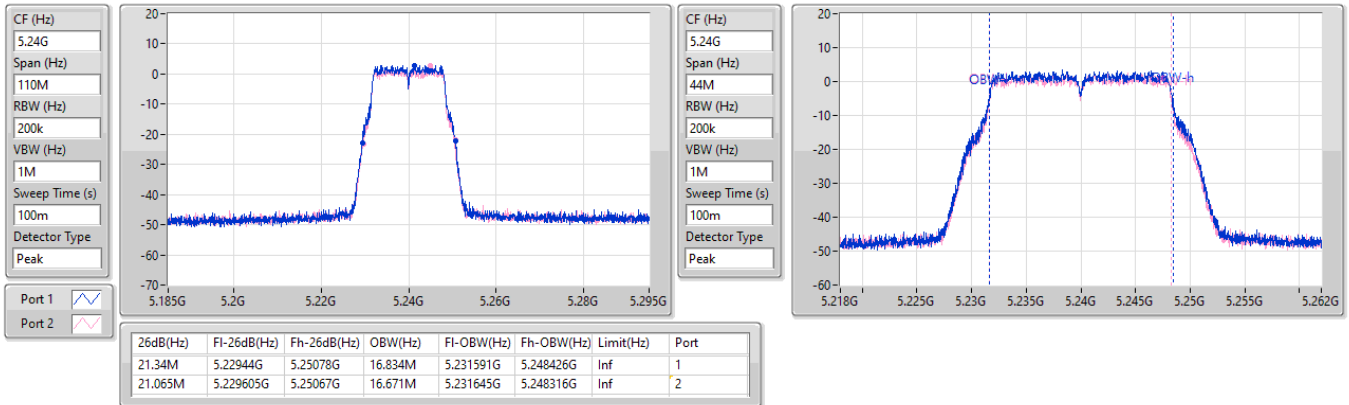

Test Mode: Mode 47

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	27.225M	19.197M	19M2D1D	21.395M	19.046M
802.11be EHT40_Nss2,(MCS0)_2TX	54.34M	37.909M	37M9D1D	40.37M	37.708M
802.11be EHT80_Nss2,(MCS0)_2TX	84.92M	77.469M	77M5D1D	82.5M	77.414M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	27.225M	19.197M	26.235M	19.181M
5200MHz	Pass	Inf	21.78M	19.046M	21.395M	19.061M
5240MHz	Pass	Inf	21.505M	19.049M	21.45M	19.077M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	54.23M	37.909M	54.34M	37.903M
5230MHz	Pass	Inf	40.81M	37.725M	40.37M	37.708M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	84.92M	77.469M	82.5M	77.414M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5180MHz

02/10/2025

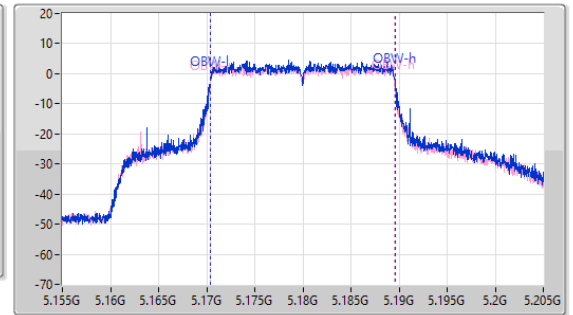
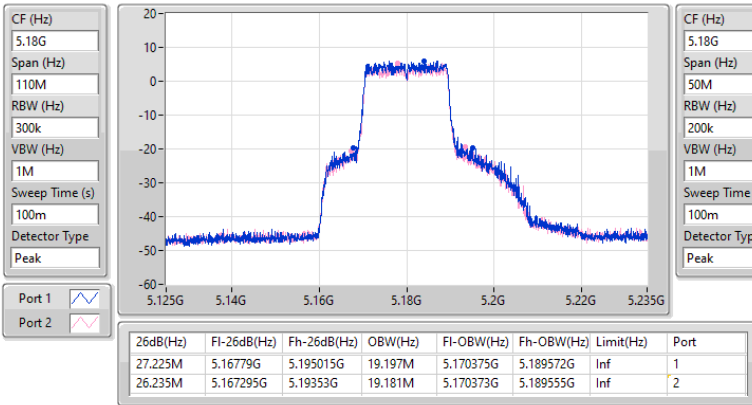


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



5200MHz

02/10/2025

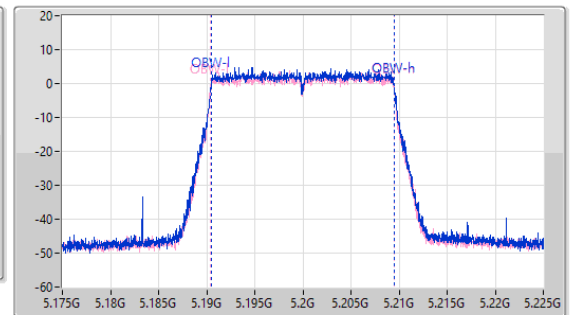
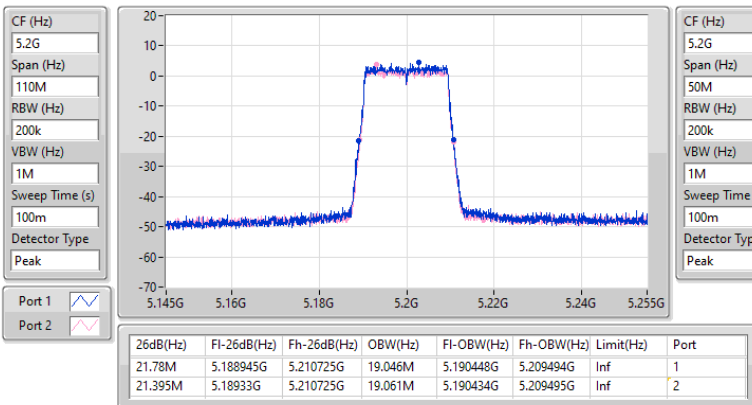


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5240MHz

02/10/2025

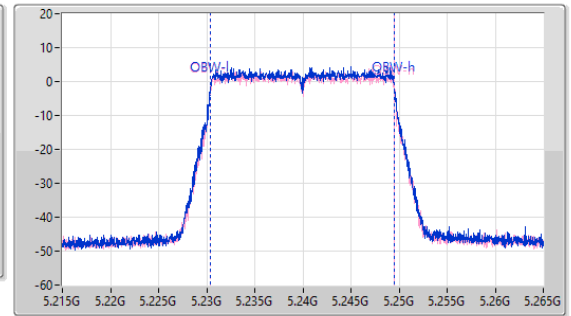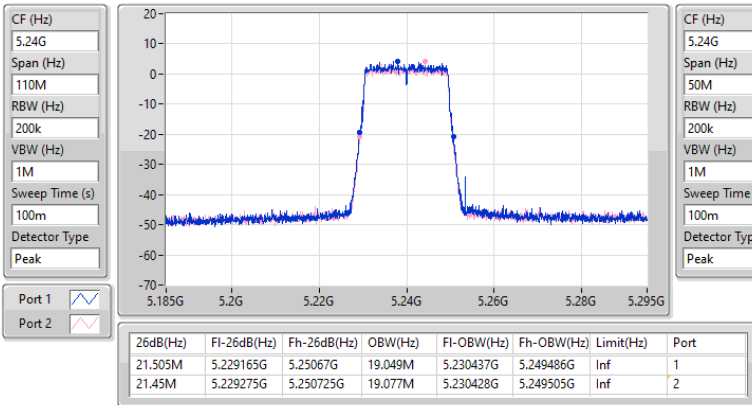
5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5190MHz

02/10/2025

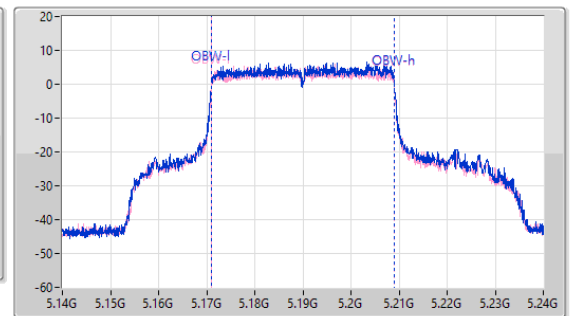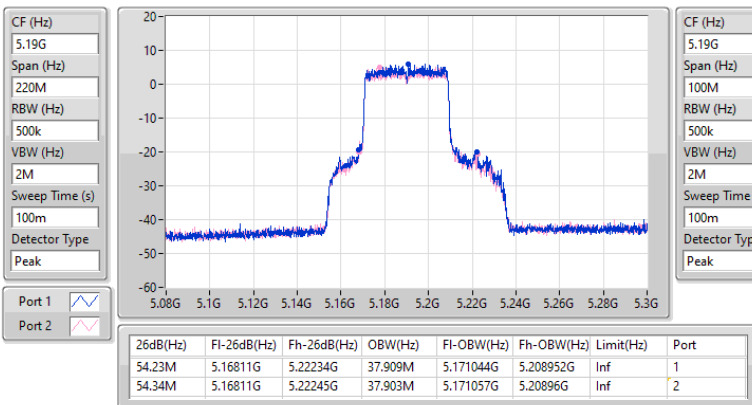


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

5230MHz

02/10/2025

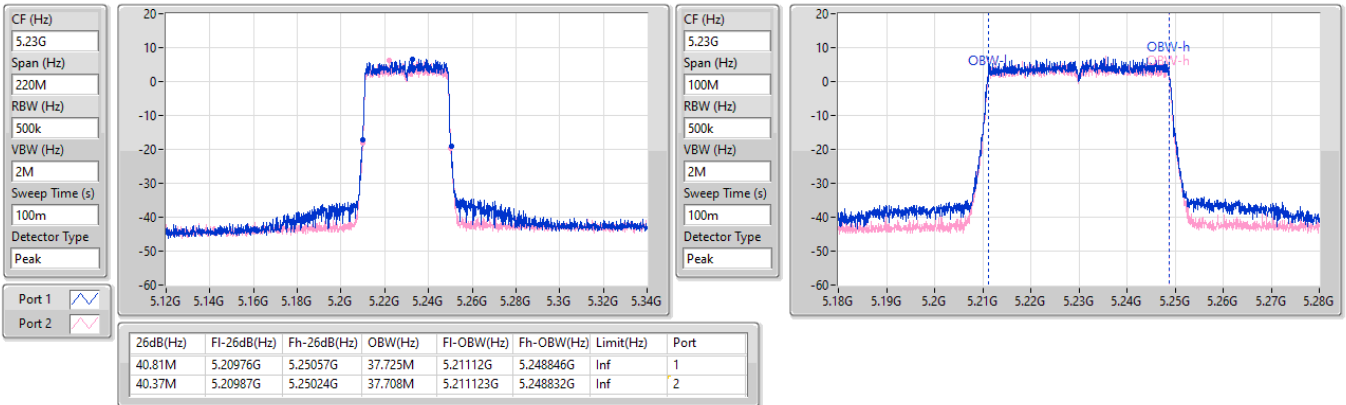


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5210MHz

02/10/2025

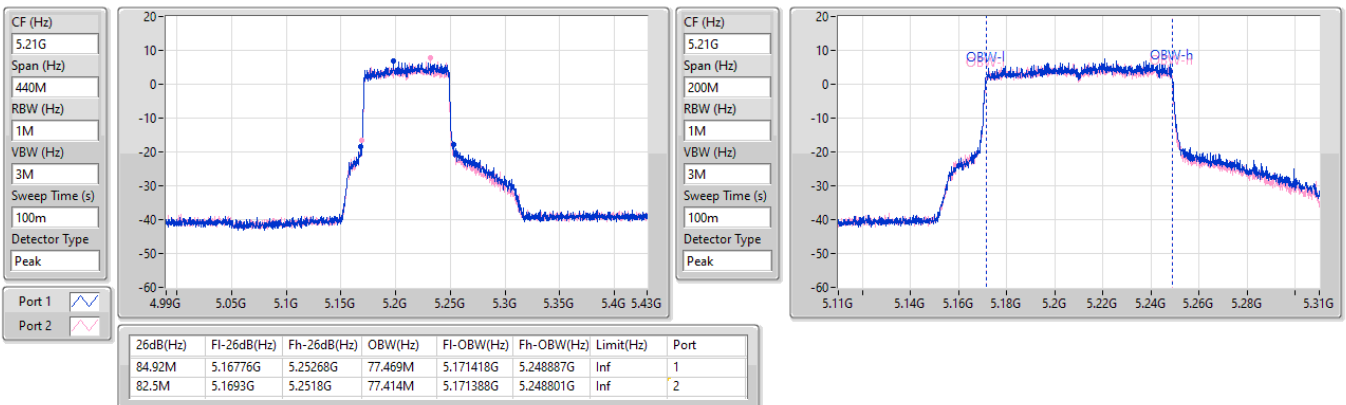

Test Mode: Mode 48

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1_(6Mbps)_2TX	22.165M	16.958M	17M0D1D	21.12M	16.667M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.165M	16.958M	21.89M	16.958M
5200MHz	Pass	Inf	21.23M	16.828M	21.175M	16.667M
5240MHz	Pass	Inf	21.285M	16.8M	21.12M	16.679M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5180MHz

22/09/2025

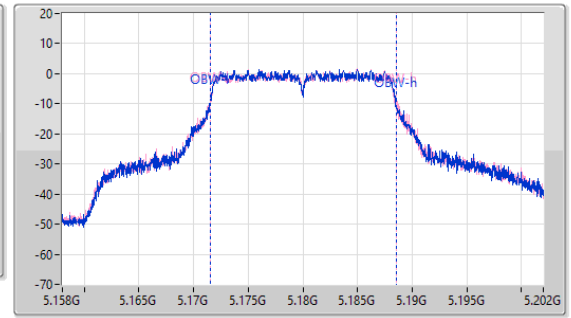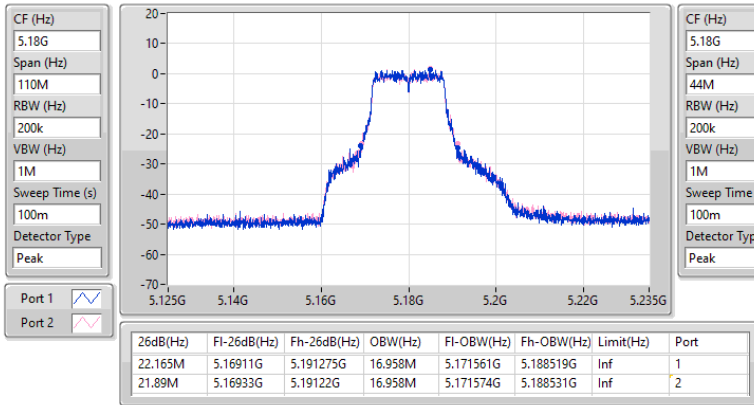
5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

22/09/2025

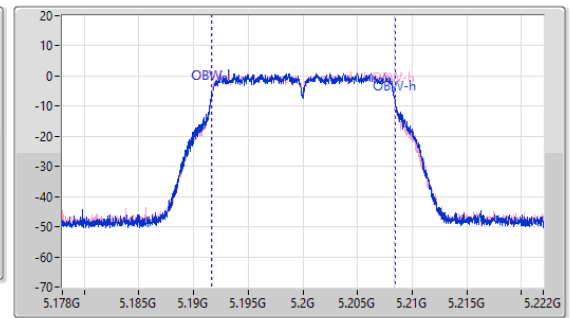
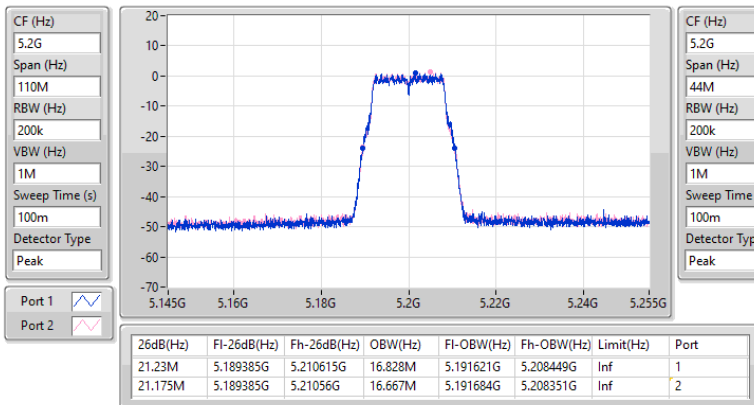


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5240MHz

22/09/2025

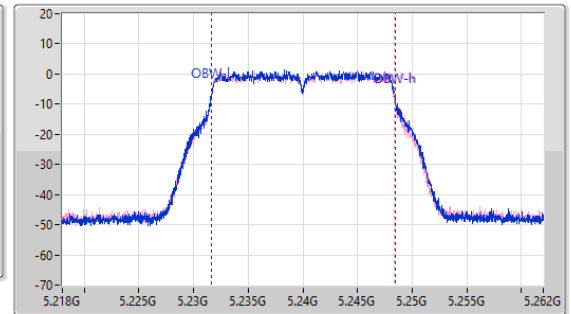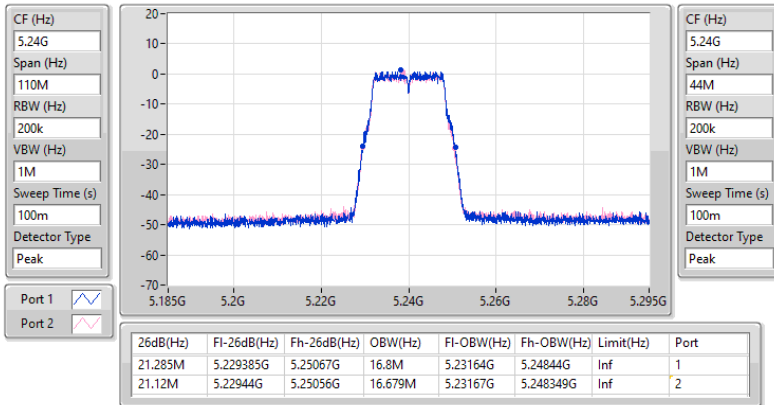

Test Mode: Mode 49

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	27.665M	19.221M	19M2D1D	21.395M	19.041M
802.11be EHT40_Nss2,(MCS0)_2TX	60.61M	37.956M	38M0D1D	40.48M	37.699M
802.11be EHT80_Nss2,(MCS0)_2TX	84.7M	77.497M	77M5D1D	84.04M	77.315M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	27.665M	19.17M	25.575M	19.221M
5200MHz	Pass	Inf	21.78M	19.072M	21.395M	19.041M
5240MHz	Pass	Inf	21.615M	19.078M	21.56M	19.094M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	60.28M	37.956M	60.61M	37.916M
5230MHz	Pass	Inf	40.48M	37.744M	40.92M	37.699M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	84.7M	77.497M	84.04M	77.315M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5180MHz

22/09/2025

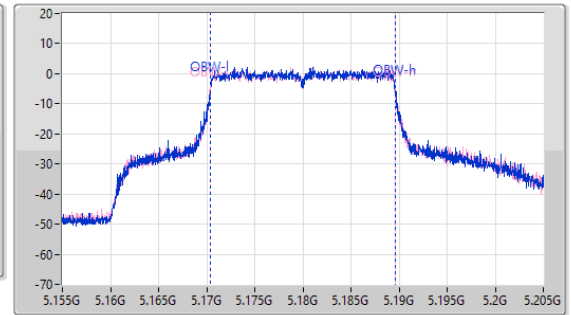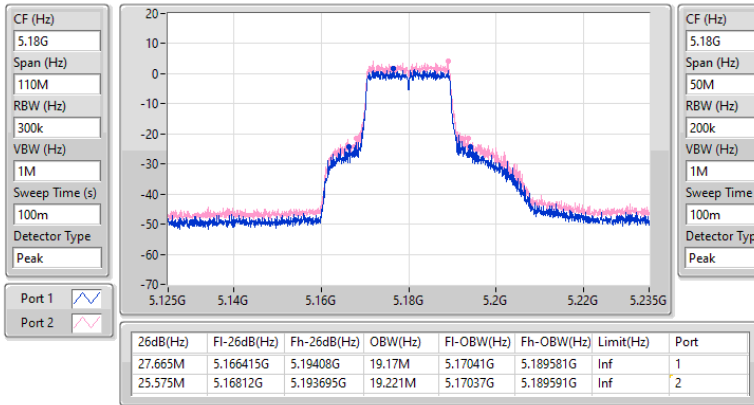
5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5200MHz

22/09/2025

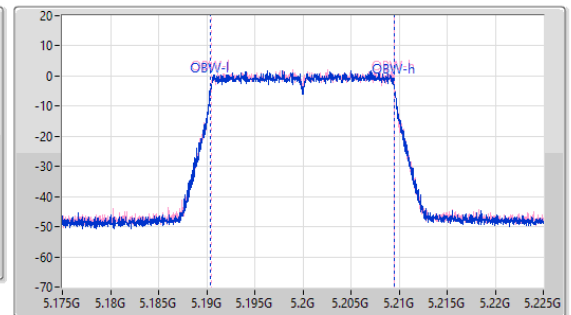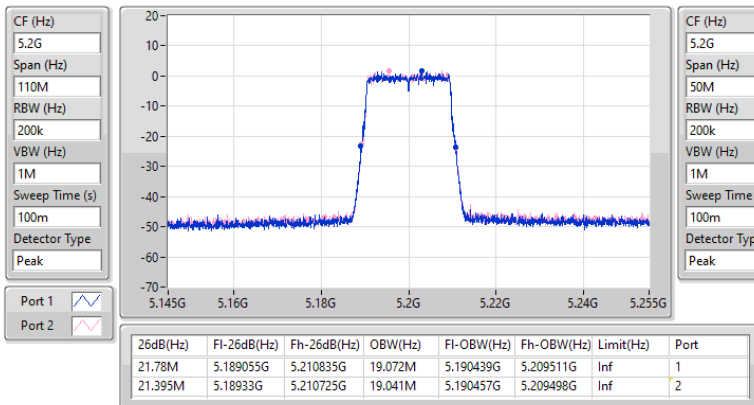


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5240MHz

22/09/2025

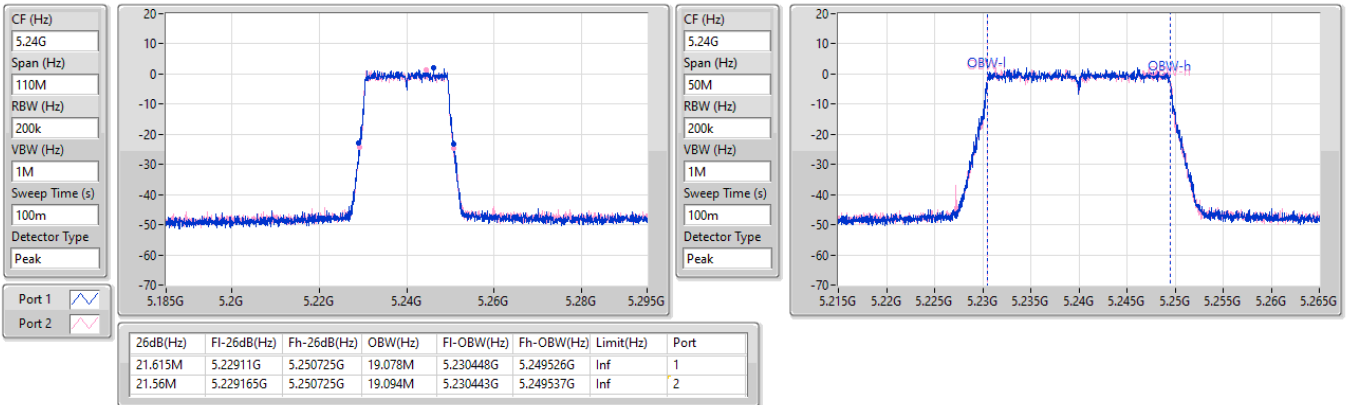


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

5190MHz

22/09/2025

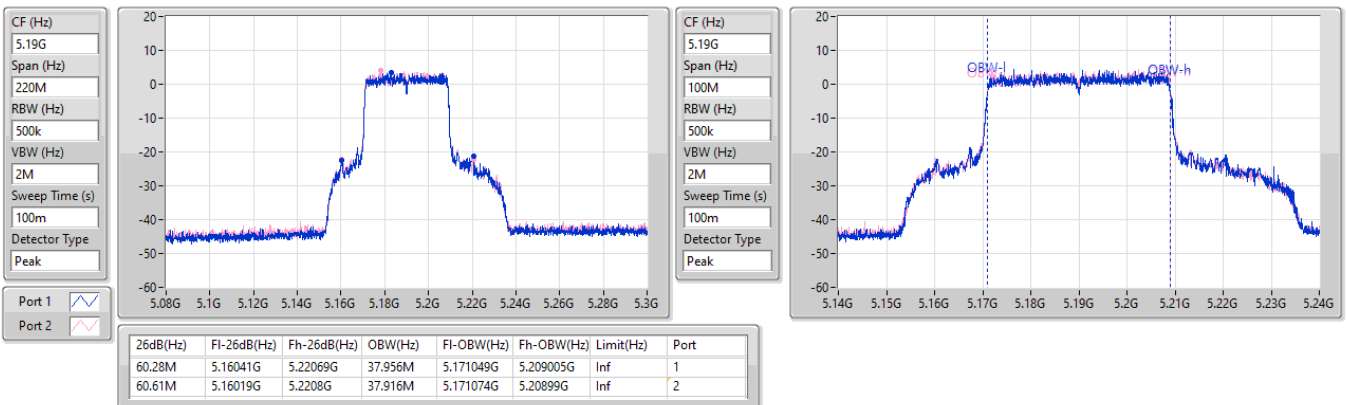


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

5230MHz

22/09/2025

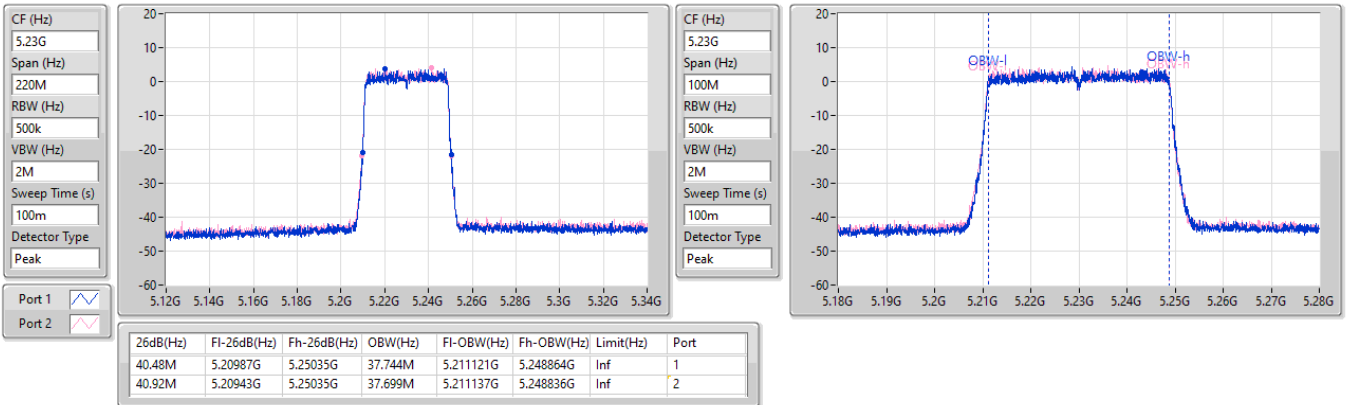


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5210MHz

22/09/2025

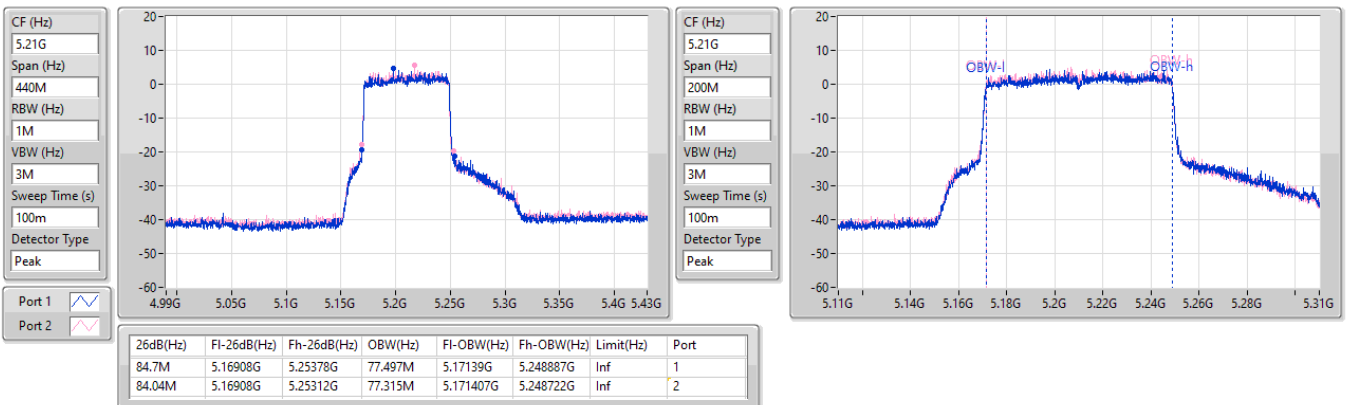

Test Mode: Mode 1

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	23.10	0.20417
802.11a_Nss1,(6Mbps)_2TX	24.42	0.27669
802.11a_Nss1,(6Mbps)_4TX	21.36	0.13677
802.11be EHT20_Nss1,(MCS0)_1TX	23.67	0.23281
802.11be EHT20_Nss2,(MCS0)_2TX	24.44	0.27797
802.11be EHT20_Nss1,(MCS0)_4TX	22.47	0.17660
802.11be EHT20_Nss4,(MCS0)_4TX	27.68	0.58614
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.31	0.17022
802.11be EHT40_Nss1,(MCS0)_1TX	21.51	0.14158
802.11be EHT40_Nss2,(MCS0)_2TX	21.91	0.15524
802.11be EHT40_Nss1,(MCS0)_4TX	25.03	0.31842
802.11be EHT40_Nss4,(MCS0)_4TX	23.58	0.22803
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.43	0.17498
802.11be EHT80_Nss1,(MCS0)_1TX	18.34	0.06823
802.11be EHT80_Nss2,(MCS0)_2TX	19.40	0.08710
802.11be EHT80_Nss1,(MCS0)_4TX	22.37	0.17258
802.11be EHT80_Nss4,(MCS0)_4TX	17.91	0.06180
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.37	0.17258

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58	21.28				21.28	28.42
5200MHz	Pass	7.58	23.1				23.10	28.42
5240MHz	Pass	7.58	21.6				21.60	28.42
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58	21.12				21.12	28.42
5200MHz	Pass	7.58	23.67				23.67	28.42
5240MHz	Pass	7.58	21.36				21.36	28.42
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.58	19.42				19.42	28.42
5230MHz	Pass	7.58	21.51				21.51	28.42
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.58	18.34				18.34	28.42
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58	18.34	18.79			21.58	28.42
5200MHz	Pass	7.58	21.2	21.38			24.30	28.42
5240MHz	Pass	7.58	21.34	21.47			24.42	28.42
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.43	18.84	19.19			22.03	28.57
5200MHz	Pass	7.43	20.98	21.28			24.14	28.57
5240MHz	Pass	7.43	21.33	21.52			24.44	28.57
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.43	17.13	17.13			20.14	28.57
5230MHz	Pass	7.43	18.86	18.94			21.91	28.57
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.43	16.3	16.47			19.40	28.57
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78	14.91	15.3	15.36	15.73	21.36	28.22
5200MHz	Pass	7.78	14.93	15.13	15.06	15.62	21.21	28.22
5240MHz	Pass	7.78	14.92	14.88	14.96	15.8	21.18	28.22
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78	16.14	16.45	16.38	16.79	22.47	28.22
5200MHz	Pass	7.78	15.83	16.38	16.24	16.67	22.31	28.22
5240MHz	Pass	7.78	15.85	16.12	15.9	16.77	22.20	28.22
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.78	16.47	16.64	16.31	16.59	22.52	28.22
5230MHz	Pass	7.78	18.94	18.86	19.13	19.11	25.03	28.22
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.78	15.86	16.24	16.5	16.75	22.37	28.22
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.51	17.58	17.87	17.91	18.23	23.92	28.49
5200MHz	Pass	7.51	20.57	20.63	20.88	20.8	26.74	28.49
5240MHz	Pass	7.51	21.49	21.52	21.82	21.79	27.68	28.49
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.51	14.27	14.52	14.2	14.82	20.48	28.49
5230MHz	Pass	7.51	17.48	17.67	17.36	17.71	23.58	28.49
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.51	11.22	11.9	11.78	12.54	17.91	28.49
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53	15.75	16.20	16.25	16.70	22.26	22.47
5200MHz	Pass	13.53	15.83	16.38	16.24	16.67	22.31	22.47
5240MHz	Pass	13.53	15.85	16.12	15.9	16.77	22.20	22.47
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	13.53	16.31	16.20	16.15	16.42	22.29	22.47
5230MHz	Pass	13.53	16.26	16.51	16.15	16.70	22.43	22.47



Average Power

Appendix C.1

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	13.53	15.86	16.24	16.5	16.75	22.37	22.47

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 2

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	16.06	0.04036	23.64/20.97	0.23121/0.125026
802.11be EHT20_Nss1,(MCS0)_1TX	16.00	0.03981	23.58/20.91	0.22803/0.123310
802.11be EHT40_Nss1,(MCS0)_1TX	16.03	0.04009	23.61/20.94	0.22961/0.124165
802.11be EHT80_Nss1,(MCS0)_1TX	16.01	0.03990	23.59/20.92	0.22856/0.123595



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	7.58/4.91	16.06	16.06	28.42	23.64/20.97	36.00/21.00
5200MHz	Pass	7.58/4.91	15.87	15.87	28.42	23.45/20.78	36.00/21.00
5240MHz	Pass	7.58/4.91	15.91	15.91	28.42	23.49/20.82	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	7.58/4.91	15.87	15.87	28.42	23.45/20.78	36.00/21.00
5200MHz	Pass	7.58/4.91	15.86	15.86	28.42	23.44/20.77	36.00/21.00
5240MHz	Pass	7.58/4.91	16.00	16.00	28.42	23.58/20.91	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	7.58/4.91	15.99	15.99	28.42	23.57/20.90	36.00/21.00
5230MHz	Pass	7.58/4.91	16.03	16.03	28.42	23.61/20.94	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	7.58/4.91	16.01	16.01	28.42	23.59/20.92	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.3

Test Mode: Mode 3

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.92	0.03908	23.50/20.83	0.22387/0.121060



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58/4.91	12.90	12.88	15.90	28.42	23.48/20.81	36.00/21.00
5200MHz	Pass	7.58/4.91	12.77	13.05	15.92	28.42	23.50/20.83	36.00/21.00
5240MHz	Pass	7.58/4.91	12.81	12.93	15.88	28.42	23.46/20.79	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 4

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.02	0.03999	23.45/20.92	0.22131/0.123595
802.11be EHT40_Nss2,(MCS0)_2TX	16.06	0.04036	23.49/20.96	0.22336/0.124738
802.11be EHT80_Nss2,(MCS0)_2TX	15.90	0.03890	23.33/20.80	0.21528/0.120226



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.43/4.90	12.92	12.87	15.91	28.57	23.34/20.81	36.00/21.00
5200MHz	Pass	7.43/4.90	12.83	13.11	15.98	28.57	23.41/20.88	36.00/21.00
5240MHz	Pass	7.43/4.90	12.90	13.121	16.02	28.57	23.45/20.92	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.43/4.90	13.02	12.78	15.91	28.57	23.34/20.81	36.00/21.00
5230MHz	Pass	7.43/4.90	13.20	12.90	16.06	28.57	23.49/20.96	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.43/4.90	12.78	12.99	15.90	28.57	23.33/20.80	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 5

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	15.98	0.03963	23.76/20.89	0.23768/0.122744
802.11be EHT20_Nss1,(MCS0)_4TX	16.04	0.04018	23.82/20.95	0.24099/0.124451
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.30	0.01072	23.83/20.97	0.24155/0.125026
802.11be EHT40_Nss1,(MCS0)_4TX	15.91	0.03899	23.69/20.82	0.23388/0.120781
802.11be EHT40-BF_Nss1,(MCS0)_4TX	10.30	0.01072	23.83/20.97	0.24155/0.125026
802.11be EHT80_Nss1,(MCS0)_4TX	15.97	0.03954	23.75/20.88	0.23714/0.122462
802.11be EHT80-BF_Nss1,(MCS0)_4TX	10.23	0.01054	23.76/20.90	0.23768/0.123027

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78/4.91	9.50	9.68	9.40	10.84	15.92	28.22	23.70/20.83	36.00/21.00
5200MHz	Pass	7.78/4.91	9.71	9.54	9.35	10.70	15.88	28.22	23.66/20.79	36.00/21.00
5240MHz	Pass	7.78/4.91	9.76	9.83	9.33	10.78	15.98	28.22	23.76/20.89	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78/4.91	9.69	9.76	9.54	10.68	15.96	28.22	23.74/20.87	36.00/21.00
5200MHz	Pass	7.78/4.91	9.58	9.85	9.28	10.88	15.96	28.22	23.74/20.87	36.00/21.00
5240MHz	Pass	7.78/4.91	9.78	9.84	9.42	10.91	16.04	28.22	23.82/20.95	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.78/4.91	9.80	9.72	9.29	10.65	15.91	28.22	23.69/20.82	36.00/21.00
5230MHz	Pass	7.78/4.91	9.93	9.73	9.15	10.63	15.91	28.22	23.69/20.82	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.78/4.91	9.61	9.81	9.63	10.67	15.97	28.22	23.75/20.88	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53/10.67	3.96	4.09	3.22	5.11	10.17	22.47	23.70/20.84	36.00/21.00
5200MHz	Pass	13.53/10.67	4.17	3.82	3.72	5.24	10.30	22.47	23.83/20.97	36.00/21.00
5240MHz	Pass	13.53/10.67	3.95	3.86	3.65	4.96	10.16	22.47	23.69/20.83	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	13.53/10.67	3.93	3.75	3.54	4.98	10.11	22.47	23.64/20.78	36.00/21.00
5230MHz	Pass	13.53/10.67	4.44	4.20	3.66	4.75	10.30	22.47	23.83/20.97	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	13.53/10.67	4.01	4.08	3.79	4.87	10.23	22.47	23.76/20.90	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 6

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	16.21	0.04178	23.72/20.86	0.23550/0.121899
802.11be EHT40_Nss4,(MCS0)_4TX	16.32	0.04285	23.83/20.97	0.24155/0.125026
802.11be EHT80_Nss4,(MCS0)_4TX	16.17	0.04140	23.68/20.82	0.23335/0.120781



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.51/4.65	9.93	10.04	9.70	10.96	16.21	28.49	23.72/20.86	36.00/21.00
5200MHz	Pass	7.51/4.65	9.91	9.99	9.43	10.94	16.12	28.49	23.63/20.77	36.00/21.00
5240MHz	Pass	7.51/4.65	10.04	9.91	9.67	11.02	16.21	28.49	23.72/20.86	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.51/4.65	10.17	10.00	9.41	10.81	16.15	28.49	23.66/20.80	36.00/21.00
5230MHz	Pass	7.51/4.65	10.29	10.24	9.69	10.89	16.32	28.49	23.83/20.97	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.51/4.65	9.85	9.97	9.81	10.88	16.17	28.49	23.68/20.82	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 7

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	14.98	0.03148	22.56/20.95	0.18030/0.124451
802.11be EHT20_Nss1,(MCS0)_1TX	14.98	0.03148	22.56/20.95	0.18030/0.124451
802.11be EHT40_Nss1,(MCS0)_1TX	15.00	0.03162	22.58/20.97	0.18113/0.125026
802.11be EHT80_Nss1,(MCS0)_1TX	14.85	0.03055	22.43/20.82	0.17498/0.120781



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	7.58/5.97	14.91	14.91	28.42	22.49/20.88	36.00/21.00
5200MHz	Pass	7.58/5.97	14.86	14.86	28.42	22.44/20.83	36.00/21.00
5240MHz	Pass	7.58/5.97	14.98	14.98	28.42	22.56/20.95	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	7.58/5.97	14.79	14.79	28.42	22.37/20.76	36.00/21.00
5200MHz	Pass	7.58/5.97	14.82	14.82	28.42	22.40/20.79	36.00/21.00
5240MHz	Pass	7.58/5.97	14.98	14.98	28.42	22.56/20.95	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	7.58/5.97	14.87	14.87	28.42	22.45/20.84	36.00/21.00
5230MHz	Pass	7.58/5.97	15.00	15.00	28.42	22.58/20.97	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	7.58/5.97	14.85	14.85	28.42	22.43/20.82	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.8

Test Mode: Mode 8

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	14.76	0.02992	22.34/20.89	0.17140/0.122744



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58/6.13	11.39	11.86	14.64	28.42	22.22/20.77	36.00/21.00
5200MHz	Pass	7.58/6.13	11.57	11.84	14.72	28.42	22.30/20.85	36.00/21.00
5240MHz	Pass	7.58/6.13	11.56	11.94	14.76	28.42	22.34/20.89	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 9

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	14.89	0.03083	22.32/20.94	0.17061/0.124165
802.11be EHT40_Nss2,(MCS0)_2TX	14.88	0.03076	22.31/20.93	0.17022/0.123880
802.11be EHT80_Nss2,(MCS0)_2TX	14.71	0.02958	22.14/20.76	0.16368/0.119124

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.43/6.05	11.60	12.09	14.86	28.57	22.29/20.91	36.00/21.00
5200MHz	Pass	7.43/6.05	11.49	11.99	14.76	28.57	22.19/20.81	36.00/21.00
5240MHz	Pass	7.43/6.05	11.56	12.18	14.89	28.57	22.32/20.94	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.43/6.05	11.68	12.06	14.88	28.57	22.31/20.93	36.00/21.00
5230MHz	Pass	7.43/6.05	11.63	12.01	14.83	28.57	22.26/20.88	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.43/6.05	11.41	11.98	14.71	28.57	22.14/20.76	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 10

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	14.78	0.03006	22.56/20.96	0.18030/0.124738
802.11be EHT20_Nss1,(MCS0)_4TX	14.68	0.02938	22.46/20.86	0.17620/0.121899
802.11be EHT20-BF_Nss1,(MCS0)_4TX	8.82	0.00762	22.35/20.95	0.17179/0.124451
802.11be EHT40_Nss1,(MCS0)_4TX	14.80	0.03020	22.58/20.98	0.18113/0.125314
802.11be EHT40-BF_Nss1,(MCS0)_4TX	8.76	0.00752	22.29/20.89	0.16943/0.122744
802.11be EHT80_Nss1,(MCS0)_4TX	14.71	0.02958	22.49/20.89	0.17742/0.122744
802.11be EHT80-BF_Nss1,(MCS0)_4TX	8.68	0.00738	22.21/20.81	0.16634/0.120504

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78/6.18	8.17	8.83	8.25	9.62	14.78	28.22	22.56/20.96	36.00/21.00
5200MHz	Pass	7.78/6.18	8.45	8.45	8.16	9.50	14.69	28.22	22.47/20.87	36.00/21.00
5240MHz	Pass	7.78/6.18	8.22	8.52	8.43	9.56	14.74	28.22	22.52/20.92	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.78/6.18	8.11	8.71	8.18	9.49	14.68	28.22	22.46/20.86	36.00/21.00
5200MHz	Pass	7.78/6.18	8.14	8.54	8.07	9.50	14.62	28.22	22.40/20.80	36.00/21.00
5240MHz	Pass	7.78/6.18	8.02	8.55	8.16	9.46	14.61	28.22	22.39/20.79	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.78/6.18	8.67	8.81	8.10	9.44	14.80	28.22	22.58/20.98	36.00/21.00
5230MHz	Pass	7.78/6.18	8.40	8.73	8.08	9.21	14.65	28.22	22.43/20.83	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.78/6.18	8.30	8.63	8.52	9.24	14.71	28.22	22.49/20.89	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53/12.13	2.75	2.61	2.18	3.39	8.78	22.47	22.31/20.91	36.00/21.00
5200MHz	Pass	13.53/12.13	2.30	2.85	2.22	3.66	8.82	22.47	22.35/20.95	36.00/21.00
5240MHz	Pass	13.53/12.13	2.30	2.50	2.46	3.56	8.76	22.47	22.29/20.89	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	13.53/12.13	2.52	2.70	2.35	3.34	8.76	22.47	22.29/20.89	36.00/21.00
5230MHz	Pass	13.53/12.13	2.31	2.73	1.99	3.59	8.72	22.47	22.25/20.85	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	13.53/12.13	2.10	2.53	2.45	3.44	8.68	22.47	22.21/20.81	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 11

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	14.83	0.03041	22.34/20.94	0.17140/0.124165
802.11be EHT40_Nss4,(MCS0)_4TX	14.79	0.03013	22.30/20.90	0.16982/0.123027
802.11be EHT80_Nss4,(MCS0)_4TX	14.80	0.03020	22.31/20.91	0.17022/0.123310

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.51/6.11	8.00	8.67	8.27	9.39	14.64	28.49	22.15/20.75	36.00/21.00
5200MHz	Pass	7.51/6.11	8.55	8.44	8.56	9.58	14.83	28.49	22.34/20.94	36.00/21.00
5240MHz	Pass	7.51/6.11	7.87	8.82	8.10	9.93	14.78	28.49	22.29/20.89	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.51/6.11	8.15	8.94	8.26	9.59	14.79	28.49	22.30/20.90	36.00/21.00
5230MHz	Pass	7.51/6.11	8.62	8.35	8.30	9.51	14.74	28.49	22.25/20.85	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.51/6.11	7.79	8.86	8.78	9.50	14.80	28.49	22.31/20.91	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 12

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	21.84	0.15276	25.30	0.33884
802.11a_Nss1,(6Mbps)_2TX	24.73	0.29717	29.09	0.81096
802.11a_Nss1,(6Mbps)_4TX	25.34	0.34198	30.10	1.02329
802.11be EHT20_Nss1,(MCS0)_1TX	21.41	0.13836	24.87	0.30690
802.11be EHT20_Nss2,(MCS0)_2TX	24.65	0.29174	28.58	0.72111
802.11be EHT20_Nss1,(MCS0)_4TX	26.24	0.42073	31.00	1.25893
802.11be EHT20_Nss4,(MCS0)_4TX	27.58	0.57280	31.56	1.43219
802.11be EHT20-BF_Nss1,(MCS0)_4TX	25.86	0.38548	35.84	3.83707
802.11be EHT40_Nss1,(MCS0)_1TX	20.42	0.11015	23.88	0.24434
802.11be EHT40_Nss2,(MCS0)_2TX	23.43	0.22029	27.36	0.54450
802.11be EHT40_Nss1,(MCS0)_4TX	23.18	0.20797	27.94	0.62230
802.11be EHT40_Nss4,(MCS0)_4TX	24.87	0.30690	28.85	0.76736
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.18	0.20797	33.16	2.07014
802.11be EHT80_Nss1,(MCS0)_1TX	18.60	0.07244	22.06	0.16069
802.11be EHT80_Nss2,(MCS0)_2TX	23.01	0.19999	26.94	0.49431
802.11be EHT80_Nss1,(MCS0)_4TX	19.60	0.09120	24.36	0.27290
802.11be EHT80_Nss4,(MCS0)_4TX	20.29	0.10691	24.27	0.26730
802.11be EHT80-BF_Nss1,(MCS0)_4TX	19.60	0.09120	29.58	0.90782

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.46	18.68				18.68	30.00	22.14	Inf
5200MHz	Pass	3.46	21.84				21.84	30.00	25.30	Inf
5240MHz	Pass	3.46	21.64				21.64	30.00	25.10	Inf
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.46	20.36				20.36	30.00	23.82	Inf
5200MHz	Pass	3.46	21.41				21.41	30.00	24.87	Inf
5240MHz	Pass	3.46	21.38				21.38	30.00	24.84	Inf
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.46	19.08				19.08	30.00	22.54	Inf
5230MHz	Pass	3.46	20.42				20.42	30.00	23.88	Inf
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.46	18.60				18.60	30.00	22.06	Inf
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.36	20.05	20.39			23.23	30.00	27.59	Inf
5200MHz	Pass	4.36	20.86	21.18			24.03	30.00	28.39	Inf
5240MHz	Pass	4.36	21.58	21.86			24.73	30.00	29.09	Inf
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.93	19.91	20.43			23.19	30.00	27.12	Inf
5200MHz	Pass	3.93	20.26	20.30			23.29	30.00	27.22	Inf
5240MHz	Pass	3.93	21.49	21.79			24.65	30.00	28.58	Inf
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.93	20.35	20.49			23.43	30.00	27.36	Inf
5230MHz	Pass	3.93	18.70	18.71			21.72	30.00	25.65	Inf
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.93	19.87	20.13			23.01	30.00	26.94	Inf
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76	18.54	18.92	19.00	18.96	24.88	30.00	29.64	Inf
5200MHz	Pass	4.76	18.91	19.45	19.20	19.38	25.26	30.00	30.02	Inf
5240MHz	Pass	4.76	19.03	19.45	19.35	19.42	25.34	30.00	30.10	Inf
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76	16.61	16.60	16.56	17.21	22.77	30.00	27.53	Inf
5200MHz	Pass	4.76	19.86	20.32	20.38	20.30	26.24	30.00	31.00	Inf
5240MHz	Pass	4.76	19.95	20.19	20.24	20.22	26.17	30.00	30.93	Inf
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.76	14.64	15.03	14.50	15.08	20.84	30.00	25.60	Inf
5230MHz	Pass	4.76	17.18	17.13	16.91	17.42	23.18	30.00	27.94	Inf
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.76	13.06	13.55	13.57	14.09	19.60	30.00	24.36	Inf
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.98	19.04	18.97	19.54	19.58	25.31	30.00	29.29	Inf
5200MHz	Pass	3.98	21.18	21.42	21.48	21.44	27.40	30.00	31.38	Inf
5240MHz	Pass	3.98	21.48	21.26	21.74	21.75	27.58	30.00	31.56	Inf
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.98	15.63	16.03	15.38	15.98	21.78	30.00	25.76	Inf
5230MHz	Pass	3.98	18.79	18.85	18.66	19.08	24.87	30.00	28.85	Inf
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.98	13.90	14.36	14.07	14.72	20.29	30.00	24.27	Inf
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	9.98	16.61	16.60	16.56	17.21	22.77	26.02	32.75	Inf
5200MHz	Pass	9.98	19.56	19.81	20.10	19.89	25.86	26.02	35.84	Inf
5240MHz	Pass	9.98	19.55	19.75	19.90	20.02	25.83	26.02	35.81	Inf
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	9.98	14.64	15.03	14.50	15.08	20.84	26.02	30.82	Inf
5230MHz	Pass	9.98	17.18	17.13	16.91	17.42	23.18	26.02	33.16	Inf



Average Power

Appendix C.12

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	9.98	13.06	13.55	13.57	14.09	19.60	26.02	29.58	Inf

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 13

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	20.93	0.12388	24.39/20.96	0.27479/0.124738
802.11be EHT20_Nss1,(MCS0)_1TX	20.93	0.12388	24.39/20.96	0.27479/0.124738
802.11be EHT40_Nss1,(MCS0)_1TX	20.42	0.11015	23.88/20.45	0.24434/0.110917
802.11be EHT80_Nss1,(MCS0)_1TX	18.60	0.07244	22.06/18.63	0.16069/0.072946



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.46/0.03	18.68	18.68	30.00	22.14/18.71	36.00/21.00
5200MHz	Pass	3.46/0.03	20.89	20.89	30.00	24.35/20.92	36.00/21.00
5240MHz	Pass	3.46/0.03	20.93	20.93	30.00	24.39/20.96	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.46/0.03	20.36	20.36	30.00	23.82/20.39	36.00/21.00
5200MHz	Pass	3.46/0.03	20.81	20.81	30.00	24.27/20.84	36.00/21.00
5240MHz	Pass	3.46/0.03	20.93	20.93	30.00	24.39/20.96	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	3.46/0.03	19.08	19.08	30.00	22.54/19.11	36.00/21.00
5230MHz	Pass	3.46/0.03	20.42	20.42	30.00	23.88/20.45	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.46/0.03	18.60	18.60	30.00	22.06/18.63	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.14

Test Mode: Mode 14

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.40	0.08710	23.76/20.97	0.23768/0.125026



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.36/1.57	16.46	16.31	19.40	30.00	23.76/20.97	36.00/21.00
5200MHz	Pass	4.36/1.57	16.24	16.48	19.37	30.00	23.73/20.94	36.00/21.00
5240MHz	Pass	4.36/1.57	16.27	16.33	19.31	30.00	23.67/20.88	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 15

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	20.08	0.10186	24.01/20.95	0.25177/0.124451
802.11be EHT40_Nss2,(MCS0)_2TX	19.99	0.09977	23.92/20.86	0.24660/0.121899
802.11be EHT80_Nss2,(MCS0)_2TX	19.97	0.09931	23.90/20.84	0.24547/0.121339



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.93/0.87	17.01	16.84	19.94	30.00	23.87/20.81	36.00/21.00
5200MHz	Pass	3.93/0.87	17.03	16.77	19.91	30.00	23.84/20.78	36.00/21.00
5240MHz	Pass	3.93/0.87	17.32	16.80	20.08	30.00	24.01/20.95	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.93/0.87	17.07	16.81	19.95	30.00	23.88/20.82	36.00/21.00
5230MHz	Pass	3.93/0.87	17.22	16.73	19.99	30.00	23.92/20.86	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.93/0.87	17.10	16.81	19.97	30.00	23.90/20.84	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 16

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	19.34	0.08590	24.10/20.91	0.25704/0.123310
802.11be EHT20_Nss1,(MCS0)_4TX	19.36	0.08630	24.12/20.93	0.25823/0.123880
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.25	0.02661	24.23/20.89	0.26485/0.122744
802.11be EHT40_Nss1,(MCS0)_4TX	19.39	0.08690	24.15/20.96	0.26002/0.124738
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.34	0.02716	24.32/20.98	0.27040/0.125314
802.11be EHT80_Nss1,(MCS0)_4TX	19.38	0.08670	24.14/20.95	0.25942/0.124451
802.11be EHT80-BF_Nss1,(MCS0)_4TX	14.18	0.02618	24.16/20.82	0.26062/0.120781

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1.(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76/1.57	13.29	13.16	13.08	13.72	19.34	30.00	24.10/20.91	36.00/21.00
5200MHz	Pass	4.76/1.57	13.21	13.16	12.98	13.67	19.28	30.00	24.04/20.85	36.00/21.00
5240MHz	Pass	4.76/1.57	13.34	13.14	12.89	13.44	19.23	30.00	23.99/20.80	36.00/21.00
802.11be EHT20_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76/1.57	13.22	12.97	13.22	13.88	19.36	30.00	24.12/20.93	36.00/21.00
5200MHz	Pass	4.76/1.57	13.37	13.14	12.91	13.53	19.26	30.00	24.02/20.83	36.00/21.00
5240MHz	Pass	4.76/1.57	13.12	13.17	12.79	13.66	19.22	30.00	23.98/20.79	36.00/21.00
802.11be EHT40_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.76/1.57	13.40	13.09	12.73	13.52	19.22	30.00	23.98/20.79	36.00/21.00
5230MHz	Pass	4.76/1.57	13.67	13.30	12.89	13.58	19.39	30.00	24.15/20.96	36.00/21.00
802.11be EHT80_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.76/1.57	13.26	13.06	13.30	13.78	19.38	30.00	24.14/20.95	36.00/21.00
802.11be EHT20-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	9.98/6.64	8.10	7.61	7.86	8.97	14.19	26.02	24.17/20.83	36.00/21.00
5200MHz	Pass	9.98/6.64	8.02	8.17	7.55	8.99	14.23	26.02	24.21/20.87	36.00/21.00
5240MHz	Pass	9.98/6.64	8.24	7.93	7.77	8.90	14.25	26.02	24.23/20.89	36.00/21.00
802.11be EHT40-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	9.98/6.64	8.01	8.03	7.66	8.79	14.16	26.02	24.14/20.80	36.00/21.00
5230MHz	Pass	9.98/6.64	8.22	8.19	7.44	9.24	14.34	26.02	24.32/20.98	36.00/21.00
802.11be EHT80-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	9.98/6.64	7.63	8.00	8.10	8.81	14.18	26.02	24.16/20.82	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 17

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	20.28	0.10666	24.26/20.93	0.26669/0.123880
802.11be EHT40_Nss4,(MCS0)_4TX	20.16	0.10375	24.14/20.81	0.25942/0.120504
802.11be EHT80_Nss4,(MCS0)_4TX	20.01	0.10023	23.99/20.66	0.25061/0.116413



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.98/0.65	14.29	13.97	14.09	14.66	20.28	30.00	24.26/20.93	36.00/21.00
5200MHz	Pass	3.98/0.65	14.00	13.92	13.97	14.74	20.19	30.00	24.17/20.84	36.00/21.00
5240MHz	Pass	3.98/0.65	14.07	14.09	13.95	14.43	20.16	30.00	24.14/20.81	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.98/0.65	14.39	14.14	13.82	14.15	20.15	30.00	24.13/20.80	36.00/21.00
5230MHz	Pass	3.98/0.65	14.42	14.12	13.85	14.14	20.16	30.00	24.14/20.81	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.98/0.65	14.01	13.89	13.98	14.08	20.01	30.00	23.99/20.66	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 18

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	17.59	0.05741	21.05/20.77	0.12735/0.119399
802.11be EHT20_Nss1,(MCS0)_1TX	17.78	0.05998	21.24/20.96	0.13305/0.124738
802.11be EHT40_Nss1,(MCS0)_1TX	17.66	0.05834	21.12/20.84	0.12942/0.121339
802.11be EHT80_Nss1,(MCS0)_1TX	17.68	0.05861	21.14/20.86	0.13002/0.121899

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.46/3.18	17.42	17.42	30.00	20.88/20.60	36.00/21.00
5200MHz	Pass	3.46/3.18	17.58	17.58	30.00	21.04/20.76	36.00/21.00
5240MHz	Pass	3.46/3.18	17.59	17.59	30.00	21.05/20.77	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.46/3.18	17.53	17.53	30.00	20.99/20.71	36.00/21.00
5200MHz	Pass	3.46/3.18	17.57	17.57	30.00	21.03/20.75	36.00/21.00
5240MHz	Pass	3.46/3.18	17.78	17.78	30.00	21.24/20.96	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	3.46/3.18	17.66	17.66	30.00	21.12/20.84	36.00/21.00
5230MHz	Pass	3.46/3.18	17.59	17.59	30.00	21.05/20.77	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.46/3.18	17.68	17.68	30.00	21.14/20.86	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.19

Test Mode: Mode 19

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	17.05	0.05070	21.41/20.90	0.13836/0.123027

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.36/3.85	13.84	13.96	16.91	30.00	21.27/20.76	36.00/21.00
5200MHz	Pass	4.36/3.85	13.66	14.17	16.93	30.00	21.29/20.78	36.00/21.00
5240MHz	Pass	4.36/3.85	13.84	14.24	17.05	30.00	21.41/20.90	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 20

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	17.38	0.05470	21.31/20.91	0.13521/0.123310
802.11be EHT40_Nss2,(MCS0)_2TX	17.29	0.05358	21.22/20.82	0.13243/0.120781
802.11be EHT80_Nss2,(MCS0)_2TX	17.23	0.05284	21.16/20.76	0.13062/0.119124

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.93/3.53	13.98	14.43	17.22	30.00	21.15/20.75	36.00/21.00
5200MHz	Pass	3.93/3.53	14.10	14.58	17.36	30.00	21.29/20.89	36.00/21.00
5240MHz	Pass	3.93/3.53	14.09	14.63	17.38	30.00	21.31/20.91	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.93/3.53	14.24	14.29	17.28	30.00	21.21/20.81	36.00/21.00
5230MHz	Pass	3.93/3.53	14.27	14.29	17.29	30.00	21.22/20.82	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.93/3.53	14.06	14.38	17.23	30.00	21.16/20.76	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 21

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.21	0.04178	20.97/20.96	0.12503/0.124738
802.11be EHT20_Nss1,(MCS0)_4TX	16.22	0.04188	20.98/20.97	0.12531/0.125026
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.29	0.01346	21.27/20.90	0.13397/0.123027
802.11be EHT40_Nss1,(MCS0)_4TX	16.17	0.04140	20.93/20.92	0.12388/0.123595
802.11be EHT40-BF_Nss1,(MCS0)_4TX	11.24	0.01330	21.22/20.85	0.13243/0.121619
802.11be EHT80_Nss1,(MCS0)_4TX	16.09	0.04064	20.85/20.84	0.12162/0.121339
802.11be EHT80-BF_Nss1,(MCS0)_4TX	11.14	0.01300	21.12/20.75	0.12942/0.118850

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76/4.75	9.65	10.16	9.72	11.03	16.20	30.00	20.96/20.95	36.00/21.00
5200MHz	Pass	4.76/4.75	9.84	10.31	9.59	10.90	16.21	30.00	20.97/20.96	36.00/21.00
5240MHz	Pass	4.76/4.75	9.63	10.05	9.54	10.82	16.06	30.00	20.82/20.81	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.76/4.75	9.62	10.18	9.66	10.82	16.12	30.00	20.88/20.87	36.00/21.00
5200MHz	Pass	4.76/4.75	9.51	10.12	9.67	10.94	16.12	30.00	20.88/20.87	36.00/21.00
5240MHz	Pass	4.76/4.75	9.65	10.07	9.78	11.15	16.22	30.00	20.98/20.97	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.76/4.75	9.68	10.27	9.71	10.68	16.13	30.00	20.89/20.88	36.00/21.00
5230MHz	Pass	4.76/4.75	9.77	10.22	9.47	10.98	16.17	30.00	20.93/20.92	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.76/4.75	9.47	9.98	9.97	10.77	16.09	30.00	20.85/20.84	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	9.98/9.61	4.41	5.20	4.60	6.16	11.17	26.02	21.15/20.78	36.00/21.00
5200MHz	Pass	9.98/9.61	4.51	4.98	5.01	6.14	11.22	26.02	21.20/20.83	36.00/21.00
5240MHz	Pass	9.98/9.61	4.55	5.18	4.96	6.22	11.29	26.02	21.27/20.90	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	9.98/9.61	4.73	5.40	4.72	5.74	11.19	26.02	21.17/20.80	36.00/21.00
5230MHz	Pass	9.98/9.61	4.85	5.45	4.59	5.88	11.24	26.02	21.22/20.85	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	9.98/9.61	4.58	5.22	4.92	5.68	11.14	26.02	21.12/20.75	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 22

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	17.33	0.05408	21.31/20.96	0.13521/0.124738
802.11be EHT40_Nss4,(MCS0)_4TX	17.24	0.05297	21.22/20.87	0.13243/0.122180
802.11be EHT80_Nss4,(MCS0)_4TX	17.12	0.05152	21.10/20.75	0.12882/0.118850

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.98/3.63	10.89	11.39	10.95	11.88	17.32	30.00	21.30/20.95	36.00/21.00
5200MHz	Pass	3.98/3.63	10.75	11.23	11.01	11.88	17.26	30.00	21.24/20.89	36.00/21.00
5240MHz	Pass	3.98/3.63	10.77	11.31	10.93	12.10	17.33	30.00	21.31/20.96	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.98/3.63	10.94	11.38	10.87	11.63	17.24	30.00	21.22/20.87	36.00/21.00
5230MHz	Pass	3.98/3.63	10.65	11.09	10.77	11.80	17.12	30.00	21.10/20.75	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.98/3.63	10.28	11.06	10.97	11.92	17.12	30.00	21.10/20.75	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 23

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	21.72	0.14859
802.11a_Nss1,(6Mbps)_2TX	24.56	0.28576
802.11a_Nss1,(6Mbps)_4TX	23.18	0.20797
802.11be EHT20_Nss1,(MCS0)_1TX	22.03	0.15959
802.11be EHT20_Nss2,(MCS0)_2TX	24.72	0.29648
802.11be EHT20_Nss1,(MCS0)_4TX	24.17	0.26122
802.11be EHT20_Nss4,(MCS0)_4TX	27.93	0.62087
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.67	0.23281
802.11be EHT40_Nss1,(MCS0)_1TX	19.28	0.08472
802.11be EHT40_Nss2,(MCS0)_2TX	22.93	0.19634
802.11be EHT40_Nss1,(MCS0)_4TX	26.03	0.40087
802.11be EHT40_Nss4,(MCS0)_4TX	25.99	0.39719
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.60	0.22909
802.11be EHT80_Nss1,(MCS0)_1TX	19.28	0.08472
802.11be EHT80_Nss2,(MCS0)_2TX	19.92	0.09817
802.11be EHT80_Nss1,(MCS0)_4TX	21.10	0.12882
802.11be EHT80_Nss4,(MCS0)_4TX	22.05	0.16032
802.11be EHT80-BF_Nss1,(MCS0)_4TX	21.10	0.12882
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	22.05	0.16032
802.11a_Nss1,(6Mbps)_2TX	25.08	0.32211
802.11a_Nss1,(6Mbps)_4TX	27.55	0.56885
802.11be EHT20_Nss1,(MCS0)_1TX	22.51	0.17824
802.11be EHT20_Nss2,(MCS0)_2TX	25.29	0.33806
802.11be EHT20_Nss1,(MCS0)_4TX	28.24	0.66681
802.11be EHT20_Nss4,(MCS0)_4TX	28.30	0.67608
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.73	0.23605
802.11be EHT40_Nss1,(MCS0)_1TX	21.50	0.14125
802.11be EHT40_Nss2,(MCS0)_2TX	24.73	0.29717
802.11be EHT40_Nss1,(MCS0)_4TX	27.29	0.53580
802.11be EHT40_Nss4,(MCS0)_4TX	27.30	0.53703
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.74	0.23659
802.11be EHT80_Nss1,(MCS0)_1TX	19.72	0.09376
802.11be EHT80_Nss2,(MCS0)_2TX	22.04	0.15996
802.11be EHT80_Nss1,(MCS0)_4TX	24.24	0.26546
802.11be EHT80_Nss4,(MCS0)_4TX	24.47	0.27990
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.58	0.22803

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15	19.09				19.09	29.85
5200MHz	Pass	6.15	21.72				21.72	29.85
5240MHz	Pass	6.15	21.72				21.72	29.85
5745MHz	Pass	6.15	21.38				21.38	29.85
5785MHz	Pass	6.15	22.05				22.05	29.85
5825MHz	Pass	6.15	21.07				21.07	29.85
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15	19.72				19.72	29.85
5200MHz	Pass	6.15	22.03				22.03	29.85
5240MHz	Pass	6.15	21.64				21.64	29.85
5745MHz	Pass	6.15	21.57				21.57	29.85
5785MHz	Pass	6.15	22.51				22.51	29.85
5825MHz	Pass	6.15	21.32				21.32	29.85
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.15	18.92				18.92	29.85
5230MHz	Pass	6.15	19.28				19.28	29.85
5755MHz	Pass	6.15	19.53				19.53	29.85
5795MHz	Pass	6.15	21.5				21.50	29.85
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.15	19.28				19.28	29.85
5775MHz	Pass	6.15	19.72				19.72	29.85
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15	18.57	19.45			22.04	29.85
5200MHz	Pass	6.15	21.17	21.75			24.48	29.85
5240MHz	Pass	6.15	21.22	21.86			24.56	29.85
5745MHz	Pass	6.15	21.03	21.99			24.55	29.85
5785MHz	Pass	6.15	21.51	22.56			25.08	29.85
5825MHz	Pass	6.15	21.19	22.02			24.64	29.85
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15	18.44	19.56			22.05	29.85
5200MHz	Pass	6.15	20.63	21.11			23.89	29.85
5240MHz	Pass	6.15	21.35	22.04			24.72	29.85
5745MHz	Pass	6.15	21.15	22.3			24.77	29.85
5785MHz	Pass	6.15	21.72	22.78			25.29	29.85
5825MHz	Pass	6.15	21.47	22.17			24.84	29.85
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.15	18.14	18.94			21.57	29.85
5230MHz	Pass	6.15	19.37	20.4			22.93	29.85
5755MHz	Pass	6.15	19.25	20.39			22.87	29.85
5795MHz	Pass	6.15	21.12	22.24			24.73	29.85
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.15	16.67	17.14			19.92	29.85
5775MHz	Pass	6.15	19.07	18.98			22.04	29.85
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25	16.45	17.14	17.03	16.57	22.83	29.75
5200MHz	Pass	6.25	16.64	17.07	17.42	17.45	23.18	29.75
5240MHz	Pass	6.25	16.18	16.97	17.01	17.02	22.83	29.75
5745MHz	Pass	6.25	20.73	21.73	21.36	21.29	27.31	29.75
5785MHz	Pass	6.25	20.76	22.01	21.42	21.83	27.55	29.75
5825MHz	Pass	6.25	21.08	21.81	21.5	21.63	27.53	29.75
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25	17.35	17.95	18.21	18.05	23.92	29.75
5200MHz	Pass	6.25	17.74	18.19	18.32	18.33	24.17	29.75
5240MHz	Pass	6.25	17.51	18.11	18.31	18.26	24.08	29.75



Average Power

Appendix C.23

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
5745MHz	Pass	6.25	20.13	21.09	20.64	20.68	26.67	29.75
5785MHz	Pass	6.25	21.61	22.55	22.17	22.47	28.24	29.75
5825MHz	Pass	6.25	21.29	22.06	21.77	21.83	27.77	29.75
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.25	16.81	17.52	17.49	17.61	23.39	29.75
5230MHz	Pass	6.25	19.27	20.12	20.11	20.46	26.03	29.75
5755MHz	Pass	6.25	18.11	19.85	19.37	19.6	25.30	29.75
5795MHz	Pass	6.25	20.41	21.59	21.38	21.59	27.29	29.75
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.25	14.4	14.97	15.35	15.53	21.10	29.75
5775MHz	Pass	6.25	18.2	18.1	18.29	18.28	24.24	29.75
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.18	17.61	18.43	18.6	18.36	24.29	29.82
5200MHz	Pass	6.18	19.96	20.74	20.92	20.72	26.62	29.82
5240MHz	Pass	6.18	21.39	21.99	22.09	22.14	27.93	29.82
5745MHz	Pass	6.18	20.89	21.97	21.61	21.65	27.57	29.82
5785MHz	Pass	6.18	21.66	22.68	22.23	22.47	28.30	29.82
5825MHz	Pass	6.18	21.13	22.06	21.83	21.96	27.78	29.82
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.18	15.7	16.54	16.57	16.83	22.45	29.82
5230MHz	Pass	6.18	19.31	20.04	20.02	20.42	25.99	29.82
5755MHz	Pass	6.18	18.66	20.14	19.67	19.86	25.64	29.82
5795MHz	Pass	6.18	20.44	21.63	21.38	21.56	27.30	29.82
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.18	15.4	15.9	16.46	16.29	22.05	29.82
5775MHz	Pass	6.18	17.64	18.76	18.56	18.75	24.47	29.82
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	12.20	16.95	17.82	18.03	17.64	23.65	23.80
5200MHz	Pass	12.20	17.13	17.77	17.87	17.79	23.67	23.80
5240MHz	Pass	12.20	17.17	17.72	17.69	17.92	23.65	23.80
5745MHz	Pass	12.20	17.17	18.10	17.75	17.22	23.60	23.80
5785MHz	Pass	12.20	17.16	18.07	17.71	17.84	23.73	23.80
5825MHz	Pass	12.20	17.49	17.91	17.52	17.82	23.71	23.80
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	12.20	16.81	17.52	17.49	17.61	23.39	23.80
5230MHz	Pass	12.20	17.18	17.90	17.86	17.32	23.60	23.80
5755MHz	Pass	12.20	16.80	18.05	18.04	17.87	23.74	23.80
5795MHz	Pass	12.20	16.72	17.84	17.78	17.79	23.58	23.80
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	12.20	14.4	14.97	15.35	15.53	21.10	23.80
5775MHz	Pass	12.20	16.90	17.82	17.68	17.78	23.58	23.80

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 24

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	18.17	0.06561	24.32/20.91	0.27040/0.123310
802.11be EHT20_Nss1,(MCS0)_1TX	18.20	0.06607	24.35/20.94	0.27227/0.124165
802.11be EHT40_Nss1,(MCS0)_1TX	18.15	0.06531	24.30/20.89	0.26915/0.122744
802.11be EHT80_Nss1,(MCS0)_1TX	18.09	0.06442	24.24/20.83	0.26546/0.121060



Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	6.15/2.74	18.02	18.02	29.85	24.17/20.76	36.00/21.00
5200MHz	Pass	6.15/2.74	18.17	18.17	29.85	24.32/20.91	36.00/21.00
5240MHz	Pass	6.15/2.74	18.02	18.02	29.85	24.17/20.76	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	6.15/2.74	18.19	18.19	29.85	24.34/20.93	36.00/21.00
5200MHz	Pass	6.15/2.74	18.20	18.20	29.85	24.35/20.94	36.00/21.00
5240MHz	Pass	6.15/2.74	18.13	18.13	29.85	24.28/20.87	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	6.15/2.74	18.15	18.15	29.85	24.30/20.89	36.00/21.00
5230MHz	Pass	6.15/2.74	18.06	18.06	29.85	24.21/20.80	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	6.15/2.74	18.09	18.09	29.85	24.24/20.83	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.25

Test Mode: Mode 25

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	17.88	0.06138	24.03/20.93	0.25293/0.123880



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15/3.05	14.75	14.96	17.87	29.85	24.02/20.92	36.00/21.00
5200MHz	Pass	6.15/3.05	14.64	15.08	17.88	29.85	24.03/20.93	36.00/21.00
5240MHz	Pass	6.15/3.05	14.70	15.02	17.87	29.85	24.02/20.92	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 26

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.05	0.06383	24.20/20.95	0.26303/0.124451
802.11be EHT40_Nss2,(MCS0)_2TX	18.06	0.06397	24.21/20.96	0.26363/0.124738
802.11be EHT80_Nss2,(MCS0)_2TX	18.07	0.06412	24.22/20.97	0.26424/0.125026

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15/2.90	14.81	15.25	18.05	29.85	24.20/20.95	36.00/21.00
5200MHz	Pass	6.15/2.90	14.89	14.93	17.92	29.85	24.07/20.82	36.00/21.00
5240MHz	Pass	6.15/2.90	14.97	15.09	18.04	29.85	24.19/20.94	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.15/2.90	14.92	14.91	17.93	29.85	24.08/20.83	36.00/21.00
5230MHz	Pass	6.15/2.90	14.99	15.10	18.06	29.85	24.21/20.96	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.15/2.90	15.02	15.10	18.07	29.85	24.22/20.97	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 27

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	17.92	0.06194	24.17/20.97	0.26122/0.125026
802.11be EHT20_Nss1,(MCS0)_4TX	17.90	0.06166	24.15/20.95	0.26002/0.124451
802.11be EHT20-BF_Nss1,(MCS0)_4TX	12.32	0.01706	24.52/20.95	0.28314/0.124451
802.11be EHT40_Nss1,(MCS0)_4TX	17.91	0.06180	24.16/20.96	0.26062/0.124738
802.11be EHT40-BF_Nss1,(MCS0)_4TX	12.34	0.01714	24.54/20.97	0.28445/0.125026
802.11be EHT80_Nss1,(MCS0)_4TX	17.88	0.06138	24.13/20.93	0.25882/0.123880
802.11be EHT80-BF_Nss1,(MCS0)_4TX	12.31	0.01702	24.51/20.94	0.28249/0.124165

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1.(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25/3.05	11.71	11.80	12.12	11.74	17.87	29.75	24.12/20.92	36.00/21.00
5200MHz	Pass	6.25/3.05	11.57	11.83	12.10	11.52	17.78	29.75	24.03/20.83	36.00/21.00
5240MHz	Pass	6.25/3.05	11.86	11.80	12.02	11.90	17.92	29.75	24.17/20.97	36.00/21.00
802.11be EHT20_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25/3.05	11.56	11.65	12.01	11.55	17.72	29.75	23.97/20.77	36.00/21.00
5200MHz	Pass	6.25/3.05	11.56	11.74	12.11	11.80	17.83	29.75	24.08/20.88	36.00/21.00
5240MHz	Pass	6.25/3.05	11.72	11.65	12.21	11.92	17.90	29.75	24.15/20.95	36.00/21.00
802.11be EHT40_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	6.25/3.05	11.78	11.74	12.02	11.81	17.86	29.75	24.11/20.91	36.00/21.00
5230MHz	Pass	6.25/3.05	11.71	11.86	11.98	12.02	17.91	29.75	24.16/20.96	36.00/21.00
802.11be EHT80_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.25/3.05	11.63	11.60	12.09	12.08	17.88	29.75	24.13/20.93	36.00/21.00
802.11be EHT20-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	12.20/8.63	5.94	6.16	6.54	6.50	12.31	23.80	24.51/20.94	36.00/21.00
5200MHz	Pass	12.20/8.63	5.93	5.82	6.81	6.02	12.18	23.80	24.38/20.81	36.00/21.00
5240MHz	Pass	12.20/8.63	5.88	6.41	6.55	6.34	12.32	23.80	24.52/20.95	36.00/21.00
802.11be EHT40-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	12.20/8.63	6.09	6.13	6.51	6.35	12.29	23.80	24.49/20.92	36.00/21.00
5230MHz	Pass	12.20/8.63	5.99	5.99	6.56	6.70	12.34	23.80	24.54/20.97	36.00/21.00
802.11be EHT80-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	12.20/8.63	5.80	6.33	6.41	6.57	12.31	23.80	24.51/20.94	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 28

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	18.25	0.06683	24.43/20.87	0.27733/0.122180
802.11be EHT40_Nss4,(MCS0)_4TX	18.32	0.06792	24.50/20.94	0.28184/0.124165
802.11be EHT80_Nss4,(MCS0)_4TX	18.14	0.06516	24.32/20.76	0.27040/0.119124

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.18/2.62	11.94	12.15	12.55	12.04	18.20	29.82	24.38/20.82	36.00/21.00
5200MHz	Pass	6.18/2.62	12.12	12.09	12.45	12.24	18.25	29.82	24.43/20.87	36.00/21.00
5240MHz	Pass	6.18/2.62	12.07	12.14	12.47	12.03	18.20	29.82	24.38/20.82	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	6.18/2.62	12.12	11.99	12.25	12.12	18.14	29.82	24.32/20.76	36.00/21.00
5230MHz	Pass	6.18/2.62	12.18	12.19	12.47	12.35	18.32	29.82	24.50/20.94	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.18/2.62	11.73	11.87	12.59	12.25	18.14	29.82	24.32/20.76	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 29

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	15.67	0.03690	21.82/20.93	0.15205/0.123880
802.11be EHT20_Nss1,(MCS0)_1TX	15.67	0.03690	21.82/20.93	0.15205/0.123880
802.11be EHT40_Nss1,(MCS0)_1TX	15.61	0.03639	21.76/20.87	0.14997/0.122180
802.11be EHT80_Nss1,(MCS0)_1TX	15.49	0.03540	21.64/20.75	0.14588/0.118850

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	6.15/5.26	15.66	15.66	29.85	21.81/20.92	36.00/21.00
5200MHz	Pass	6.15/5.26	15.64	15.64	29.85	21.79/20.90	36.00/21.00
5240MHz	Pass	6.15/5.26	15.67	15.67	29.85	21.82/20.93	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	6.15/5.26	15.67	15.67	29.85	21.82/20.93	36.00/21.00
5200MHz	Pass	6.15/5.26	15.65	15.65	29.85	21.80/20.91	36.00/21.00
5240MHz	Pass	6.15/5.26	15.59	15.59	29.85	21.74/20.85	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	6.15/5.26	15.49	15.49	29.85	21.64/20.75	36.00/21.00
5230MHz	Pass	6.15/5.26	15.61	15.61	29.85	21.76/20.87	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	6.15/5.26	15.49	15.49	29.85	21.64/20.75	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.30

Test Mode: Mode 30

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.54	0.03581	21.69/20.94	0.14757/0.124165

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15/5.40	12.17	12.51	15.35	29.85	21.50/20.75	36.00/21.00
5200MHz	Pass	6.15/5.40	12.28	12.77	15.54	29.85	21.69/20.94	36.00/21.00
5240MHz	Pass	6.15/5.40	12.27	12.74	15.52	29.85	21.67/20.92	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 31

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	15.60	0.03631	21.75/20.93	0.14962/0.123880
802.11be EHT40_Nss2,(MCS0)_2TX	15.43	0.03491	21.58/20.76	0.14388/0.119124
802.11be EHT80_Nss2,(MCS0)_2TX	15.46	0.03516	21.61/20.79	0.14488/0.119950



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.15/5.33	12.30	12.87	15.60	29.85	21.75/20.93	36.00/21.00
5200MHz	Pass	6.15/5.33	12.27	12.79	15.55	29.85	21.70/20.88	36.00/21.00
5240MHz	Pass	6.15/5.33	12.38	12.77	15.59	29.85	21.74/20.92	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.15/5.33	12.20	12.61	15.42	29.85	21.57/20.75	36.00/21.00
5230MHz	Pass	6.15/5.33	12.29	12.55	15.43	29.85	21.58/20.76	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.15/5.33	12.21	12.68	15.46	29.85	21.61/20.79	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 32

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	15.51	0.03556	21.76/20.91	0.14997/0.123310
802.11be EHT20_Nss1,(MCS0)_4TX	15.39	0.03459	21.64/20.79	0.14588/0.119950
802.11be EHT20-BF_Nss1,(MCS0)_4TX	9.80	0.00955	22.00/20.96	0.15849/0.124738
802.11be EHT40_Nss1,(MCS0)_4TX	15.54	0.03581	21.79/20.94	0.15101/0.124165
802.11be EHT40-BF_Nss1,(MCS0)_4TX	9.82	0.00959	22.02/20.98	0.15922/0.125314
802.11be EHT80_Nss1,(MCS0)_4TX	15.48	0.03532	21.73/20.88	0.14894/0.122462
802.11be EHT80-BF_Nss1,(MCS0)_4TX	9.67	0.00927	21.87/20.83	0.15382/0.121060

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25/5.40	9.22	9.50	9.99	8.96	15.46	29.75	21.71/20.86	36.00/21.00
5200MHz	Pass	6.25/5.40	8.94	9.01	9.74	9.41	15.31	29.75	21.56/20.71	36.00/21.00
5240MHz	Pass	6.25/5.40	9.47	9.48	9.77	9.22	15.51	29.75	21.76/20.91	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.25/5.40	8.77	9.47	9.95	9.21	15.39	29.75	21.64/20.79	36.00/21.00
5200MHz	Pass	6.25/5.40	8.76	9.06	9.91	9.52	15.36	29.75	21.61/20.76	36.00/21.00
5240MHz	Pass	6.25/5.40	8.63	9.08	9.74	9.82	15.37	29.75	21.62/20.77	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	6.25/5.40	9.19	9.40	9.50	9.96	15.54	29.75	21.79/20.94	36.00/21.00
5230MHz	Pass	6.25/5.40	8.80	9.08	10.00	9.75	15.46	29.75	21.71/20.86	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.25/5.40	8.39	9.30	10.04	9.93	15.48	29.75	21.73/20.88	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	12.20/11.16	3.46	3.70	4.55	3.00	9.74	23.80	21.94/20.90	36.00/21.00
5200MHz	Pass	12.20/11.16	3.24	3.68	4.00	4.13	9.80	23.80	22.00/20.96	36.00/21.00
5240MHz	Pass	12.20/11.16	3.32	3.52	4.34	3.26	9.65	23.80	21.85/20.81	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	12.20/11.16	3.28	3.42	3.82	3.78	9.60	23.80	21.80/20.76	36.00/21.00
5230MHz	Pass	12.20/11.16	3.10	3.51	4.19	4.29	9.82	23.80	22.02/20.98	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	12.20/11.16	2.51	3.62	4.20	4.09	9.67	23.80	21.87/20.83	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 33

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	15.82	0.03819	22.00/20.97	0.15849/0.125026
802.11be EHT40_Nss4,(MCS0)_4TX	15.81	0.03811	21.99/20.96	0.15812/0.124738
802.11be EHT80_Nss4,(MCS0)_4TX	15.81	0.03811	21.99/20.96	0.15812/0.124738



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	6.18/5.15	9.32	9.24	10.15	10.37	15.82	29.82	22.00/20.97	36.00/21.00
5200MHz	Pass	6.18/5.15	9.26	9.43	9.98	10.09	15.72	29.82	21.90/20.87	36.00/21.00
5240MHz	Pass	6.18/5.15	8.96	9.39	10.28	10.12	15.74	29.82	21.92/20.89	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	6.18/5.15	9.27	9.55	10.22	10.05	15.81	29.82	21.99/20.96	36.00/21.00
5230MHz	Pass	6.18/5.15	9.15	9.37	9.83	10.19	15.67	29.82	21.85/20.82	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.18/5.15	9.39	9.41	10.21	10.07	15.81	29.82	21.99/20.96	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 34

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	22.13	0.16331
802.11a_Nss1,(6Mbps)_2TX	24.56	0.28576
802.11a_Nss1,(6Mbps)_4TX	25.70	0.37154
802.11be EHT20_Nss1,(MCS0)_1TX	22.20	0.16596
802.11be EHT20_Nss2,(MCS0)_2TX	24.78	0.30061
802.11be EHT20_Nss1,(MCS0)_4TX	26.65	0.46238
802.11be EHT20_Nss4,(MCS0)_4TX	27.92	0.61944
802.11be EHT20-BF_Nss1,(MCS0)_4TX	26.23	0.41976
802.11be EHT40_Nss1,(MCS0)_1TX	20.82	0.12078
802.11be EHT40_Nss2,(MCS0)_2TX	24.02	0.25235
802.11be EHT40_Nss1,(MCS0)_4TX	25.14	0.32659
802.11be EHT40_Nss4,(MCS0)_4TX	25.57	0.36058
802.11be EHT40-BF_Nss1,(MCS0)_4TX	25.14	0.32659
802.11be EHT80_Nss1,(MCS0)_1TX	19.13	0.08185
802.11be EHT80_Nss2,(MCS0)_2TX	21.86	0.15346
802.11be EHT80_Nss1,(MCS0)_4TX	22.76	0.18880
802.11be EHT80_Nss4,(MCS0)_4TX	23.83	0.24155
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.76	0.18880
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	22.22	0.16672
802.11a_Nss1,(6Mbps)_2TX	24.82	0.30339
802.11a_Nss1,(6Mbps)_4TX	27.82	0.60534
802.11be EHT20_Nss1,(MCS0)_1TX	22.76	0.18880
802.11be EHT20_Nss2,(MCS0)_2TX	25.58	0.36141
802.11be EHT20_Nss1,(MCS0)_4TX	27.79	0.60117
802.11be EHT20_Nss4,(MCS0)_4TX	28.31	0.67764
802.11be EHT20-BF_Nss1,(MCS0)_4TX	26.37	0.43351
802.11be EHT40_Nss1,(MCS0)_1TX	21.95	0.15668
802.11be EHT40_Nss2,(MCS0)_2TX	25.12	0.32509
802.11be EHT40_Nss1,(MCS0)_4TX	27.34	0.54200
802.11be EHT40_Nss4,(MCS0)_4TX	27.49	0.56105
802.11be EHT40-BF_Nss1,(MCS0)_4TX	26.29	0.42560
802.11be EHT80_Nss1,(MCS0)_1TX	19.76	0.09462
802.11be EHT80_Nss2,(MCS0)_2TX	21.76	0.14997
802.11be EHT80_Nss1,(MCS0)_4TX	24.11	0.25763
802.11be EHT80_Nss4,(MCS0)_4TX	24.53	0.28379
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.11	0.25763

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.56	20.08				20.08	30.00
5200MHz	Pass	3.56	22.13				22.13	30.00
5240MHz	Pass	3.56	21.74				21.74	30.00
5745MHz	Pass	3.56	21.63				21.63	30.00
5785MHz	Pass	3.56	22.22				22.22	30.00
5825MHz	Pass	3.56	21.52				21.52	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.56	20.55				20.55	30.00
5200MHz	Pass	3.56	22.2				22.20	30.00
5240MHz	Pass	3.56	21.66				21.66	30.00
5745MHz	Pass	3.56	21.64				21.64	30.00
5785MHz	Pass	3.56	22.76				22.76	30.00
5825MHz	Pass	3.56	21.68				21.68	30.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.56	19.37				19.37	30.00
5230MHz	Pass	3.56	20.82				20.82	30.00
5755MHz	Pass	3.56	20.06				20.06	30.00
5795MHz	Pass	3.56	21.95				21.95	30.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.56	19.13				19.13	30.00
5775MHz	Pass	3.56	19.76				19.76	30.00
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76	18.59	19.46			22.06	30.00
5200MHz	Pass	3.76	20.61	21.54			24.11	30.00
5240MHz	Pass	3.76	21.17	21.89			24.56	30.00
5745MHz	Pass	3.76	21.19	22.35			24.82	30.00
5785MHz	Pass	3.76	21.21	22.27			24.78	30.00
5825MHz	Pass	3.76	21.12	22.08			24.64	30.00
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.66	18.88	19.96			22.46	30.00
5200MHz	Pass	3.66	21.39	22.11			24.78	30.00
5240MHz	Pass	3.66	21.33	22.04			24.71	30.00
5745MHz	Pass	3.66	21.18	22.19			24.72	30.00
5785MHz	Pass	3.66	22.07	23.02			25.58	30.00
5825MHz	Pass	3.66	21.34	22.1			24.75	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.66	17.69	18.6			21.18	30.00
5230MHz	Pass	3.66	20.6	21.39			24.02	30.00
5755MHz	Pass	3.66	19.49	20.74			23.17	30.00
5795MHz	Pass	3.66	21.44	22.69			25.12	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.66	18.53	19.15			21.86	30.00
5775MHz	Pass	3.66	18.68	18.81			21.76	30.00
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76	18.47	19.42	19.44	19.26	25.19	30.00
5200MHz	Pass	3.76	19.02	19.77	19.93	19.93	25.70	30.00
5240MHz	Pass	3.76	18.7	19.68	19.89	19.61	25.51	30.00
5745MHz	Pass	3.76	20.51	21.23	20.91	20.74	26.88	30.00
5785MHz	Pass	3.76	21.14	22.2	21.75	22.03	27.82	30.00
5825MHz	Pass	3.76	20.85	21.65	21.26	21.4	27.32	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76	18.57	19.65	19.58	19.46	25.36	30.00
5200MHz	Pass	3.76	19.49	20.24	20.5	20.31	26.17	30.00
5240MHz	Pass	3.76	20	20.85	20.85	20.78	26.65	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
5745MHz	Pass	3.76	19.96	20.86	20.68	20.39	26.51	30.00
5785MHz	Pass	3.76	20.97	21.8	21.62	21.76	27.57	30.00
5825MHz	Pass	3.76	21.31	22.1	21.82	21.83	27.79	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.76	17.13	17.77	17.66	17.91	23.65	30.00
5230MHz	Pass	3.76	18.41	19.19	19.21	19.59	25.14	30.00
5755MHz	Pass	3.76	18.24	19.46	19.19	19.23	25.07	30.00
5795MHz	Pass	3.76	20.53	21.64	21.41	21.6	27.34	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.76	16.24	16.6	17.05	17.01	22.76	30.00
5775MHz	Pass	3.76	17.94	17.96	18.31	18.15	24.11	30.00
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.54	18.96	19.82	19.92	19.68	25.63	30.00
5200MHz	Pass	3.54	19.85	20.67	20.84	20.65	26.54	30.00
5240MHz	Pass	3.54	21.29	22.02	22.12	22.11	27.92	30.00
5745MHz	Pass	3.54	21.04	21.95	21.13	21.58	27.46	30.00
5785MHz	Pass	3.54	21.35	22.81	22.32	22.53	28.31	30.00
5825MHz	Pass	3.54	21.35	21.98	21.38	21.91	27.69	30.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.54	17.35	18.2	18.13	18.3	24.03	30.00
5230MHz	Pass	3.54	18.81	19.5	19.68	20.11	25.57	30.00
5755MHz	Pass	3.54	18.7	20.07	19.61	19.81	25.60	30.00
5795MHz	Pass	3.54	20.77	21.97	21.43	21.63	27.49	30.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.54	17.12	17.86	18.01	18.19	23.83	30.00
5775MHz	Pass	3.54	18.27	18.45	18.69	18.62	24.53	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56	18.57	19.65	19.58	19.46	25.36	26.44
5200MHz	Pass	9.56	19.49	20.24	20.5	20.31	26.17	26.44
5240MHz	Pass	9.56	19.55	20.39	20.52	20.33	26.23	26.44
5745MHz	Pass	9.56	19.64	20.56	20.31	20.26	26.23	26.44
5785MHz	Pass	9.56	19.80	20.68	20.20	20.41	26.30	26.44
5825MHz	Pass	9.56	20.03	20.49	20.37	20.50	26.37	26.44
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	9.56	17.13	17.77	17.66	17.91	23.65	26.44
5230MHz	Pass	9.56	18.41	19.19	19.21	19.59	25.14	26.44
5755MHz	Pass	9.56	18.24	19.46	19.19	19.23	25.07	26.44
5795MHz	Pass	9.56	19.44	20.59	20.50	20.46	26.29	26.44
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	9.56	16.24	16.6	17.05	17.01	22.76	26.44
5775MHz	Pass	9.56	17.94	17.96	18.31	18.15	24.11	26.44

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 35

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	22.13	0.16331	25.69/19.66	0.37068/0.092470
802.11be EHT20_Nss1,(MCS0)_1TX	22.20	0.16596	25.76/19.73	0.37670/0.093972
802.11be EHT40_Nss1,(MCS0)_1TX	20.82	0.12078	24.38/18.35	0.27416/0.068391
802.11be EHT80_Nss1,(MCS0)_1TX	19.13	0.08185	22.69/16.66	0.18578/0.046345



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.56/-2.47	20.08	20.08	30.00	23.64/17.61	36.00/21.00
5200MHz	Pass	3.56/-2.47	22.13	22.13	30.00	25.69/19.66	36.00/21.00
5240MHz	Pass	3.56/-2.47	21.74	21.74	30.00	25.30/19.27	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.56/-2.47	20.55	20.55	30.00	24.11/18.08	36.00/21.00
5200MHz	Pass	3.56/-2.47	22.20	22.20	30.00	25.76/19.73	36.00/21.00
5240MHz	Pass	3.56/-2.47	21.66	21.66	30.00	25.22/19.19	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	3.56/-2.47	19.37	19.37	30.00	22.93/16.90	36.00/21.00
5230MHz	Pass	3.56/-2.47	20.82	20.82	30.00	24.38/18.35	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.56/-2.47	19.13	19.13	30.00	22.69/16.66	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.36

Test Mode: Mode 36

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.20	0.16596	25.96/20.86	0.39446/0.121899



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/-1.34	18.59	19.46	22.06	30.00	25.82/20.72	36.00/21.00
5200MHz	Pass	3.76/-1.34	18.63	19.69	22.20	30.00	25.96/20.86	36.00/21.00
5240MHz	Pass	3.76/-1.34	18.82	19.43	22.15	30.00	25.91/20.81	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 37

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.85	0.19275	26.51/20.98	0.44771/0.125314
802.11be EHT40_Nss2,(MCS0)_2TX	22.69	0.18578	26.35/20.82	0.43152/0.120781
802.11be EHT80_Nss2,(MCS0)_2TX	21.86	0.15346	25.52/19.99	0.35645/0.099770

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.66/-1.87	18.88	19.96	22.46	30.00	26.12/20.59	36.00/21.00
5200MHz	Pass	3.66/-1.87	19.32	19.98	22.67	30.00	26.33/20.80	36.00/21.00
5240MHz	Pass	3.66/-1.87	19.46	20.18	22.85	30.00	26.51/20.98	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.66/-1.87	17.69	18.6	21.18	30.00	24.84/19.31	36.00/21.00
5230MHz	Pass	3.66/-1.87	19.32	20.01	22.69	30.00	26.35/20.82	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.66/-1.87	18.53	19.15	21.86	30.00	25.52/19.99	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 38

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	20.08	0.10186	23.84/20.84	0.24210/0.121339
802.11be EHT20_Nss1,(MCS0)_4TX	20.21	0.10495	23.97/20.97	0.24946/0.125026
802.11be EHT20-BF_Nss1,(MCS0)_4TX	15.86	0.03855	25.42/20.96	0.34834/0.124738
802.11be EHT40_Nss1,(MCS0)_4TX	20.09	0.10209	23.85/20.85	0.24266/0.121619
802.11be EHT40-BF_Nss1,(MCS0)_4TX	15.78	0.03784	25.34/20.88	0.34198/0.122462
802.11be EHT80_Nss1,(MCS0)_4TX	20.19	0.10447	23.95/20.95	0.24831/0.124451
802.11be EHT80-BF_Nss1,(MCS0)_4TX	15.71	0.03724	25.27/20.81	0.33651/0.120504

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/0.76	13.62	14.13	14.06	14.17	20.02	30.00	23.78/20.78	36.00/21.00
5200MHz	Pass	3.76/0.76	13.56	14.22	14.39	14.03	20.08	30.00	23.84/20.84	36.00/21.00
5240MHz	Pass	3.76/0.76	13.42	14.18	14.07	14.22	20.00	30.00	23.76/20.76	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/0.76	13.63	14.19	14.23	14.38	20.14	30.00	23.90/20.90	36.00/21.00
5200MHz	Pass	3.76/0.76	13.57	14.45	14.28	14.41	20.21	30.00	23.97/20.97	36.00/21.00
5240MHz	Pass	3.76/0.76	13.49	14.32	14.23	14.27	20.11	30.00	23.87/20.87	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.76/0.76	13.61	14.14	14.16	14.28	20.08	30.00	23.84/20.84	36.00/21.00
5230MHz	Pass	3.76/0.76	13.66	13.98	14.23	14.38	20.09	30.00	23.85/20.85	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.76/0.76	13.79	14.16	14.33	14.36	20.19	30.00	23.95/20.95	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56/5.10	9.02	10.03	9.95	10.06	15.81	26.44	25.37/20.91	36.00/21.00
5200MHz	Pass	9.56/5.10	9.19	10.02	10.17	9.93	15.86	26.44	25.42/20.96	36.00/21.00
5240MHz	Pass	9.56/5.10	9.39	9.71	9.96	9.98	15.79	26.44	25.35/20.89	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	9.56/5.10	9.47	9.94	9.71	9.83	15.76	26.44	25.32/20.86	36.00/21.00
5230MHz	Pass	9.56/5.10	9.41	9.88	9.96	9.77	15.78	26.44	25.34/20.88	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	9.56/5.10	9.59	9.41	10.01	9.71	15.71	26.44	25.27/20.81	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 39

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	21.81	0.15171	25.35/20.97	0.34277/0.125026
802.11be EHT40_Nss4,(MCS0)_4TX	21.65	0.14622	25.19/20.81	0.33037/0.120504
802.11be EHT80_Nss4,(MCS0)_4TX	21.74	0.14928	25.28/20.90	0.33729/0.123027

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.54/-0.84	15.33	15.91	15.81	15.97	21.78	30.00	25.32/20.94	36.00/21.00
5200MHz	Pass	3.54/-0.84	15.43	15.92	15.82	15.96	21.81	30.00	25.35/20.97	36.00/21.00
5240MHz	Pass	3.54/-0.84	15.24	15.97	15.83	15.98	21.79	30.00	25.33/20.95	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.54/-0.84	15.34	15.83	15.44	15.88	21.65	30.00	25.19/20.81	36.00/21.00
5230MHz	Pass	3.54/-0.84	15.37	15.76	15.41	15.81	21.61	30.00	25.15/20.77	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.54/-0.84	15.56	15.61	15.77	15.93	21.74	30.00	25.28/20.90	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 40

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	18.88	0.07727	22.44/20.80	0.17539/0.120226
802.11be EHT20_Nss1,(MCS0)_1TX	18.91	0.07780	22.47/20.83	0.17660/0.121060
802.11be EHT40_Nss1,(MCS0)_1TX	18.99	0.07925	22.55/20.91	0.17989/0.123310
802.11be EHT80_Nss1,(MCS0)_1TX	18.92	0.07798	22.48/20.84	0.17701/0.121339



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.56/1.92	18.88	18.88	30.00	22.44/20.80	36.00/21.00
5200MHz	Pass	3.56/1.92	18.84	18.84	30.00	22.40/20.76	36.00/21.00
5240MHz	Pass	3.56/1.92	18.84	18.84	30.00	22.40/20.76	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5180MHz	Pass	3.56/1.92	18.88	18.88	30.00	22.44/20.80	36.00/21.00
5200MHz	Pass	3.56/1.92	18.91	18.91	30.00	22.47/20.83	36.00/21.00
5240MHz	Pass	3.56/1.92	18.91	18.91	30.00	22.47/20.83	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5190MHz	Pass	3.56/1.92	18.88	18.88	30.00	22.44/20.80	36.00/21.00
5230MHz	Pass	3.56/1.92	18.99	18.99	30.00	22.55/20.91	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.56/1.92	18.92	18.92	30.00	22.48/20.84	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.41

Test Mode: Mode 41

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.75	0.07499	22.51/20.90	0.17824/0.123027



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/2.15	15.24	15.98	18.64	30.00	22.40/20.79	36.00/21.00
5200MHz	Pass	3.76/2.15	15.31	16.13	18.75	30.00	22.51/20.90	36.00/21.00
5240MHz	Pass	3.76/2.15	15.26	16.09	18.71	30.00	22.47/20.86	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 42

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	18.90	0.07762	22.56/20.94	0.18030/0.124165
802.11be EHT40_Nss2,(MCS0)_2TX	18.89	0.07745	22.55/20.93	0.17989/0.123880
802.11be EHT80_Nss2,(MCS0)_2TX	18.79	0.07568	22.45/20.83	0.17579/0.121060



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.66/2.04	15.57	16.19	18.90	30.00	22.56/20.94	36.00/21.00
5200MHz	Pass	3.66/2.04	15.49	16.10	18.82	30.00	22.48/20.86	36.00/21.00
5240MHz	Pass	3.66/2.04	15.46	16.27	18.89	30.00	22.55/20.93	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.66/2.04	15.49	16.12	18.83	30.00	22.49/20.87	36.00/21.00
5230MHz	Pass	3.66/2.04	15.62	16.12	18.89	30.00	22.55/20.93	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.66/2.04	15.53	16.02	18.79	30.00	22.45/20.83	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 43

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.45	0.06998	22.21/20.89	0.16634/0.122744
802.11be EHT20_Nss1,(MCS0)_4TX	18.48	0.07047	22.24/20.92	0.16749/0.123595
802.11be EHT20-BF_Nss1,(MCS0)_4TX	13.01	0.02000	22.57/20.86	0.18072/0.121899
802.11be EHT40_Nss1,(MCS0)_4TX	18.50	0.07079	22.26/20.94	0.16827/0.124165
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.12	0.02051	22.68/20.97	0.18535/0.125026
802.11be EHT80_Nss1,(MCS0)_4TX	18.46	0.07015	22.22/20.90	0.16672/0.123027
802.11be EHT80-BF_Nss1,(MCS0)_4TX	12.96	0.01977	22.52/20.81	0.17865/0.120504

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/2.44	11.97	12.19	12.76	12.35	18.35	30.00	22.11/20.79	36.00/21.00
5200MHz	Pass	3.76/2.44	11.74	12.29	12.78	12.28	18.31	30.00	22.07/20.75	36.00/21.00
5240MHz	Pass	3.76/2.44	11.83	12.40	12.80	12.62	18.45	30.00	22.21/20.89	36.00/21.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.76/2.44	11.66	12.21	12.74	12.47	18.31	30.00	22.07/20.75	36.00/21.00
5200MHz	Pass	3.76/2.44	12.00	12.33	12.70	12.77	18.48	30.00	22.24/20.92	36.00/21.00
5240MHz	Pass	3.76/2.44	11.73	12.17	12.63	12.66	18.33	30.00	22.09/20.77	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.76/2.44	11.95	12.37	12.73	12.80	18.50	30.00	22.26/20.94	36.00/21.00
5230MHz	Pass	3.76/2.44	11.83	12.24	12.61	12.72	18.38	30.00	22.14/20.82	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.76/2.44	11.81	12.19	12.75	12.91	18.46	30.00	22.22/20.90	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56/7.85	6.29	6.75	7.54	6.95	12.93	26.44	22.49/20.78	36.00/21.00
5200MHz	Pass	9.56/7.85	6.76	6.83	7.58	5.99	12.85	26.44	22.41/20.70	36.00/21.00
5240MHz	Pass	9.56/7.85	6.38	6.81	7.45	7.23	13.01	26.44	22.57/20.86	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	9.56/7.85	6.58	6.87	7.63	7.26	13.12	26.44	22.68/20.97	36.00/21.00
5230MHz	Pass	9.56/7.85	6.76	6.92	7.02	7.53	13.09	26.44	22.65/20.94	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	9.56/7.85	5.83	6.69	7.35	7.68	12.96	26.44	22.52/20.81	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 44

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP/ EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	19.13	0.08185	22.67/20.98	0.18493/0.125314
802.11be EHT40_Nss4,(MCS0)_4TX	19.12	0.08166	22.66/20.97	0.18450/0.125026
802.11be EHT80_Nss4,(MCS0)_4TX	18.99	0.07925	22.53/20.84	0.17906/0.121339

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP/ EIRP [Phi 30°] (dBm)	EIRP Limit/ EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.54/1.85	12.45	12.81	13.34	13.34	19.02	30.00	22.56/20.87	36.00/21.00
5200MHz	Pass	3.54/1.85	12.42	12.89	13.35	13.43	19.06	30.00	22.60/20.91	36.00/21.00
5240MHz	Pass	3.54/1.85	12.63	13.19	13.22	13.36	19.13	30.00	22.67/20.98	36.00/21.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.54/1.85	12.33	12.73	13.26	13.24	18.93	30.00	22.47/20.78	36.00/21.00
5230MHz	Pass	3.54/1.85	12.58	12.89	13.41	13.44	19.12	30.00	22.66/20.97	36.00/21.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.54/1.85	12.35	12.76	13.26	13.43	18.99	30.00	22.53/20.84	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 45

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	24.29	0.26853
802.11be EHT20_Nss2,(MCS0)_2TX	25.93	0.39174
802.11be EHT40_Nss2,(MCS0)_2TX	22.25	0.16788
802.11be EHT80_Nss2,(MCS0)_2TX	20.15	0.10351
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	27.88	0.61376
802.11be EHT20_Nss2,(MCS0)_2TX	28.05	0.63826
802.11be EHT40_Nss2,(MCS0)_2TX	25.85	0.38459
802.11be EHT80_Nss2,(MCS0)_2TX	24.78	0.30061

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.10	17.76	18.07	20.93	27.90
5200MHz	Pass	8.10	21.11	21.32	24.23	27.90
5240MHz	Pass	8.10	21.16	21.39	24.29	27.90
5745MHz	Pass	8.10	24.76	24.50	27.64	27.90
5785MHz	Pass	8.10	25.01	24.72	27.88	27.90
5825MHz	Pass	8.10	24.86	24.86	27.87	27.90
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.86	17.23	17.59	20.42	28.14
5200MHz	Pass	7.86	20.86	21.38	24.14	28.14
5240MHz	Pass	7.86	22.70	23.13	25.93	28.14
5745MHz	Pass	7.86	24.28	24.18	27.24	28.14
5785MHz	Pass	7.86	25.10	24.98	28.05	28.14
5825MHz	Pass	7.86	25.19	24.87	28.04	28.14
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.86	17.24	17.77	20.52	28.14
5230MHz	Pass	7.86	18.96	19.50	22.25	28.14
5755MHz	Pass	7.86	20.49	20.41	23.46	28.14
5795MHz	Pass	7.86	22.48	23.17	25.85	28.14
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.86	16.81	17.45	20.15	28.14
5775MHz	Pass	7.86	21.33	22.16	24.78	28.14

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Average Power

Appendix C.46

Test Mode: Mode 46

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.27	0.04236	24.37/20.97	0.27353/0.125026



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.10/4.70	13.36	13.12	16.25	27.90	24.35/20.95	36.00/21.00
5200MHz	Pass	8.10/4.70	13.48	13.03	16.27	27.90	24.37/20.97	36.00/21.00
5240MHz	Pass	8.10/4.70	13.42	12.97	16.21	27.90	24.31/20.91	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 47

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.67	0.04645	24.53/20.98	0.28379/0.125314
802.11be EHT40_Nss2,(MCS0)_2TX	16.54	0.04508	24.40/20.85	0.27542/0.121619
802.11be EHT80_Nss2,(MCS0)_2TX	16.50	0.04467	24.36/20.81	0.27290/0.120504



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.86/4.31	13.94	13.28	16.63	28.14	24.49/20.94	36.00/21.00
5200MHz	Pass	7.86/4.31	14.07	13.21	16.67	28.14	24.53/20.98	36.00/21.00
5240MHz	Pass	7.86/4.31	13.75	13.25	16.52	28.14	24.38/20.83	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.86/4.31	13.87	13.06	16.49	28.14	24.35/20.80	36.00/21.00
5230MHz	Pass	7.86/4.31	13.89	13.14	16.54	28.14	24.40/20.85	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.86/4.31	13.69	13.28	16.50	28.14	24.36/20.81	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power

Appendix C.48

Test Mode: Mode 48

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP / EIRP [Phi 30°] (dBm)	EIRP / EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	14.27	0.02673	22.37/20.78	0.17258/0.119674



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP / EIRP [Phi 30°] (dBm)	EIRP Limit / EIRP Limit [Phi 30°] (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.10/6.51	11.28	11.17	14.24	27.90	22.34/20.75	36.00/21.00
5200MHz	Pass	8.10/6.51	11.14	11.37	14.27	27.90	22.37/20.78	36.00/21.00
5240MHz	Pass	8.10/6.51	11.24	11.27	14.27	27.90	22.37/20.78	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 49

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP / EIRP [Phi 30°] (dBm)	EIRP / EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	14.63	0.02904	22.49/20.87	0.17742/0.122180
802.11be EHT40_Nss2,(MCS0)_2TX	14.57	0.02864	22.43/20.81	0.17498/0.120504
802.11be EHT80_Nss2,(MCS0)_2TX	14.51	0.02825	22.37/20.75	0.17258/0.118850

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP / EIRP [Phi 30°] (dBm)	EIRP Limit / EIRP Limit [Phi 30°] (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.86/6.24	11.57	11.66	14.63	28.14	22.49/20.87	36.00/21.00
5200MHz	Pass	7.86/6.24	11.49	11.61	14.56	28.14	22.42/20.80	36.00/21.00
5240MHz	Pass	7.86/6.24	11.41	11.65	14.54	28.14	22.40/20.78	36.00/21.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.86/6.24	11.38	11.74	14.57	28.14	22.43/20.81	36.00/21.00
5230MHz	Pass	7.86/6.24	11.46	11.64	14.56	28.14	22.42/20.80	36.00/21.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.86/6.24	11.37	11.63	14.51	28.14	22.37/20.75	36.00/21.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

Test Mode: Mode 1

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	11.29
802.11a_Nss1,(6Mbps)_2TX	12.49
802.11a_Nss1,(6Mbps)_4TX	9.40
802.11be EHT20_Nss1,(MCS0)_1TX	10.47
802.11be EHT20_Nss2,(MCS0)_2TX	11.13
802.11be EHT20_Nss1,(MCS0)_4TX	9.34
802.11be EHT20_Nss4,(MCS0)_4TX	14.51
802.11be EHT40_Nss1,(MCS0)_1TX	5.49
802.11be EHT40_Nss2,(MCS0)_2TX	5.94
802.11be EHT40_Nss1,(MCS0)_4TX	9.27
802.11be EHT40_Nss4,(MCS0)_4TX	7.56
802.11be EHT80_Nss1,(MCS0)_1TX	-0.28
802.11be EHT80_Nss2,(MCS0)_2TX	0.45
802.11be EHT80_Nss1,(MCS0)_4TX	3.48
802.11be EHT80_Nss4,(MCS0)_4TX	-1.03

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58	9.47				9.47	15.42
5200MHz	Pass	7.58	11.29				11.29	15.42
5240MHz	Pass	7.58	9.61				9.61	15.42
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.58	7.92				7.92	15.42
5200MHz	Pass	7.58	10.47				10.47	15.42
5240MHz	Pass	7.58	8.11				8.11	15.42
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.58	3.51				3.51	15.42
5230MHz	Pass	7.58	5.49				5.49	15.42
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.58	-0.28				-0.28	15.42
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	10.44	6.85	6.82			9.77	12.56
5200MHz	Pass	10.44	9.36	9.54			12.29	12.56
5240MHz	Pass	10.44	9.61	9.97			12.49	12.56
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.43	5.69	6.06			8.72	15.57
5200MHz	Pass	7.43	7.74	8.15			10.83	15.57
5240MHz	Pass	7.43	8.25	8.31			11.13	15.57
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.43	1.06	1.10			4.01	15.57
5230MHz	Pass	7.43	2.99	2.92			5.94	15.57
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.43	-2.51	-2.31			0.45	15.57
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53	3.12	3.68	3.65	3.76	9.36	9.47
5200MHz	Pass	13.53	3.12	3.66	3.21	4.09	9.25	9.47
5240MHz	Pass	13.53	3.43	3.42	3.75	3.77	9.40	9.47
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53	3.33	3.50	3.48	3.61	9.34	9.47
5200MHz	Pass	13.53	2.91	3.22	3.15	3.60	9.19	9.47
5240MHz	Pass	13.53	3.09	3.18	3.01	3.92	9.23	9.47
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	13.53	0.66	0.69	0.39	0.49	6.37	9.47
5230MHz	Pass	13.53	3.37	3.25	3.25	3.49	9.27	9.47
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	13.53	-2.87	-2.58	-2.35	-2.08	3.48	9.47
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.51	4.42	4.74	4.91	5.03	10.68	15.49
5200MHz	Pass	7.51	7.45	7.56	7.61	7.68	13.49	15.49
5240MHz	Pass	7.51	8.30	8.45	8.89	8.75	14.51	15.49
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.51	-1.69	-1.48	-1.98	-1.36	4.30	15.49
5230MHz	Pass	7.51	1.68	1.71	1.39	1.80	7.56	15.49
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.51	-7.59	-6.97	-7.16	-6.22	-1.03	15.49

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

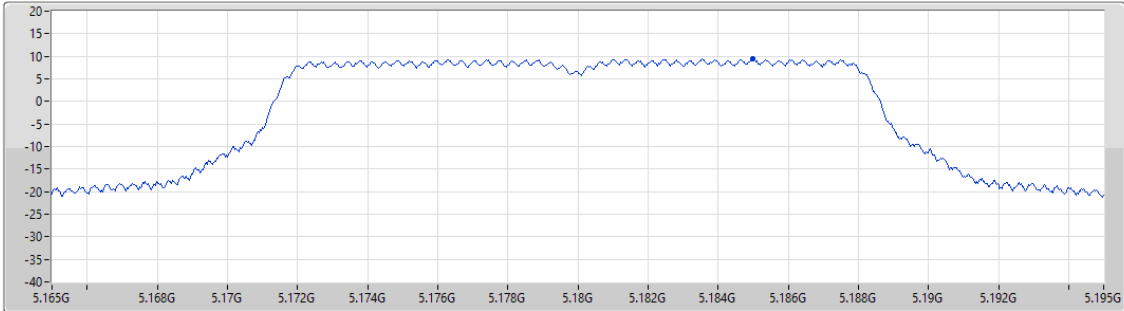

Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.47	9.47	9.47


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

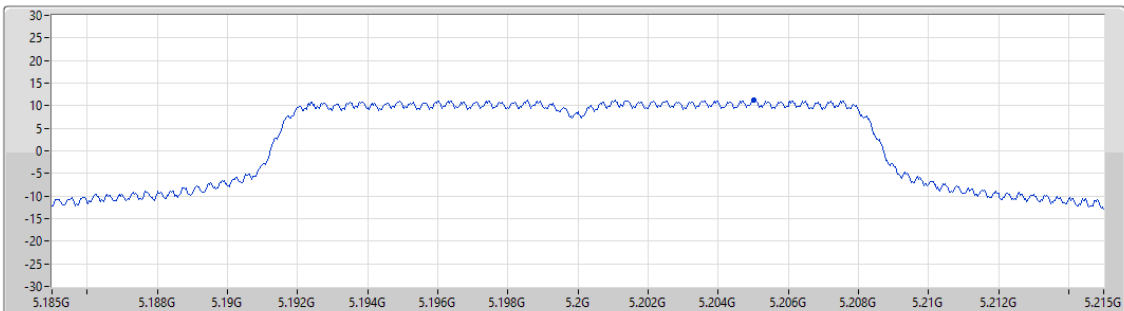

Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
11.29	11.29	11.29

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

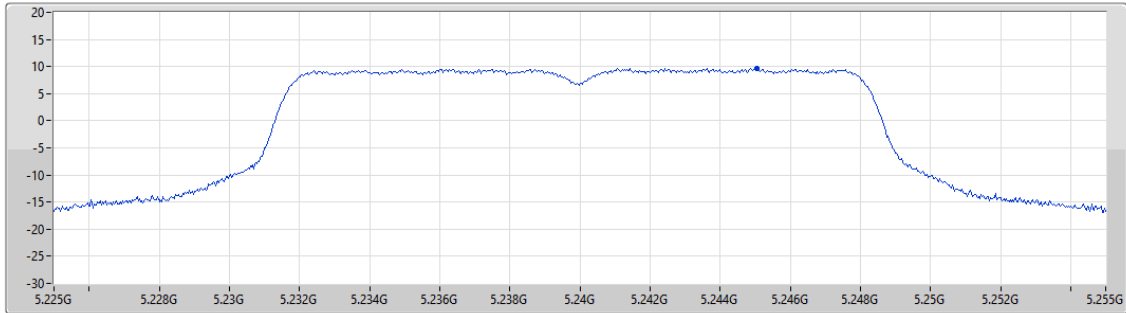

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.61	9.61	9.61

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

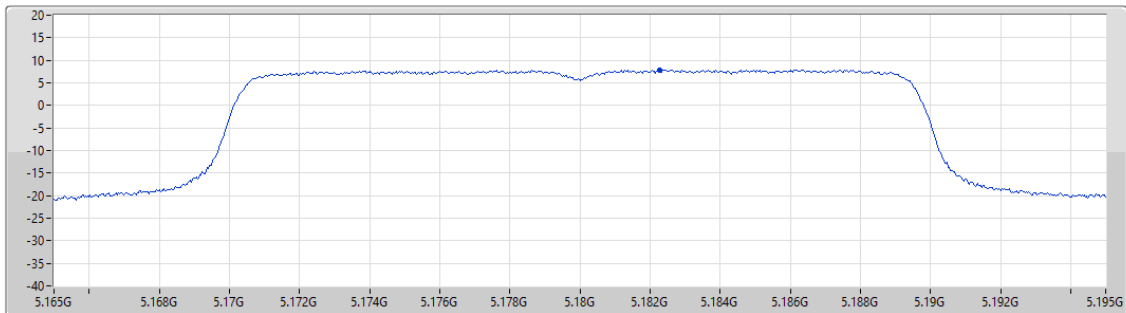

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.92	7.92	7.92


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

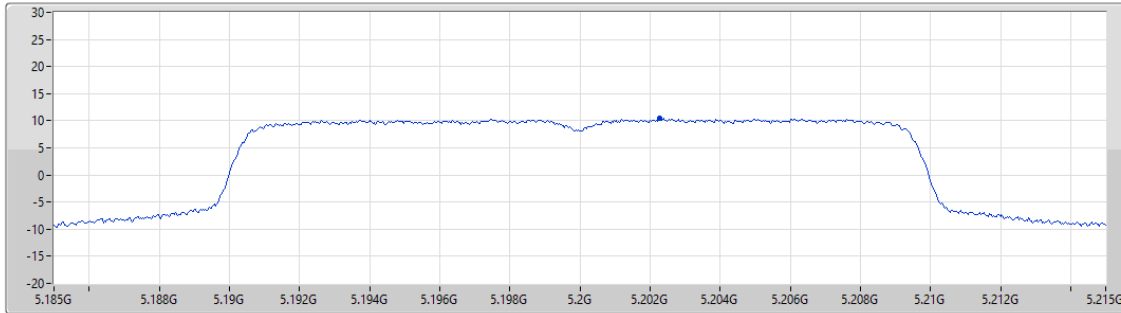

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.47	10.47	10.47


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

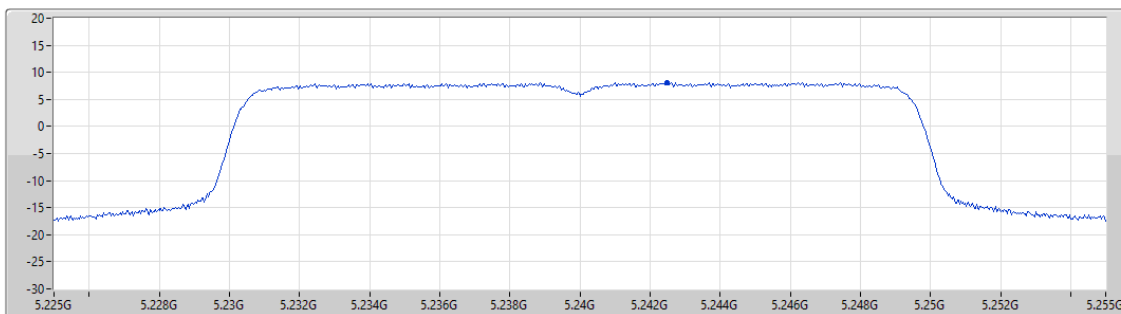

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.11	8.11	8.11


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5190MHz

20/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

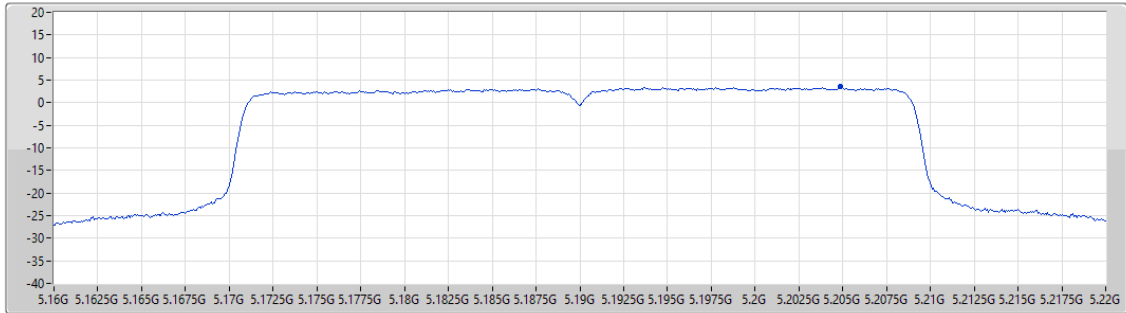


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5230MHz

20/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

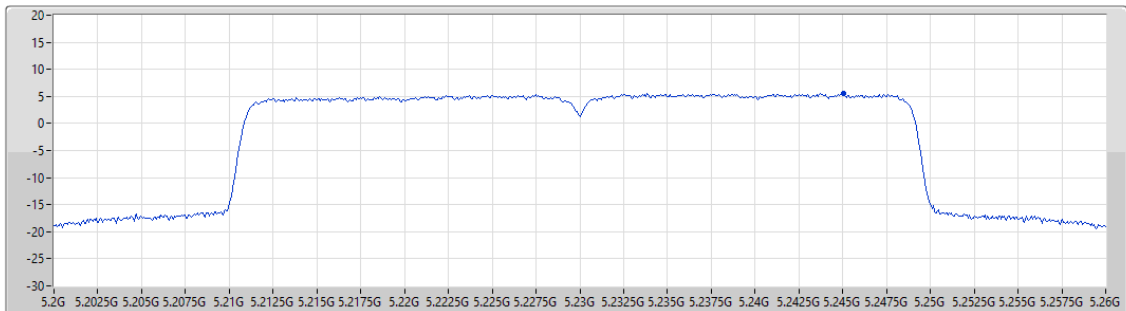

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5210MHz

20/09/2025

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

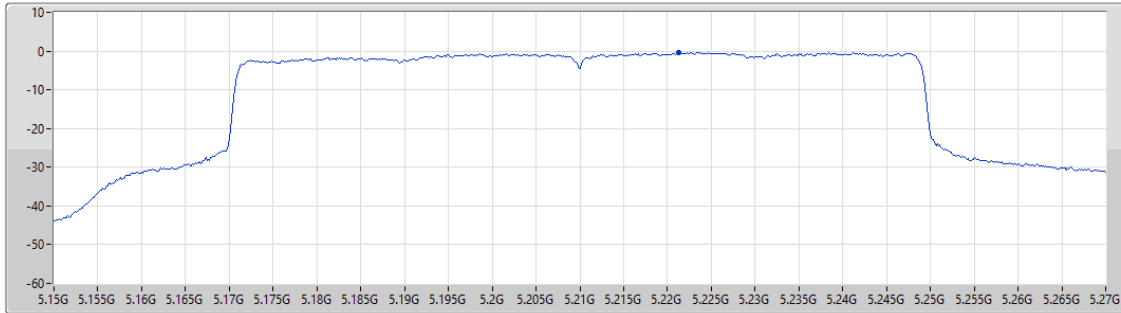

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.28	-0.28	-0.28

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

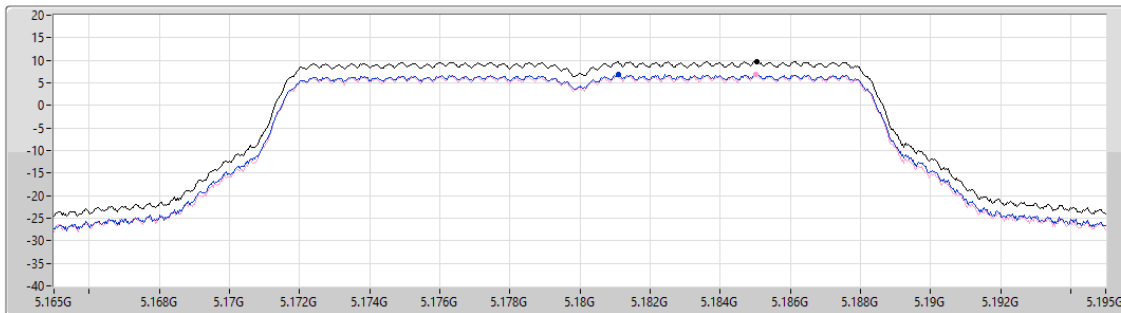Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.77	9.77	6.85	6.82


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

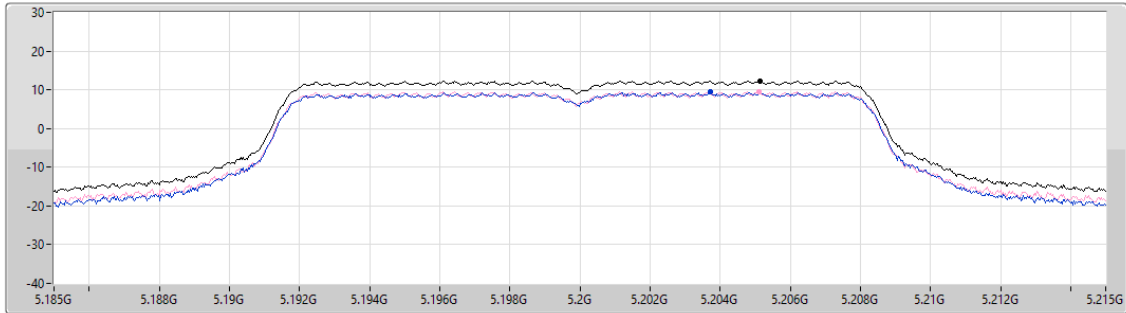

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.29	12.29	9.36	9.54


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

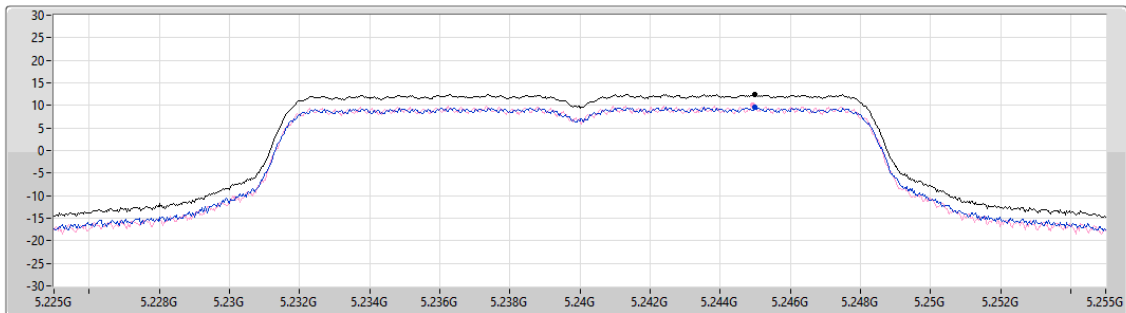

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.49	12.49	9.61	9.97


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

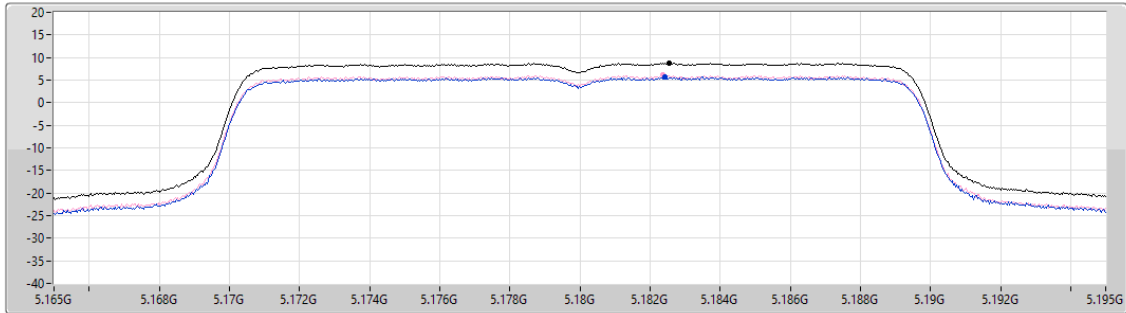

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.72	8.72	5.69	6.06

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

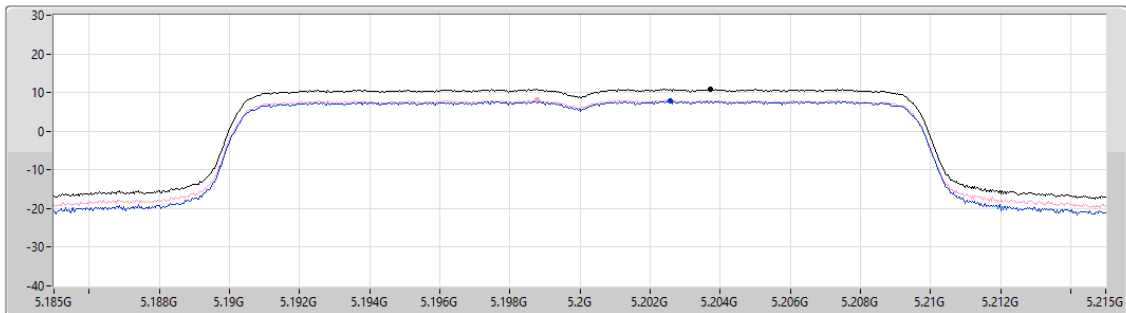

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.83	10.83	7.74	8.15

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

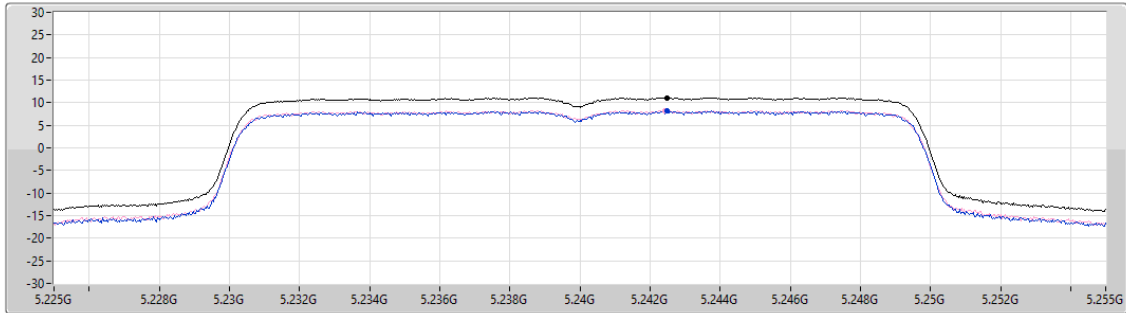

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.13	11.13	8.25	8.31

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

20/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

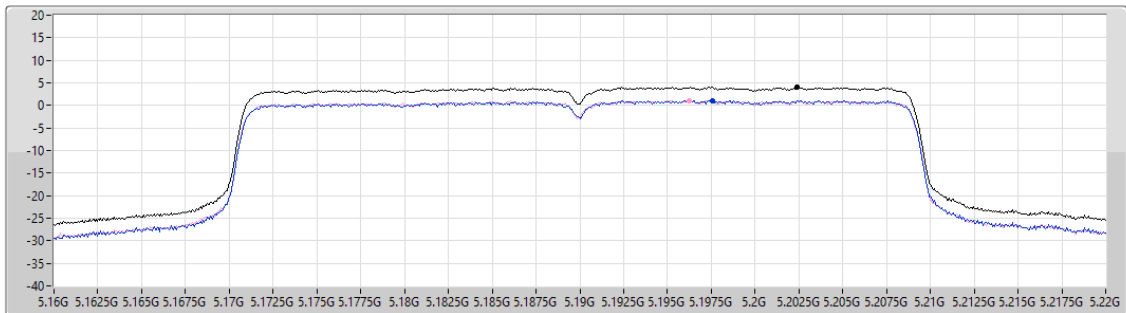

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.01	4.01	1.06	1.10

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

20/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

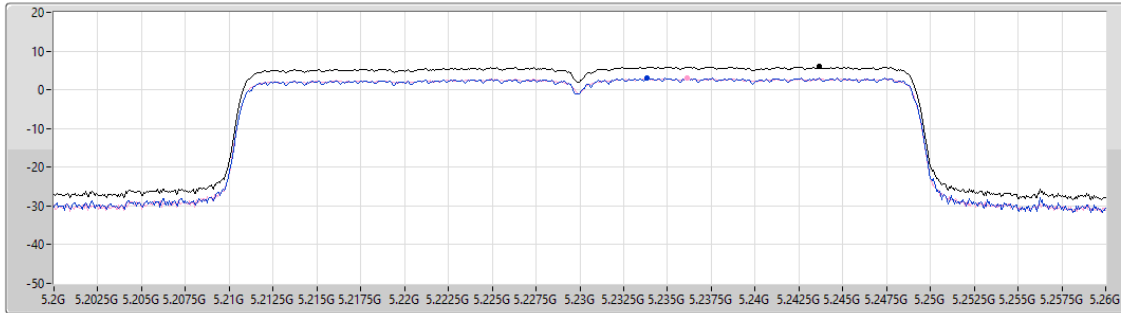

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
5.94	5.94	2.99	2.92

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

20/09/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

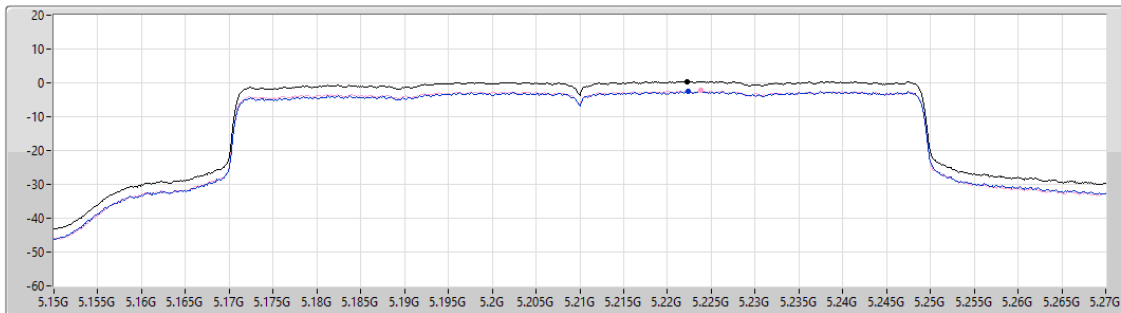

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
0.45	0.45	-2.51	-2.31

Sum
Port 1
Port 2

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

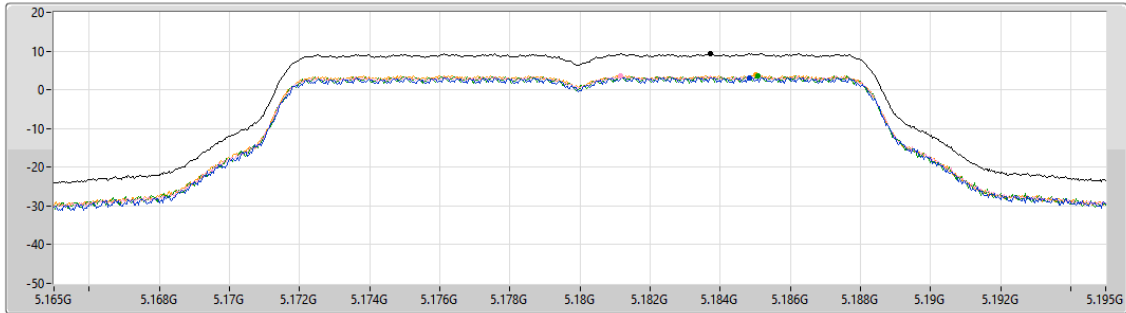

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.36	9.36	3.12	3.68	3.65	3.76

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

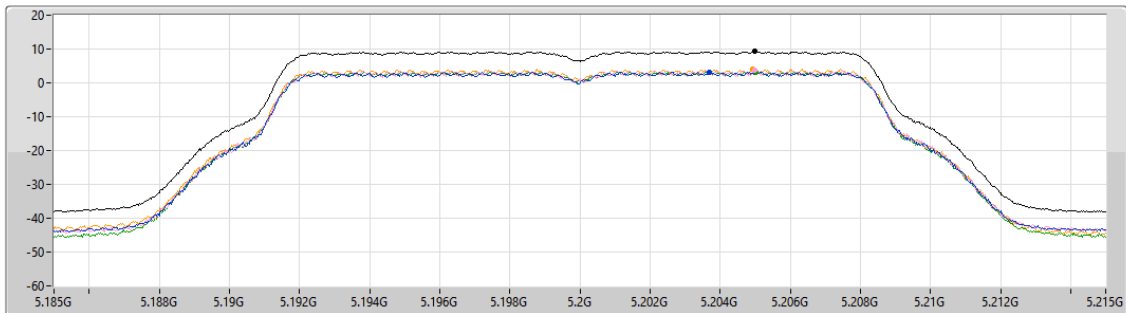

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.25	9.25	3.12	3.66	3.21	4.09


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

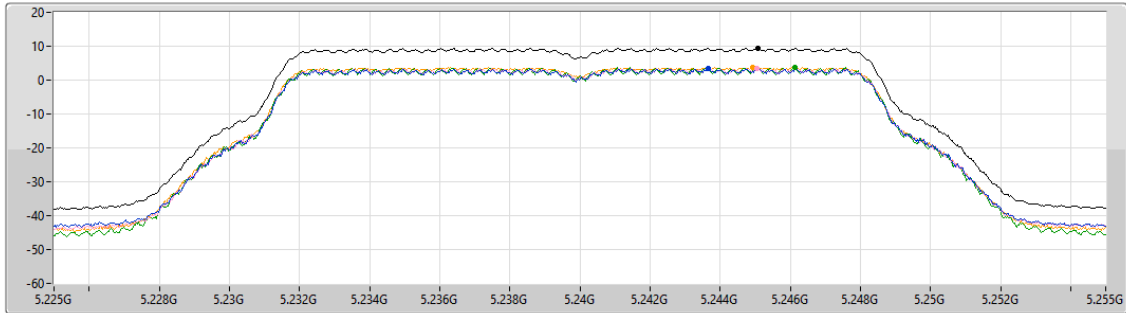

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.40	9.40	3.43	3.42	3.75	3.77

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

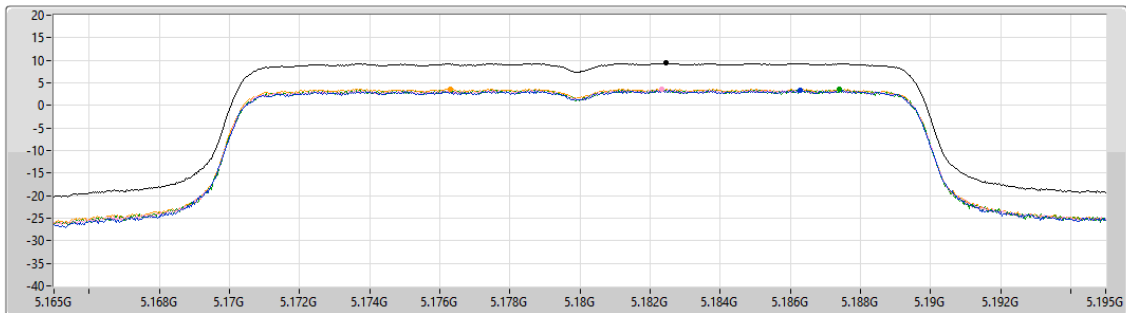

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.34	9.34	3.33	3.50	3.48	3.61

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

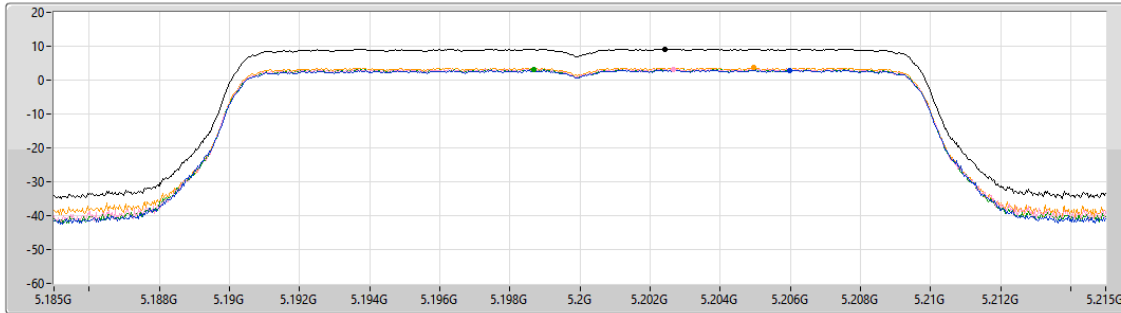

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.19	9.19	2.91	3.22	3.15	3.60


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5240MHz

20/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

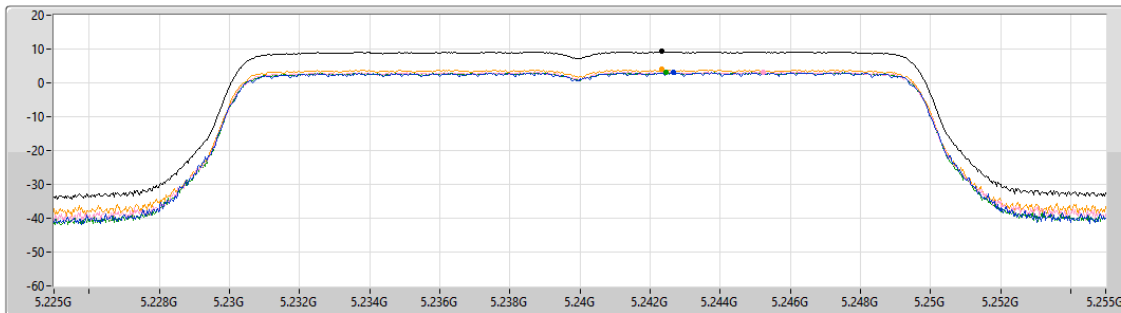

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.23	9.23	3.09	3.18	3.01	3.92


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5190MHz

20/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

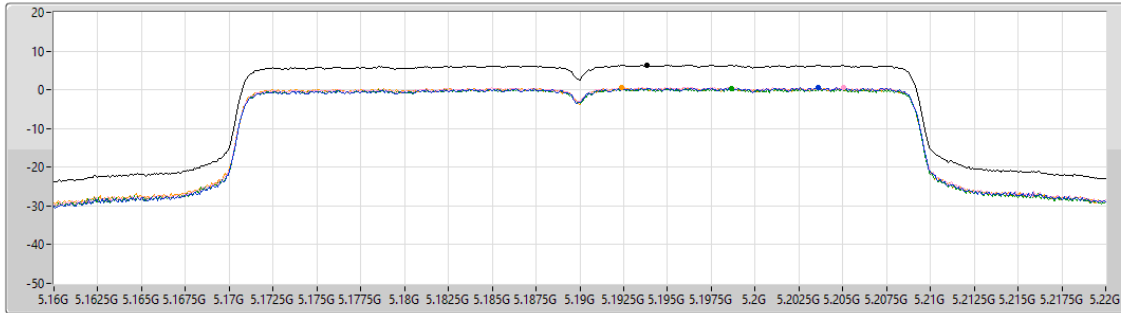

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
6.37	6.37	0.66	0.69	0.39	0.49


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

20/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

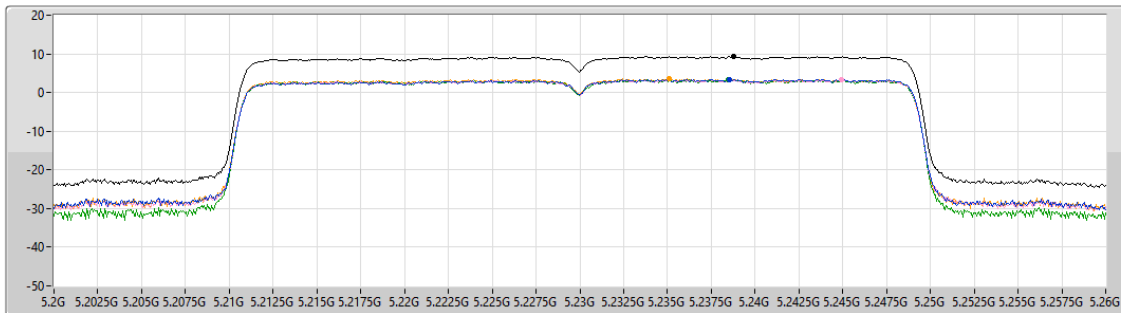

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.27	9.27	3.37	3.25	3.25	3.49


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

20/09/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

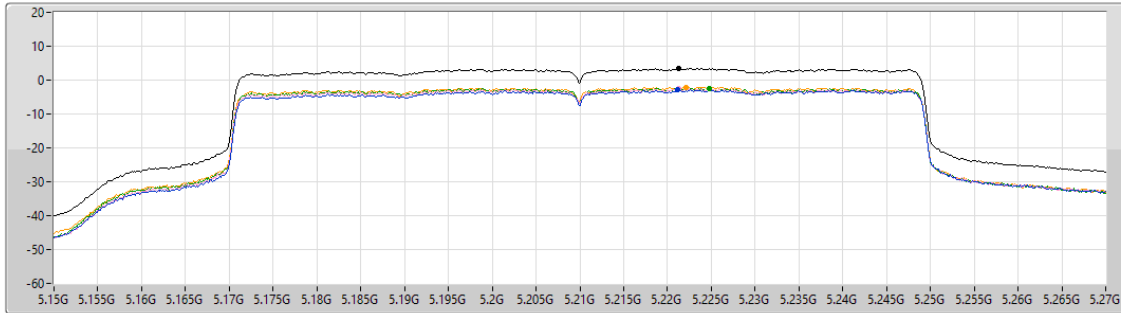

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.48	3.48	-2.87	-2.58	-2.35	-2.08


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

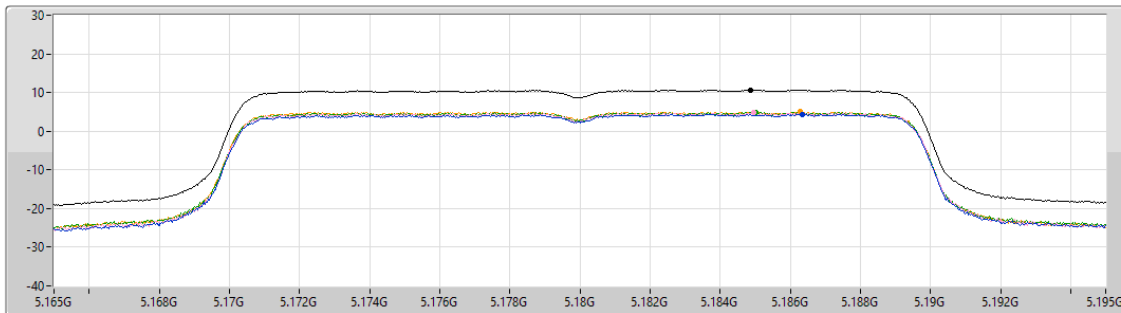


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.68	10.68	4.42	4.74	4.91	5.03

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

20/09/2025

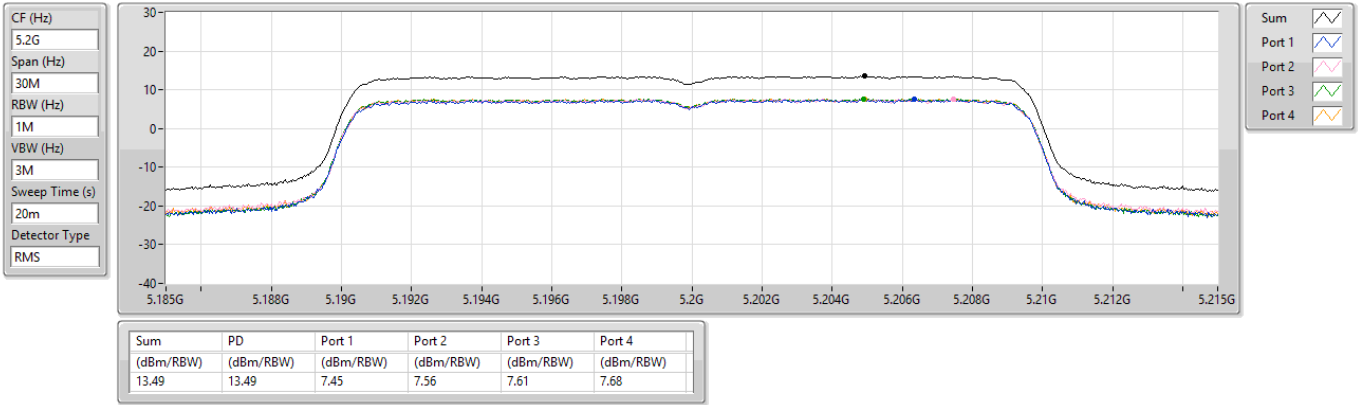


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

20/09/2025

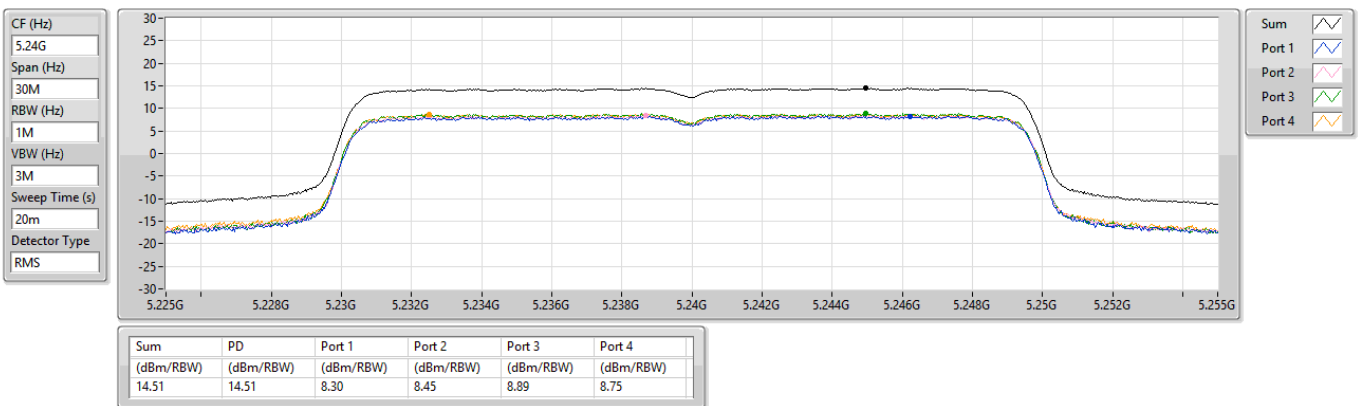


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5190MHz

20/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

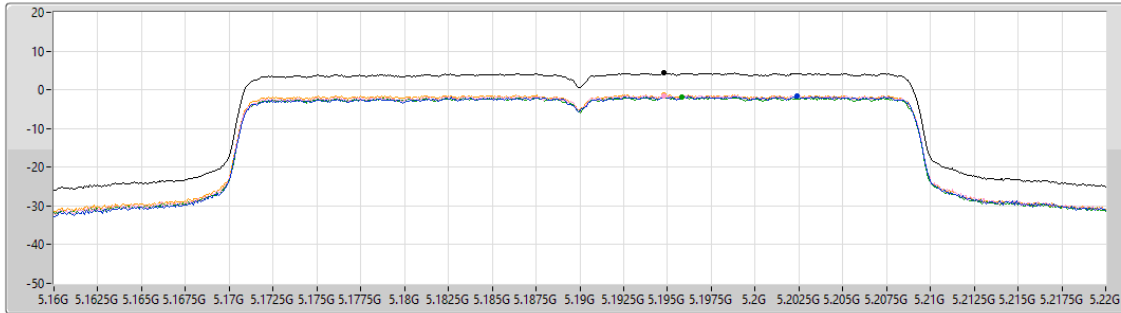

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.30	4.30	-1.69	-1.48	-1.98	-1.36


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

20/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

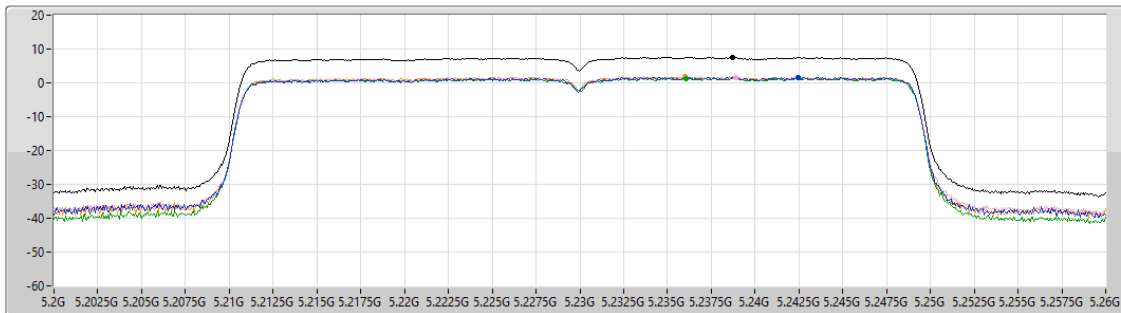


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.56	7.56	1.68	1.71	1.39	1.80

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

20/09/2025

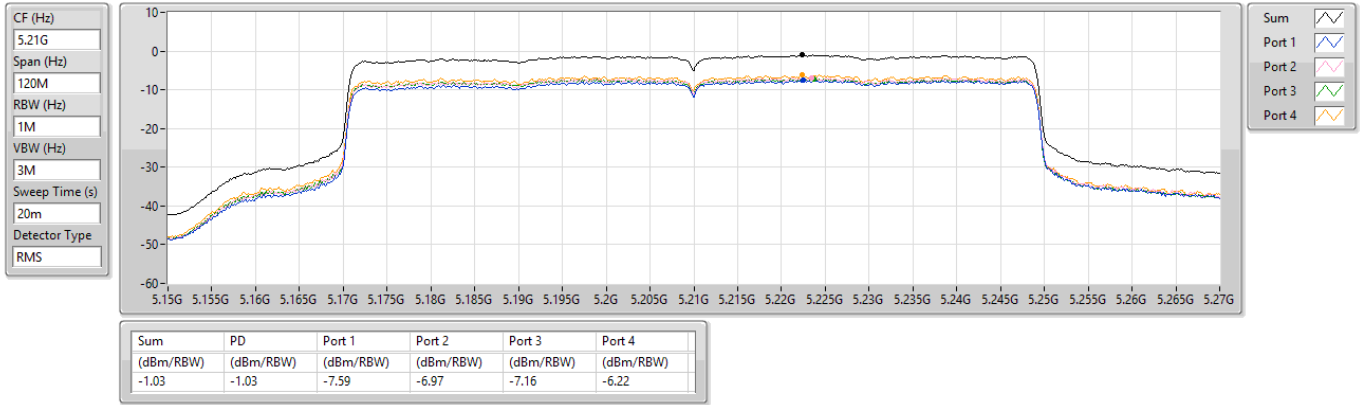

Test Mode: Mode 2

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	3.14
802.11be EHT20_Nss1,(MCS0)_1TX	2.27
802.11be EHT40_Nss1,(MCS0)_1TX	-0.47
802.11be EHT80_Nss1,(MCS0)_1TX	-3.52

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	7.58	3.10	3.10	15.42
5200MHz	Pass	7.58	3.07	3.07	15.42
5240MHz	Pass	7.58	3.14	3.14	15.42
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	7.58	2.15	2.15	15.42
5200MHz	Pass	7.58	2.27	2.27	15.42
5240MHz	Pass	7.58	2.24	2.24	15.42
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	7.58	-0.47	-0.47	15.42
5230MHz	Pass	7.58	-0.48	-0.48	15.42
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	7.58	-3.52	-3.52	15.42

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

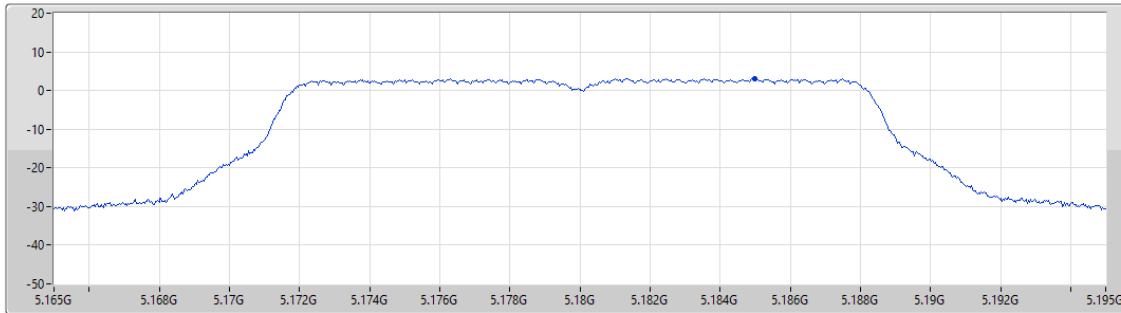


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5200MHz

02/10/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

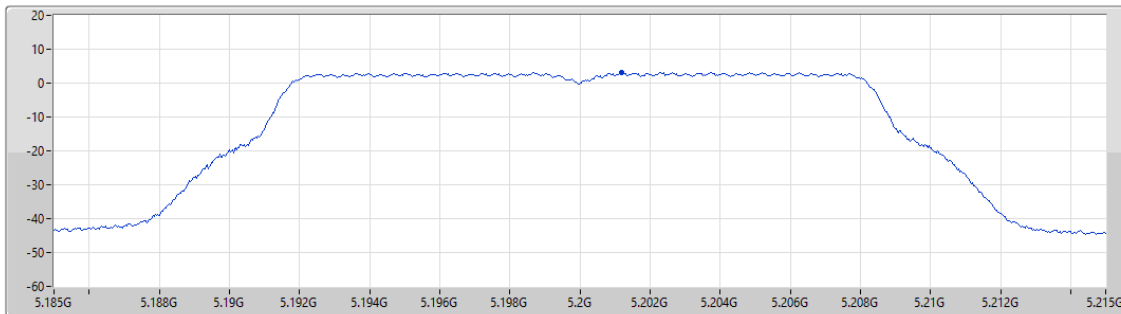


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5240MHz

02/10/2025

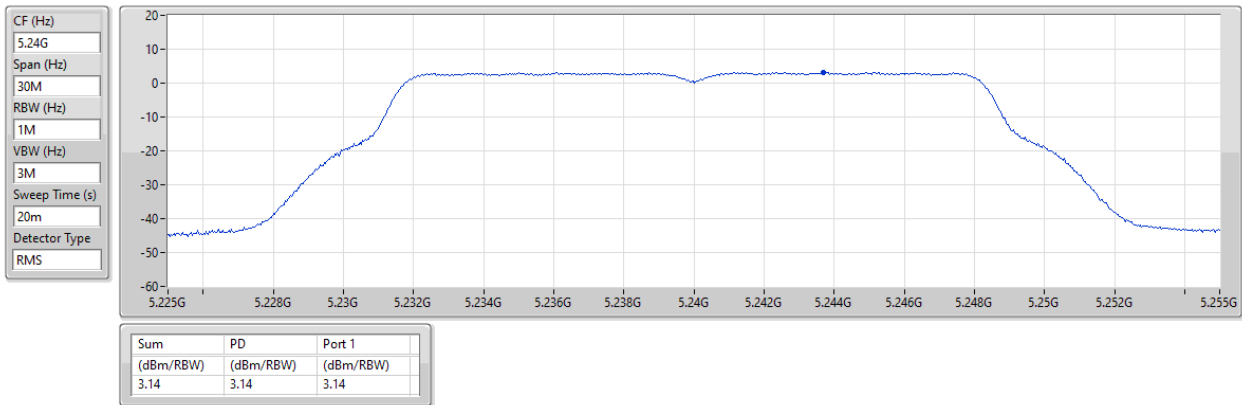


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5180MHz

02/10/2025

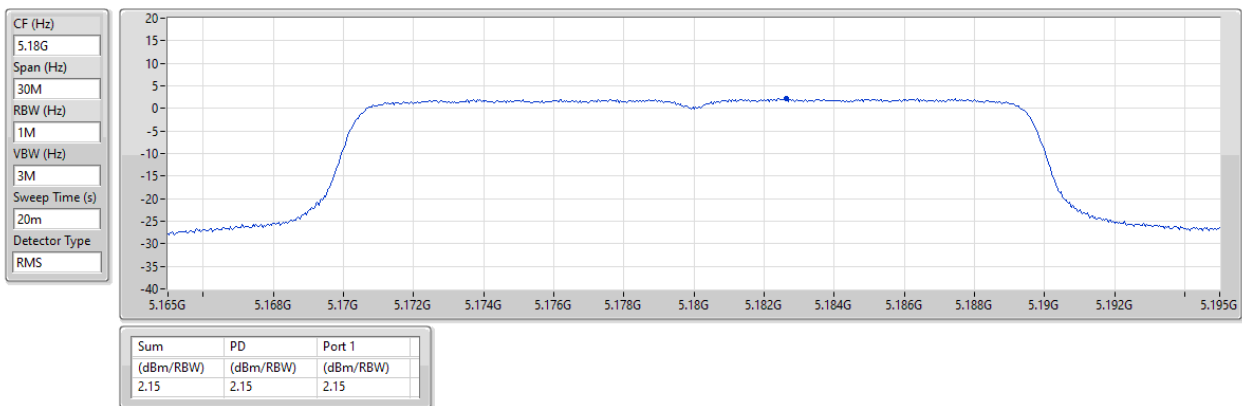


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5200MHz

02/10/2025

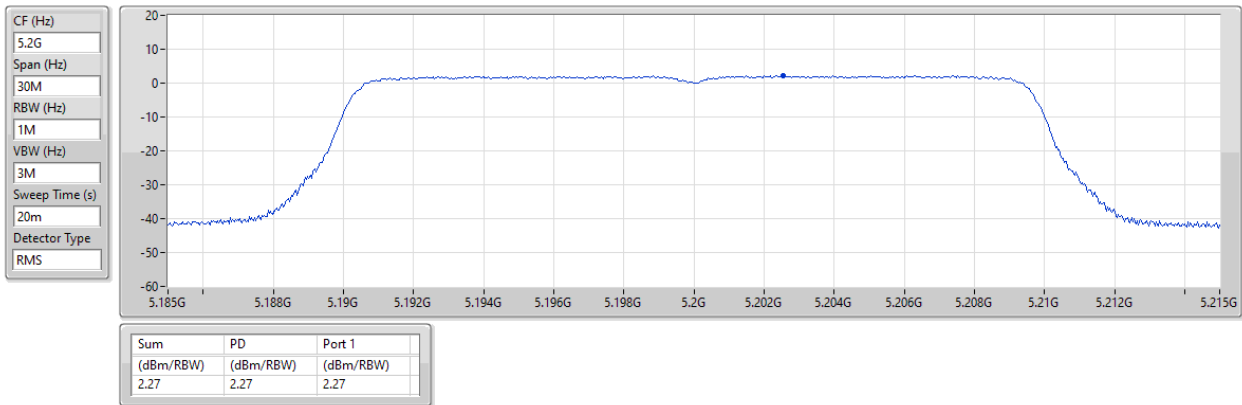


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5240MHz

02/10/2025

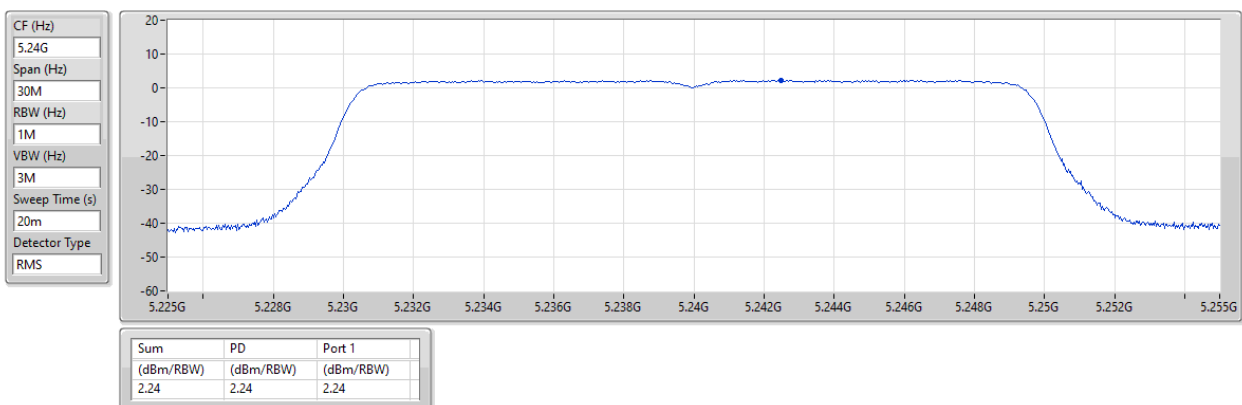


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5190MHz

02/10/2025

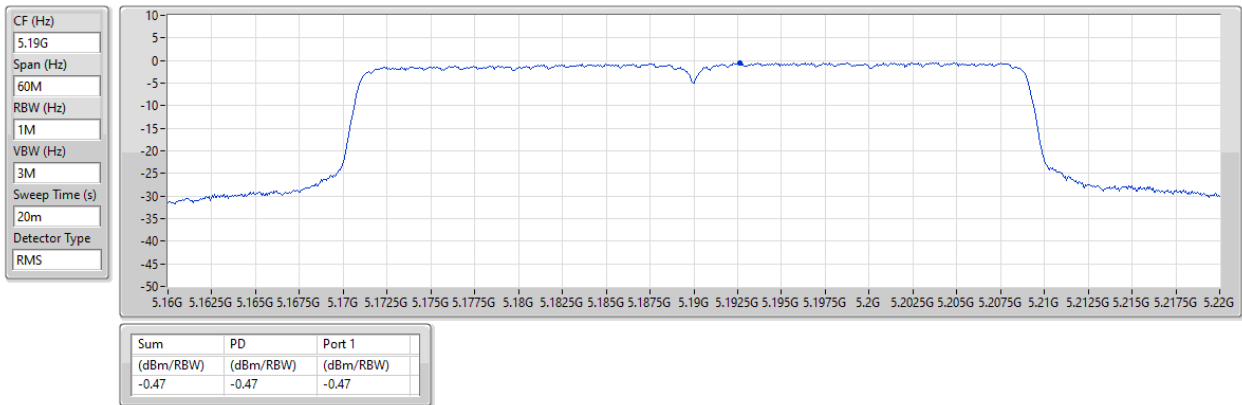


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5230MHz

02/10/2025

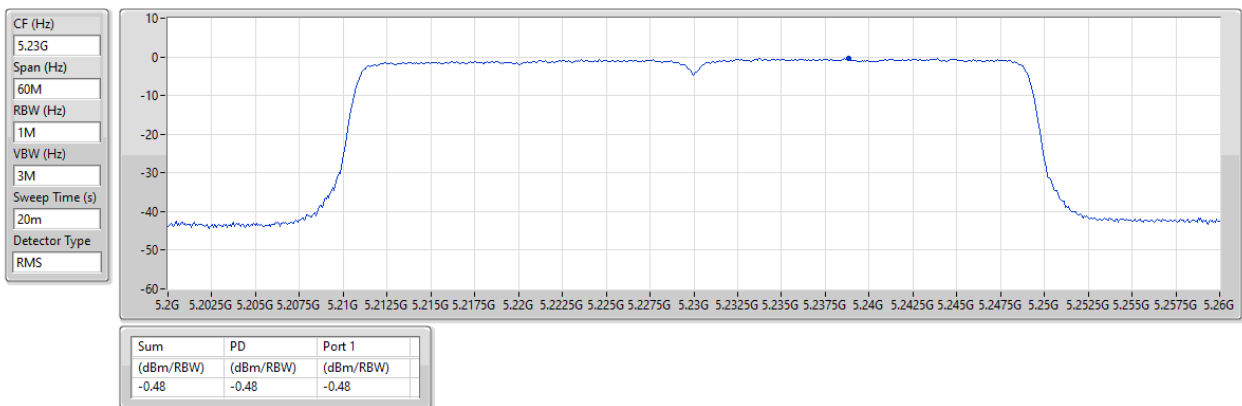


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5210MHz

02/10/2025

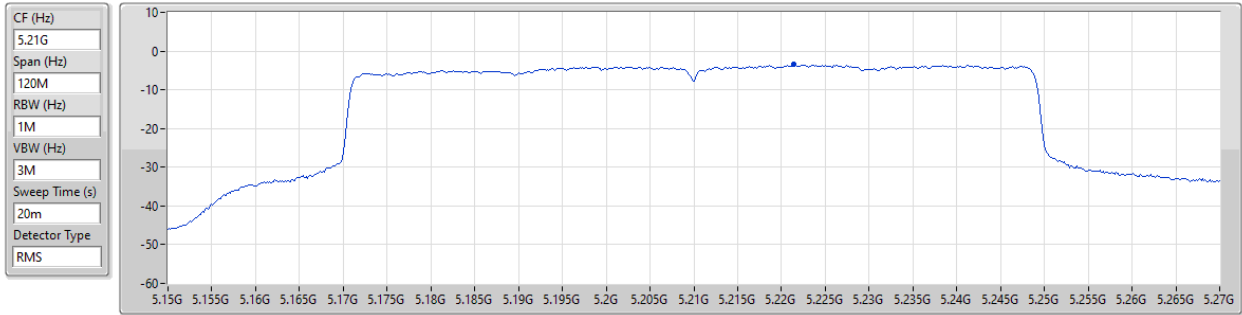

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.52	-3.52	-3.52



Test Mode: Mode 3

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	3.06

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.44	0.18	0.19	3.04	12.56
5200MHz	Pass	10.44	0.04	0.45	3.06	12.56
5240MHz	Pass	10.44	-0.03	0.36	2.99	12.56

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

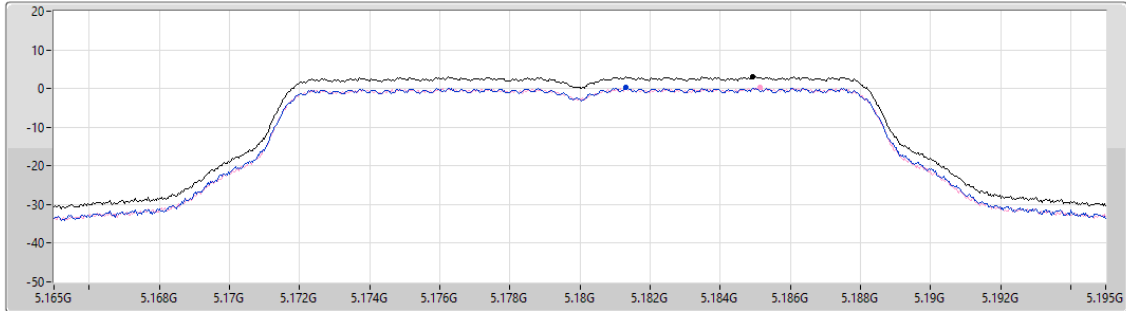

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.04	3.04	0.18	0.19

Sum
Port 1
Port 2


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

02/10/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

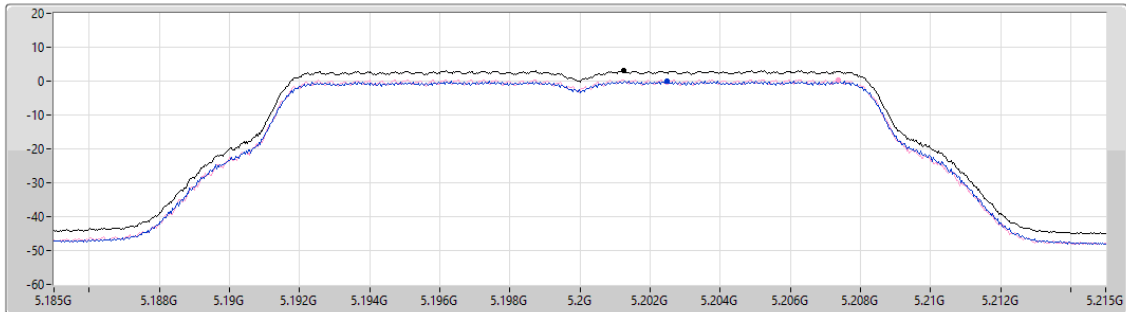

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.06	3.06	0.04	0.45

Sum
Port 1
Port 2

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

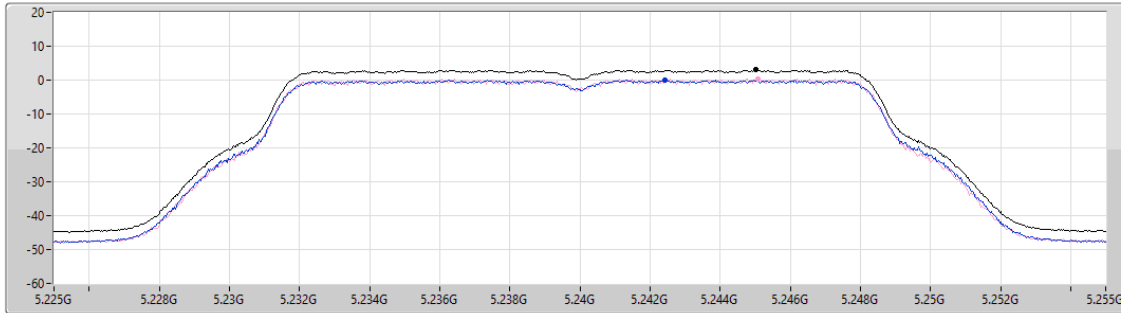

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.99	2.99	-0.03	0.36

Test Mode: Mode 4

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss2,(MCS0)_2TX	2.27
802.11be EHT40_Nss2,(MCS0)_2TX	-0.69
802.11be EHT80_Nss2,(MCS0)_2TX	-3.56

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.43	-0.71	-0.84	2.16	15.57
5200MHz	Pass	7.43	-0.84	-0.59	2.27	15.57
5240MHz	Pass	7.43	-0.76	-0.65	2.20	15.57
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.43	-3.58	-3.75	-0.74	15.57
5230MHz	Pass	7.43	-3.63	-3.62	-0.69	15.57
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.43	-6.52	-6.43	-3.56	15.57


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

02/10/2025

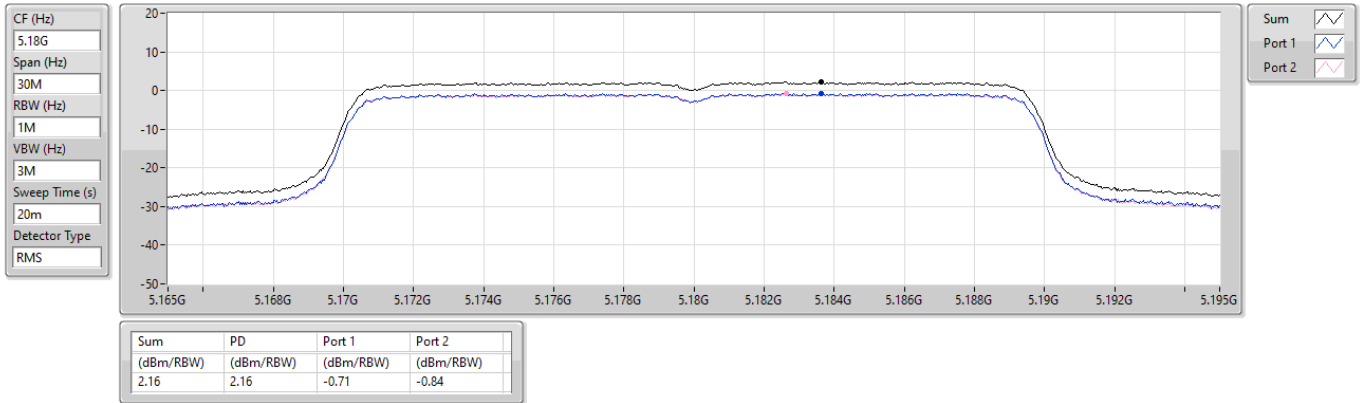


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

02/10/2025

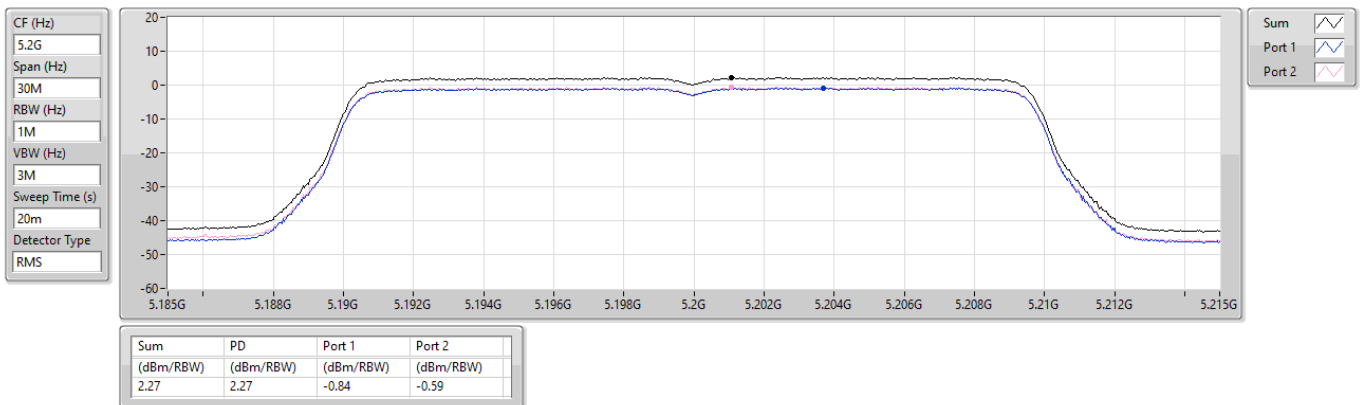


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

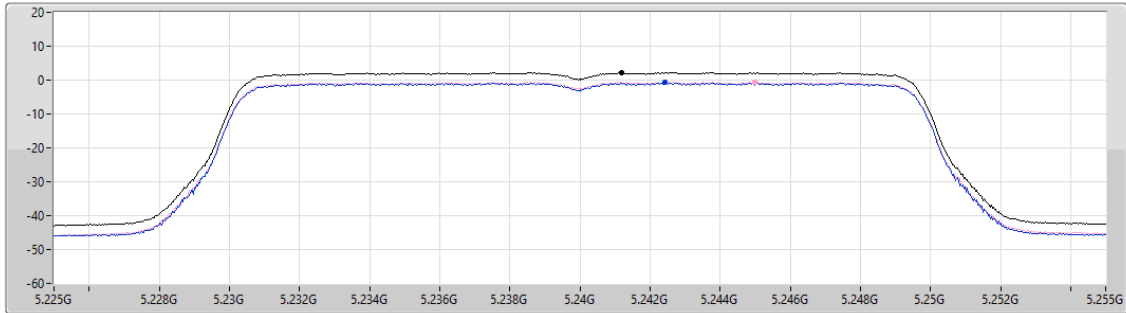

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.20	2.20	-0.76	-0.65


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

02/10/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

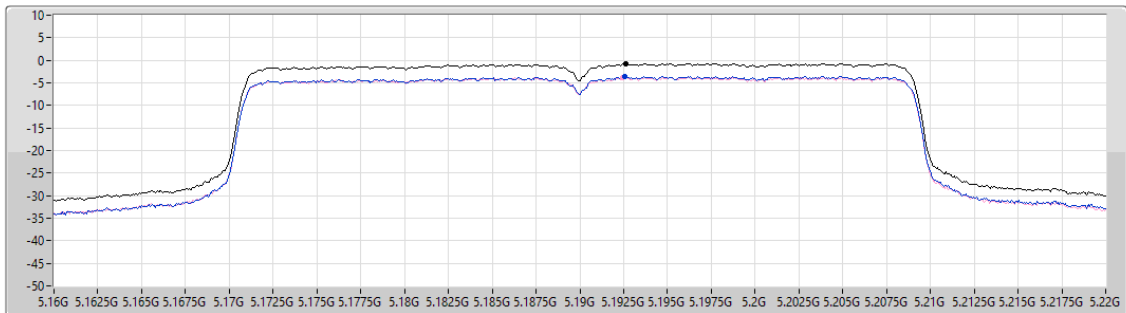

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.74	-0.74	-3.58	-3.75


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

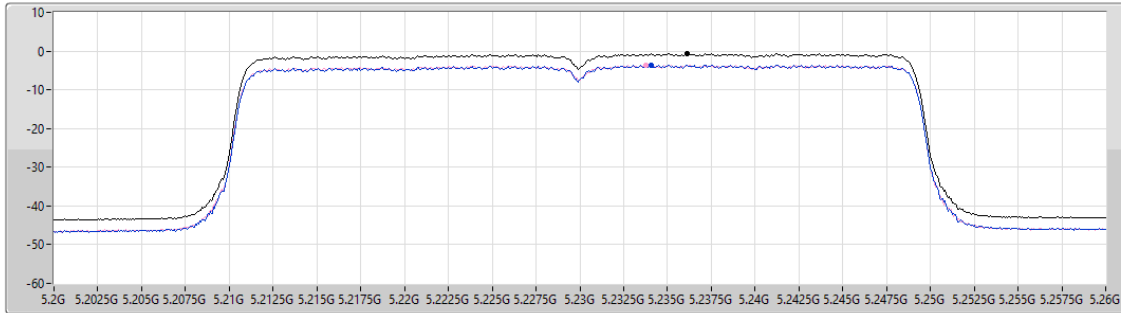

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.69	-0.69	-3.63	-3.62

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

02/10/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

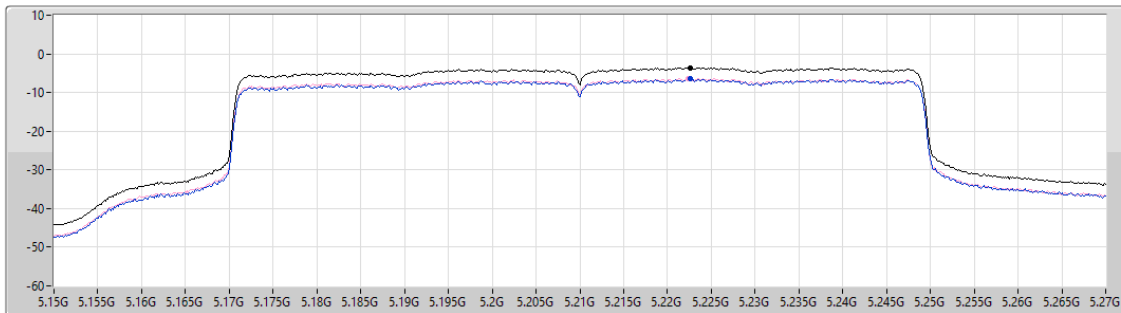

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.56	-3.56	-6.52	-6.43

Sum
Port 1
Port 2

Test Mode: Mode 5

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	3.30
802.11be EHT20_Nss1,(MCS0)_4TX	2.09
802.11be EHT40_Nss1,(MCS0)_4TX	-0.87
802.11be EHT80_Nss1,(MCS0)_4TX	-3.56

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53	-2.98	-2.60	-3.20	-1.96	3.30	9.47
5200MHz	Pass	13.53	-2.72	-2.19	-3.21	-2.04	3.03	9.47
5240MHz	Pass	13.53	-2.77	-2.85	-3.57	-1.67	3.11	9.47
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	13.53	-3.90	-3.90	-4.38	-3.06	2.09	9.47
5200MHz	Pass	13.53	-4.27	-4.03	-4.62	-2.87	2.01	9.47
5240MHz	Pass	13.53	-4.14	-3.94	-4.45	-2.84	2.05	9.47
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	13.53	-6.97	-6.81	-7.45	-6.17	-0.95	9.47
5230MHz	Pass	13.53	-6.73	-6.80	-7.63	-5.92	-0.87	9.47
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	13.53	-9.75	-9.59	-9.69	-8.76	-3.56	9.47


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

02/10/2025

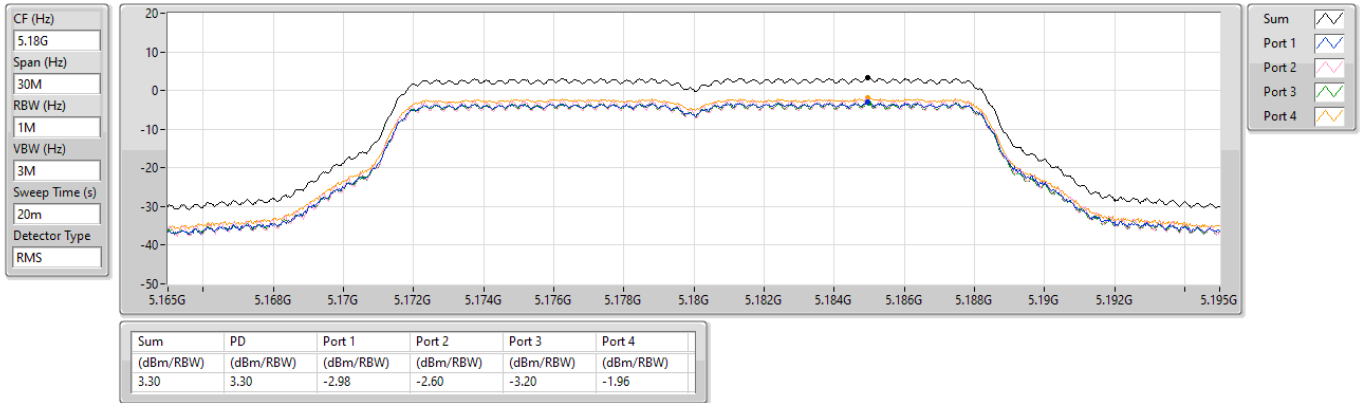


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

02/10/2025

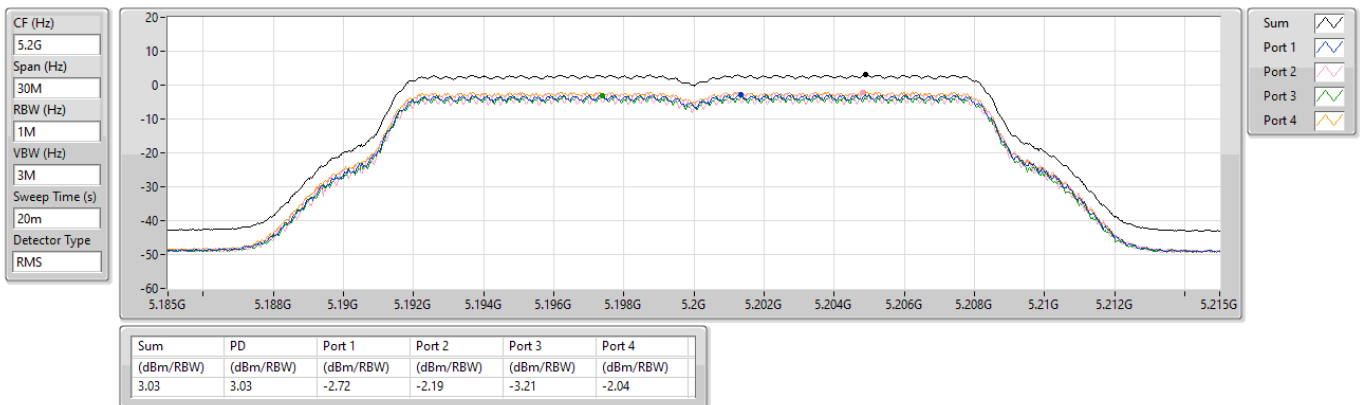


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

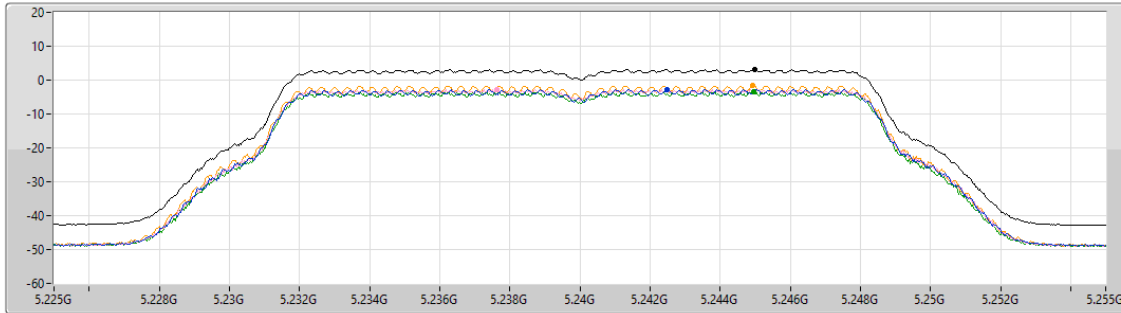

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.11	3.11	-2.77	-2.85	-3.57	-1.67


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

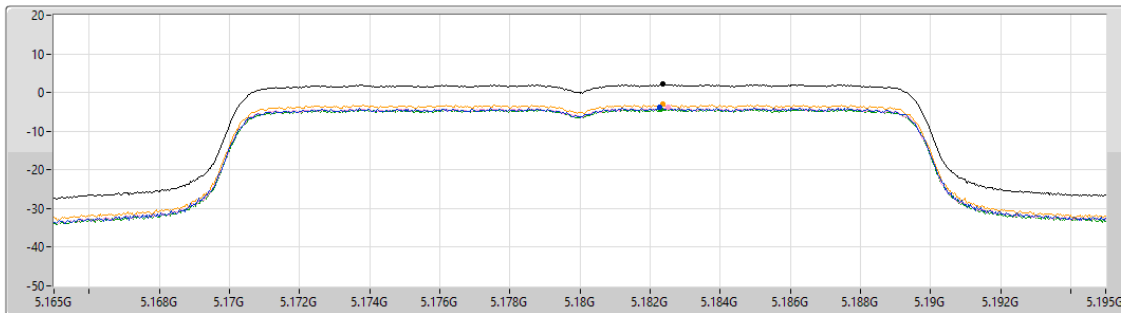


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.09	2.09	-3.90	-3.90	-4.38	-3.06

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

02/10/2025

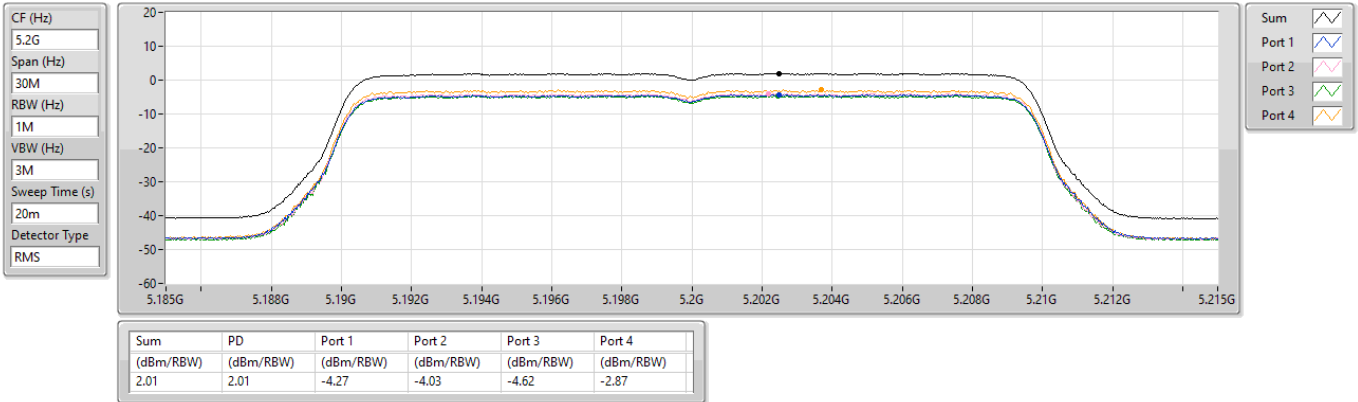


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5240MHz

02/10/2025

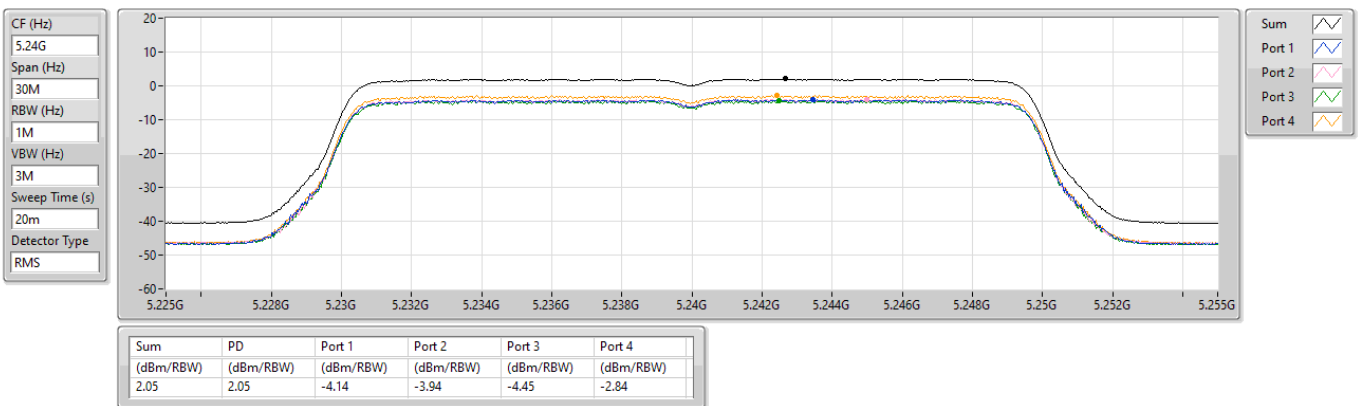


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5190MHz

02/10/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

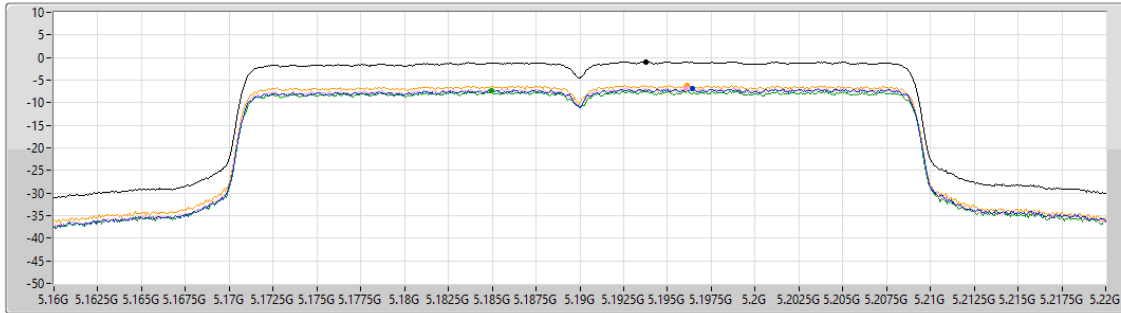

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.95	-0.95	-6.97	-6.81	-7.45	-6.17


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

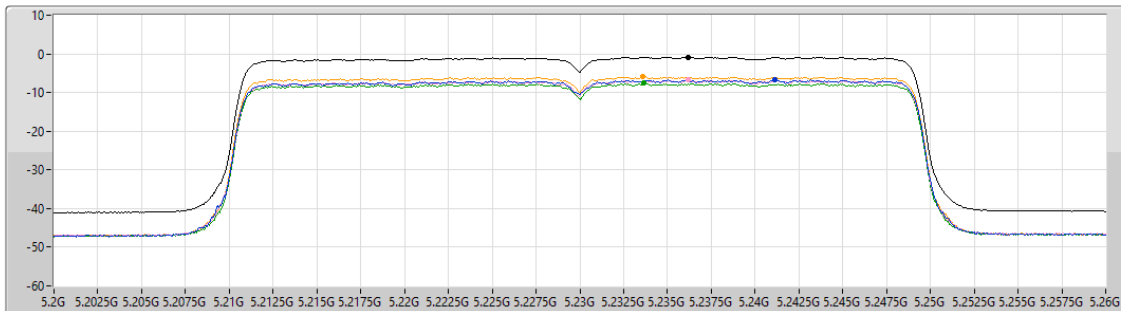

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.87	-0.87	-6.73	-6.80	-7.63	-5.92


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

02/10/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

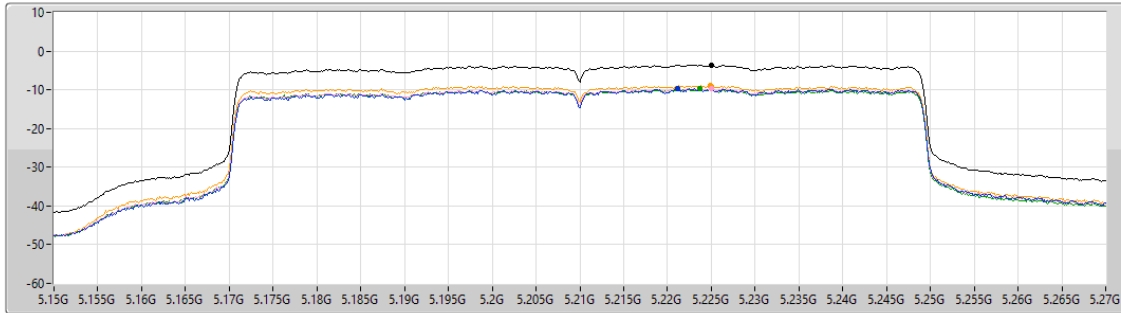

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-3.56	-3.56	-9.75	-9.59	-9.69	-8.76

Test Mode: Mode 6

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss4,(MCS0)_4TX	2.30
802.11be EHT40_Nss4,(MCS0)_4TX	-0.45
802.11be EHT80_Nss4,(MCS0)_4TX	-3.37

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	7.51	-3.90	-3.62	-4.16	-2.86	2.30	15.49
5200MHz	Pass	7.51	-4.01	-3.83	-4.28	-2.86	2.19	15.49
5240MHz	Pass	7.51	-3.67	-3.77	-4.02	-2.93	2.27	15.49
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	7.51	-6.44	-6.66	-7.36	-5.94	-0.63	15.49
5230MHz	Pass	7.51	-6.24	-6.30	-6.88	-5.81	-0.45	15.49
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	7.51	-9.47	-9.37	-9.73	-8.63	-3.37	15.49


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5180MHz

02/10/2025

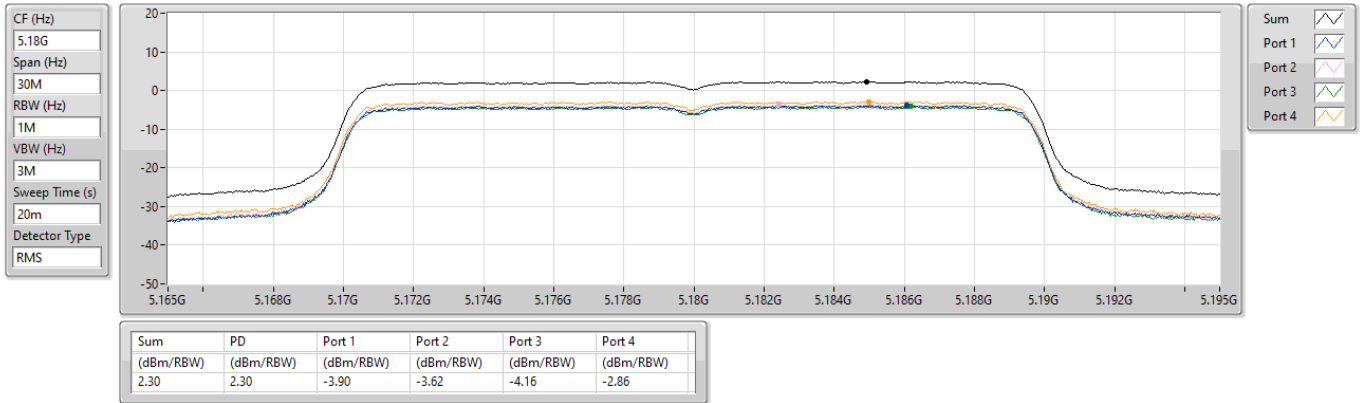


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

02/10/2025

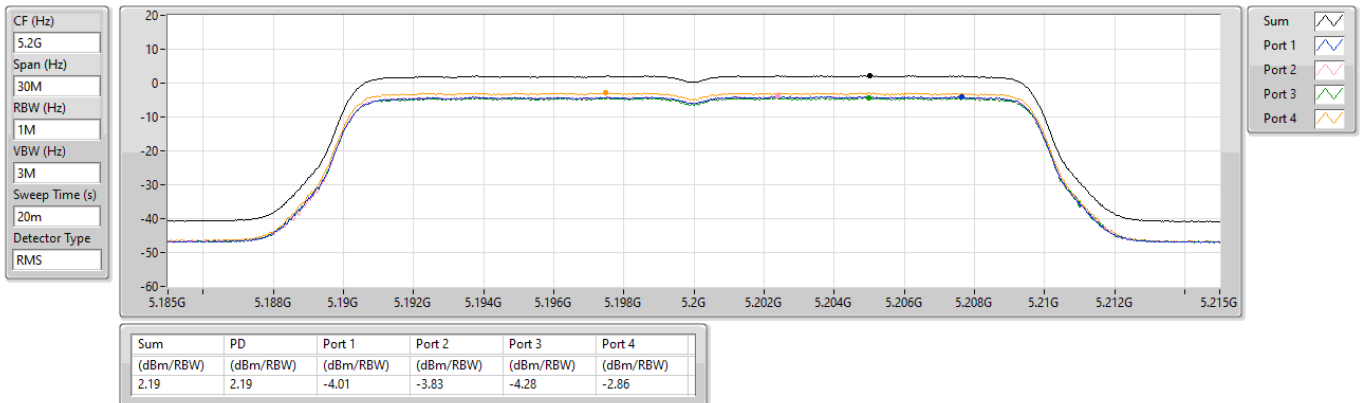

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

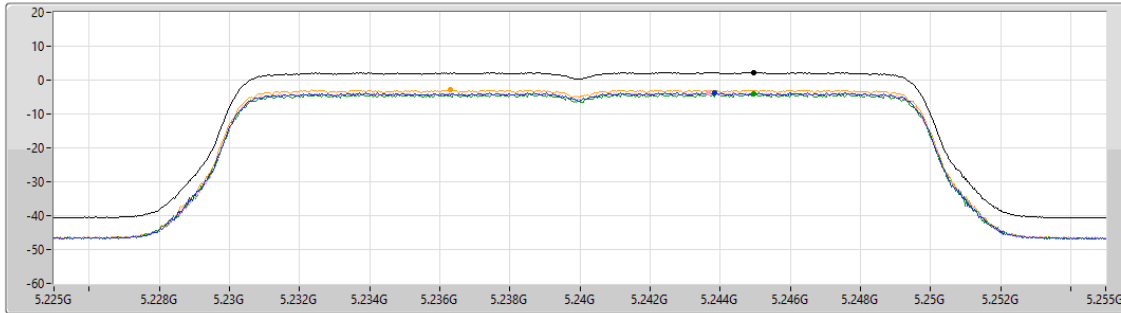

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.27	2.27	-3.67	-3.77	-4.02	-2.93

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5190MHz

02/10/2025

CF (Hz)
5.19G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

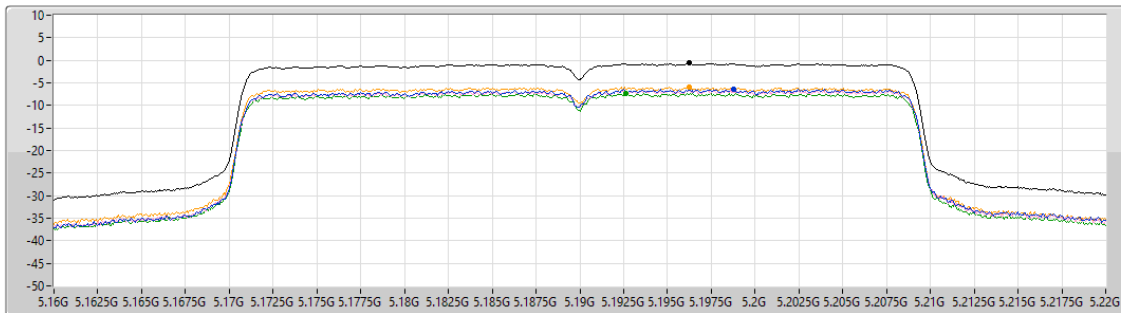


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.63	-0.63	-6.44	-6.66	-7.36	-5.94

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

02/10/2025

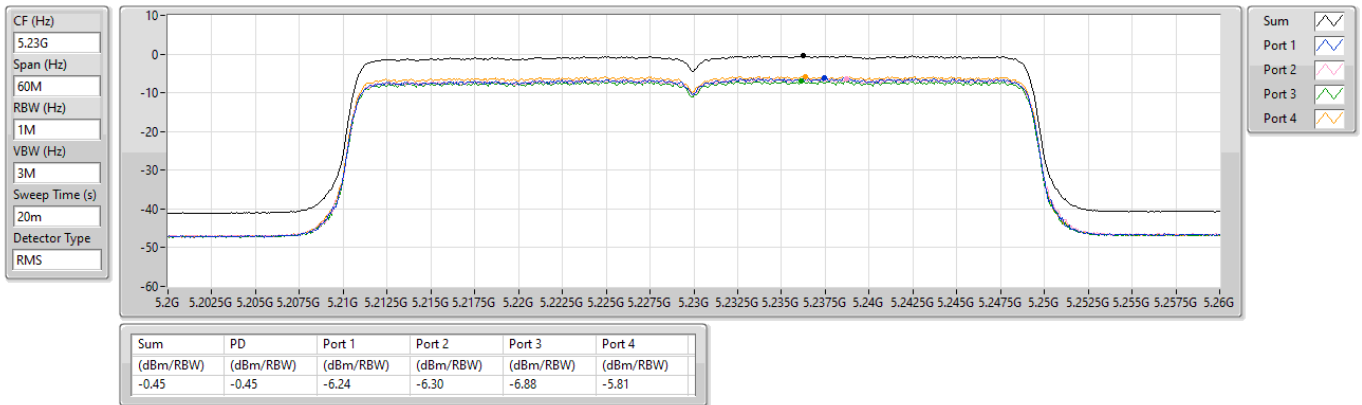


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

02/10/2025

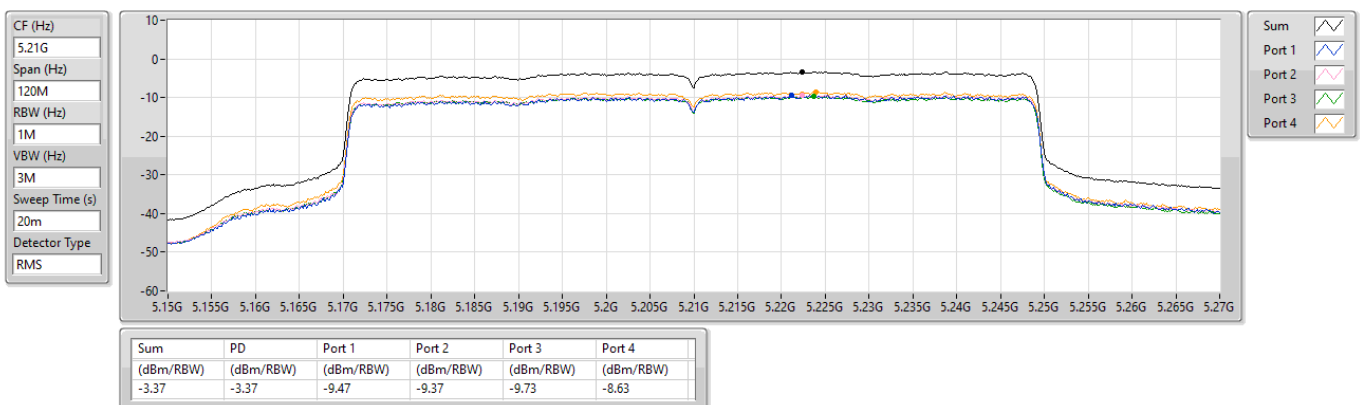

Test Mode: Mode 7

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	3.46
802.11be EHT20_Nss1,(MCS0)_1TX	2.26
802.11be EHT40_Nss1,(MCS0)_1TX	-0.38
802.11be EHT80_Nss1,(MCS0)_1TX	-3.26

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	7.58	3.45	3.45	15.42
5200MHz	Pass	7.58	3.19	3.19	15.42
5240MHz	Pass	7.58	3.46	3.46	15.42
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	7.58	2.26	2.26	15.42
5200MHz	Pass	7.58	2.22	2.22	15.42
5240MHz	Pass	7.58	2.02	2.02	15.42
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	7.58	-0.38	-0.38	15.42
5230MHz	Pass	7.58	-0.65	-0.65	15.42
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	7.58	-3.26	-3.26	15.42

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5180MHz

20/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

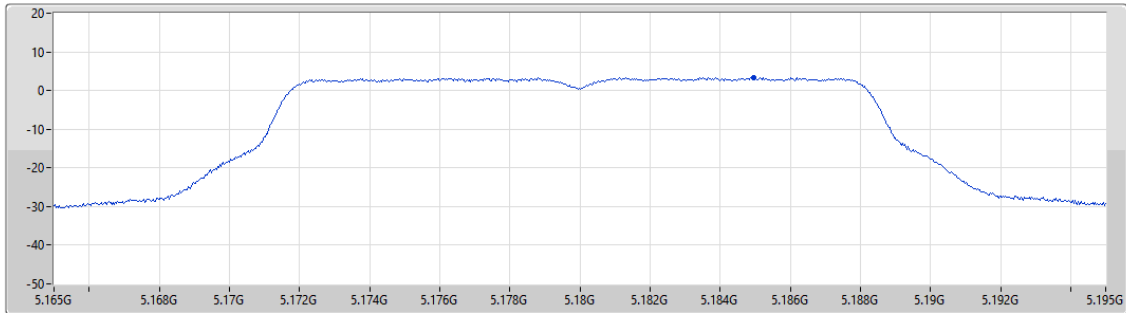

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.45	3.45	3.45


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5200MHz

20/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

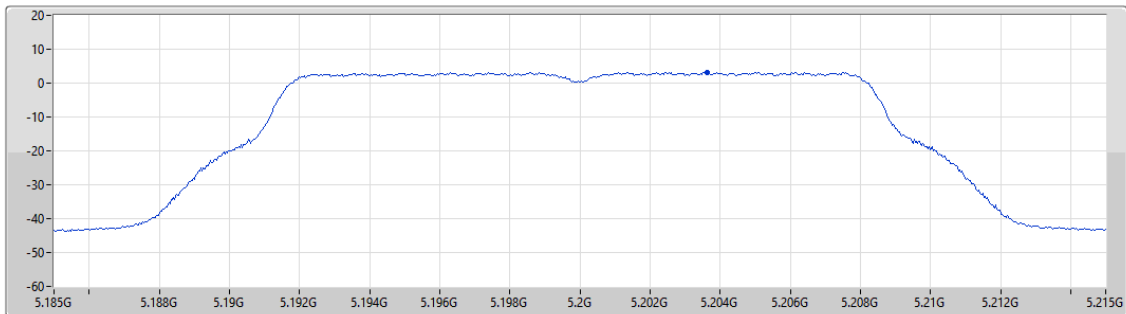

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.19	3.19	3.19