



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

# TEST REPORT

## FOR FCC PART 15 SUBPART C 15.239

Report Reference No. ....: CTL1810083021-WF

Compiled by:  
( position+printed name+signature)

Happy Guo  
(File administrators)

Happy Guo

Tested by:  
( position+printed name+signature)

Nice Nong  
(Test Engineer)

Nice Nong

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

Ivan Xie

Product Name.....: FM Transmitter

Model/Type reference .....: EL-352C-A001

List Model(s).....: N/A

Trade Mark.....: E-LEAD

FCC ID.....: QYK-9U352C

Applicant's name .....: E-Lead Electronic Co., Ltd

Address of applicant .....: NO.37 Gungdung 1ST RD., Shengang Shiang, Changhua, 509,  
TAIWAN, R.O.C.

Test Firm .....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,  
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.239: Operation in the band 88–108 MHz.

TRF Originator .....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF .....: Dated 2011-01

Date of Receipt.....: Nov. 01, 2018

Date of Test Date.....: Nov. 01, 2018–Dec. 06, 2018

Data of Issue.....: Dec. 06, 2018

Result.....: Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

|                          |                         |               |
|--------------------------|-------------------------|---------------|
| <b>Test Report No. :</b> | <b>CTL1810083021-WF</b> | Dec. 06, 2018 |
|                          |                         | Date of issue |

Equipment under Test : FM Transmitter

Model /Type : EL-352C-A001

Listed Models : N/A

**Applicant** : **E-Lead Electronic Co., Ltd**

Address : NO.37 Gungdung 1ST RD., Shengang Shiang,  
Changhua, 509, TAIWAN, R.O.C.

**Manufacturer** : **E-Lead Electronic Co., Ltd**

Address : NO.37 Gungdung 1ST RD., Shengang Shiang,  
Changhua, 509, TAIWAN, R.O.C.

|                    |               |
|--------------------|---------------|
| <b>Test result</b> | <b>Pass *</b> |
|--------------------|---------------|

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**\*\* Modified History \*\***


| Version     | Description                 | Issued Data | Report No.       | Remark   |
|-------------|-----------------------------|-------------|------------------|----------|
| Version 1.0 | Initial Test Report Release | 2018-12-06  | CTL1810083021-WF | Tracy Qi |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |
|             |                             |             |                  |          |



## Table of Contents

## Page

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                                  | <b>5</b>  |
| 1.1. TEST STANDARDS.....                                | 5         |
| 1.2. TEST DESCRIPTION.....                              | 5         |
| 1.3. TEST FACILITY .....                                | 6         |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....      | 6         |
| <b>2. GENERAL INFORMATION.....</b>                      | <b>7</b>  |
| 2.1. ENVIRONMENTAL CONDITIONS .....                     | 7         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 7         |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....  | 7         |
| 2.4. EQUIPMENTS USED DURING THE TEST .....              | 8         |
| 2.5. RELATED SUBMITTAL(S) / GRANT(S).....               | 8         |
| 2.6. MODIFICATIONS.....                                 | 8         |
| <b>3. TEST CONDITIONS AND RESULTS .....</b>             | <b>9</b>  |
| 3.1. CONDUCTED EMISSIONS TEST .....                     | 9         |
| 3.2. RADIATED EMISSIONS.....                            | 10        |
| 3.3. OCCUPIED BANDWIDTH.....                            | 15        |
| 3.4. ANTENNA REQUIREMENT.....                           | 17        |
| <b>4. TEST SETUP PHOTOS OF THE EUT .....</b>            | <b>18</b> |
| <b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b> | <b>19</b> |

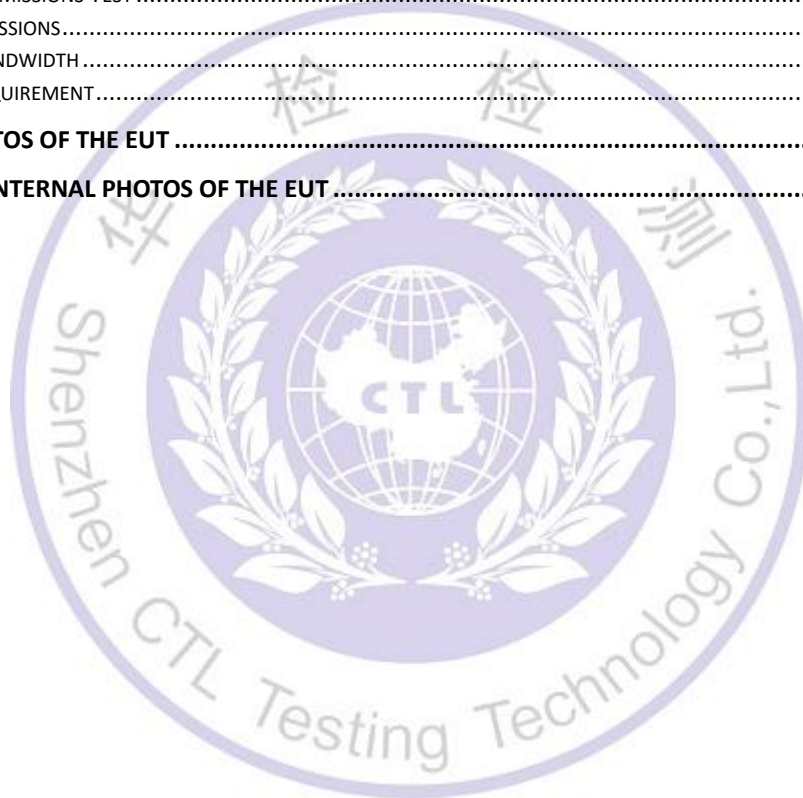

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:


[FCC Rules Part 15.239](#): Operation in the band 88–108 MHz.

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz  
Range of 9 kHz to 40GHz

## 1.2. Test Description

| FCC PART 15.239           |                               |      |
|---------------------------|-------------------------------|------|
| FCC Part 15.239(a)        | Field Strength of Fundamental | PASS |
| FCC Part 15.209/15.239(c) | Spurious Emission             | PASS |
| FCC Part 15.239(a)        | 20dB bandwidth                | PASS |
| FCC Part 15.207           | Conducted Emission            | N/A  |
| FCC Part 15.203           | Antenna Requirement           | PASS |

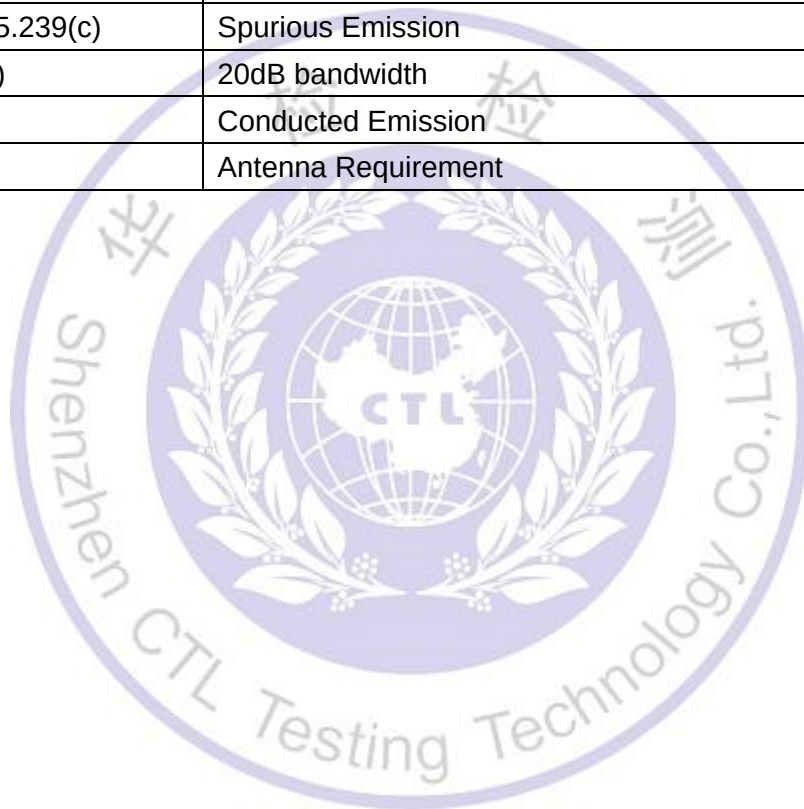

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

#### FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10dB                  | (1)   |
| Radiated Emission     | Above 1GHz | 4.32dB                  | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.20dB                  | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2. General Description of EUT

|                       |                |
|-----------------------|----------------|
| Product Name:         | FM Transmitter |
| Model/Type reference: | EL-352C-A001   |
| Power supply:         | DC 12V         |
| <b>FM</b>             |                |
| Modulation:           | FM             |
| Operation frequency:  | 88.1-107.9MHz  |
| Channel number:       | 199            |
| Channel separation:   | 100KHz         |
| Antenna type:         | PCB Antenna    |
| Antenna gain:         | 0dBi           |

Note: For more details, please refer to the user's manual of the EUT.

### 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

#### Operation Frequency List :

| Channel    | Frequency (MHz) |
|------------|-----------------|
| <b>01</b>  | <b>88.1</b>     |
| 02         | 88.2            |
| :          | :               |
| 100        | 98.0            |
| <b>101</b> | <b>98.1</b>     |
| 102        | 98.2            |
| :          | :               |
| 198        | 107.8           |
| <b>199</b> | <b>107.9</b>    |

Note: The line display in grey is the channel selected to perform test.

## 2.4. Equipments Used during the Test

| Test Equipment             | Manufacturer         | Model No.             | Serial No.   | Calibration Date recent | Calibration Due Date |
|----------------------------|----------------------|-----------------------|--------------|-------------------------|----------------------|
| LISN                       | R&S                  | ENV216                | 3560.6550.12 | 2018/06/01              | 2019/05/31           |
| LISN                       | R&S                  | ESH2-Z5               | 860014/010   | 2018/06/01              | 2019/05/31           |
| Power Meter                | Agilent              | U2531A                | TW53323507   | 2018/06/01              | 2019/05/31           |
| Power Sensor               | Agilent              | U2021XA               | MY5365004    | 2018/05/20              | 2019/05/19           |
| EMI Test Receiver          | R&S                  | ESCI                  | 103710       | 2018/06/01              | 2019/05/31           |
| Spectrum Analyzer          | Agilent              | E4407B                | MY41440676   | 2018/05/20              | 2019/05/19           |
| Spectrum Analyzer          | Agilent              | N9020                 | US46220290   | 2018/01/16              | 2019/01/15           |
| Controller                 | EM Electronics       | Controller EM 1000    | N/A          | 2018/05/20              | 2019/05/19           |
| Active Loop Antenna        | Daze                 | ZN30900A              | N/A          | 2018/05/18              | 2019/05/17           |
| Bilog Antenna              | Schwarzbeck          | VULB 9168             | 00824        | 2018/10/25              | 2019/10/24           |
| Horn Antenna               | Sunol Sciences Corp. | DRH-118               | A062013      | 2018/05/18              | 2019/05/17           |
| Horn Antenna               | SCHWARZBACK          | BBHA 9170             | BBHA9170184  | 2018/05/18              | 2019/05/17           |
| Amplifier                  | Agilent              | 8349B                 | 3008A02306   | 2018/05/18              | 2019/05/17           |
| Amplifier                  | Agilent              | 8447D                 | 2944A10176   | 2018/05/18              | 2019/05/17           |
| Temperature/Humidity Meter | Gangxing             | CTH-608               | 02           | 2018/05/19              | 2019/05/18           |
| High-Pass Filter           | K&L                  | 9SH10-2700/X12750-O/O | N/A          | 2018/05/19              | 2019/05/18           |
| High-Pass Filter           | K&L                  | 41H10-1375/U12750-O/O | N/A          | 2018/05/19              | 2019/05/18           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-10M   | 10m          | 2018/06/01              | 2019/05/31           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2018/06/01              | 2019/05/31           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2018/06/01              | 2019/05/31           |
| RF Cable                   | Megalon              | RF-A303               | N/A          | 2018/06/01              | 2019/05/31           |
| EMI Test Software          | R&S                  | ES-K1                 | V1.7.1       | 2018/06/01              | 2019/05/31           |
| EMI Test Software          | AUDIX                | E3                    | V6.0         | 2018/06/01              | 2019/05/31           |

The calibration interval was one year

## 2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

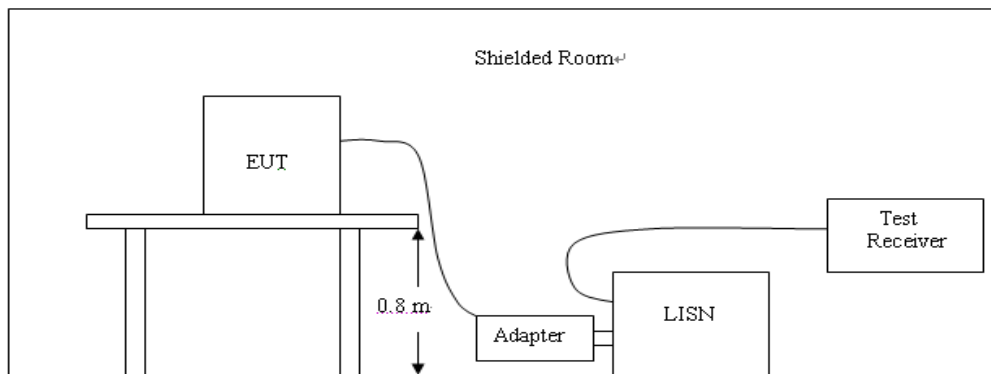

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

##### TEST RESULTS

Not applicable to this device, which is powered by battery.

## 3.2. Radiated Emissions

### Limit

15.239(b) The field strength of any emissions within the permitted 200 KHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.


The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in § 15.209 as table below:

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

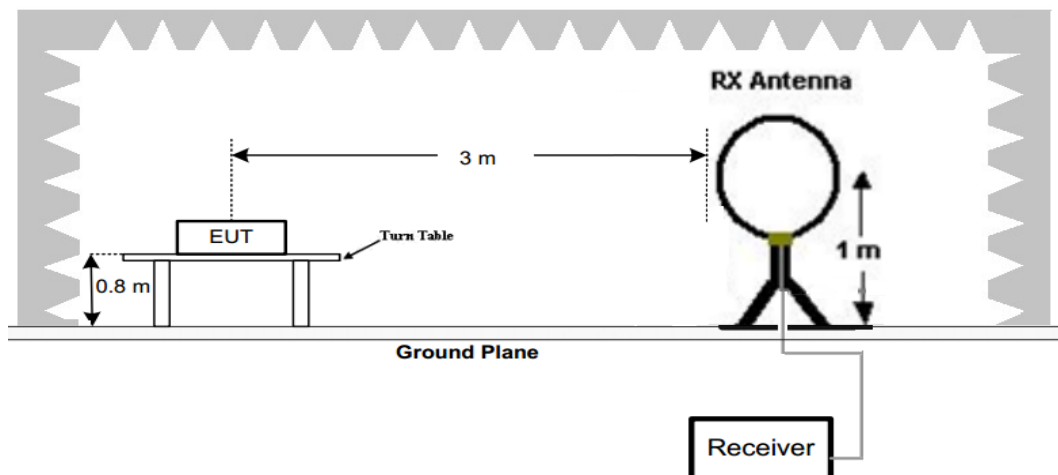

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

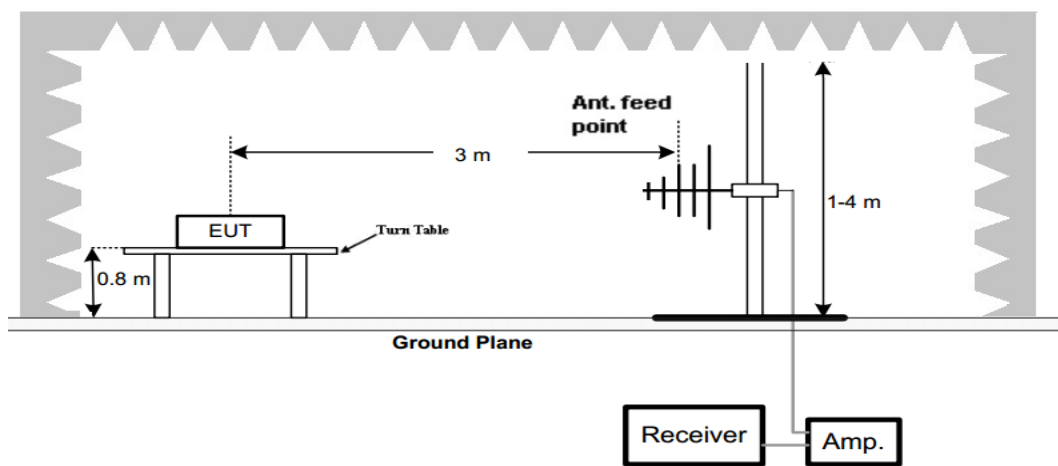

## (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

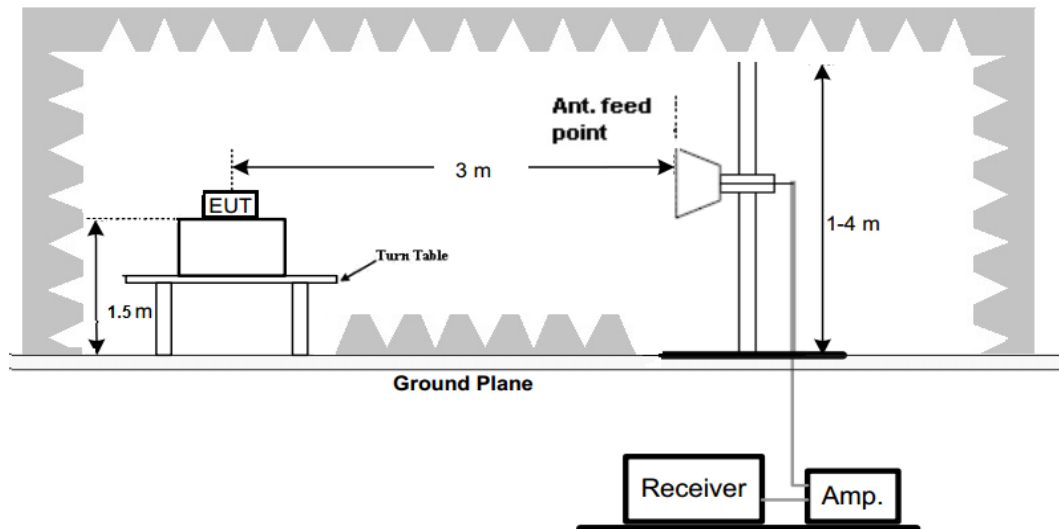**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

**TEST RESULTS**

Remark: Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

**30MHz- 10th Harmonic of Fundamental**

| Frequency(MHz): |                 |                         |    | 88.1           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 88.10           | 40.80                   | PK | 68.00          | 27.20       | 60.33            | 8.72                  | 0.56              | 28.81              | -19.53                   |
| 1               | 88.10           | 34.60                   | AV | 48.00          | 13.40       | 54.13            | 8.72                  | 0.56              | 28.81              | -19.53                   |
| 2               | 88.00           | 32.50                   | QP | 40.00          | 7.50        | 52.06            | 8.70                  | 0.55              | 28.81              | -19.56                   |
| 3               | 176.20          | 30.30                   | QP | 43.50          | 13.20       | 45.96            | 11.95                 | 1.05              | 28.66              | -15.66                   |
| 4               | 264.30          | 34.20                   | QP | 46.00          | 11.80       | 48.60            | 12.86                 | 1.48              | 28.74              | -14.40                   |
| 5               | 352.40          | 32.20                   | QP | 46.00          | 13.80       | 44.25            | 14.32                 | 1.95              | 28.32              | -12.05                   |
| 6               | 440.50          | 32.80                   | QP | 46.00          | 13.20       | 43.01            | 16.57                 | 2.18              | 28.96              | -10.21                   |
| 7               | 616.70          | 31.60                   | QP | 46.00          | 14.40       | 39.91            | 18.32                 | 2.24              | 28.87              | -8.31                    |
| 8               | 704.80          | 31.50                   | QP | 46.00          | 14.50       | 36.91            | 20.19                 | 3.09              | 28.69              | -5.41                    |

| Frequency(MHz): |                 |                         |    | 88.1           |             | Polarity:        |                       |                   | Vertical           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 88.10           | 39.10                   | PK | 68.00          | 28.90       | 58.63            | 8.72                  | 0.56              | 28.81              | -19.53                   |
| 1               | 88.10           | 32.40                   | AV | 48.00          | 15.60       | 51.93            | 8.72                  | 0.56              | 28.81              | -19.53                   |
| 2               | 88.00           | 31.60                   | QP | 40.00          | 8.40        | 51.16            | 8.70                  | 0.55              | 28.81              | -19.56                   |
| 3               | 176.20          | 30.20                   | QP | 43.50          | 13.30       | 45.86            | 11.95                 | 1.05              | 28.66              | -15.66                   |
| 4               | 264.30          | 31.40                   | QP | 46.00          | 14.60       | 45.80            | 12.86                 | 1.48              | 28.74              | -14.40                   |
| 5               | 352.40          | 30.80                   | QP | 46.00          | 15.20       | 42.85            | 14.32                 | 1.95              | 28.32              | -12.05                   |
| 6               | 440.50          | 31.60                   | QP | 46.00          | 14.40       | 41.81            | 16.57                 | 2.18              | 28.96              | -10.21                   |
| 7               | 616.70          | 30.00                   | QP | 46.00          | 16.00       | 38.31            | 18.32                 | 2.24              | 28.87              | -8.31                    |
| 8               | 704.80          | 28.90                   | QP | 46.00          | 17.10       | 34.31            | 20.19                 | 3.09              | 28.69              | -5.41                    |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) =Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level
4. -- Mean the PK detector measured value is below QP limit
5. The other emission levels were very low against the limit
6. For fundamental frequency, RBW 100KHz VBW 300 Hz Peak detectors is for PK Value; RMS detector is for AV value

| Frequency(MHz): |                 |                         |    | 98.1           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 98.10           | 40.90                   | PK | 68.00          | 27.10       | 60.40            | 8.78                  | 0.57              | 28.85              | -19.50                   |
| 1               | 98.10           | 33.60                   | AV | 48.00          | 14.40       | 53.10            | 8.78                  | 0.57              | 28.85              | -19.50                   |
| 2               | 196.20          | 34.20                   | QP | 43.50          | 9.30        | 49.99            | 11.98                 | 1.11              | 28.88              | -15.79                   |
| 3               | 294.30          | 33.30                   | QP | 46.00          | 12.70       | 47.56            | 13.11                 | 1.54              | 28.91              | -14.26                   |
| 4               | 490.50          | 32.60                   | QP | 46.00          | 13.40       | 44.87            | 14.58                 | 2.2               | 29.05              | -12.27                   |
| 5               | 588.60          | 31.10                   | QP | 46.00          | 14.90       | 42.33            | 15.64                 | 2.23              | 29.10              | -11.23                   |
| 6               | 686.70          | 31.70                   | QP | 46.00          | 14.30       | 39.88            | 18.69                 | 2.28              | 29.15              | -8.18                    |
| 7               | 882.90          | 30.50                   | QP | 46.00          | 15.50       | 35.27            | 21.59                 | 3.26              | 29.62              | -4.77                    |

| Frequency(MHz): |                 |                         |    | 98.1           |             | Polarity:        |                       |                   | Vertical           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 98.10           | 39.70                   | PK | 68.00          | 28.30       | 59.20            | 8.78                  | 0.57              | 28.85              | -19.50                   |
| 1               | 98.10           | 32.90                   | AV | 48.00          | 15.10       | 52.40            | 8.78                  | 0.57              | 28.85              | -19.50                   |
| 2               | 196.20          | 32.60                   | QP | 43.50          | 10.90       | 48.39            | 11.98                 | 1.11              | 28.88              | -15.79                   |
| 3               | 294.30          | 32.00                   | QP | 46.00          | 14.00       | 46.26            | 13.11                 | 1.54              | 28.91              | -14.26                   |
| 4               | 490.50          | 31.50                   | QP | 46.00          | 14.50       | 43.77            | 14.58                 | 2.20              | 29.05              | -12.27                   |
| 5               | 588.60          | 30.90                   | QP | 46.00          | 15.10       | 42.13            | 15.64                 | 2.23              | 29.10              | -11.23                   |
| 6               | 686.70          | 31.20                   | QP | 46.00          | 14.80       | 39.38            | 18.69                 | 2.28              | 29.15              | -8.18                    |
| 7               | 882.90          | 29.60                   | QP | 46.00          | 16.40       | 34.37            | 21.59                 | 3.26              | 29.62              | -4.77                    |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) =Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level
4. -- Mean the PK detector measured value is below QP limit
5. The other emission levels were very low against the limit
6. For fundamental frequency, RBW 100KHz VBW 300 Hz Peak detectors is for PK Value; RMS detector is for AV value

| Frequency(MHz): |                 |                         |    | 107.9          |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 107.90          | 41.20                   | PK | 68.00          | 26.80       | 60.49            | 9.04                  | 0.65              | 28.98              | -19.29                   |
| 1               | 107.90          | 34.50                   | AV | 48.00          | 13.50       | 53.79            | 9.04                  | 0.65              | 28.98              | -19.29                   |
| 2               | 108.00          | 33.60                   | QP | 43.50          | 9.90        | 52.88            | 9.05                  | 0.65              | 28.98              | -19.28                   |
| 3               | 215.80          | 32.90                   | QP | 43.50          | 10.60       | 48.31            | 12.14                 | 1.35              | 28.90              | -15.41                   |
| 4               | 323.70          | 32.00                   | QP | 46.00          | 14.00       | 45.69            | 13.58                 | 1.68              | 28.95              | -13.69                   |
| 5               | 431.60          | 32.40                   | QP | 46.00          | 13.60       | 45.13            | 14.25                 | 2.04              | 29.02              | -12.73                   |
| 6               | 539.50          | 32.80                   | QP | 46.00          | 13.20       | 44.28            | 15.47                 | 2.13              | 29.08              | -11.48                   |
| 7               | 755.30          | 31.90                   | QP | 46.00          | 14.10       | 39.62            | 19.11                 | 2.39              | 29.22              | -7.72                    |
| 8               | 863.20          | 34.40                   | QP | 46.00          | 11.60       | 39.40            | 21.34                 | 3.17              | 29.51              | -5.00                    |

| Frequency(MHz): |                 |                         |    | 107.9          |             | Polarity:        |                       |                   | Vertical           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 107.90          | 40.10                   | PK | 68.00          | 27.90       | 59.39            | 9.04                  | 0.65              | 28.98              | -19.29                   |
| 1               | 107.90          | 33.80                   | AV | 48.00          | 14.20       | 53.09            | 9.04                  | 0.65              | 28.98              | -19.29                   |
| 2               | 108.00          | 33.40                   | QP | 43.50          | 10.10       | 52.68            | 9.05                  | 0.65              | 28.98              | -19.28                   |
| 2               | 215.80          | 31.70                   | QP | 43.50          | 11.80       | 47.11            | 12.14                 | 1.35              | 28.90              | -15.41                   |
| 3               | 323.70          | 32.40                   | QP | 46.00          | 13.60       | 46.09            | 13.58                 | 1.68              | 28.95              | -13.69                   |
| 4               | 431.60          | 31.90                   | QP | 46.00          | 14.10       | 44.63            | 14.25                 | 2.04              | 29.02              | -12.73                   |
| 5               | 539.50          | 31.20                   | QP | 46.00          | 14.80       | 42.68            | 15.47                 | 2.13              | 29.08              | -11.48                   |
| 6               | 755.30          | 32.30                   | QP | 46.00          | 13.70       | 40.02            | 19.11                 | 2.39              | 29.22              | -7.72                    |
| 7               | 863.20          | 33.10                   | QP | 46.00          | 12.90       | 38.10            | 21.34                 | 3.17              | 29.51              | -5.00                    |

## REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) =Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level
4. -- Mean the PK detector measured value is below QP limit
5. The other emission levels were very low against the limit
6. For fundamental frequency, RBW 100KHz VBW 300 Hz Peak detectors is for PK Value; RMS detector is for AV value

### 3.3. Occupied Bandwidth

#### Limit

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88–108 MHz.

#### Test Configuration



#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10 KHz RBW and 30 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Results

| Modulation | Channel | 99% OBW (KHz) | 20dB bandwidth (KHz) | Result |
|------------|---------|---------------|----------------------|--------|
| FM         | CH01    | 56.595        | 53.29                | Pass   |
|            | CH101   | 62.819        | 53.82                |        |
|            | CH199   | 53.730        | 53.07                |        |

Test plot as follows:



### 3.4. Antenna Requirement

#### Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **Refer to statement below for compliance.**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 0dBi.

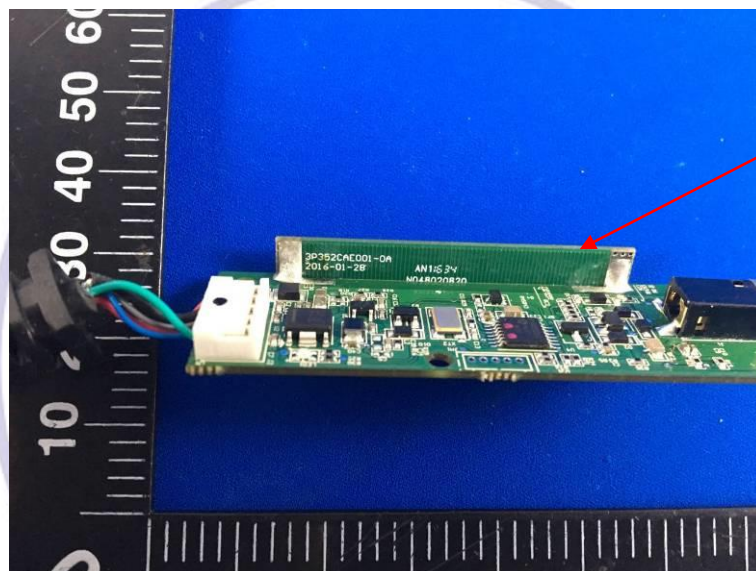

FM  
antenna


#### 4. Test Setup Photos of the EUT





CTL Testing Technology




## 5. External and Internal Photos of the EUT



### External Photos of EUT

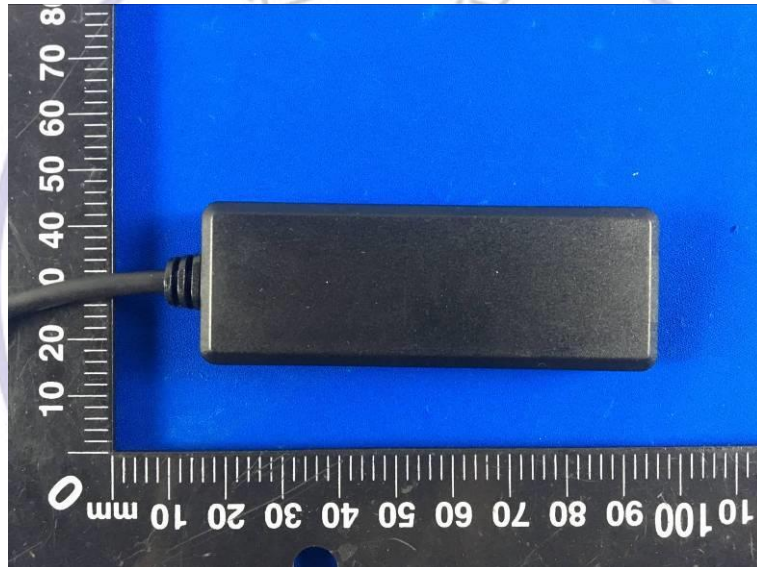

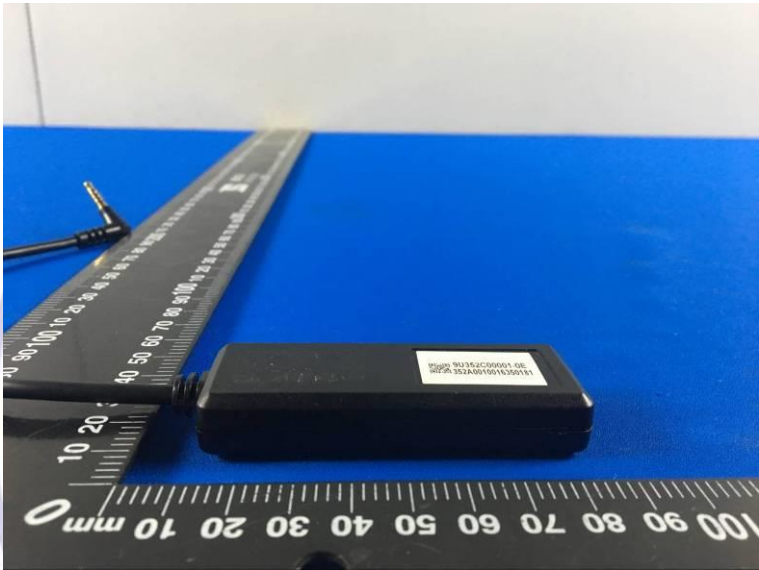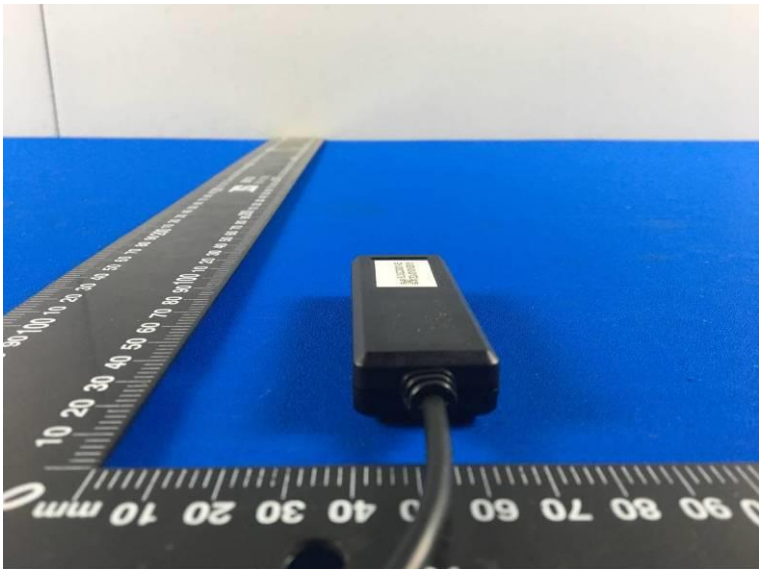

Internal Photos of EUT

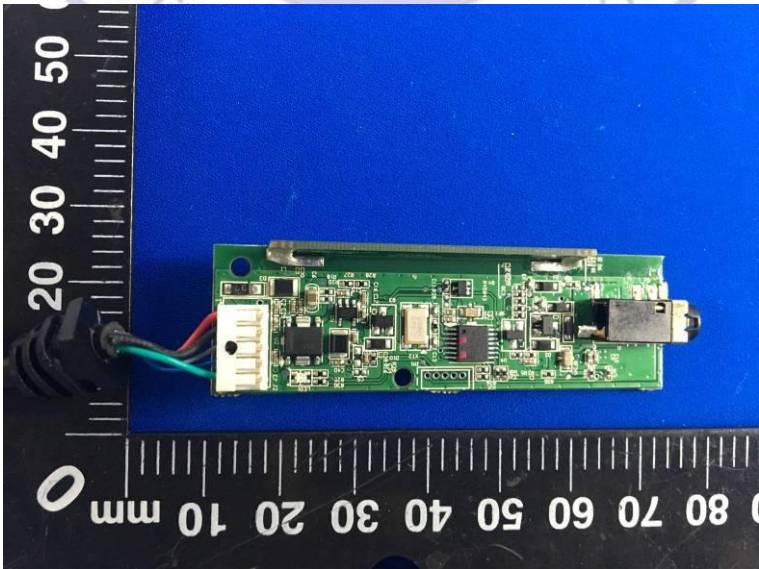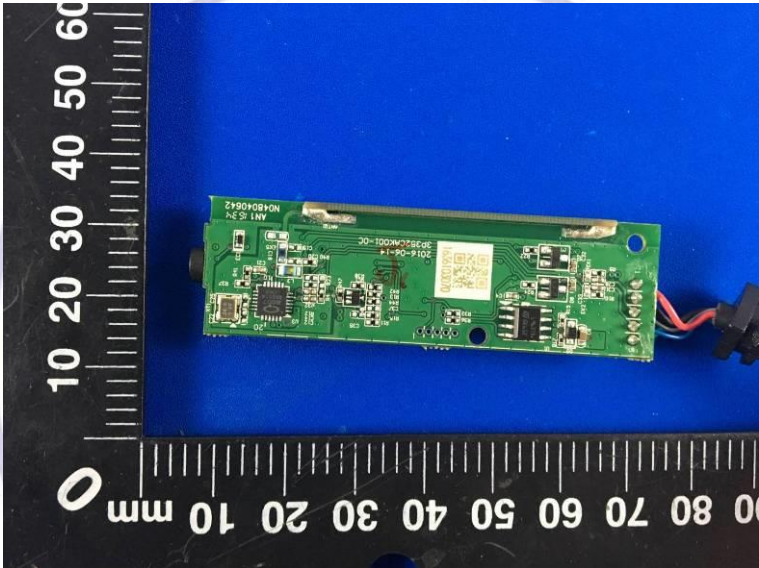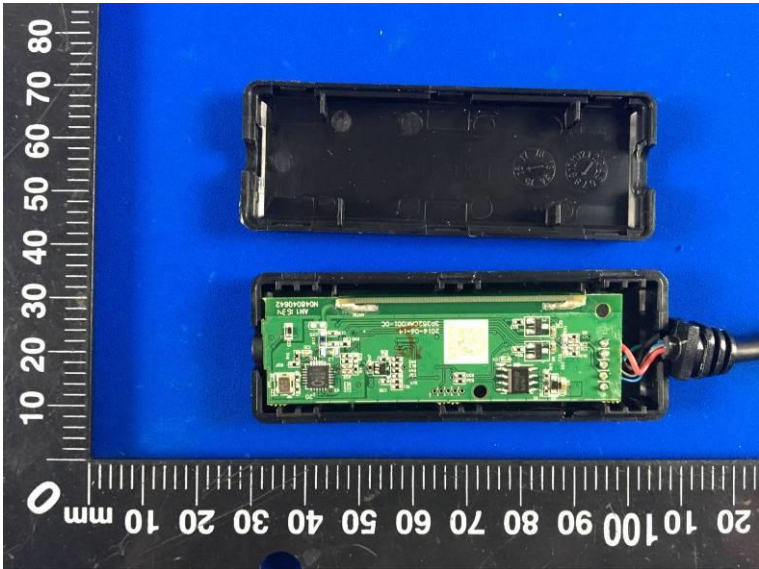

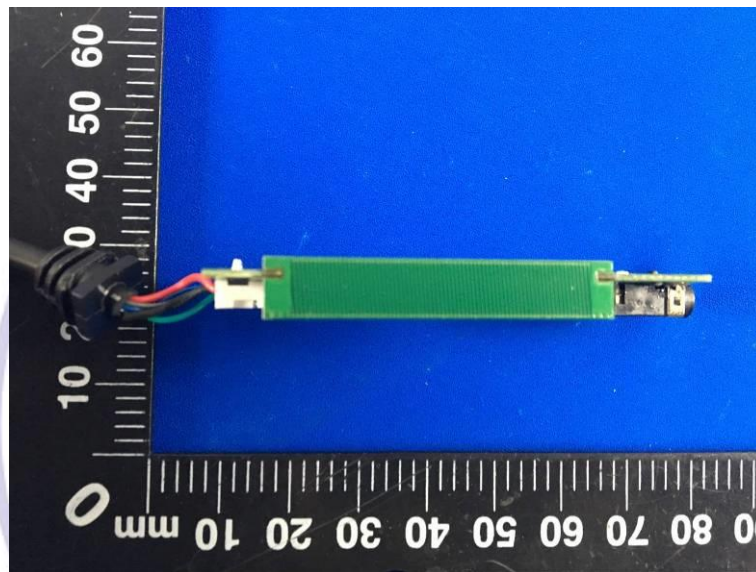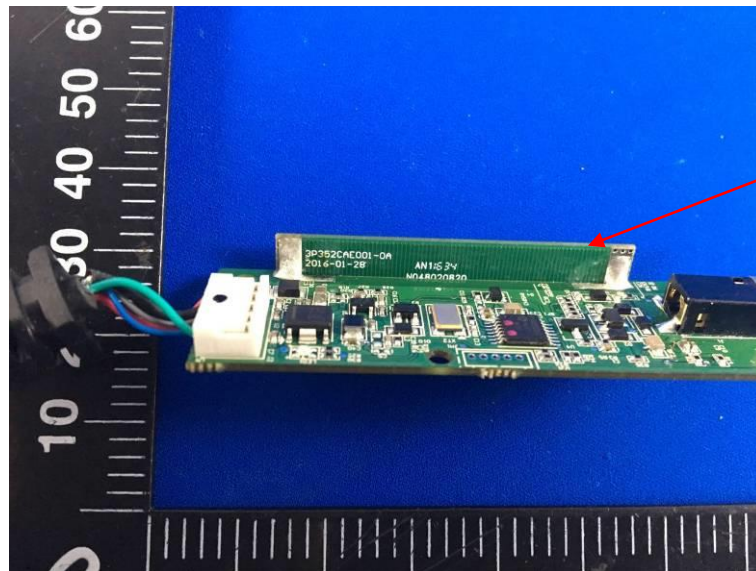

\*\*\*\*\* End of Report \*\*\*\*\*