

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFCDVB-WTW-P25040433-4
FCC ID: QYLBE200NG
Product: 2x2 Wi-Fi and BT, M.2 2230 adapter card
Brand: Getac
Model No.: BE200NGW
Received Date: 2025/4/21
Test Date: 2025/5/14 ~ 2025/6/19
Issued Date: 2025/7/9
Applicant: Getac Technology Corporation.
Address: 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 115018, Taiwan, R.O.C.
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan
FCC Registration / 788550 / TW0003
Designation Number:

Approved by: _____

Jeremy Lin

Jeremy Lin / Project Engineer

, Date: _____

2025/7/9

This test report consists of 35 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Gina Liu / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description	6
3.2 Antenna Description of EUT	7
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	9
3.5 Duty Cycle of Test Signal	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power	12
4.2 AC Power Conducted Emissions	12
4.3 Unwanted Emissions below 1 GHz	13
4.4 Unwanted Emissions above 1 GHz	14
5 Limits of Test Items.....	15
5.1 RF Output Power	15
5.2 AC Power Conducted Emissions	15
5.3 Unwanted Emissions below 1 GHz	15
5.4 Unwanted Emissions above 1 GHz	16
6 Test Arrangements	17
6.1 RF Output Power	17
6.1.1 Test Setup	17
6.1.2 Test Procedure	17
6.2 AC Power Conducted Emissions	17
6.2.1 Test Setup	17
6.2.2 Test Procedure	17
6.3 Unwanted Emissions below 1 GHz	18
6.3.1 Test Setup	18
6.3.2 Test Procedure	19
6.4 Unwanted Emissions above 1 GHz	20
6.4.1 Test Setup	20
6.4.2 Test Procedure	20
7 Test Results of Test Item	21
7.1 RF Output Power	21
7.2 AC Power Conducted Emissions	28
7.3 Unwanted Emissions below 1 GHz	30
7.4 Unwanted Emissions above 1 GHz	32
8 Pictures of Test Arrangements	34
9 Information of the Testing Laboratories	35

Release Control Record

Issue No.	Description	Date Issued
RFCDVB-WTW-P25040433-4	Original release.	2025/7/9

1 Certificate

Product: 2x2 Wi-Fi and BT, M.2 2230 adapter card

Brand: Getac

Test Model: BE200NGW

Sample Status: Engineering sample

Applicant: Getac Technology Corporation.

Test Date: 2025/5/14 ~ 2025/6/19

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	Refer to Note
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note
15.247(d)	Conducted Out of Band Emissions	N/A	Refer to Note
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -17.26 dB at 0.15728 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -1.9 dB at 891.36 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -13.5 dB at 4874.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is MHF-4 not a standard connector.

Notes:

1. Only test item of RF Output Power, Conducted Emissions and Unwanted Emissions were performed for this report. Other testing data please refer to module report No.: 230526-08.TR16 (Brand: Intel® BE200NGW, Model: BE200NGW).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.95 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	2x2 Wi-Fi and BT, M.2 2230 adapter card
Brand	Getac
Test Model	BE200NGW
Host Marketing Name (HMN)	V120,V120Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose)
Status of EUT	Engineering sample
Power Supply Rating	End-product: 19.0 Vdc (from adapter) 7.74 / 11.61 Vdc (from battery)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	Up to 573.5 Mbps (11ax mode) Up to 688 Mbps (11be mode)
Operating Frequency	2.412 GHz ~ 2.472 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), 802.11ax (HE20), 802.11be (EHT20):13 802.11n (HT40), 802.11ax (HE40), 802.11be (EHT40):9
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone
Output Power	304.947 mW (24.84 dBm)

Note:

1. The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product	Brand	Model	Difference
Notebook	Getac	V120	Marketing purpose
		V120Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose)	

2. The End-product contains following accessory devices.

Item	Brand	Model	Specification
Battery 1	Getac	BP2S1P4070P	Power Rating : Rating: 7.74Vdc , 3800mAh, 29.42Wh Typical Capacity: 4070mAh, 31.51Wh
Battery 2	Getac	BP3S1P4070P	Power Rating : Rating: 11.61Vdc , 3800mAh, 44.12Wh Typical Capacity: 4070mAh, 47.26Wh
AC Adapter	FSP	FSP065-RBBN3	AC Input : 100-240 Vac ; 50-60 Hz ; 1.5 A DC Output : 19.0Vdc ; 3.42A, 65.0W DC Output Cable : 1.45M / 1core AC Power Cord : 1.75M
Touch Pen	Getac	340GA8900001	-

*After the pretesting, battery 1 mode is found to be the worse case and therefore had been chosen for final test.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250 MHz	5.3GHz 5250-5350 MHz	5.6GHz 5470-5725 MHz	5.8GHz 5725-5850 MHz	5.9GHz 5850-5895 MHz	6.2GHz 5925-6425 MHz	6.5GHz 6425-6525 MHz	6.7GHz 6525-6875 MHz	7.0GHz 6875-7125 MHz	Antenna Type	Connector Type
Main	2.23	2.25	2.25	2.48	2.48	1.44	2.4	2.28	2.28	1.57	PIFA	MHF-4
Aux.	2.48	1.67	1.67	2.12	2.12	1.42	2.41	2.41	1.99	1.82	PIFA	MHF-4

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	1TX	1RX
802.11g	1TX	1RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11ax (RU26/52/106/242)	2TX	2RX
802.11be (RU26/52/106/242)	2TX	2RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ax mode for 20 MHz (40 MHz) and 802.11be mode for 20 MHz (40 MHz). Therefore, the investigated worst case is the representative mode in test report.

3.3 Channel List

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

3.4 Test Mode Applicability and Tested Channel Detail


Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis/NB-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	1. X-axis/ Y-axis/ Z-axis/NB-axis Worst Condition:X-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
RF Output Power	802.11b	1TX	1, 6, 11, 12, 13	DBPSK	1Mb/s	NA
	802.11g	1TX	1, 6, 11, 12, 13	BPSK	6Mb/s	NA
	802.11be (EHT20)	1TX	1, 6, 11, 12, 13	BPSK	MCS0	NA
	802.11be (EHT40)	1TX	3, 6, 9, 10, 11	BPSK	MCS0	NA
	802.11be (EHT20) 26-tone RU	1TX	1, 13	BPSK	MCS0	0, 8
	802.11be (EHT20) 52-tone RU	1TX	1, 13	BPSK	MCS0	37, 40
	802.11be (EHT20) 106-tone RU	1TX	1, 13	BPSK	MCS0	53, 54
	802.11be (EHT40) 242-tone RU	1TX	3, 11	BPSK	MCS0	61, 62
	802.11be (EHT20)	2TX	1, 6, 11, 12, 13	BPSK	MCS0	NA
	802.11be (EHT40)	2TX	3, 6, 9, 10, 11	BPSK	MCS0	NA
	802.11be (EHT20) 26-tone RU	2TX	1, 13	BPSK	MCS0	0, 8
	802.11be (EHT20) 52-tone RU	2TX	1, 13	BPSK	MCS0	37, 40
	802.11be (EHT20) 106-tone RU	2TX	1, 13	BPSK	MCS0	53, 54
	802.11be (EHT40) 242-tone RU	2TX	3, 11	BPSK	MCS0	61, 62
AC Power Conducted Emissions	802.11be (EHT40)	2TX	6	BPSK	MCS0	NA
Unwanted Emissions below 1 GHz	802.11be (EHT40)	2TX	6	BPSK	MCS0	NA
Unwanted Emissions above 1 GHz	802.11be (EHT40)	1TX	6	BPSK	MCS0	NA
		2TX	6	BPSK	MCS0	NA

3.5 Duty Cycle of Test Signal


802.11be (EHT40): Duty cycle = 4 ms / 4.03 ms x 100% = 99.3%

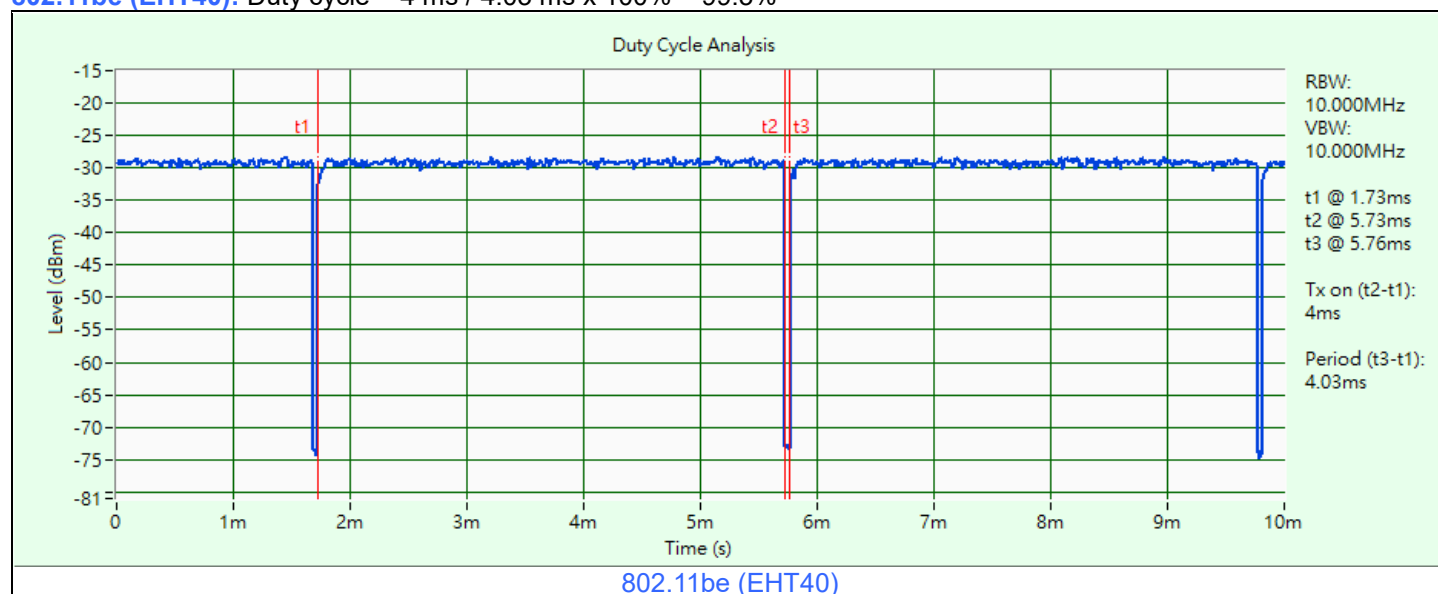

3.6 Test Program Used and Operation Descriptions

Controlling software DRTU has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

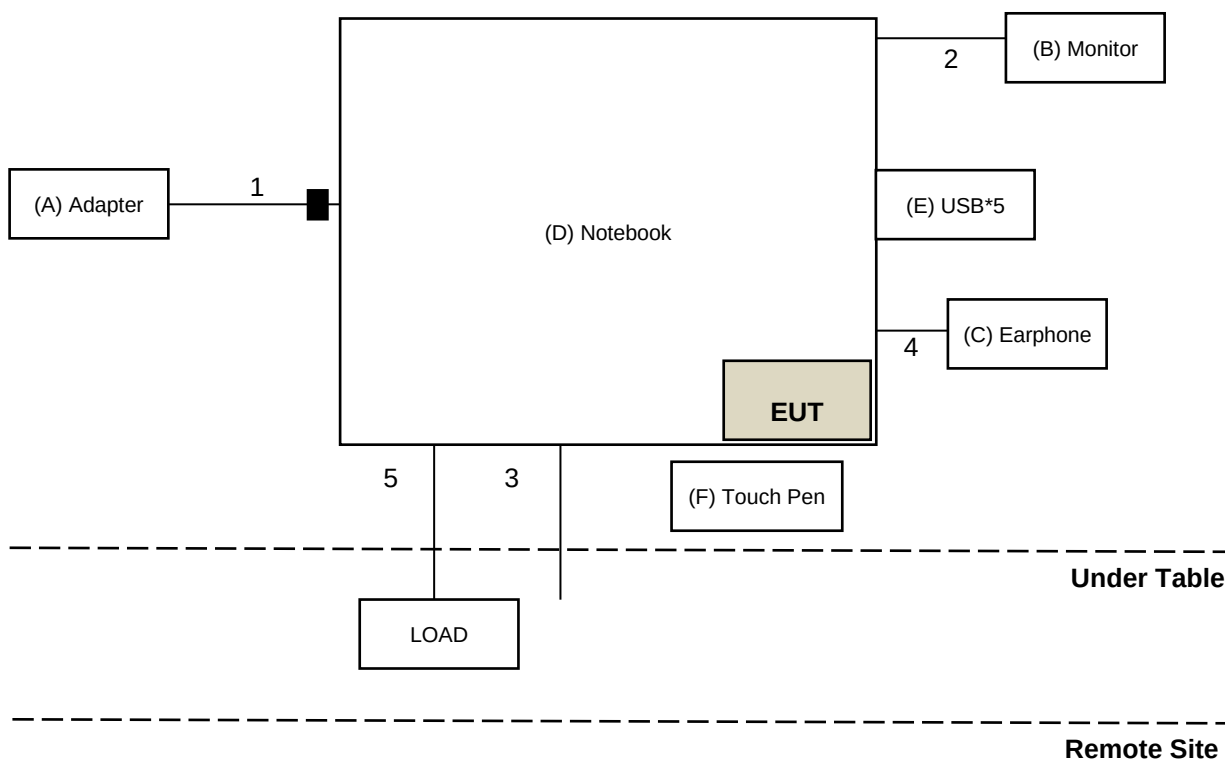

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	FSP	FSP090-ABBN3	N/A	N/A	Supplied by applicant
B	Monitor	DELL	A14S2421HSXmTW	CN-01KWWF-WSL00-24C-711B	N/A	Provided by Lab
C	Earphone	APPLE	MB77PFEB	N/A	N/A	Provided by Lab
D	Notebook	Getac	V120	N/A	N/A	Supplied by applicant
E	USB*5	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
F	Touch Pen	Getac	340GA8900001	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.45	Y	1	Supplied by applicant
2	HDMI	1	1.8	Y	0	Provided by Lab
3	RS232	1	1.5	N	0	Provided by Lab
4	AUDIO	1	1.2	N	0	Provided by Lab
5	LAN	1	1.5	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
Peak Power Analyzer Keysight	8990B	MY51000485	2025/1/20	2026/1/19
Wideband Power Sensor Keysight	N1923A	MY58020002	2025/1/21	2026/1/20
		MY58140009	2025/1/21	2026/1/20

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/6/17 ~ 2025/6/19

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2024/11/28	2025/11/27
	E1-011280	05	2024/11/28	2025/11/27
	E1-011311	09	2024/11/28	2025/11/27
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2024/11/5	2025/11/4
EMI Test Receiver R&S	ESR3	102783	2024/12/17	2025/12/16
Fixed Attenuator STI	BNC5W10dB	PAD-COND2-01	2024/8/25	2025/8/24
LISN R&S	ESH2-Z5	100100	2025/3/5	2026/3/4
	ESH3-Z5	100312	2024/9/9	2025/9/8
RF Coaxial Cable Woken	5D-FB	Cable-cond2-01	2024/8/25	2025/8/24
Software BVADT	BVADT_Conc_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2024/8/28	2025/8/27

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2025/5/14

4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	2024/10/14	2025/10/13
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Agilent	N9038A	MY51210203	2024/8/27	2025/8/26
Preamplifier EMCI	EMC 330H	980112	2024/9/24	2025/9/23
	EMC001340	980201	2024/9/24	2025/9/23
RF Coaxial Cable Woken	8D-FB	Cable-Ch10-01	2024/9/24	2025/9/23
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2025/5/27

4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2024/11/10	2025/11/9
	BBHA 9170	148	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY51210203	2024/8/27	2025/8/26
Preamplifier EMCI	EMC 012645	980115	2024/9/24	2025/9/23
	EMC 184045	980116	2024/9/24	2025/9/23
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2024/7/6	2025/7/5
	EMC102-KM-KM-3000	150929	2024/7/6	2025/7/5
	EMC104-SM-SM- 8000+3000	171005	2024/9/24	2025/9/23
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2024/9/24	2025/9/23
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2025/6/19

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

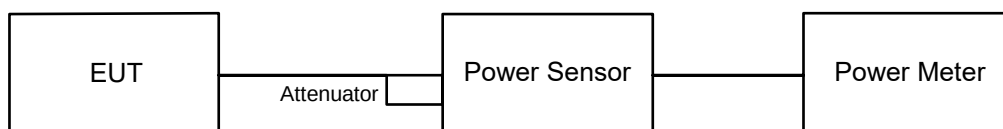

6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

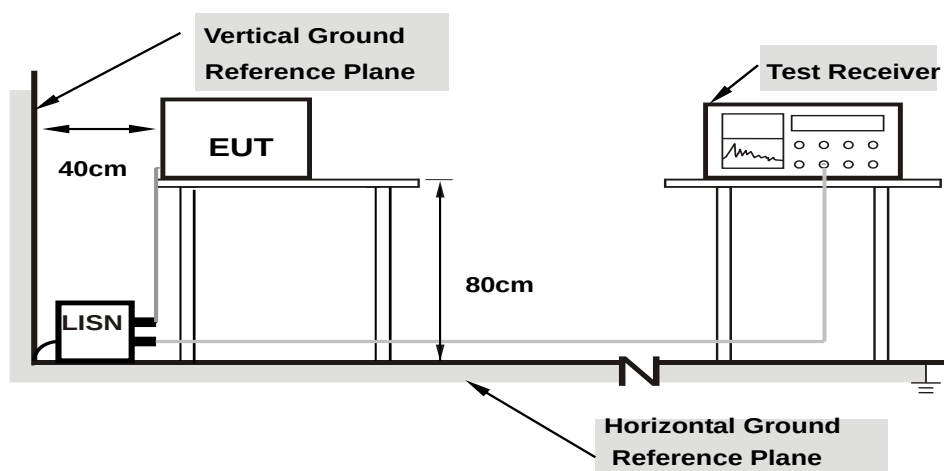

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.3 Unwanted Emissions below 1 GHz

6.3.1 Test Setup

For Radiated emission below 30 MHz

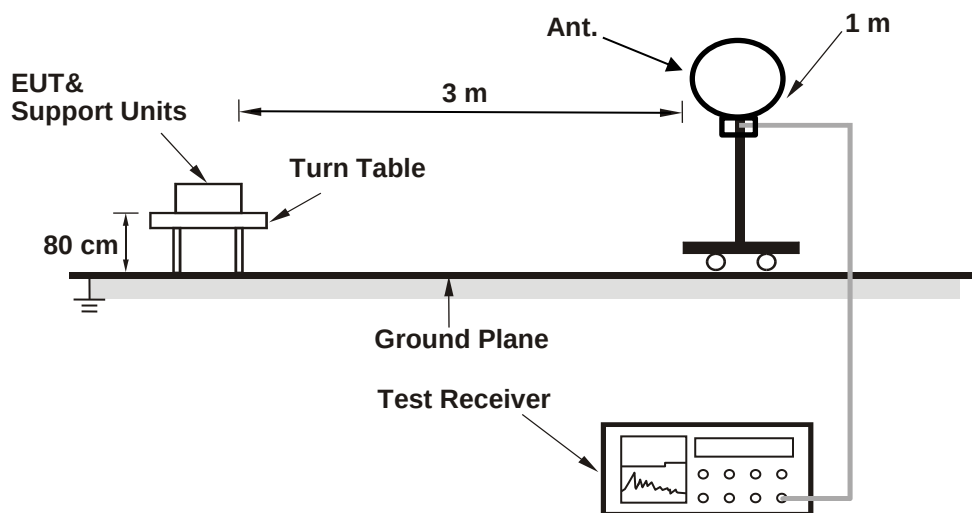

For Radiated emission above 30 MHz

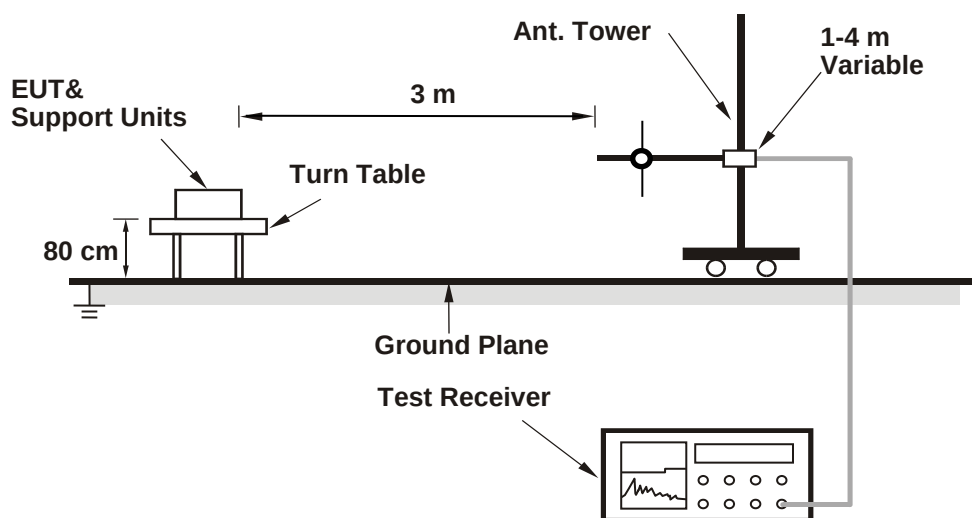

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

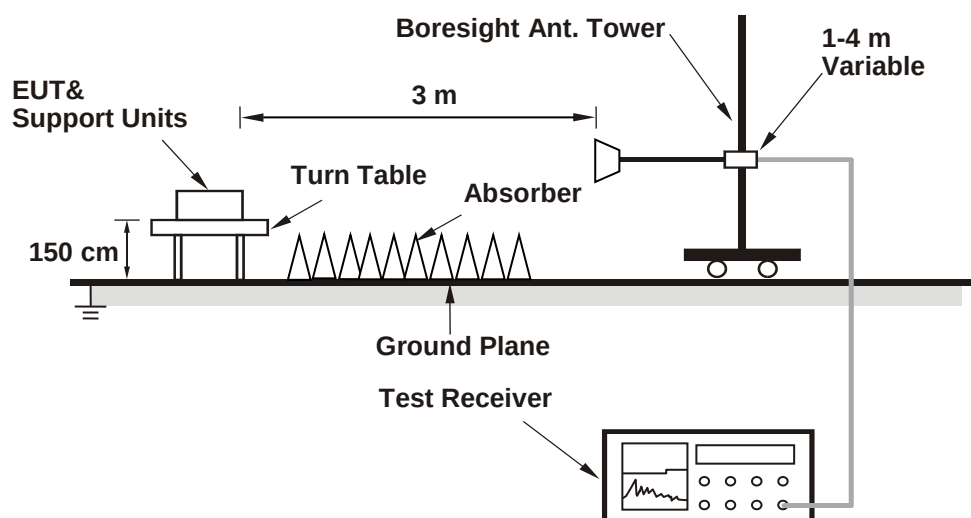

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	7.74 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
--------------	----------	---------------------------	--------------	------------	-----------

1TX

For Peak Power

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	109.901	20.41	30	Pass
6	2437	106.17	20.26	30	Pass
11	2462	96.161	19.83	30	Pass
12	2467	104.954	20.21	30	Pass
13	2472	103.276	20.14	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	178.238	22.51	30	Pass
6	2437	186.209	22.70	30	Pass
11	2462	151.705	21.81	30	Pass
12	2467	170.608	22.32	30	Pass
13	2472	170.608	22.32	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	180.302	22.56	30	Pass
6	2437	169.824	22.30	30	Pass
11	2462	156.315	21.94	30	Pass
12	2467	178.238	22.51	30	Pass
13	2472	175.792	22.45	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
3	2422	219.786	23.42	30	Pass
6	2437	222.844	23.48	30	Pass
9	2452	217.27	23.37	30	Pass
10	2457	205.116	23.12	30	Pass
11	2462	138.676	21.42	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	177.828	22.50	30	Pass
13	2472	21.135	13.25	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	177.828	22.50	30	Pass
13	2472	50.466	17.03	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2412	178.238	22.51	30	Pass
13	2472	174.985	22.43	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) 242-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
3	2422	221.309	23.45	30	Pass
11	2462	137.404	21.38	30	Pass

Note: The antenna gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

For Average Power

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	64.269	18.08
6	2437	64.417	18.09
11	2462	58.345	17.66
12	2467	64.269	18.08
13	2472	63.241	18.01

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	60.814	17.84
6	2437	61.802	17.91
11	2462	61.235	17.87
12	2467	44.055	16.44
13	2472	27.04	14.32

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	60.674	17.83
6	2437	61.944	17.92
11	2462	61.518	17.89
12	2467	45.186	16.55
13	2472	20.091	13.03

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	62.23	17.94
6	2437	62.951	17.99
9	2452	60.395	17.81
10	2457	31.842	15.03
11	2462	15.885	12.01

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	44.771	16.51
13	2472	3.396	5.31

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	38.726	15.88
13	2472	8.892	9.49

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	61.66	17.90
13	2472	19.099	12.81

802.11be (EHT40) 242-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	62.373	17.95
11	2462	15.668	11.95

2TX

For Peak Power

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.57	20.67	207.254	23.17	30	Pass
6	2437	19.65	19.94	190.885	22.81	30	Pass
11	2462	19.38	20.31	194.095	22.88	30	Pass
12	2467	19.68	19.63	184.73	22.67	30	Pass
13	2472	19.91	20.29	204.854	23.11	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	21.59	21.65	290.429	24.63	30	Pass
6	2437	21.70	21.96	304.947	24.84	30	Pass
9	2452	21.65	21.95	302.893	24.81	30	Pass
10	2457	20.07	21.04	228.682	23.59	30	Pass
11	2462	17.81	19.02	140.194	21.47	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.48	20.51	201.176	23.04	30	Pass
13	2472	9.54	11.71	23.82	13.77	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.51	20.60	204.146	23.10	30	Pass
13	2472	17.11	15.77	89.162	19.50	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.53	20.64	205.621	23.13	30	Pass
13	2472	19.86	20.25	202.753	23.07	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) 242-tone RU

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	21.55	21.62	288.101	24.60	30	Pass
11	2462	17.76	19.00	139.136	21.43	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.48 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

For Average Power

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.16	15.08	65.02	18.13
6	2437	15.10	15.12	64.868	18.12
11	2462	15.01	15.06	63.758	18.05
12	2467	14.01	14.27	51.907	17.15
13	2472	10.86	11.34	25.804	14.12

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
3	2422	15.19	15.16	65.846	18.19
6	2437	15.10	15.01	64.055	18.07
9	2452	15.00	15.06	63.685	18.04
10	2457	11.83	12.41	32.659	15.14
11	2462	8.90	9.27	16.215	12.10

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.09	14.98	63.762	18.05
13	2472	4.13	4.68	5.526	7.42

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.11	15.02	64.203	18.08
13	2472	6.88	8.00	11.185	10.49

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.12	15.05	64.528	18.10
13	2472	10.82	11.31	25.599	14.08

802.11be (EHT40) 242-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
3	2422	15.09	15.00	63.908	18.06
11	2462	8.86	9.23	16.067	12.06


7.2 AC Power Conducted Emissions

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 71% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15728	10.25	38.10	19.87	48.35	30.12	65.61	55.61	-17.26	-25.49
2	0.40200	10.29	23.77	18.56	34.06	28.85	57.81	47.81	-23.75	-18.96
3	3.56200	10.41	11.97	3.13	22.38	13.54	56.00	46.00	-33.62	-32.46
4	4.77000	10.42	12.62	3.97	23.04	14.39	56.00	46.00	-32.96	-31.61
5	13.01400	10.49	20.19	6.95	30.68	17.44	60.00	50.00	-29.32	-32.56
6	20.00600	10.63	15.98	4.43	26.61	15.06	60.00	50.00	-33.39	-34.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

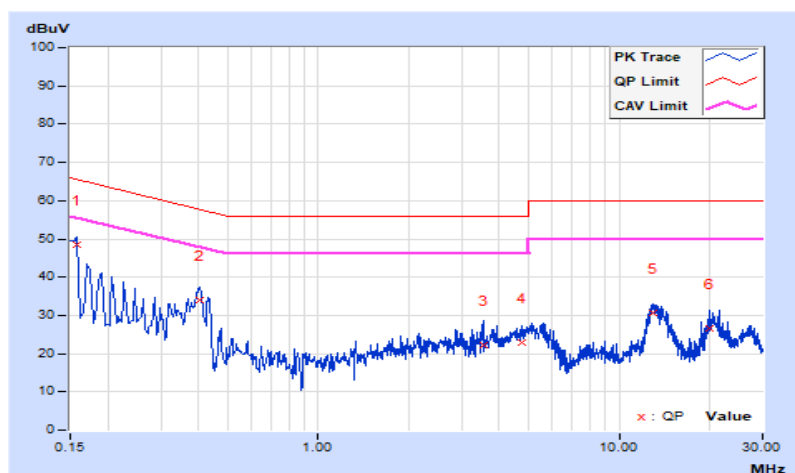


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 71% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.30	36.31	20.82	46.61	31.12	65.78	55.78	-19.17	-24.66
2	0.16977	10.30	32.13	17.87	42.43	28.17	64.97	54.97	-22.54	-26.80
3	0.40200	10.32	25.60	20.15	35.92	30.47	57.81	47.81	-21.89	-17.34
4	4.92600	10.48	13.71	6.90	24.19	17.38	56.00	46.00	-31.81	-28.62
5	13.16600	10.63	17.84	9.30	28.47	19.93	60.00	50.00	-31.53	-30.07
6	20.39400	10.83	18.59	7.78	29.42	18.61	60.00	50.00	-30.58	-31.39

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

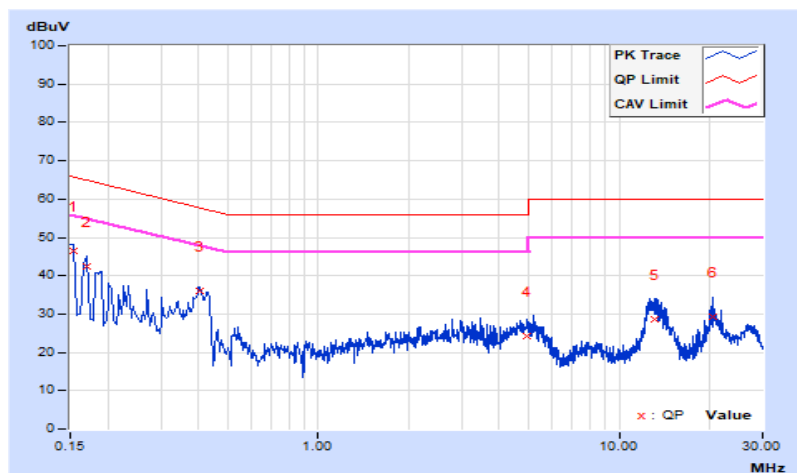


7.3 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.62	37.7 QP	40.0	-2.3	2.00 H	243	53.3	-15.6
2	122.15	40.9 QP	43.5	-2.6	1.00 H	359	54.8	-13.9
3	147.37	38.0 QP	43.5	-5.5	2.00 H	264	50.3	-12.3
4	211.39	38.2 QP	43.5	-5.3	1.00 H	239	53.6	-15.4
5	346.22	40.9 QP	46.0	-5.1	1.00 H	180	51.5	-10.6
6	891.36	44.1 QP	46.0	-1.9	1.00 H	147	44.5	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

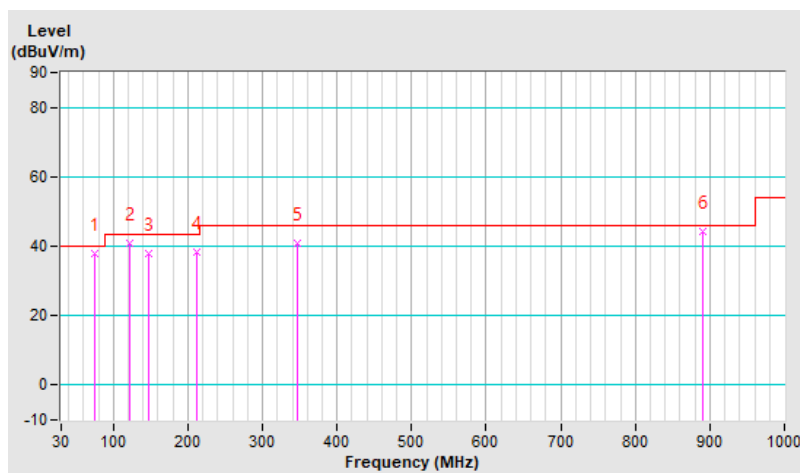


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.70	35.1 QP	40.0	-4.9	1.00 V	252	47.6	-12.5
2	74.62	37.6 QP	40.0	-2.4	1.00 V	286	53.2	-15.6
3	149.31	40.2 QP	43.5	-3.3	1.00 V	320	52.4	-12.2
4	593.57	43.2 QP	46.0	-2.8	1.00 V	58	48.2	-5.0
5	792.42	41.3 QP	46.0	-4.7	1.00 V	265	42.1	-0.8
6	882.63	40.5 QP	46.0	-5.5	1.00 V	225	41.0	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

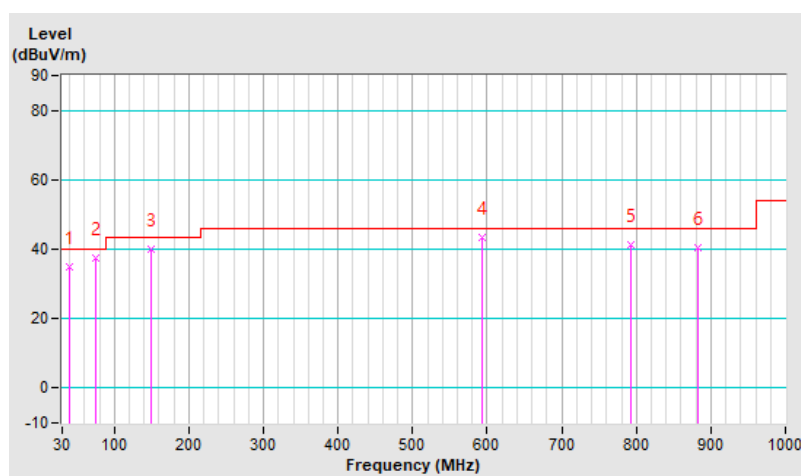

7.4 Unwanted Emissions above 1 GHz

1TX

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66.7% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.5 PK			2.55 H	30	69.2	35.3
2	*2437.00	91.0 AV			2.55 H	30	55.7	35.3
3	4874.00	53.8 PK	74.0	-20.2	2.05 H	162	41.8	12.0
4	4874.00	40.2 AV	54.0	-13.8	2.05 H	162	28.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.2 PK			3.16 V	195	69.9	35.3
2	*2437.00	92.7 AV			3.16 V	195	57.4	35.3
3	4874.00	54.0 PK	74.0	-20.0	1.61 V	96	42.0	12.0
4	4874.00	40.4 AV	54.0	-13.6	1.61 V	96	28.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

2TX

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66.7% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.6 PK			1.43 H	302	69.3	35.3
2	*2437.00	91.1 AV			1.43 H	302	55.8	35.3
3	4874.00	53.7 PK	74.0	-20.3	2.25 H	292	41.7	12.0
4	4874.00	40.4 AV	54.0	-13.6	2.25 H	292	28.4	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.5 PK			2.51 V	58	70.2	35.3
2	*2437.00	92.9 AV			2.51 V	58	57.6	35.3
3	4874.00	54.2 PK	74.0	-19.8	1.49 V	168	42.2	12.0
4	4874.00	40.5 AV	54.0	-13.5	1.49 V	168	28.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---