

#01_WLAN2.4GHz_802.11b 1Mbps_Top_0mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2462 MHz

Medium: HSL_600~7200_260808 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 40.641$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.97, 6.34, 8.08) @ 2462 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.01 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.08 W/kg

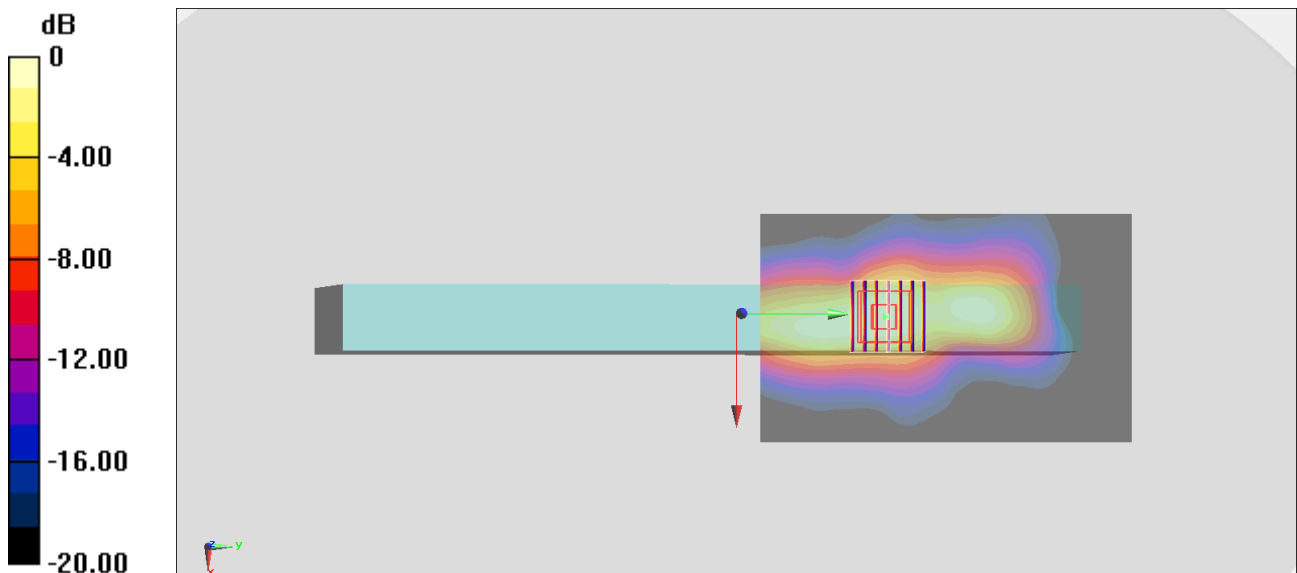

0 dB = 1.08 W/kg = 0.33 dBW/kg

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Top_0mm_Ch50

Communication System: UID 10554 - AAE, IEEE 802.11ac WiFi ; Frequency: 5250 MHz

Medium: HSL_600~7200_260809 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.445$ S/m; $\epsilon_r = 35.68$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.23, 5.35, 5.26) @ 5250 MHz; Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2026/1/15
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.23 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 11.87 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 1.35 W/kg

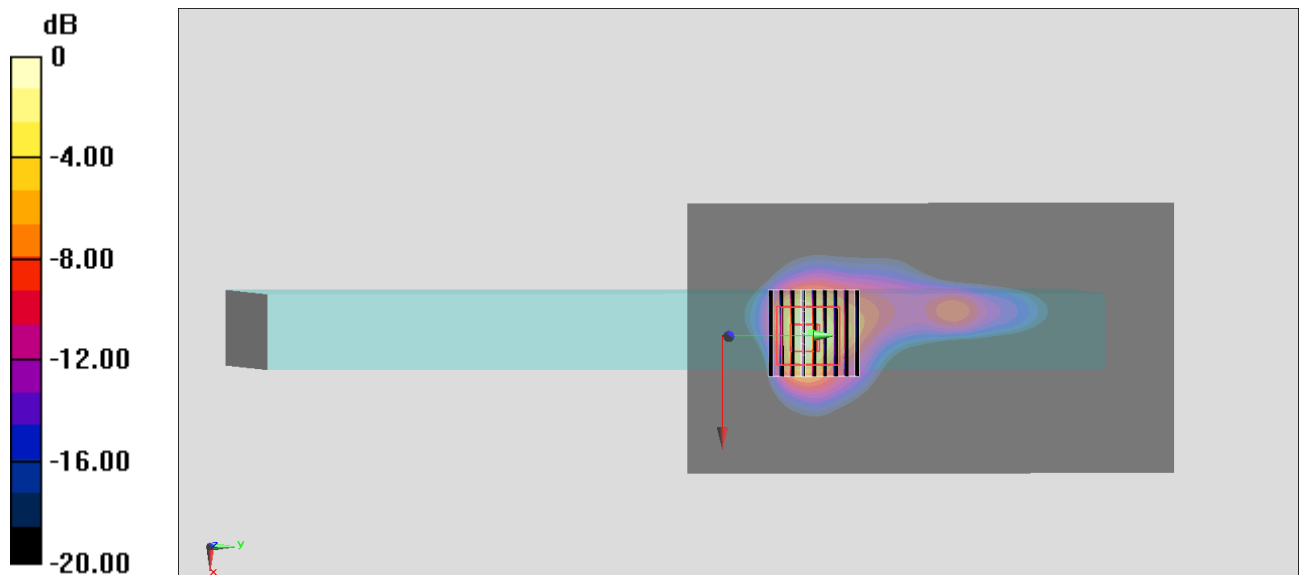

0 dB = 1.35 W/kg = 1.31 dBW/kg

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Top_0mm_Ch114

Communication System: UID 10554 - AAE, IEEE 802.11ac WiFi ; Frequency: 5570 MHz

Medium: HSL_600~7200_260809 Medium parameters used : $f = 5570$ MHz; $\sigma = 4.801$ S/m; $\epsilon_r = 35.131$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.73, 4.84, 4.76) @ 5570 MHz; Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2026/1/15
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 15.28 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 1.39 W/kg

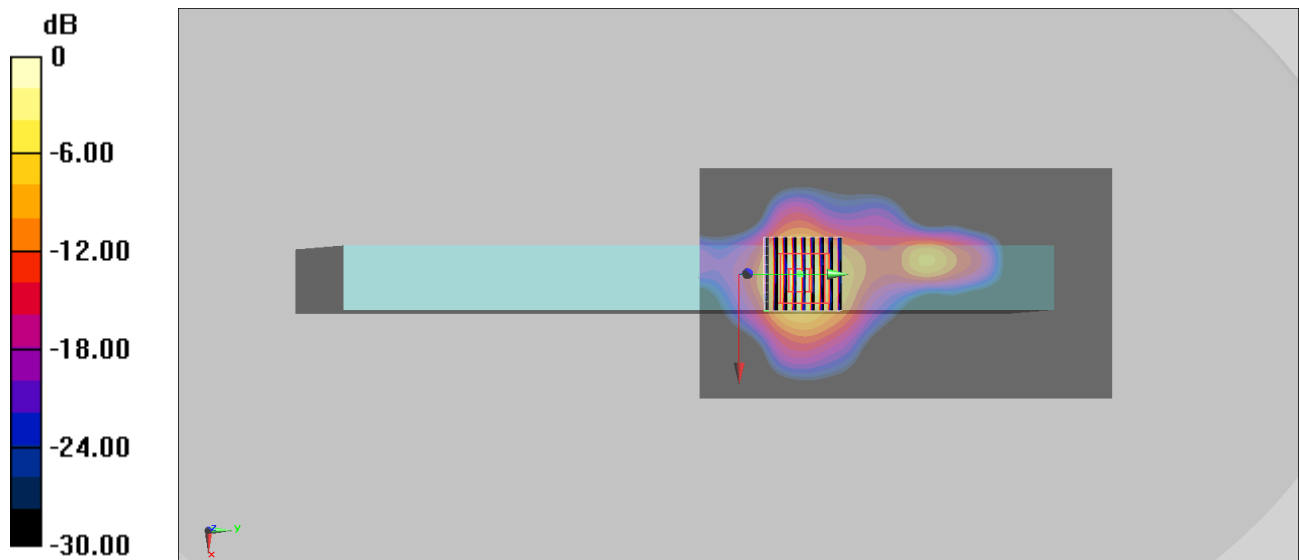

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Top_0mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_600~7200_260809 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.046$ S/m; $\epsilon_r = 34.713$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.76, 4.87, 4.79) @ 5775 MHz; Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2026/1/15
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x91x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.81 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 1.47 W/kg

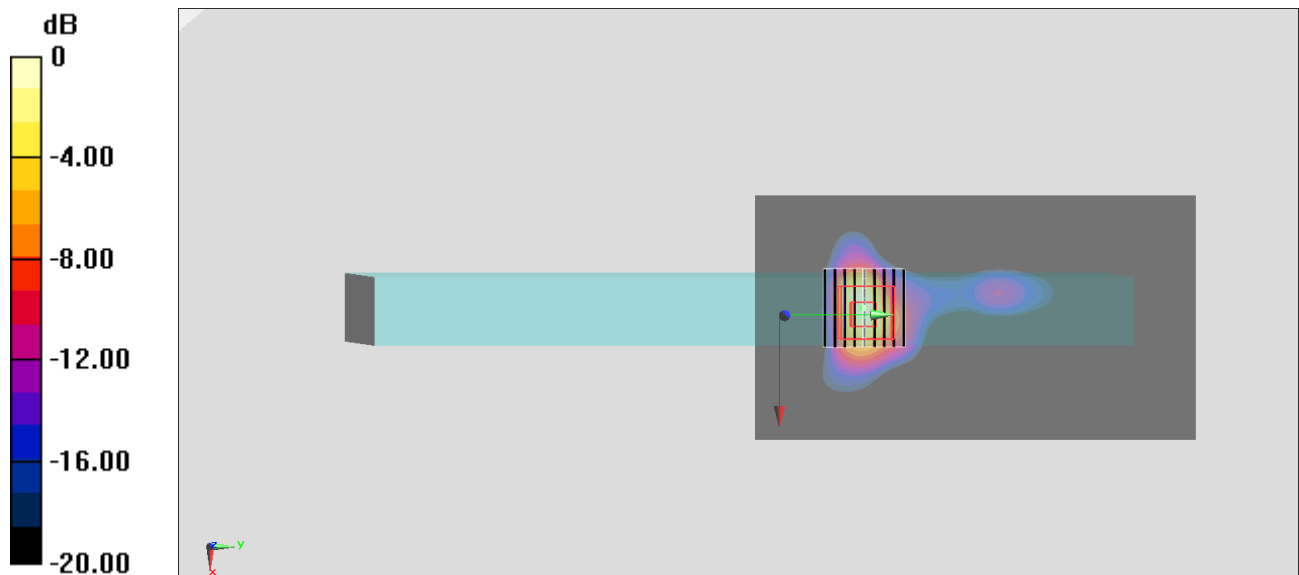

0 dB = 1.47 W/kg = 1.68 dBW/kg

#05_WLAN5GHz_802.11ac-VHT160 MCS0_Top_0mm_Ch163

Communication System: UID 10554 - AAE, IEEE 802.11ac WiFi ; Frequency: 5815 MHz

Medium: HSL_600~7200_260809 Medium parameters used: $f = 5815$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 34.799$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.76, 4.87, 4.79) @ 5815 MHz; Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2026/1/15
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x91x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.65 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.41 W/kg

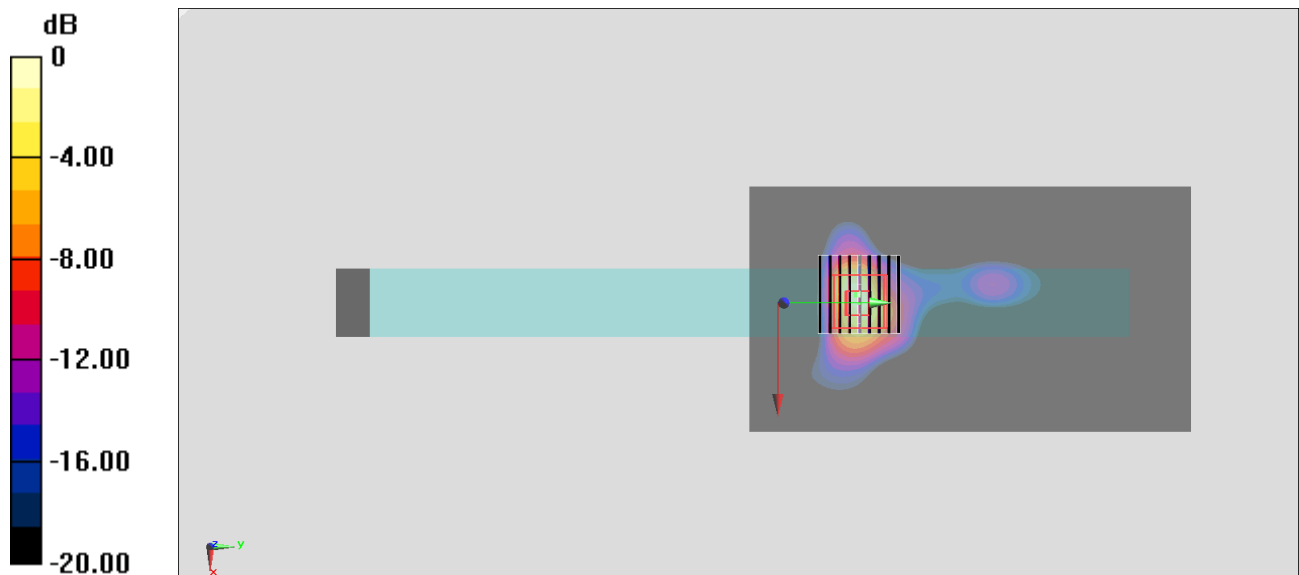

0 dB = 1.41 W/kg = 1.48 dBW/kg

#06_WLAN6GHz_802.11be-EHT320 MCS0_Top_0mm_Ch31

Communication System: WiFi (802.11be); Frequency: 6105.000 MHz

Medium: HSL_600-7200_260809 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(5.04, 5.16, 5.08); Calibrated: 2026-07-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026

Area Scan (85.0 mm x 170.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.03 dB


SAR (1g) = 0.509 W/kg; SAR (8g) = 0.191 W/kg; SAR (10g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.0 %

psAPD (1.0cm², sq) = 5.09 [W/m²]; psAPD (4.0cm², sq) = 3.82 [W/m²]

TSL Correction: Positive only

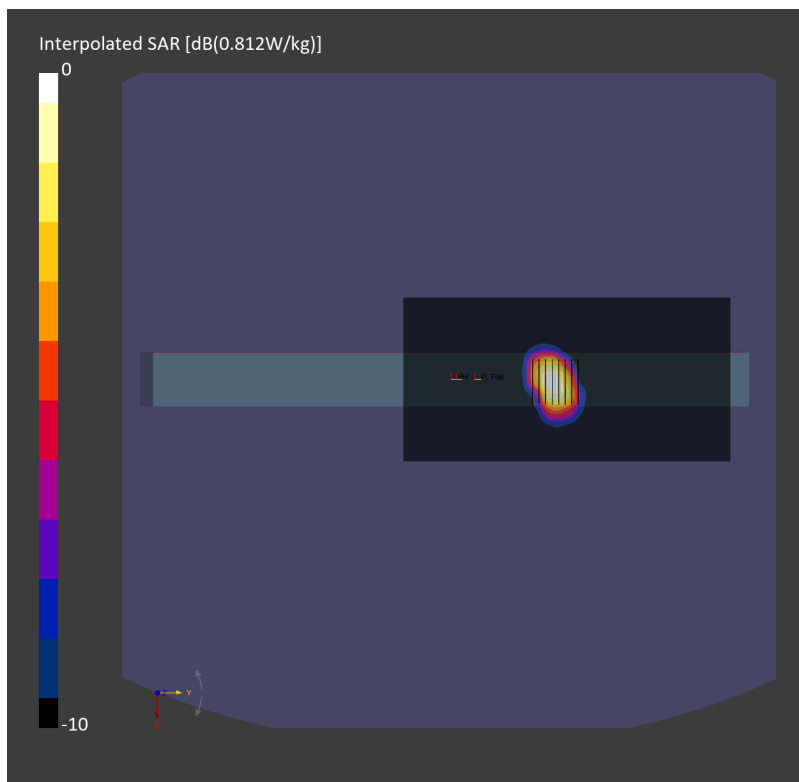

#07_Bluetooth_1Mbps_Left_0mm_Ch78

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2480 MHz

Medium: HSL_600~7200_260808 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 40.623$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.97, 6.34, 8.08) @ 2480 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.749 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.52 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.741 W/kg

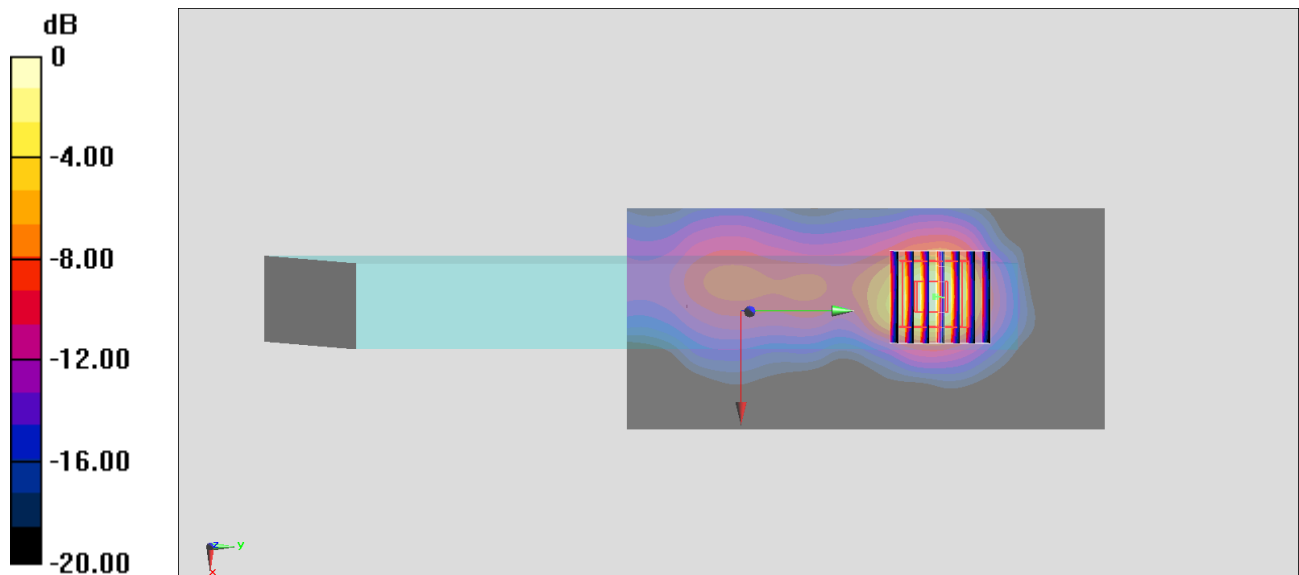

0 dB = 0.741 W/kg = -1.30 dBW/kg