



# FCC RADIO TEST REPORT

FCC ID : QYLEM9190B  
Equipment : Wireless Module  
Brand Name : Getac  
Model Name : EM9190  
Applicant : Getac Technology Corporation.  
5F., Building A, No. 209, Sec.1, Nangang Rd.,  
Nangang Dist., Taipei City 11568, Taiwan, R.O.C.  
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Dec. 21, 2020 and testing was started from Jan. 27, 2021 and completed on Mar. 05, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                    | <b>3</b>  |
| <b>Summary of Test Result.....</b>                         | <b>4</b>  |
| <b>1 General Description .....</b>                         | <b>5</b>  |
| 1.1 Product Feature of Equipment Under Test .....          | 5         |
| 1.2 Modification of EUT .....                              | 6         |
| 1.3 Testing Location .....                                 | 6         |
| 1.4 Applicable Standards .....                             | 7         |
| <b>2 Test Configuration of Equipment Under Test .....</b>  | <b>8</b>  |
| 2.1 Test Mode.....                                         | 8         |
| 2.2 Connection Diagram of Test System .....                | 8         |
| 2.3 Support Unit used in test configuration .....          | 9         |
| 2.4 Frequency List of Low/Middle/High Channels .....       | 9         |
| <b>3 Conducted Test Result .....</b>                       | <b>10</b> |
| 3.1 Measuring Instruments.....                             | 10        |
| 3.2 Conducted Output Power and ERP/EIRP .....              | 11        |
| <b>4 Radiated Test Items .....</b>                         | <b>12</b> |
| 4.1 Measuring Instruments.....                             | 12        |
| 4.2 Test Setup .....                                       | 12        |
| 4.3 Test Result of Radiated Test.....                      | 13        |
| 4.4 Field Strength of Spurious Radiation Measurement ..... | 14        |
| <b>5 List of Measuring Equipment.....</b>                  | <b>15</b> |
| <b>6 Uncertainty of Evaluation .....</b>                   | <b>17</b> |
| <b>Appendix A. Test Results of Conducted Test</b>          |           |
| <b>Appendix B. Test Results of Radiated Test</b>           |           |
| <b>Appendix C. Test Setup Photographs</b>                  |           |



## History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| FG0D2108A  | 01      | Initial issue of report | Mar. 11, 2021 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## Summary of Test Result

| Report Clause | Ref Std. Clause                                     | Test Items                                                                          | Result (PASS/FAIL) | Remark                                     |
|---------------|-----------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|--------------------------------------------|
| 3.2           | §2.1046                                             | Conducted Output Power                                                              | Pass               | -                                          |
|               | §22.913 (a)(2)                                      | Effective Radiated Power (WCDMA Band V)                                             |                    |                                            |
|               | §24.232 (c)                                         | Equivalent Isotropic Radiated Power (WCDMA Band II)                                 |                    |                                            |
|               | §27.50 (d)(4)                                       | Equivalent Isotropic Radiated Power (WCDMA Band IV)                                 |                    |                                            |
| -             | §24.232 (d)                                         | Peak-to-Average Ratio                                                               | -                  | See Note                                   |
| -             | §2.1049<br>§22.917 (b)<br>§24.238 (b)<br>§27.53 (g) | Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)                   | -                  | See Note                                   |
| -             | §2.1051<br>§22.917 (a)<br>§24.238 (a)<br>§27.53 (g) | Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)                | -                  | See Note                                   |
| -             | §2.1051<br>§22.917 (a)<br>§24.238 (a)<br>§27.53 (g) | Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)                   | -                  | See Note                                   |
| -             | §2.1055<br>§22.355<br>§24.235<br>§27.54             | Frequency Stability Temperature & Voltage                                           | -                  | See Note                                   |
| 4.4           | §2.1053<br>§22.917 (a)<br>§24.238 (a)<br>§27.53 (h) | Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass               | Under limit<br>33.60 dB at<br>7518.000 MHz |

**Note:** The module (Model: EM9190) makes no difference after verifying output power, this report reuses test data from the module report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by:** Wii Chang

**Report Producer:** Celery Wei



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, and GNSS.

| Product Specification subjective to this standard |                                                                     |
|---------------------------------------------------|---------------------------------------------------------------------|
| Sample 1                                          | EUT with Host 1                                                     |
| Sample 2                                          | EUT with Host 2                                                     |
| Antenna Type                                      | WWAN: PIFA Antenna<br>GPS/Glonass/BDS/Galileo/SBAS: PATCH Antenna   |
| Antenna Gain                                      | Cellular Band: 0.95 dBi<br>PCS Band: 2.28 dBi<br>AWS Band: 2.64 dBi |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

The product was installed into Notebook (Brand Name: Getac, Model Name: B360, B360 Pro) during test, and the host information was recorded in the following table.

| Host Information |                 |
|------------------|-----------------|
| Host 1           | Host with SKU A |
| Host 2           | Host with SKU B |

| Host Sample Information     |              |              |
|-----------------------------|--------------|--------------|
| B360                        | SKUA         | SKUB         |
| CPU                         | i7-10610U    | i7-10710U    |
| Memory(DDR4)                | 8G           | 8G           |
| Storage(OPAL SSD)           | Main:256GB   | Main:256GB   |
|                             | Second:256GB | Second:256GB |
| WLAN                        | AX200NGW     | AX200NGW     |
| WWAN                        | EM9190       | EM9190       |
| Camera FN20FF-679H (RGB)    | N/A          | v            |
| Camera FN23FF-678H (RGB+IR) | v            | N/A          |
| FINGERPRINT                 | v            | v            |
| VGA                         | v            | N/A          |
| HDMI                        | v            | v            |
| RS232                       | v            | v            |
| LAN                         | v            | v            |
| USB                         | v            | v            |
| USB3.1 Type C               | N/A          | v            |
| Smart Card                  | v            | v            |
| SD Card Reader              | N/A          | N/A          |
| ODD(Expansion)              | N/A          | v            |
| RS232(Expansion)            | N/A          | v            |
| Touch Screen                | v            | v            |
| PCMCIA                      | v            | v            |
| GPS                         | v            | v            |



## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Test Site          | Sporton International Inc. EMC & Wireless Communications Laboratory                                                       |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist.,<br>Taoyuan City 333, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | <b>Sporton Site No.</b><br>TH05-HY                                                                                        |
| Test Engineer      | Hao Syu and Howard Lin                                                                                                    |
| Temperature        | 20.3~23.6℃                                                                                                                |
| Relative Humidity  | 43.3~54.3%                                                                                                                |

|                    |                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | Sporton International Inc. Wensan Laboratory                                                                                                     |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,<br>Taoyuan City 333010, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |
| Test Site No.      | <b>Sporton Site No.</b><br>03CH12-HY (TAF Code: 3786)                                                                                            |
| Test Engineer      | Jack Cheng, Lance Chiang and Chuan Chu                                                                                                           |
| Temperature        | 24.3~26.4℃                                                                                                                                       |
| Relative Humidity  | 58~66%                                                                                                                                           |
| Remark             | The Radiated test item subcontracted to Sporton International Inc. Wensan Laboratory                                                             |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



## **1.4 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes    |                     |                     |
|---------------|---------------------|---------------------|
| Band          | Radiated TCs        | Conducted TCs       |
| WCDMA Band V  | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |

### 2.2 Connection Diagram of Test System

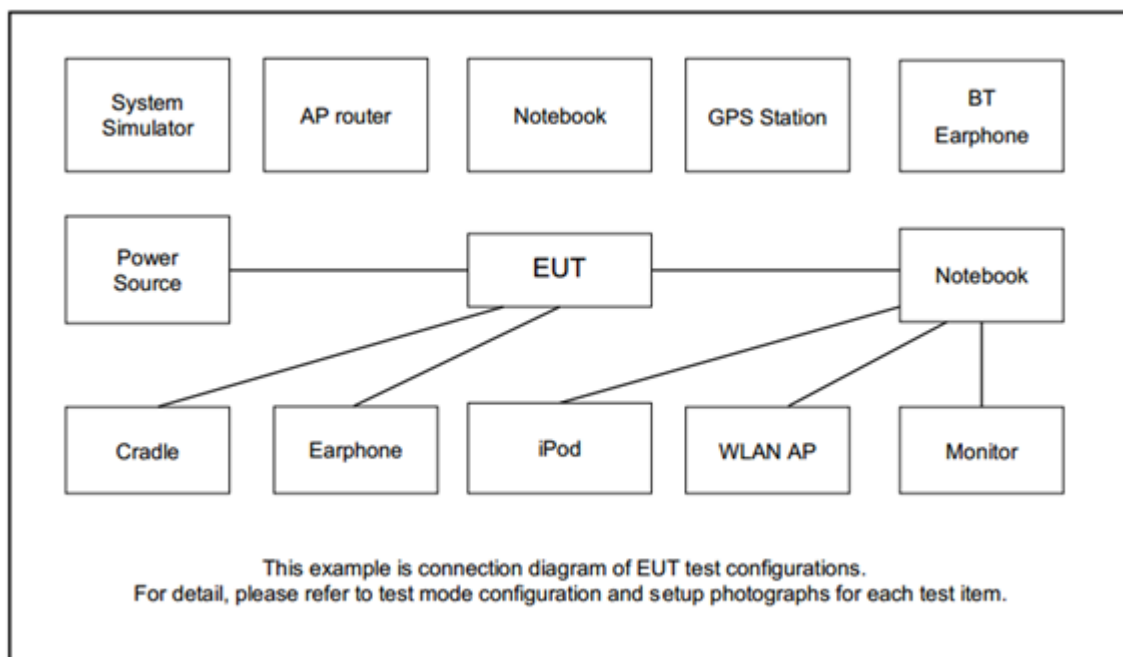



## 2.3 Support Unit used in test configuration

| Item | Equipment        | Brand Name | Model No. | FCC ID       | Data Cable        | Power Cord        |
|------|------------------|------------|-----------|--------------|-------------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A          | N/A               | Unshielded, 1.8 m |
| 2.   | iPod Earphone    | Apple      | N/A       | Verification | Unshielded, 1.0 m | N/A               |

## 2.4 Frequency List of Low/Middle/High Channels

| Frequency List   |                        |        |        |         |
|------------------|------------------------|--------|--------|---------|
| Band             | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| WCDMA<br>Band V  | Channel                | 4132   | 4182   | 4233    |
|                  | Frequency              | 826.4  | 836.4  | 846.6   |
| WCDMA<br>Band II | Channel                | 9262   | 9400   | 9538    |
|                  | Frequency              | 1852.4 | 1880.0 | 1907.6  |
| WCDMA<br>Band IV | Channel                | 1312   | 1413   | 1513    |
|                  | Frequency              | 1712.4 | 1732.6 | 1752.6  |


### 3 Conducted Test Result

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

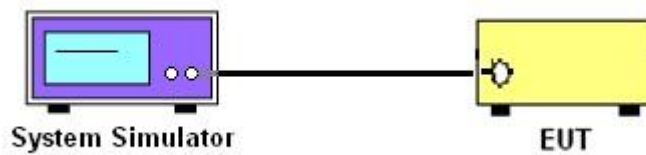

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated test below 30MHz

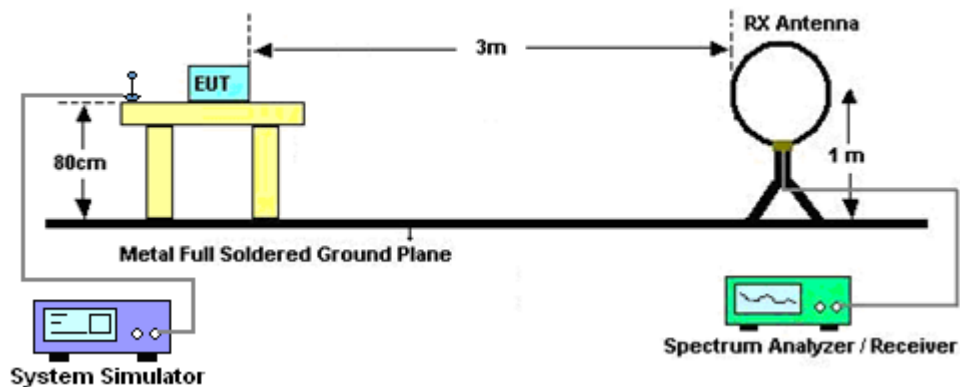

For radiated test from 30MHz to 1GHz

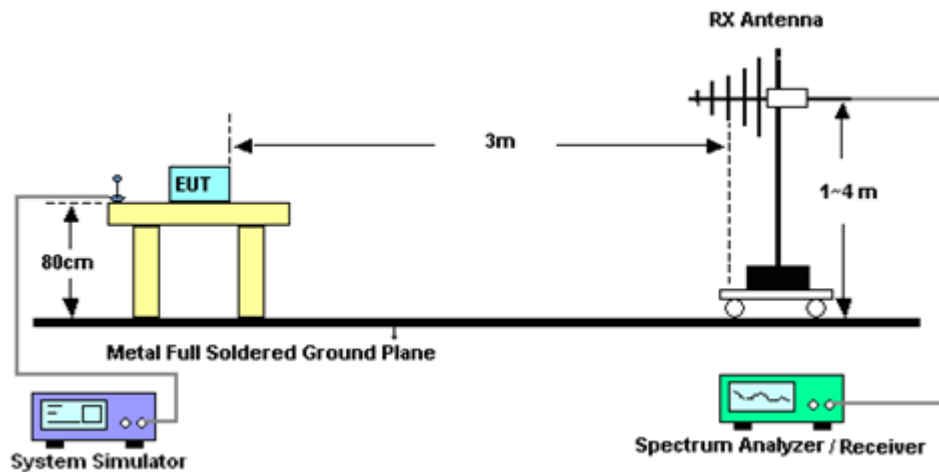

For radiated test above 1GHz

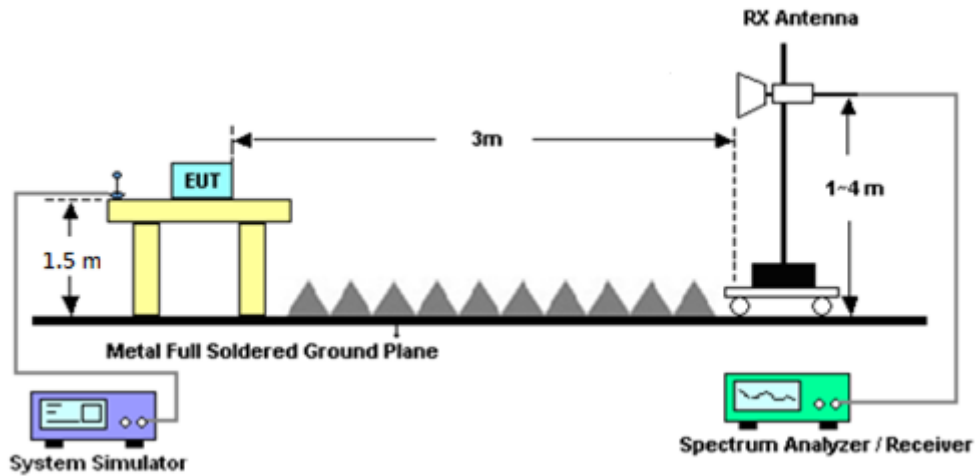

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## **4.4 Field Strength of Spurious Radiation Measurement**

### **4.4.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **4.4.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

| Instrument              | Brand Name                 | Model No.                         | Serial No.      | Characteristics                  | Calibration Date | Test Date                       | Due Date      | Remark                   |
|-------------------------|----------------------------|-----------------------------------|-----------------|----------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Loop Antenna            | Rohde & Schwarz            | HFH2-Z2                           | 100488          | 9 kHz~30 MHz                     | Jul. 14, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Jul. 13, 2021 | Radiation<br>(03CH12-HY) |
| Bilog Antenna           | TESEQ                      | CBL 6111D &<br>00800N1D01N<br>-06 | 40103 & 07      | 30MHz~1GHz                       | Apr. 29, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Apr. 28, 2021 | Radiation<br>(03CH12-HY) |
| Horn Antenna            | SCHWARZBE<br>CK            | BBHA 9120 D                       | 9120D-1328      | 1GHz~18GHz                       | Nov. 23, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Nov. 22, 2021 | Radiation<br>(03CH12-HY) |
| Horn Antenna            | SCHWARZBE<br>CK            | BBHA 9120D                        | 9120D-1241      | 1GHz ~ 18GHz                     | Jul. 15, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Jul. 14, 2021 | Radiation<br>(03CH12-HY) |
| SHF-EHF Horn<br>Antenna | SCHWARZBE<br>CK            | BBHA 9170                         | BBHA917058<br>4 | 18GHz~40GHz                      | Dec. 11, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Dec. 10, 2021 | Radiation<br>(03CH12-HY) |
| SHF-EHF Horn<br>Antenna | SCHWARZBE<br>CK            | BBHA 9170                         | BBHA917057<br>6 | 18GHz ~ 40GHz                    | May 22, 2020     | Jan. 27, 2021~<br>Feb. 02, 2021 | May 21, 2021  | Radiation<br>(03CH12-HY) |
| Preamplifier            | COM-POWER                  | PA-103                            | 161075          | 10MHz~1GHz                       | Mar. 25, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Mar. 24, 2021 | Radiation<br>(03CH12-HY) |
| Preamplifier            | Keysight                   | 83017A                            | MY57280120      | 1GHz~26.5GHz                     | Jul. 20, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Jul. 19, 2021 | Radiation<br>(03CH12-HY) |
| Preamplifier            | E-INSTRUME<br>NT TECH LTD. | ERA-100M-18<br>G-56-01-A70        | EC1900249       | 1GHz~18GHz                       | Dec. 05, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Dec. 04, 2021 | Radiation<br>(03CH12-HY) |
| Preamplifier            | EMEC                       | EM18G40G                          | 060715          | 18GHz~40GHz                      | Dec. 11, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Dec. 10, 2021 | Radiation<br>(03CH12-HY) |
| Spectrum<br>Analyzer    | Agilent                    | N9010A                            | MY54200485      | 10Hz~44GHz                       | Feb. 10, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Feb. 09, 2021 | Radiation<br>(03CH12-HY) |
| Signal<br>Generator     | Anritsu                    | MG3694C                           | 163401          | 0.1Hz~40GHz                      | Feb. 15, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Feb. 14, 2021 | Radiation<br>(03CH12-HY) |
| RF Cable                | HUBER +<br>SUHNER          | SUCOFLEX<br>104                   | MY9837/4PE      | 9kHz~30MHz                       | Mar. 12, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Mar. 11, 2021 | Radiation<br>(03CH12-HY) |
| RF Cable                | HUBER +<br>SUHNER          | SUCOFLEX<br>126E                  | 0058/126E       | 30MHz~18GHz                      | Dec. 11, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Dec. 10, 2021 | Radiation<br>(03CH12-HY) |
| RF Cable                | HUBER +<br>SUHNER          | SUCOFLEX<br>102                   | 505134/2        | 30MHz~40GHz                      | Feb. 25, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Feb. 24, 2021 | Radiation<br>(03CH12-HY) |
| RF Cable                | HUBER +<br>SUHNER          | SUCOFLEX<br>102                   | 800740/2        | 30MHz~40GHz                      | Feb. 25, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Feb. 24, 2021 | Radiation<br>(03CH12-HY) |
| Hygrometer              | TECPEL                     | DTM-303B                          | TP140349        | N/A                              | Oct. 02, 2020    | Jan. 27, 2021~<br>Feb. 02, 2021 | Oct. 01, 2021 | Radiation<br>(03CH12-HY) |
| Controller              | EMEC                       | EM1000                            | N/A             | Control Turn<br>table & Ant Mast | N/A              | Jan. 27, 2021~<br>Feb. 02, 2021 | N/A           | Radiation<br>(03CH12-HY) |
| Antenna Mast            | EMEC                       | AM-BS-4500-B                      | N/A             | 1m~4m                            | N/A              | Jan. 27, 2021~<br>Feb. 02, 2021 | N/A           | Radiation<br>(03CH12-HY) |
| Turn Table              | EMEC                       | TT2000                            | N/A             | 0~360 Degree                     | N/A              | Jan. 27, 2021~<br>Feb. 02, 2021 | N/A           | Radiation<br>(03CH12-HY) |
| Software                | Audix                      | E3<br>6.2009-8-24                 | RK-000989       | N/A                              | N/A              | Jan. 27, 2021~<br>Feb. 02, 2021 | N/A           | Radiation<br>(03CH12-HY) |



| Instrument                   | Brand Name | Model No. | Serial No.      | Characteristics                        | Calibration Date | Test Date     | Due Date      | Remark              |
|------------------------------|------------|-----------|-----------------|----------------------------------------|------------------|---------------|---------------|---------------------|
| Radio Communication Analyzer | Anritsu    | MT8821C   | 6261849015      | LTE                                    | Sep. 18, 2020    | Mar. 05, 2021 | Sep. 17, 2021 | Conducted (TH05-HY) |
| 5G Wireless Test Platform    | Anritsu    | MT8000A   | 6261940327      | FR1<br>(+MT8821C<br>SN:6261849015<br>) | Sep. 23, 2020    | Mar. 05, 2021 | Sep. 22, 2021 | Conducted (TH05-HY) |
| Base Station (Measure)       | Anritsu    | MT8821C   | 6262002534<br>1 | N/A                                    | Oct. 06, 2020    | Mar. 05, 2021 | Oct. 05, 2021 | Conducted (TH05-HY) |

## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.07 |
|--------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.21 |
|--------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.80 |
|--------------------------------------------------------------------------|------|



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & ERP/EIRP)

| WCDMA Band V Maximum Average Power [dBm] (GT - LC = 0.95 dB) |          |       |       |           |         |
|--------------------------------------------------------------|----------|-------|-------|-----------|---------|
| Channel                                                      | 4132     | 4182  | 4233  | ERP (dBm) | ERP (W) |
| Frequency                                                    | 826.4    | 836.4 | 846.6 |           |         |
| RMC 12.2K                                                    | 23.83    | 23.92 | 23.84 |           |         |
| HSDPA Subtest-1                                              | 22.65    | 22.86 | 22.76 |           |         |
| HSDPA Subtest-2                                              | 22.81    | 22.81 | 22.85 |           |         |
| HSDPA Subtest-3                                              | 22.41    | 22.36 | 22.48 |           |         |
| HSDPA Subtest-4                                              | 22.27    | 22.33 | 22.44 |           |         |
| HSUPA Subtest-1                                              | 22.84    | 22.83 | 22.71 |           |         |
| HSUPA Subtest-2                                              | 20.87    | 20.91 | 20.74 |           |         |
| HSUPA Subtest-3                                              | 21.81    | 21.79 | 21.94 |           |         |
| HSUPA Subtest-4                                              | 20.79    | 20.92 | 20.93 |           |         |
| HSUPA Subtest-5                                              | 22.95    | 22.94 | 22.72 |           |         |
| Limit                                                        | ERP < 7W |       |       | Result    | Pass    |

| WCDMA Band II Maximum Average Power [dBm] (GT - LC = 2.28 dB) |           |       |        |            |          |
|---------------------------------------------------------------|-----------|-------|--------|------------|----------|
| Channel                                                       | 9262      | 9400  | 9538   | EIRP (dBm) | EIRP (W) |
| Frequency                                                     | 1852.4    | 1880  | 1907.6 |            |          |
| RMC 12.2K                                                     | 23.81     | 23.91 | 23.89  |            |          |
| HSDPA Subtest-1                                               | 22.68     | 22.84 | 22.71  |            |          |
| HSDPA Subtest-2                                               | 22.62     | 22.95 | 22.79  |            |          |
| HSDPA Subtest-3                                               | 22.33     | 22.47 | 22.50  |            |          |
| HSDPA Subtest-4                                               | 22.43     | 22.30 | 22.44  |            |          |
| HSUPA Subtest-1                                               | 22.78     | 22.83 | 22.87  |            |          |
| HSUPA Subtest-2                                               | 20.90     | 20.96 | 20.85  |            |          |
| HSUPA Subtest-3                                               | 21.92     | 21.94 | 21.84  |            |          |
| HSUPA Subtest-4                                               | 20.69     | 20.92 | 20.94  |            |          |
| HSUPA Subtest-5                                               | 22.89     | 22.80 | 22.81  |            |          |
| Limit                                                         | EIRP < 2W |       |        | Result     | Pass     |

| WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 2.64 dB) |           |        |        |            |          |
|---------------------------------------------------------------|-----------|--------|--------|------------|----------|
| Channel                                                       | 1312      | 1413   | 1513   | EIRP (dBm) | EIRP (W) |
| Frequency                                                     | 1712.4    | 1732.6 | 1752.6 |            |          |
| RMC 12.2K                                                     | 23.63     | 23.66  | 23.74  |            |          |
| HSDPA Subtest-1                                               | 22.67     | 22.50  | 22.79  |            |          |
| HSDPA Subtest-2                                               | 22.63     | 22.63  | 22.84  |            |          |
| HSDPA Subtest-3                                               | 22.07     | 22.11  | 22.26  |            |          |
| HSDPA Subtest-4                                               | 21.95     | 22.19  | 22.04  |            |          |
| HSUPA Subtest-1                                               | 22.47     | 22.86  | 22.90  |            |          |
| HSUPA Subtest-2                                               | 20.80     | 20.49  | 20.61  |            |          |
| HSUPA Subtest-3                                               | 21.83     | 21.54  | 21.73  |            |          |
| HSUPA Subtest-4                                               | 20.45     | 20.63  | 20.80  |            |          |
| HSUPA Subtest-5                                               | 22.70     | 22.52  | 22.88  |            |          |
| Limit                                                         | EIRP < 1W |        |        | Result     | Pass     |



## Appendix B. Test Results of Radiated Test

&lt;Sample 1&gt;

### WCDMA 1900

| WCDMA 1900 |                      |                 |                  |                         |                         |                          |                            |                             |                       |
|------------|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel    | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest     | 3702                 | -54.96          | -13              | -41.96                  | -72.89                  | -66.17                   | 1.41                       | 12.62                       | H                     |
|            | 5556                 | -50.95          | -13              | -37.95                  | -73.77                  | -62.51                   | 1.74                       | 13.30                       | H                     |
|            | 7410                 | -46.82          | -13              | -33.82                  | -73.8                   | -56.12                   | 1.94                       | 11.24                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3702                 | -54.31          | -13              | -41.31                  | -72.39                  | -65.52                   | 1.41                       | 12.62                       | V                     |
|            | 5556                 | -51.50          | -13              | -38.50                  | -73.86                  | -63.06                   | 1.74                       | 13.30                       | V                     |
|            | 7410                 | -47.03          | -13              | -34.03                  | -73.86                  | -56.33                   | 1.94                       | 11.24                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
| Middle     | 3762                 | -54.70          | -13              | -41.70                  | -72.88                  | -65.93                   | 1.43                       | 12.66                       | H                     |
|            | 5640                 | -51.33          | -13              | -38.33                  | -74.21                  | -62.90                   | 1.73                       | 13.30                       | H                     |
|            | 7518                 | -46.97          | -13              | -33.97                  | -73.44                  | -56.08                   | 1.99                       | 11.10                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3762                 | -54.44          | -13              | -41.44                  | -72.84                  | -65.67                   | 1.43                       | 12.66                       | V                     |
|            | 5640                 | -51.57          | -13              | -38.57                  | -74.04                  | -63.14                   | 1.73                       | 13.30                       | V                     |
|            | 7518                 | -46.60          | -13              | -33.60                  | -73.03                  | -55.71                   | 1.99                       | 11.10                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |



|         |      |        |     |        |        |        |      |       |   |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 3816 | -54.55 | -13 | -41.55 | -72.92 | -65.80 | 1.44 | 12.69 | H |
|         | 5724 | -50.88 | -13 | -37.88 | -74.18 | -62.45 | 1.73 | 13.30 | H |
|         | 7632 | -47.86 | -13 | -34.86 | -73.9  | -56.98 | 2.01 | 11.13 | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         | 3816 | -54.33 | -13 | -41.33 | -72.94 | -65.58 | 1.44 | 12.69 | V |
|         | 5724 | -51.68 | -13 | -38.68 | -74.35 | -63.25 | 1.73 | 13.30 | V |
|         | 7632 | -47.94 | -13 | -34.94 | -73.89 | -57.06 | 2.01 | 11.13 | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



&lt;Sample 2&gt;

**WCDMA 850**

| WCDMA 850 |                      |                |                  |                         |                         |                          |                            |                             |                       |
|-----------|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel   | Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest    | 1656                 | -62.58         | -13              | -49.58                  | -71.06                  | -68.20                   | 0.92                       | 8.69                        | H                     |
|           | 2480                 | -59.08         | -13              | -46.08                  | -72.61                  | -66.46                   | 1.15                       | 10.67                       | H                     |
|           | 3304                 | -57.90         | -13              | -44.90                  | -73.21                  | -66.45                   | 1.32                       | 12.03                       | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           | 1656                 | -63.06         | -13              | -50.06                  | -70.97                  | -68.68                   | 0.92                       | 8.69                        | V                     |
|           | 2480                 | -58.84         | -13              | -45.84                  | -72.54                  | -66.22                   | 1.15                       | 10.67                       | V                     |
|           | 3304                 | -57.61         | -13              | -44.61                  | -73.39                  | -66.16                   | 1.32                       | 12.03                       | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |
| Middle    | 1664                 | -58.16         | -13              | -45.16                  | -66.66                  | -63.81                   | 0.93                       | 8.72                        | H                     |
|           | 2512                 | -59.10         | -13              | -46.10                  | -72.66                  | -66.51                   | 1.15                       | 10.71                       | H                     |
|           | 3344                 | -57.73         | -13              | -44.73                  | -72.93                  | -66.37                   | 1.33                       | 12.13                       | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | H                     |
|           | 1664                 | -61.76         | -13              | -48.76                  | -69.67                  | -67.41                   | 0.93                       | 8.72                        | V                     |
|           | 2512                 | -58.20         | -13              | -45.20                  | -71.95                  | -65.61                   | 1.15                       | 10.71                       | V                     |
|           | 3344                 | -57.34         | -13              | -44.34                  | -72.99                  | -65.98                   | 1.33                       | 12.13                       | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |
|           |                      |                |                  |                         |                         |                          |                            |                             | V                     |



|         |      |        |     |        |        |        |      |       |   |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 1696 | -62.55 | -13 | -49.55 | -71.14 | -68.31 | 0.94 | 8.84  | H |
|         | 2536 | -59.39 | -13 | -46.39 | -72.96 | -66.82 | 1.16 | 10.74 | H |
|         | 3384 | -58.17 | -13 | -45.17 | -73.26 | -66.90 | 1.34 | 12.22 | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         | 1696 | -63.61 | -13 | -50.61 | -71.49 | -69.37 | 0.94 | 8.84  | V |
|         | 2536 | -59.13 | -13 | -46.13 | -72.83 | -66.56 | 1.16 | 10.74 | V |
|         | 3384 | -57.53 | -13 | -44.53 | -73.06 | -66.26 | 1.34 | 12.22 | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

| WCDMA 1700 |                      |                 |                  |                         |                         |                          |                            |                             |                       |
|------------|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel    | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest     | 3427                 | -57.23          | -13              | -44.23                  | -73.22                  | -68.21                   | 1.35                       | 12.32                       | H                     |
|            | 5135                 | -52.34          | -13              | -39.34                  | -74.29                  | -63.48                   | 1.65                       | 12.79                       | H                     |
|            | 6850                 | -49.12          | -13              | -36.12                  | -74.53                  | -59.49                   | 1.74                       | 12.11                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3427                 | -56.42          | -13              | -43.42                  | -72.82                  | -67.40                   | 1.35                       | 12.32                       | V                     |
|            | 5135                 | -52.81          | -13              | -39.81                  | -74.51                  | -63.95                   | 1.65                       | 12.79                       | V                     |
|            | 6850                 | -49.57          | -13              | -36.57                  | -74.57                  | -59.94                   | 1.74                       | 12.11                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
| Middle     | 3462                 | -56.91          | -13              | -43.91                  | -73.24                  | -67.97                   | 1.35                       | 12.41                       | H                     |
|            | 5198                 | -52.50          | -13              | -39.50                  | -74.43                  | -63.72                   | 1.66                       | 12.88                       | H                     |
|            | 6927                 | -48.19          | -13              | -35.19                  | -73.98                  | -58.46                   | 1.73                       | 12.00                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3462                 | -56.23          | -13              | -43.23                  | -72.95                  | -67.29                   | 1.35                       | 12.41                       | V                     |
|            | 5198                 | -52.75          | -13              | -39.75                  | -74.52                  | -63.97                   | 1.66                       | 12.88                       | V                     |
|            | 6927                 | -48.72          | -13              | -35.72                  | -74.06                  | -58.99                   | 1.73                       | 12.00                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |



|         |      |        |     |        |        |        |      |       |   |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 3504 | -56.39 | -13 | -43.39 | -73.11 | -67.53 | 1.36 | 12.50 | H |
|         | 5254 | -52.62 | -13 | -39.62 | -74.75 | -63.90 | 1.68 | 12.96 | H |
|         | 7011 | -47.69 | -13 | -34.69 | -73.9  | -57.85 | 1.73 | 11.88 | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         | 3504 | -56.02 | -13 | -43.02 | -73.09 | -67.16 | 1.36 | 12.50 | V |
|         | 5254 | -52.88 | -13 | -39.88 | -74.78 | -64.16 | 1.68 | 12.96 | V |
|         | 7011 | -48.09 | -13 | -35.09 | -73.81 | -58.25 | 1.73 | 11.88 | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900**

| WCDMA 1900 |                      |                 |                  |                         |                         |                          |                            |                             |                       |
|------------|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel    | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Lowest     | 3702                 | -55.15          | -13              | -42.15                  | -73.08                  | -66.36                   | 1.41                       | 12.62                       | H                     |
|            | 5556                 | -50.70          | -13              | -37.70                  | -73.85                  | -62.26                   | 1.74                       | 13.30                       | H                     |
|            | 7410                 | -47.51          | -13              | -34.51                  | -74.3                   | -56.81                   | 1.94                       | 11.24                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3702                 | -54.98          | -13              | -41.98                  | -73.06                  | -66.19                   | 1.41                       | 12.62                       | V                     |
|            | 5556                 | -51.20          | -13              | -38.20                  | -73.89                  | -62.76                   | 1.74                       | 13.30                       | V                     |
|            | 7410                 | -47.32          | -13              | -34.32                  | -73.96                  | -56.62                   | 1.94                       | 11.24                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
| Middle     | 3762                 | -54.67          | -13              | -41.67                  | -72.87                  | -65.90                   | 1.43                       | 12.66                       | H                     |
|            | 5640                 | -51.47          | -13              | -38.47                  | -74.69                  | -63.04                   | 1.73                       | 13.30                       | H                     |
|            | 7518                 | -47.71          | -13              | -34.71                  | -73.99                  | -56.82                   | 1.99                       | 11.10                       | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | H                     |
|            | 3762                 | -54.44          | -13              | -41.44                  | -72.86                  | -65.67                   | 1.43                       | 12.66                       | V                     |
|            | 5640                 | -51.75          | -13              | -38.75                  | -74.56                  | -63.32                   | 1.73                       | 13.30                       | V                     |
|            | 7518                 | -47.54          | -13              | -34.54                  | -73.78                  | -56.65                   | 1.99                       | 11.10                       | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |
|            |                      |                 |                  |                         |                         |                          |                            |                             | V                     |



|         |      |        |     |        |        |        |      |       |   |
|---------|------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 3816 | -54.61 | -13 | -41.61 | -73.02 | -65.86 | 1.44 | 12.69 | H |
|         | 5724 | -50.80 | -13 | -37.80 | -74.45 | -62.37 | 1.73 | 13.30 | H |
|         | 7632 | -48.33 | -13 | -35.33 | -74.18 | -57.45 | 2.01 | 11.13 | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         |      |        |     |        |        |        |      |       | H |
|         | 3816 | -54.56 | -13 | -41.56 | -73.21 | -65.81 | 1.44 | 12.69 | V |
|         | 5724 | -51.45 | -13 | -38.45 | -74.47 | -63.02 | 1.73 | 13.30 | V |
|         | 7632 | -48.40 | -13 | -35.40 | -74.16 | -57.52 | 2.01 | 11.13 | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |
|         |      |        |     |        |        |        |      |       | V |

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.