

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: UID 0, CW; Frequency: 750 MHz

Medium: HSL_600~7200_260708 Medium parameters used: $f = 750$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.685$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 750 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.71 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.22 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.4 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 2.78 W/kg

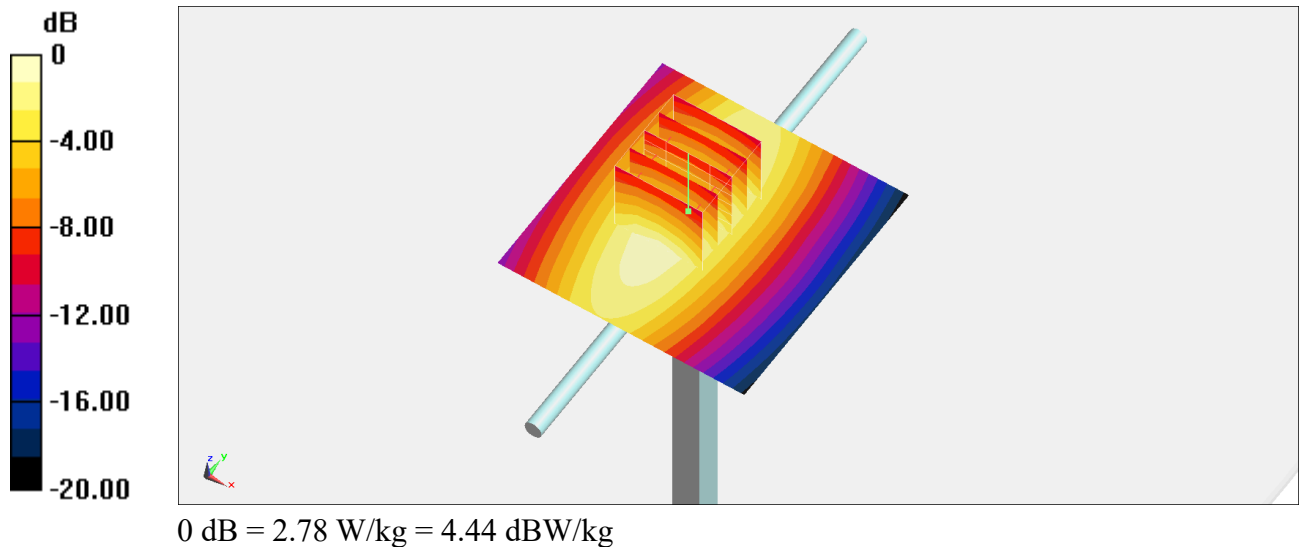

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: UID 0, CW; Frequency: 750 MHz

Medium: HSL_600-7200_260710 Medium parameters used: $f = 750$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 42.605$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 750 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.69 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.22 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.39 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 2.77 W/kg

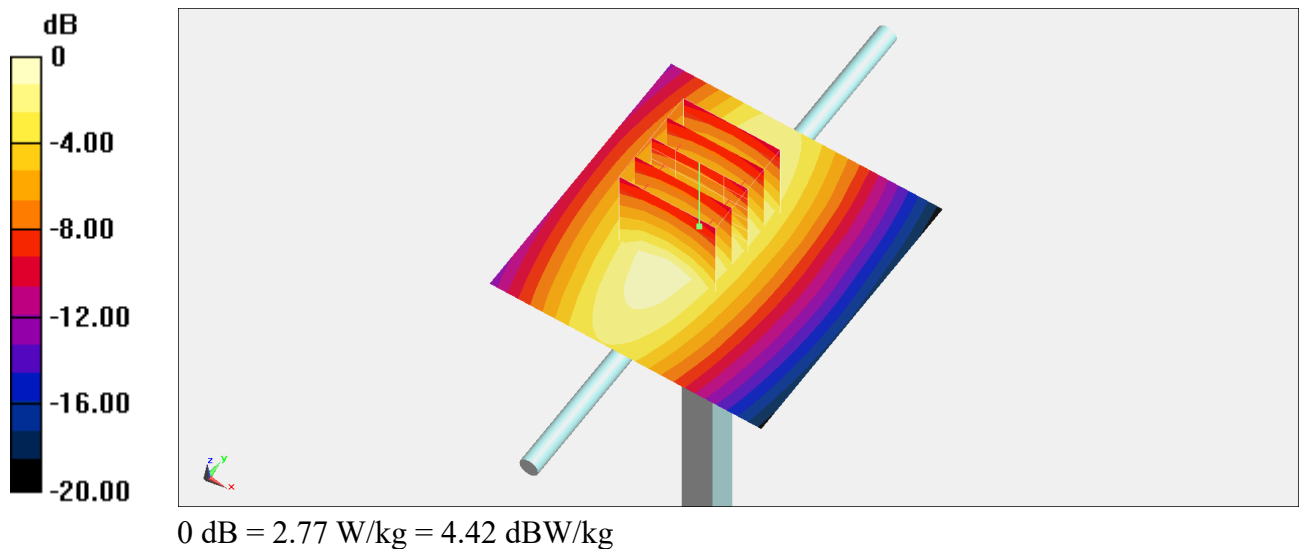

System Check_Head_835MHz

DUT: D835V2-4d167

Communication System: UID 0, CW; Frequency: 835 MHz

Medium: HSL_600-7200_260708 Medium parameters used: $f = 835$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.444$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 835 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.675 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.85 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.328 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 0.670 W/kg

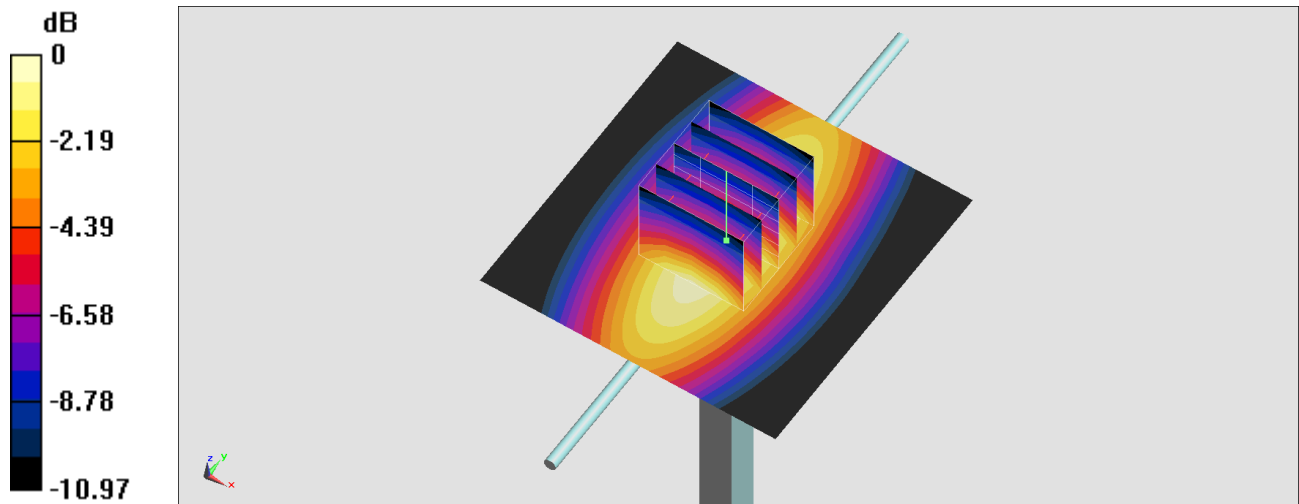

0 dB = 0.670 W/kg = -1.74 dBW/kg

System Check_Head_835MHz

DUT: D835V2-4d167

Communication System: UID 0, CW; Frequency: 835 MHz

Medium: HSL_600-7200_260710 Medium parameters used: $f = 835$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.364$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 835 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.672 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.85 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.328 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 0.670 W/kg

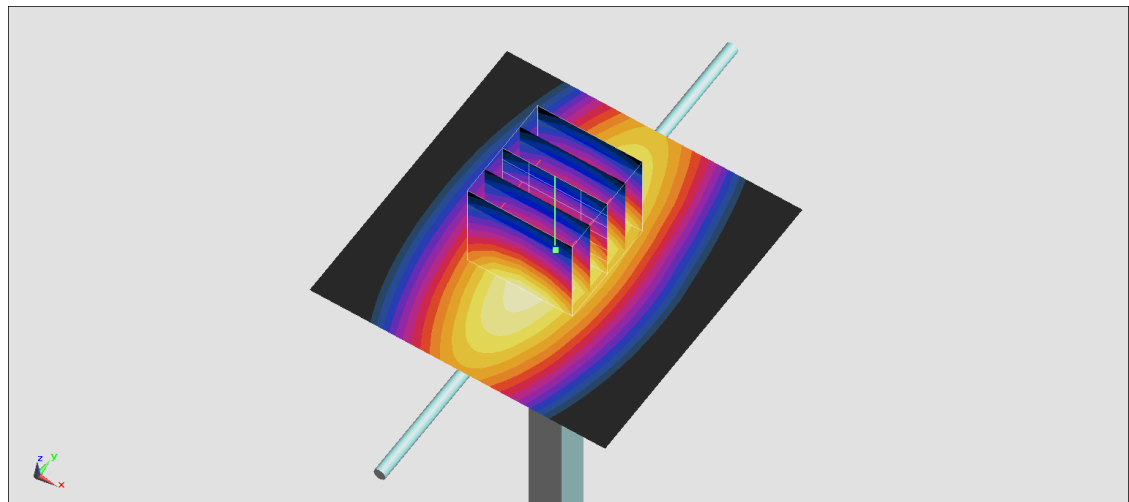

0 dB = 0.670 W/kg = -1.74 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: UID 0, CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260707 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.767$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1750 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.92 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.45 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 1.97 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 2.98 W/kg

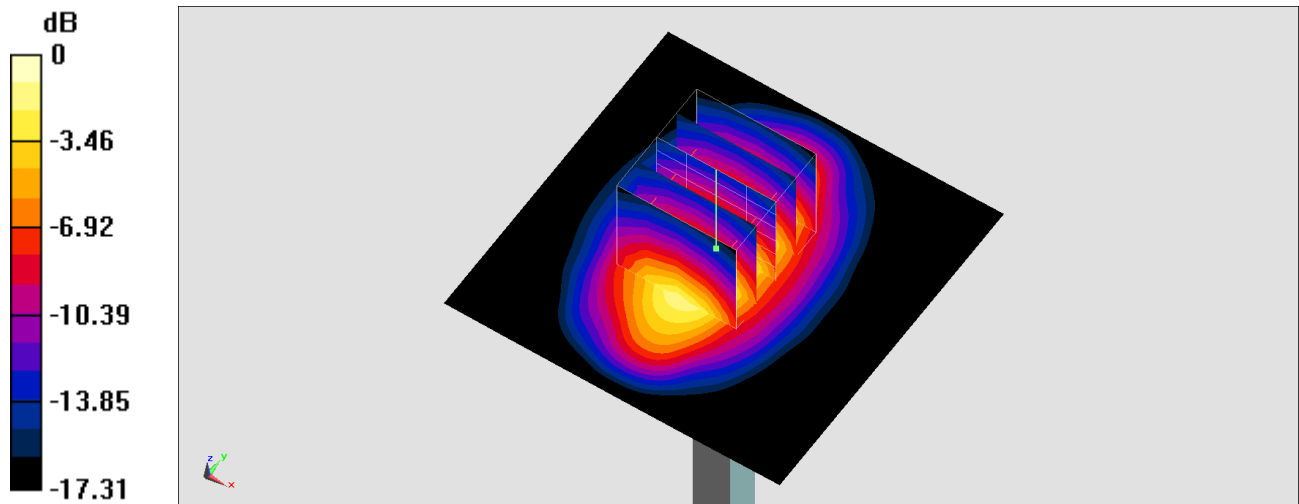

0 dB = 2.98 W/kg = 4.74 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: UID 0, CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260711 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 40.687$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1750 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.91 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.45 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 1.97 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 2.96 W/kg

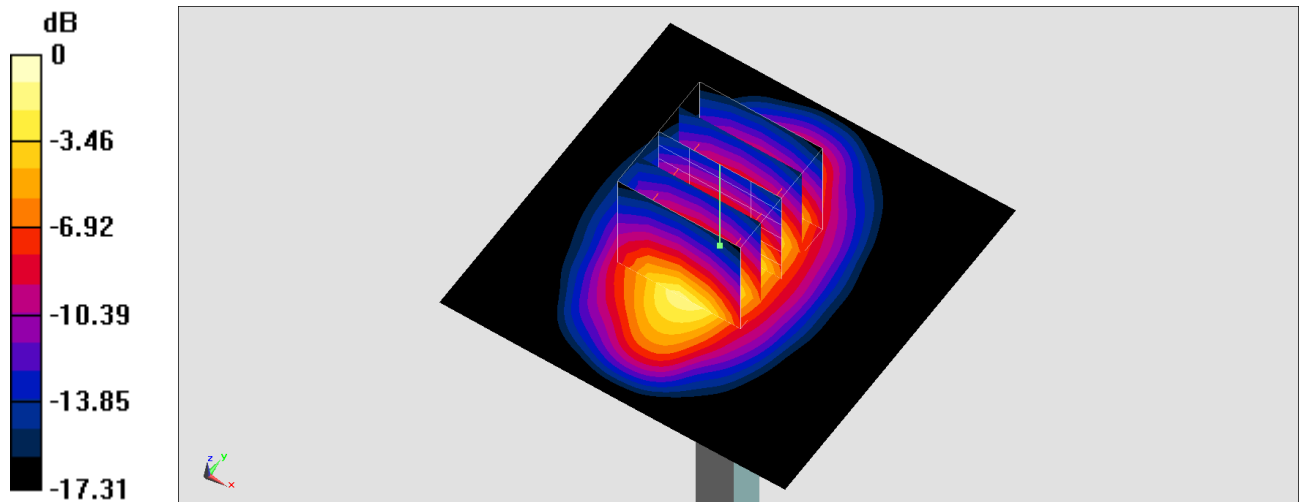

0 dB = 2.96 W/kg = 4.71 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d041

Communication System: UID 0, CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260707 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 40.482$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1900 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.11 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.07 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 3.16 W/kg

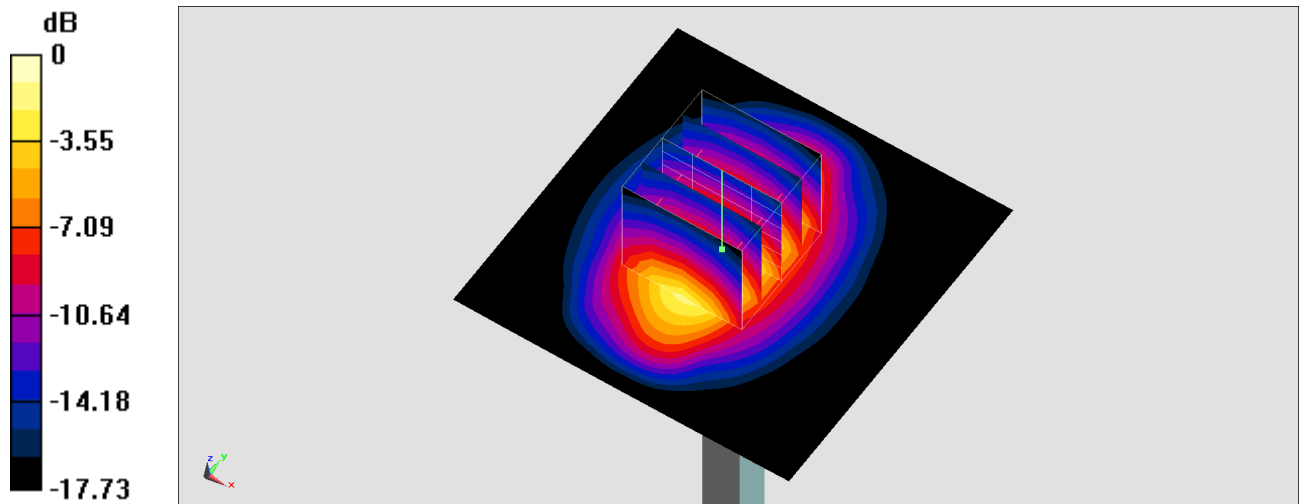

0 dB = 3.16 W/kg = 5.00 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: UID 0, CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260709 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.433$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2600 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.95 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.58 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 6.05 W/kg

SAR(1 g) = 2.98 W/kg; SAR(10 g) = 1.35 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 4.97 W/kg

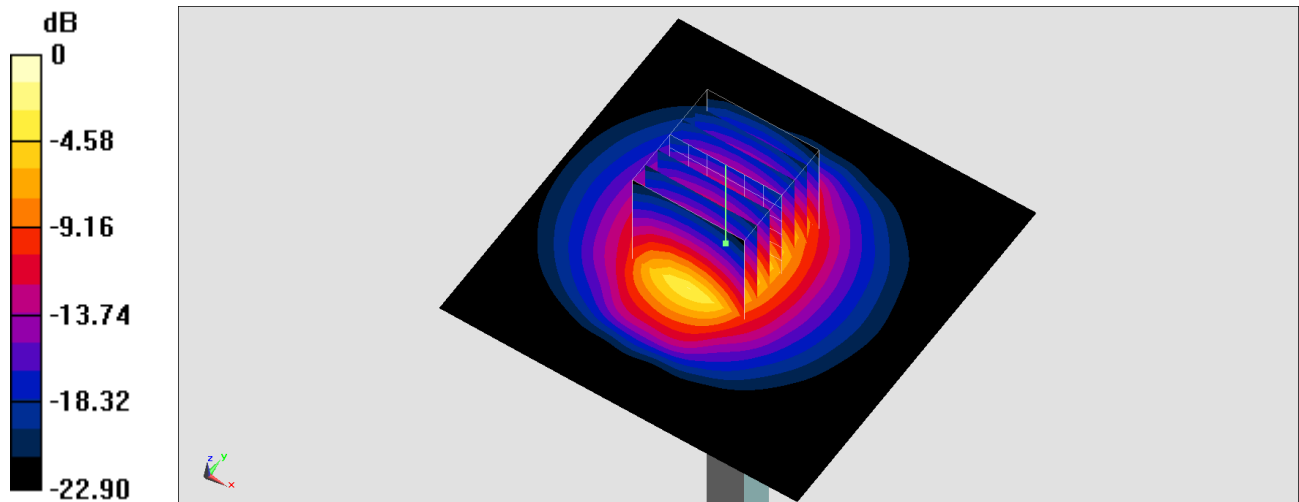

0 dB = 4.97 W/kg = 6.96 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: UID 0, CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260712 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 39.353$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2600 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.91 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.58 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 6.01 W/kg

SAR(1 g) = 2.96 W/kg; SAR(10 g) = 1.34 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 4.94 W/kg

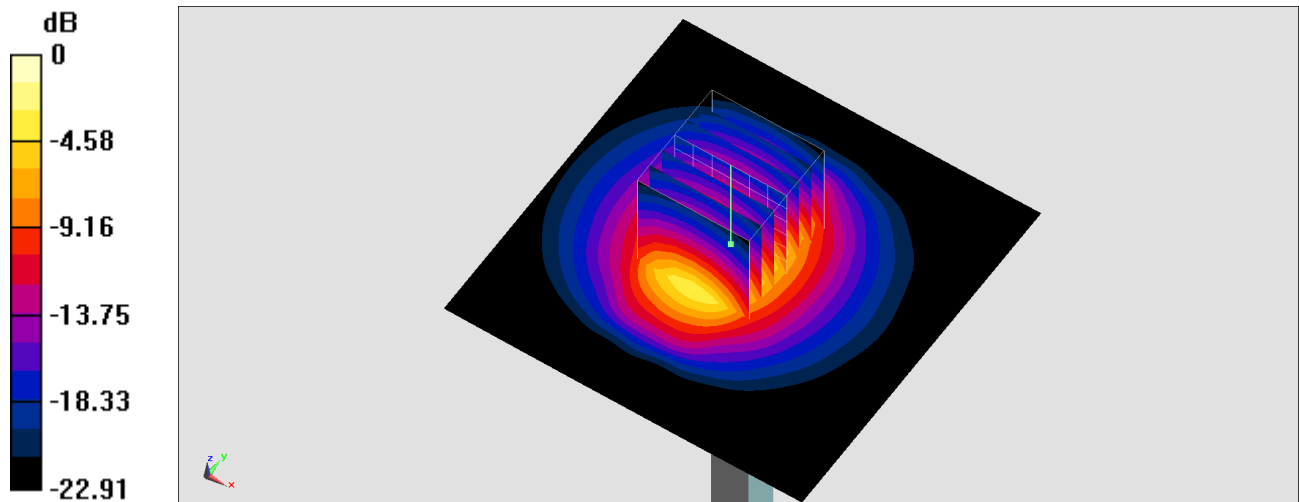

0 dB = 4.94 W/kg = 6.94 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1014

Communication System: UID 0, CW; Frequency: 3500 MHz

Medium: HSL_600~7200_260704 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.758$ S/m; $\epsilon_r = 37.943$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3500 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.0 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 65.59 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 6.51 W/kg; SAR(10 g) = 2.4 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 12.9 W/kg

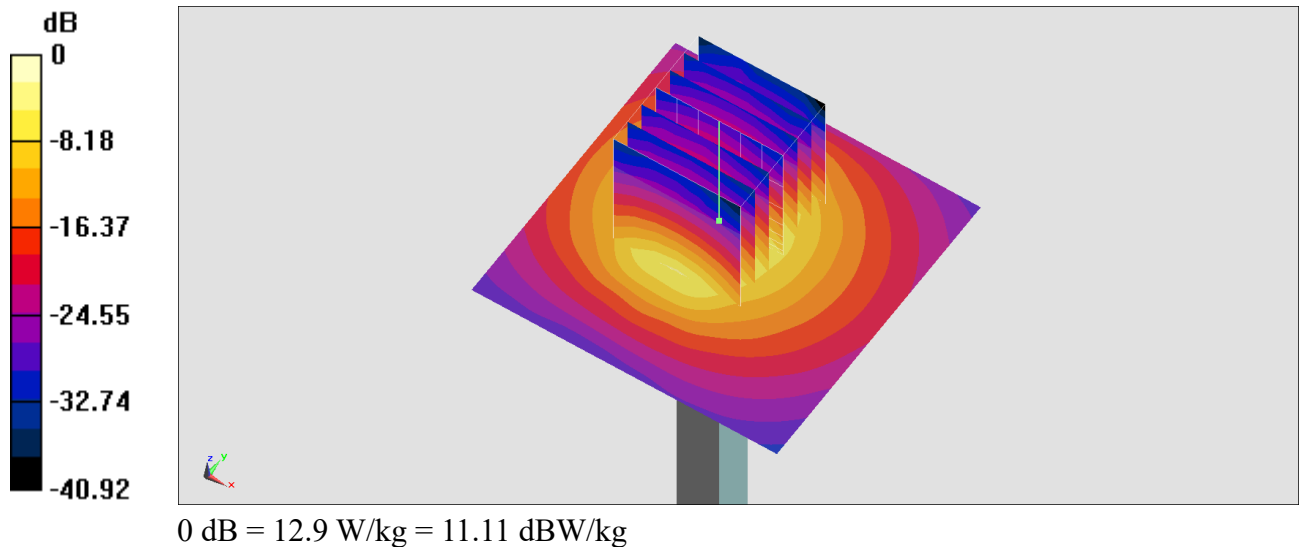

System Check_Head_3500MHz

DUT: D3500V2-1014

Communication System: UID 0, CW; Frequency: 3500 MHz

Medium: HSL_600~7200_260705 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.742$ S/m; $\epsilon_r = 37.85$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3500 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.9 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 65.59 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 6.47 W/kg; SAR(10 g) = 2.39 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 12.8 W/kg

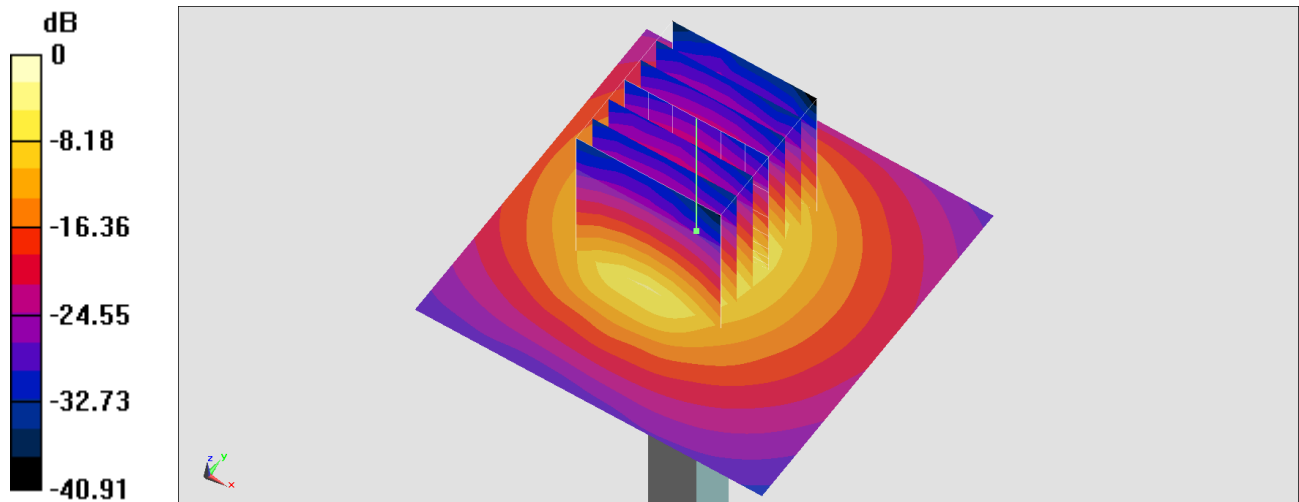

0 dB = 12.8 W/kg = 11.07 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1014

Communication System: UID 0, CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260706 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.733$ S/m; $\epsilon_r = 37.81$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3500 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 14.0 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 75.94 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 7.08 W/kg; SAR(10 g) = 2.61 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 14.1 W/kg

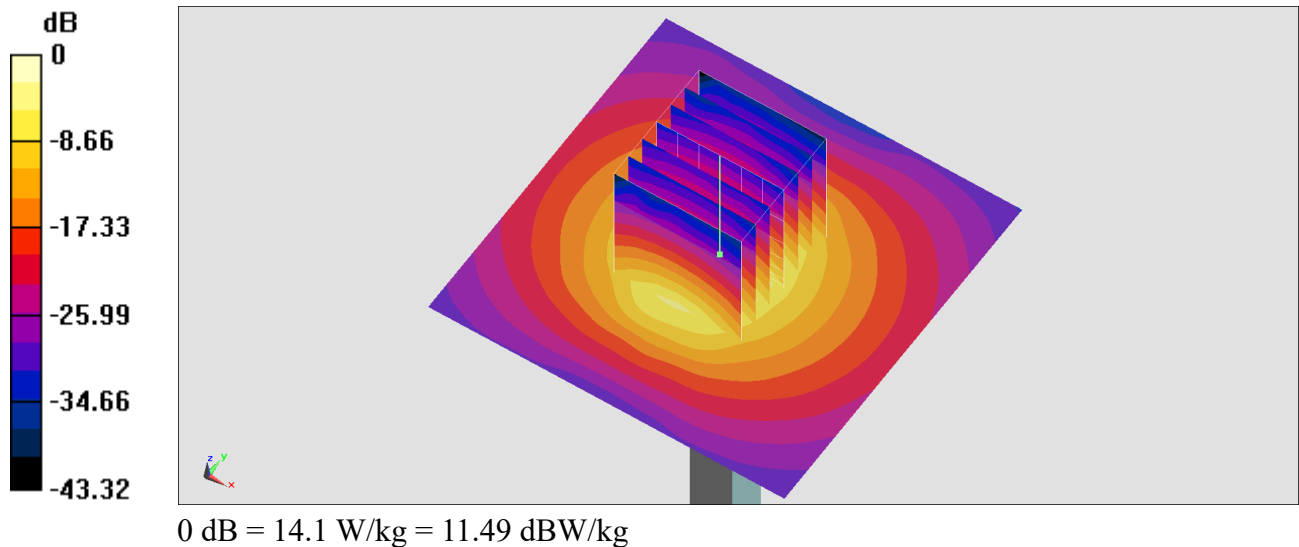

System Check_Head_3500MHz

DUT: D3500V2-1014

Communication System: UID 0, CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260713 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.717$ S/m; $\epsilon_r = 37.73$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3500 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.8 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 65.59 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 6.42 W/kg; SAR(10 g) = 2.37 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 12.7 W/kg

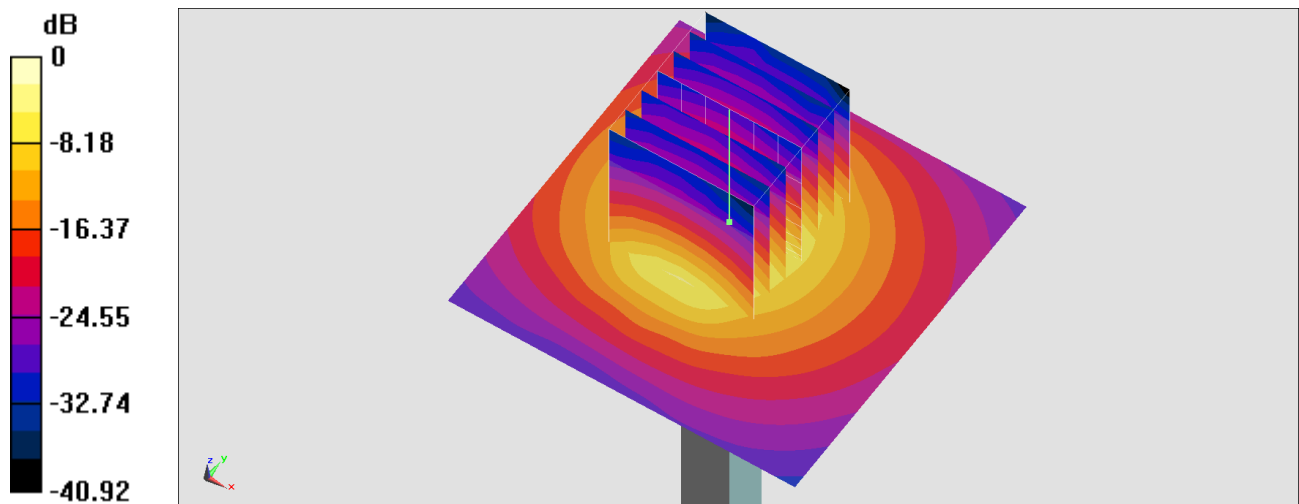

0 dB = 12.7 W/kg = 11.04 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: UID 0, CW; Frequency: 3700 MHz

Medium: HSL_600~7200_260704 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.937$ S/m; $\epsilon_r = 37.607$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3700 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.7 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.01 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 6.5 W/kg; SAR(10 g) = 2.46 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 12.1 W/kg

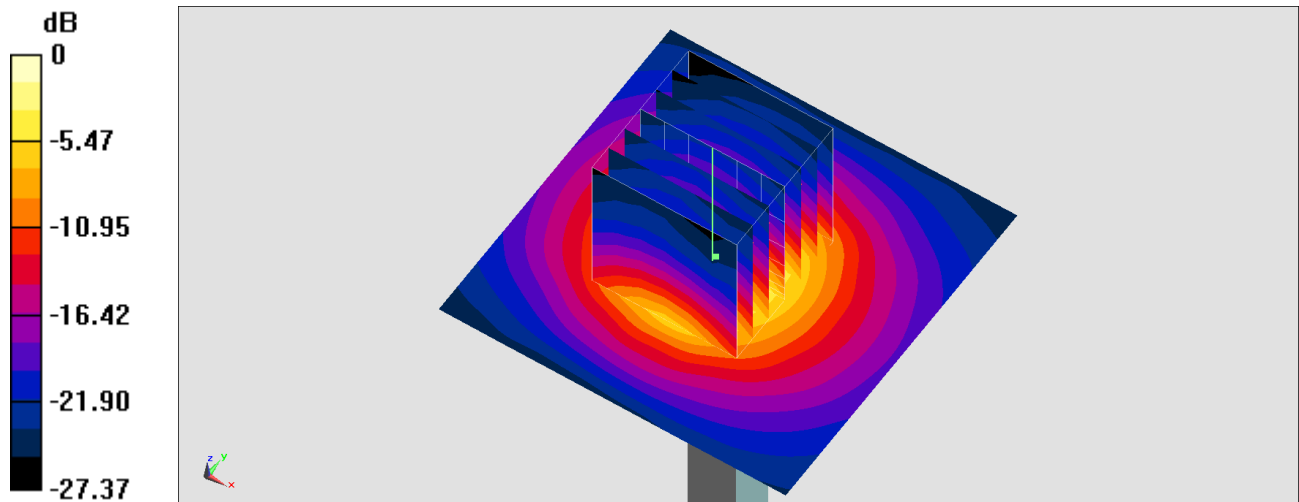

0 dB = 12.1 W/kg = 10.83 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: UID 0, CW; Frequency: 3700 MHz

Medium: HSL_600~7200_260705 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 37.514$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3700 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.6 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 69.01 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 6.47 W/kg; SAR(10 g) = 2.45 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 12.0 W/kg

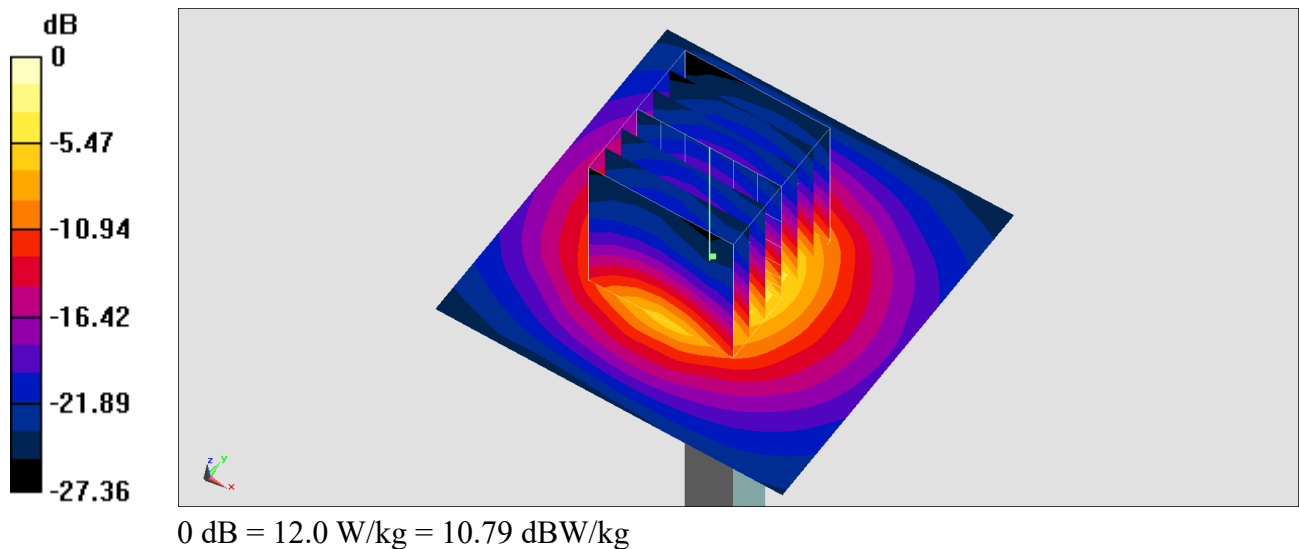

System Check_Head_3700MHz

DUT: D3700V2-1006

Communication System: UID 0, CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260706 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.911$ S/m; $\epsilon_r = 37.474$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3700 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 14.9 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 64.61 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 20.7 W/kg

SAR(1 g) = 7.07 W/kg; SAR(10 g) = 2.51 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 71.8%

Maximum value of SAR (measured) = 14.5 W/kg

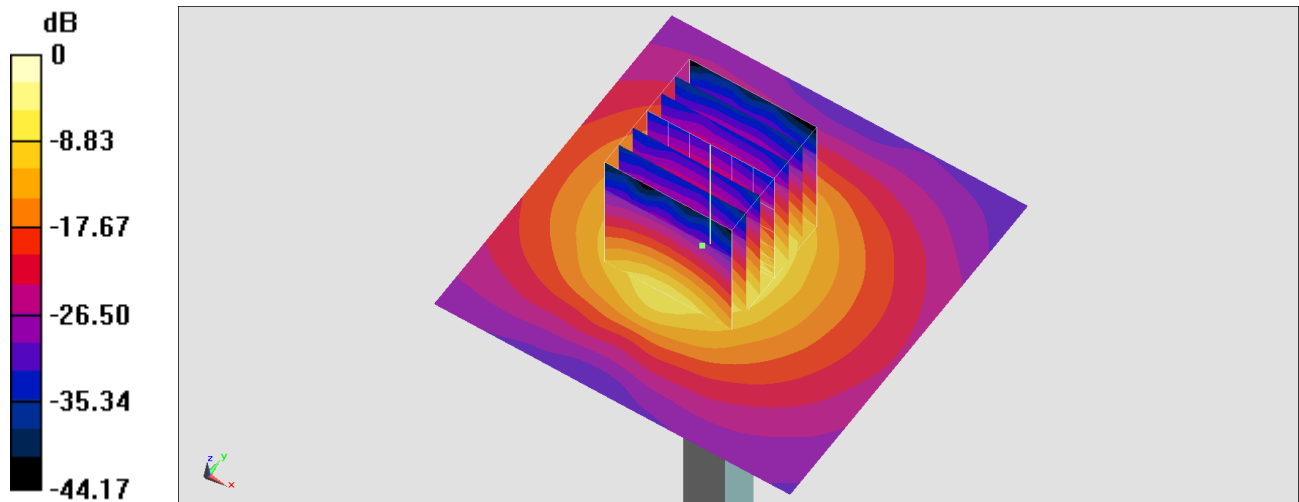

0 dB = 14.5 W/kg = 11.61 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: UID 0, CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260713 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.893$ S/m; $\epsilon_r = 37.394$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3700 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.0 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 66.48 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 6.2 W/kg; SAR(10 g) = 2.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.2%

Maximum value of SAR (measured) = 12.5 W/kg

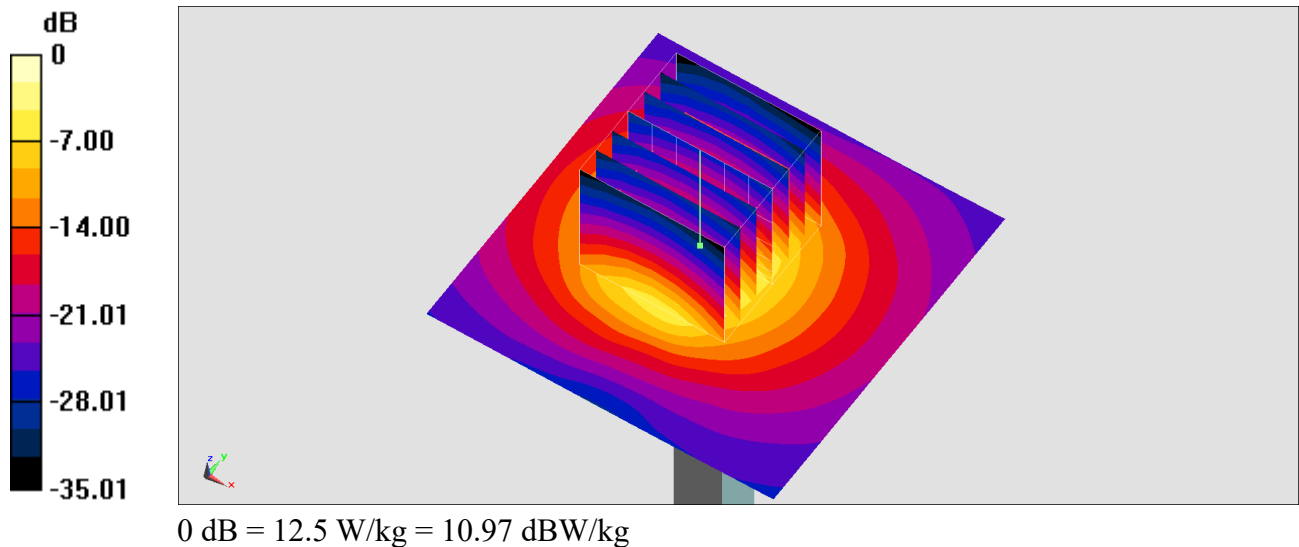

System Check_Head_3900MHz

DUT: D3900V2-1017-3900

Communication System: UID 0, CW; Frequency: 3900 MHz

Medium: HSL_600~7200_260704 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.107$ S/m; $\epsilon_r = 37.328$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.38, 6.57, 6.54) @ 3900 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.2 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 61.57 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 21.7 W/kg

SAR(1 g) = 7.02 W/kg; SAR(10 g) = 2.39 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 14.9 W/kg

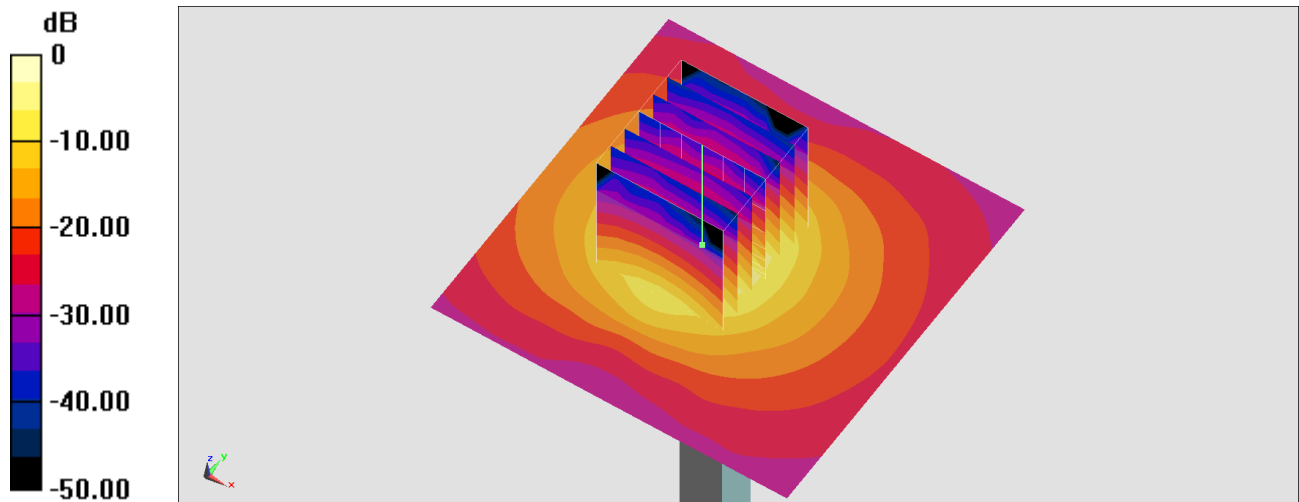

0 dB = 14.9 W/kg = 11.73 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017-3900

Communication System: UID 0, CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260706 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.079$ S/m; $\epsilon_r = 37.195$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.38, 6.57, 6.54) @ 3900 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.1 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 61.57 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 21.5 W/kg

SAR(1 g) = 6.96 W/kg; SAR(10 g) = 2.37 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 14.8 W/kg

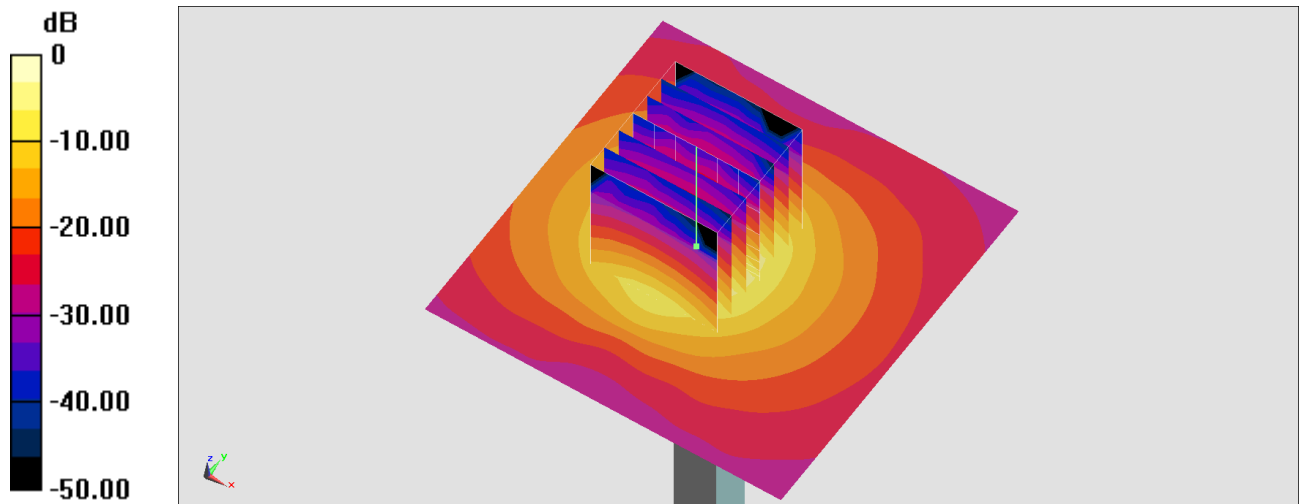

0 dB = 14.8 W/kg = 11.70 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017-3900

Communication System: UID 0, CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260713 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.06$ S/m; $\epsilon_r = 37.115$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.38, 6.57, 6.54) @ 3900 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1079
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.6 W/kg

Pin=100mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 57.94 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 6.52 W/kg; SAR(10 g) = 2.26 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 12.5 W/kg

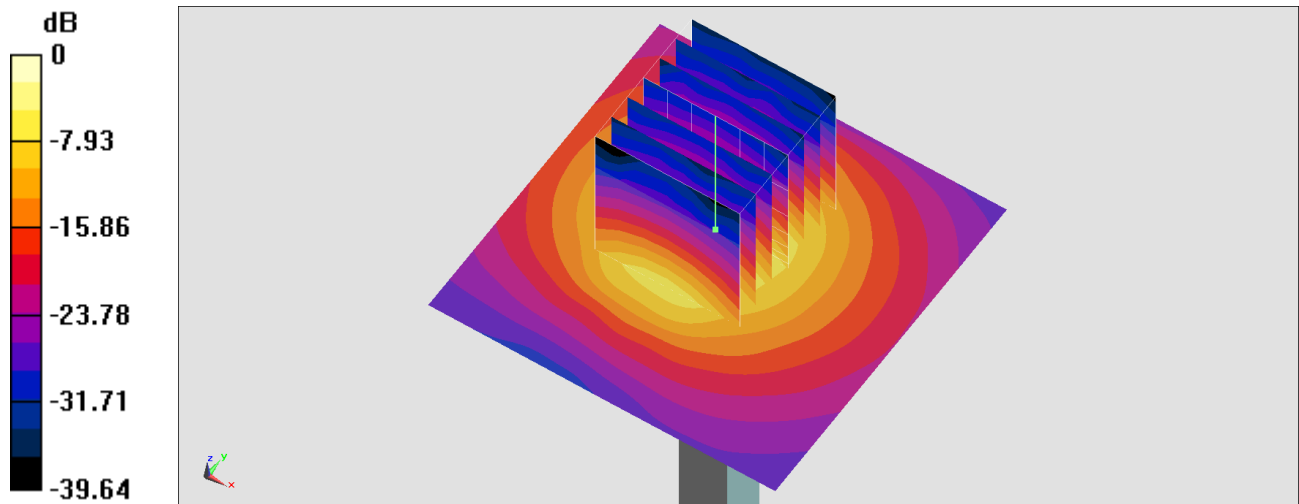

0 dB = 12.5 W/kg = 10.97 dBW/kg