

FCC SAR Test Report


FCC ID : QYLRC7611B41

Report No. : BTL-FCC SAR-1-2202T096
Equipment : Body Worn Camera
Model Name : BC-4K
Brand Name : Getac
Applicant : Getac Technology Corporation
Address : 5F., Building A, No.209, Sec.1, Nangang., Rd., Nangang Dist., Taipei City
: 11568, Taiwan, R.O.C.
:
Radio Function : WLAN 2.4G, WLAN 5G, Bluetooth, LTE Band 2, 4, 5, 12, 13, 14, 25, 26, 66, 71
Standard(s) : **KDB447498 D04** Interim General RF Exposure Guidance v01
KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02 SAR Reporting v01r02
KDB248227 D01 802.11 Wi-Fi SAR v02r02
KDB941225 D05 SAR for LTE Devices v02r05
FCC§2.1093 Radiofrequency radiation exposure evaluation: portable devices
ANSI Std C95.1:2019 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

Date of Receipt : 2022/3/23
Date of Test : 2022/8/4 ~ 2022/8/10
Issued Date : 2022/8/31

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Jerry Chuang, Supervisor



Approved by : 
Peter Chen, Assistant Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
1 . GENERAL INFORMATION	6
1.1. GENERAL DESCRIPTION OF EUT	6
2. SUMMARY OF SAR MEASUREMENT	7
2.1. TEST FACILITY	7
2.2. MEASUREMENT UNCERTAINTY	7
2.3. ANTENNA INFORMATION:	9
2.4. THE MAXIMUM SAR 1G VALUES	10
2.5. LABORATORY ENVIRONMENT	10
2.6. MAIN TEST INSTRUMENTS	11
3 . SAR MEASUREMENTS SYSTEM CONFIGURATION	12
3.1. SAR MEASUREMENT SETUP	12
3.1.1 . TEST SETUP LAYOUT	12
3.2 . DASY5 E-FIELD PROBE SYSTEM	13
3.2.1 . EX3DV4 PROBE SPECIFICATION	13
3.2.2 . E-FIELD PROBE CALIBRATION	14
3.2.3 . OTHER TEST EQUIPMENT	15
3.2.4 . SCANNING PROCEDURE	16
3.2.5 . DATA STORAGE AND EVALUATION	17
3.2.6 . DATA EVALUATION BY SEMCAD	18
4 . TISSUE-EQUIVALENT LIQUID	20
4.1. TISSUE-EQUIVALENT LIQUID INGREDIENTS	20
4.2. TISSUE-EQUIVALENT LIQUID PROPERTIES	20
5 . SYSTEM CHECK	22
5.1. DESCRIPTION OF SYSTEM CHECK	22
5.2. DESCRIPTION OF SYSTEM CHECK	23
6 . OPERATIONAL CONDITIONS DURING TEST	24
6.1. GENERAL DESCRIPTION OF TEST PROCEDURES	24
6.2. TEST POSITION ANTENNA LOCATION	24
6.3. TEST POSITION OF PORTABLE DEVICES	24
6.4. TEST CONFIGURATION	25
6.5. SAR EXCLUSION CALCULATIONS FOR EUT ANTENNA	26
7 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	27
7.1. SAR MEASUREMENT VARIABILITY	27
7.2. TEST CONFIGURATION	28
7.2.1 . WIFI TEST CONFIGURATION	28
7.2.2. WLAN2.4G SAR TEST REQUIREMENTS	30
7.2.3. WLAN5G SAR TEST REQUIREMENTS	31
7.2.4. OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION	31
7.2.5. INITIAL TEST CONFIGURATION PROCEDURE	31
7.3. LTE TEST CONFIGURATION	32

Table of Contents	Page
8 . CONDUCTED POWER RESULTS	33
8.1. CONDUCTED POWER MEASUREMENTS OF LTE BAND	33
8.2. CONDUCTED POWER MEASUREMENTS OF BLUETOOTH	47
8.3. CONDUCTED POWER MEASUREMENTS OF WI-FI 2.4GHZ BAND	47
8.4. CONDUCTED POWER MEASUREMENTS OF 5G UNII_1	48
8.5. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2A	48
8.6. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2C	48
8.7. CONDUCTED POWER MEASUREMENTS OF 5G UNII_3	48
8.8. SAR TEST RESULTS	49
9 . SAR TEST RESULTS	50
9.1. BODY SAR TEST RESULT	50
10. SIMULTANEOUS TRANSMISSION CONDITIONS	52
10.1. STAND-ALONE SAR TEST EXCLUSION	52
10.2. SIMULTANEOUS TRANSMISSION CONDITIONS	53
11. TEST LAYOUT	54

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2022/8/31

1.. GENERAL INFORMATION

1.1.. GENERAL DESCRIPTION OF EUT

Equipment	Body Worn Camera		
Model Name	BC-4K		
Brand Name	Getac		
Power Source	(1) From host system or power adapter. (2) Battery supplied.		
Power Rating	(1)		
	BC-4K	Cable type	Input Voltage
	Pogo pins	Magnetic USB typeA to pogo Cable	5V /1.5A
	USB type C	typeC To C cable	5V/3A and 9V/2.2A
	(2) Getac / BP1S1P5000P: 2.8V 2500mA		
Products Covered	1 * Adjustable Pocket Mount 1 * Chest clip 1 * Magnetic Mount 1 * Molle Mount 1 * Dual Magnetic Mount		
WLAN Module	Qualcomm / WCN3980		
WWAN Module	SIERRA / RC7611		
Operation Frequency	Function	Band	Frequency (MHz)
	WiFi	2.4G	TX : 2412 - 2472
		5G UNII 1	TX : 5150 - 5250
		5G UNII 2a	TX : 5250 - 5350
		5G UNII 2c	TX : 5470 - 5725
		5G UNII 3	TX : 5725 - 5850
	Bluetooth	Basic Rate (BR)	TX : 2402 - 2480
		Enhance Data Rate	TX : 2402 - 2480
		Bluetooth Low Energy	TX : 2402 - 2480
	LTE	LTE Band 2	TX : 1850 - 1910
		LTE Band 4	TX : 1710 - 1755
		LTE Band 5	TX : 824 - 849
		LTE Band 12	TX : 699 - 716
		LTE Band 13	TX : 777 - 787
		LTE Band 14	TX : 788 - 798
		LTE Band 25	TX : 1850 - 1915
		LTE Band 26	TX : 814 - 849
		LTE Band 66	TX : 1710 - 1780
		LTE Band 71	TX : 663 - 698
Test Model	BC-4K		
Sample Status	Engineering Sample		
EUT Modification(s)	N/A		

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1-2202T096) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2.. SUMMARY OF SAR MEASUREMENT

2.1.. TEST FACILITY

The test facilities used to collect the test data in this report is **SAR Test room** at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan.

2.2.. MEASUREMENT UNCERTAINTY

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Error Description	Uncertainty Value (± %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V _{eff}
Measurement System									
Probe Calibration	6.05		Normal	1	1	1	± 6.05 %	± 6.05 %	∞
Axial Isotropy	4.7		Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	9.6		Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Linearity	4.7		Rectangular	√3	1	1	± 2.7 %	± 2.7 %	∞
Detection Limits	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Modulation response	2.4		Rectangular	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	0.3		Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	0.8		Rectangular	√3	1	1	± 0.5%	± 0.5 %	∞
Integration Time	2.6		Rectangular	√3	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient – Noise	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient– Reflections	3		Rectangula	√3	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	0.4		Rectangular	√3	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	2.9		Rectangular	√3	1	1	± 1.7 %	±1.7 %	∞
Post-processing	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Max.SAR Evaluation	2		Rectangular	√3	1	1	± 1.15 %	± 1.15 %	∞
Test Sample Related									
Device Positioning	1.6	1.8	Normal	1	1	1	± 1.6 %	± 1.8 %	145
Device Holder	1.5	1.7	Normal	1	1	1	± 1.5 %	± 1.7 %	5
Power Drift	5.0		Rectangular	√3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Setup									
Phantom Production Tolerances	6.1		Rectangular	√3	1	1	3.52	3.52	∞
SAR correction	1.9		Rectangular	√3	1	0.84	1.10	1.10	
Liquid Conductivity (mea.)	2.4		Rectangular	√3	0.78	0.71	1.08	1.08	∞
Liquid Permittivity (mea.)	2.4		Rectangular	√3	0.26	0.26	0.36	0.36	∞
Temp. unc. - Conductivity	3.4		Rectangular	√3	0.78	0.71	1.53	1.53	∞
Temp. unc. - Permittivity	0.4		Rectangular	√3	0.23	0.26	0.05	0.05	∞
Combined Standard Uncertainty (K = 1)							± 10.42 %	± 10.48 %	361
Expanded Uncertainty (K = 2)							± 20.84 %	± 20.97 %	

Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Uncertainty Budget for Frequency Range 0.5 GHz to 6 GHz									
Error Description	Uncertainty Value (± %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V _{eff}
Measurement System									
Probe Calibration	6.65		Normal	1	1	1	± 6.65 %	± 6.65 %	∞
Axial Isotropy	4.7		Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	9.6		Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	2		Rectangular	√3	1	1	± 1.2 %	± 1.2 %	∞
Linearity	4.7		Rectangular	√3	1	1	± 2.7 %	± 2.7 %	∞
Detection Limits	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Modulation response	2.4		Rectangular	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	0.3		Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	0.8		Rectangular	√3	1	1	± 0.5%	± 0.5 %	∞
Integration Time	2.6		Rectangular	√3	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient – Noise	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient– Reflections	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	0.4		Rectangular	√3	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	6.7		Rectangular	√3	1	1	± 3.9 %	±3.9 %	∞
Post-processing	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Max.SAR Evaluation	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related									
Device Positioning	1.6	1.8	Normal	1	1	1	±1.6 %	± 1.8 %	145
Device Holder	1.5	1.7	Normal	1	1	1	± 1.5 %	± 1.7 %	5
Power Drift	5.0		Rectangular	√3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Setup									
Phantom Production Tolerances	6.6		Rectangular	√3	1	1	3.81	3.81	∞
SAR correction	1.9		Rectangular	√3	1	0.84	1.10	0.92	
Liquid Conductivity (mea.)	2.4		Rectangular	√3	0.78	0.71	1.08	0.98	∞
Liquid Permittivity (mea.)	2.4		Rectangular	√3	0.26	0.26	0.36	0.36	∞
Temp. unc. - Conductivity	3.4		Rectangular	√3	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4		Rectangular	√3	0.23	0.26	0.05	0.06	∞
Combined Standard Uncertainty (K = 1)							± 11.65 %	± 11.66 %	361
Expanded Uncertainty (K = 2)							± 23.29 %	± 23.33 %	

2.3. Antenna Information:

For WLAN

Manufacture	Part Number	Type	Frequency Range (MHz)	Gain (dBi)
Getac	N/A	IFA	2400-2500	2.02
			5150-5250	2.65
			5250-5350	3.39
			5470-5725	3.87
			5725-5850	2.39

For WWAN

Manufacture	Part Number	Type	Band	Gain (dBi)
Getac	N/A	Loop	LTE Band 2	2.63
			LTE Band 4	1.80
			LTE Band 5	-1.18
			LTE Band 12	-3.79
			LTE Band 13	-0.60
			LTE Band 14	-0.63
			LTE Band 25	2.63
			LTE Band 26	-1.18
			LTE Band 66	1.98
			LTE Band 71	-4.94
Getac	N/A	Loop	RX only	-

2.4. The Maximum SAR 1g Values

Band	Mode	Distance(mm)	Highest Body Reported SAR-1g(W/kg)
FHSS	Bluetooth	0	0.034
DTS	Wi-Fi 2.4G	0	0.059
UNII	Wi-Fi 5.2 & 5.3G	0	0.355
	Wi-Fi 5.6G	0	0.391
	Wi-Fi 5.8G	0	0.328

Mode	Distance(mm)	Highest Body Reported SAR-1g(W/kg)
LTE Band 2	0	0.188
LTE Band 4	0	0.235
LTE Band 5	0	0.115
LTE Band 12	0	0.236
LTE Band 13	0	0.165
LTE Band 14	0	0.144
LTE Band 25	0	0.176
LTE Band 26	0	0.094
LTE Band 66	0	0.214
LTE Band 71	0	0.149

Note:

- 1) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:2019/IEEE C95.1:2019, the NCRP Report Number 86 for uncontrolled environment and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020 .

2.5. Laboratory Environment

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2.6. Main Test Instruments

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1289	May. 31, 2022	1 Year
2	E-field Probe	Speag	EX3DV4	7678	Aug. 26, 2021	1 Year
3	System Validation Dipole	Speag	D750V3	1145	May. 27, 2022	3 Year
4	System Validation Dipole	Speag	D900V2	1d185	May. 23, 2022	3 Year
5	System Validation Dipole	Speag	D1800V2	2d210	May. 30, 2022	3 Year
6	System Validation Dipole	Speag	D1900V2	5d208	May. 23, 2022	3 Year
7	System Validation Dipole	Speag	D2450V2	973	Feb. 08, 2021	3 Year
8	System Validation Dipole	Speag	D5GHzV2	1221	Feb. 09, 2021	3 Year
9	ELI4 Phantom	Speag	ELI4 Phantom V8.0	2149	N/A	N/A
10	ENA Network Analyzer	Agilent	E5071C	MY46524658	Mar. 21, 2022	1 Year
11	Signal Generator	R&S	SMR40	100502	Jan. 10, 2022	1 Year
12	Spectrum Analyzer	Keysight	N9020A	MY57120120	Mar. 7, 2022	1 Year
13	Power Meter	Anritsu	ML2487A	6K00004714	Aug. 15, 2021	1 Year
14	Power Sensor	Anritsu	MA2491A	034138	Aug. 15, 2021	1 Year
15	Dielectric Probe Kit	Agilent	85070E	2593	N/A	N/A
16	Low pass filter	Mini-Circuits	SLP-2950+	M108294	N/A	N/A
17	Power Amplifier	Mini-Circuits	ZVE-2W-272+	N650001538	N/A	N/A
18	Power Amplifier	Mini-Circuits	ZVE-8G+	N628801631	N/A	N/A
19	Thermometer	PA	O-230PK	N/A	Mar. 10, 2022	1 Year

Remark: "N/A" denotes no model name, serial No. or calibration specified.


3.. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1.. SAR Measurement Setup

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1.. TEST SETUP LAYOUT

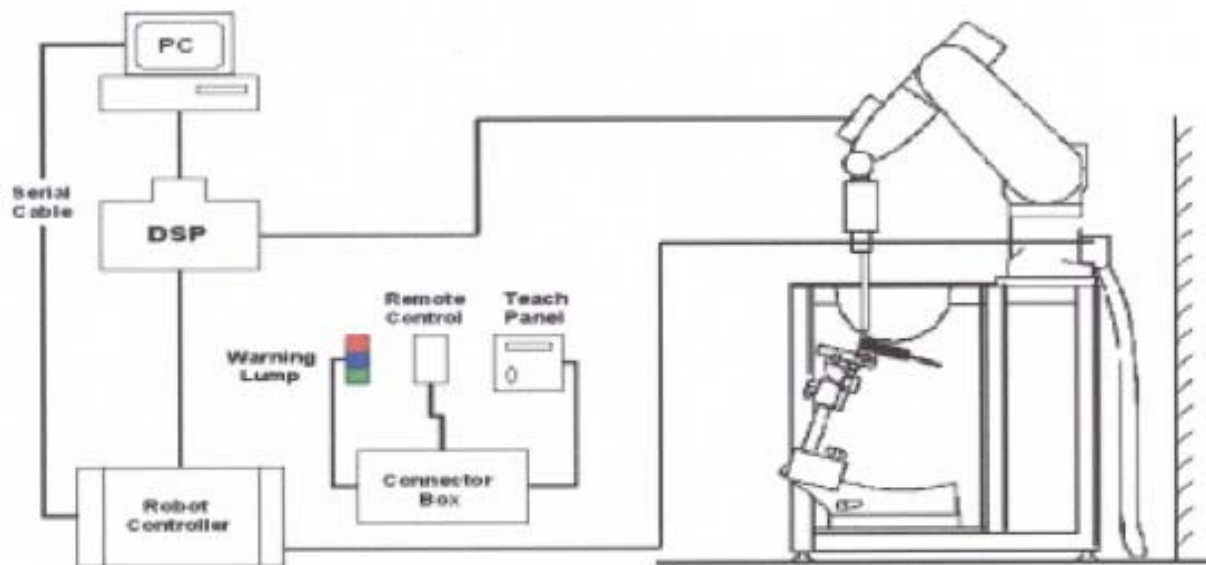


3.2.. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1.. EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

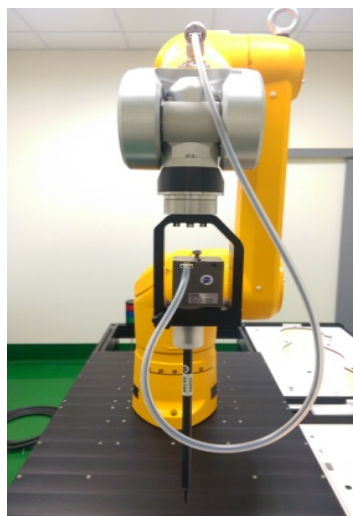

EX3DV4 E-field Probe

3.2.2.. E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

3.2.3.. OTHER TEST EQUIPMENT

3.2.3.1. DEVICE HOLDER FOR TRANSMITTERS

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam


3.2.3.2. PHANTOM

Model	ELI4 Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet	
Aailable	Special	

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length:1000mm; Width: 500mm Height: adjustable feet	
Aailable	Special	

3.2.4.. SCANNING PROCEDURE

The SAR test against the head and body-worn phantom was carried out as follow:

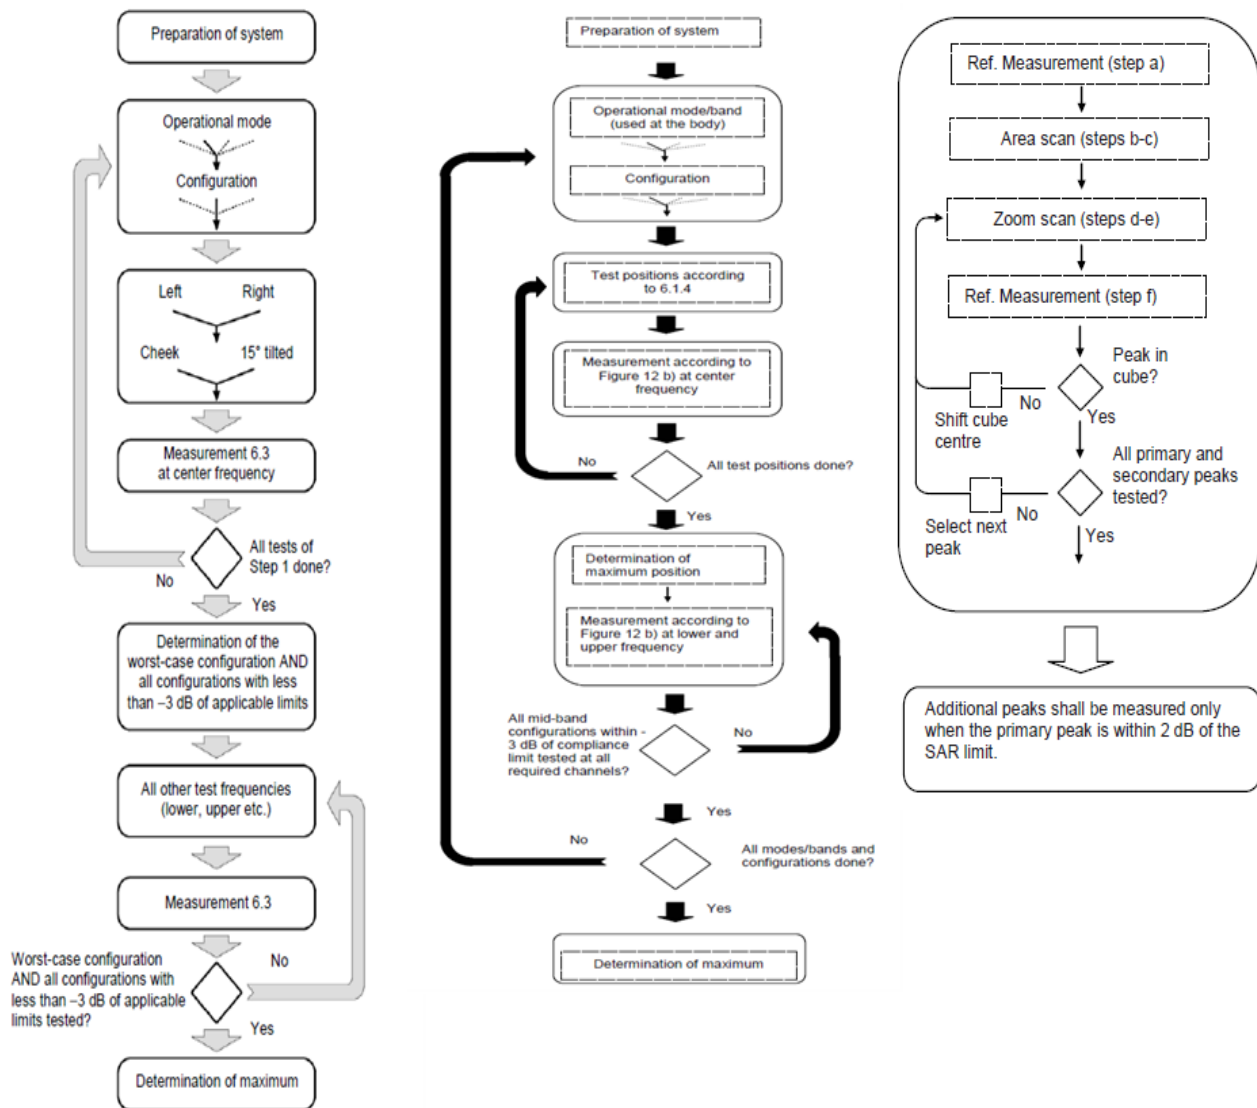

After an area scan has been done at a fixed distance of 1.4mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE1528 standard.

This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

3.2.5.. DATA STORAGE AND EVALUATION

3.2.5.1. DATA STORAGE

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.6.. DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a_{i0} , a_{i1} , a_{i2}
	Conversion factor	ConvF _i
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4.. TISSUE-EQUIVALENT LIQUID

4.1.. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt and Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values. The below table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEC 62209.

Composition of the Tissue Equivalent Matter

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 750	0.2	-	0.2	1.5	56.0	-	42.1	-
Head 900	0.2	-	0.2	1.4	58.0	-	40.2	-
Head 1800	-	44.5	-	0.3	-	-	55.2	-
Head 1900	-	44.5	-	0.2	-	-	55.3	-
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

4.2.. Tissue-equivalent Liquid Properties

Dielectric Performance of Tissue Simulating Liquid

Tissue Verification									
Date	Tissue Type	Frequency (MHz)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Limit (%) ± 5
2022/8/10	Head	750	0.92	41.98	0.89	41.94	3.43	0.09	± 5
2022/8/10	Head	900	0.97	42.64	0.97	41.50	-0.21	2.75	± 5
2022/8/9	Head	1800	1.38	41.09	1.40	40.00	-1.79	2.72	± 5
2022/8/8	Head	1900	1.41	40.87	1.40	40.00	0.50	2.17	± 5

Tissue Verification									
Date	Tissue Type	Frequency (MHz)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Limit (%) ± 5
2022/8/5	Head	2402	1.76	39.26	1.76	39.29	-0.11	-0.08	± 5
2022/8/5	Head	2412	1.76	39.24	1.77	39.27	-0.28	-0.08	± 5
2022/8/5	Head	2422	1.77	39.24	1.78	39.25	-0.39	-0.03	± 5
2022/8/5	Head	2437	1.77	39.18	1.79	39.22	-0.95	-0.10	± 5
2022/8/5	Head	2441	1.77	39.17	1.79	39.21	-1.12	-0.10	± 5
2022/8/5	Head	2450	1.78	39.13	1.80	39.20	-1.17	-0.18	± 5
2022/8/5	Head	2452	1.78	39.12	1.80	39.19	-1.17	-0.18	± 5
2022/8/5	Head	2457	1.78	39.09	1.81	39.19	-1.33	-0.26	± 5
2022/8/5	Head	2462	1.79	39.08	1.81	39.18	-1.05	-0.26	± 5
2022/8/5	Head	2467	1.80	39.06	1.82	39.17	-1.21	-0.28	± 5
2022/8/5	Head	2472	1.80	39.04	1.82	39.17	-1.15	-0.33	± 5
2022/8/5	Head	2480	1.81	39.04	1.83	39.16	-0.98	-0.31	± 5
2022/8/4	Head	5180	4.63	35.67	4.64	36.02	-0.26	-0.97	± 5
2022/8/4	Head	5200	4.61	35.61	4.66	36.00	-0.99	-1.08	± 5
2022/8/4	Head	5220	4.64	35.46	4.68	35.98	-0.81	-1.45	± 5
2022/8/4	Head	5240	4.71	35.35	4.70	35.96	0.15	-1.70	± 5
2022/8/4	Head	5260	4.77	35.32	4.72	35.94	0.97	-1.73	± 5
2022/8/4	Head	5280	4.79	35.40	4.74	35.92	1.10	-1.45	± 5
2022/8/4	Head	5300	4.77	35.45	4.76	35.90	0.29	-1.25	± 5
2022/8/4	Head	5320	4.76	35.38	4.78	35.88	-0.38	-1.39	± 5
2022/8/4	Head	5500	5.08	34.83	4.96	35.60	2.36	-2.16	± 5
2022/8/4	Head	5520	5.08	34.89	4.98	35.58	2.05	-1.94	± 5
2022/8/4	Head	5540	5.07	34.95	5.00	35.56	1.24	-1.72	± 5
2022/8/4	Head	5560	5.05	34.84	5.03	35.54	0.54	-1.97	± 5
2022/8/4	Head	5580	5.09	34.68	5.05	35.52	0.85	-2.36	± 5
2022/8/4	Head	5600	5.17	34.54	5.07	35.50	1.87	-2.70	± 5
2022/8/4	Head	5620	5.23	34.58	5.09	35.48	2.65	-2.54	± 5
2022/8/4	Head	5640	5.23	34.65	5.11	35.46	2.25	-2.28	± 5
2022/8/4	Head	5660	5.21	34.68	5.13	35.44	1.56	-2.14	± 5
2022/8/4	Head	5680	5.21	34.57	5.15	35.42	1.11	-2.40	± 5
2022/8/4	Head	5700	5.25	34.40	5.17	35.40	1.49	-2.82	± 5
2022/8/4	Head	5720	5.31	34.27	5.19	35.38	2.35	-3.14	± 5
2022/8/4	Head	5745	5.37	34.31	5.22	35.35	2.91	-2.94	± 5
2022/8/4	Head	5765	5.37	34.38	5.24	35.33	2.58	-2.69	± 5
2022/8/4	Head	5785	5.35	34.39	5.26	35.31	1.83	-2.61	± 5
2022/8/4	Head	5800	5.35	34.28	5.27	35.30	1.48	-2.89	± 5
2022/8/4	Head	5805	5.35	34.25	5.28	35.29	1.44	-2.95	± 5
2022/8/4	Head	5825	5.41	34.05	5.30	35.27	2.21	-3.46	± 5

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.
- 4) According to FCC TCB workshop April, 2019 RF Exposure Procedures Update(Effective February 19,2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEEE 62209-1- for all SAR tests.

5.1.. DESCRIPTION OF SYSTEM CHECK

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

The diagram illustrates the experimental setup for measuring the radiation pattern of a dipole antenna. The setup includes the following components and connections:

- Signal Source:** A Signal Generator connected to an Amplifier (Amp).
- Filtering and Attenuation:** The signal passes through a Low Pass filter and an Attenuator (Att3).
- Directional Coupling:** A 3dB directional coupler (Dir. Coupler) splits the signal. One path goes through Attenuator (Att2) to a Power Meter (PM2). The other path continues through a Cable to the antenna.
- Antenna and Measurement:** The signal is fed into a Dipole antenna. A Field probe is used to measure the radiation pattern. The antenna is positioned relative to a Flat Phantom.
- Positioning and Reference:** A 3D Probe positioner moves the field probe. A coordinate system (x, y, z) is shown for reference.
- Data Acquisition:** The signal from the antenna is also fed into Attenuator (Att1) and then to a Power Meter (PM1). The data is recorded by a computer.
- Antenna Details:** A detailed inset shows the dipole antenna structure, including a Spacer and a Tuning element.

5.2.. DESCRIPTION OF SYSTEM CHECK

System Check in Tissue Simulating Liquid

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.


Date	System Dipole			Parameters	Target [W/kg]	Measured [W/kg]	Deviation [%]	Limited [%]
	Type	Serial No.	Liquid					
2022/8/10	D750V3	1145	Head	1g SAR	8.55	8.04	-5.96	± 10
2022/8/10	D900V2	1d185	Head	1g SAR	11.10	11.92	7.39	± 10
2022/8/9	D1800V2	2d210	Head	1g SAR	38.20	39.64	3.77	± 10
2022/8/8	D1900V2	5d208	Head	1g SAR	40.20	39.88	-0.80	± 10
2022/8/5	D2450V2	973	Head	1g SAR	52.50	49.20	-6.29	± 10
2022/8/4	D5GHzV2 (5.2GHz)	1221	Head	1g SAR	79.80	83.80	5.01	± 10
2022/8/4	D5GHzV2 (5.3GHz)	1221	Head	1g SAR	81.90	87.90	7.33	± 10
2022/8/4	D5GHzV2 (5.6GHz)	1221	Head	1g SAR	84.50	79.00	-6.51	± 10
2022/8/4	D5GHzV2 (5.8GHz)	1221	Head	1g SAR	81.70	80.30	-1.71	± 10

6.. OPERATIONAL CONDITIONS DURING TEST

6.1.. General Description of Test Procedures

Connection to the EUT is established via air interface with base station An, and the EUT is Set to maximum output power by base station. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

6.2.. Test position Antenna Location

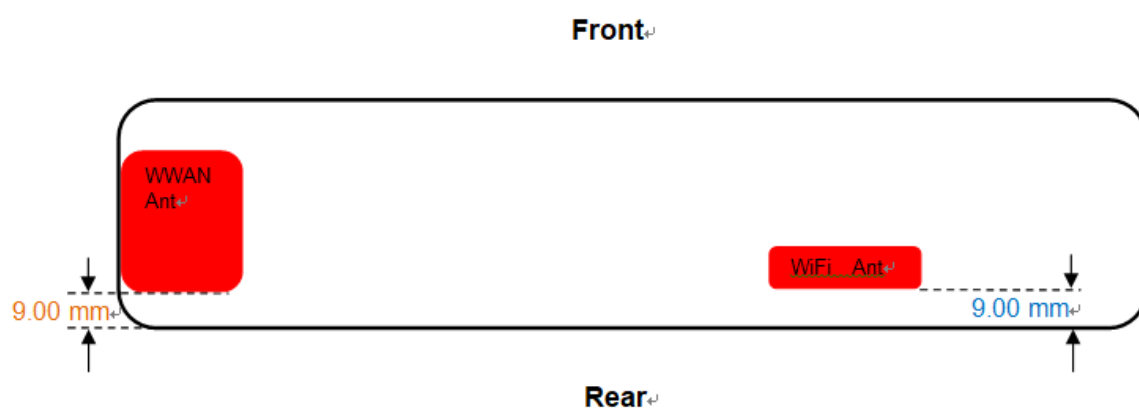

6.3.. Test Position of Portable Devices

Minimum Separation Distance			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN	Rear	9.00	Yes
WWAN	Rear	9.00	Yes

Note:

This device use mode is install accessories on the rear to hang on the body, so we performed the SAR testing on Rear mode

6.4.. TEST CONFIGURATION

The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an EUT edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

SAR test reduction and exclusion guidance

(1)The SAR exclusion threshold for is defined by the following equation:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

Example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)										
	5	10	15	20	25	30	35	40	45	50	
	300	39	65	88	110	129	148	166	184	201	217
	450	22	44	67	89	112	135	158	180	203	226
	835	9	25	44	66	90	116	145	175	207	240
	1900	3	12	26	44	66	92	122	157	195	236
	2450	3	10	22	38	59	83	111	143	179	219
	3600	2	8	18	32	49	71	96	125	158	195
	5800	1	6	14	25	40	58	80	106	136	169

6.5. SAR Exclusion Calculations for EUT Antenna

Mode	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
LTE Band 2	Rear	9.00	1880	24.00	251.19	3	Yes
LTE Band 4	Rear	9.00	1732.5	24.00	251.19	3	Yes
LTE Band 5	Rear	9.00	836.5	24.00	251.19	9	Yes
LTE Band 12	Rear	9.00	707.5	24.00	251.19	9	Yes
LTE Band 13	Rear	9.00	782	24.00	251.19	9	Yes
LTE Band 14	Rear	9.00	793	24.00	251.19	9	Yes
LTE Band 25	Rear	9.00	1882.5	24.00	251.19	3	Yes
LTE Band 26	Rear	9.00	831	24.00	251.19	9	Yes
LTE Band 66	Rear	9.00	1745	24.00	251.19	3	Yes
LTE Band 71	Rear	9.00	680.5	24.00	251.19	9	Yes
Bluetooth	Rear	9.00	2480	11.00	12.59	3	Yes
WiFi 2.4G	Rear	9.00	2437	13.50	22.39	3	Yes
WiFi 5.2G	Rear	9.00	5210	18.50	70.79	1	Yes
WiFi 5.3G	Rear	9.00	5320	18.50	70.79	1	Yes
WiFi 5.6G	Rear	9.00	5580	18.50	70.79	1	Yes
WiFi 5.8G	Rear	9.00	5785	18.50	70.79	1	Yes

7.. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

7.1.. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

7.2.. TEST CONFIGURATION

7.2.1.. WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

Wi-Fi 2.4GHz Band

Mode	802.11b	802.11g	802.11n HT20
Duty cycle	100.00%		
Crest factor	1.00		


Wi-Fi 5GHz Band

Mode	802.11a	802.11n HT20	802.11n HT40	802.11 ac80
Duty cycle	100.00%			
Crest factor	1.00			

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 are applied.

Bluetooth

Mode	Bluetooth 1M	Bluetooth 2M	Bluetooth 3M	BLE 1M
Duty cycle	76.80 %	57.49%	76.80%	62.03%
Crest factor	1.30	1.74	1.30	1.61

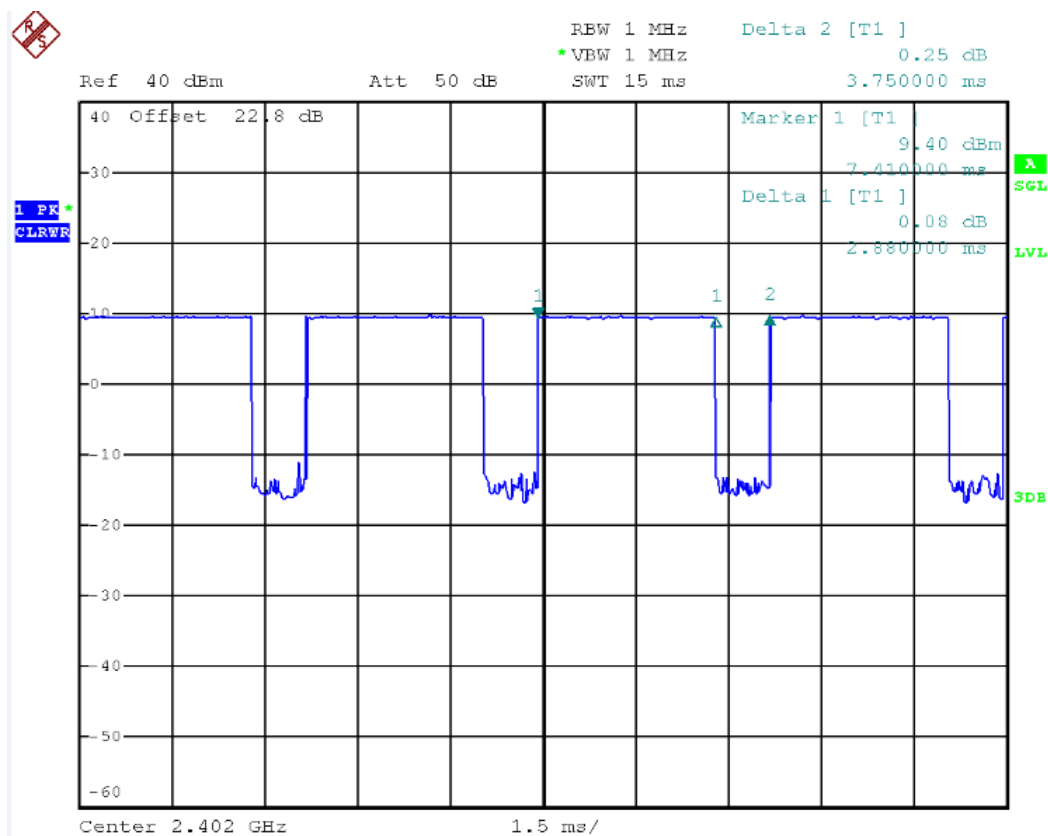

7.2.2. WLAN2.4G SAR TEST REQUIREMENTS

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.3. WLAN5G SAR TEST REQUIREMENTS

✧ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

✧ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.2.4. OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.2.5. INITIAL TEST CONFIGURATION PROCEDURE

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration. When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

7.3.. LTE Test Configuration

Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The RS CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI(transmit time interval) supported by the device in each LTE configuration.

1)Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.

3)A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of "NS=01"on the base station simulator.

4)SAR test requirements

The LTE SAR test is choice the max power mode and start with the max power channel.

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

When the SAR is ≤ 1 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the 10-g SAR of a required test channel is > 1.8 W/kg, SAR is required for all three RB offset configurations for that required test channel.

8.. CONDUCTED POWER RESULTS

8.1.. CONDUCTED POWER MEASUREMENTS OF LTE Band

LTE Band 2

LTE B2/BW=1.4M		Average Conducted Power(dBm)				LTE B2/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18607/1850.7	18900/1880.0	19192/1909.2				18615/1851.5	18900/1880.0	19184/1908.4
QPSK	1/0	24.00	22.76	22.82	22.44	QPSK	1/0	24.00	22.81	22.87	22.49
	1/2	24.00	22.99	22.71	22.67		1/7	24.00	23.04	22.76	22.72
	1/5	24.00	22.80	22.16	22.47		1/14	24.00	22.85	22.21	22.52
	3/0	23.00	22.77	22.83	22.45		8/0	23.00	21.92	21.98	21.60
	3/1	23.00	23.05	22.77	22.73		8/4	23.00	22.20	21.92	21.88
	3/2	23.00	22.84	22.20	22.51		8/7	23.00	21.99	21.35	21.66
	6/0	23.00	21.87	21.82	21.55		15/0	23.00	21.92	21.87	21.60
16QAM	1/0	23.00	21.85	21.91	21.53	16QAM	1/0	23.00	21.90	21.96	21.58
	1/2	23.00	22.09	21.81	21.77		1/7	23.00	22.14	21.86	21.82
	1/5	23.00	21.91	21.27	21.58		1/14	23.00	21.96	21.32	21.63
	3/0	22.00	21.71	21.98	21.42		8/0	22.00	20.86	21.13	20.57
	3/1	22.00	21.95	21.88	21.68		8/4	22.00	21.15	21.03	20.83
	3/2	22.00	21.76	21.26	21.63		8/7	22.00	20.91	20.41	20.78
	6/0	22.00	21.02	20.85	20.70		15/0	22.00	21.07	20.90	20.75
LTE B2/BW=5M		Average Conducted Power(dBm)				LTE B2/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18625/1852.5	18900/1880	19175/1907.5				18650/1855	18900/1880	19150/1905
QPSK	1/0	24.00	22.86	22.92	22.54	QPSK	1/0	24.00	22.91	22.97	22.59
	1/12	24.00	23.09	22.81	22.77		1/24	24.00	23.14	22.86	22.82
	1/24	24.00	22.90	22.26	22.57		1/49	24.00	22.95	22.31	22.62
	12/0	23.00	21.97	22.03	21.65		25/0	23.00	22.02	22.08	21.70
	12/6	23.00	22.25	21.97	21.93		25/12	23.00	22.30	22.02	21.98
	12/11	23.00	22.04	21.40	21.71		25/24	23.00	22.09	21.45	21.76
	25/0	23.00	21.97	21.92	21.65		50/0	23.00	22.02	21.97	21.70
16QAM	1/0	23.00	21.95	22.01	21.63	16QAM	1/0	23.00	22.00	22.06	21.68
	1/12	23.00	22.19	21.91	21.87		1/24	23.00	22.24	21.96	21.92
	1/24	23.00	22.01	21.37	21.68		1/49	23.00	22.06	21.42	21.73
	12/0	22.00	20.91	21.18	20.62		25/0	22.00	20.96	21.23	20.67
	12/6	22.00	21.20	21.08	20.88		25/12	22.00	21.25	21.13	20.93
	12/11	22.00	20.96	20.46	20.83		25/24	22.00	21.01	20.51	20.88
	25/0	22.00	21.12	20.95	20.80		50/0	22.00	21.17	21.00	20.85

LTE B2/BW=15M		Average Conducted Power(dBm)				LTE B2/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18675/1857.5	18900/1880	19125/1902.5				18700/1860	18900/1880	19100/1900
QPSK	1/0	24.00	22.96	23.02	22.64	QPSK	1/0	24.00	23.01	23.07	22.69
	1/37	24.00	23.19	22.91	22.87		1/49	24.00	23.24	22.96	22.92
	1/74	24.00	23.00	22.36	22.67		1/99	24.00	23.05	22.41	22.72
	36/0	23.00	22.07	22.13	21.75		50/0	23.00	22.12	22.18	21.80
	36/18	23.00	22.35	22.07	22.03		50/24	23.00	22.40	22.12	22.08
	36/35	23.00	22.14	21.50	21.81		50/49	23.00	22.19	21.55	21.86
	75/0	23.00	22.07	22.02	21.75		100/0	23.00	22.12	22.07	21.80
16QAM	1/0	23.00	22.05	22.11	21.73	16QAM	1/0	23.00	22.10	22.16	21.78
	1/37	23.00	22.29	22.01	21.97		1/49	23.00	22.34	22.06	22.02
	1/74	23.00	22.11	21.47	21.78		1/99	23.00	22.16	21.52	21.83
	36/0	22.00	21.01	21.28	20.72		50/0	22.00	21.06	21.33	20.77
	36/18	22.00	21.30	21.18	20.98		50/24	22.00	21.35	21.23	21.03
	36/35	22.00	21.06	20.56	20.93		50/49	22.00	21.11	20.61	20.98
	75/0	22.00	21.22	21.05	20.90		100/0	22.00	21.27	21.10	20.95

LTE Band 4

LTE B4/BW=1.4M		Average Conducted Power(dBm)				LTE B4/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19957/1710.7	20175/1732.5	20392/1754.2				19965/1711.5	20175/1732.5	20384/1753.4
QPSK	1/0	24.00	22.57	22.50	22.65	QPSK	1/0	24.00	22.62	22.55	22.70
	1/2	24.00	22.91	22.66	22.84		1/7	24.00	22.96	22.71	22.89
	1/5	24.00	22.46	22.39	22.69		1/14	24.00	22.51	22.44	22.74
	3/0	23.00	22.57	22.50	22.65		8/0	23.00	21.73	21.66	21.81
	3/1	23.00	22.91	22.66	22.84		8/4	23.00	22.12	21.87	22.05
	3/2	23.00	22.46	22.39	22.69		8/7	23.00	21.65	21.58	21.88
	6/0	23.00	21.68	21.61	21.76		15/0	23.00	21.73	21.66	21.81
16QAM	1/0	23.00	21.66	21.59	21.74	16QAM	1/0	23.00	21.71	21.64	21.79
	1/2	23.00	22.01	21.76	21.94		1/7	23.00	22.06	21.81	21.99
	1/5	23.00	21.57	21.50	21.80		1/14	23.00	21.62	21.55	21.85
	3/0	22.00	21.66	21.59	21.74		8/0	22.00	20.56	20.49	20.79
	3/1	22.00	22.01	21.76	21.94		8/4	22.00	21.07	20.82	21.00
	3/2	22.00	21.57	21.50	21.80		8/7	22.00	21.02	20.77	20.95
	6/0	22.00	20.94	20.44	20.74		15/0	22.00	20.99	20.74	20.92
LTE B4/BW=5M		Average Conducted Power(dBm)				LTE B4/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19975/1712.5	20175/1732.5	20375/1752.5				20000/1715	20175/1732.5	20350/1750
QPSK	1/0	24.00	22.67	22.60	22.75	QPSK	1/0	24.00	22.72	22.65	22.80
	1/12	24.00	23.01	22.76	22.94		1/24	24.00	23.06	22.81	22.99
	1/24	24.00	22.56	22.49	22.79		1/49	24.00	22.61	22.54	22.84
	12/0	23.00	21.78	21.71	21.86		25/0	23.00	21.83	21.76	21.91
	12/6	23.00	22.17	21.92	22.10		25/12	23.00	22.22	21.97	22.15
	12/11	23.00	21.70	21.63	21.93		25/24	23.00	21.75	21.68	21.98
	25/0	23.00	21.78	21.71	21.86		50/0	23.00	21.83	21.76	21.91
16QAM	1/0	23.00	21.76	21.69	21.84	16QAM	1/0	23.00	21.81	21.74	21.89
	1/12	23.00	22.11	21.86	22.04		1/24	23.00	22.16	21.91	22.09
	1/24	23.00	21.67	21.60	21.90		1/49	23.00	21.72	21.65	21.95
	12/0	22.00	20.61	20.54	20.84		25/0	22.00	20.66	20.59	20.89
	12/6	22.00	21.12	20.87	21.05		25/12	22.00	21.17	20.92	21.10
	12/11	22.00	21.07	20.82	21.00		25/24	22.00	21.12	20.87	21.05
	25/0	22.00	21.04	20.79	20.97		50/0	22.00	21.09	20.84	21.02

LTE B4/BW=15M		Average Conducted Power(dBm)				LTE B4/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20025/1717.5	20175/1732.5	20325/1747.5				20050/1720	20175/1732.5	20300/1745
QPSK	1/0	24.00	22.77	22.70	22.85	QPSK	1/0	24.00	22.82	22.75	22.90
	1/37	24.00	23.11	22.86	23.04		1/49	24.00	23.16	22.91	23.09
	1/74	24.00	22.66	22.59	22.89		1/99	24.00	22.71	22.64	22.94
	36/0	23.00	21.88	21.81	21.96		50/0	23.00	21.93	21.86	22.01
	36/18	23.00	22.27	22.02	22.20		50/24	23.00	22.32	22.07	22.25
	36/35	23.00	21.80	21.73	22.03		50/49	23.00	21.85	21.78	22.08
	75/0	23.00	21.88	21.81	21.96		100/0	23.00	21.93	21.86	22.01
16QAM	1/0	23.00	21.86	21.79	21.94	16QAM	1/0	23.00	21.91	21.84	21.99
	1/37	23.00	22.21	21.96	22.14		1/49	23.00	22.26	22.01	22.19
	1/74	23.00	21.77	21.70	22.00		1/99	23.00	21.82	21.75	22.05
	36/0	22.00	20.71	20.64	20.94		50/0	22.00	20.76	20.69	20.99
	36/18	22.00	21.22	20.97	21.15		50/24	22.00	21.27	21.02	21.20
	36/35	22.00	21.17	20.92	21.10		50/49	22.00	21.22	20.97	21.15
	75/0	22.00	21.14	20.89	21.07		100/0	22.00	21.19	20.94	21.12

LTE Band 5

LTE B5/BW=1.4M		Average Conducted Power(dBm)				LTE B5/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20407/824.	20525/836.5	20642/848.2				20415/825.5	20525/836.5	20634/847.4
QPSK	1/0	24.00	23.11	23.20	23.06	QPSK	1/0	24.00	23.16	23.25	23.11
	1/2	24.00	23.26	23.19	23.42		1/7	24.00	23.31	23.24	23.47
	1/5	24.00	22.92	22.82	23.03		1/14	24.00	22.97	22.87	23.08
	3/0	23.00	23.11	23.20	23.06		8/0	23.00	22.27	22.36	22.22
	3/1	23.00	23.26	23.19	23.42		8/4	23.00	22.47	22.40	22.63
	3/2	23.00	22.92	22.82	23.03		8/7	23.00	22.11	22.01	22.22
	6/0	23.00	22.22	22.31	22.17		15/0	23.00	22.27	22.36	22.22
16QAM	1/0	23.00	22.20	22.29	22.15	16QAM	1/0	23.00	22.25	22.34	22.20
	1/2	23.00	22.36	22.29	22.52		1/7	23.00	22.41	22.34	22.57
	1/5	23.00	22.03	21.93	22.14		1/14	23.00	22.08	21.98	22.19
	3/0	22.00	22.20	22.29	22.15		8/0	22.00	21.02	20.92	21.13
	3/1	22.00	22.36	22.29	22.52		8/4	22.00	21.42	21.35	21.58
	3/2	22.00	22.03	21.93	22.14		8/7	22.00	21.37	21.30	21.53
	6/0	22.00	21.29	20.87	21.08		15/0	22.00	21.34	21.27	21.50
LTE B5/BW=5M		Average Conducted Power(dBm)				LTE B5/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20415/825.5	20525/836.5	20634/847.4				20450/829	20525/836.5	20600/844
QPSK	1/0	24.00	23.21	23.30	23.16	QPSK	1/0	24.00	23.26	23.35	23.21
	1/12	24.00	23.36	23.29	23.52		1/24	24.00	23.41	23.34	23.57
	1/24	24.00	23.02	22.92	23.13		1/49	24.00	23.07	22.97	23.18
	12/0	23.00	22.32	22.41	22.27		25/0	23.00	22.37	22.46	22.32
	12/6	23.00	22.52	22.45	22.68		25/12	23.00	22.57	22.50	22.73
	12/11	23.00	22.16	22.06	22.27		25/24	23.00	22.21	22.11	22.32
	25/0	23.00	22.32	22.41	22.27		50/0	23.00	22.37	22.46	22.32
16QAM	1/0	23.00	22.30	22.39	22.25	16QAM	1/0	23.00	22.35	22.44	22.30
	1/12	23.00	22.46	22.39	22.62		1/24	23.00	22.51	22.44	22.67
	1/24	23.00	22.13	22.03	22.24		1/49	23.00	22.18	22.08	22.29
	12/0	22.00	21.07	20.97	21.18		25/0	22.00	21.12	21.02	21.23
	12/6	22.00	21.47	21.40	21.63		25/12	22.00	21.52	21.45	21.68
	12/11	22.00	21.42	21.35	21.58		25/24	22.00	21.47	21.40	21.63
	25/0	22.00	21.39	21.32	21.55		50/0	22.00	21.44	21.37	21.60

LTE Band 12

LTE B12/BW=1.4M			Average Conducted Power(dBm)			LTE B12/BW=3M			Average Conducted Power(dBm)		
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23017/699.7	23095/707.5	23173/715.3				23025/700.5	23095/707.5	23165/714.5
QPSK	1/0	24.00	22.82	22.57	22.90	QPSK	1/0	24.00	22.87	22.62	22.95
	1/2	24.00	22.97	23.07	22.94		1/7	24.00	23.02	23.12	22.99
	1/5	24.00	22.73	22.89	22.77		1/14	24.00	22.78	22.94	22.82
	3/0	23.00	22.82	22.57	22.90		8/0	23.00	21.98	21.73	22.06
	3/1	23.00	22.97	23.07	22.94		8/4	23.00	22.18	22.28	22.15
	3/2	23.00	22.73	22.89	22.77		8/7	23.00	21.92	22.08	21.96
	6/0	23.00	21.93	21.68	22.01		15/0	23.00	21.98	21.73	22.06
16QAM	1/0	23.00	21.91	21.66	21.99	16QAM	1/0	23.00	21.96	21.71	22.04
	1/2	23.00	22.07	22.17	22.04		1/7	23.00	22.12	22.22	22.09
	1/5	23.00	21.84	22.00	21.88		1/14	23.00	21.89	22.05	21.93
	3/0	22.00	21.91	21.66	21.99		8/0	22.00	20.83	20.99	20.87
	3/1	22.00	22.07	22.17	22.04		8/4	22.00	21.13	21.23	21.10
	3/2	22.00	21.84	22.00	21.88		8/7	22.00	21.08	21.18	21.05
	6/0	22.00	21.00	20.94	20.82		15/0	22.00	21.05	21.15	21.02
LTE B12/BW=5M			Average Conducted Power(dBm)			LTE B12/BW=10M			Average Conducted Power(dBm)		
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23035/701.5	23095/707.5	23155/713.5				23060/704	23095/707.5	23130/711
QPSK	1/0	24.00	22.92	22.67	23.00	QPSK	1/0	24.00	22.97	22.72	23.05
	1/12	24.00	23.07	23.17	23.04		1/24	24.00	23.12	23.22	23.09
	1/24	24.00	22.83	22.99	22.87		1/49	24.00	22.88	23.04	22.92
	12/0	23.00	22.03	21.78	22.11		25/0	23.00	22.08	21.83	22.16
	12/6	23.00	22.23	22.33	22.20		25/12	23.00	22.28	22.38	22.25
	12/11	23.00	21.97	22.13	22.01		25/24	23.00	22.02	22.18	22.06
	25/0	23.00	22.03	21.78	22.11		50/0	23.00	22.08	21.83	22.16
16QAM	1/0	23.00	22.01	21.76	22.09	16QAM	1/0	23.00	22.06	21.81	22.14
	1/12	23.00	22.17	22.27	22.14		1/24	23.00	22.22	22.32	22.19
	1/24	23.00	21.94	22.10	21.98		1/49	23.00	21.99	22.15	22.03
	12/0	22.00	20.88	21.04	20.92		25/0	22.00	20.93	21.09	20.97
	12/6	22.00	21.18	21.28	21.15		25/12	22.00	21.23	21.33	21.20
	12/11	22.00	21.13	21.23	21.10		25/24	22.00	21.18	21.28	21.15
	25/0	22.00	21.10	21.20	21.07		50/0	22.00	21.15	21.25	21.12

LTE Band 13

LTE B13/BW=5M		Average Conducted Power(dBm)				LTE B13/BW=10M		Average Conducted Power(dBm)	
Modula-tion	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modula-tion	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23205/779.5	23230/782	23155/784.5				
QPSK	1/0	24.00	22.96	22.99	22.98	QPSK	1/0	24.00	23.03
	1/12	24.00	23.29	23.32	23.30		1/24	24.00	23.35
	1/24	24.00	22.97	23.01	22.99		1/49	24.00	23.04
	12/0	23.00	22.07	22.11	22.09		25/0	23.00	22.14
	12/6	23.00	22.45	22.48	22.46		25/12	23.00	22.51
	12/11	23.00	22.12	22.15	22.13		25/24	23.00	22.18
	25/0	23.00	22.10	22.11	22.09		50/0	23.00	22.14
16QAM	1/0	23.00	22.06	22.09	22.07	16QAM	1/0	23.00	22.12
	1/12	23.00	22.39	22.42	22.40		1/24	23.00	22.45
	1/24	23.00	22.08	22.12	22.10		1/49	23.00	22.15
	12/0	22.00	21.01	21.06	21.04		25/0	22.00	21.09
	12/6	22.00	21.39	21.43	21.41		25/12	22.00	21.46
	12/11	22.00	21.35	21.38	21.36		25/24	22.00	21.41
	25/0	22.00	21.32	21.35	21.33		50/0	22.00	21.38

LTE Band 14

LTE B14/BW=5M		Average Conducted Power(dBm)				LTE B14/BW=10M		Average Conducted Power(dBm)	
Modula-tion	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modula-tion	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23305/790.5	23330/793	23355/795.5				
QPSK	1/0	24.00	23.10	23.13	23.12	QPSK	1/0	24.00	23.17
	1/12	24.00	23.38	23.41	23.39		1/24	24.00	23.44
	1/24	24.00	23.25	23.29	23.27		1/49	24.00	23.32
	12/0	23.00	22.21	22.25	22.23		25/0	23.00	22.28
	12/6	23.00	22.54	22.57	22.55		25/12	23.00	22.60
	12/11	23.00	22.40	22.43	22.41		25/24	23.00	22.46
	25/0	23.00	22.24	22.25	22.23		50/0	23.00	22.28
16QAM	1/0	23.00	22.20	22.23	22.21	16QAM	1/0	23.00	22.26
	1/12	23.00	22.48	22.51	22.49		1/24	23.00	22.54
	1/24	23.00	22.36	22.40	22.38		1/49	23.00	22.43
	12/0	22.00	21.29	21.34	21.32		25/0	22.00	21.37
	12/6	22.00	21.48	21.52	21.50		25/12	22.00	21.55
	12/11	22.00	21.44	21.47	21.45		25/24	22.00	21.50
	25/0	22.00	21.41	21.44	21.42		50/0	22.00	21.47

LTE Band 25

LTE B25/BW=1.4M		Average Conducted Power(dBm)				LTE B25/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26047/1850.7	26365/1882.5	26683/1914.3				26055/1851.5	26365/1882.5	26675/1913.5
QPSK	1/0	24.00	22.56	22.45	22.68	QPSK	1/0	24.00	22.61	22.50	22.73
	1/2	24.00	23.00	22.72	22.87		1/7	24.00	23.05	22.77	22.92
	1/5	24.00	22.56	22.58	22.80		1/14	24.00	22.61	22.63	22.85
	3/0	23.00	22.56	22.45	22.68		8/0	23.00	21.72	21.61	21.84
	3/1	23.00	23.00	22.72	22.87		8/4	23.00	22.21	21.93	22.08
	3/2	23.00	22.56	22.58	22.80		8/7	23.00	21.75	21.77	21.99
	6/0	23.00	21.67	21.56	21.79		15/0	23.00	21.72	21.61	21.84
16QAM	1/0	23.00	21.65	21.54	21.77	16QAM	1/0	23.00	21.70	21.59	21.82
	1/2	23.00	22.10	21.82	21.97		1/7	23.00	22.15	21.87	22.02
	1/5	23.00	21.67	21.69	21.91		1/14	23.00	21.72	21.74	21.96
	3/0	22.00	21.65	21.54	21.77		8/0	22.00	20.66	20.68	20.90
	3/1	22.00	22.10	21.82	21.97		8/4	22.00	21.16	20.88	21.03
	3/2	22.00	21.67	21.69	21.91		8/7	22.00	21.11	20.83	20.98
	6/0	22.00	21.03	20.63	20.85		15/0	22.00	21.08	20.80	20.95
LTE B25/BW=5M		Average Conducted Power(dBm)				LTE B25/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26065/1852.5	26365/1882.5	26665/1912.5				26090/1855	26365/1882.5	26640/1910
QPSK	1/0	24.00	22.66	22.55	22.78	QPSK	1/0	24.00	22.71	22.60	22.83
	1/12	24.00	23.10	22.82	22.97		1/24	24.00	23.15	22.87	23.02
	1/24	24.00	22.66	22.68	22.90		1/49	24.00	22.71	22.73	22.95
	12/0	23.00	21.77	21.66	21.89		25/0	23.00	21.82	21.71	21.94
	12/6	23.00	22.26	21.98	22.13		25/12	23.00	22.31	22.03	22.18
	12/11	23.00	21.80	21.82	22.04		25/24	23.00	21.85	21.87	22.09
	25/0	23.00	21.77	21.66	21.89		50/0	23.00	21.82	21.71	21.94
16QAM	1/0	23.00	21.75	21.64	21.87	16QAM	1/0	23.00	21.80	21.69	21.92
	1/12	23.00	22.20	21.92	22.07		1/24	23.00	22.25	21.97	22.12
	1/24	23.00	21.77	21.79	22.01		1/49	23.00	21.82	21.84	22.06
	12/0	22.00	20.71	20.73	20.95		25/0	22.00	20.76	20.78	21.00
	12/6	22.00	21.21	20.93	21.08		25/12	22.00	21.26	20.98	21.13
	12/11	22.00	21.16	20.88	21.03		25/24	22.00	21.21	20.93	21.08
	25/0	22.00	21.13	20.85	21.00		50/0	22.00	21.18	20.90	21.05

LTE B25/BW=15M		Average Conducted Power(dBm)				LTE B25/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26115/1857.5	26365/1882.5	26615/1907.5				26140/1860	26365/1882.5	26590/1905
QPSK	1/0	24.00	22.76	22.65	22.88	QPSK	1/0	24.00	22.81	22.70	22.93
	1/37	24.00	23.20	22.92	23.07		1/49	24.00	23.25	22.97	23.12
	1/74	24.00	22.76	22.78	23.00		1/99	24.00	22.81	22.83	23.05
	36/0	23.00	21.87	21.76	21.99		50/0	23.00	21.92	21.81	22.04
	36/18	23.00	22.36	22.08	22.23		50/24	23.00	22.41	22.13	22.28
	36/35	23.00	21.90	21.92	22.14		50/49	23.00	21.95	21.97	22.19
	75/0	23.00	21.87	21.76	21.99		100/0	23.00	21.92	21.81	22.04
16QAM	1/0	23.00	21.85	21.74	21.97	16QAM	1/0	23.00	21.90	21.79	22.02
	1/37	23.00	22.30	22.02	22.17		1/49	23.00	22.35	22.07	22.22
	1/74	23.00	21.87	21.89	22.11		1/99	23.00	21.92	21.94	22.16
	36/0	22.00	20.81	20.83	21.05		50/0	22.00	20.86	20.88	21.10
	36/18	22.00	21.31	21.03	21.18		50/24	22.00	21.36	21.08	21.23
	36/35	22.00	21.26	20.98	21.13		50/49	22.00	21.31	21.03	21.18
	75/0	22.00	21.23	20.95	21.10		100/0	22.00	21.28	21.00	21.15

LTE Band 26

LTE B26/BW=1.4M		Average Conducted Power(dBm)				LTE B26/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26797/824.7	26915/836.5	27033/848.3				26805/825.5	26915/836.5	27025/847.5
QPSK	1/0	24.00	23.10	22.99	22.97	QPSK	1/0	24.00	23.15	23.04	23.02
	1/2	24.00	23.62	23.47	23.11		1/7	24.00	23.67	23.52	23.16
	1/5	24.00	23.43	23.21	22.92		1/14	24.00	23.48	23.26	22.97
	3/0	23.00	23.10	22.99	22.97		8/0	23.00	22.26	22.15	22.13
	3/1	23.00	23.62	23.47	23.11		8/4	23.00	22.83	22.68	22.32
	3/2	23.00	23.43	23.21	22.92		8/7	23.00	22.62	22.40	22.11
	6/0	23.00	22.21	22.10	22.08		15/0	23.00	22.26	22.15	22.13
16QAM	1/0	23.00	22.19	22.08	22.06	16QAM	1/0	23.00	22.24	22.13	22.11
	1/2	23.00	22.72	22.57	22.21		1/7	23.00	22.77	22.62	22.26
	1/5	23.00	22.54	22.32	22.03		1/14	23.00	22.59	22.37	22.08
	3/0	22.00	22.19	22.08	22.06		8/0	22.00	21.53	21.31	21.02
	3/1	22.00	22.72	22.57	22.21		8/4	22.00	21.78	21.63	21.27
	3/2	22.00	22.54	22.32	22.03		8/7	22.00	21.73	21.58	21.22
	6/0	22.00	21.65	21.26	20.97		15/0	22.00	21.70	21.55	21.19
LTE B26/BW=5M		Average Conducted Power(dBm)				LTE B26/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26815/826.5	26915/836.5	27015/846.5				26840/829	26915/836.5	26990/844
QPSK	1/0	24.00	23.20	23.09	23.07	QPSK	1/0	24.00	23.25	23.14	23.12
	1/12	24.00	23.72	23.57	23.21		1/24	24.00	23.77	23.62	23.26
	1/24	24.00	23.53	23.31	23.02		1/49	24.00	23.58	23.36	23.07
	12/0	23.00	22.31	22.20	22.18		25/0	23.00	22.36	22.25	22.23
	12/6	23.00	22.88	22.73	22.37		25/12	23.00	22.93	22.78	22.42
	12/11	23.00	22.67	22.45	22.16		25/24	23.00	22.72	22.50	22.21
	25/0	23.00	22.31	22.20	22.18		50/0	23.00	22.36	22.25	22.23
16QAM	1/0	23.00	22.29	22.18	22.16	16QAM	1/0	23.00	22.34	22.23	22.21
	1/12	23.00	22.82	22.67	22.31		1/24	23.00	22.87	22.72	22.36
	1/24	23.00	22.64	22.42	22.13		1/49	23.00	22.69	22.47	22.18
	12/0	22.00	21.58	21.36	21.07		25/0	22.00	21.63	21.41	21.12
	12/6	22.00	21.83	21.68	21.32		25/12	22.00	21.88	21.73	21.37
	12/11	22.00	21.78	21.63	21.27		25/24	22.00	21.83	21.68	21.32
	25/0	22.00	21.75	21.60	21.24		50/0	22.00	21.80	21.65	21.29

LTE B26/BW=15M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26865/831.5	26915/836.5	26965/841.5
QPSK	1/0	24.00	23.30	23.19	23.17
	1/37	24.00	23.82	23.67	23.31
	1/74	24.00	23.63	23.41	23.12
	36/0	23.00	22.41	22.30	22.28
	36/18	23.00	22.98	22.83	22.47
	36/35	23.00	22.77	22.55	22.26
	75/0	23.00	22.41	22.30	22.28
16QAM	1/0	23.00	22.39	22.28	22.26
	1/37	23.00	22.92	22.77	22.41
	1/74	23.00	22.74	22.52	22.23
	36/0	22.00	21.68	21.46	21.17
	36/18	22.00	21.93	21.78	21.42
	36/35	22.00	21.88	21.73	21.37
	75/0	22.00	21.85	21.70	21.34

LTE Band 66

LTE B66/BW=1.4M		Average Conducted Power(dBm)				LTE B66/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131979/1710.7	132322/1745.0	132665/1779.3				131987/1711.5	132322/1745.0	132657/1778.5
QPSK	1/0	24.00	22.43	22.42	22.07	QPSK	1/0	24.00	22.48	22.47	22.12
	1/2	24.00	22.77	22.60	22.81		1/7	24.00	22.82	22.65	22.86
	1/5	24.00	22.69	22.19	22.46		1/14	24.00	22.74	22.24	22.51
	3/0	23.00	22.43	22.42	22.07		8/0	23.00	21.59	21.58	21.23
	3/1	23.00	22.77	22.60	22.81		8/4	23.00	21.98	21.81	22.02
	3/2	23.00	22.69	22.19	22.46		8/7	23.00	21.88	21.38	21.65
	6/0	23.00	21.54	21.53	21.18		15/0	23.00	21.59	21.58	21.23
16QAM	1/0	23.00	21.52	21.51	21.16	16QAM	1/0	23.00	21.57	21.56	21.21
	1/2	23.00	21.87	21.70	21.91		1/7	23.00	21.92	21.75	21.96
	1/5	23.00	21.80	21.30	21.57		1/14	23.00	21.85	21.35	21.62
	3/0	22.00	21.52	21.51	21.16		8/0	22.00	20.79	20.29	20.56
	3/1	22.00	21.87	21.70	21.91		8/4	22.00	20.93	20.76	20.97
	3/2	22.00	21.80	21.30	21.57		8/7	22.00	20.88	20.71	20.92
	6/0	22.00	20.80	20.24	20.51		15/0	22.00	20.85	20.68	20.89
LTE B66/BW=5M		Average Conducted Power(dBm)				LTE B66/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131997/1712.5	132322/1745	132647/1777.5				132022/1715	132322/1745	132622/1775
QPSK	1/0	24.00	22.53	22.52	22.17	QPSK	1/0	24.00	22.58	22.57	22.22
	1/12	24.00	22.87	22.70	22.91		1/24	24.00	22.92	22.75	22.96
	1/49	24.00	22.79	22.29	22.56		1/49	24.00	22.84	22.34	22.61
	25/0	23.00	21.64	21.63	21.28		25/0	23.00	21.69	21.68	21.33
	25/12	23.00	22.03	21.86	22.07		25/12	23.00	22.08	21.91	22.12
	25/24	23.00	21.93	21.43	21.70		25/24	23.00	21.98	21.48	21.75
	50/0	23.00	21.64	21.63	21.28		50/0	23.00	21.69	21.68	21.33
16QAM	1/0	23.00	21.62	21.61	21.26	16QAM	1/0	23.00	21.67	21.66	21.31
	1/24	23.00	21.97	21.80	22.01		1/24	23.00	22.02	21.85	22.06
	1/49	23.00	21.90	21.40	21.67		1/49	23.00	21.95	21.45	21.72
	25/0	22.00	20.84	20.34	20.61		25/0	22.00	20.89	20.39	20.66
	25/12	22.00	20.98	20.81	21.02		25/12	22.00	21.03	20.86	21.07
	25/24	22.00	20.93	20.76	20.97		25/24	22.00	20.98	20.81	21.02
	50/0	22.00	20.90	20.73	20.94		50/0	22.00	20.95	20.78	20.99

LTE B66/BW=15M		Average Conducted Power(dBm)				LTE B66/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			132047/1717.5	132322/1745	132597/1772.5				132072/1720	132322/1745	132572/1770
QPSK	1/0	24.00	22.63	22.62	22.27	QPSK	1/0	24.00	22.68	22.67	22.32
	1/37	24.00	22.97	22.80	23.01		1/49	24.00	23.02	22.85	23.06
	1/74	24.00	22.89	22.39	22.66		1/99	24.00	22.94	22.44	22.71
	36/0	23.00	21.74	21.73	21.38		50/0	23.00	21.79	21.78	21.43
	36/18	23.00	22.13	21.96	22.17		50/24	23.00	22.18	22.01	22.22
	36/35	23.00	22.03	21.53	21.80		50/49	23.00	22.08	21.58	21.85
	75/0	23.00	21.74	21.73	21.38		100/0	23.00	21.79	21.78	21.43
16QAM	1/0	23.00	21.72	21.71	21.36	16QAM	1/0	23.00	21.77	21.76	21.41
	1/37	23.00	22.07	21.90	22.11		1/49	23.00	22.12	21.95	22.16
	1/74	23.00	22.00	21.50	21.77		1/99	23.00	22.05	21.55	21.82
	36/0	22.00	20.94	20.44	20.71		50/0	22.00	20.99	20.49	20.76
	36/18	22.00	21.08	20.91	21.12		50/24	22.00	21.13	20.96	21.17
	36/35	22.00	21.03	20.86	21.07		50/49	22.00	21.08	20.91	21.12
	75/0	22.00	21.00	20.83	21.04		100/0	22.00	21.05	20.88	21.09

LTE Band 71

LTE B71/BW=5M		Average Conducted Power(dBm)				LTE B71/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133147/665.5	133297/680.5	133447/695.5				133172/668	133297/680.5	133422/693
QPSK	1/0	24.00	22.31	22.82	22.66	QPSK	1/0	24.00	22.36	22.87	22.71
	1/12	24.00	22.68	22.92	22.79		1/24	24.00	22.73	22.97	22.84
	1/24	24.00	22.60	22.81	22.49		1/49	24.00	22.65	22.86	22.54
	12/0	23.00	21.42	21.93	21.77		25/0	23.00	21.47	21.98	21.82
	12/6	23.00	21.84	22.08	21.95		25/12	23.00	21.89	22.13	22.00
	12/11	23.00	21.74	21.95	21.63		25/24	23.00	21.79	22.00	21.68
	25/0	23.00	21.42	21.93	21.77		50/0	23.00	21.47	21.98	21.82
16QAM	1/0	23.00	21.40	21.91	21.75	16QAM	1/0	23.00	21.45	21.96	21.80
	1/12	23.00	21.78	22.02	21.89		1/24	23.00	21.83	22.07	21.94
	1/24	23.00	21.71	21.92	21.60		1/49	23.00	21.76	21.97	21.65
	12/0	22.00	20.65	20.86	20.54		25/0	22.00	20.70	20.91	20.59
	12/6	22.00	20.79	21.03	20.90		25/12	22.00	20.84	21.08	20.95
	12/11	22.00	20.74	20.98	20.85		25/25	22.00	20.79	21.03	20.90
	25/0	22.00	20.71	20.95	20.82		50/0	22.00	20.76	21.00	20.87
LTE B71/BW=15M		Average Conducted Power(dBm)				LTE B71/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133197/670.5	133297/680.5	133397/690.5				133222/673	133297/680.5	133372/688
QPSK	1/0	24.00	22.41	22.92	22.76	QPSK	1/0	24.00	22.46	22.97	22.81
	1/37	24.00	22.78	23.02	22.89		1/49	24.00	22.83	23.07	22.94
	1/74	24.00	22.70	22.91	22.59		1/99	24.00	22.75	22.96	22.64
	36/0	23.00	21.52	22.03	21.87		50/0	23.00	21.57	22.08	21.92
	36/18	23.00	21.94	22.18	22.05		50/24	23.00	21.99	22.23	22.10
	36/35	23.00	21.84	22.05	21.73		50/49	23.00	21.89	22.10	21.78
	75/0	23.00	21.52	22.03	21.87		100/0	23.00	21.57	22.08	21.92
16QAM	1/0	23.00	21.50	22.01	21.85	16QAM	1/0	23.00	21.55	22.06	21.90
	1/37	23.00	21.88	22.12	21.99		1/49	23.00	21.93	22.17	22.04
	1/74	23.00	21.81	22.02	21.70		1/99	23.00	21.86	22.07	21.75
	36/0	22.00	20.75	20.96	20.64		50/0	22.00	20.80	21.01	20.69
	36/18	22.00	20.89	21.13	21.00		50/24	22.00	20.94	21.18	21.05
	36/35	22.00	20.84	21.08	20.95		50/49	22.00	20.89	21.13	21.00
	75/0	22.00	20.81	21.05	20.92		100/0	22.00	20.86	21.10	20.97

8.2. CONDUCTED POWER MEASUREMENTS OF Bluetooth

Band	Mode	Channel	Frequency (MHz)	Max Power (dBm)	AVG Power (dBm)
BR	DH5	0	2402	11.00	9.27
		39	2441	11.00	9.65
		78	2480	11.00	9.25
EDR	2DH5	0	2402	8.50	Not Require
		39	2441	8.50	
		78	2480	8.50	
	3DH5	0	2402	8.50	
		39	2441	8.50	
		78	2480	8.50	
BLE	1M	0	2402	6.00	
		19	2440	6.00	
		39	2480	6.00	

8.3. CONDUCTED POWER MEASUREMENTS OF Wi-Fi 2.4GHz Band

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)
2.4G	802.11b	1-11	2412-2462	1	13.50	Not Required
	802.11g	1	2412	6	13.50	13.45
	802.11g	6	2437	6	13.50	13.36
	802.11g	11	2462	6	13.50	13.27
	802.11n20	1-11	2412-2462	HT0	12.50	Not Required

8.4. CONDUCTED POWER MEASUREMENTS OF 5G UNII_1

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)
UNII_1	802.11a	36-48	5180-5240	6	18.50	Not Required
	802.11 n20	36-48	5180-5240	HT0	18.50	
	802.11 n40	38-46	5190-5230	HT0	17.50	
	802.11 ac80	42	5210	VHT0	16.50	

8.5. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2A

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)
UNII_2a	802.11a	52	5260	6	18.50	18.07
	802.11a	60	5300	6	18.50	18.47
	802.11a	64	5320	6	18.50	18.25
	802.11 n20	52-64	5260-5320	HT0	18.50	Not Required
	802.11 n40	54-62	5270-5310	HT0	17.50	
	802.11 ac80	58	5290	VHT0	16.50	

8.6. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2C

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)
UNII_2c	802.11a	100	5500	6	18.50	18.46
	802.11a	116	5580	6	18.50	18.43
	802.11a	140	5700	6	18.50	18.25
	802.11 n20	100-140	5500-5700	HT0	18.50	Not Required
	802.11 n40	102-134	5510-5670	HT0	17.50	
	802.11 ac80	106-122	5530-5610	VHT0	16.50	

8.7. CONDUCTED POWER MEASUREMENTS OF 5G UNII_3

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)
5.8 UNII_3	802.11a	149	5745	6	18.50	18.16
	802.11a	157	5785	6	18.50	18.47
	802.11a	165	5825	6	18.50	18.19
	802.11 n20	149-165	5745-5825	HT0	18.50	Not Required
	802.11 n40	151-159	5755-5795	HT0	17.50	
	802.11 ac80	155	5775	VHT0	16.50	

8.8. SAR TEST RESULTS

General Notes:

Per KDB447498 D04, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.

Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

9.. SAR TEST RESULTS

9.1.. Body SAR test result

SAR test results of Bluetooth _separation distance=0cm

Mode	Channel	Test Position	Accessory	Max Tune-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Duty Cycle %	Duty Factor	Reported SAR 1g	Note
Bluetooth	0	Rear	MAGNETIC MOUNT	11.00	9.27	0.014	0.011	76.80%	1.30	0.022	
	39	Rear	MAGNETIC MOUNT	11.00	9.65	0.018	0.015	76.80%	1.30	0.027	
	78	Rear	MAGNETIC MOUNT	11.00	9.25	0.018	0.017	76.80%	1.30	0.034	

Note:

The Bluetooth frequency range is same as WiFi 2.4G, we choose the same worst accessory to test

SAR test results of 2.4G WiFi _separation distance=0cm

Mode	Channel	Test Position	Accessory	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
802.11 g	1	Rear	ADJUSTABLE POCKET MOUNT	13.50	13.45	0.045	0.042	0.042	1
	1	Rear	MOLLE MOUNT	13.50	13.45	0.052	0.044	0.044	1
	1	Rear	MAGNETIC MOUNT	13.50	13.45	0.048	0.044	0.044	1
	1	Rear	DUAL MAGNETIC MOUNT	13.50	13.45	0.034	0.033	0.033	1
	1	Rear	CHEST CLIP	13.50	13.45	0.030	0.029	0.029	1
	6	Rear	MAGNETIC MOUNT	13.50	13.36	0.047	0.051	0.053	
	11	Rear	MAGNETIC MOUNT	13.50	13.27	0.054	0.056	0.059	

Note:

1. We evaluate all the accessories, we choose the worst accessory to test

SAR test results of 5G WiFi _separation distance=0cm

Mode	Band	Channel	Test Position	Accessory	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
802.11 a	UNII_1&2a	60	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.47	0.325	0.332	0.334	1
		60	Rear	MOLLE MOUNT	18.50	18.47	0.245	0.243	0.245	1
		60	Rear	MAGNETIC MOUNT	18.50	18.47	0.265	0.292	0.294	1
		60	Rear	DUAL MAGNETIC MOUNT	18.50	18.47	0.187	0.232	0.234	1
		60	Rear	CHEST CLIP	18.50	18.47	0.115	0.154	0.155	1
		52	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.07	0.258	0.286	0.316	
802.11 a	UNII_2c	64	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.25	0.300	0.335	0.355	
		100	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.46	0.351	0.387	0.391	
		116	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.43	0.308	0.361	0.367	
802.11 a	UNII_3	140	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.25	0.261	0.313	0.332	
		149	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.16	0.257	0.303	0.328	
		157	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.47	0.256	0.305	0.307	
		165	Rear	ADJUSTABLE POCKET MOUNT	18.50	18.19	0.244	0.287	0.308	

Note:

1.We evaluate all the accessories, we choose the worst accessory to test

SAR test results of LTE_separation distance=0cm

Band	Mode	Channel	RB	Offset	Test Position	Accessory	Maximum Tune-up (dBm)	Conducted Power (dBm)	Area Scan	SAR 1g (W/kg)	Reported 1g SAR (W/kg)	Note
LTE B2	QPSK20M	18700	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.24	0.144	0.158	0.188	1
	QPSK20M	18700	1	49	Rear	MOLLE MOUNT	24.00	23.24	0.121	0.113	0.135	1
	QPSK20M	18700	1	49	Rear	MAGNETIC MOUNT	24.00	23.24	0.116	0.121	0.144	1
	QPSK20M	18700	1	49	Rear	DUAL MAGNETIC MOUNT	24.00	23.24	0.063	0.056	0.067	1
	QPSK20M	18700	1	49	Rear	CHEST CLIP	24.00	23.24	0.109	0.112	0.133	1
	QPSK20M	18900	1	0	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.07	0.153	0.144	0.178	
	QPSK20M	19100	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.92	0.152	0.141	0.181	
LTE B4	QPSK20M	18700	50	24	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.40	0.117	0.108	0.124	
	QPSK20M	20050	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.16	0.169	0.171	0.207	
	QPSK20M	20175	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.91	0.189	0.183	0.235	
	QPSK20M	20300	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.09	0.185	0.183	0.226	
LTE B5	QPSK20M	20050	50	24	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.32	0.131	0.131	0.153	
	QPSK10M	20600	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.57	0.091	0.096	0.106	1
	QPSK10M	20600	1	24	Rear	MOLLE MOUNT	24.00	23.57	0.074	0.077	0.084	1
	QPSK10M	20600	1	24	Rear	MAGNETIC MOUNT	24.00	23.57	0.063	0.072	0.079	1
	QPSK10M	20600	1	24	Rear	DUAL MAGNETIC MOUNT	24.00	23.57	0.090	0.080	0.088	1
	QPSK10M	20600	1	24	Rear	CHEST CLIP	24.00	23.57	0.069	0.072	0.080	1
	QPSK10M	20450	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.41	0.099	0.100	0.115	
LTE B12	QPSK10M	20525	1	0	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.35	0.094	0.096	0.112	
	QPSK10M	20600	25	12	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.73	0.063	0.062	0.066	
	QPSK10M	23095	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.22	0.182	0.189	0.226	
	QPSK10M	23060	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.12	0.166	0.173	0.212	
LTE B13	QPSK10M	23130	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.09	0.179	0.191	0.236	
	QPSK10M	23095	25	12	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.38	0.134	0.142	0.164	
LTE B14	QPSK10M	23230	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.35	0.144	0.142	0.165	
	QPSK10M	23230	25	12	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.51	0.108	0.113	0.126	
LTE B25	QPSK10M	23330	1	24	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.44	0.116	0.127	0.144	
	QPSK10M	23330	25	12	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.60	0.098	0.104	0.114	
	QPSK20M	26140	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.25	0.142	0.146	0.174	
LTE B26	QPSK20M	26365	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.97	0.138	0.139	0.176	
	QPSK20M	26590	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.12	0.140	0.135	0.165	
	QPSK20M	26140	50	24	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.41	0.120	0.117	0.134	
LTE B66	QPSK15M	26865	1	37	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.82	0.088	0.090	0.094	
	QPSK15M	26915	1	37	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.67	0.078	0.074	0.080	
	QPSK15M	26965	1	37	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.31	0.066	0.065	0.076	
	QPSK15M	26865	36	18	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.98	0.057	0.058	0.058	
LTE B71	QPSK20M	132572	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.06	0.175	0.172	0.214	
	QPSK20M	132072	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.02	0.159	0.158	0.198	
	QPSK20M	132322	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.85	0.169	0.164	0.214	
	QPSK20M	132572	50	24	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.22	0.140	0.137	0.164	
LTE B71	QPSK20M	133297	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	23.07	0.120	0.114	0.141	
	QPSK20M	133222	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.83	0.092	0.092	0.121	
	QPSK20M	133372	1	49	Rear	ADJUSTABLE POCKET MOUNT	24.00	22.94	0.113	0.117	0.149	
	QPSK20M	133297	50	24	Rear	ADJUSTABLE POCKET MOUNT	23.00	22.23	0.084	0.087	0.104	

Note:

- We evaluate all the accessories for frequencies above 1 GHz(LTE B2) and frequencies below 1 GHz(LTE B5), we choose the worst accessory to test

10. SIMULTANEOUS TRANSMISSION CONDITIONS

10.1. Stand-alone SAR test exclusion

SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	WWAN+WiFi2.4G	Yes
2	WWAN+BT	Yes
3	WWAN+WiFi5G	Yes

10.2. Simultaneous transmission conditions

Test Position SAR _{1g} (W/kg)	Rear
2.4GWiFi	0.059
5.2 & 5.3G WiFi	0.355
5.6G WiFi	0.391
5.8G WiFi	0.328
BT	0.034
LTE Band 2	0.188
LTE Band 4	0.235
LTE Band 5	0.115
LTE Band 12	0.236
LTE Band 13	0.165
LTE Band 14	0.144
LTE Band 25	0.176
LTE Band 26	0.094
LTE Band 66	0.214
LTE Band 71	0.149
WWAN+WLAN MAX $\sum$ SAR _{1g}	0.627
WWAN+BT MAX $\sum$ SAR _{1g}	0.270

Note:

1. MAX. $\sum$ SAR_{1g} = 0.627 W/Kg < 1.6 W/Kg, so Peak location SAR are not required for WIFI and Bluetooth.


11. Test Layout

Specific Absorption Rate Test Layout




Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)
HSL(750MHz)



HSL(900MHz)

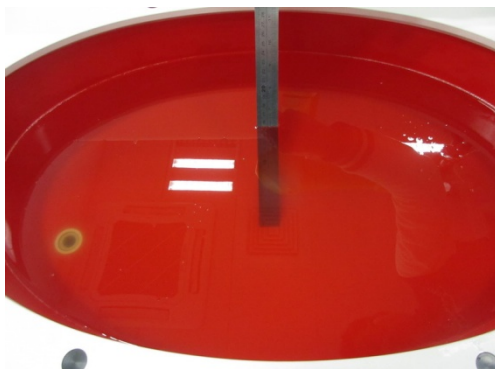

HSL(1750-2600MHz)

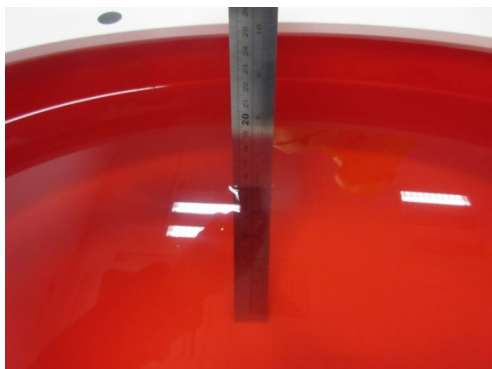

HSL(5GHz)

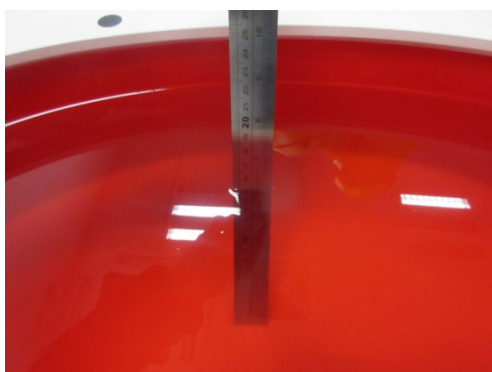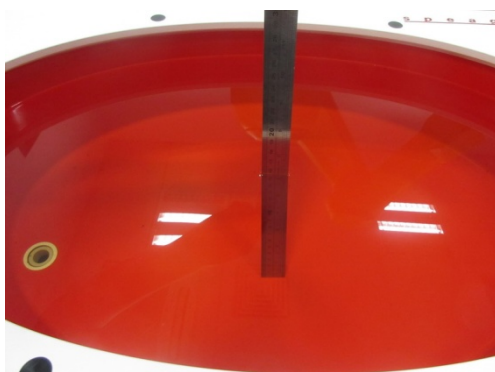

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2202T096_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2202T096_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2202T096_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2202T096_Appendix D.)

End of Test Report