


TOL ±								✓							/	/
RANGE	Pla	Met	Ins	Por	Cab	Pac	Gas	PCB							/	/
0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.1							/	/
6~30	0.1	0.1	.15	.25	1	1	0.5	0.1							/	/
30~80	0.1	.15	0.2	0.3	2	1.5	1	0.1							/	/
80~180	.15	.15	.25	0.3	2	2	1	.15							/	/
180~315	.15	0.2	0.3	0.4	2.5	2	1	.15							/	/
315~800	0.2	0.3	0.4	0.5	3	3	2	.15	ITEM	CONTENTS OF CHANGE			RVS	APV	M/D/Y	

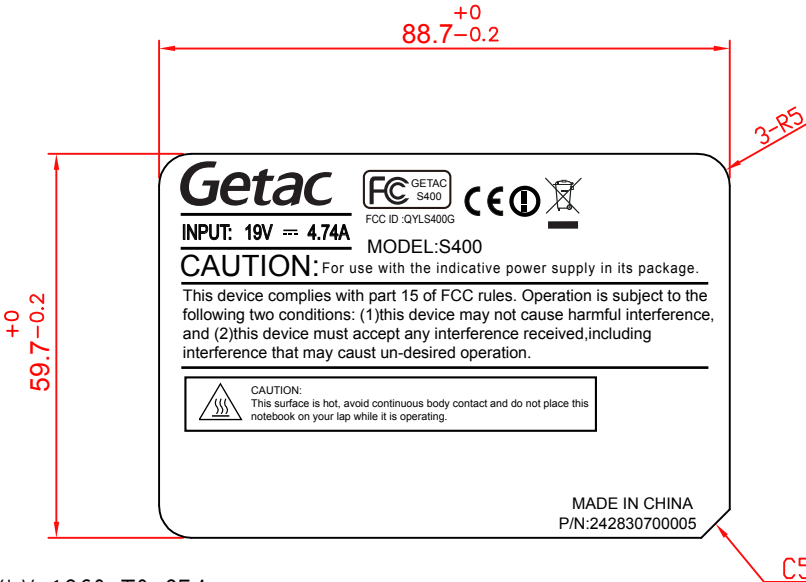

- NOTE:
- 1. MATERIAL: PC KLX 1860, T0.254mm
IT MUST BE APPROVED BY UL & CSA STANDARD.
 - 2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
 - 3. COLORS: a. TEXT FOREGROUND: PANTON 7542C
b. BACKGROUND: PANTON 426C
 - 4. LABEL MANUFACTURER MUST USE A PROCESS AND MATERIALS. THOSE WHICH HAVE BEEN APPROVED BY UL & CSA.
 - 5. THE PHYSICAL SAMPLES MUST ACCORDING GP REQUEST.
 - 6. 黏性：黏著力為 2.3 以上
 - 7. 表面：粗糙面
 - 8. 貼附位置：D 件
 - 9. 環測項目及條件. (判定標準 FOLLOW “QAP-4-75-A 系統表面處理的測試規範”)
 - 10. ADHESIVE：3M467

DATE	JUL/20/2010	MATERIAL	SEE NOTES	TREATMENT		REMARK	
UNIT	MM	SCALE	-----	DRAWING NAME	TF1-LABEL; RATING, 90W, STANDARD, S400		
DRAWN	DESIGNED	CHECKED	APPROVED	MATERIAL NO.	MF	242830700005	R 00
廖梅華		李惠民		MITAC Technology Corp.			