

Nemko Test Report: 2L0609RUS1

Applicant: Kemp-Meek Mfg.
101 Park Central
Mineola, TX 75773

**Equipment Under Test:
(E.U.T.)** NetRadio

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Frequency Hopping Transmitters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By:



Tom Tidwell, Frontline Manager

Date: 3/6/03

Total Number of Pages: 38

Table of Contents

Section 1.	Summary of Test Results.....	3
Section 2.	Equipment Under Test (E.U.T.).....	5
Section 3.	Channel Separation	7
Section 4.	Pseudorandom Hopping Algorithm.....	9
Section 5.	Time of Occupancy	12
Section 6.	Occupied Bandwidth.....	15
Section 7.	Peak Power Output.....	19
Section 8.	Spurious Emissions (Radiated).....	21
Section 9.	Test Equipment List	25
ANNEX A - TEST DETAILS		26
ANNEX B - TEST DIAGRAMS.....		36

Section 1. Summary of Test Results

Manufacturer: Kemp-Meek Mfg

Model No.: NetRadio

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Frequency Hopping Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit



Family Listing

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE

**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
Powerline Conducted Emissions	15.207(a)	48 dB μ V	N/A (1)
Channel Separation	15.247(a)(1)	Greater of 25 kHz or 20 dB Bandwidth	Complies
Pseudorandom Hopping Algorithm	15.247(a)(1)		Complies
Time of Occupancy	15.247(a)(1)(ii)	≤ 0.4 sec in 30 sec	Complies
20 dB Occupied Bandwidth	15.247(a)(1)	≤ 1 MHz	Complies
Peak Power Output	15.247(b)	1 Watt	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	-20 dBc	N/A (2)
Spurious Emissions (Radiated)	15.247(c)	Table 15.209(a)	Complies

Footnotes:

- (1) The device is battery powered.
- (2) The device has an integral antenna.

Section 2. Equipment Under Test (E.U.T.)


General Equipment Information

Frequency Band:	902.1 – 907.8 MHz
Number of Channels:	50
Channel Spacing:	100 kHz
User Frequency Adjustment:	Software controlled
Supply Voltage	3.4 Vdc battery

Description of EUT

Wireless meter reading device.

System Diagram

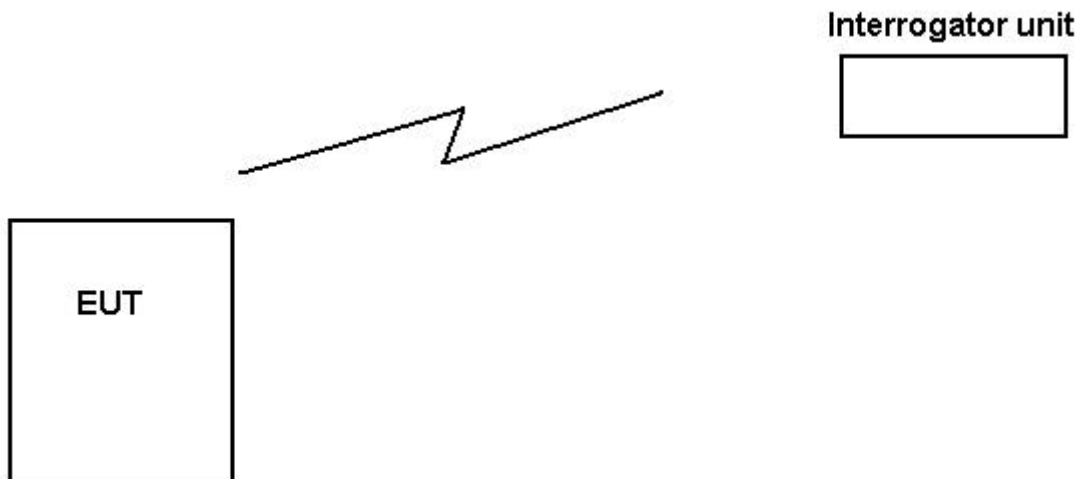

Section 3. Channel Separation

NAME OF TEST: Channel Separation	PARA. NO.: 15.247(a)(1)
TESTED BY: David Light	DATE: 3/3/2003

Test Results: Complies.

Measurement Data: See 20 dB BW plot
Measured 20 dB bandwidth: 57.5 kHz
Channel Separation: 100 kHz

Test Data – Channel Separation



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Channel Separation	
Page <u>1</u> of <u>5</u>		Complete <u>x</u>	
Job No.: 2L0609R	Date: <u>3/3/2003</u>	Preliminary: _____	
Specification: 15.247	Temperature(°C): <u>22</u>	Measurement Distance: <u>NA</u> m	
Tested By: <u>David Light</u>	Relative Humidity(%): <u>24</u>		
E.U.T.: <u>NETRADIO</u>			
Configuration: <u>TX</u>			
Sample Number: <u>1</u>	RBW: <u>Refer to plots</u>	Measurement Distance: <u>NA</u> m	
Location: <u>AC 3</u>	VBW: <u>Refer to plots</u>		
Detector Type: <u>Peak</u>			
Test Equipment Used Antenna: <u>1304</u> Directional Coupler: _____ Pre-Amp: <u>1016</u> Cable #1: <u>1484</u> Filter: <u>1481</u> Cable #2: <u>1485</u> Receiver: <u>1464</u> Cable #3: _____ Attenuator #1: _____ Cable #4: _____ Attenuator #2: _____ Mixer: _____ Additional equipment used: _____ Measurement Uncertainty: <u>+/-1.7 dB</u>			
*ATTEN 0dB RL -10.0dBm 10dB/ ΔMKR .50dB 100.0kHz CENTER 902.1500MHz *RBW 10kHz SPAN 500.0kHz VBW 10kHz SWP 50.0ms			
Notes: <u>CHANNEL SEPARATION</u> _____ _____ _____			

Section 4. Pseudorandom Hopping Algorithm

NAME OF TEST: Pseudorandom Hopping Algorithm	PARA. NO.: 15.247(a)(1)
TESTED BY: Supplied by applicant	DATE:

Test Results: Complies.

Measurement Data: See sample hopping sequence.
Number of Hopping Frequencies: 50 (See attached plots)

Refer to separate exhibit.

Test Plots – Number of Channels



Nemko Dallas, Inc.


Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 3 of 5

Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 24
E.U.T.: NETRADIO
Configuration: TX

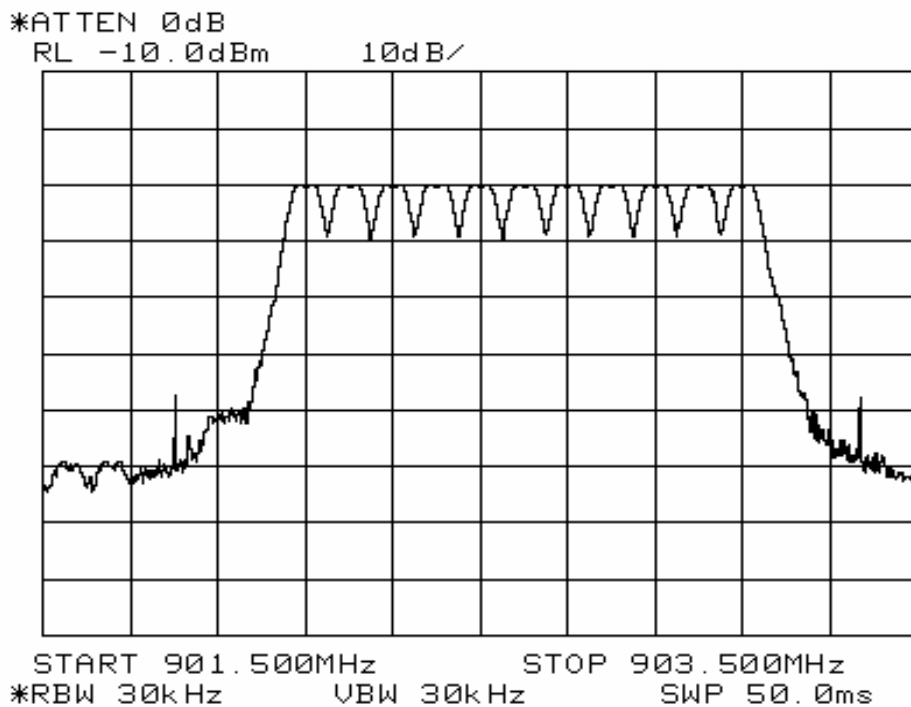HOPPING CHANNELS

Notes: LOWER SET OF HOPPING CHANNELS (11)

Test Plots – Number of Channels



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.


Test Plot:**HOPPING CHANNELS**

Page 4 of 5

Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 24
E.U.T.: NETRADIO
Configuration: TX

ATTEN 10dB
RL -25.0dBm

2dB/

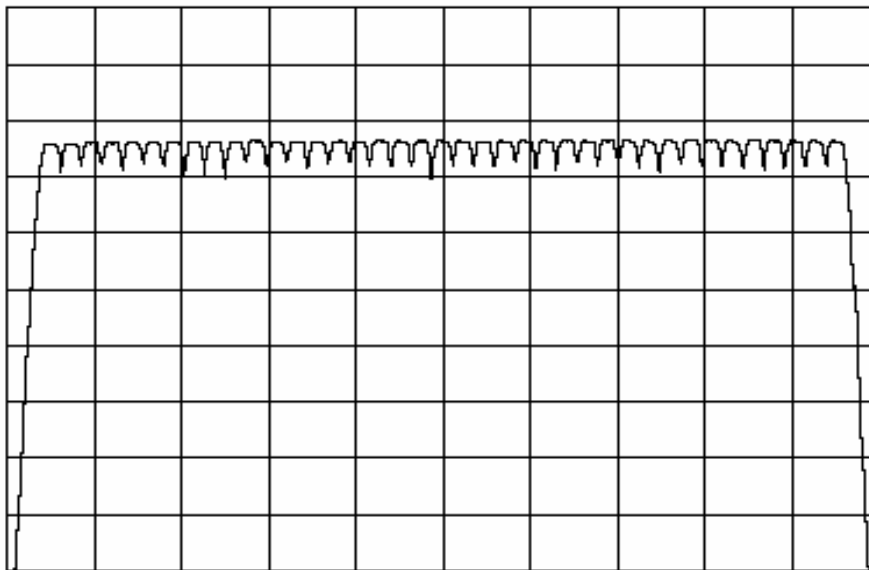

START 903.800MHz STOP 908.000MHz
*RBW 100kHz VBW 100kHz SWP 50.0ms

Notes: UPPER HOPPING CHANNELS (39)

Section 5. Time of Occupancy

NAME OF TEST: Time of Occupancy	PARA. NO.: 15.247(a)(1)
TESTED BY: David Light	DATE: 3/3/2003

Test Results: Complies.

Measurement Data:

Maximum Dwell Time On Any Channel: 50 mS

Test Data – Time of Occupancy



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 5


Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%): 24
E.U.T.: NETRADIO
Configuration: TX
Sample Number: 1
Location: AC 3 RBW: Refer to plots
Detector Type: Peak VBW: Refer to plots

Complete x
Preliminary:

Measurement
Distance: NA m

Test Equipment Used

Antenna: 1304 Directional Coupler:
Pre-Amp: 1016 Cable #1: 1484
Filter: 1481 Cable #2: 1485
Receiver: 1464 Cable #3:
Attenuator #1: Cable #4:
Attenuator #2: Mixer:
Additional equipment used:
Measurement Uncertainty: +/-1.7 dB

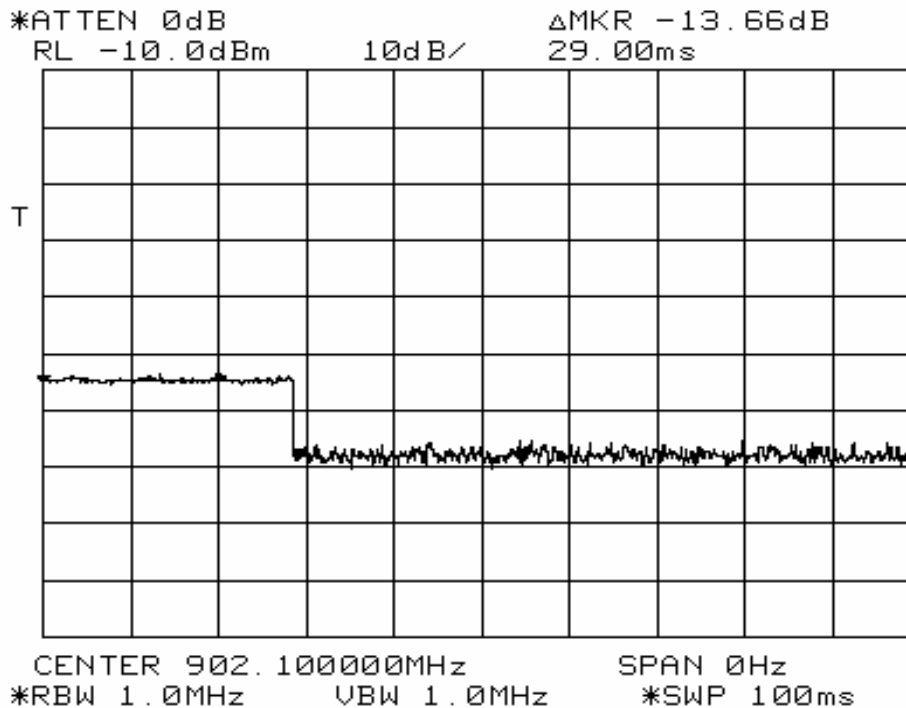

Notes: TIME OF OCCUPANCY
30 mS (Minimum dwell time)

Test Data – Time of Occupancy



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667


Nemko Dallas, Inc.

Test Plot: **Time of Occupancy**

Page 5 of 5

Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 24
E.U.T.: NETRADIO
Configuration: TX

*ATTEN 0dB RL -10.0dBm 10dB/ ΔMKR -66.50dB
50.00ms

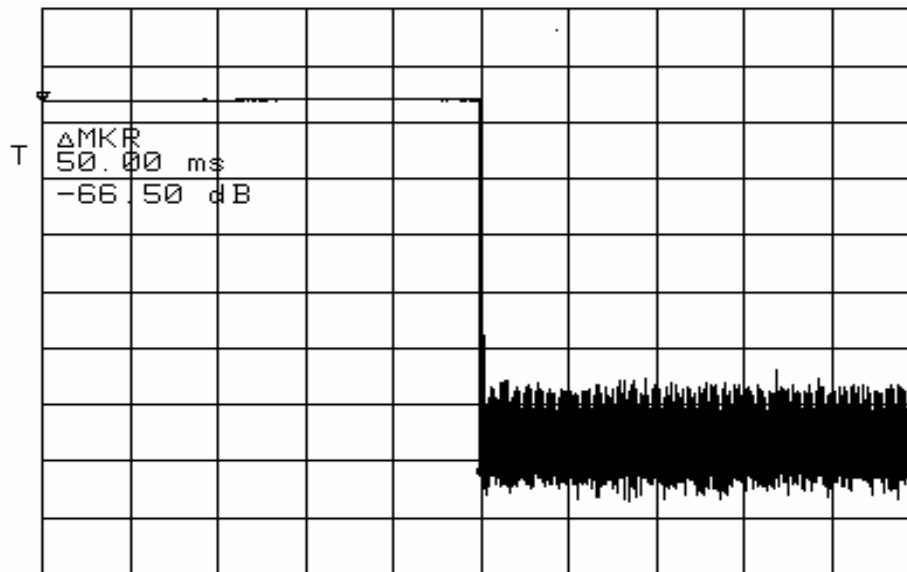

CENTER 902.100000MHz SPAN 0Hz
*RBW 1.0MHz *VBW 1.0MHz *SWP 100ms

Notes: Time of occupancy
50 mS (Maximum dwell time)

Section 6. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(1)(i)
TESTED BY: David Light	DATE: 3/3/2003

Test Results: Complies.

Measurement Data: See attached plots.

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 3

Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%): 24
E.U.T.: NETRADIO
Configuration: TX
Sample Number: 1
Location: AC 3
Detector Type: Peak

Occupied Bandwidth

RBW: Refer to plots
VBW: Refer to plots


Complete _____
Preliminary: _____

Measurement
Distance: NA m

Test Equipment Used

Antenna: 1304 Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1484
Filter: _____ Cable #2: 1485
Receiver: 1464 Cable #3: _____
Attenuator #1: _____ Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

ATTEN 10dB
RL 0dBm
10dB/
57.5 kHz
-1.67 dB

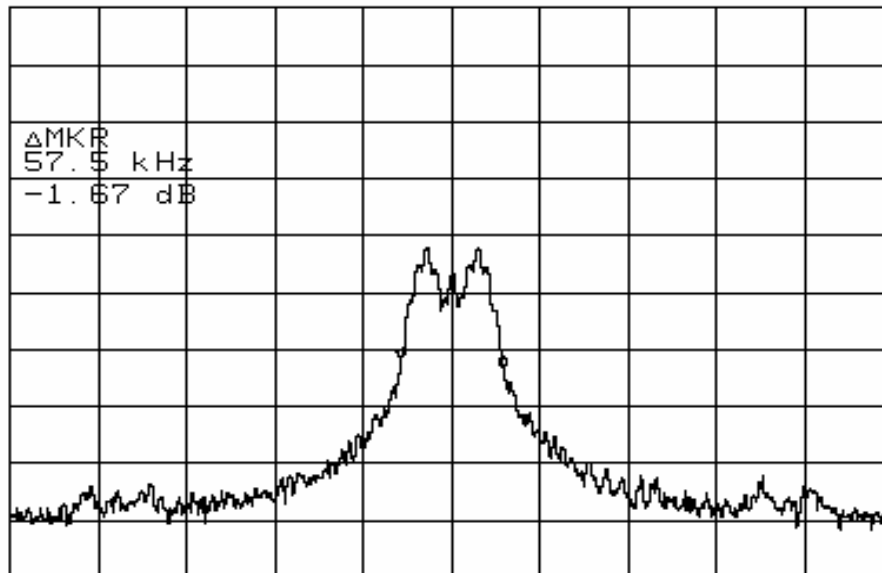

CENTER 902.1000MHz SPAN 500.0kHz
*RBW 3.0kHz VBW 3.0kHz SWP 140ms

Notes: Lowest channel

Test Data – Occupied Bandwidth




Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Occupied Bandwidth	
Page <u>2</u> of 3			
Job No.:	<u>2L0609R</u>	Date:	<u>3/3/2003</u>
Specification:	<u>15.2</u>	Temperature(°C):	<u>22</u>
Tested By:	<u>David Light</u>	Relative Humidity(%):	<u>24</u>
E.U.T.:	<u>NETRADIO</u>		
Configuration:	<u>TX</u>		

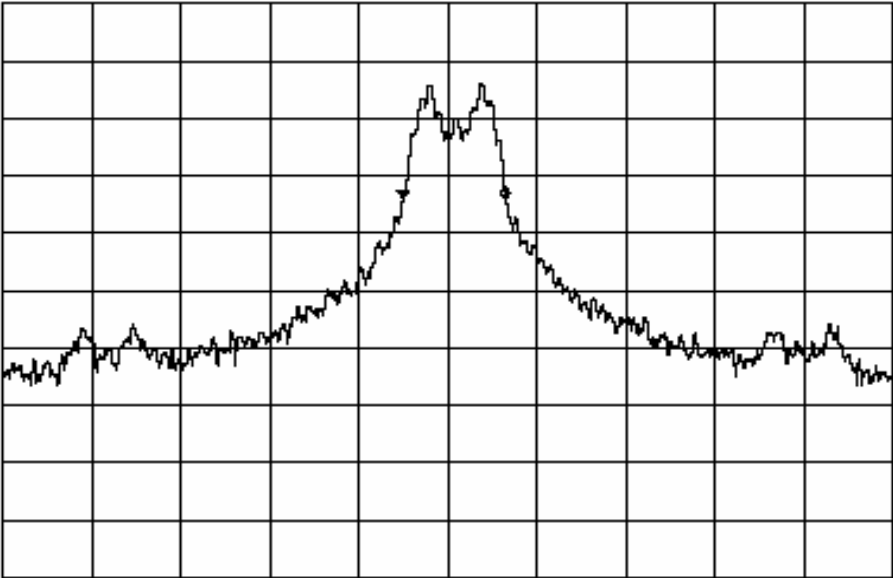ATTEN 10dB		Δ MKR - .17dB	
RL -25.0dBm	10dB/	57.5kHz	
			
CENTER 904.9970MHz		SPAN 500.0kHz	
*RBW 3.0kHz	VBW 3.0kHz	SWP 140ms	

Notes:	<u>CENTER CHANNEL</u>

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.


Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 3 of 3

Job No.: 2L0609R Date: 3/3/2003
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 24
E.U.T.: NETRADIO
Configuration: TX

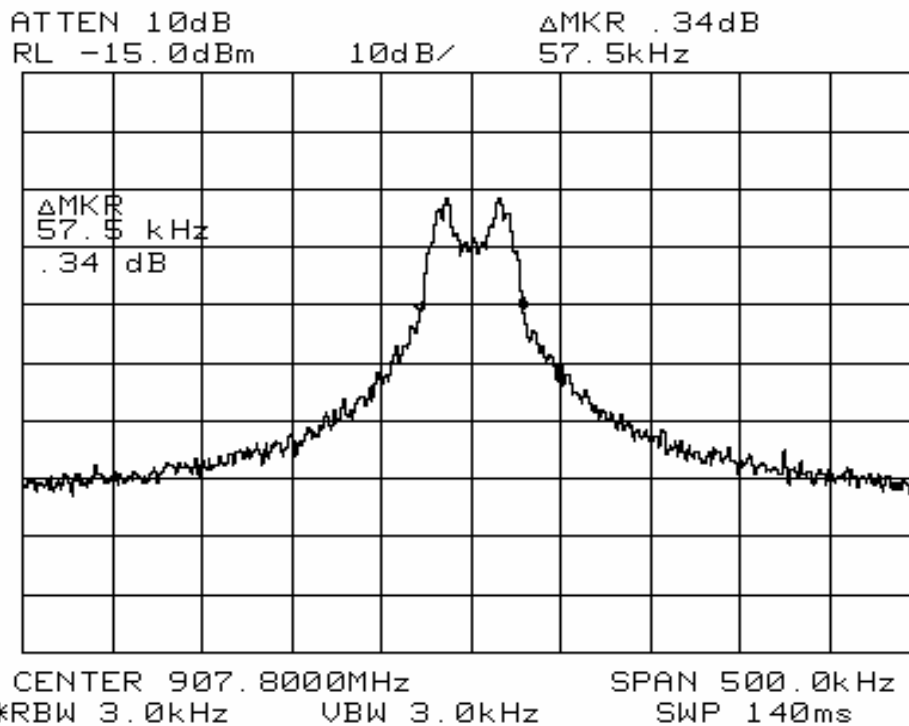Occupied BandwidthNotes: HIGHEST CHANNEL

Section 7. Peak Power Output

NAME OF TEST: Peak Power Output	PARA. NO.: 15.247 (b)
TESTED BY: David Light	DATE: 3/3/2003

Test Results: Complies.

Measurement Data: See attached data.
Detachable antenna? ☐ Yes ☒ No
If yes, state the type of non-standard connector used:

The input power was varied +/- 15% with no change in output power>

Test Data – Peak Power Output



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

EIRP Substitution Method

Page 1 of 1

Job No.: 2L0609R Date: 3/3/03
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 24
E.U.T.: NETRADIO
Configuration: TX
Sample No: 1
Location: AC 3 RBW: 300 kHz
Detector Type: Peak VBW: 300 kHz

Complete X
Preliminary _____

Measurement
Distance: 3 m

Test Equipment Used

Antenna: 1304 Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1483
Filter: _____ Cable #2: 1485
Receiver: 1464 Cable #3: _____
Attenuator #1: _____ Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-3.6 dB

Frequency (MHz)	Meter Reading (dBm)	Correction Factor (dB)		Pre-Amp Gain (dB)	Substitution Antenna Gain (dBi)		EIRP (dBm)	EIRP (mW)	Polarity	Comments
902.100	-31.0	29.3		0	7.1		5.4	3.49	V	LOWEST CHANNEL
902.100	-30.9	31.0		0	7.1		7.2	5.25	H	
905.000	-30.0	29.3		0	7.1		6.4	4.40	V	MID CHANNEL
905.000	-30.0	31.0		0	7.1		8.1	6.46	H	
907.800	-29.7	29.3		0	7.1		6.7	4.71	V	HIGHEST CHANNEL
907.800	-30.8	31.0		0	7.1		7.3	5.37	H	

Notes: _____

Section 8. Spurious Emissions (Radiated)

NAME OF TEST: Spurious Emissions (Radiated)	PARA. NO.: 15.247(c)
TESTED BY: David Light	DATE: 3/3/2003

Test Results: Complies.

Measurement Data: See attached table.

Duty Cycle Calculation:

Duty Cycle correction factor(dB) = $20 \log (rf_{ON} \text{ in ms}/100\text{ms})$

$20 \log (50 \text{ mS}/100 \text{ mS}) = 6 \text{ dB (worst case)}$

Test Data - Radiated Emissions



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy

Lewisville, TX 75057

Tel: (972) 436-9600

Fax: (972) 436-2667

Page 1 of 2		Radiated Emissions	
Job No.:	2L0609R	Date:	3/3/2003
Specification:	15.247	Temperature(°C):	22
Tested By:	David Light	Relative Humidity(%)	16
E.U.T.:	Net-Radio		
Configuration:	Upright - Typical installation - Tx full power		
Sample Number:	1		
Location:	AC 3	RBW:	1 MHz
Detector Type:	Peak	VBW:	1 MHz
Test Equipment Used			
Antenna:	1304	Directional Coupler:	#N/A
Pre-Amp:	1016	Cable #1:	1484
Filter:	1481	Cable #2:	1485
Receiver:	1464	Cable #3:	#N/A
Attenuator #1:	#N/A	Cable #4:	#N/A
Attenuator #2:	#N/A	Mixer:	#N/A
Measurement Uncertainty:	+/- .7 dB		

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
								Tx at 902.1 MHz
2.71	57.7	28.2	3.7	33.1	56.5	74	-17.5	P -H
2.71	51.7	28.2	3.7	33.1	50.5	54	-3.5	A -H
3.61	50	30.3	3.7	32.6	51.4	54	-2.6	P -H
4.51	45	32.2	4.1	33.4	47.9	54	-6.1	P -H
5.41	43.1	33.6	4.7	33	48.4	54	-5.6	P -H
6.31	42.1	34.9	5.3	31.5	50.8	54	-3.2	P -H
7.22	42	35.8	5.3	32.9	50.2	54	-3.8	P -H
8.12	42	36.7	5.7	32.9	51.5	54	-2.5	P -H
9.02	42.8	37.8	5.5	34.0	52.1	54	-1.9	P -H
2.7063	52.2	28.2	3.7	33.1	51.0	54	-3.0	P -V
3.6084	44.7	30.3	3.7	32.6	46.1	54	-7.9	P -V
4.5105	44	32.2	4.1	33.4	46.9	54	-7.1	P -V
5.4126	42.8	33.6	4.7	33.0	48.1	54	-5.9	P -V
6.3147	44	34.9	5.3	31.5	52.7	54	-1.3	P -V
7.2168	41.3	35.8	5.3	32.9	49.5	54	-4.5	P -V
8.1189	42.5	36.7	5.7	32.9	52.0	54	-2.0	P -V
9.021	42	37.8	5.5	34	51.3	54	-2.7	P -V
Notes:								

Test Data - Radiated Emissions



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Page 2 of 2		Continuation Page	
Job No.:	2L0609R	Date:	3/3/2003
Specification:	15.247	Temperature(°F):	22
Tested By:	#N/A	Relative Humidity(%)	16
E.U.T.:	Net-Radio		
Configuration:	Upright - Typical installation - Tx full power		

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
								Tx at 905 MHz
2.715	51.2	28.2	3.7	33.1	50.0	54	-4.0	P -V
3.62	45.8	30.3	3.7	32.6	47.2	54	-6.8	P -V
4.525	43.5	32.2	4.1	33.4	46.4	54	-7.6	P -V
5.430	42.6	33.6	4.7	33	47.9	54	-6.1	P -V
6.335	42.3	34.9	5.3	31.5	51.0	54	-3.0	P -V
7.24	41.2	35.8	5.3	32.9	49.4	54	-4.6	P -V
8.145	41.3	36.7	5.7	32.9	50.8	54	-3.2	P -V
9.050	43.0	37.8	5.5	34.0	52.3	54	-1.7	P -V
2.715	57.5	28.2	3.7	33.1	56.3	74	-17.7	P -H
2.715	51.5	30.3	3.7	32.6	52.9	54	-1.1	A -H
3.62	51	30.3	3.7	32.6	52.4	54	-1.6	P -H
4.525	43	32.2	4.1	33.4	45.9	54	-8.1	P -H
5.430	42.0	33.6	4.7	33	47.3	54	-6.7	P -H
6.335	42.5	34.9	5.3	31.5	51.2	54	-2.8	P -H
7.24	41.2	35.8	5.3	32.9	49.4	54	-4.6	P -H
8.145	41.3	36.7	5.7	32.9	50.8	54	-3.2	P -H
9.050	43.0	37.8	5.5	34.0	52.3	54	-1.7	P -H
								Tx at 907.8 MHz
2.7234	56	28.2	3.7	33.1	54.8	74	-19.2	P -H
2.723	50.0	30.3	3.7	32.6	51.4	54	-2.6	A -H
3.631	50.7	30.3	3.7	32.6	52.1	54	-1.9	P -H
4.539	44.3	32.2	4.1	33.4	47.2	54	-6.8	P -H
5.447	44	33.6	4.7	33	49.3	54	-4.7	P -H
6.3546	42.8	34.9	5.3	31.5	51.5	54	-2.5	P -H
7.262	44.1	35.8	5.3	32.9	52.3	54	-1.7	P -H
8.1702	41.8	36.7	5.7	32.9	51.3	54	-2.7	P -H
9.078	42.3	37.8	5.5	34.0	51.6	54	-2.4	P -H
2.723	45.7	30.3	3.7	32.6	47.1	54	-6.9	P -V
3.631	42	30.3	3.7	32.6	43.4	54	-10.6	P -V
4.539	41	32.2	4.1	33.4	43.9	54	-10.1	P -V
5.447	43	33.6	4.7	33	48.3	54	-5.7	P -V
6.3546	42.8	34.9	5.3	31.5	51.5	54	-2.5	P -V
7.262	41.8	35.8	5.3	32.9	50.0	54	-4.0	P -V
8.1702	41.8	36.7	5.7	32.9	51.3	54	-2.7	P -V
9.078	43.5	37.8	5.5	34.0	52.8	54	-1.2	P -V
Notes:	Searched spectrum to the 10th harmonic - All emissions within 20 dB of the spec limit were reported							
	All measurements are peak unless otherwise noted - Average measurements use 6 dB duty cycle correction							


EQUIPMENT:

Radiated Photographs (Worst Case Configuration)

FRONT VIEW



REAR VIEW

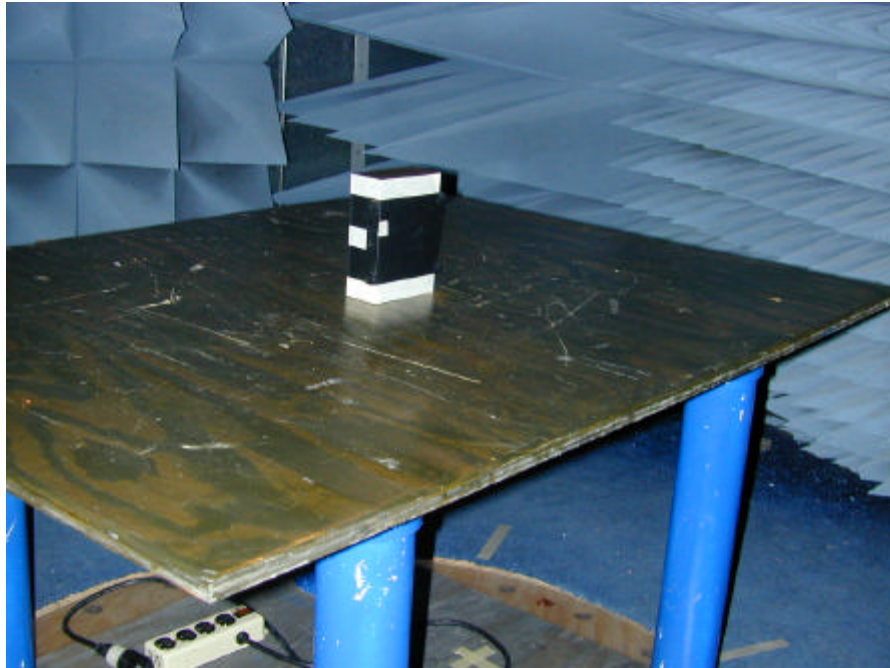

Section 9. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1482	Band Pass Filter	K & L 11SH10-4000/T12000-0/0	2	Cal B4 Use	N/A
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	07/15/02	07/15/03
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	07/15/02	07/15/03
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	02/11/03	02/11/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	07/15/02	07/15/03
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01	07/31/03

ANNEX A - TEST DETAILS

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
---	----------------------

Minimum Standard:

The R.F. that is conducted back onto the AC power line on any frequency within the band 0.45 to 30 MHz shall not exceed 250 μ V (48 dB μ V) across 50 ohms.

NAME OF TEST: Channel Separation	PARA. NO.: 15.247(a)(1)
----------------------------------	-------------------------

Minimum Standard:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

NAME OF TEST: Pseudorandom Hopping Algorithm	PARA. NO.: 15.247(a)(1)
--	-------------------------

Minimum Standard:

The system shall hop to channel frequencies that are selected from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their transmitters and shall shift frequencies in synchronization with the transmitted signals.

NAME OF TEST: Time of Occupancy

PARA. NO.: 15.247(a)(1)(ii)

Minimum Standard:

Frequency Band (MHz)	20 dB Bandwidth	No. of Hopping Channels	Average Time of Occupancy
902 - 928	<250 kHz	50	=<0.4 sec. in 20 sec.
902 - 928	=>250 kHz	25	=<0.4 sec. in 10 sec.
2400 - 2483.5	-----	75	=<0.4 sec. in 30 sec.
5725 - 5850	-----	75	=<0.4 sec. in 30 sec.

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW: 1 MHz

VBW: = RBW

Span: 0 Hz

LOG dB/div.: 10 dB

Sweep: Sufficient to see one hop time sequence.

Trigger: Video

The occupancy time of one hop is measured as above. The average time of occupancy is calculated over the appropriate period of time from above table (10, 20, or 30 seconds).

Avg. time of occupancy = (period from table/duration of one hop)/no. of channels multiplied by the duration of one hop.

For instance:

If a 2.4 GHz system has a measured hop duration time of 1 msec. and uses 75 channels, then the average time of occupancy would be:

$(30 \text{ sec.} / .001 \text{ sec.}) / 75 \text{ chan.} = 400 \times 1 \text{ msec.} = 400 \text{ msec. or } 0.4 \text{ sec. in } 30 \text{ sec.}$

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 15.247(a)(2)

Minimum Standard:

Frequency Band (MHz)	Maximum 20 dB Bandwidth
902 - 928	500 kHz
2400 – 2483.5	1 MHz
5725 – 5850	1 MHz

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW: At least 1% of span/div.

VBW: >RBW

Span: Sufficient to display 20 dB bandwidth

LOG dB/div.: 10 dB

Sweep: Auto

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Peak Power Output

PARA. NO.: 15.247(b)

Minimum Standard:

Frequency Band (MHz)	No. of Hopping Channels	Maximum Peak Power Output at Antenna Port
902 - 928	at least 50	1 watt
902 – 928	25 - 49	0.25 watts
2400 – 2483.5	75	1 watt
5725 – 5850	75	1 watt

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

EIRP For Integral Antenna:**Test Method:** TIA/EIA-603-1992, Section 2.2.12

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The spurious emissions were measured at a distance of 3 meters. The EUT was then replaced with a reference substitution antenna with a known gain referenced to an isotropic. This antenna was fed with a signal at the spurious frequency. The level of the signal was adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Spurious Emissions at Antenna Terminals	PARA. NO.: 15.247(c)
---	----------------------

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (mV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC**Method Of Measurement:**30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (mV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands


MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:


Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

ANNEX B - TEST DIAGRAMS

Test Site For Radiated Emissions

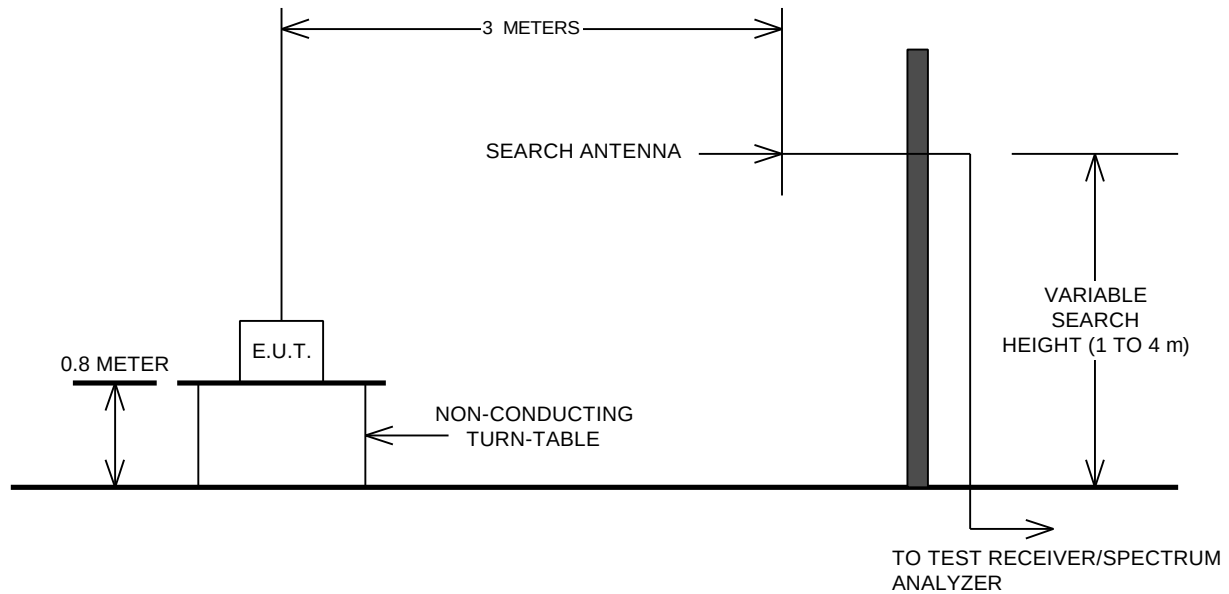

Conducted Emissions

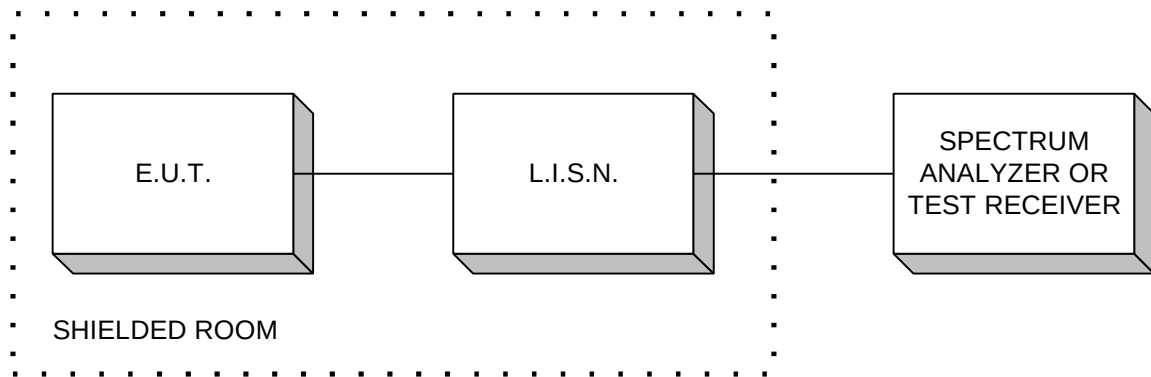

Peak Power At Antenna Terminals

