








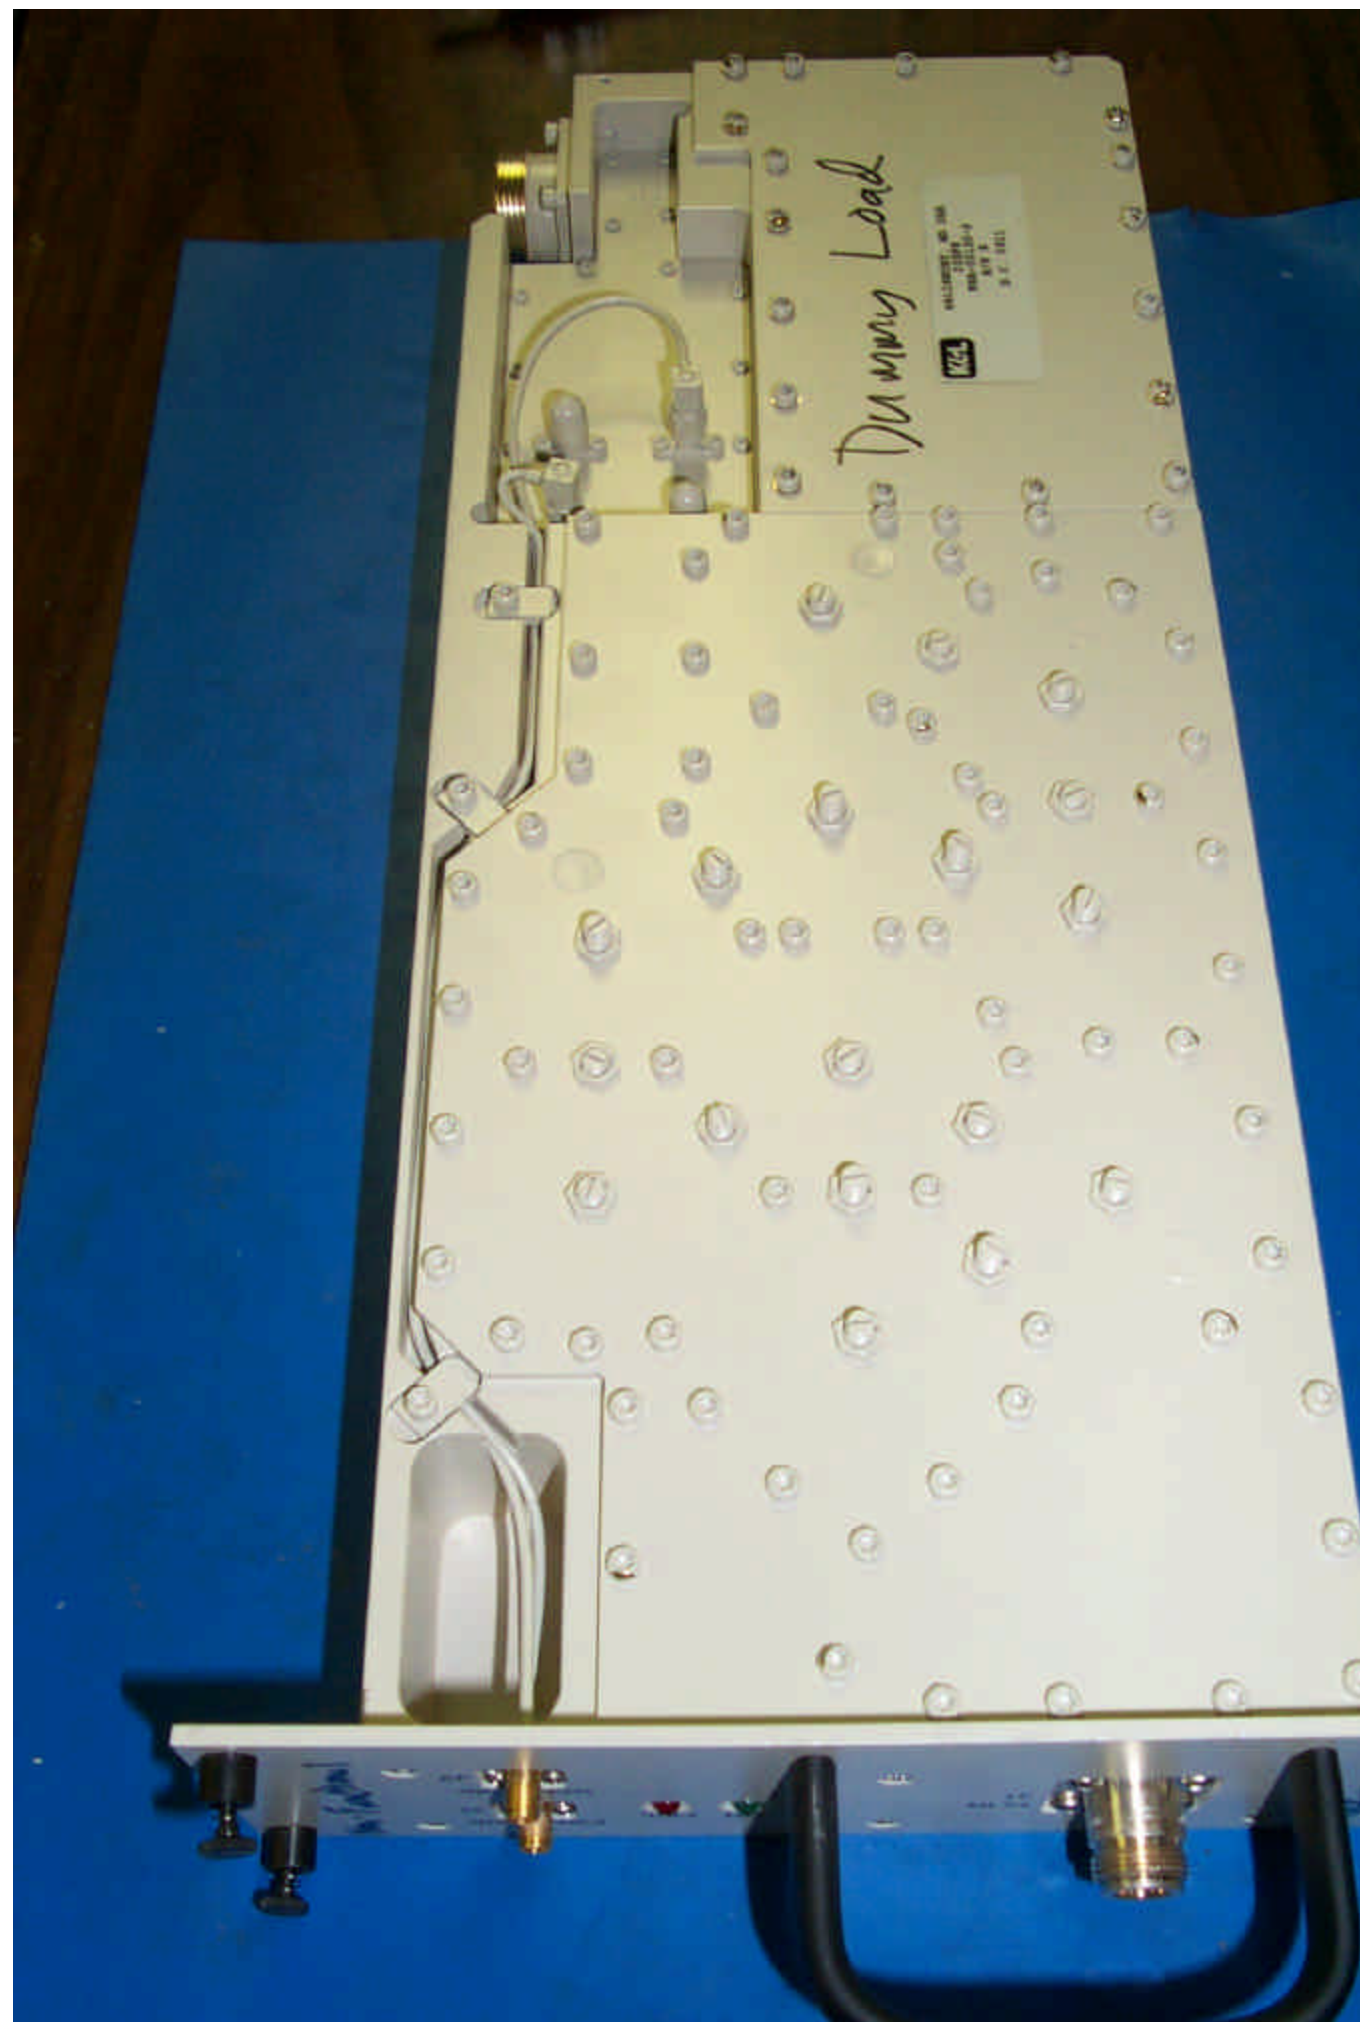

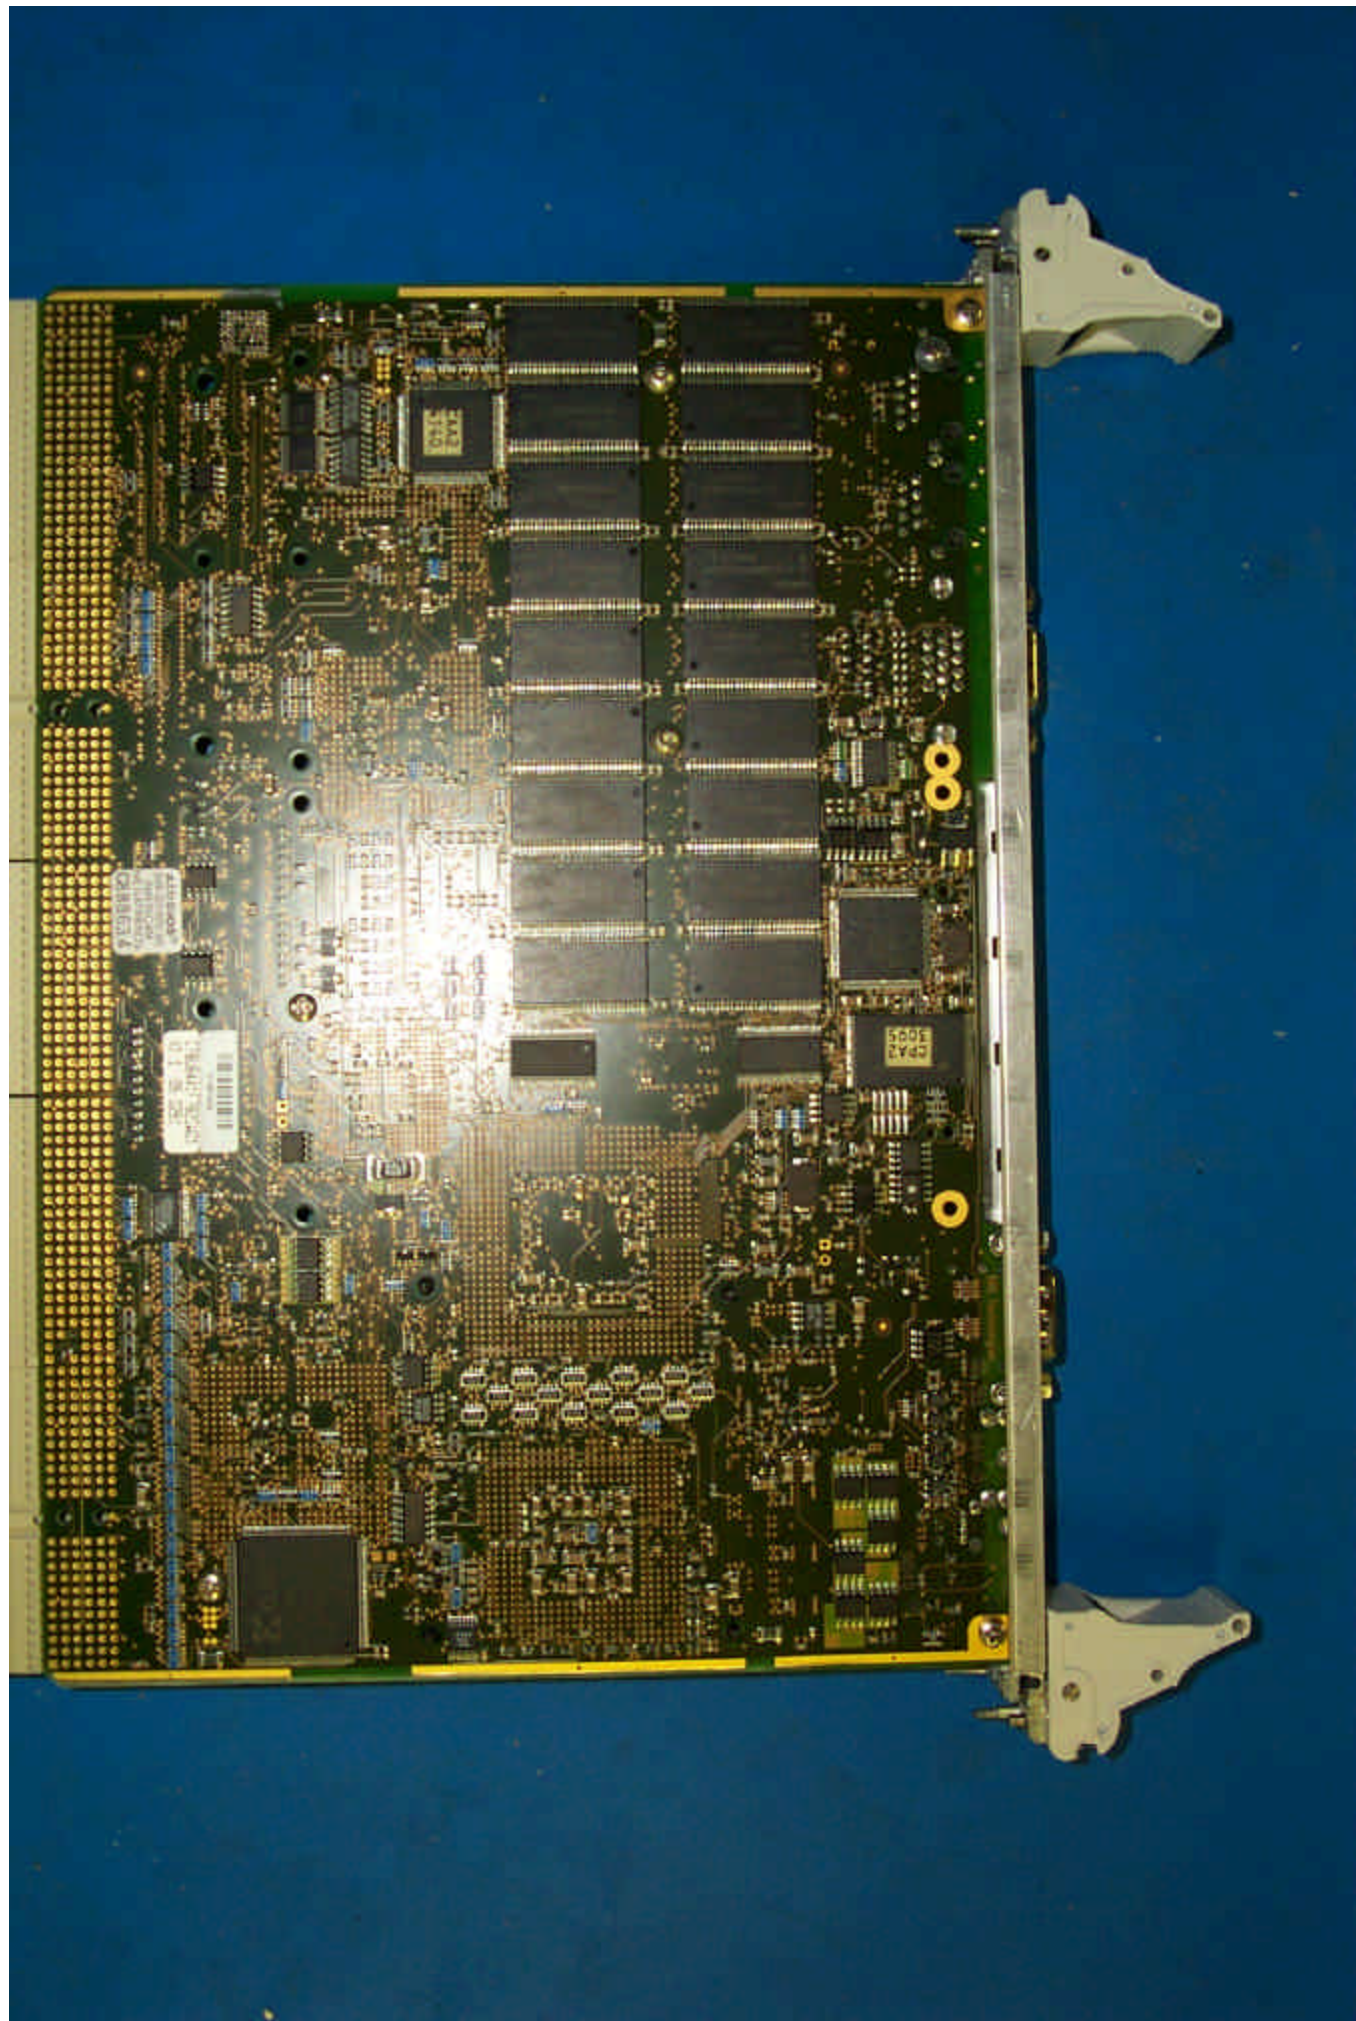

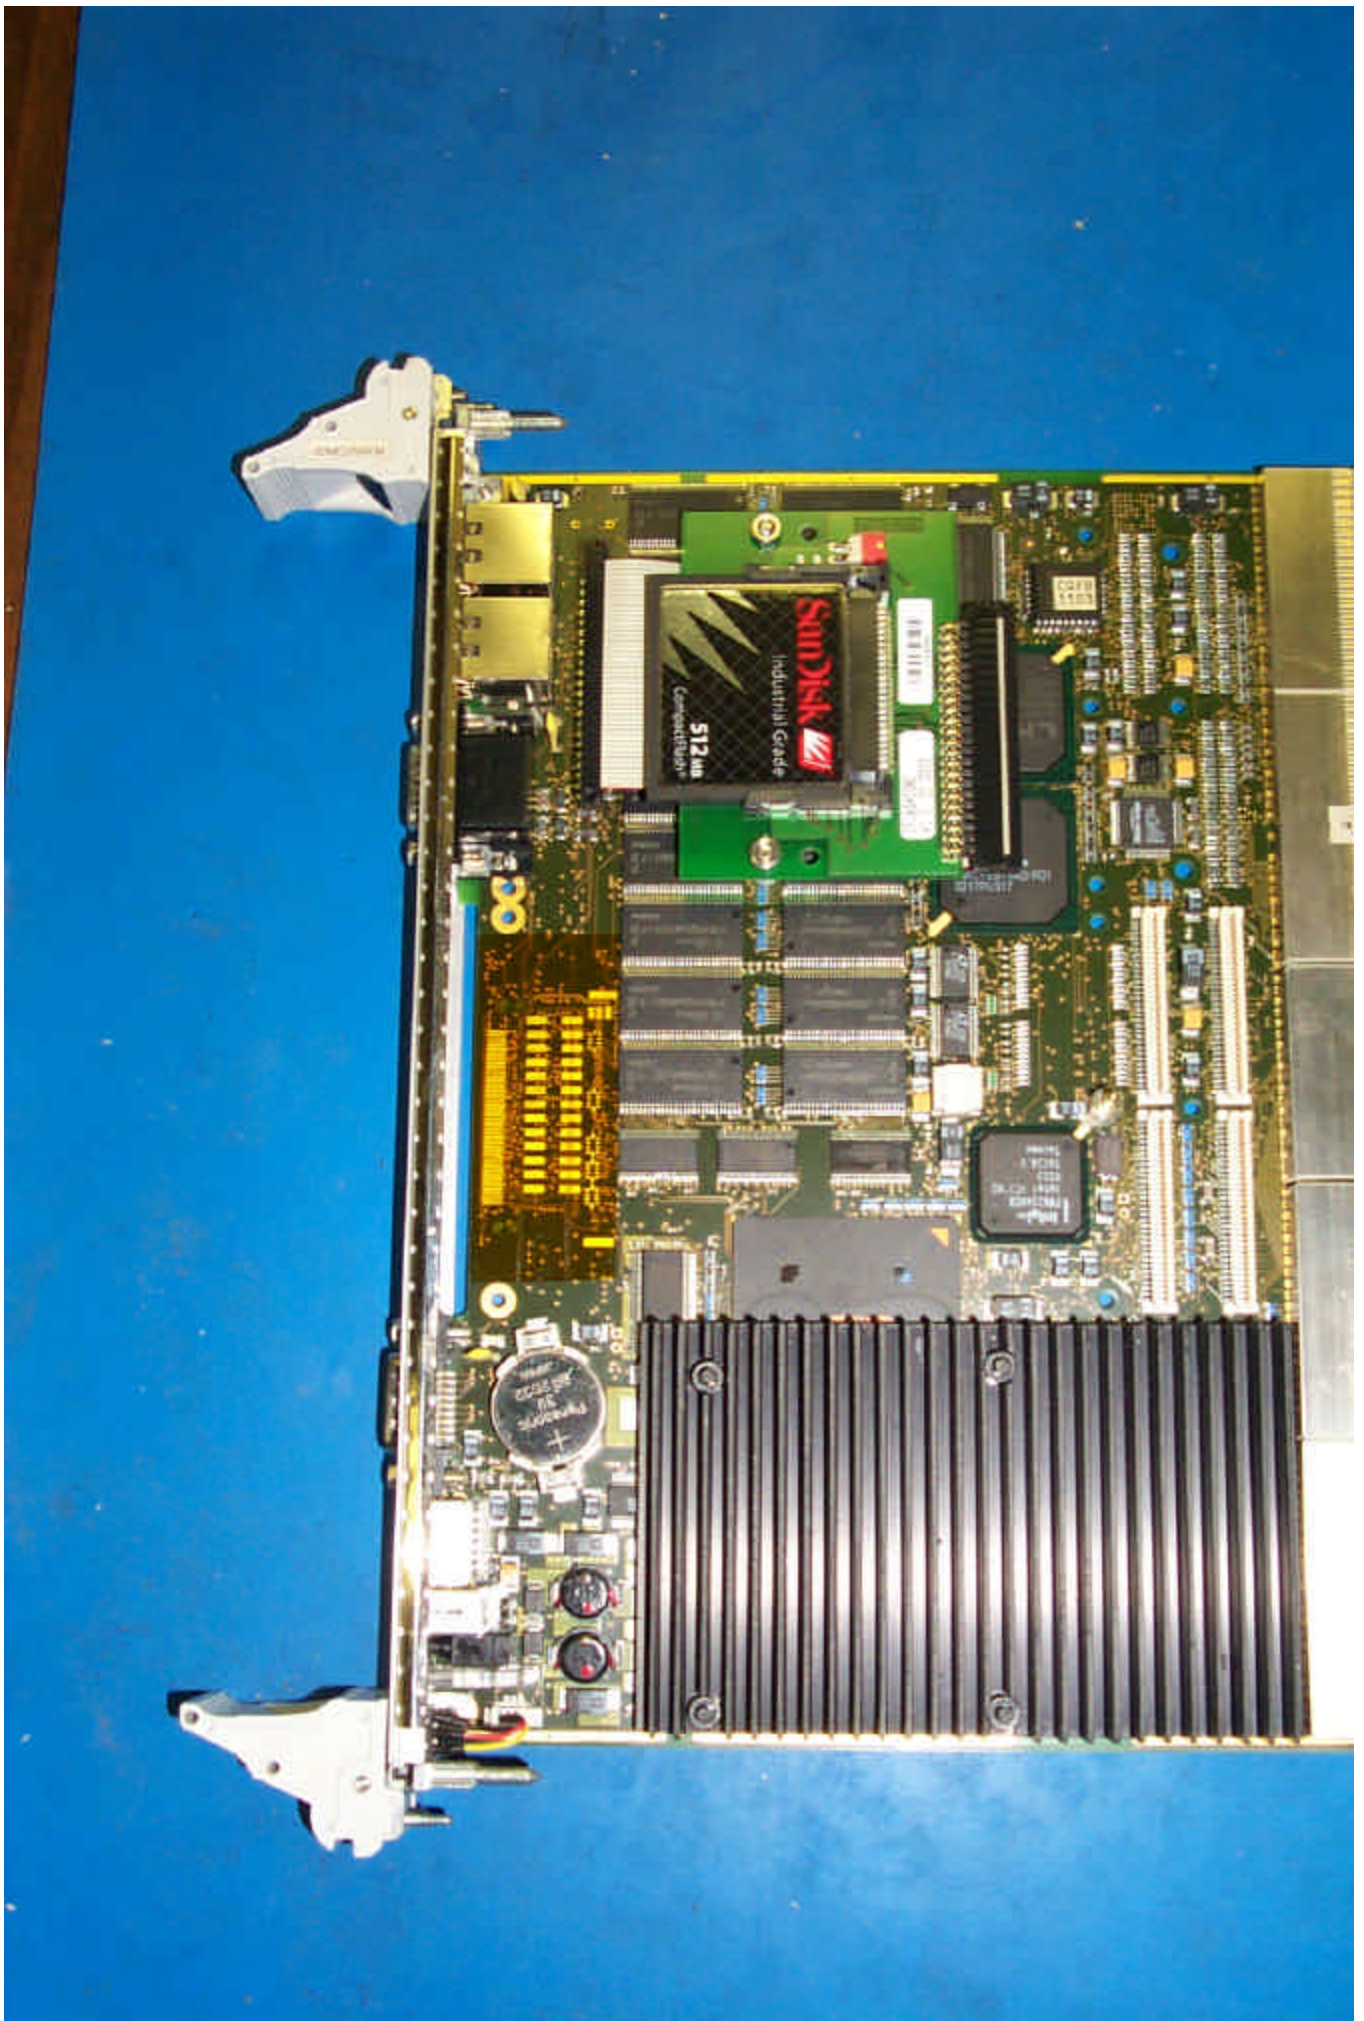

JASPER ELECTRONICS DPC1305-M1128/24
INPUT DC 21-28V 25.0A MAX
OUTPUT 300W MAX
XT 5.0V @ 18.2A
V0 5.28V @ 18.2A
V1 3.3V @ 18.2A
V2 12.0V @ 5.0A
V3 12.0V @ 5.0A

PA US

CE

Board type	PC5 Rxx4
Rev or subtype	REV B
Board number	3/800118
CPLD version	15
RF test date	5/6/03
RF test person	P.V.
Calibration date/time	05/10/03
Calibration person	P.H.
Specific mode	
Delivered to	
Delivered date and time	

Comment:


72-0134-002 MEVA

1041 04705


800-234-6789





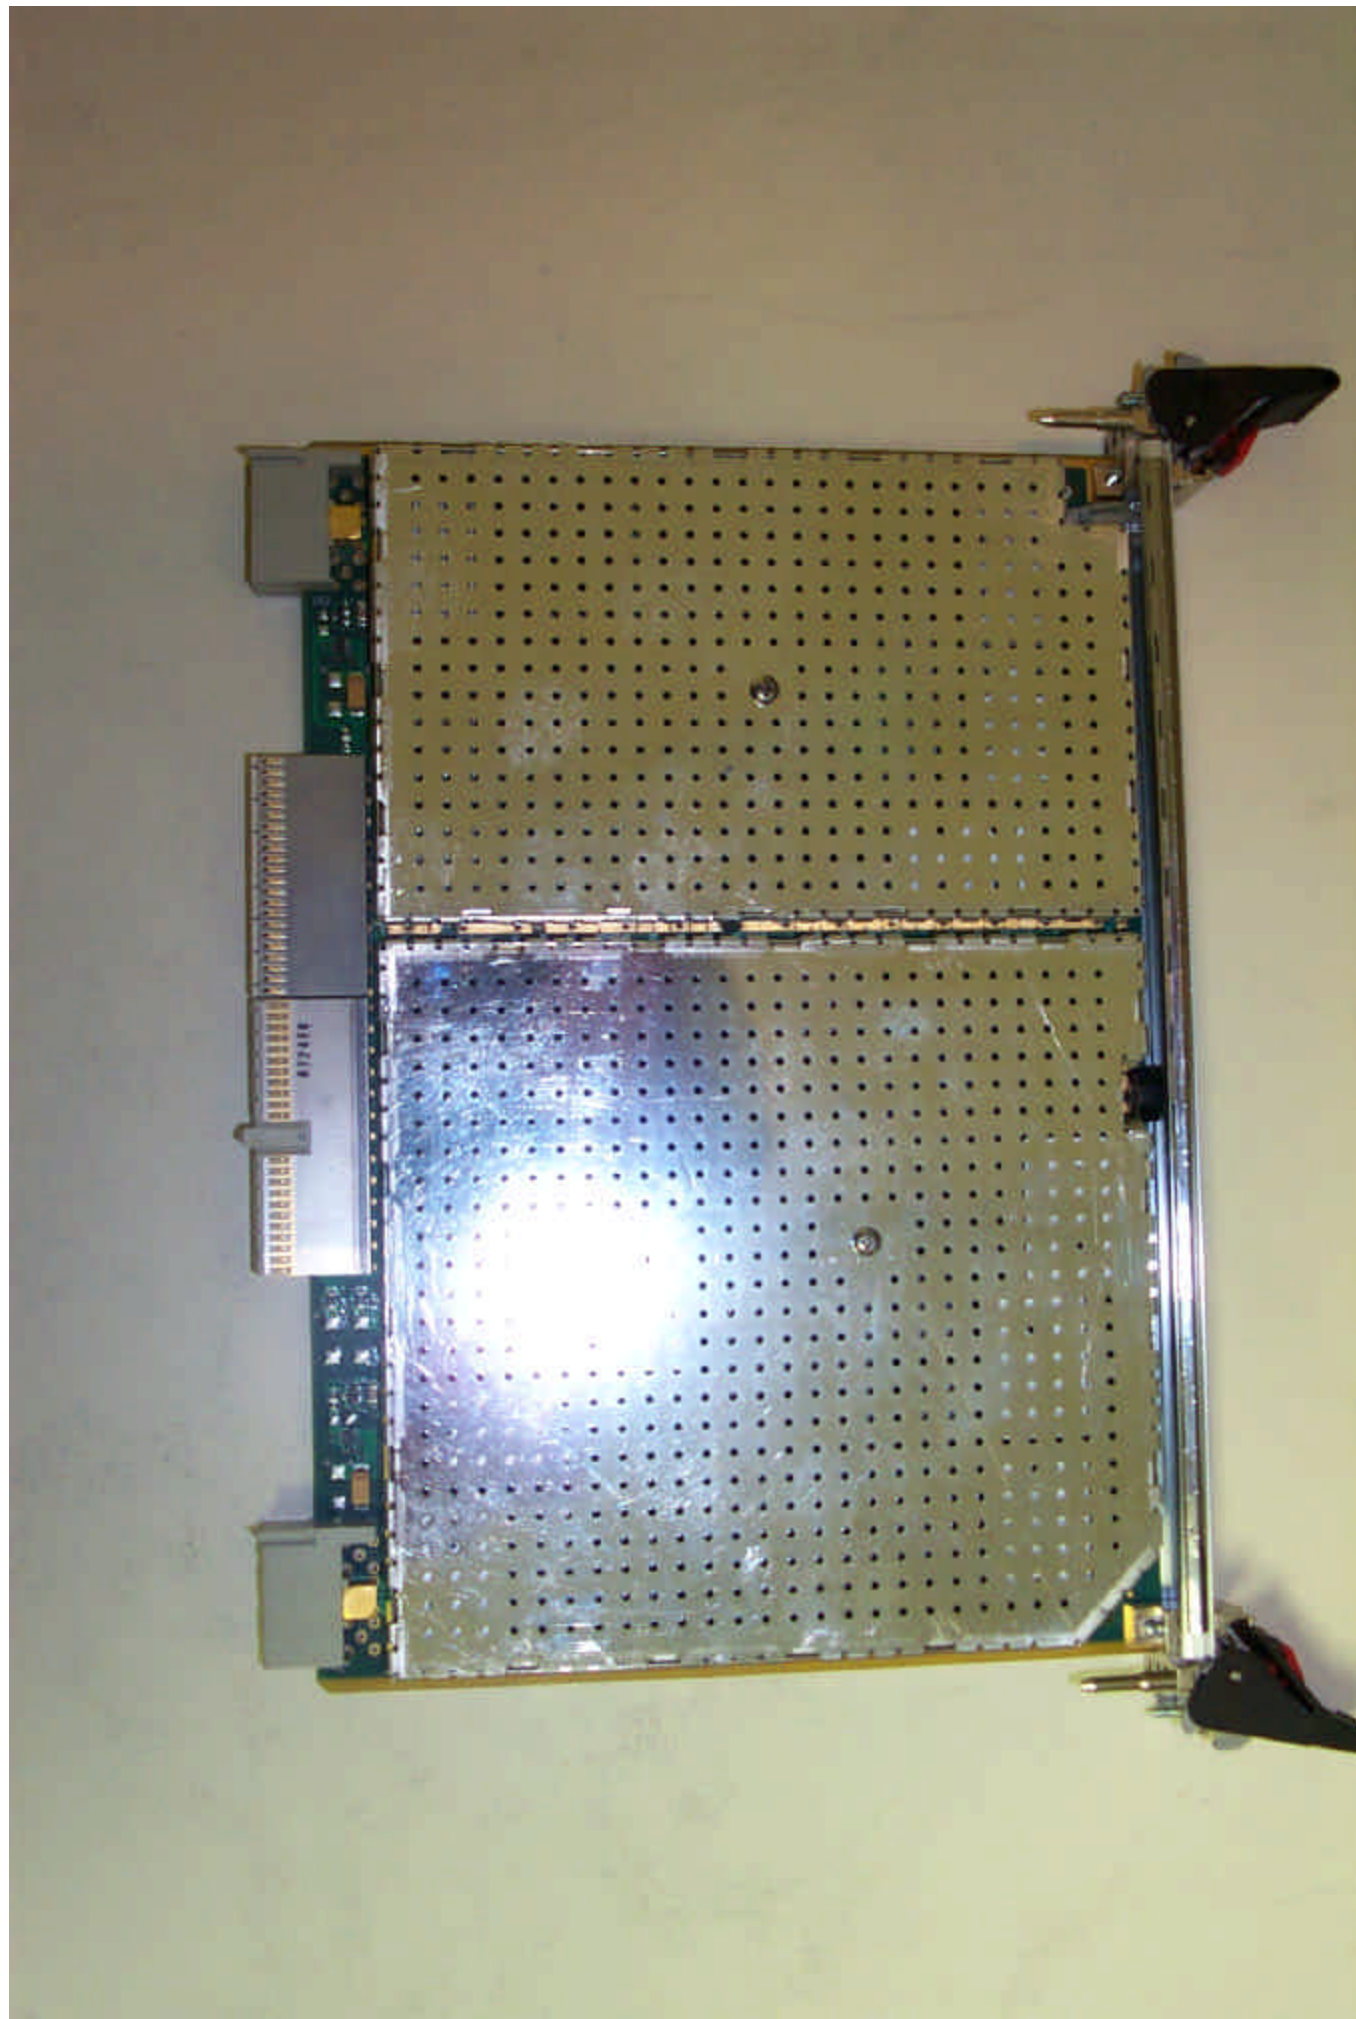



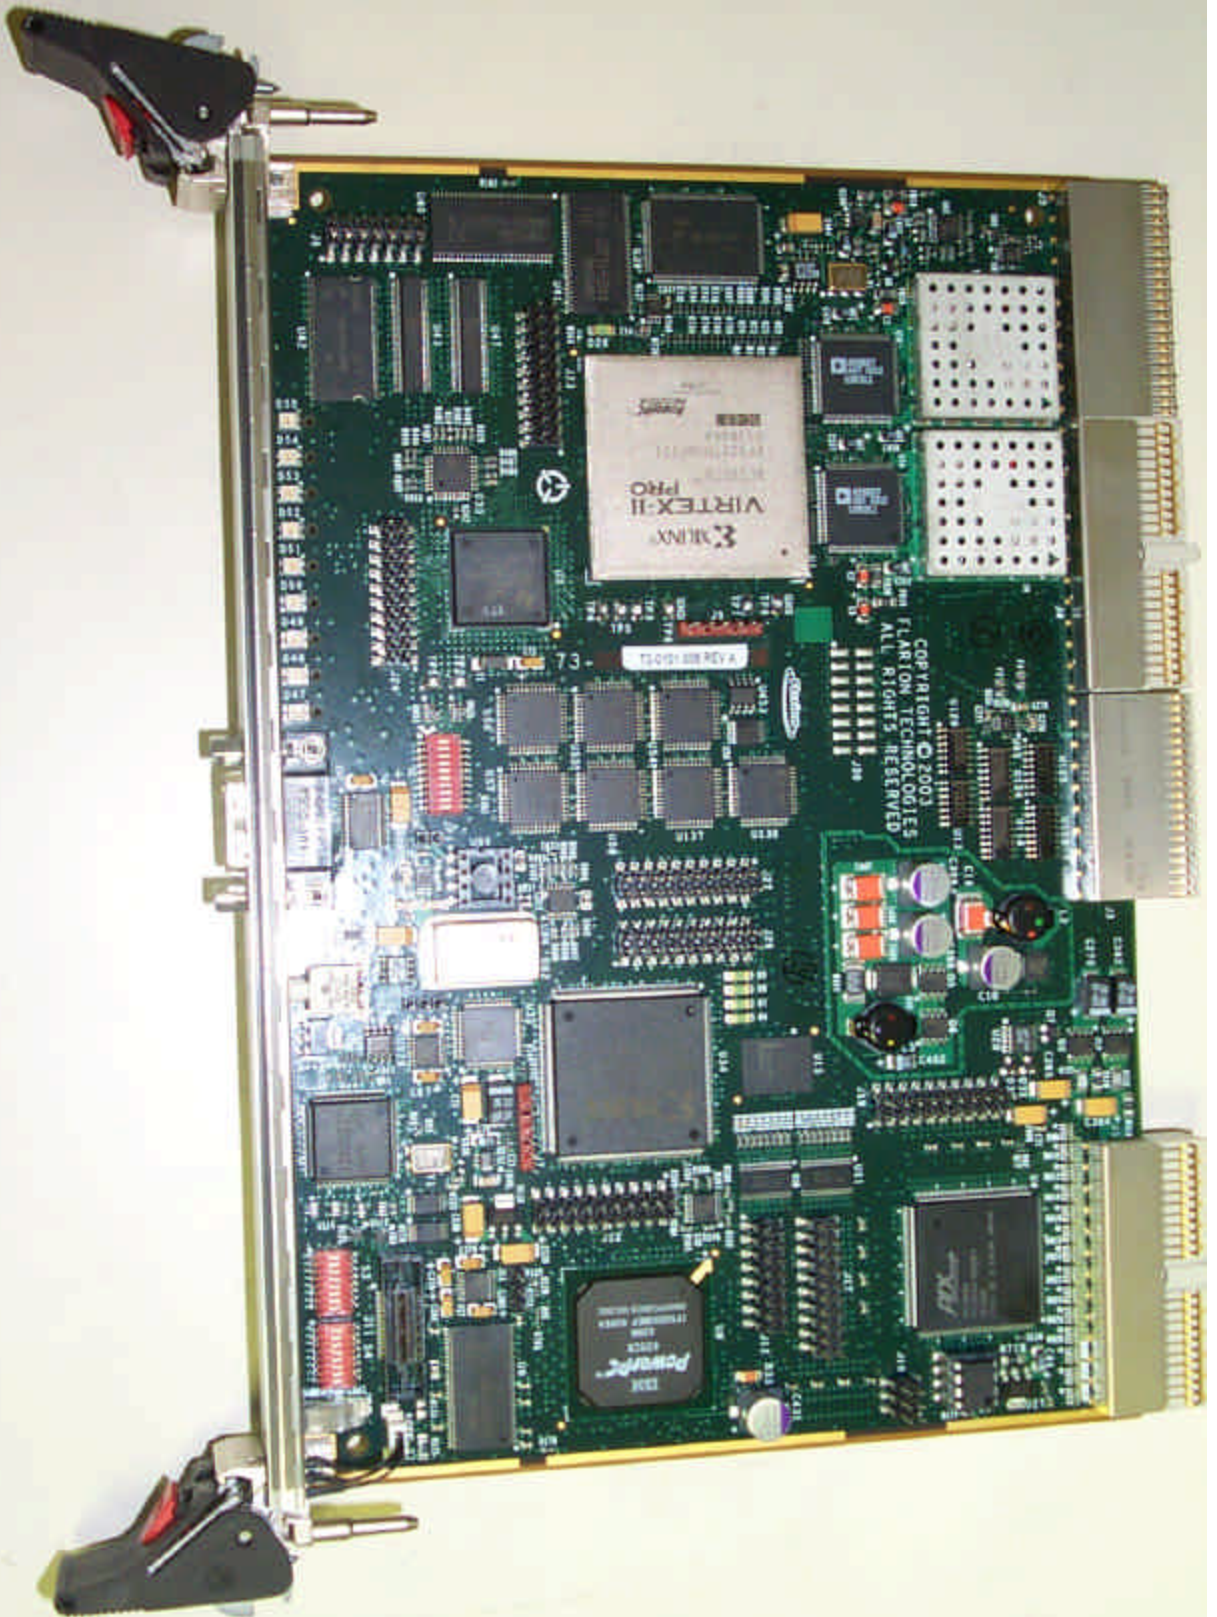



WDCO 251
XXXXXXXXXX 00000
Rev. 1.0
MADN 524-TIR-P & CP640

EL30002T-000112-01A7004

