

FCC PART 15.247
EMI MEASUREMENT AND TEST REPORT
For

TVMining(Beijing)Media Technology Co.,Ltd.
E818, West Wing, Yonghe Plaza. No.28 AnDingMen Eas,BeiJing,China

FCC ID: R2J22-BA

May 23, 2014

This Report Concerns: Original Report	Equipment Type: TV BOX
Test Engineer:	Lisa Chen <i>Lisa Chen</i>
Report No.:	BSL14071011Y-1ER-32
Receive EUT Date/Test Date:	May 12 / May 12 - May 23, 2014
Reviewed By:	Sky Zhang <i>Sky Zhang</i>
Prepared By:	BSL Testing Co.,LTD. NO. 24, ZH Park, Nantou, Shenzhen, 518000 China Tel: 86- 755-26508703 Fax: 86- 755-26508703

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of BSL Testing Co.,LTD. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1.	Report information	4
1.2.	Measurement Uncertainty	4
2.	PRODUCT DESCRIPTION	5
2.1.	EUT Description	5
2.2.	Block Diagram of EUT Configuration.....	6
2.3.	Support Equipment List	6
2.4.	Test Conditions	6
3.	TEST RESULTS SUMMARY	8
	Modifications	8
4.	TEST EQUIPMENT USED	9
5.	§15.203 - ANTENNA REQUIREMENT	10
5.1.	Standard Applicable.....	10
5.2.	Antenna Connector Construction.....	10
5.3.	Result	10
6.	§15.207 - CONDUCTED EMISSIONS.....	11
6.1.	Applicable Standard.....	11
6.2.	Test Procedure	11
6.3.	Conducted Power line Emission Limits.....	11
6.4.	Block Diagram of Test Setup.....	11
6.5.	Conducted Power Line Test Result.....	12
7.	§15.209, §15.205, §15.247(D) - SPURIOUS EMISSIONS	14
7.1.	Test Equipment	14
7.2.	Test Procedure	14
7.3.	Radiated Test Setup	14
7.4.	Radiated Emission Limit.....	16
7.5.	Radiated Emission Test Result	17
7.6.	Conducted Emission Method.....	28
7.7.	Test Requirement:.....	28
7.8.	Limit:.....	28
7.9.	Test Setup.....	28
7.10.	Test Result	28
8.	§15.247(A) (2) – 6DB BANDWIDTH TESTING.....	36
8.1.	Test Equipment	36
8.2.	Test Procedure	36
8.3.	Applicable Standard.....	36
8.4.	Test Result:Pass.	36
9.	§15.247(B) (3) - MAXIMUM PEAK OUTPUT POWER	43
9.1.	Test Equipment	43
9.2.	Test Procedure	43
9.3.	Applicable Standard.....	43
9.4.	Test Result	44
10.	§15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	45

10.1.	Test Equipment	45
10.2.	Test Procedure	45
10.3.	Applicable Standard.....	45
10.4.	Test Result	45
11.	§15.247(E) - POWER SPECTRAL DENSITY	51
11.1.	Test Equipment	51
11.2.	Test Procedure	51
11.3.	Applicable Standard.....	51
11.4.	Test Result	51

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BSL approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BSL in any way guarantees the later performance of the product/equipment.
- 1.1.2.The sample/s mentioned in this report is/are supplied by Applicant, BSL therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BSL, unless the applicant has authorized BSL in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of BSL Testing Co.,LTD.

(FCC Registered Test Site Number: 191509) on

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	+/-1.25dB
2	RF Power, Conducted	+/-0.20dB
3	Spurious emissions, conducted	+/-0.33dB
4	All emissions, radiated (<1G)	+/-3.47dB
5	All emissions, radiated (>1G)	+/-3.82dB
6	Temperature	+/-0.5°CdB
7	Humidity	+/-2%

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant	:	TVMining(Beijing)Media Technology Co.,Ltd.
Address	:	E818, West Wing, Yonghe Plaza. No.28 AnDingMen Eas,BeiJing,China
Manufacturer	:	Dongguan Yuanfeng Technology Co., Ltd
Address	:	No. 18, Industrial East Road, Songshan Lake Hi-Tech Industrial Development Zone, Dongguan, Guangdong, 523808, China
EUT Description	:	TV BOX
Modulation	:	802.11b: DSSS(11/5.5/2/1Mbps) 802.11g: OFDM(54/48/36/24/18/12/9/6Mbps) 802.11n@20M:OFDM (6.5 to 72.2 Mbps) 802.11n(40M): OFDM (13.5 to 150 Mbps)
Wi-fi Frequency	:	IEEE 802.11b/g/n@20M: 2412-2462MHz
Band	:	802.11n(40M): 2422-2452 MHz
Number of	:	IEEE 802.11 b/g/n(20M): 11 Channels.
Channels	:	802.11n(40M): 2422-2452 MHz, 7 Channels.
Model Number	:	TFD-22-BA
Power Supply	:	DC 5V By Adapter
Antenna gain	:	0dBi
Antenna type	:	SMD

2.2. Block Diagram of EUT Configuration

Radiated emissions test And Conducted Emission test




Figure 1 EUT Setup

2.3. Support Equipment List

Table 2 Ancillary Equipment

Name	Model No	S/N	Manufacturer	Used (Y/N)
Adapter	ADS-10BA-06 05010GPCU	N/A	HONOR	Y

2.4. Test Conditions

Temperature: 23~25°C

Relative Humidity: 50~63 %

After the preliminary test, we found to emit the worst emissions and therefore had been tested under operating condition.

For 802.11b, 802.11g, and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

IEEE 802.11b:1Mbps data rate were chosen for full testing.

IEEE 802.11g:6Mbps data rate were chosen for full testing.

IEEE 802.11n-HT20:6.5Mbps data rate were chosen for full testing.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

IEEE 802.11n-HT40:13.5Mbps data rate were chosen for full testing.

3. TEST RESULTS SUMMARY

FCC 15 Subpart C, Paragraph 15.247 :2013

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Modifications

No modification was made.

4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	Aug. 23 2013	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCI3	BSL001	Sep. 28 2013	1 Year
BiConiLog Antenna	Rohde & Schwarz	HL562	BSL009	Sep. 28 2013	1 Year
Double -ridged waveguide horn	Rohde & Schwarz	9120D	BSL008	Aug. 27 2013	1 Year
Horn Antenna	ETS-LINDGREN	3160	BSL072	Dec. 28 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL045	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL046	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL047	Aug. 27 2013	1 Year
Amplifier(100kHz-40G Hz)	R&S	SMR40	BSL007	Sep. 28 2013	1 Year
Band filter	Amindeon	82346	BSL049	Aug. 27 2013	1 Year
Active Loop Antenna	EMTES	EM15	BSL011	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
Spectrum analyzer	Rohde & Schwarz	FSP40	BSL049	Sep. 28 2013	1 Year
Shielding Room	zhongyu Electron	7.0(L)x3.0(W)x3.0(H)	BSL085	Sep. 28 2013	1 Year
EMI Test Receiver	R&S	ESPI	BSL002	Sep. 28 2013	1 Year
10dB Pulse Limita	R&S	N/A	BSL003	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
LISN	Rohde & Schwarz	ESH3-Y5	BSL005	Sep. 28 2013	1 Year
Coaxial Cable	YUANFANG	N/A	BSL048	Aug. 27 2013	1 Year
EMI TEST SOFTWARE	AUDIX	E3	N/A	N/A	N/A

5. §15.203 - ANTENNA REQUIREMENT

5.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2. Antenna Connector Construction

The antenna used for this product is a SMD antenna . The antenna is permanently attached. Refer to the product photo.

5.3. Result

Compliance

6. §15.207 - CONDUCTED EMISSIONS

6.1. Applicable Standard

The specification used was with the FCC Part 15.207 limits.

6.2. Test Procedure


During the conducted emission test, the EUT was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-3.0	73/60	60-50

Note: In the above table, the tighter limit applies at the band edges.


6.4. Block Diagram of Test Setup

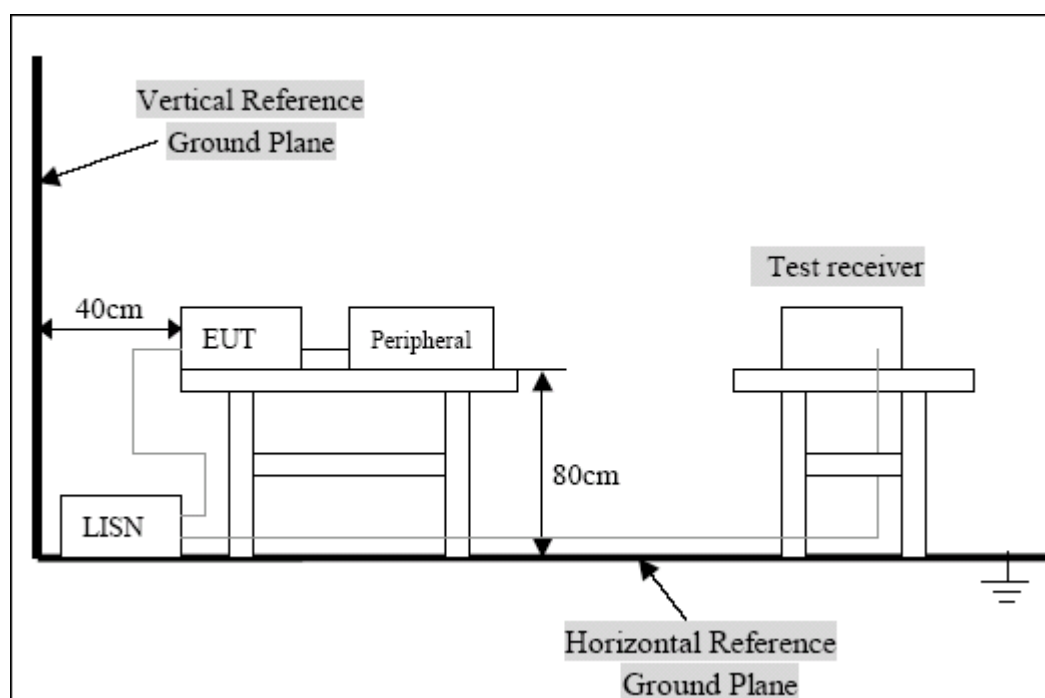

6.5. Conducted Power Line Test Result

Pass.

Link Mode

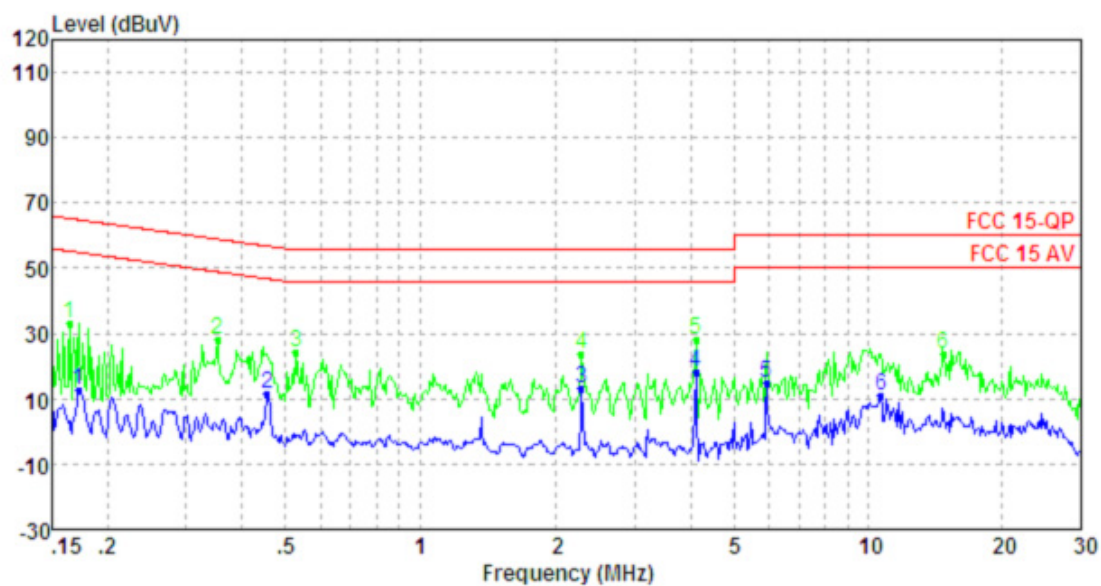

Condition:


: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1	0.17	12.47	54.86	-42.39	Average	LINE
2	0.46	11.39	46.76	-35.37	Average	LINE
3	2.28	13.30	46.00	-32.70	Average	LINE
4	4.11	18.11	46.00	-27.89	Average	LINE
5	5.93	15.03	50.00	-34.97	Average	LINE
6	10.68	11.05	50.00	-38.95	Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1	0.16	33.10	65.25	-32.15	QP	LINE
2	0.35	28.12	58.91	-30.79	QP	LINE
3	0.53	24.25	56.00	-31.75	QP	LINE
4	2.28	23.80	56.00	-32.20	QP	LINE
5	4.11	28.23	56.00	-27.77	QP	LINE
6	14.75	23.89	60.00	-36.11	QP	LINE

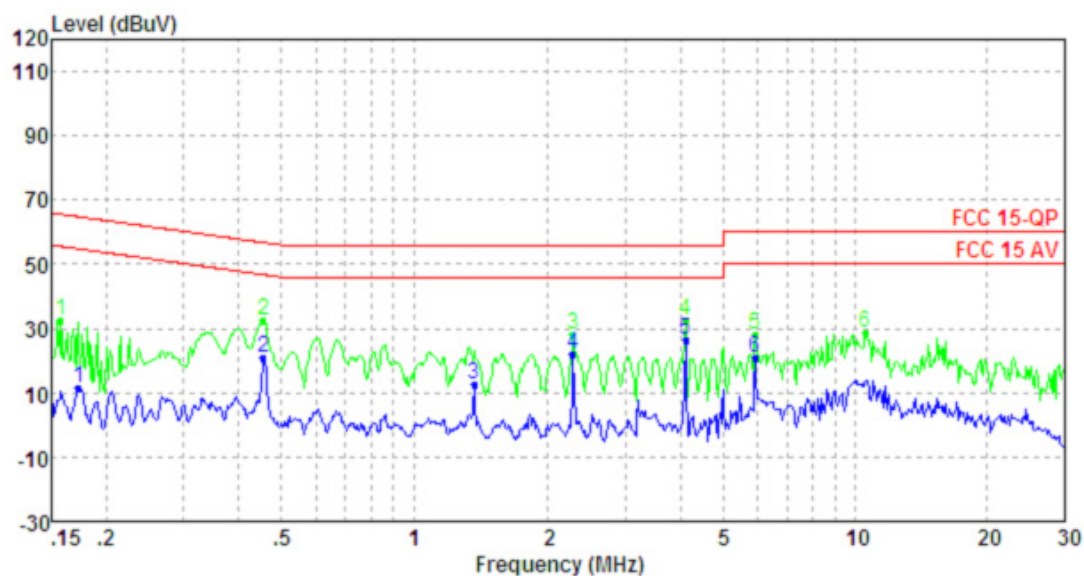

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1	0.17	11.60	54.81	-43.21	Average	NEUTRAL
2	0.46	20.91	46.76	-25.85	Average	NEUTRAL
3	1.37	12.89	46.00	-33.11	Average	NEUTRAL
4	2.28	22.01	46.00	-23.99	Average	NEUTRAL
5	4.11	26.31	46.00	-19.69	Average	NEUTRAL
6	5.93	20.87	50.00	-29.13	Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1	0.16	32.76	65.60	-32.84	QP	NEUTRAL
2	0.46	32.32	56.76	-24.44	QP	NEUTRAL
3	2.28	28.34	56.00	-27.66	QP	NEUTRAL
4	4.11	32.48	56.00	-23.52	QP	NEUTRAL
5	5.93	28.35	60.00	-31.65	QP	NEUTRAL
6	10.56	28.92	60.00	-31.08	QP	NEUTRAL

7. §15.209, §15.205, §15.247(D) - Spurious Emissions

7.1. Test Equipment

Please refer to section 5 this report.

7.2. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level.

Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.


The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.


Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit. And X direction is worst mode

7.3. Radiated Test Setup


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

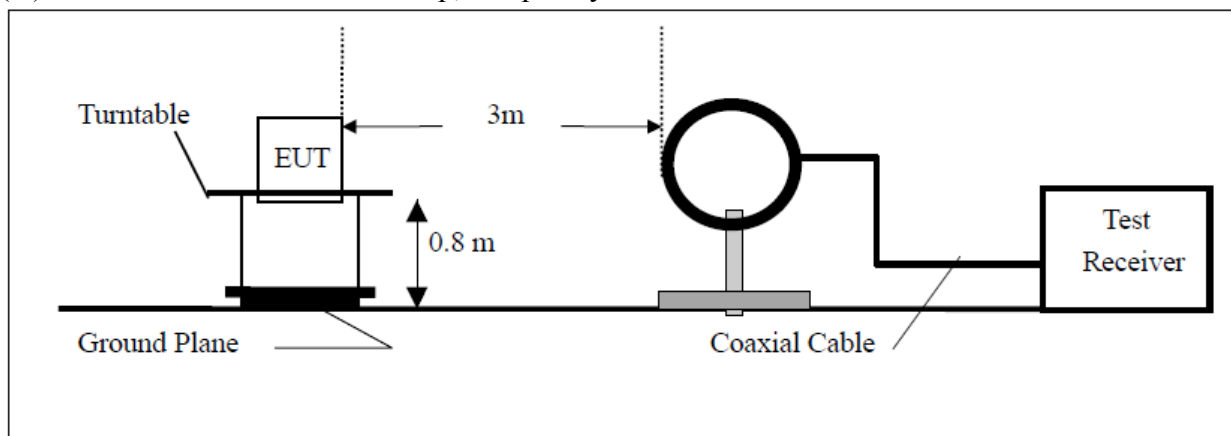

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

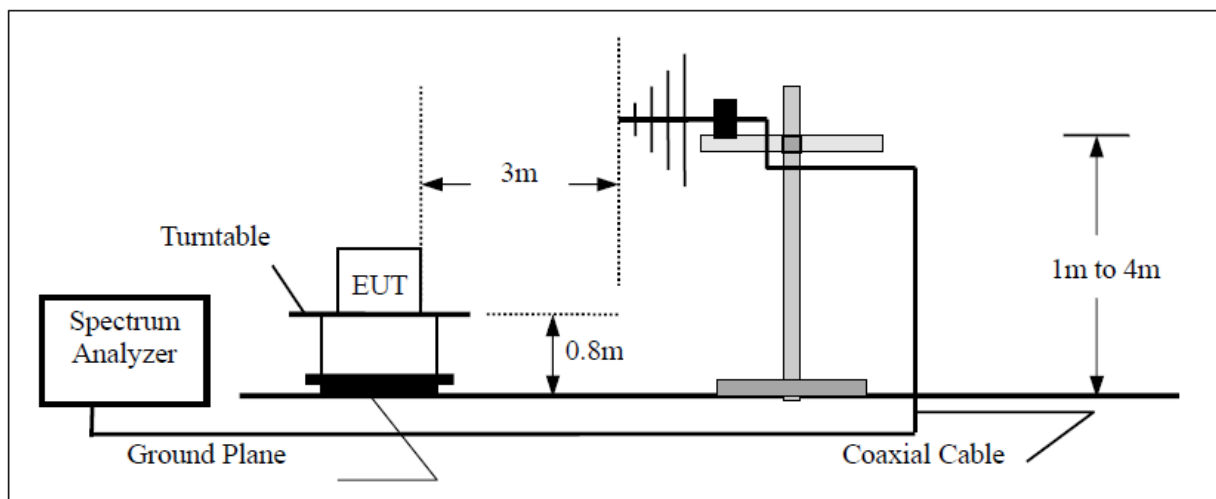

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

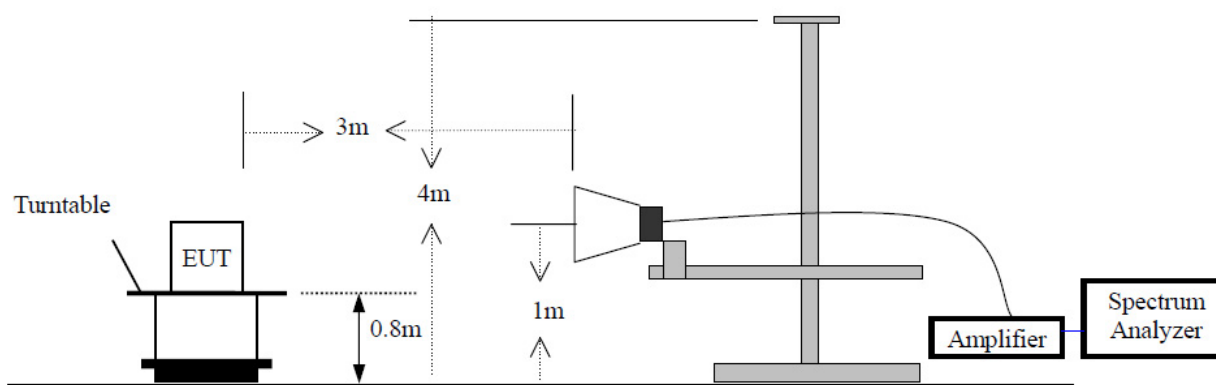

7.4. Radiated Emission Limit

Frequency (MHz)	Limit			The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	/	300	
0.490 - 1.705	24000/F(kHz)	/	30	
1.705-30	30	29.5	30	
30 - 88	100	40	3	
88 - 216	150	43.5	3	
216 - 960	200	46	3	
Above 960	500	54	3	

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) In the Above Table, the tighter limit applies at the band edges.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.5. Radiated Emission Test Result

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-4.98 dB at 7236MHz in the Horizon polarization, with 9KHz to 25 GHz, 3Meters Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For below 9kHz-30MHz Spurious

Freq. (MHz)	Emission(dBuV/m) PK / AV	Limits(dBuV/m) PK / AV	Margin (dB)
-	-	-	-
-	-	-	-


Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.

For 30M-1000MHz Spurious

The worst test mode: WiFi Tx 802.11b 2412MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

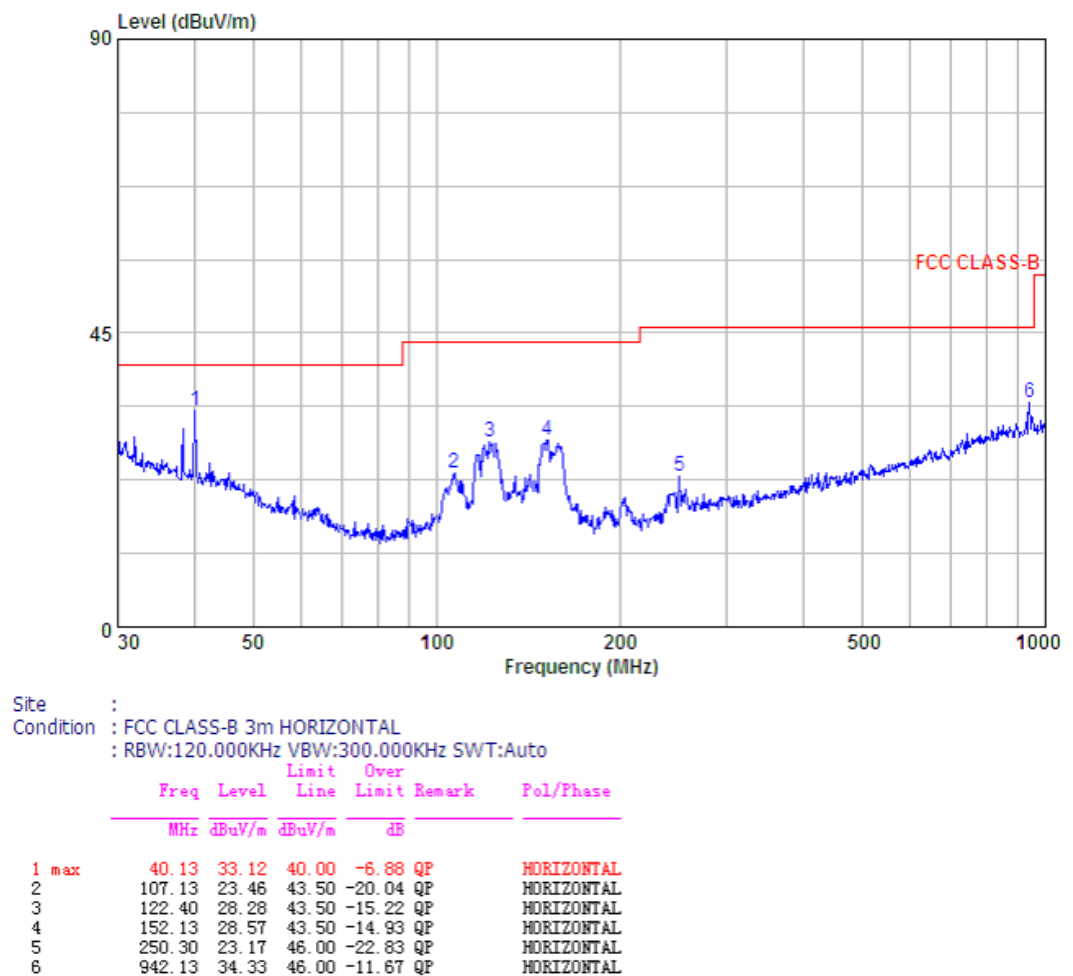

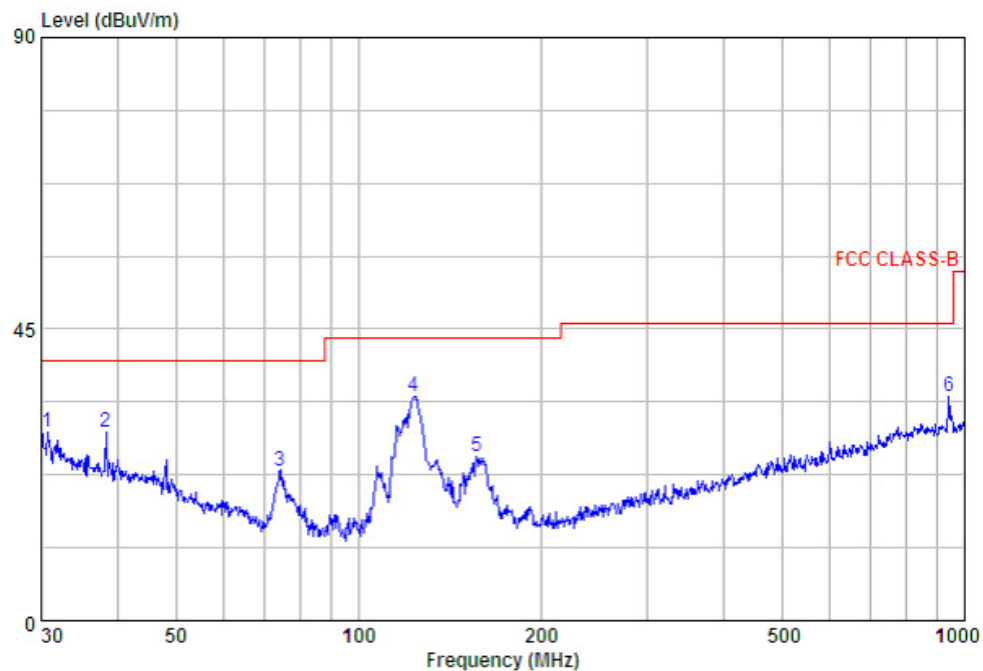

Site :
 Condition : FCC CLASS-B 3m VERTICAL
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB		
1	30.75	29.15	40.00	-10.85	QP	VERTICAL
2	38.35	29.00	40.00	-11.00	QP	VERTICAL
3	74.14	23.19	40.00	-16.81	QP	VERTICAL
4 max	123.27	34.58	43.50	-8.92	QP	VERTICAL
5	156.46	25.32	43.50	-18.18	QP	VERTICAL
6	942.13	34.69	46.00	-11.31	QP	VERTICAL

For 1000MHz-25000MHz Spurious**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
9648.0	22.45	Ave.	12	1.0	V	19.29	41.74	54	12.26
7236.0	22.8	Ave.	320	1.3	V	16.62	39.42	54	14.58
4824.0	25.91	Ave.	234	1.1	H	12.40	38.31	54	15.69
9648.0	34.96	PK	12	1.0	V	19.29	54.25	74	19.75
4824.0	41.43	PK	234	1.1	H	12.40	53.83	74	20.17
7236.0	36.32	PK	320	1.3	V	16.62	52.94	74	21.06
2365.1	25.05	Ave.	74	1.3	H	5.48	30.53	54	23.47
2485.6	23.18	Ave.	111	1.2	V	7.21	30.39	54	23.61
2338.5	23.13	Ave.	88	1.0	V	5.48	28.61	54	25.39
2485.6	37.18	PK	111	1.2	V	7.21	44.39	74	29.61
2365.1	38.33	PK	74	1.3	H	5.48	43.81	74	30.19
2338.5	36.54	PK	88	1.0	V	5.48	42.02	74	31.98

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
9748.0	20.72	Ave.	32	1.1	V	19.40	40.12	54	13.88
7311.0	22.47	Ave.	22	1.2	V	16.49	38.96	54	15.04
9748.0	39.59	PK	32	1.1	V	19.40	58.99	74	15.01
4874.0	25.14	Ave.	201	1.3	H	12.46	37.6	54	16.4
4874.0	42.55	PK	201	1.3	H	12.46	55.01	74	18.99
7311.0	38.08	PK	22	1.2	V	16.49	54.57	74	19.43
2488.3	24.69	Ave.	187	1.1	H	7.21	31.9	54	22.1
2386.1	23.04	Ave.	98	1.2	V	6.13	29.17	54	24.83
2368.4	23.02	Ave.	25	1.3	V	5.48	28.5	54	25.5
2386.1	39.85	PK	98	1.2	V	6.13	45.98	74	28.02
2488.3	37.44	PK	187	1.1	H	7.21	44.65	74	29.35
2368.4	38.2	PK	25	1.3	V	5.48	43.68	74	30.32
High Channel (2462 MHz)									
9848.0	20.96	Ave.	177	1.2	H	19.39	40.35	54	13.65
7386.0	21.83	Ave.	333	1.3	V	15.91	37.74	54	16.26
4924.0	22.88	Ave.	207	1.1	H	12.50	35.38	54	18.62
9848.0	34.28	PK	177	1.2	H	19.39	53.67	74	20.33
7386.0	36.77	PK	333	1.3	V	15.91	52.68	74	21.32
4924.0	39.54	PK	207	1.1	H	12.50	52.04	74	21.96
2491.3	24.77	Ave.	326	1.5	H	7.21	31.98	54	22.02
2368.7	25.38	Ave.	74	1.1	V	5.48	30.86	54	23.14
2488.5	23.83	Ave.	11	1.3	V	7.21	31.04	54	22.96
2488.5	38.18	PK	11	1.3	V	7.21	45.39	74	28.61
2491.3	37.42	PK	326	1.5	H	7.21	44.63	74	29.37
2368.7	37.09	PK	74	1.1	V	5.48	42.57	74	31.43

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
9648.0	23.97	Ave.	77	1.1	V	19.29	43.26	54	10.74
7236.0	21.17	Ave.	161	1.5	V	16.62	37.79	54	16.21
4824.0	22.92	Ave.	87	1.3	V	12.40	35.32	54	18.68
7236.0	37.14	PK	161	1.5	V	16.62	53.76	74	20.24
9648.0	33.96	PK	77	1.1	V	19.29	53.25	74	20.75
4824.0	39.77	PK	87	1.3	V	12.40	52.17	74	21.83
2353.4	25.14	Ave.	22	1.5	V	5.48	30.62	54	23.38
2485.1	22.96	Ave.	113	1.1	V	7.21	30.17	54	23.83
2344.7	23.76	Ave.	32	1.3	H	5.48	29.24	54	24.76
2344.7	39.85	PK	32	1.3	H	5.48	45.33	74	28.67
2485.1	36.51	PK	113	1.1	V	7.21	43.72	74	30.28
2353.4	38.14	PK	22	1.5	V	5.48	43.62	74	30.38
Middle Channel (2437 MHz)									
7311.0	23.18	Ave.	85	1.3	V	16.49	39.67	54	14.33
9748.0	19.46	Ave.	73	1.2	V	19.40	38.86	54	15.14
4874.0	23.05	Ave.	101	1.1	V	12.46	35.51	54	18.49
9748.0	34.88	PK	73	1.2	V	19.40	54.28	74	19.72
7311.0	37.22	PK	85	1.3	V	16.49	53.71	74	20.29
2364.5	23.77	Ave.	71	1.3	V	5.48	29.25	54	24.75
4874.0	36.77	PK	101	1.1	V	12.46	49.23	74	24.77
2318.2	22.91	Ave.	36	1.1	H	5.48	28.39	54	25.61
2383.9	22.43	Ave.	32	1.2	V	6.13	28.56	54	25.44
2383.9	38.15	PK	32	1.2	V	6.13	44.28	74	29.72
2364.5	38.22	PK	71	1.3	V	5.48	43.7	74	30.3
2318.2	37.23	PK	36	1.1	H	5.48	42.71	74	31.29

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
9848.0	19.31	Ave.	36	1.6	V	19.39	38.7	54	15.3
7386.0	22.5	Ave.	21	1.7	H	15.91	38.41	54	15.59
4924.0	22.4	Ave.	123	1.6	V	12.50	34.9	54	19.1
9848.0	34.15	PK	36	1.6	V	19.39	53.54	74	20.46
7386.0	35.69	PK	21	1.7	H	15.91	51.6	74	22.4
2485.6	22.34	Ave.	101	1.4	H	7.21	29.55	54	24.45
2493.5	22.2	Ave.	33	1.3	V	7.21	29.41	54	24.59
4924.0	36.66	PK	123	1.6	V	12.50	49.16	74	24.84
2333.4	22.53	Ave.	32	1.0	V	5.48	28.01	54	25.99
2485.6	37.28	PK	101	1.4	H	7.21	44.49	74	29.51
2493.5	36.33	PK	33	1.3	V	7.21	43.54	74	30.46
2333.4	37.58	PK	32	1.0	V	5.48	43.06	74	30.94

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2389.5	58.04	PK	168	1.1	H	6.13	64.17	74	9.83
2389.5	33.91	Ave.	168	1.1	H	6.13	40.04	54	13.96
9648.0	19.67	Ave.	77	1.0	V	19.28	38.95	54	15.05
7236.0	21.3	Ave.	36	1.2	V	16.62	37.92	54	16.08
4824.0	23.52	Ave.	74	1.0	V	12.40	35.92	54	18.08
4824.0	42.54	PK	74	1.0	V	12.40	54.94	74	19.06
2492.3	25.2	Ave.	83	1.2	H	7.21	32.41	54	21.59
2492.3	44.9	PK	83	1.2	H	7.21	52.11	74	21.89
9648.0	33.02	PK	77	1.0	V	19.28	52.3	74	21.7
7236.0	32.97	PK	36	1.2	V	16.62	49.59	74	24.41
2316.4	19.28	Ave.	26	1.3	H	5.48	24.76	54	29.24
2316.4	32.87	PK	26	1.3	H	5.48	38.35	74	35.65
Middle Channel (2437 MHz)									
9748.0	20.34	Ave.	12	1.0	H	19.40	39.74	54	14.26
7311.0	19.1	Ave.	168	1.2	V	16.49	35.59	54	18.41
4874.0	41.1	PK	132	1.3	V	12.46	53.56	74	20.44
4874.0	20.85	Ave.	132	1.3	V	12.46	33.31	54	20.69
9748.0	33.55	PK	12	1.0	H	19.40	52.95	74	21.05
2491.2	23.89	Ave.	274	1.3	V	6.81	30.7	54	23.3
2383.6	23.7	Ave.	113	1.1	H	6.13	29.83	54	24.17
7311.0	32.91	PK	168	1.2	V	16.49	49.4	74	24.6
2331.5	21.07	Ave.	354	1.4	V	5.48	26.55	54	27.45
2491.2	37.15	PK	274	1.3	V	6.81	43.96	74	30.04
2383.6	34.11	PK	113	1.1	H	6.13	40.24	74	33.76
2331.5	34.11	PK	354	1.4	V	5.48	39.59	74	34.41

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2483.7	60.16	PK	176	1.2	H	7.21	67.37	74	6.63
2488.6	54.17	PK	68	1.3	H	7.21	61.38	74	12.62
2483.7	34.02	Ave.	176	1.2	H	7.21	41.23	54	12.77
9848.0	20.85	Ave.	88	1.2	V	19.39	40.24	54	13.76
2488.6	30.93	Ave.	68	1.3	H	7.21	38.14	54	15.86
7386.0	20.44	Ave.	235	1.3	V	15.91	36.35	54	17.65
4924.0	23.64	Ave.	115	1.1	V	12.50	36.14	54	17.86
4924.0	41.91	PK	115	1.1	V	12.50	54.41	74	19.59
9848.0	33.91	PK	88	1.2	V	19.39	53.3	74	20.7
2344.6	25.08	Ave.	138	1.1	H	5.48	30.56	54	23.44
7386.0	33.18	PK	235	1.3	V	15.91	49.09	74	24.91
2344.6	34.31	PK	138	1.1	H	5.48	39.79	74	34.21

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
9688.0	18.06	Ave.	74	1.3	V	19.29	37.35	54	16.65
7266.0	20.10	Ave.	235	1.2	H	16.62	36.72	54	17.28
4844.0	20.89	Ave.	221	1.1	V	12.40	33.29	54	20.71
7266.0	34.76	PK	235	1.2	H	16.62	51.38	74	22.62
9688.0	31.45	PK	74	1.3	V	19.29	50.74	74	23.26
2381.4	23.18	Ave.	25	1.2	V	6.13	29.31	54	24.69
4844.0	35.68	PK	221	1.1	V	12.40	48.08	74	25.92
2486.7	20.77	Ave.	316	1.3	V	7.21	27.98	54	26.02
2335.1	22.09	Ave.	101	1.0	V	5.48	27.57	54	26.43
2486.7	35.96	PK	316	1.3	V	7.21	43.17	74	30.83
2381.4	36.02	PK	25	1.2	V	6.13	42.15	74	31.85
2335.1	35.75	PK	101	1.0	V	5.48	41.23	74	32.77
Middle Channel (2437 MHz)									
9748.0	18.96	Ave.	34	1.3	H	19.40	38.36	54	15.64
7311.0	20.67	Ave.	71	1.1	H	16.49	37.16	54	16.84
4874.0	23.16	Ave.	85	1.0	V	12.46	35.62	54	18.38
9748.0	32.11	PK	34	1.3	H	19.40	51.51	74	22.49
7311.0	33.80	PK	71	1.1	H	16.49	50.29	74	23.71
4874.0	36.88	PK	85	1.0	V	12.46	49.34	74	24.66
2383.1	22.87	Ave.	177	1.2	V	6.13	29.00	54	25.00
2489.6	21.72	Ave.	63	1.1	V	7.21	28.93	54	25.07
2339.6	21.63	Ave.	234	1.3	V	5.48	27.11	54	26.89
2489.6	36.87	PK	63	1.1	V	7.21	44.08	74	29.92
2339.6	36.87	PK	234	1.3	V	5.48	42.35	74	31.65
2383.1	35.56	PK	177	1.2	V	6.13	41.69	74	32.31

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
9808.0	19.62	Ave.	2	1.2	V	19.29	38.91	54	15.09
7356.0	21.93	Ave.	12	1.6	V	16.49	38.42	54	15.58
4904.0	24.63	Ave.	93	1.1	V	12.46	37.09	54	16.91
9808.0	32.74	PK	2	1.2	V	19.29	52.03	74	21.97
7356.0	33.02	PK	12	1.6	V	16.49	49.51	74	24.49
2357.1	23.54	Ave.	77	1.3	H	5.48	29.02	54	24.98
2488.7	21.22	Ave.	133	1.0	V	7.21	28.43	54	25.57
4904.0	35.74	PK	93	1.1	V	12.46	48.20	74	25.80
2336.2	22.01	Ave.	325	1.2	V	5.48	27.49	54	26.51
2488.7	35.74	PK	133	1.0	V	7.21	42.95	74	31.05
2357.1	34.76	PK	77	1.3	H	5.48	40.24	74	33.76
2336.2	35.96	PK	325	1.2	V	5.48	41.44	74	32.56

7.6. Conducted Emission Method

Please refer to section 5 this report.


7.7. Test Requirement:

FCC Part15 C Section 15.247 (d)

7.8. Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.9. Test Setup

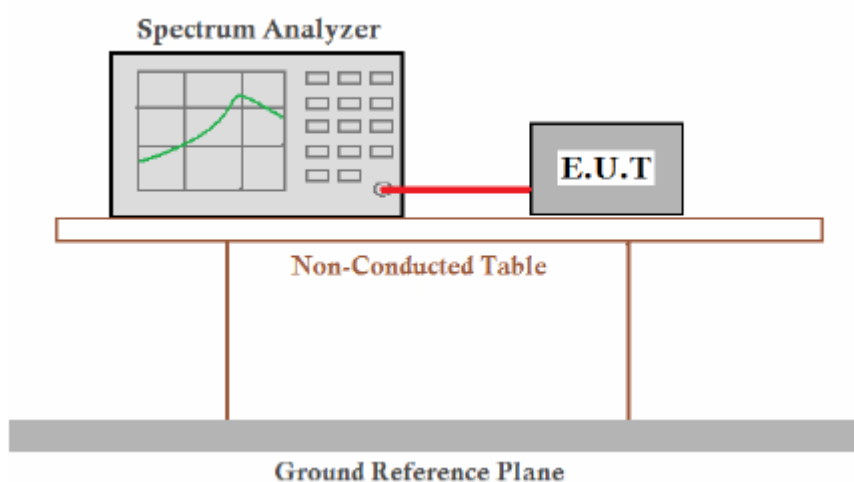


7.10. Test Result

Test plot as follows:


Channel	Delta Peak to Band Emission (dBc)	$\geq$ Limit (dBc)	Result
802.11b mode			
Low Channel 2412 MHz	-38.84	20	Pass
Middle Channel 2437 MHz	-38.31	20	Pass
High channel 2462 MHz	-37.06	20	Pass
802.11g mode			
Low Channel 2412 MHz	-56.75	20	Pass
Middle Channel 2437 MHz	-56.99	20	Pass
High channel 2462 MHz	-56.16	20	Pass
802.11n-HT20 mode			
Low Channel 2412 MHz	-57.87	20	Pass
Middle Channel 2437 MHz	-56.28	20	Pass
High channel 2462 MHz	-57.28	20	Pass
802.11n-HT40 mode			
Low Channel 2422 MHz	-49.40	20	Pass
Middle Channel 2437 MHz	-48.42	20	Pass
High channel 2452 MHz	-48.81	20	Pass

802.11b Low Channel 2412 MHz 30MHz~25GHz

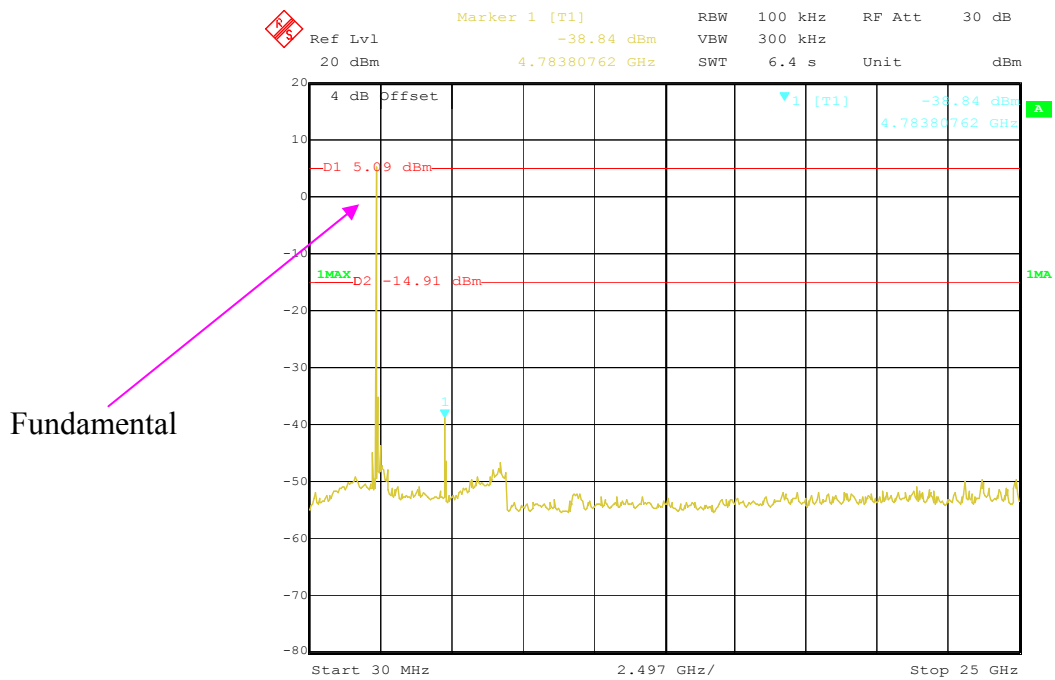


Note: Sweep points=1001pts

802.11b Middle Channel 2437 MHz 30MHz~25GHz

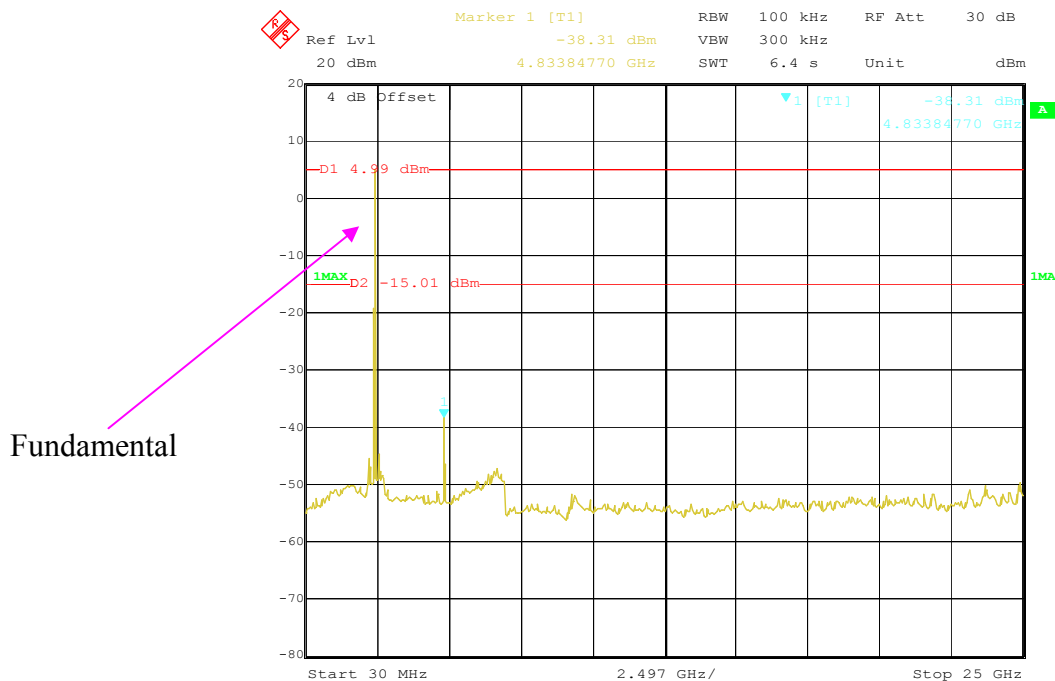


Note: Sweep points=1001pts

802.11b High channel 2462 MHz 30MHz~25GHz

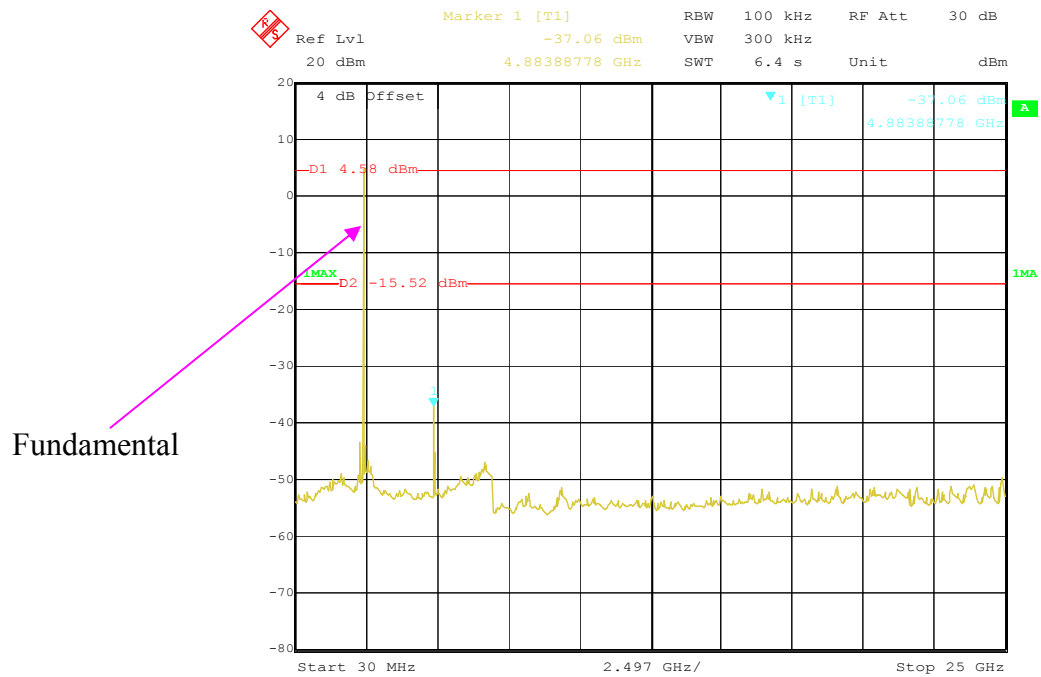


Note: Sweep points=1001pts

802.11g Low Channel 2412 MHz 30MHz~25GHz

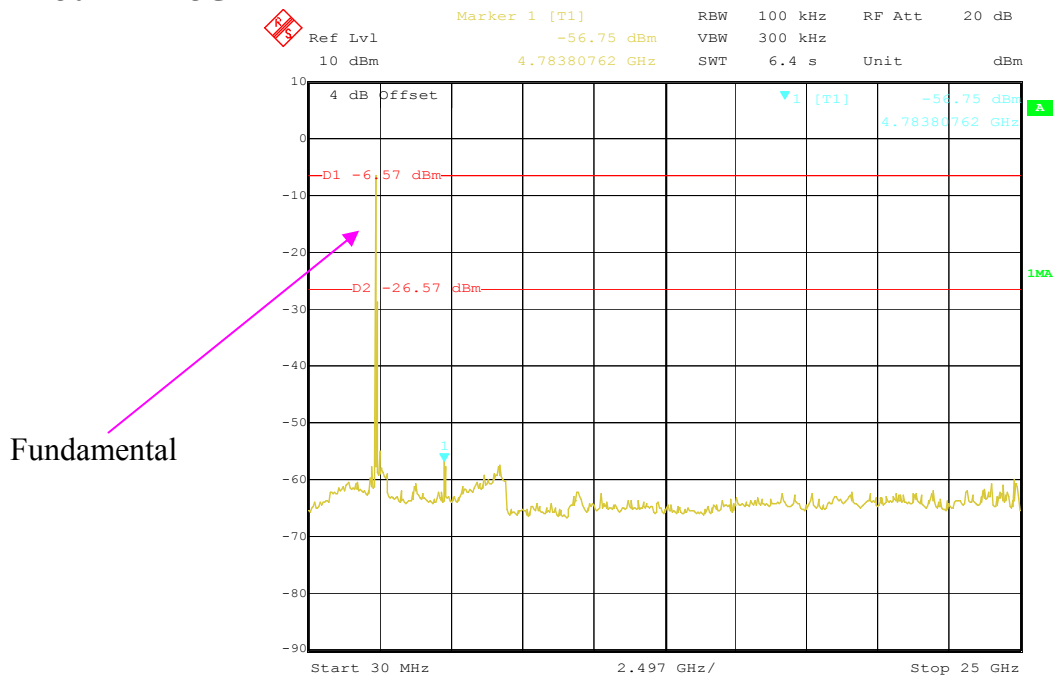


Note: Sweep points=1001pts

802.11g Middle Channel 2437 MHz 30MHz~25GHz

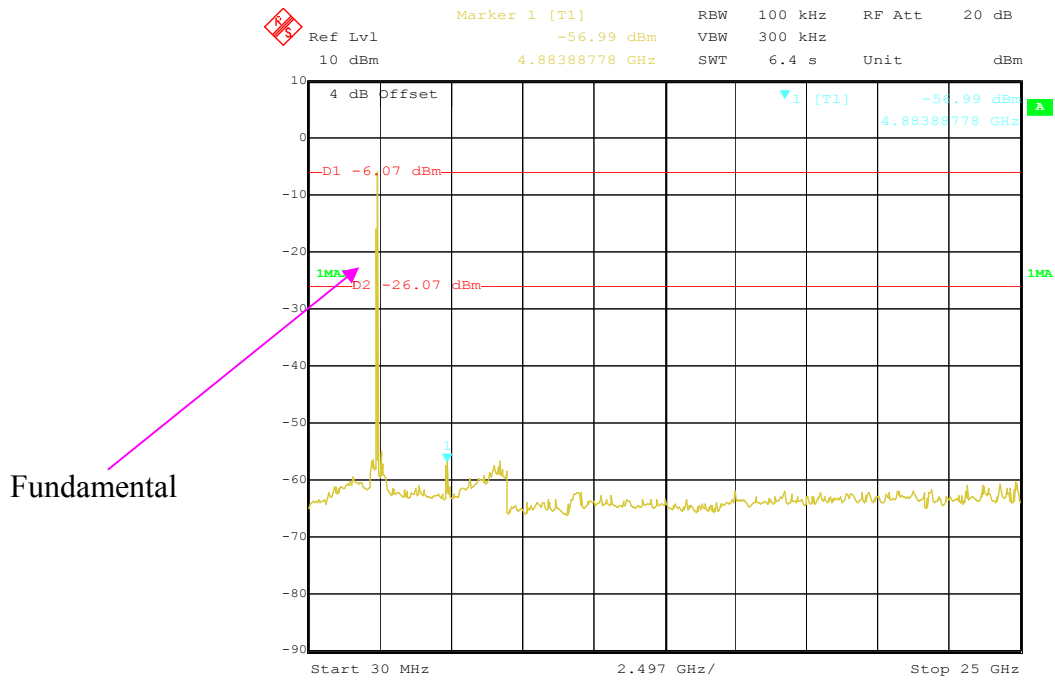


Note: Sweep points=1001pts

802.11g High channel 2462 MHz 30MHz~25GHz

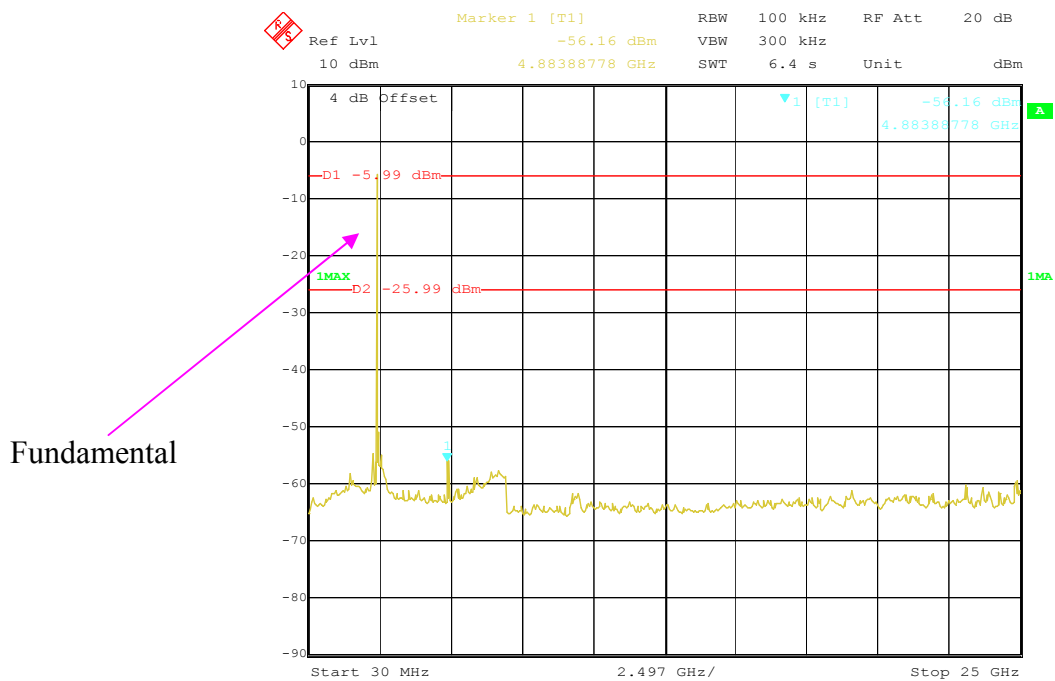


Note: Sweep points=1001pts

802.11 n-HT20 Low Channel 2412 MHz 30MHz~25GHz

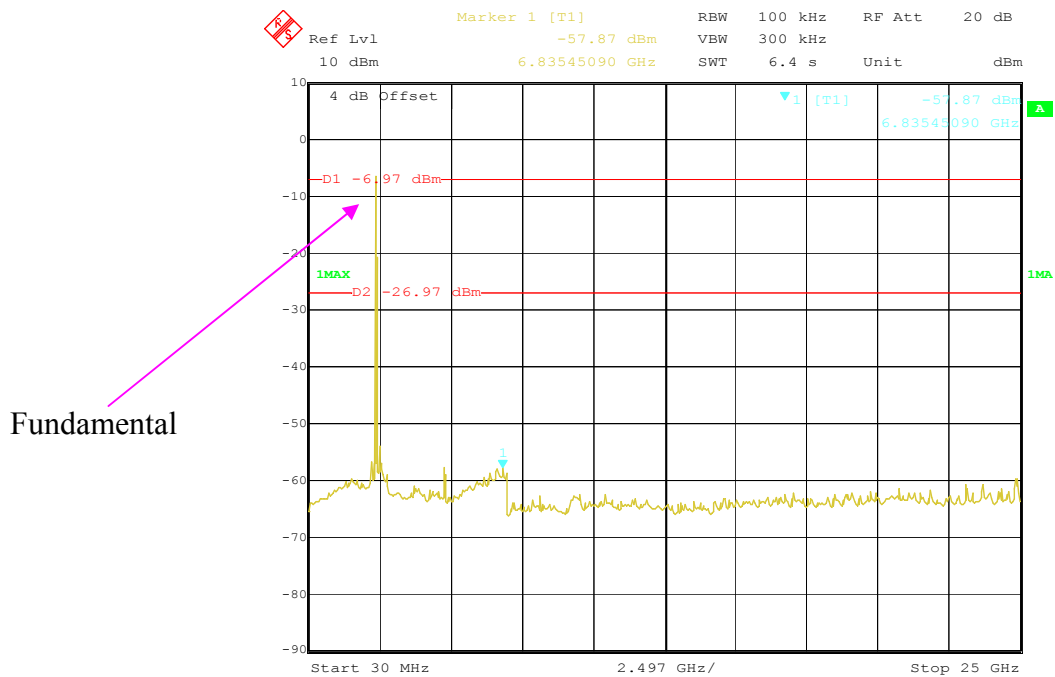


Note: Sweep points=1001pts

802.11 n-HT20 Middle Channel 2437 MHz 30MHz~25GHz

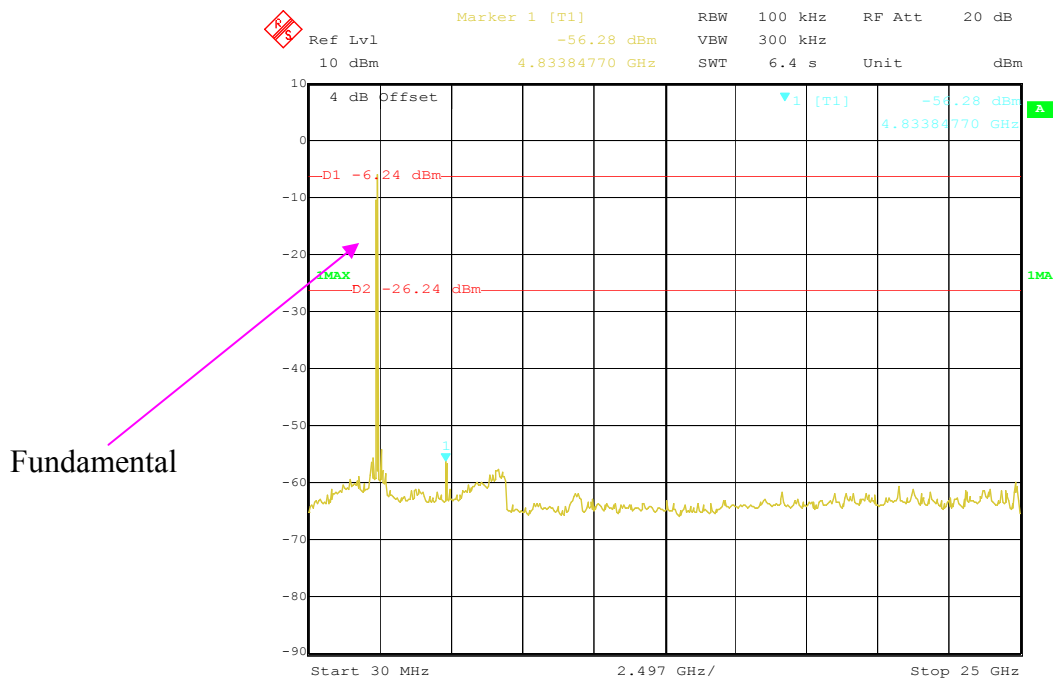


Note: Sweep points=1001pts

802.11 n-HT20 High channel 2462 MHz 30MHz~25GHz

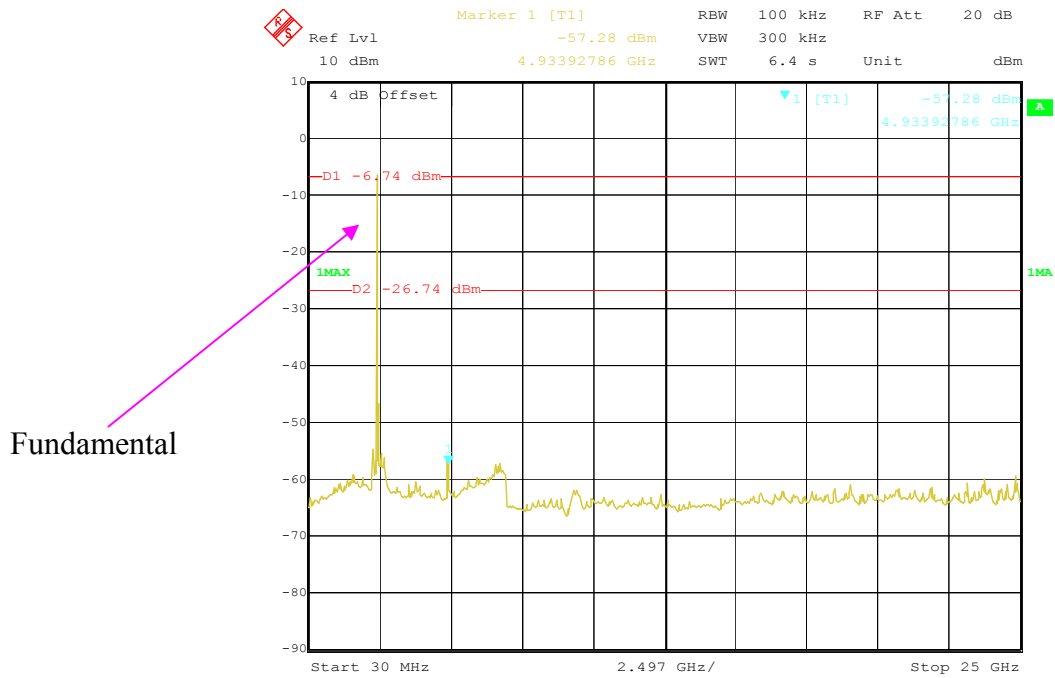


Note: Sweep points=1001pts

802.11 n- HT40 Low Channel 2422 MHz 30MHz~25GHz

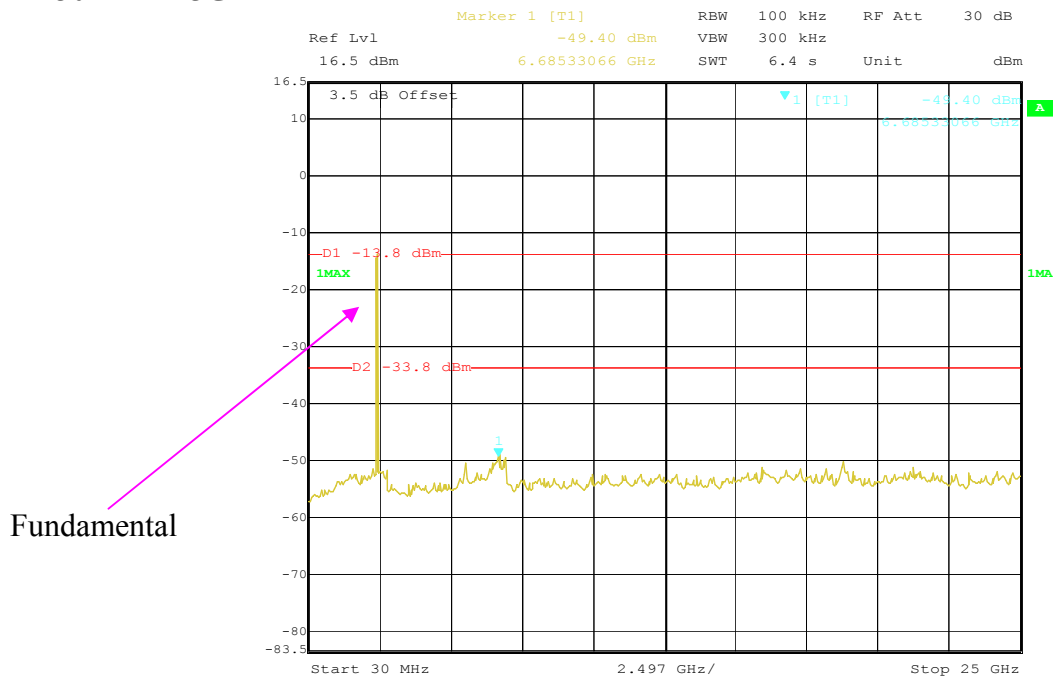


Note: Sweep points=1001pts

802.11 n- HT40 Middle Channel 2437 MHz 30MHz~25GHz

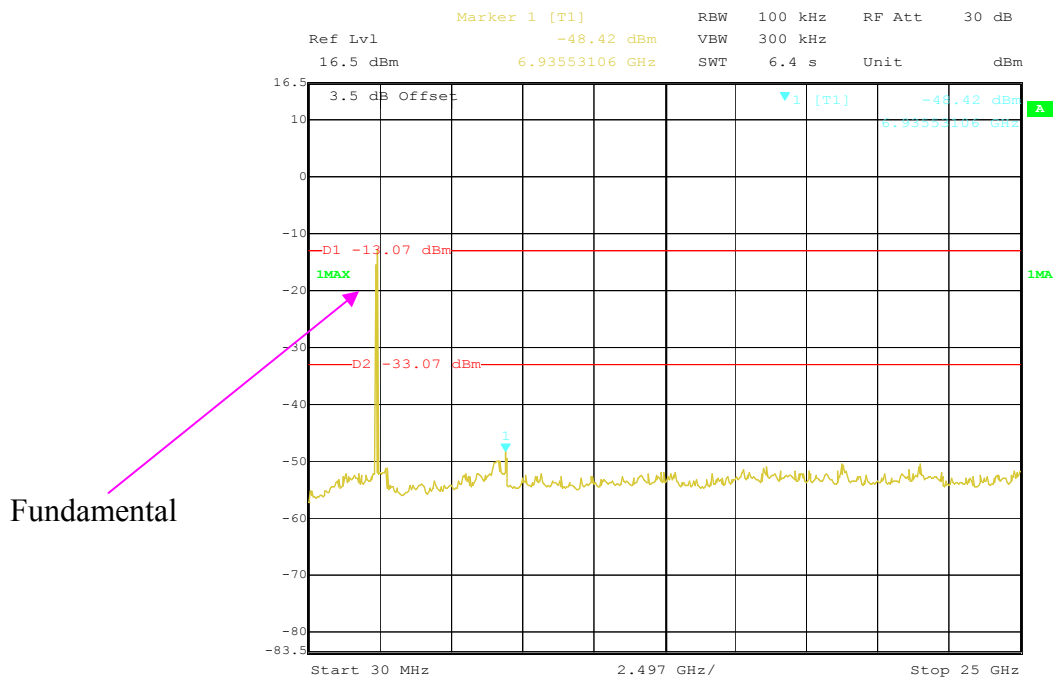

Note: Sweep points=1001pts

802.11 n- HT40 High channel 2452 MHz 30MHz~25GHz

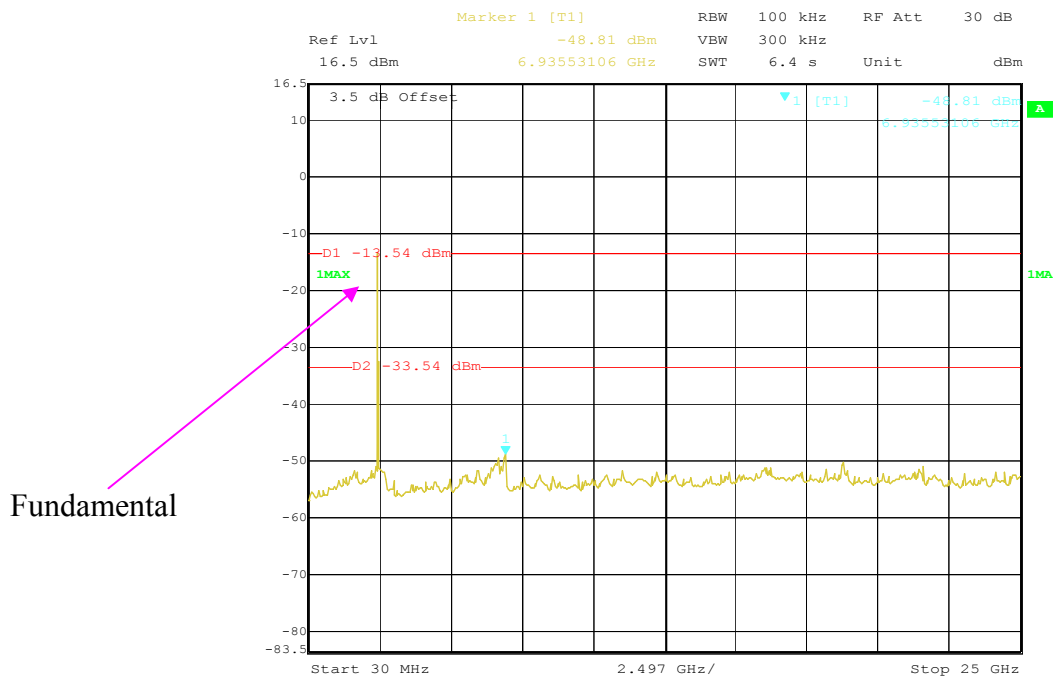

Note: Sweep points=1001pts

8. §15.247(A) (2) – 6DB BANDWIDTH TESTING

8.1. Test Equipment

Please refer to Section 5 this report.

8.2. Test Procedure

1. Set EUT in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz,VBW>=RBW,Span=50MHz,Sweep=auto.
4. Mark the peak frequency and -6dB(upper and lower)frequency.
5. Repeat until all the rest channels are investigated.



8.3. Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


8.4. Test Result:Pass.

Please refer to the following tables

Channel	Channel Frequency (MHz)	Data Rate (Mbps)	6dB Emission Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	8.056	>500
Middle	2437	1	8.056	>500
High	2462	1	8.056	>500
802.11g mode				
Low	2412	6	15.391	>500
Middle	2437	6	15.391	>500
High	2462	6	15.391	>500
802.11n-HT20 mode				
Low	2412	6.5	16.353	>500
Middle	2437	6.5	16.353	>500
High	2462	6.5	16.353	>500
802.11n-HT40 mode				
Low	2422	13.	36.192	>100
Middle	2437	13.	36.192	>100
High	2452	13.	36.192	>100

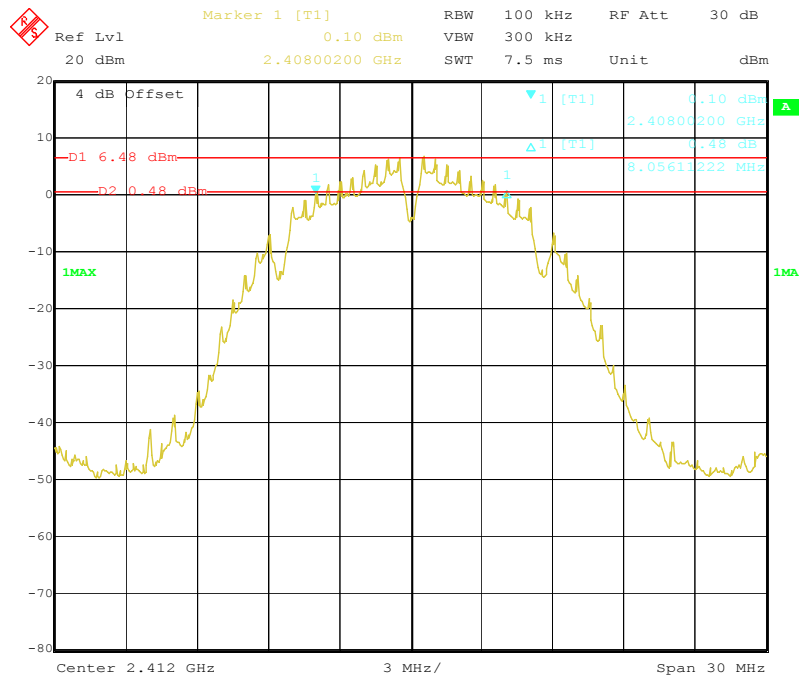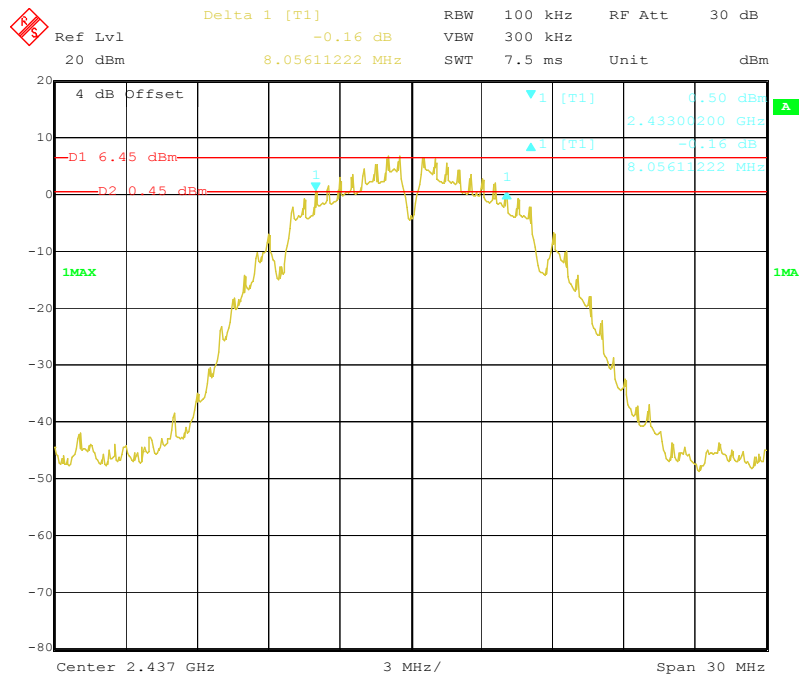
802.11b Mode:**Low Channel****Middle Channel**

High Channel

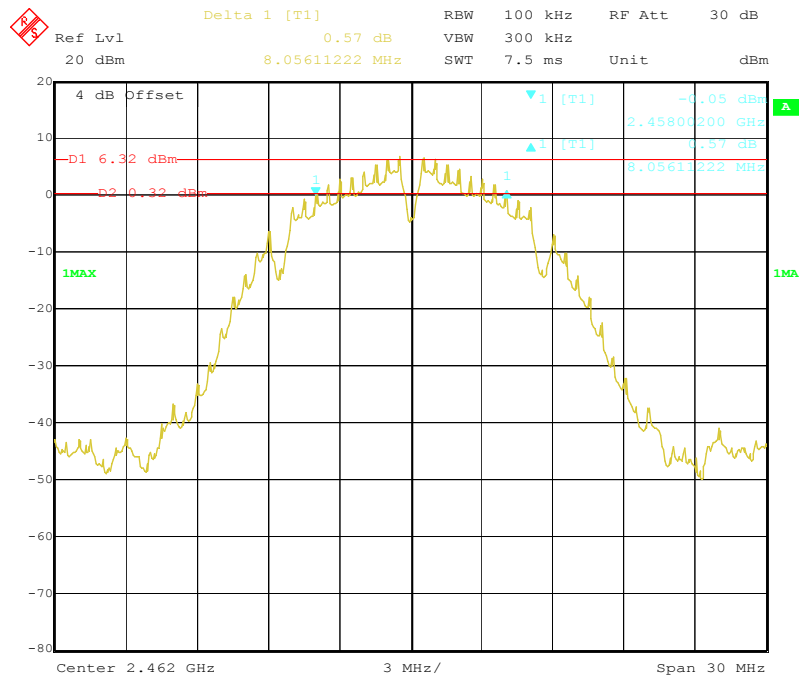


802.11g Mode:


Low Channel


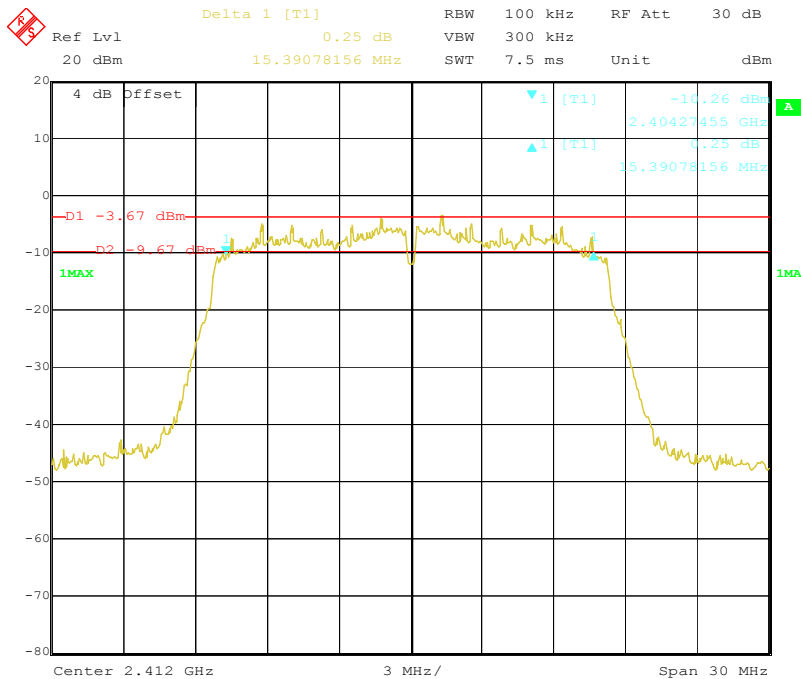


Middle Channel

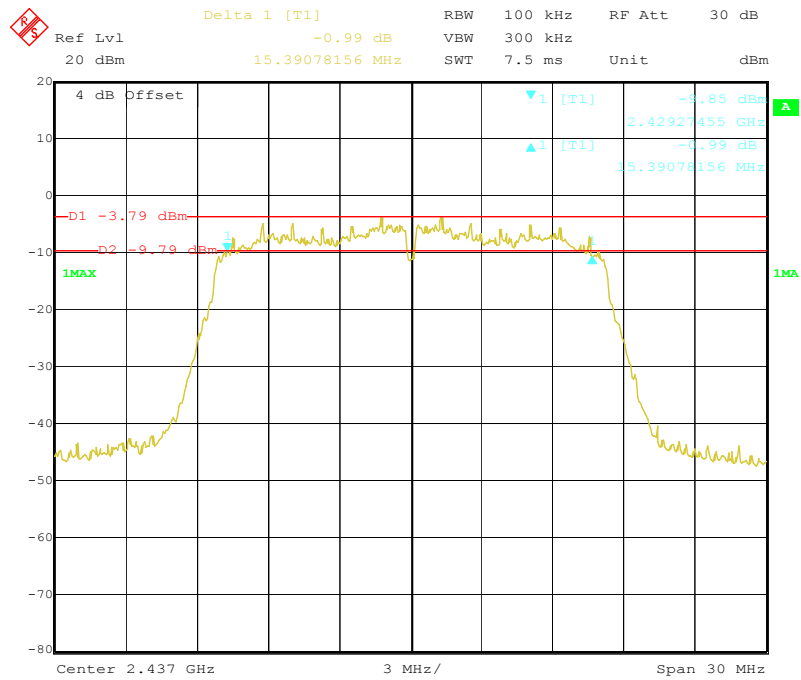


High Channel

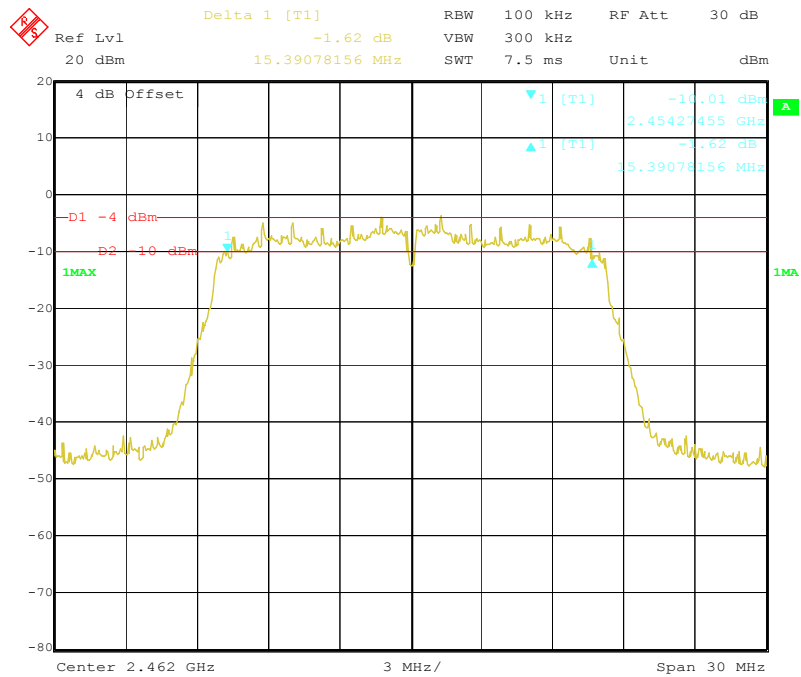

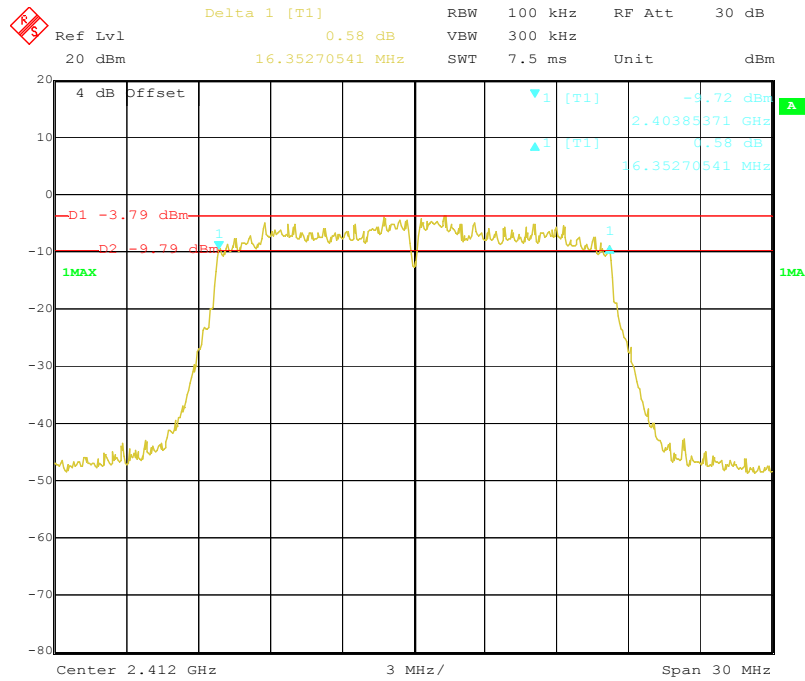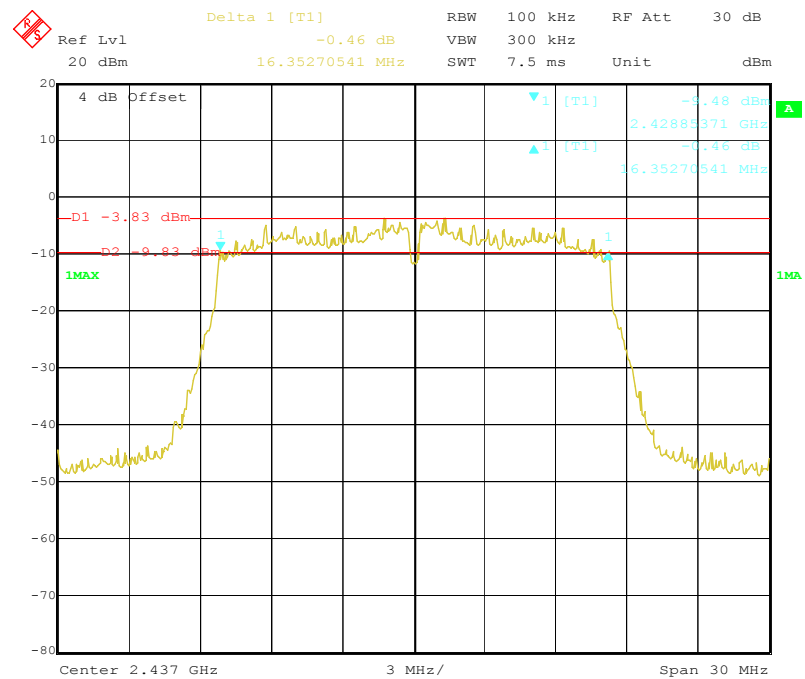
802.11n HT20 Mode:**Low Channel****Middle Channel**

High Channel

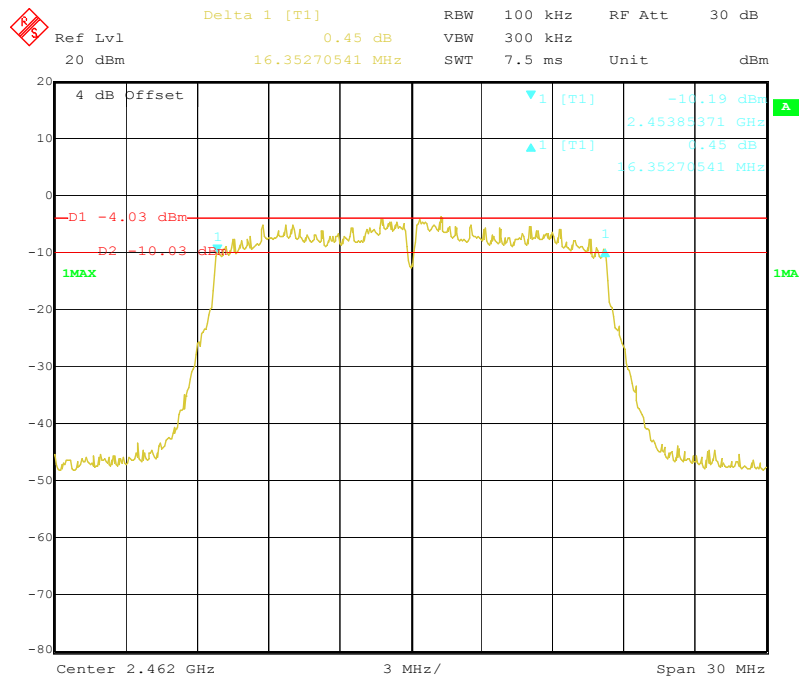


802.11n HT40 Mode:


Low Channel

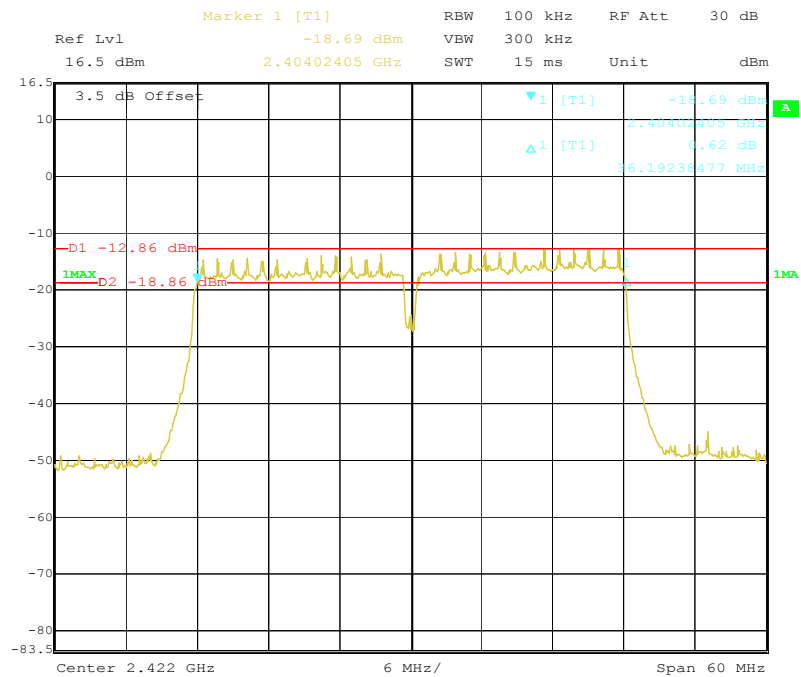

Middle Channel

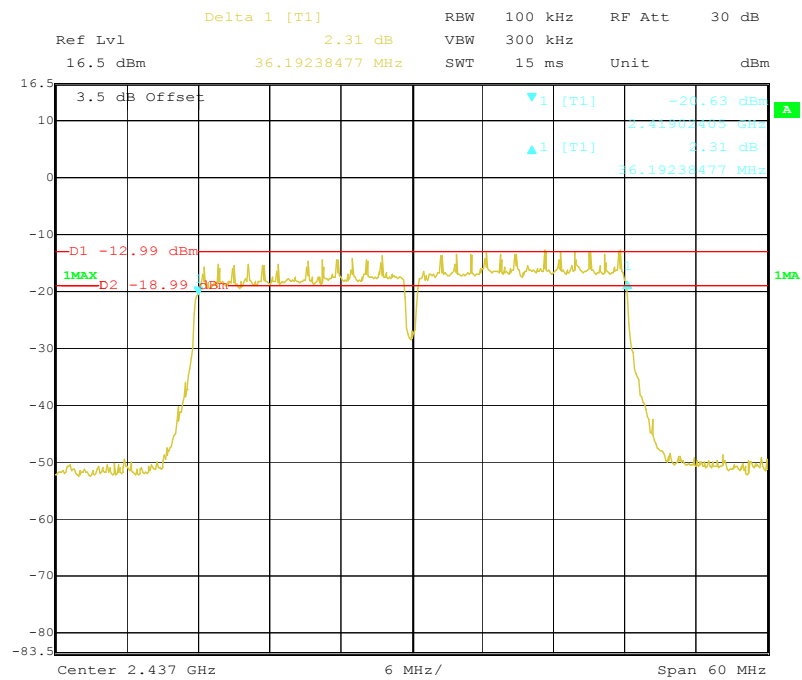

High Channel

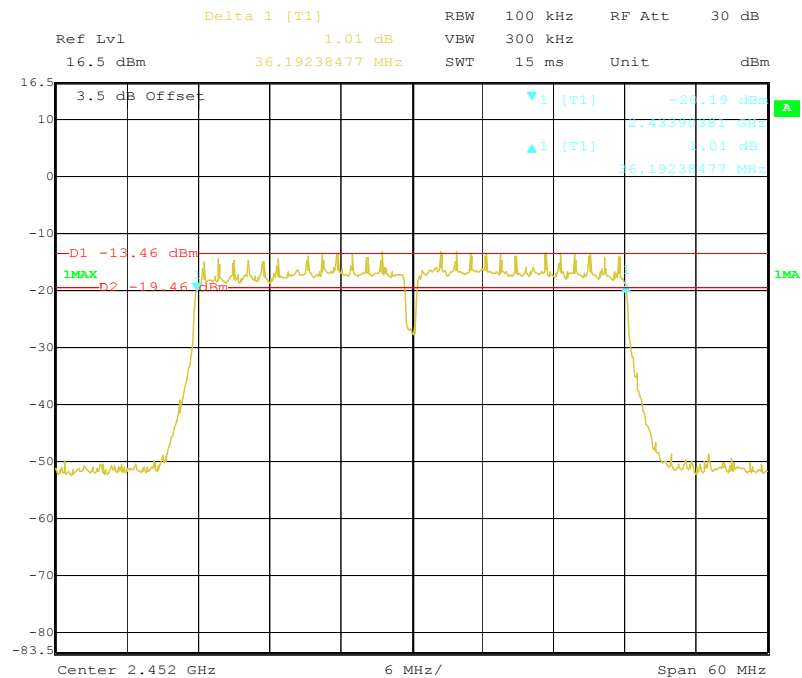

9. §15.247(B) (3) - Maximum Peak Output Power

9.1. Test Equipment

Please refer to Section 4 this report.

9.2. Test Procedure

1. The EUT was directly connected to the power meter

9.3. Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

9.4. Test Result

Pass

Channel	Frequency (MHz)	Data Rate (Mbps)	Reading Power (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	12.89	30	Pass
Middle	2437	1	12.93	30	Pass
High	2462	1	12.69	30	Pass
802.11g mode					
Low	2412	6	11.84	30	Pass
Middle	2437	6	11.84	30	Pass
High	2462	6	11.87	30	Pass
802.11n-HT20 mode					
Low	2412	6.5	11.94	30	Pass
Middle	2437	6.5	11.90	30	Pass
High	2462	6.5	11.90	30	Pass
802.11n-HT40 mode					
Low	2422	13.5	7.96	30	Pass
Middle	2437	13.5	7.87	30	Pass
High	2452	13.5	8.01	30	Pass

10. §15.247(D) – 100 KHZ Bandwidth of Frequency Band Edge

10.1.Test Equipment

Please refer to Section 4 this report.

10.2.Test Procedure

- 1, Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2, Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3, Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
Note: For Rdstricted Band
RBW=1MHz
VBW=1 MHz
- 4, Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5, Repeat above procedures until all measured frequencies were complete.

10.3.Applicable Standard



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



10.4.Test Result



Pass.



Channel	Delta Peak to Band Emission (dBc)	≥Limit (dBc)	Result
802.11b mode			
Left-band	44.78	20	Pass
Right-band	46.48	20	Pass
802.11g mode			
Left-band	44.57	20	Pass
Right-band	51.60	20	Pass
802.11n-HT20 mode			
Left-band	47.11	20	Pass
Right-band	51.42	20	Pass
802.11n-HT40 mode			
Left-band	36.69	20	Pass
Right-band	36.84	20	Pass

Please refer to following plots.

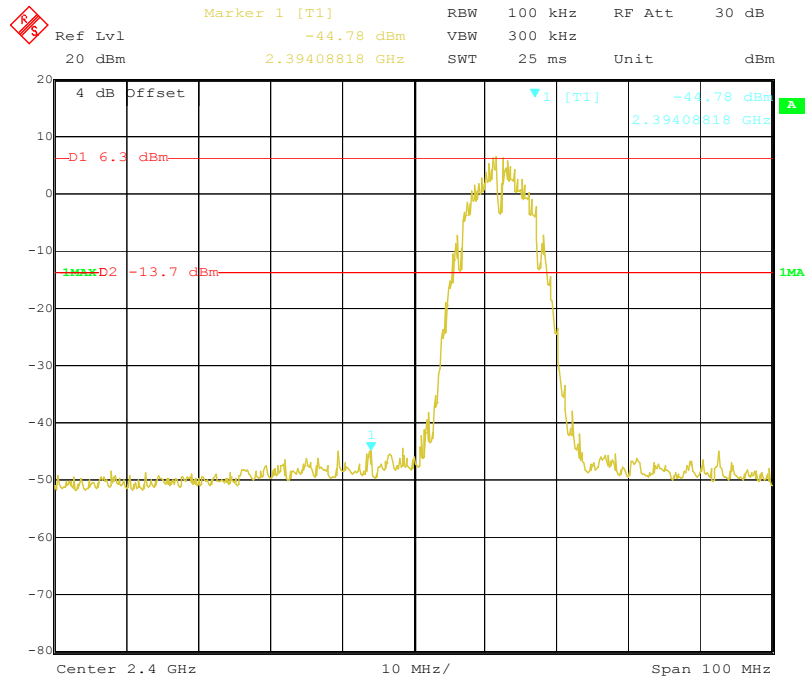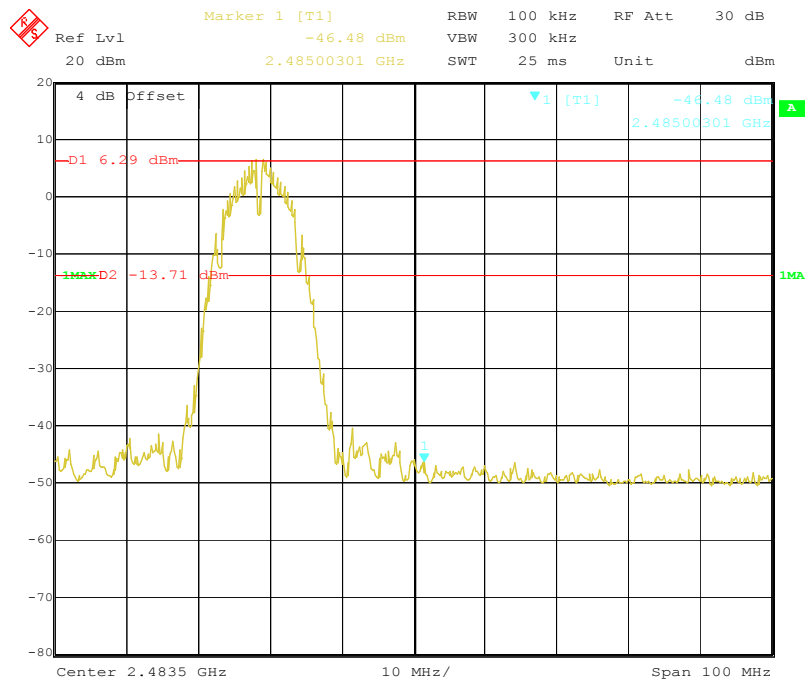802.11b: Band Edge, Left Side**802.11b: Band Edge, Right Side**

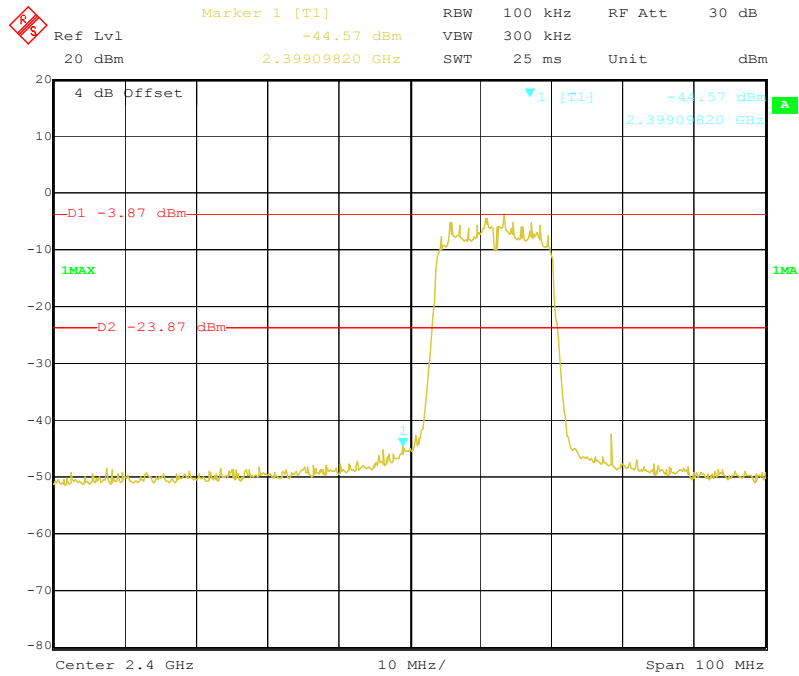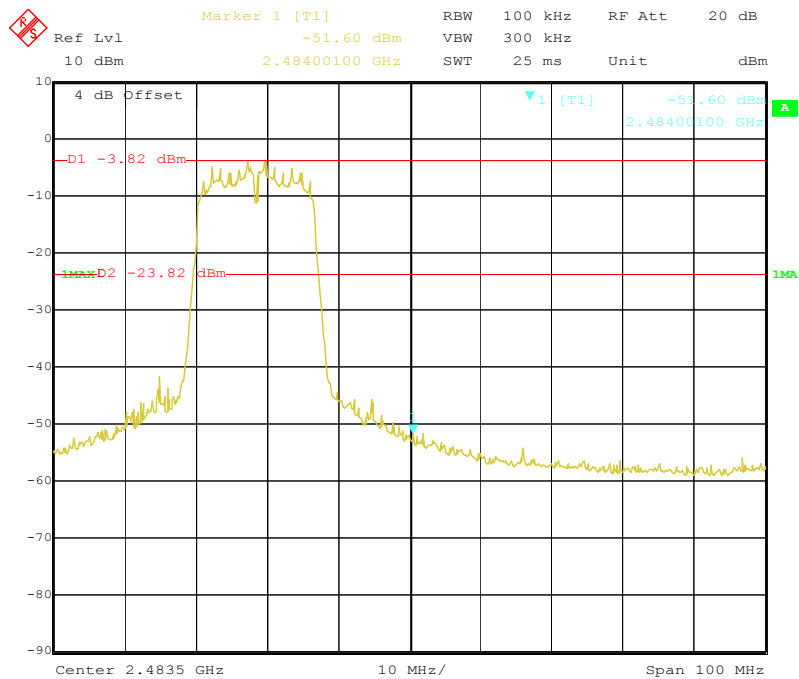802.11g: Band Edge, Left Side**802.11g: Band Edge, Right Side**

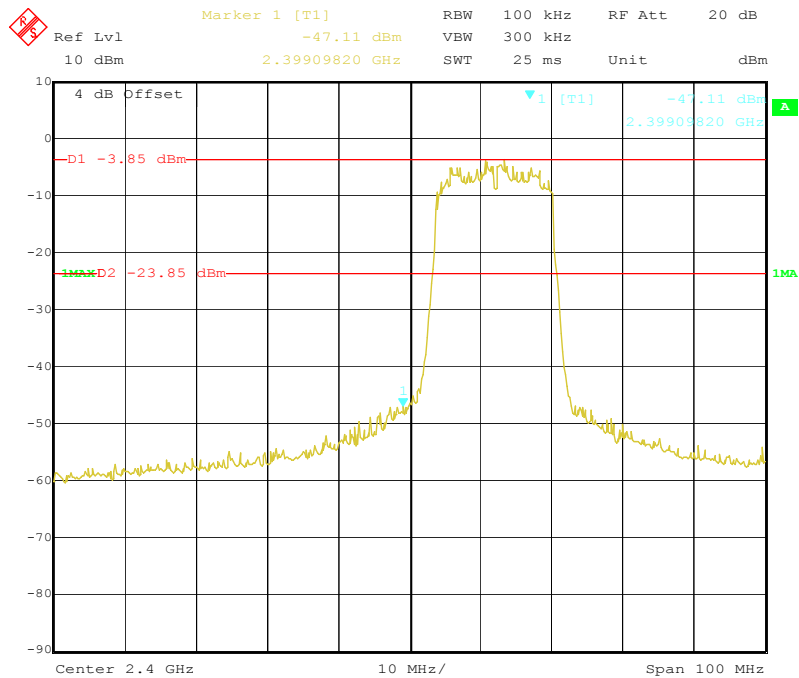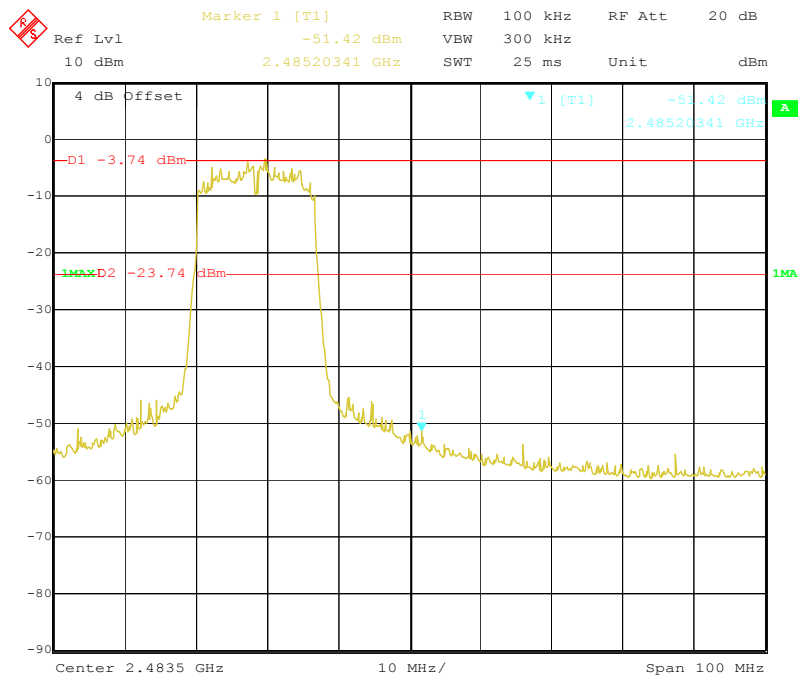802.11n-HT20: Band Edge, Left Side**802.11n-HT20: Band Edge, Right Side**

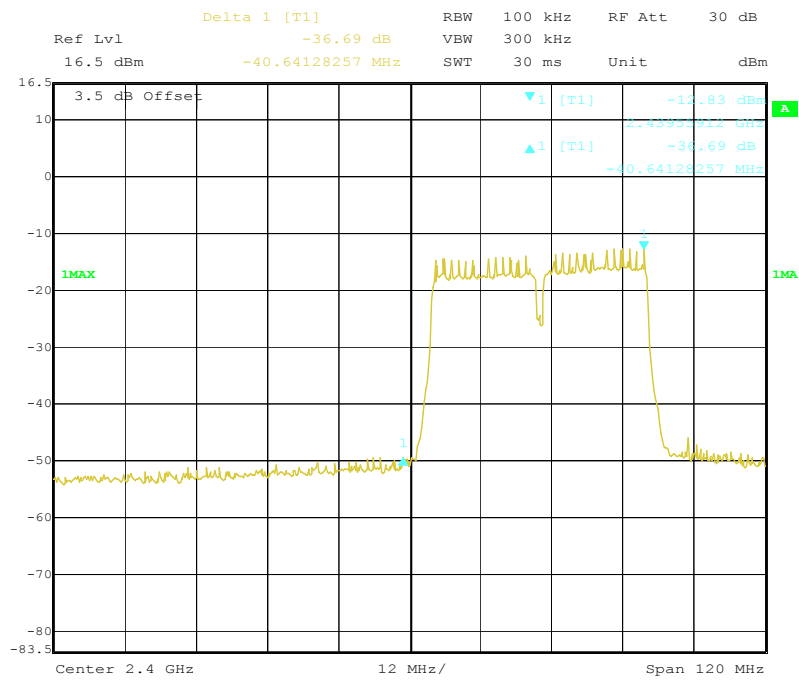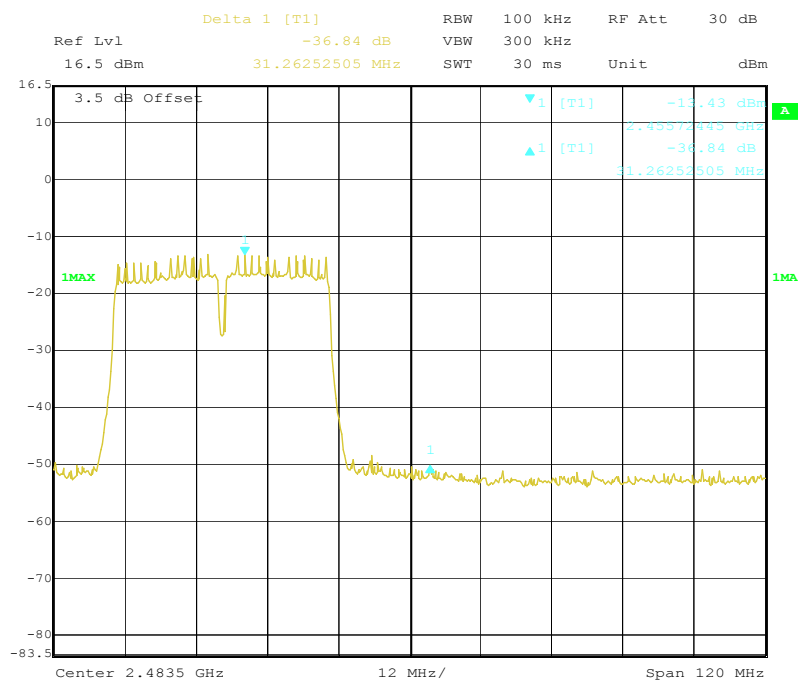802.11n-HT40: Band Edge, Left Side**802.11n-HT40: Band Edge, Right Side**

11. §15.247(E) - Power Spectral Density

11.1. Test Equipment

Please refer to Section 4 this report.

11.2. Test Procedure

1. Connect EUT test port to spectrum analyzer
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency and measure the conducted band edge spurious separately.

11.3. Applicable Standard



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



11.4. Test Result



PASS



Channel	Frequency (MHz)	Data Rate (Mbps)	Correct Power spectral density (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	-7.14	≤8	Pass
Middle	2437	1	-7.51	≤8	Pass
High	2462	1	-7.31	≤8	Pass
802.11g mode					
Low	2412	6	-18.34	≤8	Pass
Middle	2437	6	-17.66	≤8	Pass
High	2462	6	-17.83	≤8	Pass
802.11n-HT20 mode					
Low	2412	6.5	-18.43	≤8	Pass
Middle	2437	6.5	-18.89	≤8	Pass
High	2462	6.5	-18.91	≤8	Pass
802.11n-HT40 mode					
Low	2422	13.5	-27.44	≤8	Pass
Middle	2437	13.5	-26.34	≤8	Pass
High	2452	13.5	-27.88	≤8	Pass



Please refer to the following plots

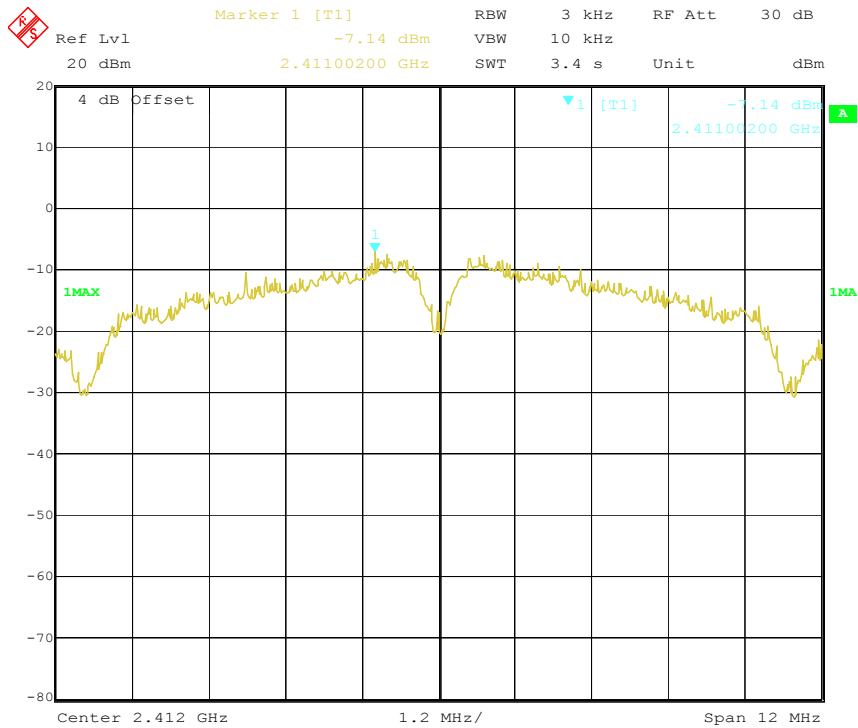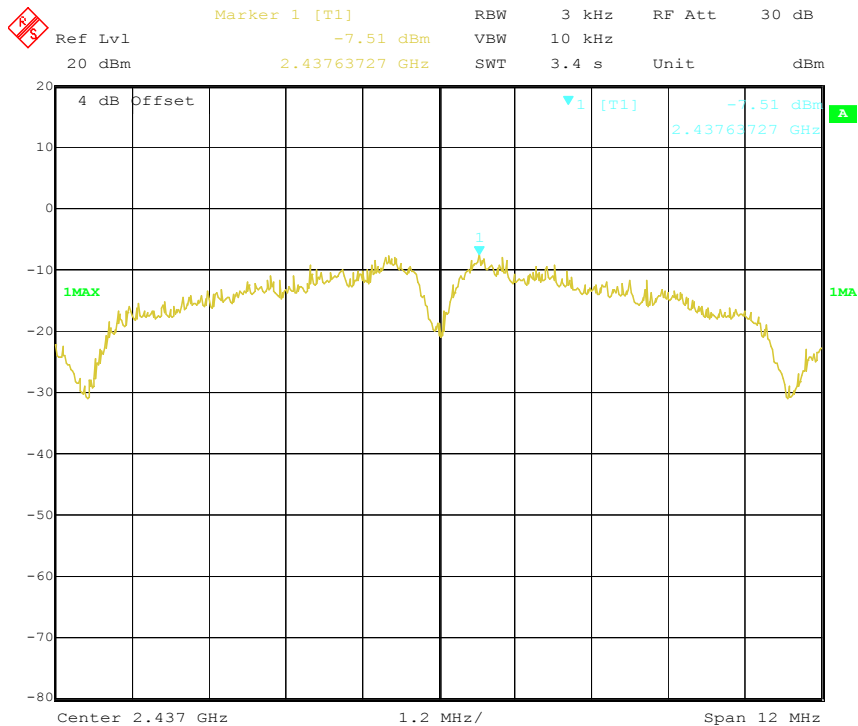
Power Spectral Density, 802.11b Low Channel**Power Spectral Density, 802.11b Middle Channel**

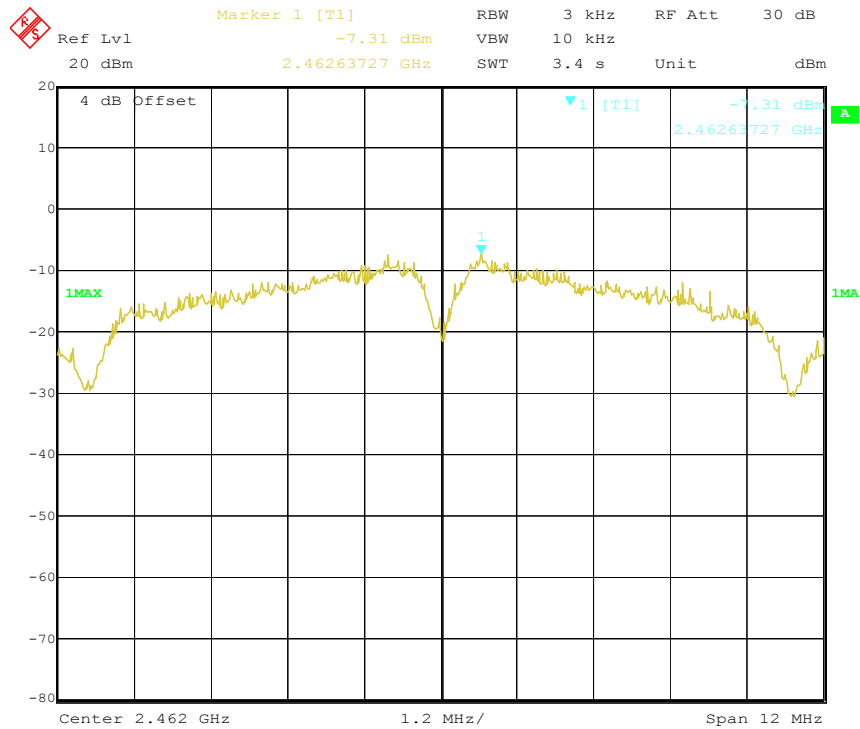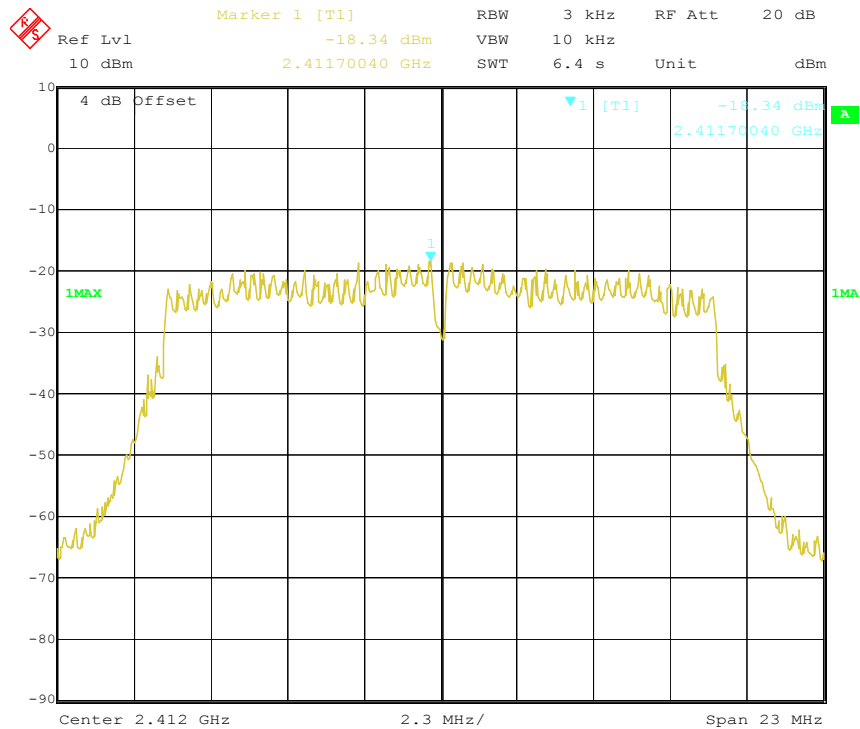Power Spectral Density, 802.11b High Channel**Power Spectral Density, 802.11g Low Channel**

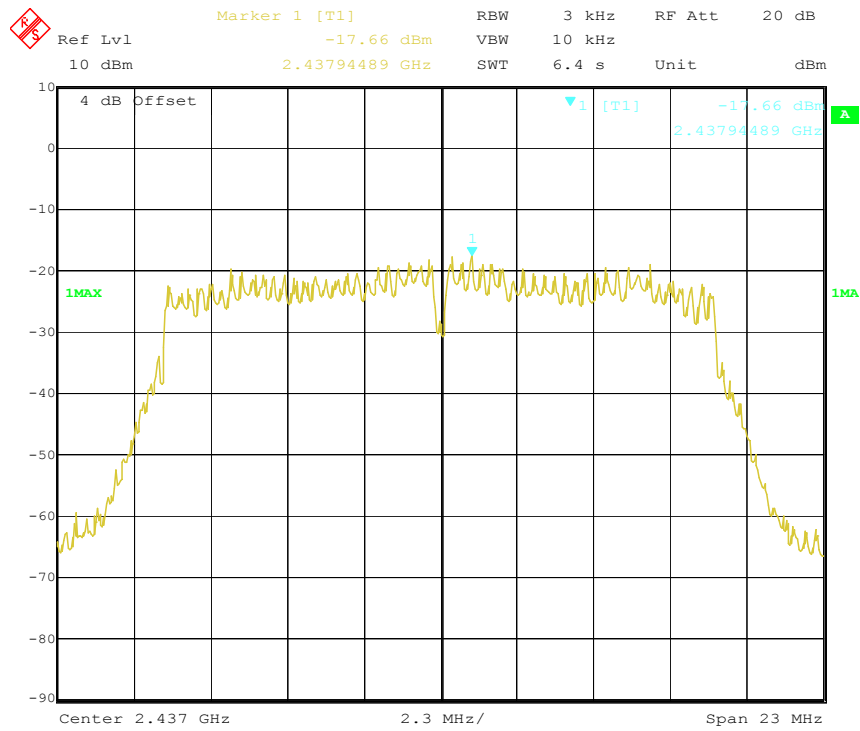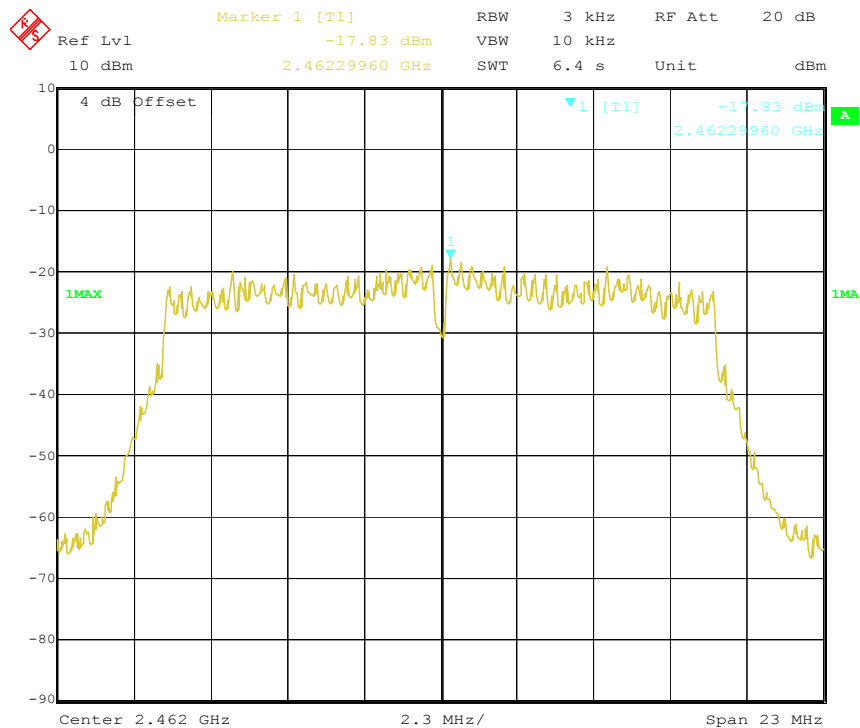Power Spectral Density, 802.11g Middle Channel**Power Spectral Density, 802.11g High Channel**

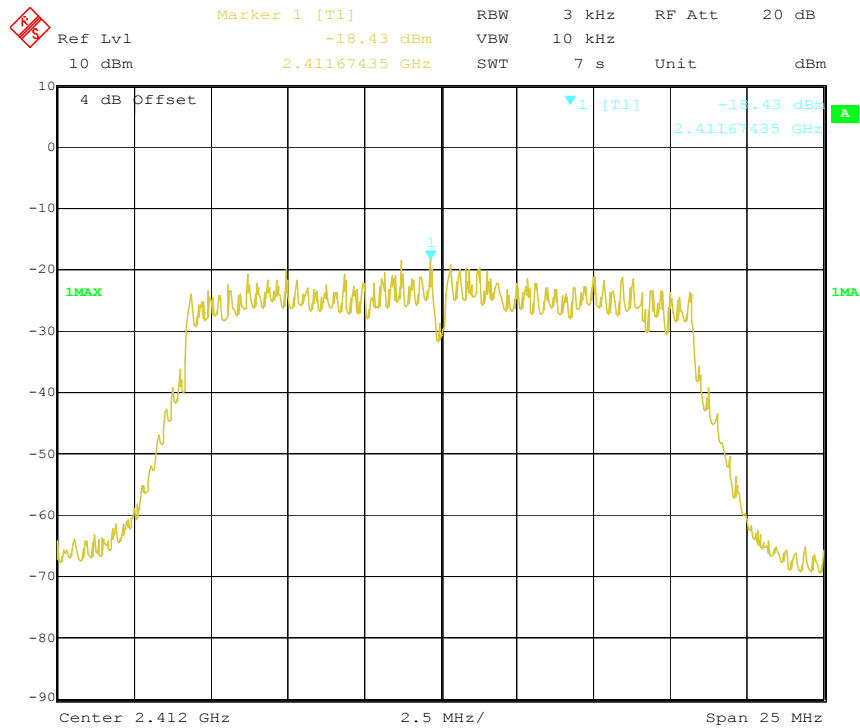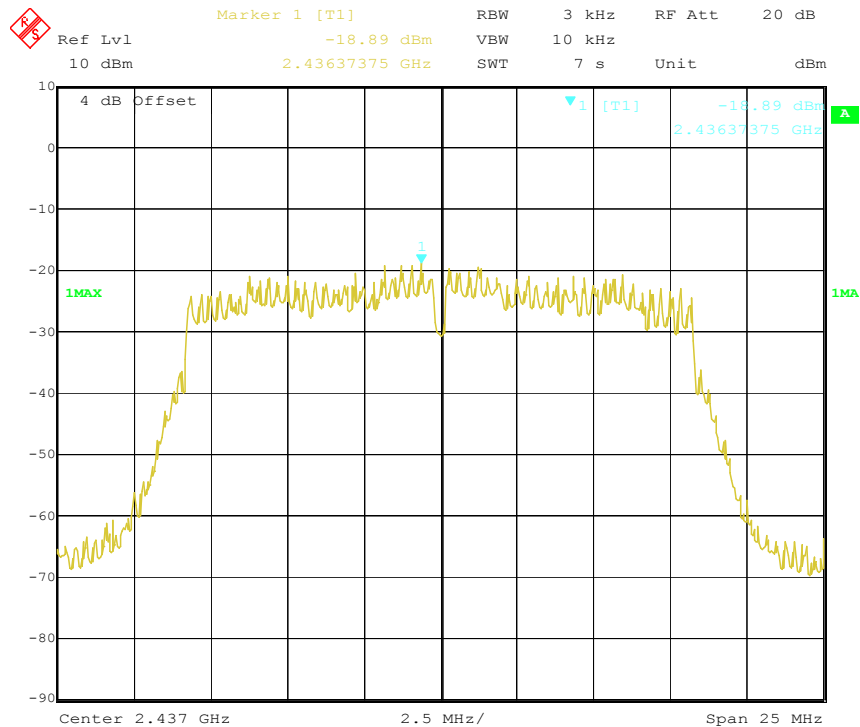Power Spectral Density, 802.11n-HT20 Low Channel**Power Spectral Density, 802.11n-HT20 Middle Channel**

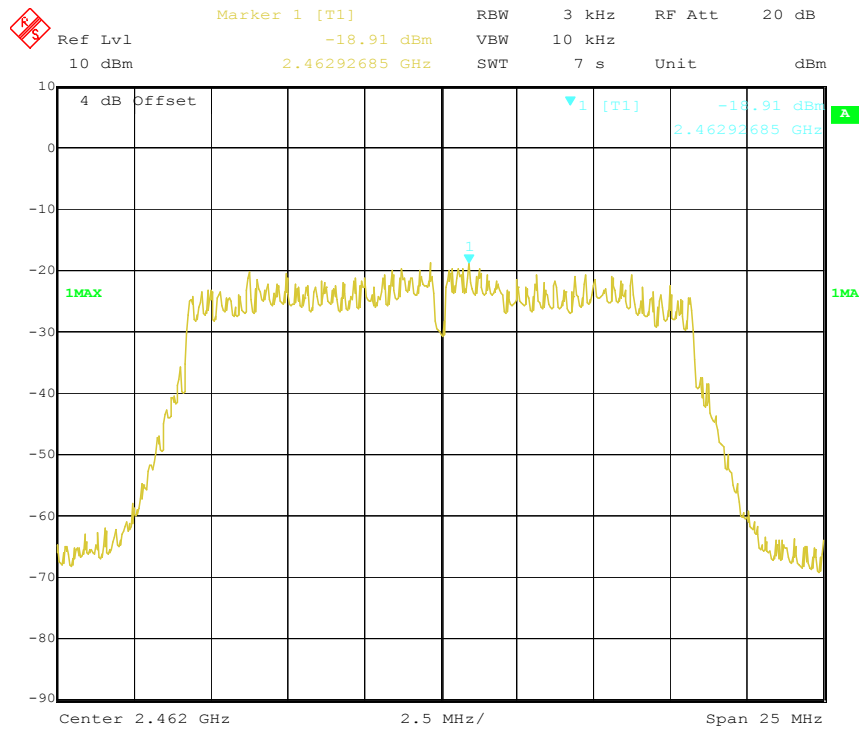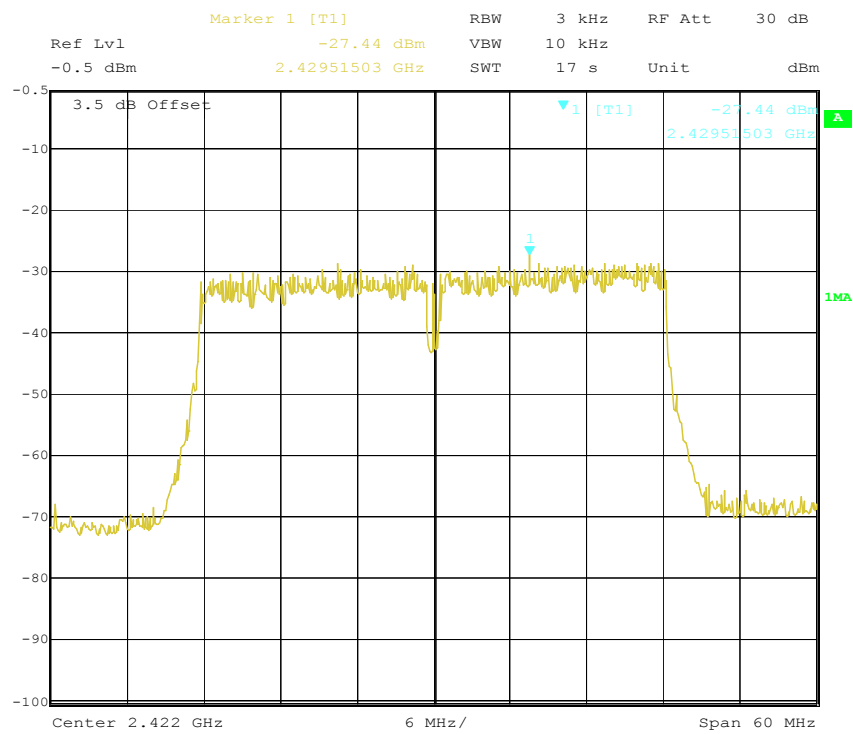Power Spectral Density, 802.11n-HT20 High Channel**Power Spectral Density, 802.11n-HT40 Low Channel**

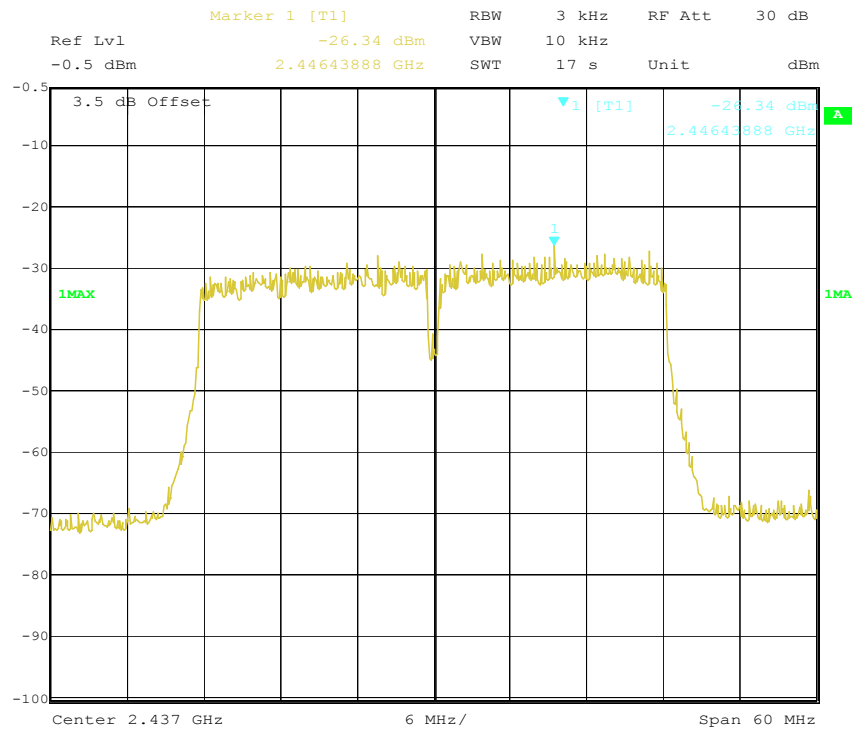Power Spectral Density, 802.11n-HT40 Middle Channel**Power Spectral Density, 802.11n-HT40 High Channel**