SAR TEST REPORT

No. I15N01419-SAR

For

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

Smartphone

Model Name: Coolpad 3622A

Marketing Name: Coolpad Catalyst

With

Hardware Version: P2

Software Version: 091.00.160130

FCC ID: R38YL3622A

Issued Date: 2016-2-25

Note:

The test results in this test report relate only to the devices specified in this report.This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com

©Copyright. All rights reserved by CTTL.

REPORT HISTORY

Report Number	Revision	Issue Date	Description
I15N01419-SAR	Rev.0	2016-2-25	Initial creation of test report

©Copyright. All rights reserved by CTTL.

TABLE OF CONTENT

1 TEST LABORATORY 5

1.1 TESTING LOCATION 5
1.2 TESTING ENVIRONMENT 5
1.3 PROJECT DATA 5
1.4 SIGNATURE 5

2 STATEMENT OF COMPLIANCE 6

3 CLIENT INFORMATION 8

3.1 APPLICANT INFORMATION 8
3.2 MANUFACTURER INFORMATION 8

4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 9

4.1 ABOUT EUT 9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 9

5 TEST METHODOLOGY 10

5.1 APPLICABLE LIMIT REGULATIONS 10
5.2 APPLICABLE MEASUREMENT STANDARDS 10

6 SPECIFIC ABSORPTION RATE (SAR) 11

6.1 INTRODUCTION 11
6.2 SAR DEFINITION 11

7 TISSUE SIMULATING LIQUIDS 12

7.1 TARGETS FOR TISSUE SIMULATING LIQUID 12
7.2 DIELECTRIC PERFORMANCE 12

8 SYSTEM VERIFICATION 18

8.1 SYSTEM SETUP 18
8.2 SYSTEM VERIFICATION 19
8.3 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATIONS 20

9 MEASUREMENT PROCEDURES 21

9.1 TESTS TO BE PERFORMED 21
9.2 GENERAL MEASUREMENT PROCEDURE 22
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR 23
9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR 24
9.5 SAR MEASUREMENT FOR LTE 24
9.6 POWER DRIFT 25

10 AREA SCAN BASED 1-G SAR 26

10.1 REQUIREMENT OF KDB 26
10.2 FAST SAR ALGORITHMS 26

©Copyright. All rights reserved by CTTL.

11 CONDUCTED OUTPUT POWER 27

11.1 MANUFACTURING TOLERANCE 27
11.2 GSM MEASUREMENT RESULT 31
11.3 WCDMA MEASUREMENT RESULT 32
11.4 LTE_FDD MEASUREMENT RESULT 34
11.5 WI-FI AND BT MEASUREMENT RESULT 42

12 SIMULTANEOUS TX SAR CONSIDERATIONS 43

12.1 INTRODUCTION 43
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES 43
12.3 SAR MEASUREMENT POSITIONS 43
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS 44

13 EVALUATION OF SIMULTANEOUS 45

14 SAR TEST RESULT 46

14.1 SAR RESULTS FOR FAST SAR 47
14.2 SAR RESULTS FOR STANDARD PROCEDURE 58
14.3 WLAN EVALUATION 62

15 SAR MEASUREMENT VARIABILITY 64

16 MEASUREMENT UNCERTAINTY 65

16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHZ~3GHZ) 65
16.2 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHZ~3GHZ) 66

17 MAIN TEST INSTRUMENTS 67

ANNEX A GRAPH RESULTS 68

ANNEX B SYSTEM VERIFICATION RESULTS 104

ANNEX C SAR MEASUREMENT SETUP 115

ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM 121

ANNEX E EQUIVALENT MEDIA RECIPES 124

ANNEX F SYSTEM VALIDATION 125

ANNEX G DAE CALIBRATION CERTIFICATE 126

ANNEX H PROBE CALIBRATION CERTIFICATE 129

ANNEX I DIPOLE CALIBRATION CERTIFICATE 140

©Copyright. All rights reserved by CTTL.

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shenzhen)
Address:	TCL International E City No.1001 Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong Province P.R.China

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data

Project Leader:	Cao Junfei
Test Engineer:	He Guanyi
Testing Start Date:	January 5, 2016
Testing End Date:	January 31, 2016

1.4 Signature

何冠仪

He Guanyi

(Prepared this test report)

曹俊飞

Cao Junfei

(Reviewed this test report)

张博钧

Zhang Bojun

Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by CTTL.

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd Smartphone Coolpad 3622A are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	**0.13**	PCE
	PCS 1900	**0.34**	
	UMTS FDD 5	**0.12**	
	UMTS FDD 2	**0.45**	
	UMTS FDD 4	**0.58**	
	LTE Band 2	**0.45**	
	LTE Band 4	**0.42**	
	LTE Band 12	**0.28**	
	WLAN 2.4 GHz	**0.83**	DTS
Hotspot off (Separation Distance 10mm)	GSM 850	**0.29**	PCE
	PCS 1900	**1.03**	
	UMTS FDD 5	**0.18**	
	UMTS FDD 2	**1.10**	
	UMTS FDD 4	**1.00**	
	LTE Band 2	**1.10**	
	LTE Band 4	**0.64**	
	LTE Band 12	**0.77**	
	WLAN 2.4 GHz	**0.29**	DTS
Hotspot on (Separation Distance 10mm)	GSM 850	**0.29**	PCE
	PCS 1900	**1.03**	
	UMTS FDD 5	**0.18**	
	UMTS FDD 2	**1.10**	
	UMTS FDD 4	**1.00**	
	LTE Band 2	**1.10**	
	LTE Band 4	**0.64**	
	LTE Band 12	**0.77**	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm for hotspot on and 10mm for hotspot off between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform

©Copyright. All rights reserved by CTTL.

power output.
The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.
The highest reported SAR value is obtained at the case of **(Table 2.1),** and the values are**: 1.10 W/kg (1g).**

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.58	0.83	**1.41**
Highest reported SAR value for Body	Rear	0.77	0.29	**1.06**
	Bottom	1.10	/	**1.10**

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.58	0.06	**0.64**
Highest reported SAR value for Body	Rear	0.77	0.03	**0.80**
	Bottom	1.10	/	**1.10**

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.41 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

©Copyright. All rights reserved by CTTL.

3 Client Information

3.1 Applicant Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C
Contact:	Li Amei
Email:	liamei@yulong.com
Telephone:	+86 13410415799
Fax:	/

3.2 Manufacturer Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C
Contact:	Li Amei
Email:	liamei@yulong.com
Telephone:	+86 13410415799
Fax:	/

©Copyright. All rights reserved by CTTL.

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Smartphone
Model Name:	Coolpad 3622A
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1700/1900, LTE_FDD Band 2/4/12, BT, Wi-Fi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1712.4–1752.6 MHz (WCDMA1700 Band IV)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	1860–1900 MHz (LTE_FDD Band II)
	1720–1745 MHz (LTE_FDD Band IV)
	704–711 MHz (LTE_FDD Band XII)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS&EGPRS Multislot Class:	12;
GPRS capability Class:	B
WCDMA Category:	HSDPA: 10
	HSUPA: 6
	DC-HSDPA: 24
Release Version:	GSM: Rel8
	GPRS: Rel8
	UMTS: R8
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	/
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	144mm × 71 mm

4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	IMEI: 008600250911822	P2	091.00.160130
EUT2	IMEI:869630020000893	P2	091.00.160130

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1 and conducted power with the EUT 2

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CPLD-390	/	ZHUHAI COSLIGHT BATTERY CO., LTD.

*AE ID: is used to identify the test sample in the lab internally.

©Copyright. All rights reserved by CTTL.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r02: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r04: SAR Evaluation Considerations for LTE Devices

KDB 941225 D06 Hot Spot SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters.

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

©Copyright. All rights reserved by CTTL.

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dv}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)
SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific head capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

©Copyright. All rights reserved by CTTL.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	± 5% Range	Permittivity (ε)	± 5% Range
750	Head	0.89	0.85～0.93	41.94	39.84～44.04
750	Body	0.96	0.91～1.01	55.5	52.73～58.28
835	Head	0.90	0.86～0.95	41.5	39.4～43.6
835	Body	0.97	0.92～1.02	55.2	52.4～58.0
1800	Head	1.4	1.33～1.47	40.00	38.0～42.0
1800	Body	1.52	1.40～1.60	53.50	50.8～56.2
1900	Head	1.40	1.33～1.47	40.0	38.0～42.0
1900	Body	1.52	1.44～1.60	53.3	50.6～56.0
2450	Head	1.80	1.71～1.89	39.2	37.2～41.2
2450	Body	1.95	1.85～2.05	52.7	50.1～55.3

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ε	Drift (%)	Conductivity σ (S/m)	Drift (%)
2016-1-6	Head	750 MHz	42.20	0.62	0.88	-1.12
2016-1-6	Body	750 MHz	56.68	2.13	0.94	-2.08
2016-1-5	Head	835 MHz	40.18	-3.18	0.92	2.22
2016-1-6	Body	835 MHz	53.49	-3.10	0.97	0.00
2016-1-6	Head	1800 MHz	38.36	-4.10	1.43	2.14
2016-1-7	Body	1800 MHz	51.02	-4.64	1.47	-3.29
2016-1-12	Head	1900 MHz	41.07	2.68	1.44	2.86
2016-1-31	Body	1900 MHz	50.79	-4.71	1.54	1.32
2016-1-31	Head	2450 MHz	37.71	-3.80	1.83	1.67
2016-1-31	Body	2450 MHz	50.22	-4.71	1.98	1.54

Note: The liquid temperature is 22.0 °C

©Copyright. All rights reserved by CTTL.

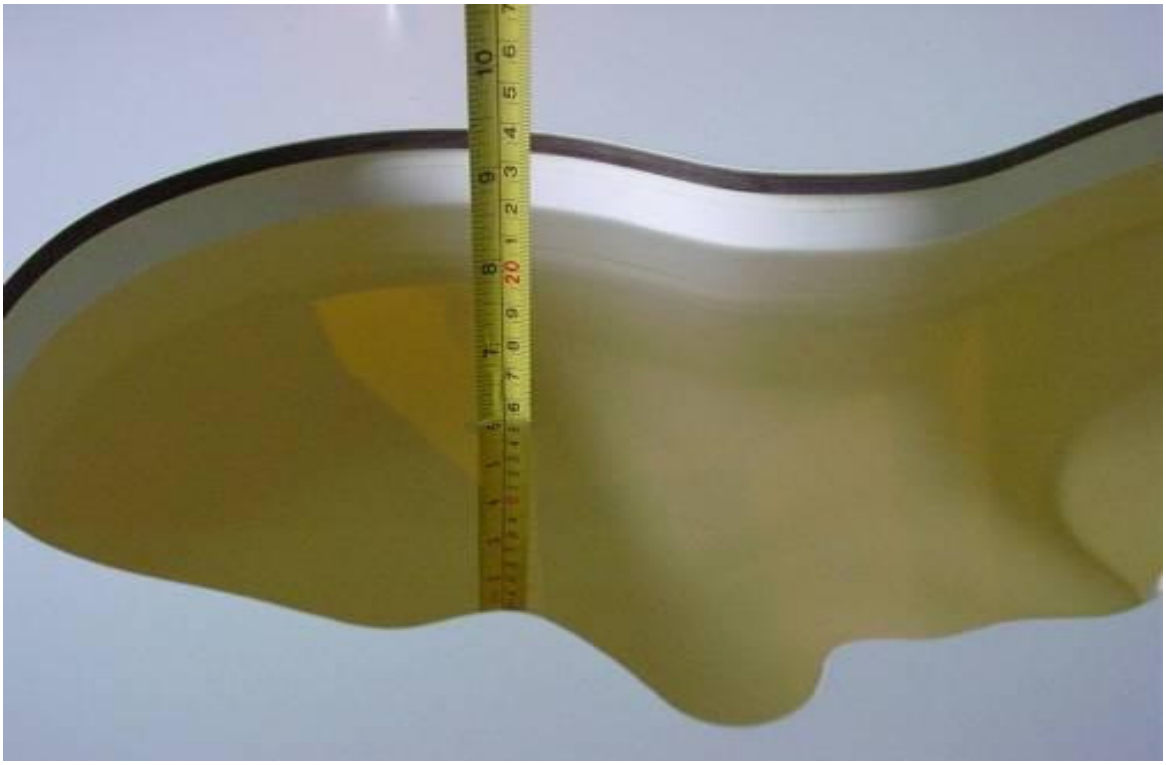

Picture 7-1: Liquid depth in the Head Phantom (750 MHz)

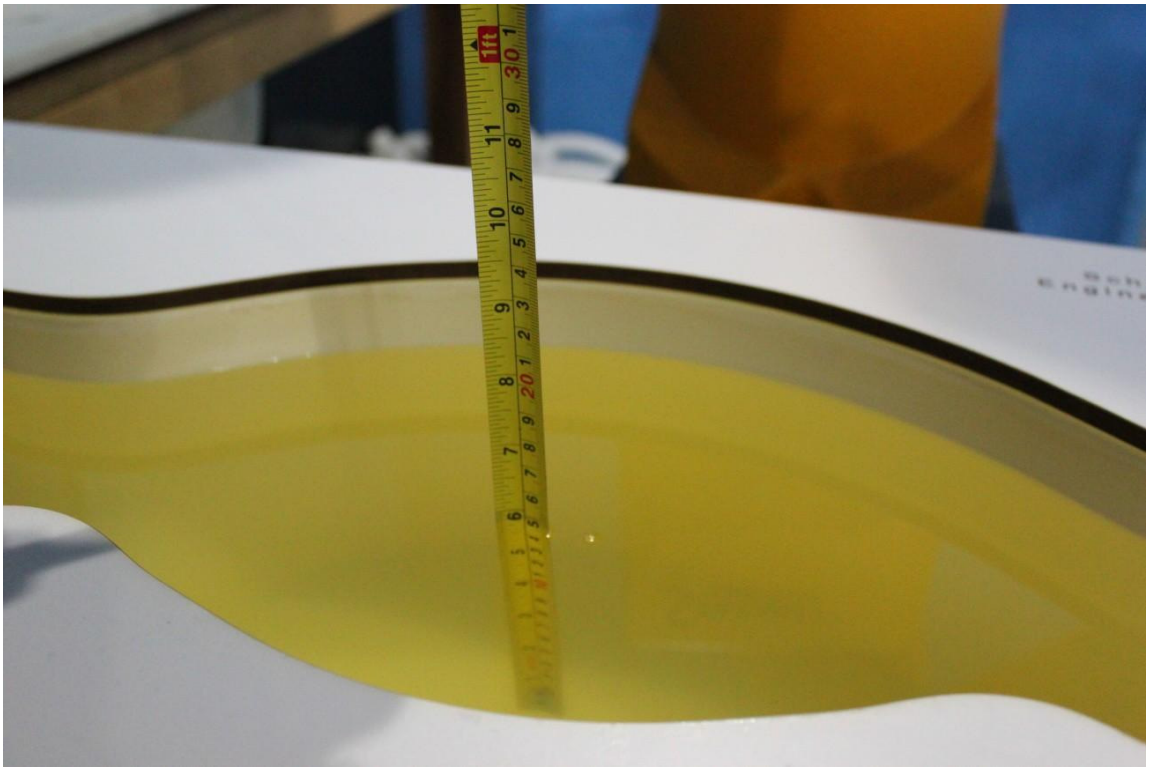

Picture 7-2: Liquid depth in the Flat Phantom (750 MHz)

©Copyright. All rights reserved by CTTL.

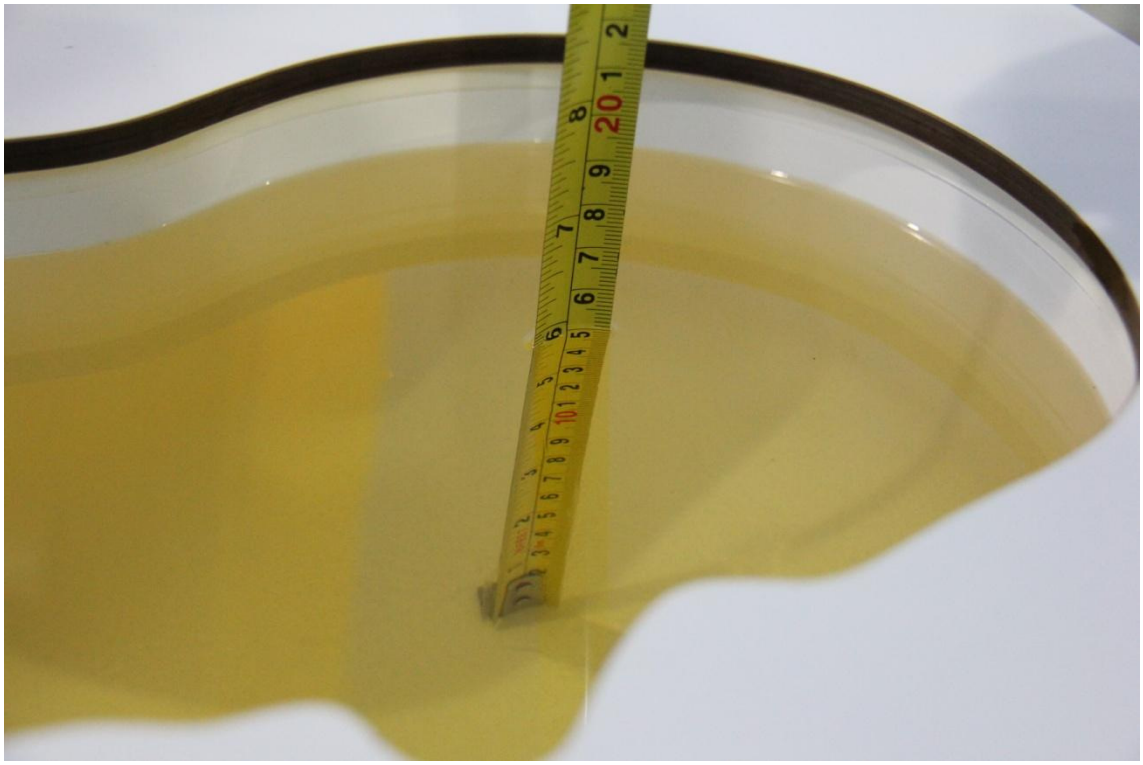

Picture 7-3: Liquid depth in the Head Phantom (835 MHz)

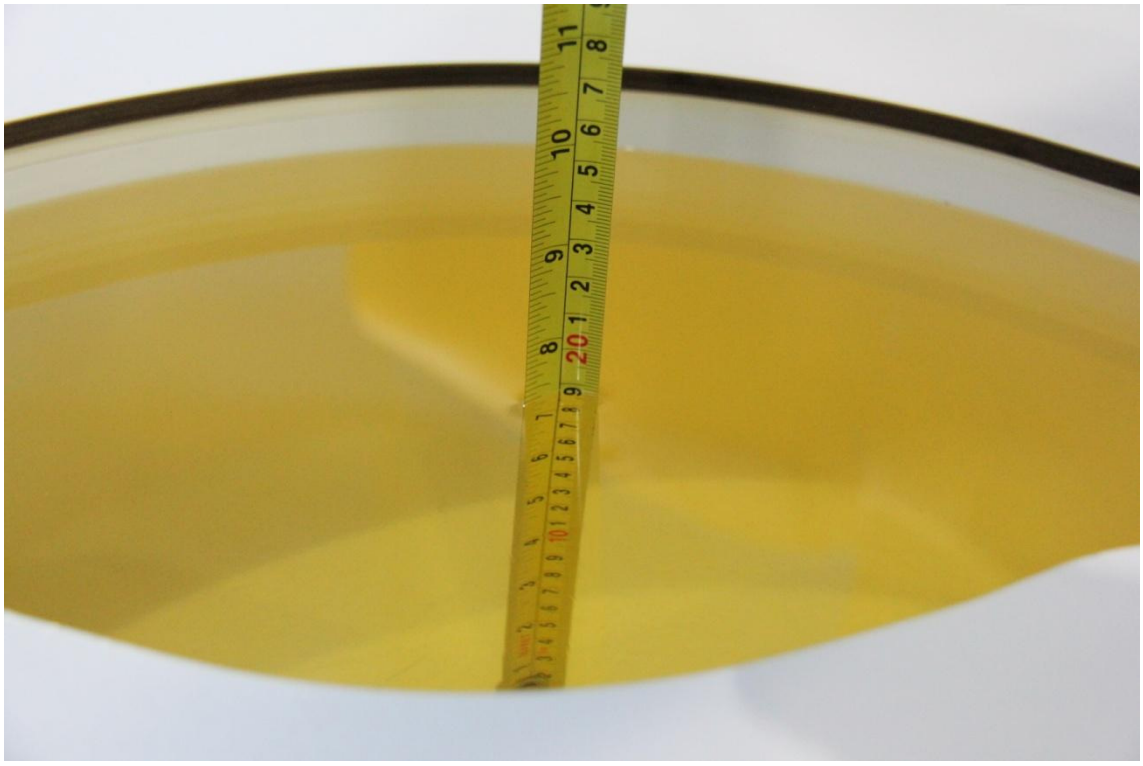

Picture 7-4: Liquid depth in the Flat Phantom (835 MHz)

©Copyright. All rights reserved by CTTL.

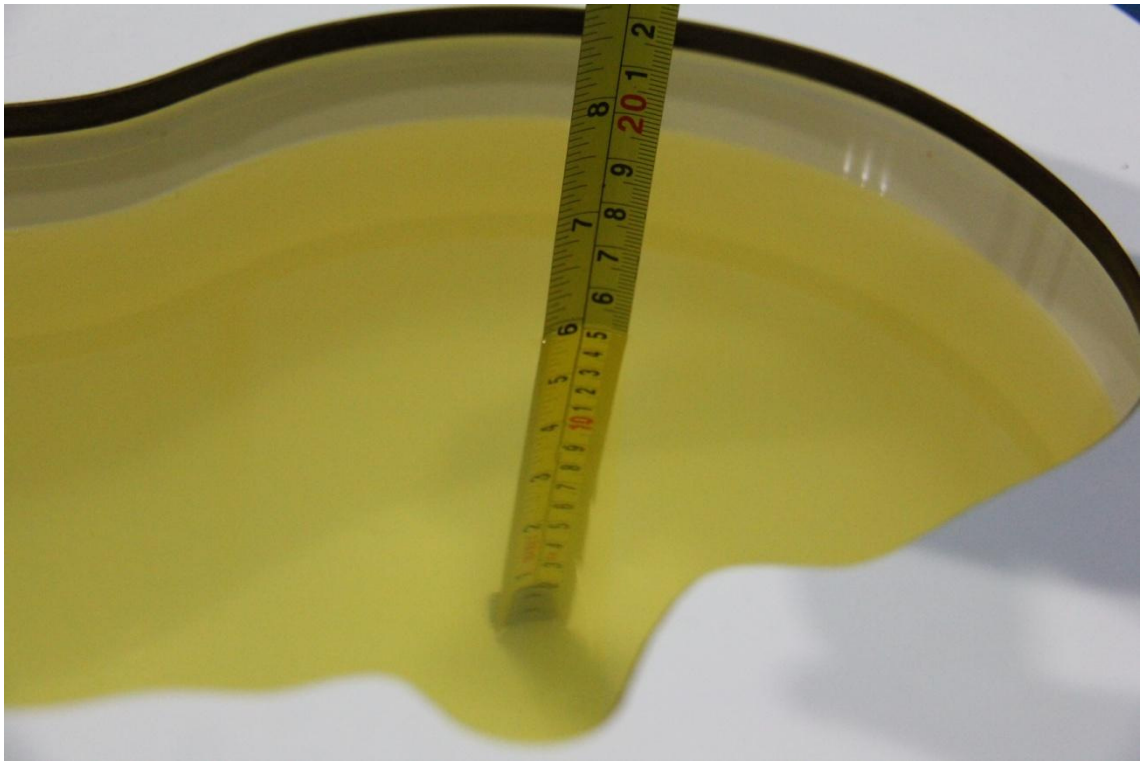

Picture 7-5: Liquid depth in the Head Phantom (1800 MHz)

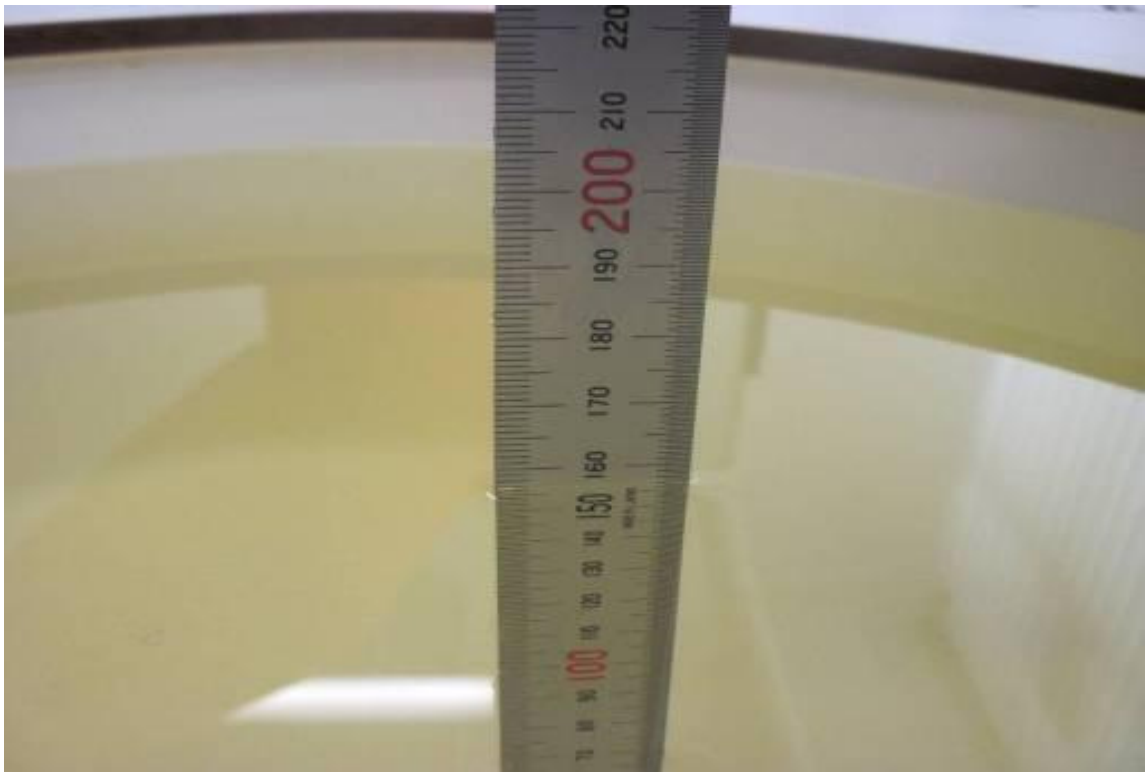

Picture 7-6: Liquid depth in the Flat Phantom (1800MHz)

©Copyright. All rights reserved by CTTL.

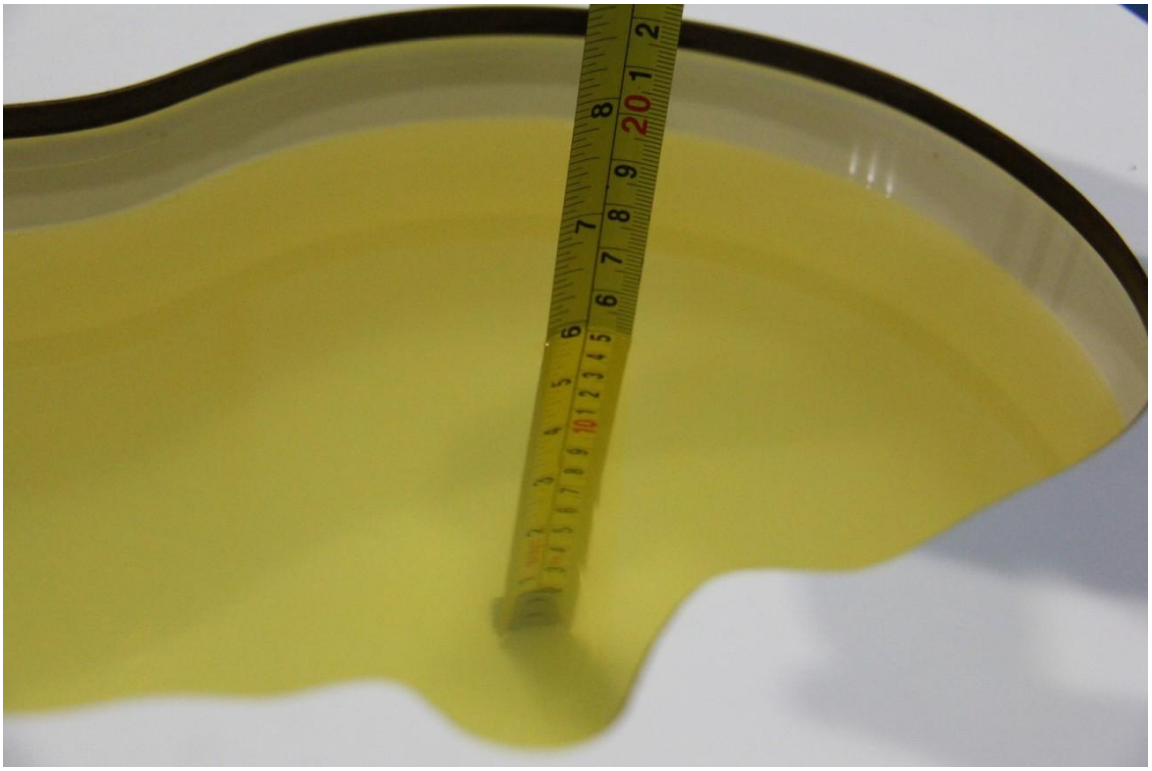

Picture 7-7: Liquid depth in the Head Phantom (1900 MHz)

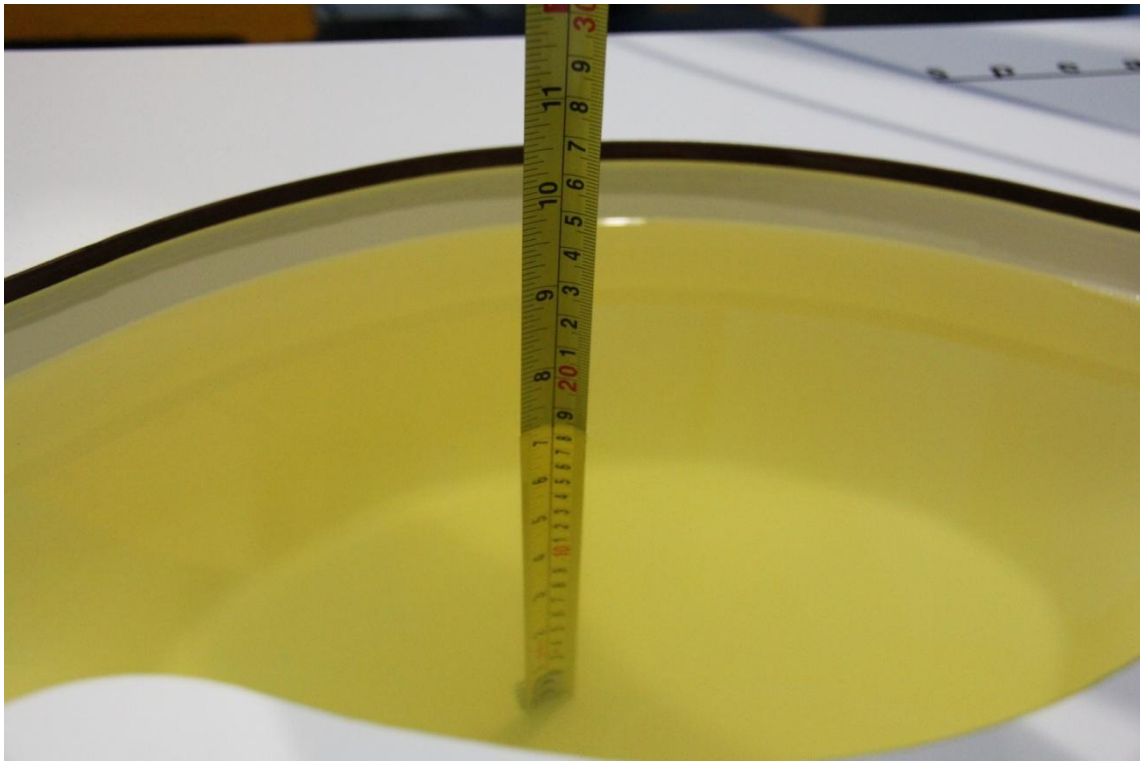

Picture 7-8: Liquid depth in the Flat Phantom (1900MHz)

©Copyright. All rights reserved by CTTL.

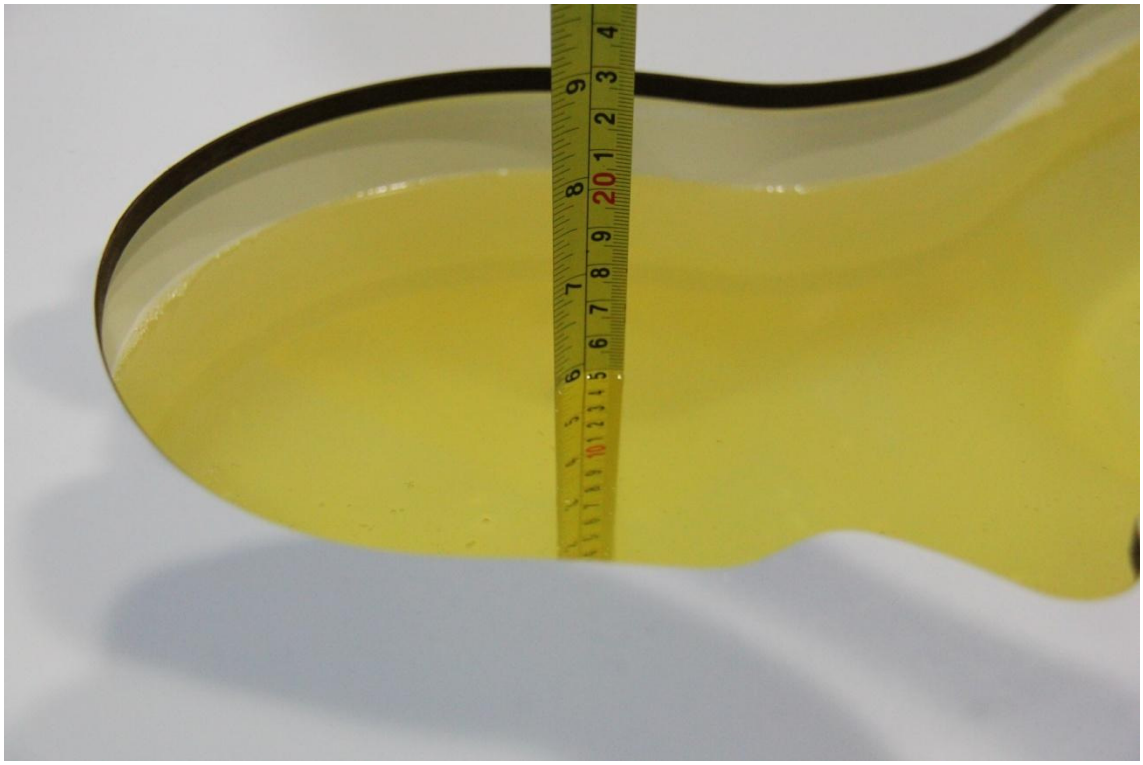

Picture 7-9: Liquid depth in the Head Phantom (2450MHz)

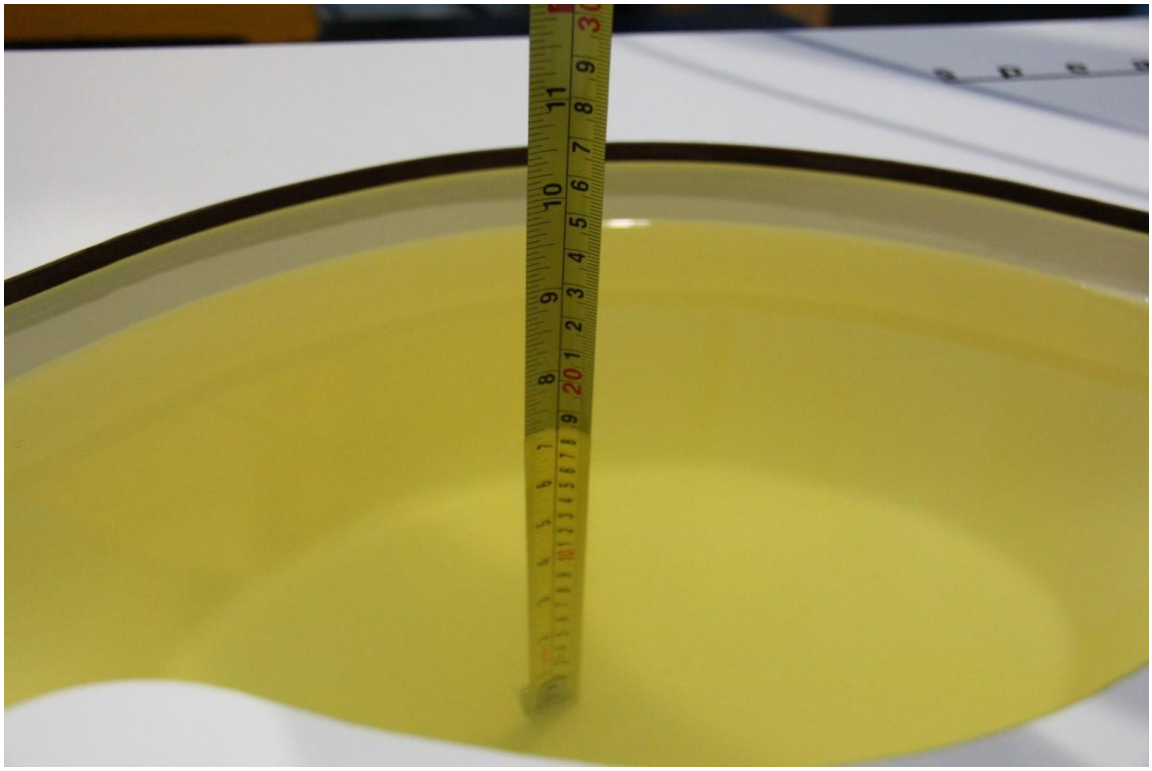

Picture 7-10: Liquid depth in the Head Phantom (2450MHz)

©Copyright. All rights reserved by CTTL.

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

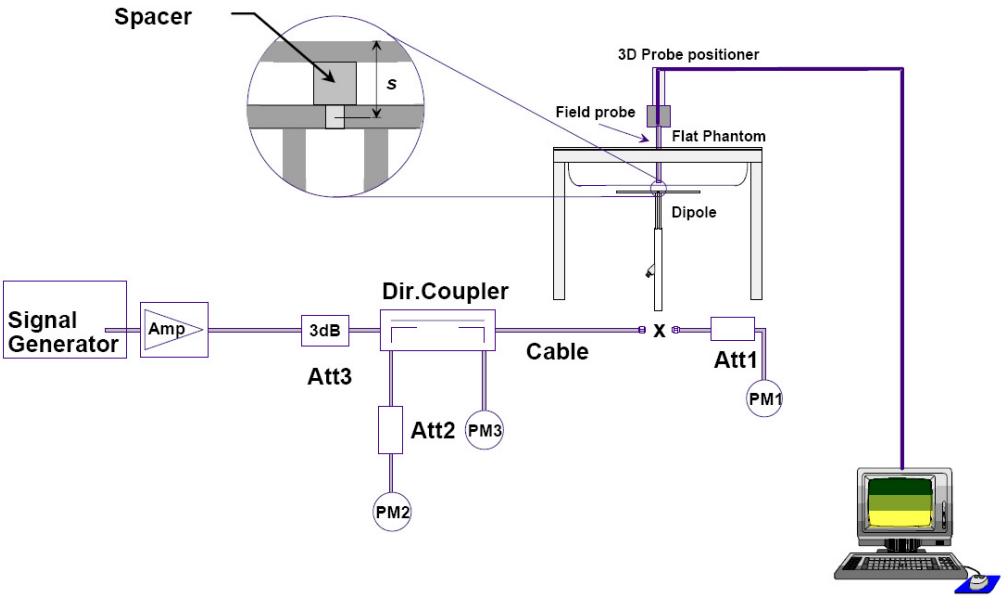

Picture 8.1 System Setup for System Evaluation

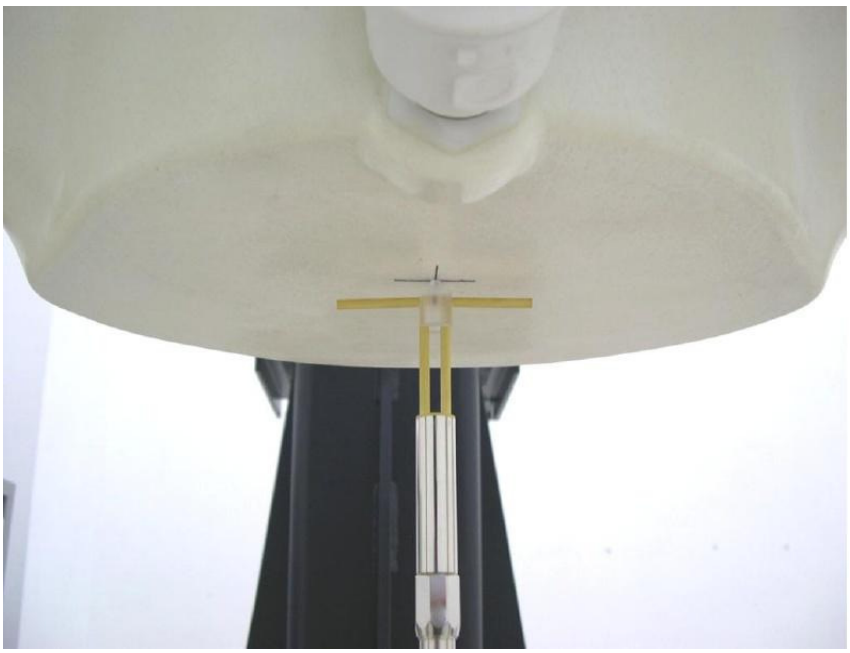

Picture 8.2 Photo of Dipole Setup

©Copyright. All rights reserved by CTTL.

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-1-6	750 MHz	5.49	8.31	5.52	8.48	0.55%	2.05%
2016-1-5	835 MHz	6.03	9.22	6.00	9.44	-0.50%	2.39%
2016-1-6	1800 MHz	20.6	38.8	20.20	39.08	-1.94%	0.72%
2016-1-12	1900 MHz	21.0	40.8	21.00	40.80	0.00%	0.00%
2016-1-31	2450 MHz	24.1	52.5	24.12	52.40	0.08%	-0.19%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-1-6	750 MHz	5.85	8.75	5.96	9.00	1.88%	2.86%
2016-1-6	835 MHz	6.20	9.44	6.36	9.68	2.58%	2.54%
2016-1-7	1800 MHz	21.1	39.6	21.08	39.68	-0.09%	0.20%
2016-1-31	1900 MHz	21.3	41.1	20.88	40.0	-1.97%	-2.68%
2016-1-31	2450 MHz	24.4	52.3	25.16	53.68	3.11%	2.64%

©Copyright. All rights reserved by CTTL.

8.3 Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 2 years ago but more than 1 year ago were confirmed in maintaining return loss (< - 20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole D750V3 SN: 1017				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/282014	-30.1	/	53.2	/
8/27/2015	-28.9	4.0	51.3	1.9
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/282014	-28.9	/	48.0	/
8/27/2015	-28.2	2.4	46.6	1.4

©Copyright. All rights reserved by CTTL.

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.

Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
b) all configurations for each device position in a), e.g., antenna extended and retracted, and
c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., N_c > 3), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

©Copyright. All rights reserved by CTTL.

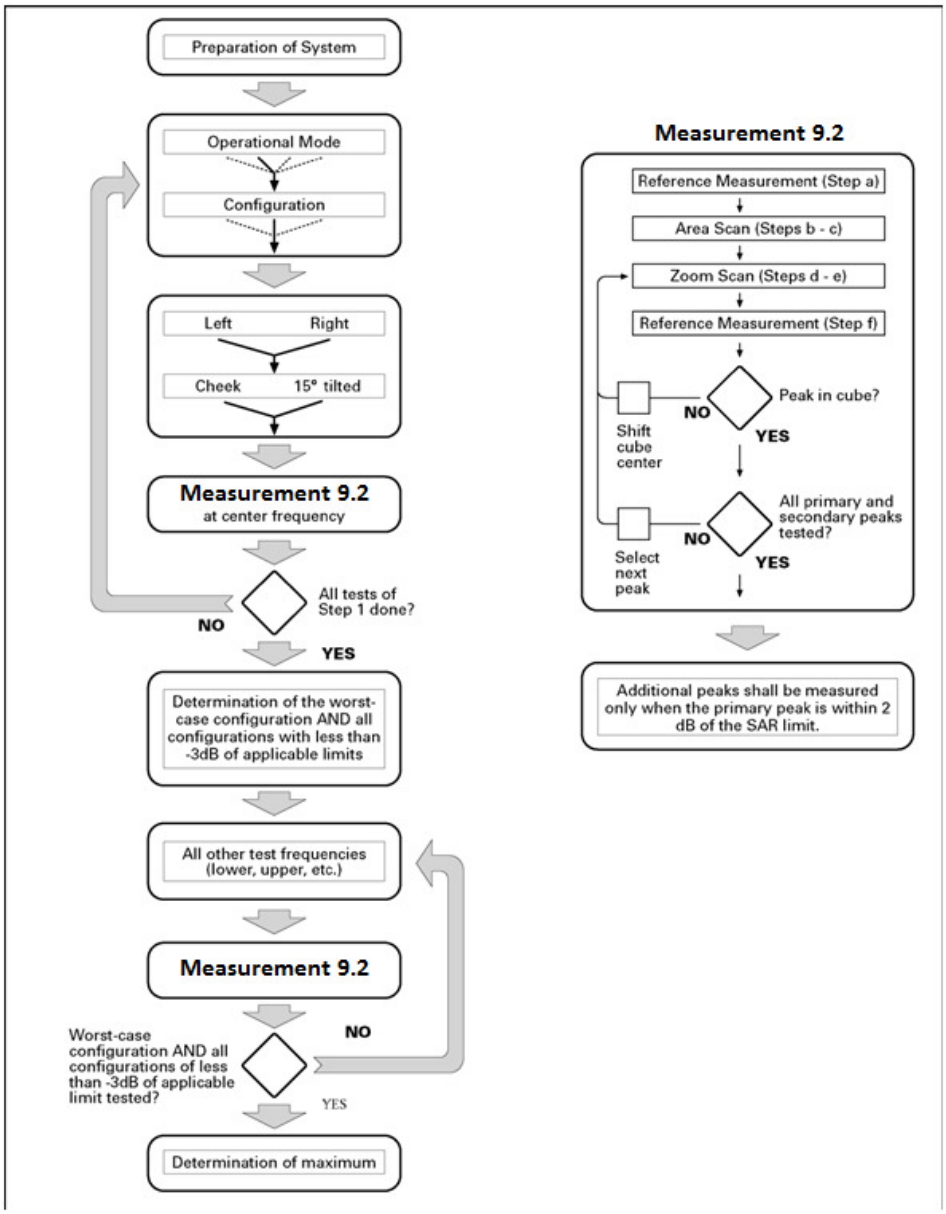

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results

©Copyright. All rights reserved by CTTL.

when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the area scan based *1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & $DPDCH_n$), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

©Copyright. All rights reserved by CTTL.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d （SF）	β_c/β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d （SF）	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} （SF）	β_{ed} （codes）	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.All powers were measured with the Anristu MT8820C.It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use

©Copyright. All rights reserved by CTTL.

conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation
   Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2) QPSK with 50% RB allocation
   The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.
3) QPSK with 100% RB allocation
   For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.25 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

©Copyright. All rights reserved by CTTL.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

©Copyright. All rights reserved by CTTL.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.5	32.5	32.5
Tolerance ±(dB)	1	1	1
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29	29	29
Tolerance ±(dB)	1	1	1

Table 11.2: GPRS & EGPRS & 8PSK

GSM 850 GPRS&EGPRS (GMSK)				
Channel		**251**	**190**	**128**
1 Txslot	Target (dBm)	32.5	32.5	32.5
	Tolerance ±(dB)	1	1	1
2 Txslots	Target (dBm)	31	31	31
	Tolerance ±(dB)	1	1	1
3Txslots	Target (dBm)	29	29	29
	Tolerance ±(dB)	1	1	1
4 Txslots	Target (dBm)	28	28	28
	Tolerance ±(dB)	1	1	1
GSM 1900 GPRS&EGPRS (GMSK)				
Channel		**810**	**661**	**512**
1 Txslot	Target (dBm)	29	29	29
	Tolerance ±(dB)	1	1	1
2 Txslots	Target (dBm)	28	28	28
	Tolerance ±(dB)	1	1	1
3Txslots	Target (dBm)	26	26	26
	Tolerance ±(dB)	1	1	1
4 Txslots	Target (dBm)	25	25	25
	Tolerance ±(dB)	1	1	1

©Copyright. All rights reserved by CTTL.

Table 11.3: WCDMA

UMTS Band V		Conducted Power (dBm)		
		Channel 4233	Channel 4183	Channel 4132
CS	Target (dBm)	23	23	23
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
UMTS Band IV		Conducted Power (dBm)		
		Channel 1513	Channel 1413	Channel 1312
CS	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	20	20	20
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSDPA sub-test 1-2	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSDPA sub-test 3-4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
UMTS Band II		Conducted Power (dBm)		
		Channel 9538	Channel 9400	Channel 9262
CS	Target (dBm)	22	22	22

©Copyright. All rights reserved by CTTL.

	Tolerance ±(dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSDPA sub-test 1-2	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1
HSDPA sub-test 3-4	Target (dBm)	21	21	21
	Tolerance ±(dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance ±(dB)	1	1	1

©Copyright. All rights reserved by CTTL.

Table 11.4: LTE

LTE Band 2			
Channel	Channel 19100	Channel 18900	Channel 18700
Target (dBm)	23	23	23
Tolerance ±(dB)	1	1	1
LTE Band 4			
Channel	Channel 20300	Channel 20175	Channel 20050
Target (dBm)	23	23	23
Tolerance ±(dB)	1	1	1
LTE Band 17			
Channel	Channel 23800	Channel 23790	Channel 23780
Target (dBm)	23.5	23.5	23.5
Tolerance ±(dB)	1	1	1

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Table 11.5: Bluetooth

Mode		Channel 1	Channel39	Channel 78
GFSK	Target (dBm)	0.5	0.5	0.5
	Tolerance±(dB)	1	1	1

Table 11.6: WiFi

Mode	Channel/Data rate	Target (dBm)	Tolerance ±(dB)
802.11 b (2.4GHz)	1Mbps	17	1
	2Mbps	17	1
	5.5Mbps	17	1
	11Mbps	17	1
802.11 g (2.4GHz)	6-18Mbps	17	1
	24-36Mbps	17	1
	48-54Mbps	17	1
802.11 n (2.4GHz HT20)	MCS0-7	17	1

©Copyright. All rights reserved by CTTL.

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.7: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.76	32.97	32.78
GSM 1900MHz	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.82	29.67	29.66

Table 11.8: The conducted power measurement results for GPRS and EGPRS

GSM 850		Measured Power (dBm)			calculation	Average Power (dBm)		
		251	**190**	**128**		**251**	**190**	**128**
GPRS	1Txslots	32.76	32.97	32.78	-9.03dB	23.73	23.94	23.75
	2Txslots	30.51	30.70	30.69	-6.02dB	24.49	24.68	24.67
	3Txslots	28.96	29.06	28.96	-4.26dB	24.70	24.80	24.70
	4Txslots	27.80	28.05	27.84	-3.01dB	**24.79**	**25.04**	**24.83**
EGPRS (GMSK)	1Txslots	32.73	32.95	32.77	-9.03dB	23.70	23.92	23.74
	2Txslots	30.51	30.68	30.67	-6.02dB	24.49	24.66	24.65
	3Txslots	28.94	29.05	28.95	-4.26dB	24.68	24.79	24.69
	4Txslots	27.80	28.03	27.83	-3.01dB	**24.79**	**25.02**	**24.82**
GSM 1900		Measured Power (dBm)			calculation	Average Power (dBm)		
		810	**661**	**512**		**810**	**661**	**512**
GPRS	1Txslots	29.82	29.67	29.66	-9.03dB	20.79	20.64	20.63
	2Txslots	27.86	27.86	27.90	-6.02dB	21.84	21.84	21.88
	3Txslots	26.65	26.58	26.70	-4.26dB	22.39	22.32	22.44
	4Txslots	25.42	25.41	25.52	-3.01dB	**22.41**	**22.40**	**22.51**
EGPRS (GMSK)	1Txslots	29.81	29.66	29.64	-9.03dB	20.78	20.63	20.61
	2Txslots	27.83	27.85	27.90	-6.02dB	21.81	21.83	21.88
	3Txslots	26.64	26.56	26.70	-4.26dB	22.38	22.30	22.44
	4Txslots	25.41	25.41	25.51	-3.01dB	**22.40**	**22.40**	**22.50**

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM 850 and GSM 1900.

©Copyright. All rights reserved by CTTL.

11.3 WCDMA Measurement result

Table 11.9: The conducted Power for WCDMA850/1700/1900

Item	band	FDD V result		
	ARFCN	4233 (846.6MHz)	4182(836.4MHz)	4133 (826.4MHz)
WCDMA	\	23.5	23.5	23.5
HSUPA	1	22.4	21.9	22.5
	2	21.5	21.5	21.6
	3	21.5	21.6	21.7
	4	21.8	21.9	21.9
	5	22.5	22.5	22.6
HSDPA	1	22.4	22.6	22.5
	2	22.5	22.4	22.5
	3	22.1	22	22.1
	4	22.1	22	22.1
DC-HSDPA	1	22.69	22.51	22.63
	2	22.65	22.62	22.61
	3	22.61	22.61	22.55
	4	22.68	22.57	22.57
Item	band	FDD IV result		
	ARFCN	1513 (1752.6MHz)	1413(1732.6MHz)	1312 (1712.4MHz)
WCDMA	\	22.2	22.1	22.2
HSUPA	1	20.7	20.5	21.4
	2	20.3	20.1	20
	3	20.1	19.9	19.7
	4	20.2	20.7	20.8
	5	21.4	21.2	21.3
HSDPA	1	21.3	21.1	21.2
	2	21.4	21.2	21.4
	3	20.9	20.6	20.9
	4	20.9	20.6	20.8
DC-HSDPA	1	21.76	21.66	21.63
	2	21.72	21.64	21.65
	3	21.7	21.61	21.61
	4	21.75	21.67	21.58
Item	band	FDD II result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	22.3	22.2	22.4
HSUPA	1	21.3	20.8	21.5
	2	20.3	20.2	20.4
	3	20	20	20.1
	4	20.2	20.9	20.9
	5	21.3	21.4	21.5

©Copyright. All rights reserved by CTTL.

HSDPA	**1**	21.3	21.3	21.5
	2	21.3	21.4	21.5
	3	20.8	20.9	21
	4	20.8	20.8	21.1
DC-HSDPA	**1**	22.14	22.01	21.96
	2	22.1	22.07	21.92
	3	22.09	22.05	21.95
	4	22.12	22.08	21.97

©Copyright. All rights reserved by CTTL.

11.4 LTE_FDD Measurement result

Table 11.10: The conducted Power for LTE-FDD

LTE-FDD Band 2				Actual output Power (dBm)		
Band-width	**RBallocation**	**RBoffset**	**Modulation**	**High**	**Middle**	**Low**
1.4 MHz				**1909.3MHz**	**1880MHz**	**1850.7MHz**
	1RB	**High**	**QPSK**	23.22	23.22	23.26
			16QAM	22.27	22.31	22.30
		Middle	**QPSK**	23.20	23.23	23.28
			16QAM	22.23	22.24	22.28
		Low	**QPSK**	23.23	23.24	23.27
			16QAM	22.28	22.31	22.34
	3RB	**High**	**QPSK**	23.18	23.19	23.21
			16QAM	22.13	22.28	22.17
		Middle	**QPSK**	23.18	23.20	23.23
			16QAM	22.13	22.31	22.19
		Low	**QPSK**	23.20	23.20	23.22
			16QAM	22.21	22.20	22.24
	6RB	/	**QPSK**	22.04	22.06	22.08
			16QAM	21.16	21.17	21.16
3 MHz				**1908.5MHz**	**1880MHz**	**1851.5MHz**
	1RB	**High**	**QPSK**	23.18	23.18	23.21
			16QAM	22.30	22.29	22.31
		Middle	**QPSK**	23.20	23.25	23.26
			16QAM	22.29	22.30	22.30
		Low	**QPSK**	23.20	23.21	23.26
			16QAM	22.29	22.31	22.34
	8RB	**High**	**QPSK**	22.19	22.18	22.16
			16QAM	21.23	21.23	21.24
		Middle	**QPSK**	22.15	22.24	22.22
			16QAM	21.27	21.25	21.24
		Low	**QPSK**	22.19	22.21	22.23
			16QAM	21.30	21.29	21.30
	15RB	/	**QPSK**	22.09	22.11	22.13
			16QAM	21.16	21.17	21.16

©Copyright. All rights reserved by CTTL.

				1907.5MHz	1880MHz	1852.5MHz
5 MHz	1RB	**High**	**QPSK**	23.23	23.22	23.24
			16QAM	22.28	22.31	22.31
		Middle	**QPSK**	23.20	23.20	23.24
			16QAM	22.29	22.29	22.31
		Low	**QPSK**	23.24	23.22	23.27
			16QAM	22.31	22.31	22.34
	12RB	**High**	**QPSK**	22.14	22.18	22.21
			16QAM	21.25	21.24	21.27
		Middle	**QPSK**	22.19	22.18	22.17
			16QAM	21.32	21.23	21.32
		Low	**QPSK**	22.18	22.20	22.22
			16QAM	21.26	21.25	21.29
	25RB		**QPSK**	22.11	22.13	22.15
			16QAM	21.16	21.15	21.19
10 MHz				**1905MHz**	**1880MHz**	**1855MHz**
	1RB	**High**	**QPSK**	23.23	23.22	23.24
			16QAM	22.31	22.30	22.31
		Middle	**QPSK**	23.24	23.20	23.25
			16QAM	22.28	22.27	22.27
		Low	**QPSK**	23.23	23.23	23.27
			16QAM	22.30	22.30	22.33
	25RB	**High**	**QPSK**	22.18	22.20	22.22
			16QAM	21.28	21.33	21.30
		Middle	**QPSK**	22.18	22.19	22.21
			16QAM	21.28	21.34	21.34
		Low	**QPSK**	22.18	22.20	22.22
			16QAM	21.26	21.26	21.30
	50RB	/	**QPSK**	22.09	22.11	22.13
			16QAM	21.17	21.20	21.22

©Copyright. All rights reserved by CTTL.

				1902.5MHz	1880MHz	1857.5MHz
15 MHz	1RB	High	QPSK	23.21	23.22	23.24
			16QAM	22.30	22.27	22.30
		Middle	QPSK	23.21	23.23	23.24
			16QAM	22.32	22.26	22.29
		Low	QPSK	23.22	23.24	23.28
			16QAM	22.29	22.30	22.34
	36RB	High	QPSK	22.19	22.20	22.22
			16QAM	21.25	21.33	21.30
		Middle	QPSK	22.21	22.20	22.25
			16QAM	21.28	21.24	21.24
		Low	QPSK	22.18	22.20	22.23
			16QAM	21.25	21.29	21.27
	75RB	/	QPSK	22.13	22.14	22.16
			16QAM	21.16	21.17	21.22
20 MHz				1900MHz	1880MHz	1860MHz
	1RB	High	QPSK	23.24	23.25	23.28
			16QAM	22.29	22.28	22.31
		Middle	QPSK	23.24	23.26	23.29
			16QAM	22.32	22.29	22.33
		Low	QPSK	23.25	23.28	23.30
			16QAM	22.31	22.32	22.36
	50RB	High	QPSK	22.18	22.20	22.22
			16QAM	21.26	21.25	21.27
		Middle	QPSK	22.18	22.20	22.19
			16QAM	21.25	21.27	21.30
		Low	QPSK	22.20	22.22	22.23
			16QAM	21.28	21.27	21.30
	100RB	/	QPSK	22.14	22.15	22.18
			16QAM	21.18	21.19	21.22

©Copyright. All rights reserved by CTTL.

LTE-FDD Band 4				Actual output Power (dBm)		
Band-width	**RBallocation**	**RBoffset**	**Modulation**	**High**	**Middle**	**Low**
1.4 MHz				**1754.3MHz**	**1732.5MHz**	**1710.7MHz**
	1RB	**High**	**QPSK**	23.87	23.86	23.85
			16QAM	22.95	22.92	22.94
		Middle	**QPSK**	23.87	23.85	23.81
			16QAM	22.98	22.96	22.97
		Low	**QPSK**	23.85	23.82	23.83
			16QAM	22.98	22.94	22.94
	3RB	**High**	**QPSK**	23.85	23.84	23.83
			16QAM	22.78	22.81	22.77
		Middle	**QPSK**	23.85	23.83	23.85
			16QAM	22.76	22.78	22.79
		Low	**QPSK**	23.88	23.84	23.87
			16QAM	22.85	22.76	22.86
	6RB	/	**QPSK**	22.70	22.68	22.67
			16QAM	21.77	21.71	21.72
3 MHz				**1753.5MHz**	**1732.5MHz**	**1711.5MHz**
	1RB	**High**	**QPSK**	23.84	23.83	23.84
			16QAM	22.99	22.96	22.93
		Middle	**QPSK**	23.88	23.84	23.83
			16QAM	22.97	22.96	22.95
		Low	**QPSK**	23.81	23.82	23.83
			16QAM	22.96	22.97	22.96
	8RB	**High**	**QPSK**	22.75	22.76	22.77
			16QAM	21.76	21.74	21.74
		Middle	**QPSK**	22.75	22.73	22.70
			16QAM	21.69	21.68	21.68
		Low	**QPSK**	22.71	22.79	22.76
			16QAM	21.77	21.76	21.74
	15RB	/	**QPSK**	22.73	22.73	22.66
			16QAM	21.78	21.78	21.75

©Copyright. All rights reserved by CTTL.

				1752.5MHz	1732.5MHz	1712.5MHz
5 MHz	1RB	**High**	**QPSK**	23.89	23.82	23.85
			16QAM	22.99	22.94	22.95
		Middle	**QPSK**	23.86	23.84	23.83
			16QAM	22.98	22.99	22.96
		Low	**QPSK**	23.86	23.87	23.83
			16QAM	22.96	22.95	22.98
	12RB	**High**	**QPSK**	22.75	22.74	22.76
			16QAM	21.70	21.72	21.73
		Middle	**QPSK**	22.73	22.70	22.75
			16QAM	21.73	21.71	21.69
		Low	**QPSK**	22.71	22.75	22.73
			16QAM	21.79	21.78	21.68
	25RB	/	**QPSK**	22.69	22.68	22.66
			16QAM	21.71	21.73	21.72
10 MHz				**1750MHz**	**1732.5MHz**	**1715MHz**
	1RB	**High**	**QPSK**	23.85	23.83	23.84
			16QAM	22.96	22.90	22.93
		Middle	**QPSK**	23.88	23.87	23.83
			16QAM	22.95	22.92	22.94
		Low	**QPSK**	23.89	23.86	23.85
			16QAM	22.98	22.96	22.97
	25RB	**High**	**QPSK**	22.76	22.75	22.74
			16QAM	21.74	21.71	21.72
		Middle	**QPSK**	22.76	22.75	22.74
			16QAM	21.74	21.78	21.74
		Low	**QPSK**	22.75	22.74	22.74
			16QAM	21.78	21.79	21.74
	50RB	/	**QPSK**	22.74	22.72	22.71
			16QAM	21.78	21.75	21.74

©Copyright. All rights reserved by CTTL.

				1747.5MHz	1732.5MHz	1717.5MHz
15 MHz	1RB	High	QPSK	23.83	23.89	23.87
			16QAM	22.97	22.96	22.96
		Middle	QPSK	23.85	23.86	23.86
			16QAM	22.99	22.94	22.93
		Low	QPSK	23.87	23.82	23.85
			16QAM	22.97	22.95	22.94
	36RB	High	QPSK	22.75	22.77	22.74
			16QAM	21.74	21.71	21.71
		Middle	QPSK	22.75	22.76	22.75
			16QAM	21.78	21.74	21.71
		Low	QPSK	22.75	22.79	22.77
			16QAM	21.69	21.68	21.74
	75RB	/	QPSK	22.69	22.68	22.66
			16QAM	21.77	21.76	21.73
20 MHz				1745MHz	1732.5MHz	1720MHz
	1RB	High	QPSK	23.95	23.91	23.92
			16QAM	22.98	22.96	22.93
		Middle	QPSK	23.89	23.92	23.83
			16QAM	22.95	22.92	22.92
		Low	QPSK	23.91	23.90	23.88
			16QAM	22.97	22.96	22.96
	50RB	High	QPSK	22.79	22.77	22.76
			16QAM	21.74	21.72	21.74
		Middle	QPSK	22.74	22.75	22.77
			16QAM	21.72	21.69	21.74
		Low	QPSK	22.74	22.73	22.71
			16QAM	21.74	21.72	21.68
	100RB	/	QPSK	22.72	22.70	22.71
			16QAM	21.77	21.72	21.73

©Copyright. All rights reserved by CTTL.

LTE-FDD Band 12				Actual output Power (dBm)		
Band-width	**RBallocation**	**RBoffset**	**Modulation**	**High**	**Middle**	**Low**
1.4 MHz				**715.3MHz**	**707.5MHz**	**699.7MHz**
	1RB	**High**	**QPSK**	24.09	24.05	24.01
			16QAM	23.01	22.99	22.93
		Middle	**QPSK**	24.11	24.06	24.04
			16QAM	23.01	23.01	22.97
		Low	**QPSK**	24.08	24.06	24.05
			16QAM	23.00	22.97	22.96
	3RB	**High**	**QPSK**	23.92	23.84	23.83
			16QAM	22.70	22.68	22.70
		Middle	**QPSK**	23.92	23.84	23.83
			16QAM	22.70	22.68	22.70
		Low	**QPSK**	23.89	23.84	23.84
			16QAM	22.76	22.73	22.69
	6RB	/	**QPSK**	23.01	23.01	23.00
			16QAM	22.04	22.02	22.00
3 MHz				**714.5MHz**	**707.5MHz**	**700.5MHz**
	1RB	**High**	**QPSK**	24.08	24.05	24.01
			16QAM	23.01	22.97	22.97
		Middle	**QPSK**	24.11	24.08	24.04
			16QAM	23.00	22.98	22.98
		Low	**QPSK**	24.07	24.07	24.04
			16QAM	23.00	23.00	22.95
	8RB	**High**	**QPSK**	23.03	22.99	23.01
			16QAM	22.00	21.98	22.04
		Middle	**QPSK**	23.01	23.00	23.01
			16QAM	22.04	22.00	22.03
		Low	**QPSK**	23.00	23.02	22.99
			16QAM	21.98	22.02	21.97
	15RB	/	**QPSK**	23.02	22.98	22.99
			16QAM	22.00	21.99	21.98
5 MHz				**713.5MHz**	**707.5MHz**	**701.5MHz**
	1RB	**High**	**QPSK**	24.04	23.99	24.00
			16QAM	22.99	22.95	22.95
		Middle	**QPSK**	24.10	24.05	24.01
			16QAM	22.99	22.97	22.99
		Low	**QPSK**	24.10	24.06	24.05
			16QAM	23.02	22.97	22.98
	12RB	**High**	**QPSK**	23.07	23.02	23.06
			16QAM	22.06	22.00	22.07
		Middle	**QPSK**	23.08	23.07	23.05

©Copyright. All rights reserved by CTTL.

			16QAM	22.01	22.02	22.06
		Low	**QPSK**	23.11	23.10	23.08
			16QAM	22.05	22.03	22.00
	25RB	/	**QPSK**	23.07	23.03	23.01
			16QAM	22.06	22.04	22.03
10 MHz				**711MHz**	**707.5MHz**	**704MHz**
	1RB	**High**	**QPSK**	24.14	24.06	24.02
			16QAM	23.04	23.01	22.99
		Middle	**QPSK**	24.12	24.09	24.06
			16QAM	23.01	22.99	22.96
		Low	**QPSK**	24.11	24.06	24.04
			16QAM	23.01	23.01	22.97
	25RB	**High**	**QPSK**	23.10	23.08	23.06
			16QAM	22.00	21.99	21.98
		Middle	**QPSK**	23.08	23.07	23.06
			16QAM	22.04	22.06	22.04
		Low	**QPSK**	23.07	23.08	23.07
			16QAM	22.07	22.01	22.02
	50RB	/	**QPSK**	23.12	23.05	23.01
			16QAM	22.07	22.06	22.04

©Copyright. All rights reserved by CTTL.

11.5 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)
GFSK	0.28	1.45	0.06

The average conducted power for Wi-Fi is as following:

802.11b（dBm）

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1(2412MHz)	17.77	17.5	17.57	17.64
6(2437MHz)	17.61	17.4	17.42	17.46
11(2462MHz)	17.36	17.57	17.64	17.66

802.11g（dBm）

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1(2412MHz)	17.44	17.35	17.38	17.47	17.5	17.63	17.72	17.74
6(2437MHz)	17.39	17.49	17.54	17.63	17.67	17.56	17.57	17.62
11(2462MHz)	17.24	17.22	17.27	17.37	17.39	17.52	17.6	17.63

802.11n（dBm）- HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1(2412MHz)	16.83	16.74	16.8	16.92	17.05	17.13	17.19	17.21
6(2437MHz)	16.75	16.69	16.77	16.82	16.78	16.9	17.00	17.03
11(2462MHz)	16.61	16.45	16.54	16.55	16.64	16.73	16.76	16.81

©Copyright. All rights reserved by CTTL.

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.
For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

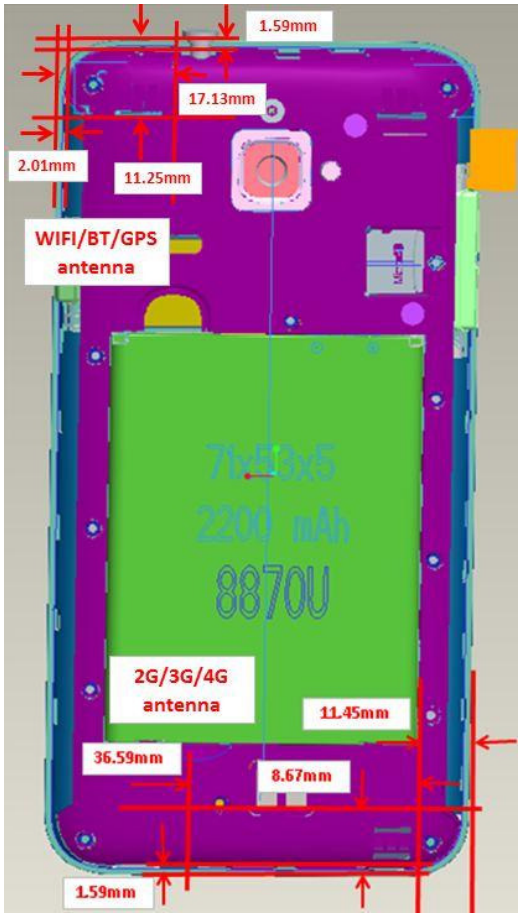

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

©Copyright. All rights reserved by CTTL.

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	1.5	1.41	Yes
		Body	19.20	1.5	1.41	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	18	63.10	No
		Body	19.17	18	63.10	No

©Copyright. All rights reserved by CTTL.

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.58	0.83	**1.41**
Highest reported SAR value for Body	Rear	0.77	0.29	**1.06**
	Bottom	1.10	/	**1.10**

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.58	0.06	**0.64**
Highest reported SAR value for Body	Rear	0.77	0.03	**0.80**
	Bottom	1.10	/	**1.10**

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Position	F (GHz)	Distance (mm)	Upper limit of power *		Estimated$_{1g}$ (W/kg)
			dBm	mW	
Head	2.441	5	1.5	1.41	0.06
Body	2.441	10	1.5	1.41	0.03

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR.
When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:
According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

©Copyright. All rights reserved by CTTL.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.
The distance is 10mm and just applied to the condition of body worn accessory.
It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or > 1.2W/kg.
The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{Target} - P_{Measured})/10}$$

Where P_{Target} is the power of manufacturing upper limit;
$P_{Measured}$ is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850	1:2
GPRS&EGPRS for GSM1900	1:4
WCDMA850/1700/1900	1:1

©Copyright. All rights reserved by CTTL.

14.1 SAR results for Fast SAR

Table 14.1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Left	Touch	/	32.97	33.5	0.048	**0.05**	0.069	**0.08**	0.10
836.6	190	Left	Tilt	/	32.97	33.5	0.033	**0.04**	0.047	**0.05**	0.18
836.6	190	Right	Touch	/	32.97	33.5	0.054	**0.06**	0.079	**0.09**	0.09
836.6	190	Right	Tilt	/	32.97	33.5	0.034	**0.04**	0.049	**0.06**	0.12
848.8	251	Right	Touch	/	32.76	33.5	0.041	**0.05**	0.06	**0.07**	0.11
824.2	128	Right	Touch	Fig.1	32.78	33.5	0.085	**0.10**	0.112	**0.13**	0.06

Table 14.2: SAR Values (GSM 850 MHz Band - Body)-AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.6	190	Front	/	28.05	29	0.046	**0.06**	0.086	**0.11**	0.12
848.8	251	Rear	/	27.80	29	0.073	**0.10**	0.103	**0.14**	0.13
836.6	190	Rear	/	28.05	29	0.105	**0.13**	0.149	**0.19**	0.02
824.2	128	Rear	/	27.84	29	0.169	**0.22**	0.221	**0.29**	0.06
824.2	128	Rear EGPRS	/	27.83	29	0.153	**0.20**	0.213	**0.28**	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.3: SAR Values (GSM 850 MHz Band - Body) -AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.6	190	Front	/	28.05	29	0.046	**0.06**	0.086	**0.11**	0.12
848.8	251	Rear	/	27.80	29	0.073	**0.10**	0.103	**0.14**	0.13
836.6	190	Rear	/	28.05	29	0.105	**0.13**	0.149	**0.19**	0.02
824.2	128	Rear	Fig.2	27.84	29	0.169	**0.22**	0.221	**0.29**	0.06
836.6	190	Left	/	28.05	29	0.027	**0.03**	0.041	**0.05**	0.12
836.6	190	Right	/	28.05	29	0.033	**0.04**	0.049	**0.06**	0.15
836.6	190	Bottom	/	28.05	29	0.023	**0.03**	0.036	**0.04**	0.10
824.2	128	Rear EGPRS	/	27.83	29	0.153	**0.20**	0.213	**0.28**	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.4: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	Left	Touch	Fig.3	29.67	30	0.187	**0.20**	0.311	**0.34**	0.05
1880	661	Left	Tilt	/	29.67	30	0.077	**0.08**	0.143	**0.15**	0.17
1880	661	Right	Touch	/	29.67	30	0.115	**0.12**	0.195	**0.21**	-0.14
1880	661	Right	Tilt	/	29.67	30	0.057	**0.06**	0.101	**0.11**	0.15
1909.8	810	Left	Touch	/	29.82	30	0.166	**0.17**	0.293	**0.31**	-0.10
1850.2	512	Left	Touch	/	29.66	30	0.136	**0.15**	0.237	**0.26**	0.13

Table 14.5: SAR Values (GSM 1900 MHz Band - Body) -AP OFF

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	661	Front	/	25.41	26	0.396	**0.45**	0.697	**0.80**	-0.10
1909.8	810	Rear	/	25.42	26	0.364	**0.42**	0.735	**0.84**	0.10
1880	661	Rear	/	25.41	26	0.382	**0.44**	0.748	**0.86**	0.07
1850.2	512	Rear	/	25.52	26	0.360	**0.40**	0.719	**0.80**	0.11
1880	661	RearEGPRS	/	25.41	26	0.348	**0.40**	0.686	**0.79**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.6: SAR Values (GSM 1900 MHz Band - Body) -AP ON

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	661	Front	/	25.41	26	0.396	**0.45**	0.697	**0.80**	-0.10
1909.8	810	Rear	/	25.42	26	0.364	**0.42**	0.735	**0.84**	0.10
1880	661	Rear	/	25.41	26	0.382	**0.44**	0.748	**0.86**	0.07
1850.2	512	Rear	/	25.52	26	0.360	**0.40**	0.719	**0.80**	0.11
1880	661	Left	/	25.41	26	0.116	**0.13**	0.209	**0.24**	0.02
1880	661	Right	/	25.41	26	0.062	**0.07**	0.106	**0.12**	0.17
1909.8	810	Bottom	/	25.42	26	0.453	**0.52**	0.88	**1.01**	0.09
1880	661	Bottom	Fig.4	25.41	26	0.476	**0.55**	0.895	**1.03**	0.07
1850.2	512	Bottom	/	25.52	26	0.449	**0.50**	0.86	**0.96**	0.02
1880	661	Bottom EGPRS	/	25.41	26	0.444	**0.51**	0.88	**1.01**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.7: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.4	4182	Left	Touch	/	23.5	24	0.052	**0.06**	0.075	**0.08**	0.11
836.4	4182	Left	Tilt	/	23.5	24	0.038	**0.04**	0.054	**0.06**	0.14
836.4	4182	Right	Touch	/	23.5	24	0.066	**0.07**	0.096	**0.11**	-0.07
836.4	4182	Right	Tilt	/	23.5	24	0.042	**0.05**	0.06	**0.07**	0.10
846.6	4233	Right	Touch	/	23.5	24	0.056	**0.06**	0.082	**0.09**	-0.16
826.4	4132	Right	Touch	Fig.5	23.5	24	0.078	**0.09**	0.103	**0.12**	0.05

Table 14.8: SAR Values (WCDMA 850 MHz Band - Body) -AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Front	/	23.5	24	0.061	**0.07**	0.086	**0.10**	0.13
846.6	4233	Rear	/	23.5	24	0.079	**0.09**	0.113	**0.13**	0.05
836.4	4182	Rear	/	23.5	24	0.094	**0.11**	0.134	**0.15**	0.02
826.4	4132	Rear	/	23.5	24	0.122	**0.14**	0.159	**0.18**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.9: SAR Values (WCDMA 850 MHz Band - Body) -AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Front	/	23.5	24	0.061	**0.07**	0.086	**0.10**	0.13
846.6	4233	Rear	/	23.5	24	0.079	**0.09**	0.113	**0.13**	0.05
836.4	4182	Rear	/	23.5	24	0.094	**0.11**	0.134	**0.15**	0.02
826.4	4132	Rear	Fig.6	23.5	24	0.122	**0.14**	0.159	**0.18**	0.06
836.4	4182	Left	/	23.5	24	0.038	**0.04**	0.055	**0.06**	0.13
836.4	4182	Right	/	23.5	24	0.045	**0.05**	0.066	**0.07**	0.15
836.4	4182	Bottom	/	23.5	24	0.020	**0.02**	0.031	**0.03**	0.14

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.10: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Left	Touch	/	22.2	23	0.218	**0.26**	0.369	**0.44**	0.08
1880	9400	Left	Tilt	/	22.2	23	0.060	**0.07**	0.108	**0.13**	0.13
1880	9400	Right	Touch	/	22.2	23	0.190	**0.23**	0.325	**0.39**	0.17
1880	9400	Right	Tilt	/	22.2	23	0.117	**0.14**	0.200	**0.24**	0.17
1907.6	9538	Left	Touch	Fig.7	22.3	23	0.228	**0.27**	0.379	**0.45**	-0.19
1852.4	9262	Left	Touch	/	22.4	23	0.195	**0.22**	0.337	**0.39**	0.05

Table 14.11: SAR Values (WCDMA 1900 MHz Band - Body)– AP OFF

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front	/	22.2	23	0.329	**0.40**	0.612	**0.74**	0.04
1907.6	9538	Rear	/	22.3	23	0.454	**0.53**	0.857	**1.01**	0.02
1880	9400	Rear	/	22.2	23	0.388	**0.47**	0.729	**0.88**	0.07
1852.4	9262	Rear	/	22.4	23	0.367	**0.42**	0.708	**0.81**	0.09

Note1: The distance between the EUT and the phantom bottom is 10 mm.

Table 14.12: SAR Values (WCDMA 1900 MHz Band - Body) – AP ON

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front	/	22.2	23	0.329	**0.40**	0.612	**0.74**	0.04
1907.6	9538	Rear	/	22.3	23	0.454	**0.53**	0.857	**1.01**	0.02
1880	9400	Rear	/	22.2	23	0.388	**0.47**	0.729	**0.88**	0.07
1852.4	9262	Rear	/	22.4	23	0.367	**0.42**	0.708	**0.81**	0.09
1880	9400	Left	/	22.2	23	0.190	**0.23**	0.34	**0.41**	0.10
1880	9400	Right	/	22.2	23	0.122	**0.15**	0.204	**0.25**	0.11
1907.6	9538	Bottom	Fig.8	22.3	23	0.492	**0.58**	0.935	**1.10**	-0.09
1880	9400	Bottom	/	22.2	23	0.387	**0.47**	0.736	**0.88**	-0.02
1852.4	9262	Bottom	/	22.4	23	0.378	**0.43**	0.724	**0.83**	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.13: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.9	22.2	23	0.301	**0.36**	0.483	**0.58**	0.06
1732.6	1413	Left	Touch	/	22.1	23	0.284	**0.35**	0.462	**0.57**	0.08
1712.4	1312	Left	Touch	/	22.2	23	0.225	**0.27**	0.379	**0.46**	0.06
1732.6	1413	Left	Tilt	/	22.1	23	0.066	**0.08**	0.115	**0.14**	0.13
1732.6	1413	Right	Touch	/	22.1	23	0.200	**0.25**	0.329	**0.40**	-0.03
1732.6	1413	Right	Tilt	/	22.1	23	0.084	**0.10**	0.144	**0.18**	0.02

Table 14.14: SAR Values (WCDMA 1700 MHz Band - Body)– AP OFF

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1732.6	1413	Front	/	22.1	23	0.335	**0.41**	0.541	**0.67**	0.04
1752.6	1513	Rear	/	22.2	23	0.443	**0.53**	0.819	**0.98**	0.03
1732.6	1413	Rear	/	22.1	23	0.359	**0.44**	0.639	**0.79**	-0.01
1712.4	1312	Rear	/	22.2	23	0.326	**0.39**	0.569	**0.68**	0.08

Note1: The distance between the EUT and the phantom bottom is 10 mm.

Table 14.15: SAR Values (WCDMA 1700 MHz Band - Body) – AP ON

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1732.6	1413	Front	/	22.1	23	0.335	**0.41**	0.541	**0.67**	0.04
1752.6	1513	Rear	/	22.2	23	0.443	**0.53**	0.819	**0.98**	0.03
1732.6	1413	Rear	/	22.1	23	0.359	**0.44**	0.639	**0.79**	-0.01
1712.4	1312	Rear	/	22.2	23	0.326	**0.39**	0.569	**0.68**	0.08
1732.6	1413	Left	/	22.1	23	0.153	**0.19**	0.268	**0.33**	0.10
1732.6	1413	Right	/	22.1	23	0.078	**0.10**	0.134	**0.16**	0.11
1752.6	1513	Bottom	Fig.10	22.2	23	0.456	**0.55**	0.833	**1.00**	0.13
1732.6	1413	Bottom	/	22.1	23	0.339	**0.42**	0.65	**0.80**	-0.02
1712.4	1312	Bottom	/	22.2	23	0.308	**0.37**	0.579	**0.70**	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.16: SAR Values (LTE Band 2-Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8°C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_ Low	Left Touch	23.30	24	Fig.11	0.225	**0.26**	0.383	**0.45**	0.04
1860	18700	QPSK_20MHz _1RB_ Low	Left Tilt	23.30	24	/	0.103	**0.12**	0.19	**0.22**	0.11
1860	18700	QPSK_20MHz _50RB_ Low	Left Touch	22.23	23	/	0.205	**0.24**	0.358	**0.43**	0.10
1860	18700	QPSK_20MHz _50RB_ Low	Left Tilt	22.23	23	/	0.091	**0.11**	0.17	**0.20**	-0.07
1860	18700	QPSK_20MHz _1RB_ Low	Right Touch	23.30	24	/	0.186	**0.22**	0.31	**0.36**	0.13
1860	18700	QPSK_20MHz _1RB_ Low	Right Tilt	23.30	24	/	.0120	**0.01**	0.212	**0.25**	0.18
1860	18700	QPSK_20MHz _50RB_ Low	Right Touch	22.23	23	/	0.152	**0.18**	0.255	**0.30**	0.08
1860	18700	QPSK_20MHz _50RB_ Low	Right Tilt	22.23	23	/	0.099	**0.12**	0.175	**0.21**	0.17

Table 14.17: SAR Values (LTE Band 2-Body) – AP OFF

Ambient Temperature: 23.4°C Liquid Temperature: 22.9°C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_ Low	Front	23.30	24	/	0.301	**0.35**	0.513	**0.60**	0.05
1860	18700	QPSK_20MHz _50RB_ Low	Front	22.23	23	/	0.229	**0.27**	0.407	**0.49**	0.10
1860	18700	QPSK_20MHz _1RB_ Low	Rear	23.30	24	/	0.373	**0.44**	0.699	**0.82**	0.11
1860	18700	QPSK_20MHz _50RB_ Low	Rear	22.23	23	/	0.300	**0.36**	0.589	**0.70**	0.14

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.18: SAR Values (LTE Band 2-Body) – AP ON

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_ Low	Front	23.30	24	/	0.301	**0.35**	0.513	**0.60**	0.05
1860	18700	QPSK_20MHz _50RB_ Low	Front	22.23	23	/	0.229	**0.27**	0.407	**0.49**	0.10
1860	18700	QPSK_20MHz _1RB_ Low	Rear	23.30	24	/	0.373	**0.44**	0.699	**0.82**	0.11
1860	18700	QPSK_20MHz _50RB_ Low	Rear	22.23	23	/	0.300	**0.36**	0.589	**0.70**	0.14
1860	18700	QPSK_20MHz _1RB_ Low	Right	23.30	24	/	0.139	**0.16**	0.244	**0.29**	0.15
1860	18700	QPSK_20MHz _50RB_ Low	Right	22.23	23	/	0.110	**0.13**	0.184	**0.22**	0.19
1860	18700	QPSK_20MHz _1RB_Low	Left	23.30	24	/	0.168	**0.20**	0.332	**0.39**	-0.12
1860	18700	QPSK_20MHz _50RB_Low	Left	22.23	23	/	0.142	**0.17**	0.295	**0.35**	-0.08
1900	19100	QPSK_20MHz _1RB_Low	Bottom	23.25	24	/	0.444	**0.53**	0.855	**1.02**	0.04
1880	18900	QPSK_20MHz _1RB_Low	Bottom	23.28	24	/	0.483	**0.57**	0.899	**1.06**	0.02
1860	18700	QPSK_20MHz _1RB_Low	Bottom	23.30	24	Fig.12	0.497	**0.58**	0.933	**1.10**	0.07
1860	18700	QPSK_20MHz _50RB_Low	Bottom	22.23	23	/	0.360	**0.43**	0.676	**0.81**	-0.06
1860	18700	QPSK_20MHz _100RB_Low	Bottom	22.18	23	/	0.360	**0.43**	0.691	**0.83**	0.10

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.19: SAR Values (LTE Band 4-Head)

Ambient Temperature: 23.3 °C Liquid Temperature: 22.8°C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz _1RB_High	Left Touch	23.95	24	Fig.13	0.260	**0.26**	0.418	**0.42**	0.08
1745	20300	QPSK_20MHz _1RB_ High	Left Tilt	23.95	24	/	0.049	**0.05**	0.094	**0.10**	0.12
1745	20300	QPSK_20MHz _1RB_High	Right Touch	23.95	24	/	0.183	**0.19**	0.299	**0.30**	0.07
1745	20300	QPSK_20MHz _1RB_ High	Right Tilt	23.95	24	/	0.039	**0.04**	0.074	**0.07**	0.13
1745	20300	QPSK_20MHz _1RB_High	Left Touch	22.79	23	/	0.191	**0.20**	0.32	**0.34**	0.08
1745	20300	QPSK_20MHz _1RB_ High	Left Tilt	22.79	23	/	0.080	**0.08**	0.136	**0.14**	0.15
1745	20300	QPSK_20MHz _1RB_High	Right Touch	22.79	23	/	0.143	**0.15**	0.24	**0.25**	0.09
1745	20300	QPSK_20MHz _1RB_ High	Right Tilt	22.79	23	/	0.061	**0.06**	0.105	**0.11**	0.18

Table 14.20: SAR Values (LTE Band 4-Body) – AP OFF

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz _1RB_LOW	Front	23.95	24	/	0.311	**0.31**	0.426	**0.43**	0.06
1745	20300	QPSK_20MHz _50RB_ LOW	Front	22.79	23	/	0.166	**0.17**	0.239	**0.25**	0.05
1745	20300	QPSK_20MHz _1RB_LOW	Rear	23.95	24	/	0.276	**0.28**	0.511	**0.52**	0.01
1745	20300	QPSK_20MHz _50RB_LOW	Rear	22.79	23	/	0.215	**0.23**	0.400	**0.42**	0.07

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.21: SAR Values (LTE Band 4-Body) – AP ON

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz_1RB_High	Front	23.95	24	/	0.311	**0.31**	0.426	**0.43**	0.06
1745	20300	QPSK_20MHz_50RB_ High	Front	22.79	23	/	0.166	**0.17**	0.239	**0.25**	0.05
1745	20300	QPSK_20MHz_1RB_High	Rear	23.95	24	/	0.276	**0.28**	0.511	**0.52**	0.01
1745	20300	QPSK_20MHz_50RB_ High	Rear	22.79	23	/	0.215	**0.23**	0.400	**0.42**	0.07
1745	20300	QPSK_20MHz_1RB_High	Bottom	23.95	24	Fig.14	0.354	**0.36**	0.628	**0.64**	0.01
1745	20300	QPSK_20MHz_50RB_ High	Bottom	22.79	23	/	0.257	**0.27**	0.469	**0.49**	0.13
1745	20300	QPSK_20MHz_1RB_High	Right	23.95	24	/	0.086	**0.09**	0.195	**0.20**	-0.16
1745	20300	QPSK_20MHz_50RB_ High	Right	22.79	23	/	0.044	**0.05**	0.09	**0.09**	-0.18
1745	20300	QPSK_20MHz_1RB_High	Left	23.95	24	/	0.143	**0.14**	0.255	**0.26**	0.19
1745	20300	QPSK_20MHz_50RB_ High	Left	22.79	23	/	0.114	**0.12**	0.204	**0.21**	0.12

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.22: SAR Values (LTE Band 12-Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz_1RB_ High	Left Touch	24.14	24.5	/	0.178	**0.19**	0.253	**0.27**	-0.06
711	23130	QPSK_10MHz_25RB_ High	Left Touch	23.10	23.5	/	0.164	**0.18**	0.233	**0.26**	0.03
711	23130	QPSK_10MHz_1RB_ High	Left Tilt	24.14	24.5	/	0.048	**0.05**	0.068	**0.07**	0.12
711	23130	QPSK_10MHz_25RB_ High	Left Tilt	23.10	23.5	/	0.041	**0.04**	0.058	**0.06**	0.10
711	23130	QPSK_10MHz_1RB_ High	Right Touch	24.14	24.5	Fig.15	0.204	**0.22**	0.261	**0.28**	0.07
711	23130	QPSK_10MHz_25RB_ High	Right Touch	23.10	23.5	/	0.169	**0.19**	0.243	**0.27**	0.10
711	23130	QPSK_10MHz_1RB_ High	Right Tilt	24.14	24.5	/	0.049	**0.05**	0.07	**0.08**	0.17
711	23130	QPSK_10MHz_25RB_ High	Right Tilt	23.10	23.5	/	0.043	**0.05**	0.061	**0.07**	0.13

Table 14.23: SAR Values (LTE Band 12-Body) – AP OFF

Ambient Temperature: 24.8 °C Liquid Temperature: 24.3 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz_1RB_ High	Front	24.14	24.5	/	0.344	**0.37**	0.493	**0.54**	-0.04
711	23130	QPSK_10MHz_25RB_ High	Front	23.10	23.5	/	0.257	**0.28**	0.369	**0.40**	0.01
711	23130	QPSK_10MHz_1RB_ High	Rear	24.14	24.5	/	0.432	**0.47**	0.706	**0.77**	0.09
711	23130	QPSK_10MHz_25RB_ High	Rear	23.10	23.5	/	0.328	**0.36**	0.527	**0.58**	0.00

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.24: SAR Values (LTE Band 17-Body) – AP ON

Ambient Temperature: 24.8 °C Liquid Temperature: 24.3 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz_1RB_High	Front	24.14	24.5	/	0.344	**0.37**	0.493	**0.54**	-0.04
711	23130	QPSK_10MHz_25RB_High	Front	23.10	23.5	/	0.257	**0.28**	0.369	**0.40**	0.01
711	23130	QPSK_10MHz_1RB_High	Rear	24.14	24.5	Fig.16	0.432	**0.47**	0.706	**0.77**	0.09
711	23130	QPSK_10MHz_25RB_High	Rear	23.10	23.5	/	0.328	**0.36**	0.527	**0.58**	0.00
711	23130	QPSK_10MHz_1RB_High	Bottom	24.14	24.5	/	0.133	**0.14**	0.204	**0.22**	0.02
711	23130	QPSK_10MHz_25RB_High	Bottom	23.10	23.5	/	0.108	**0.12**	0.167	**0.18**	-0.12
711	23130	QPSK_10MHz_1RB_High	Right	24.14	24.5	/	0.136	**0.15**	0.201	**0.22**	-0.02
711	23130	QPSK_10MHz_25RB_High	Right	23.10	23.5	/	0.110	**0.12**	0.161	**0.18**	0.00
711	23130	QPSK_10MHz_1RB_High	Left	24.14	24.5	/	0.144	**0.16**	0.263	**0.29**	0.07
711	23130	QPSK_10MHz_25RB_High	Left	23.10	23.5	/	0.120	**0.13**	0.202	**0.22**	-0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.25: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
824.2	128	Right	Touch	Fig.1	32.78	33.5	0.085	**0.10**	0.112	**0.13**	0.06

Table 14.26: SAR Values (GSM 850 MHz Band - Body) – AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
824.2	128	Rear	/	27.84	29	0.169	**0.22**	0.221	**0.29**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.27: SAR Values (GSM 850 MHz Band - Body) – AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
824.2	128	Rear	Fig.2	27.84	29	0.169	**0.22**	0.221	**0.29**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.28: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	Left	Touch	Fig.3	29.67	30	0.187	**0.20**	0.311	**0.34**	0.05

Table 14.29: SAR Values (GSM 1900 MHz Band - Body) – AP ON

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	661	Bottom	/	25.41	26	0.476	**0.55**	0.895	**1.03**	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.30: SAR Values (GSM 1900 MHz Band - Body) – AP OFF

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	661	Bottom	Fig.4	25.41	26	0.476	**0.55**	0.895	**1.03**	0.07

©Copyright. All rights reserved by CTTL.

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.31: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
826.4	4132	Right	826.4	Fig.5	23.5	24	0.078	**0.09**	0.103	**0.12**	0.05

Table 14.32: SAR Values (WCDMA 850 MHz Band - Body) – AP OFF

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
826.4	4132	Rear	/	23.5	24	0.122	**0.14**	0.159	**0.18**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm

Table 14.33: SAR Values (WCDMA 850 MHz Band - Body) – AP ON

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
826.4	4132	Rear	Fig.6	23.5	24	0.122	**0.14**	0.159	**0.18**	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm

Table 14.34: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1907.6	9538	Left	Touch	Fig.7	22.3	23	0.228	**0.27**	0.379	**0.45**	-0.19

Table 14.35: SAR Values (WCDMA 1900 MHz Band - Body) – AP OFF

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Bottom	/	22.3	23	0.492	**0.58**	0.935	**1.10**	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm

Table 14.36: SAR Values (WCDMA 1900 MHz Band - Body) – AP ON

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Bottom	Fig.8	22.3	23	0.492	**0.58**	0.935	**1.10**	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm

©Copyright. All rights reserved by CTTL.

Table 14.37: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.9	22.2	23	0.301	**0.36**	0.483	**0.58**	0.06

Table 14.38: SAR Values (WCDMA 1700 MHz Band - Body)– AP OFF

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1752.6	1513	Bottom	/	22.2	23	0.456	**0.55**	0.833	**1.00**	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.39: SAR Values (WCDMA 1700 MHz Band - Body)– AP ON

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1752.6	1513	Bottom	Fig.10	22.2	23	0.456	**0.55**	0.833	**1.00**	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.40: SAR Values (LTE Band 2-Head)

Ambient Temperature: 23.3°C Liquid Temperature: 22.8 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_ Low	Left Touch	23.30	24	Fig.11	0.225	**0.26**	0.383	**0.45**	0.04

Table 14.41: SAR Values (LTE Band 2-Body) – AP OFF

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_Low	Bottom	23.30	24	/	0.497	**0.58**	0.933	**1.10**	0.07

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.42: SAR Values (LTE Band 2-Body) – AP ON

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	QPSK_20MHz _1RB_Low	Bottom	23.30	24	Fig.12	0.497	**0.58**	0.933	**1.10**	0.07

Note: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.43: SAR Values (LTE Band 4-Head)

Ambient Temperature: 23.3 °C Liquid Temperature: 22.8°C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz _1RB_High	Left Touch	23.95	24	Fig.13	0.260	**0.26**	0.418	**0.42**	0.08

Table 14.44: SAR Values (LTE Band 4-Body)– AP OFF

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz _1RB_High	Bottom	23.95	24	/	0.354	**0.36**	0.628	**0.64**	0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.45: SAR Values (LTE Band 4-Body)– AP ON

Ambient Temperature: 23.4 °C Liquid Temperature: 22.9 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz _1RB_High	Bottom	23.95	24	Fig.14	0.354	**0.36**	0.628	**0.64**	0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.44: SAR Values (LTE Band 12-Head)

Ambient Temperature: 23.7 °C Liquid Temperature: 23.2 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz _1RB_ High	Right Touch	24.14	24.5	Fig.15	0.204	**0.22**	0.261	**0.28**	0.07

Table 14.45: SAR Values (LTE Band 12-Body) – AP OFF

Ambient Temperature: 24.8 °C Liquid Temperature: 24.3 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz _1RB_ High	Rear	24.14	24.5	/	0.432	**0.47**	0.706	**0.77**	0.09

Note: The distance between the EUT and the phantom bottom is 10mm

Table 14.46: SAR Values (LTE Band 12-Body) – AP ON

Ambient Temperature: 24.8 °C Liquid Temperature: 24.3 °C											
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz _1RB_ High	Rear	24.14	24.5	Fig.16	0.432	**0.47**	0.706	**0.77**	0.09

Note: The distance between the EUT and the phantom bottom is 10mm

©Copyright. All rights reserved by CTTL.

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.47: SAR Values (Wi-Fi 802.11b - Head)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2412	1	Left	Touch	/	17.77	18	0.351	**0.37**	0.765	**0.81**	0.13
2437	6	Left	Touch	/	17.61	18	0.328	**0.36**	0.735	**0.80**	0.07
2462	11	Left	Touch	/	17.36	18	0.302	**0.33**	0.692	**0.80**	0.05
2412	1	Left	Tilt	/	17.77	18	0.212	**0.22**	0.421	**0.44**	0.12
2412	1	Right	Touch	/	17.77	18	0.193	**0.20**	0.353	**0.37**	0.13
2412	1	Right	Tilt	/	17.77	18	0.130	**0.14**	0.243	**0.26**	0.18

As shown above table, the initial test position for head is “Left Touch”. So the head SAR of WLAN is presented as below:

Table 14.48: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2412	1	Left	Touch	Fig.17	17.77	18	0.354	**0.37**	0.768	**0.81**	0.13
2412	1	Right	Touch	/	17.77	18	0.190	**0.20**	0.349	**0.37**	0.13

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

Table 14.49: SAR Values (WLAN - Head) – 802.11b 1Mbps (Scaled Reported SAR)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C							
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.						
2412	1	Left	Touch	97.7%	100%	**0.81**	**0.83**
2412	1	Right	Touch	97.7%	100%	**0.37**	**0.38**

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

©Copyright. All rights reserved by CTTL.

Body Evaluation

Table 14.50: SAR Values (WLAN - Body) – 802.11b 1Mbps (Fast SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2412	1	Front	/	17.77	18	0.104	**0.11**	0.193	**0.20**	0.07
2412	1	Rear	/	17.77	18	0.133	**0.14**	0.270	**0.28**	0.04
2412	1	Right	/	17.77	18	0.083	**0.09**	0.160	**0.17**	0.02
2412	1	Top	/	17.77	18	0.069	**0.07**	0.132	**0.14**	0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

As shown above table, the initial test position for body is "Rear". So the body SAR of WLAN is presented as below:

Table 14.51: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)

Ambient Temperature: 23.0 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2412	1	Rear	Fig.18	17.77	18	0.129	**0.14**	0.266	**0.28**	0.04

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

Table 14.52: SAR Values (WLAN - Body) – 802.11b 1Mbps (Scaled Reported SAR)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C						
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.					
2437	6	Rear	97.7%	100%	**0.28**	**0.29**

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

©Copyright. All rights reserved by CTTL.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Table 15.1: SAR Measurement Variability for Body GSM 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	661	Bottom	10	0.895	0.887	1.01	/

Table 15.2: SAR Measurement Variability for Body WCDMA 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1907.6	9538	Bottom	10	0.935	0.921	1.02	/

Table 15.3: SAR Measurement Variability for Body WCDMA 1700 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1752.6	1513	Bottom	10	0.833	0.819	1.02	/

Table 15.4: SAR Measurement Variability for Body LTE Band 2 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1860	18700	Bottom	10	0.933	0.927	1.01	/

©Copyright. All rights reserved by CTTL.

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.4	5.4	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	1	1	1.6	1.6	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	6.4	6.4	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	0.5	0.5	∞
5	Detection limit	B	1.0	N	1	1	1	1	1	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.6	0.6	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.0	0.0	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.0	1.0	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	5
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1	0.28	9
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	0.31	0.25	9
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						11.1	11.0	95.5
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						22.3	22.1	

©Copyright. All rights reserved by CTTL.

16.2 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	10.8	N	1	1	5.4	5.4	1	∞
2	Isotropy	B	2.8	R	1	1	1.6	1.6	1	∞
3	Boundary effect	B	1.0	R	1	1	0.6	0.6	1	∞
4	Linearity	B	4.7	R	1	1	2.7	2.7	1	∞
5	Detection limit	B	1.0	R	1	1	0.6	0.6	1	∞
6	Readout electronics	B	0.3	R	1	1	0.3	0.3	1	∞
7	Response time	B	0.8	R	1	1	0.5	0.5	1	∞
8	Integration time	B	2.6	R	1	1	1.5	1.5	1	∞
9	RF ambient conditions-noise	B	0	R	1	1	0	0	1	∞
10	RF ambient conditions-reflection	B	0	R	1	1	0	0	1	∞
11	Probe positioned mech. Restrictions	B	0.4	R	1	1	0.2	0.2	1	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	1	1	1.7	1.7	1	∞
13	Post-processing	B	1.0	R	1	1	0.6	0.6	1	∞
14	Fast SAR z-Approximation	B	7.0	R	1	1	4.0	4.0	1	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.1	12.45	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						26.2	25.9	

©Copyright. All rights reserved by CTTL.

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent E5071C	MY46103759	December 16,2015	One year
02	Dielectric probe	85070E	MY44300317	No Calibration Requested	
03	Power meter	NRVD	101253	March 5,2015	One year
04	Power sensor	NRV-Z5	100333		
05	Signal Generator	E8257D	MY47461211	July 6, 2015	One year
06	Amplifier	VTL5400	0404	No Calibration Requested	
07	BTS	E5515C	GB46110723	May 20, 2015	One year
08	E-field Probe	SPEAG ES3DV3	3151	October 30, 2015	One year
10	DAE	SPEAG DAE4	786	November 16, 2015	One year
11	Dipole Validation Kit	SPEAG D750V3	1017	August 28, 2014	Two year
12	Dipole Validation Kit	SPEAG D835V2	4d057	October 22, 2015	One year
13	Dipole Validation Kit	SPEAG D1800V2	2d147	November 3, 2015	One year
14	Dipole Validation Kit	SPEAG D1900V2	5d088	November 4, 2015	One year
15	Dipole Validation Kit	SPEAG D2450V2	873	October 30, 2015	One year
17	Radio Communication Analyzer	Anristu MT8820C	6201341853	March 27, 2015	One year

END OF REPORT BODY

©Copyright. All rights reserved by CTTL.

ANNEX A Graph Results

GSM 850 Right Cheek Low

Date/Time: 2016-1-5
Electronics: DAE4 Sn786
Medium: Head 900 MHz
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.911 S/m; ε_r = 40.162; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: GSM Frequency: 824.2 MHz Duty Cycle: 1:8.3
Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

Right Cheek Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.118 W/kg

Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.296 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.142 W/kg
SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.085 W/kg
Maximum value of SAR (measured) = 0.117 W/kg

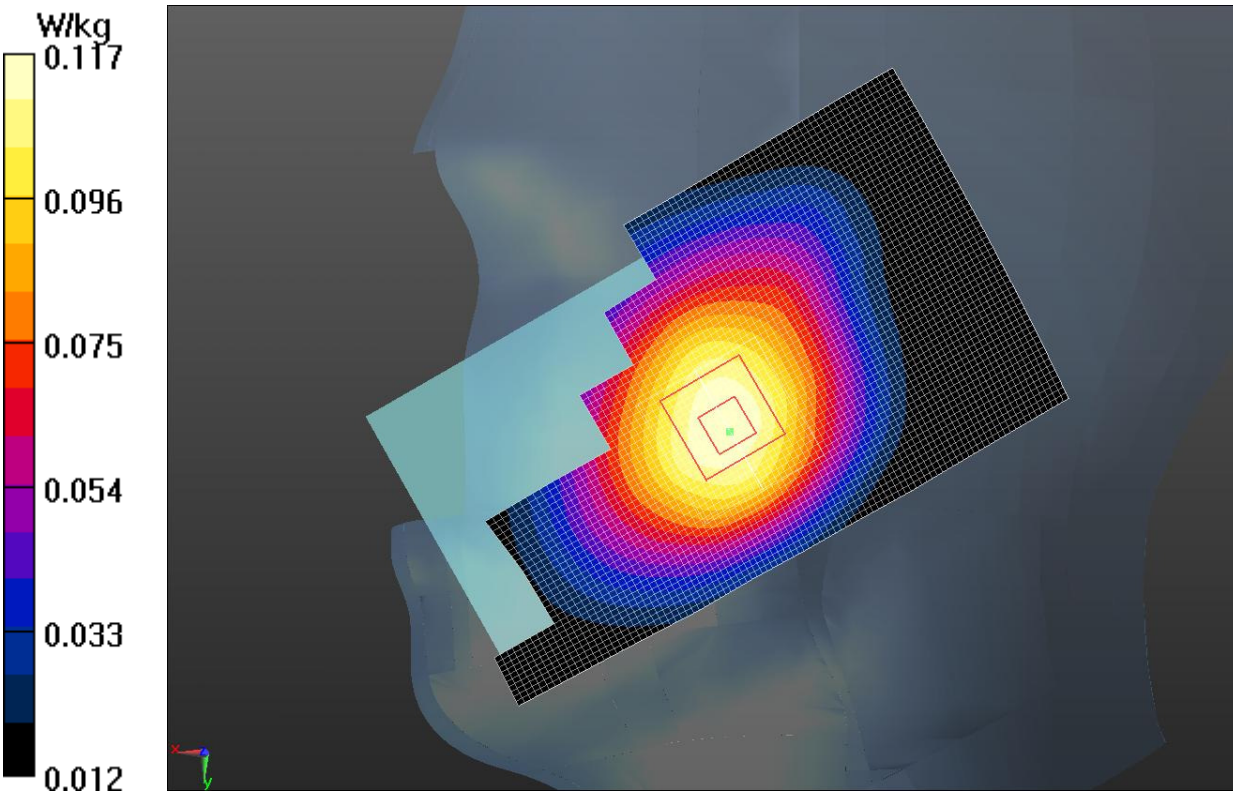

Fig.1 GSM 850MHz CH128

©Copyright. All rights reserved by CTTL.

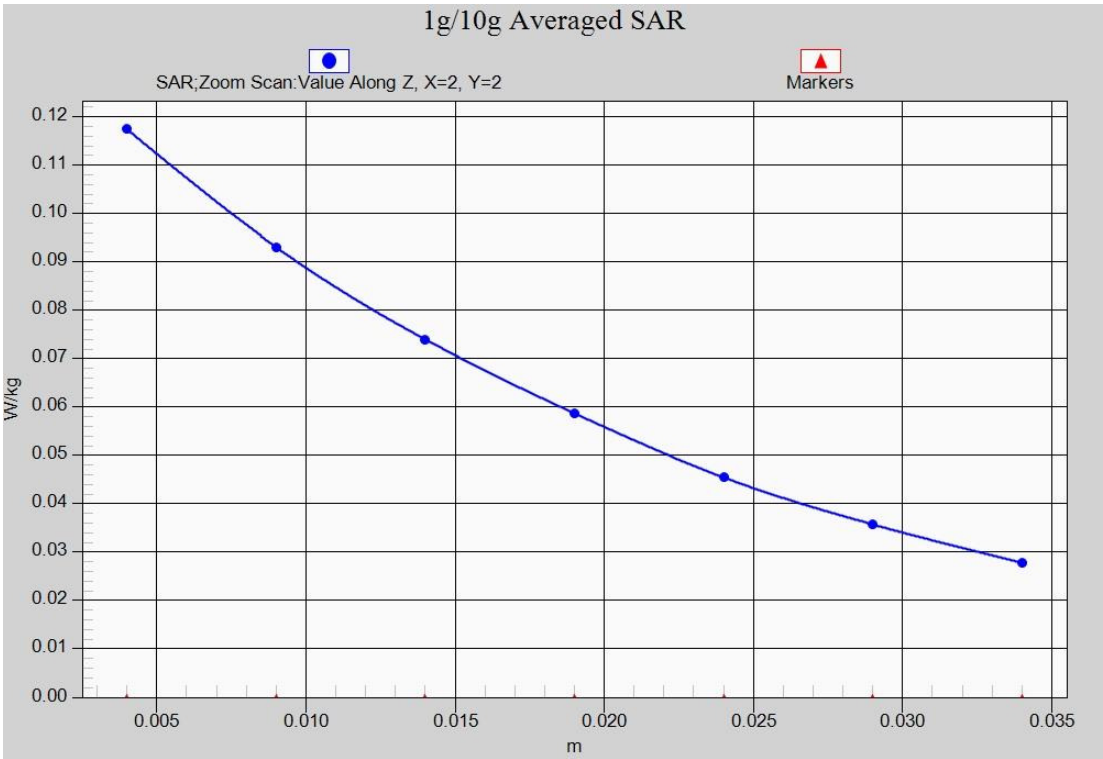

Fig.1-1 Z-Scan at power reference point (GSM 850 MHz CH128)

©Copyright. All rights reserved by CTTL.

850 Body Rear Low

Date/Time: 2016-1-6
Electronics: DAE4 Sn786
Medium: 850Body MHz
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.959 S/m; ε_r = 53.571; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: 4 slot GPRS Frequency: 824.2 MHz Duty Cycle: 1:2
Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

Rear side Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.234 W/kg

Rear side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.609 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.276 W/kg
SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.169 W/kg
Maximum value of SAR (measured) = 0.231 W/kg

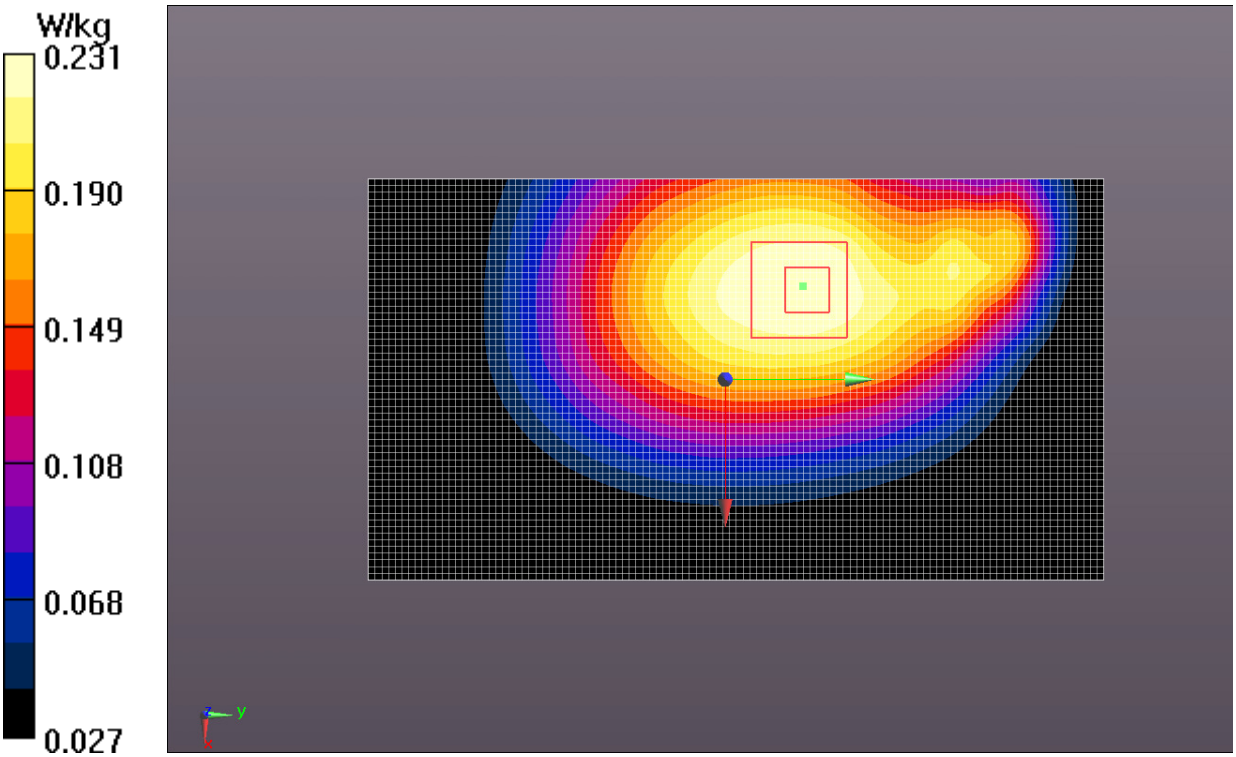

Fig.2 GSM 850 MHz CH128

©Copyright. All rights reserved by CTTL.

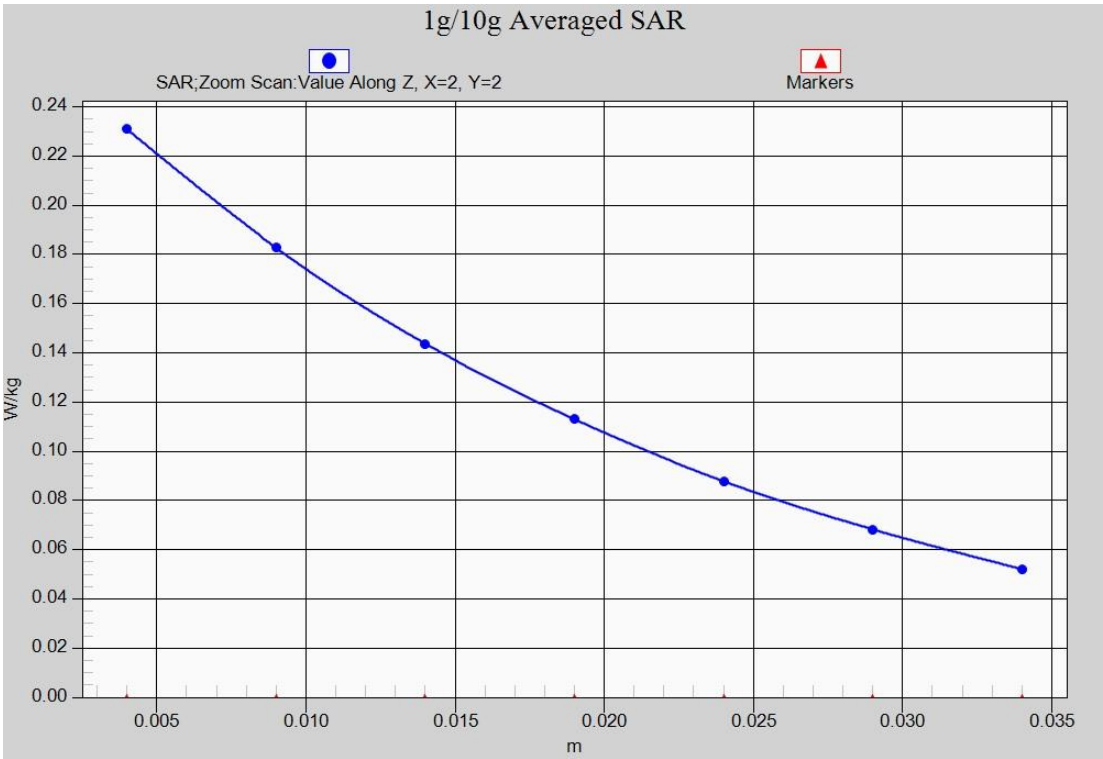

Fig.2-1 Z-Scan at power reference point (GSM 850 MHz CH128)

©Copyright. All rights reserved by CTTL.

GSM1900 Left Cheek Middle

Date/Time: 2016-1-12
Electronics: DAE4 Sn786
Medium: 1900 Head
Medium parameters used: f = 1880 MHz; σ = 1.394 S/m; ε_r = 38.388; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: GSM Frequency: 1880 MHz Duty Cycle: 1:8.3
Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

Left Cheek Middle/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.339 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.326 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.484 W/kg
SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.187 W/kg
Maximum value of SAR (measured) = 0.314 W/kg

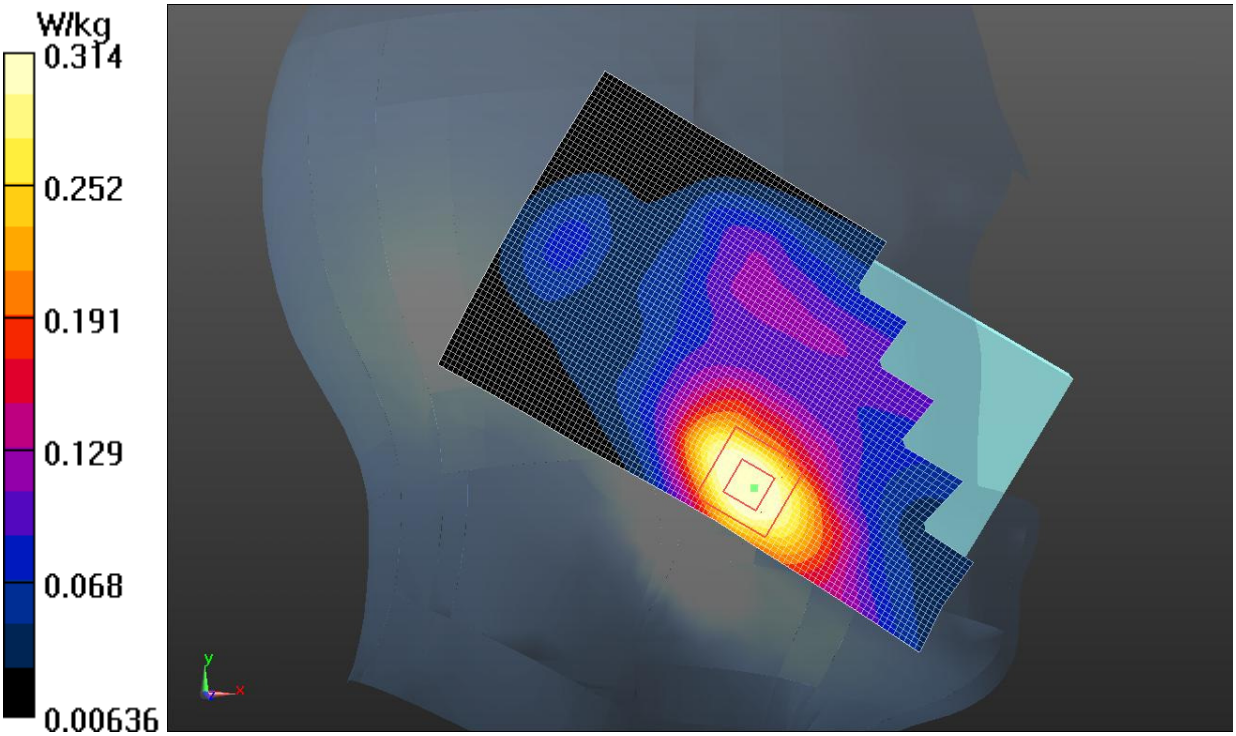

Fig.3 GSM 1900 MHz CH661

©Copyright. All rights reserved by CTTL.

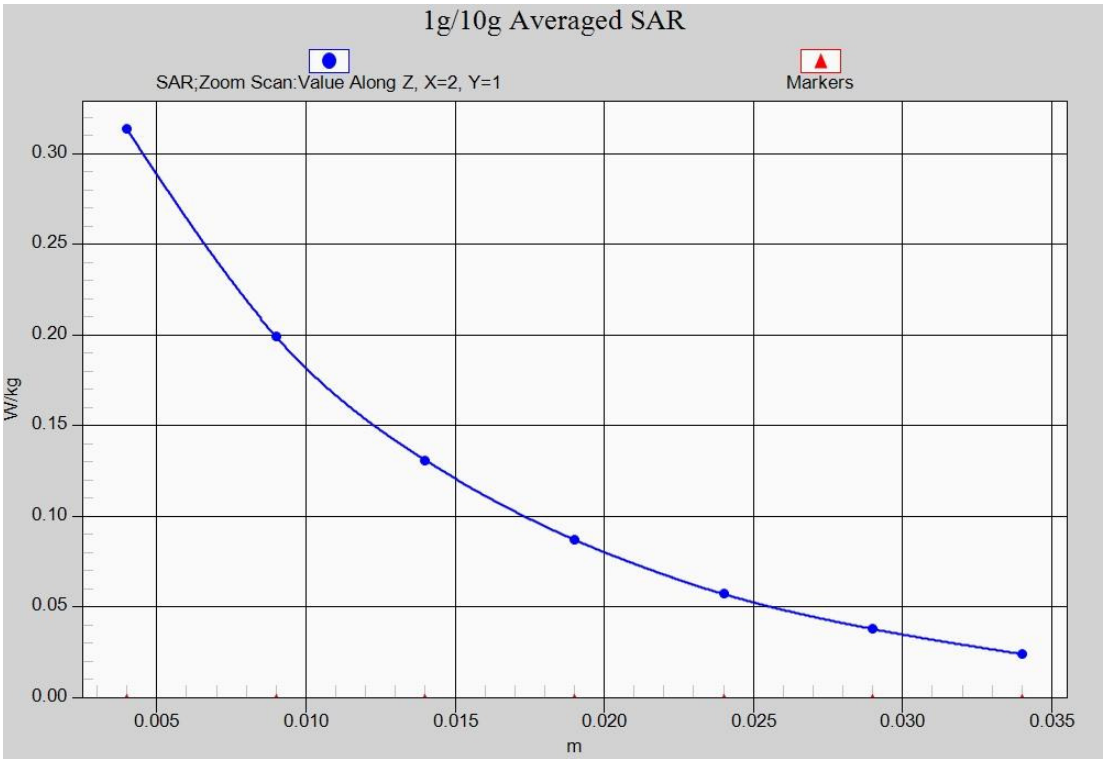

Fig.3-1 Z-Scan at power reference point (GSM 1900 MHz CH661)

©Copyright. All rights reserved by CTTL.

GSM1900 Body Bottom Middle

Date/Time: 2016-1-31
Electronics: DAE4 Sn786
Medium: 1900Body MHz
Medium parameters used: f = 1880 MHz; σ = 1.539 S/m; ε_r = 50.91; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: 4 slot GPRS Frequency: 1880 MHz Duty Cycle: 1:2.0
Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

Bottom side Middle/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Bottom side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.230 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.476 W/kg
Maximum value of SAR (measured) = 1.00 W/kg

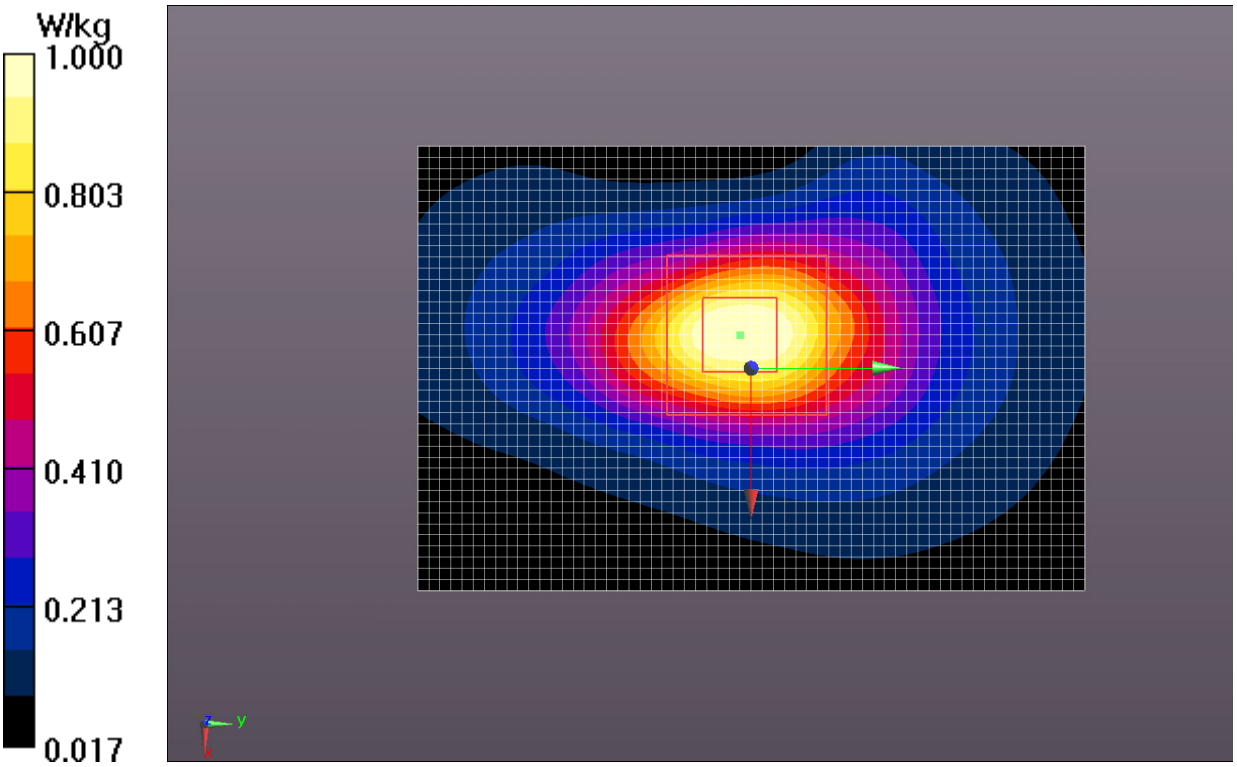

Fig.4 GSM 1900 MHz CH661

©Copyright. All rights reserved by CTTL.

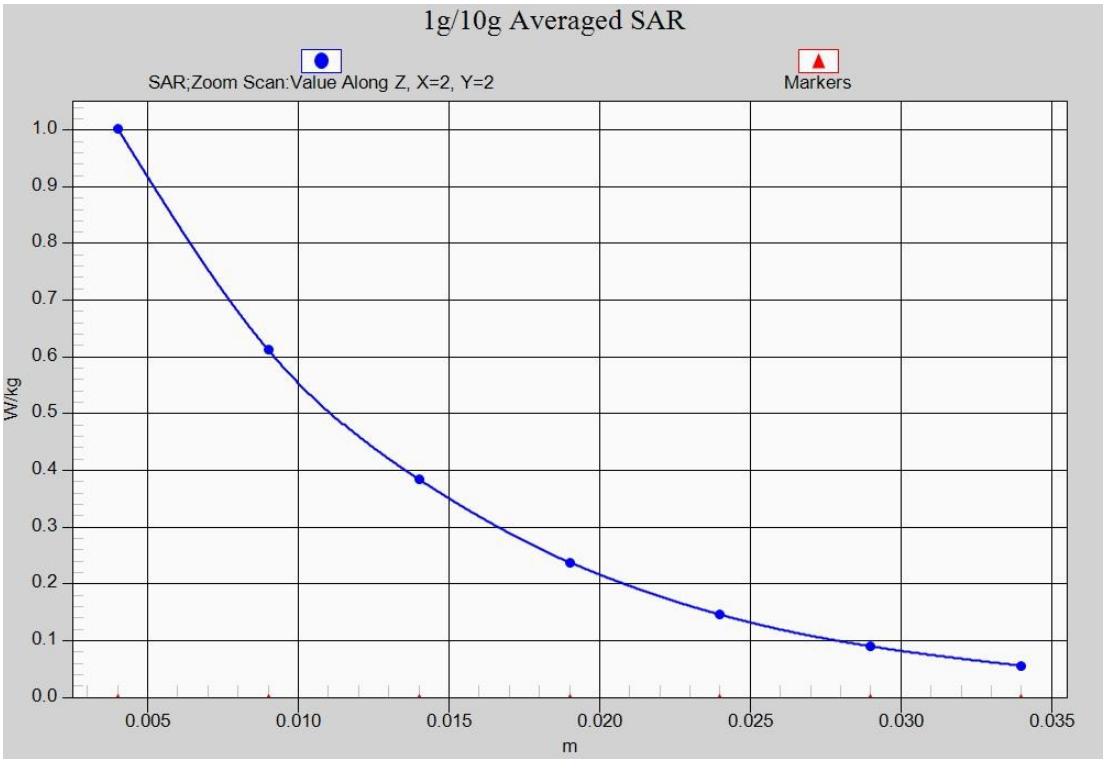

Fig.4-1 Z-Scan at power reference point (GSM 1900 MHz CH661)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Right Cheek Low

Date/Time: 2016-1-5
Electronics: DAE4 Sn786
Medium: Head 900 MHz
Medium parameters used (interpolated): f = 826.4 MHz; σ = 0.914 S/m; ε_r = 40.166; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

Right Cheek Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.109 W/kg

Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.126 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.131 W/kg
SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.078 W/kg
Maximum value of SAR (measured) = 0.109 W/kg

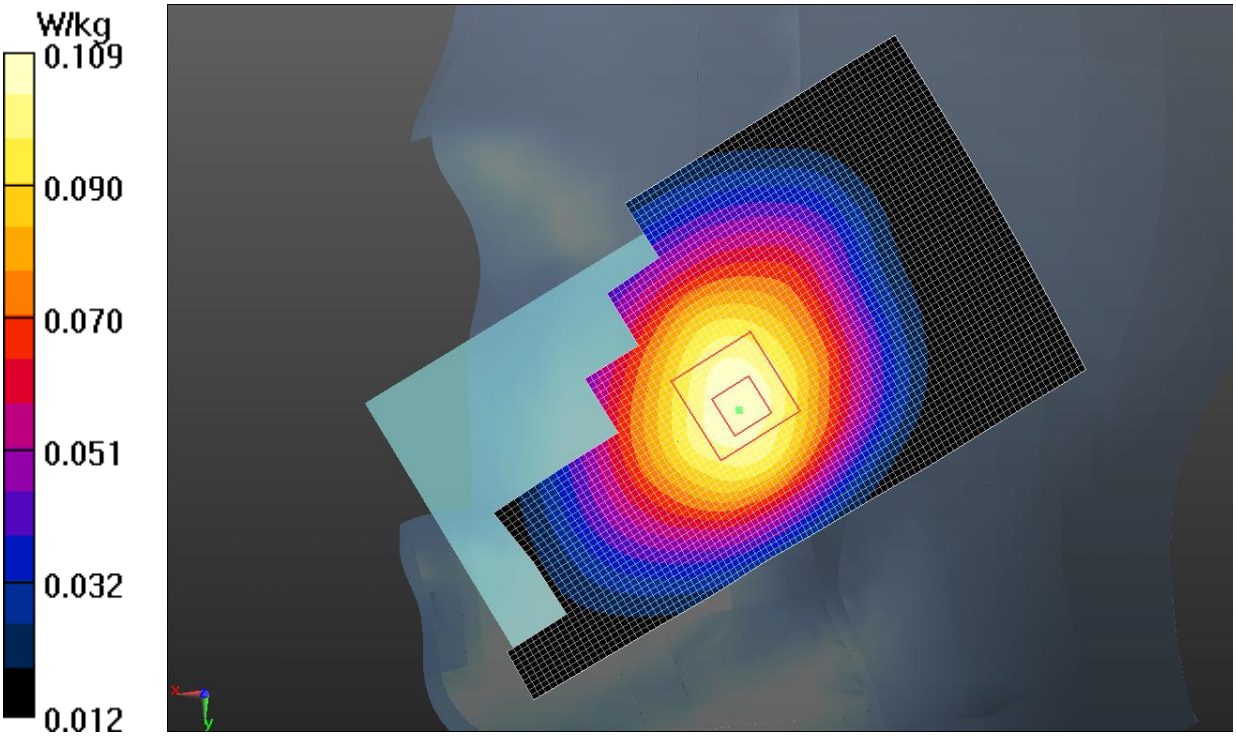

Fig.5 WCDMA 850 CH4132

©Copyright. All rights reserved by CTTL.

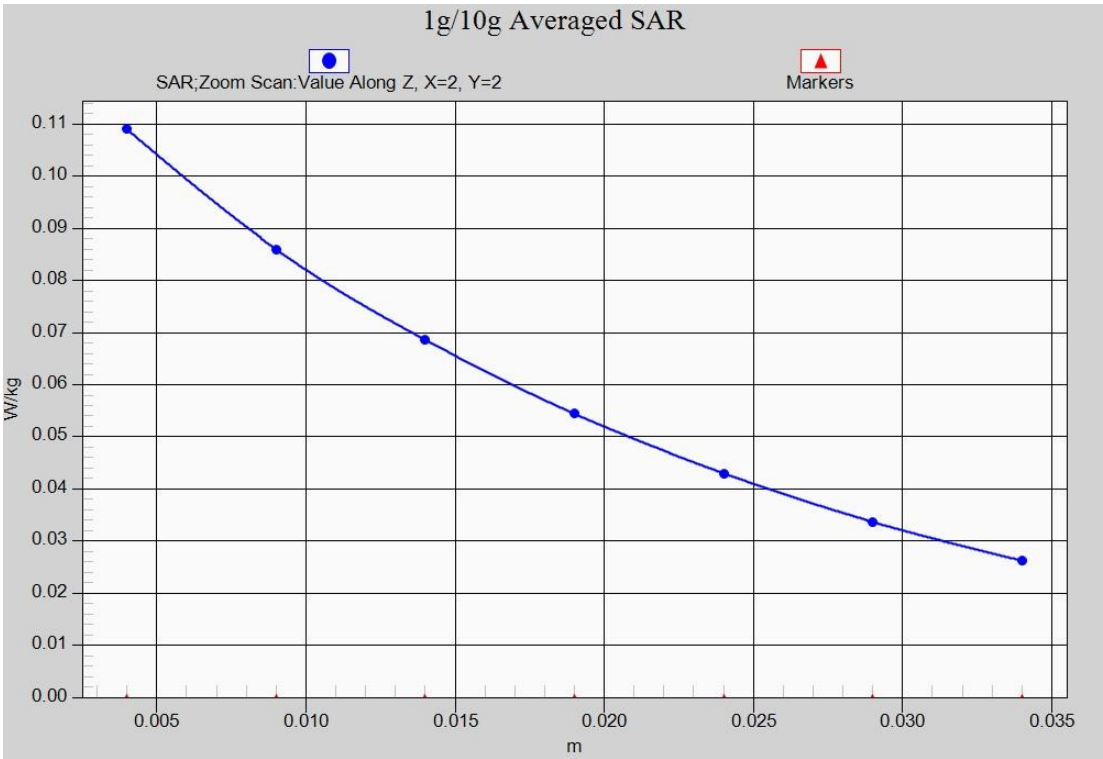

Fig.5-1 Z-Scan at power reference point (WCDMA 850 CH4132)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Body Rear Low

Date/Time: 2016-1-6
Electronics: DAE4 Sn786
Medium: 850Body MHz
Medium parameters used (interpolated): f = 826.4 MHz; σ = 0.961 S/m; ε_r = 53.553; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

Rear side Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.171 W/kg

Rear side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.988 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.197 W/kg
SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.122 W/kg
Maximum value of SAR (measured) = 0.167 W/kg

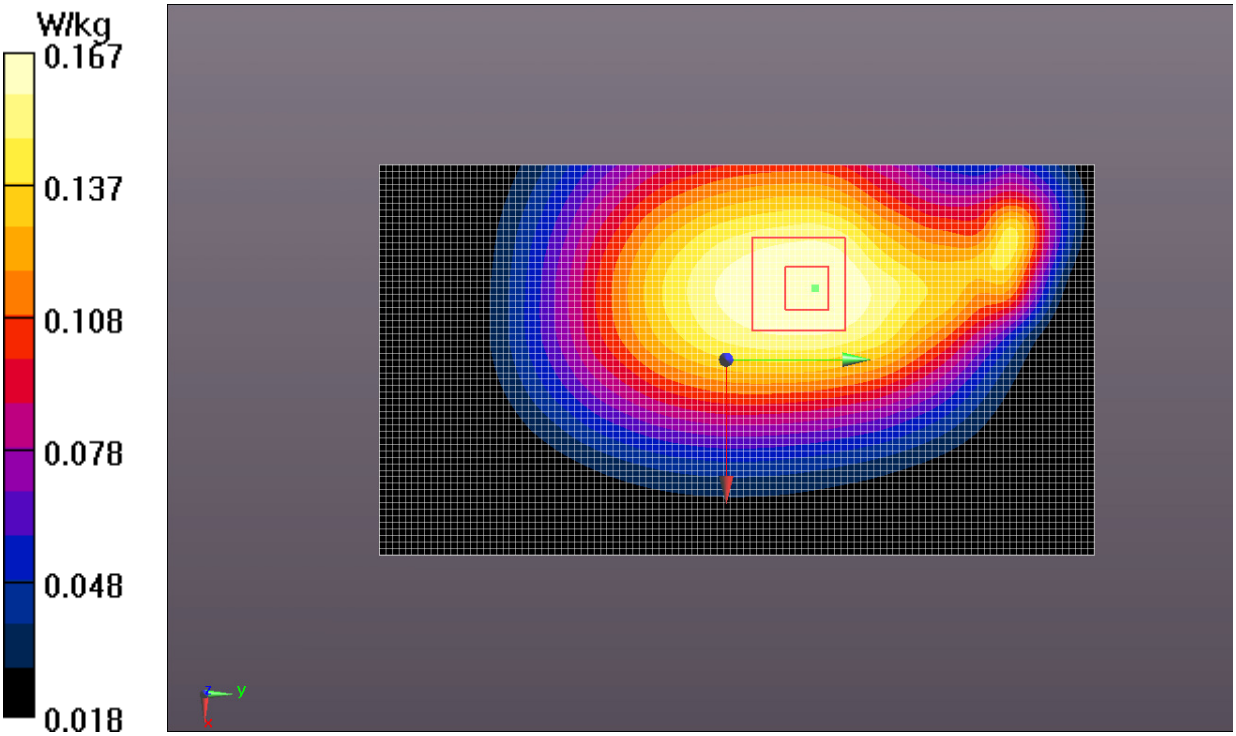

Fig.6 WCDMA 850 CH4128

©Copyright. All rights reserved by CTTL.

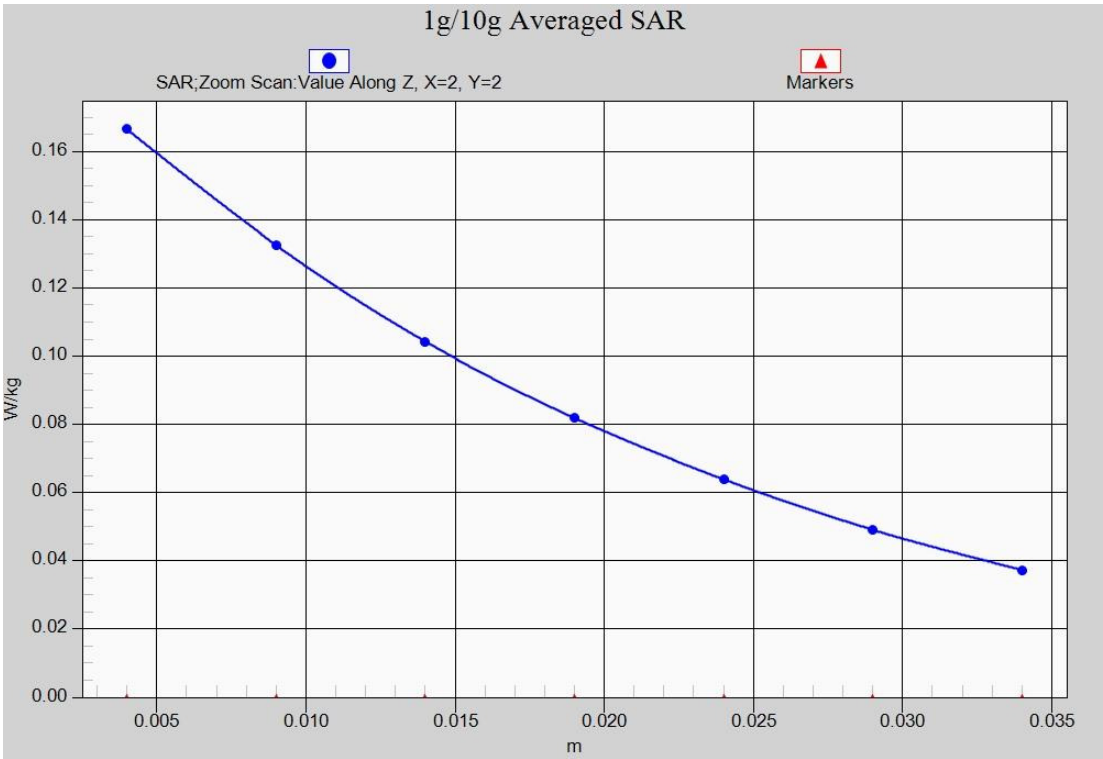

Fig.6-1 Z-Scan at power reference point (WCDMA850 CH4128)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Left Cheek High

Date/Time: 2016-1-12
Electronics: DAE4 Sn786
Medium: 1900 Head
Medium parameters used: f = 1908 MHz; σ = 1.414 S/m; ε_r = 38.304; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96); Calibrated: 2015-10-30

Left Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.425 W/kg

Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.336 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.600 W/kg
SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.228 W/kg
Maximum value of SAR (measured) = 0.411 W/kg

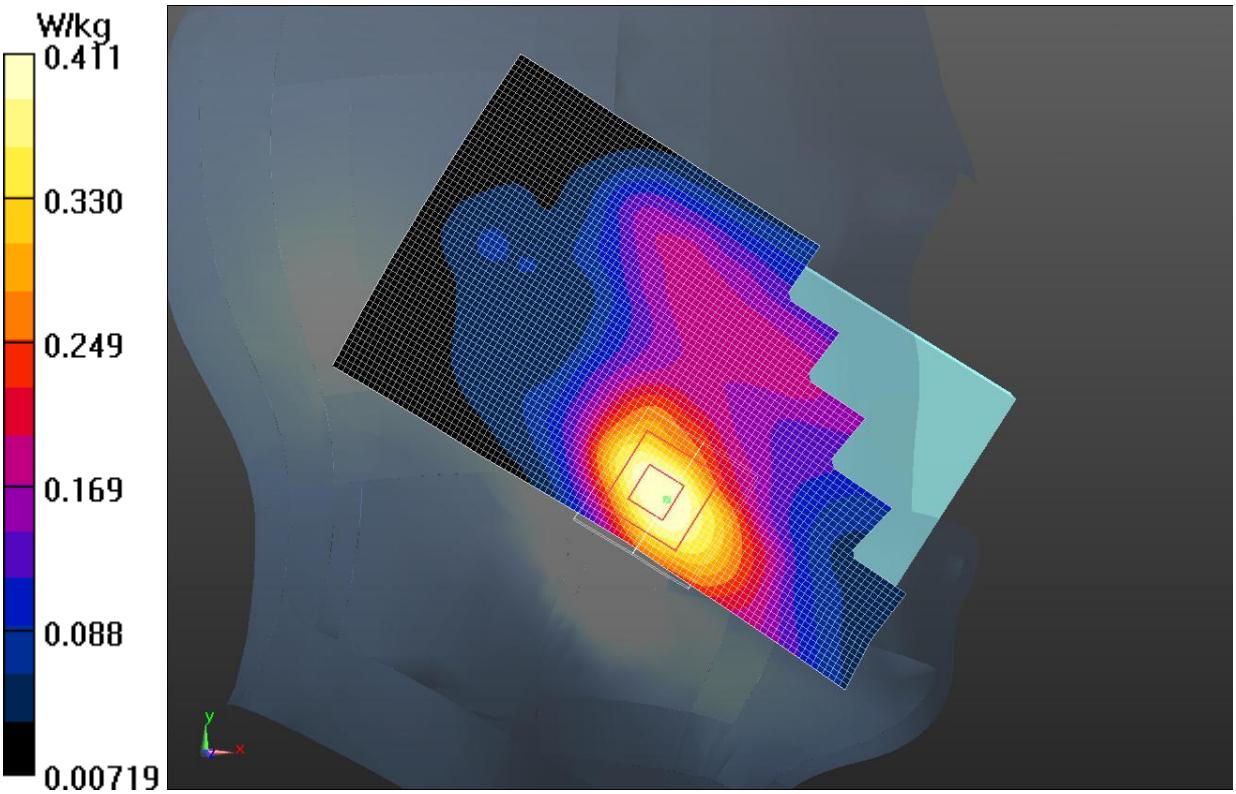

Fig.7 WCDMA1900 CH9538

©Copyright. All rights reserved by CTTL.

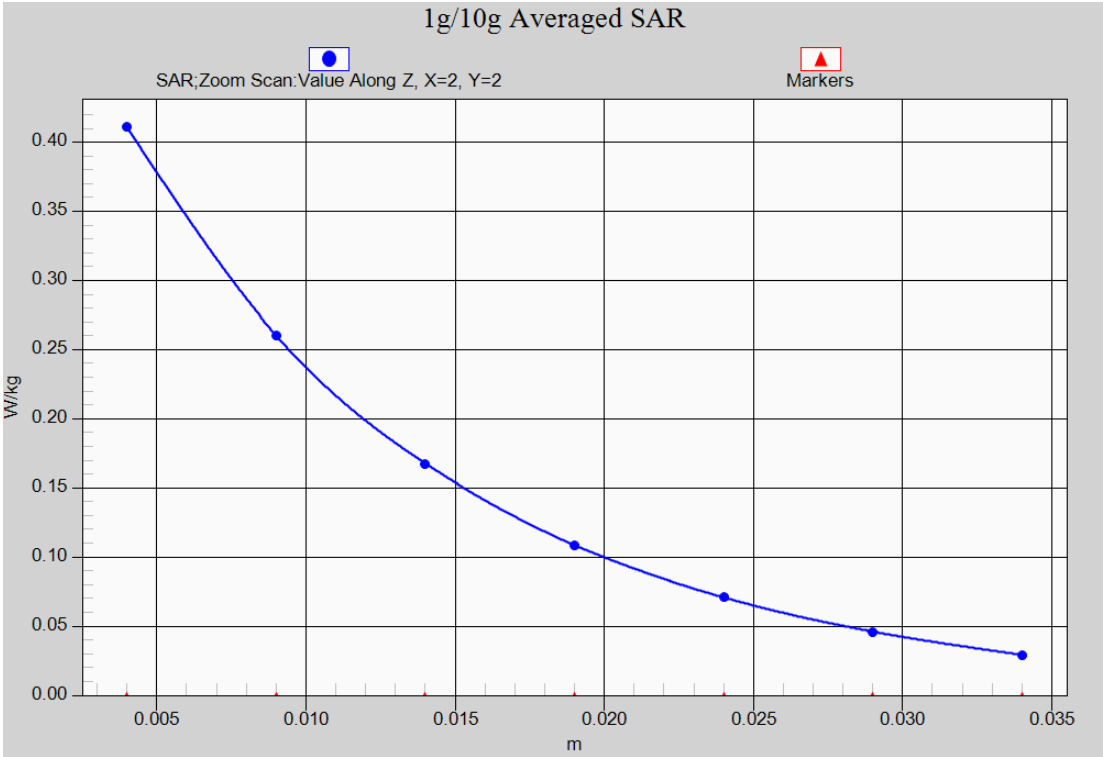

Fig.7-1 Z-Scan at power reference point (WCDMA1900 CH9538)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Body Rear side -AP ON

Date/Time: 2016-1-31
Electronics: DAE4 Sn786
Medium: 1900Body MHz
Medium parameters used: f = 1908 MHz; σ = 1.593 S/m; ε_r = 52.14; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

Bottom side High/Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Bottom side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.599 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.492 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

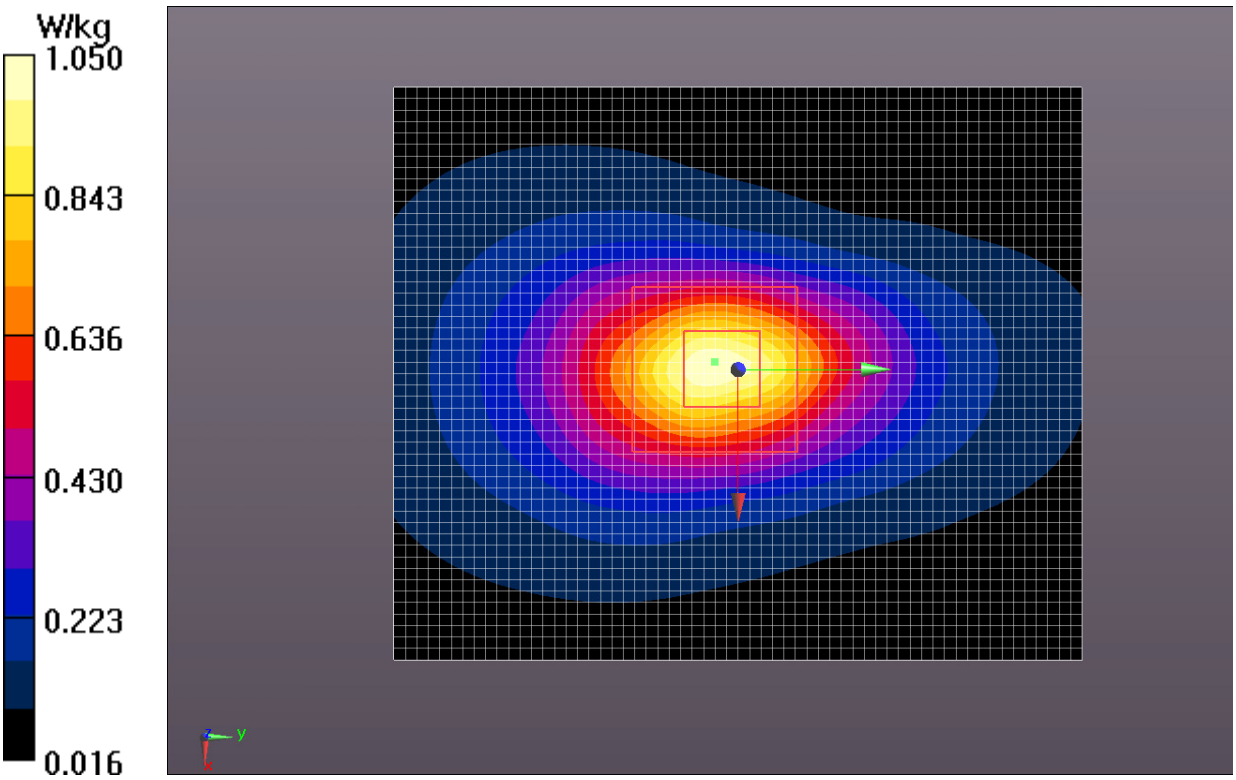

Fig.8 WCDMA1900 CH9538

©Copyright. All rights reserved by CTTL.

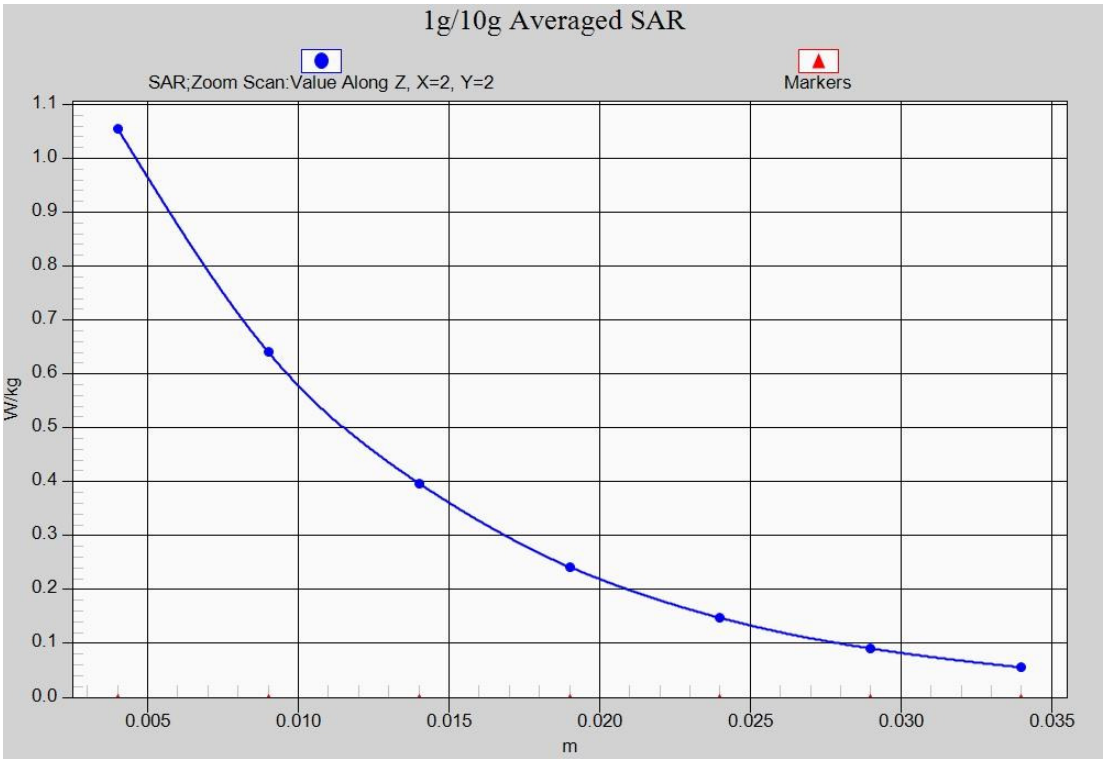

Fig.8-1 Z-Scan at power reference point (WCDMA1900 CH9538)

©Copyright. All rights reserved by CTTL.

WCDMA 1700 Right Cheek Middle

Date/Time: 2016-1-6
Electronics: DAE4 Sn786
Medium: Head 1800 MHz
Medium parameters used (interpolated): f = 1752.6 MHz; σ = 1.348 S/m; ε_r = 37.485; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(5.06, 5.06, 5.06);

Left Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.540 W/kg

Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.614 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.726 W/kg
SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.301 W/kg
Maximum value of SAR (measured) = 0.529 W/kg

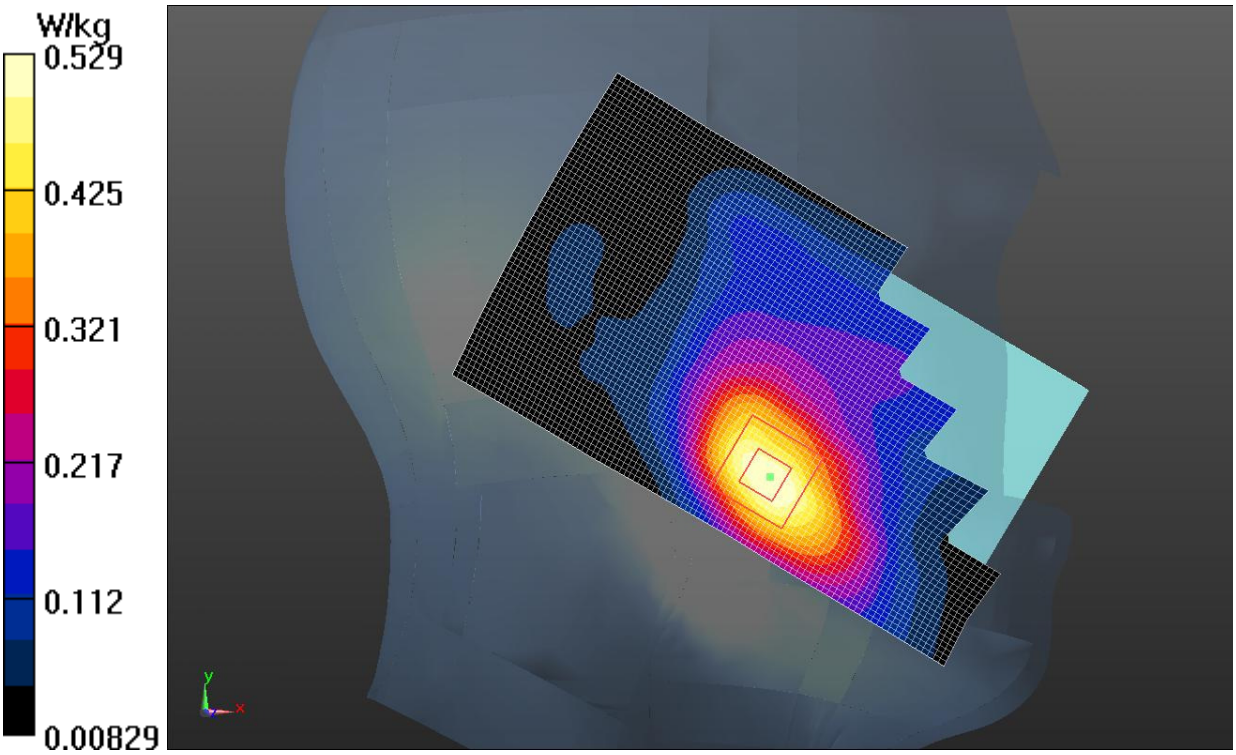

Fig.9 WCDMA1700

©Copyright. All rights reserved by CTTL.

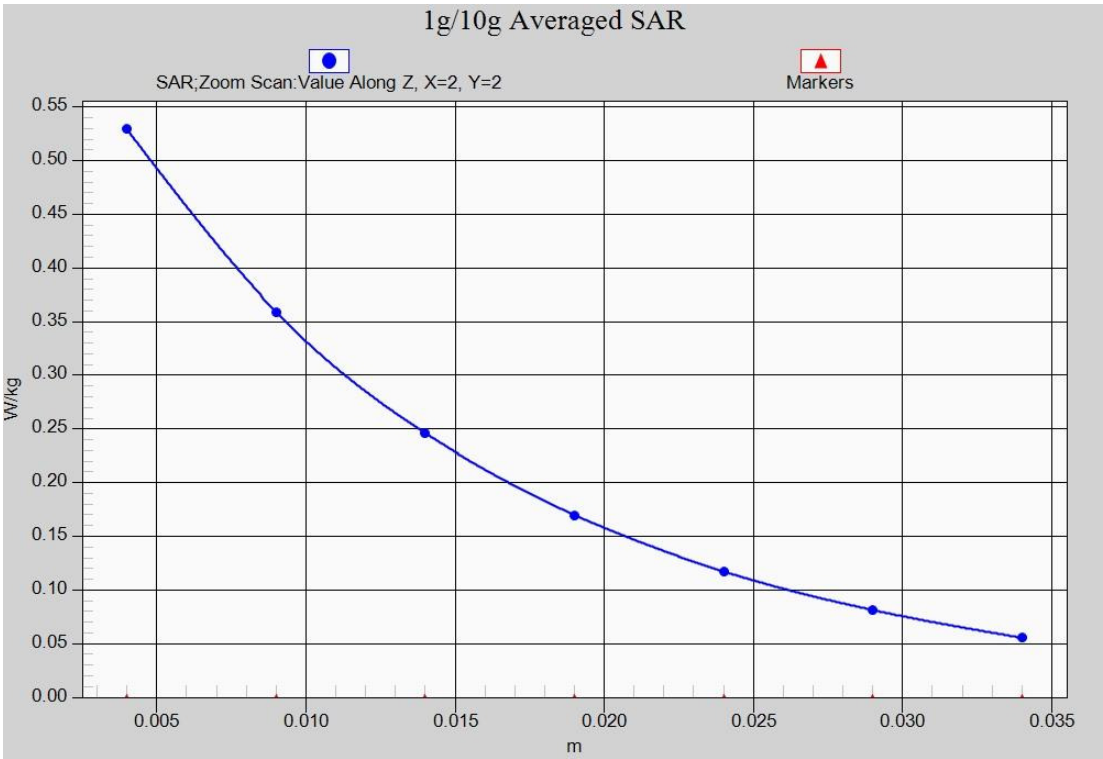

Fig.9-1 Z-Scan at power reference point (WCDMA1700)

©Copyright. All rights reserved by CTTL.

WCDMA 1700 Body Rear side -AP ON

Date/Time: 2016-1-7
Electronics: DAE4 Sn786
Medium: 1800Body
Medium parameters used (interpolated): f = 1752.6 MHz; σ = 1.441 S/m; ε_r = 52.405; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.75, 4.75, 4.75);

Bottom side High/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.905 W/kg

Bottom side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.437 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.456 W/kg
Maximum value of SAR (measured) = 0.948 W/kg

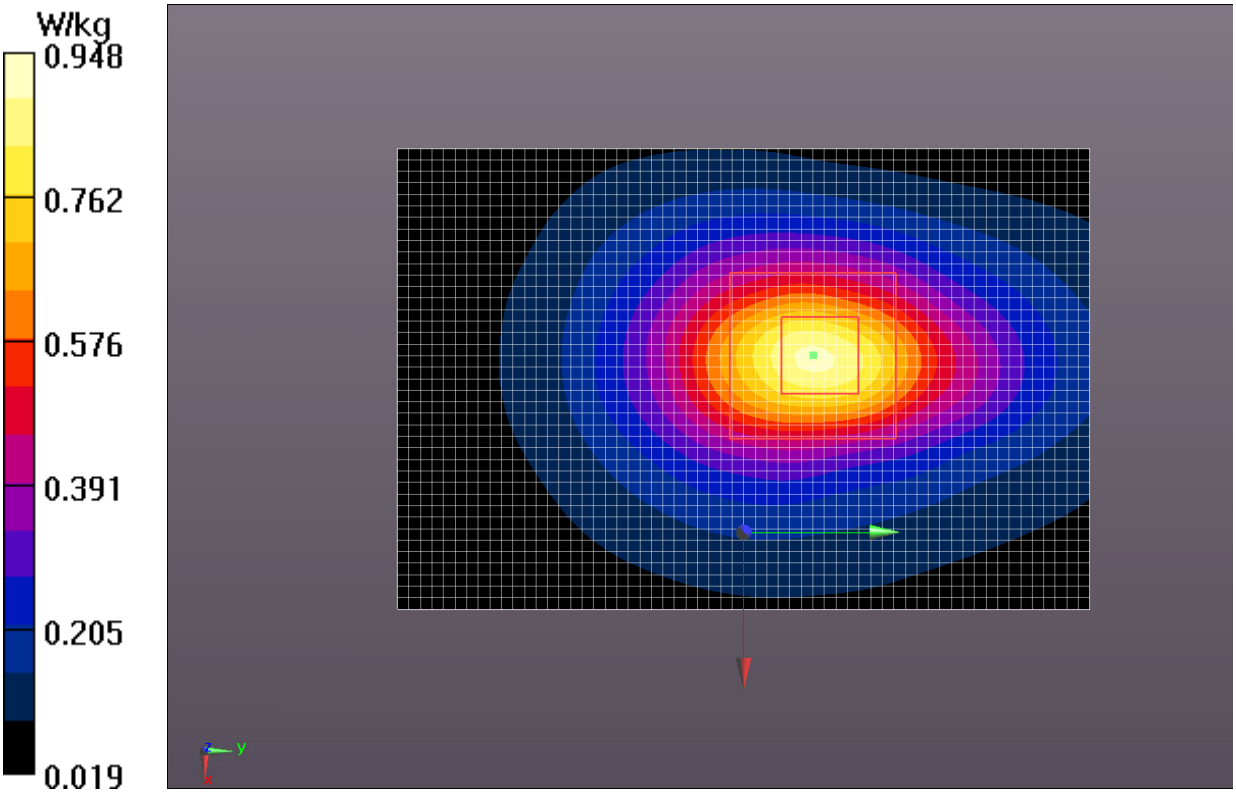

Fig.10 WCDMA1700

©Copyright. All rights reserved by CTTL.

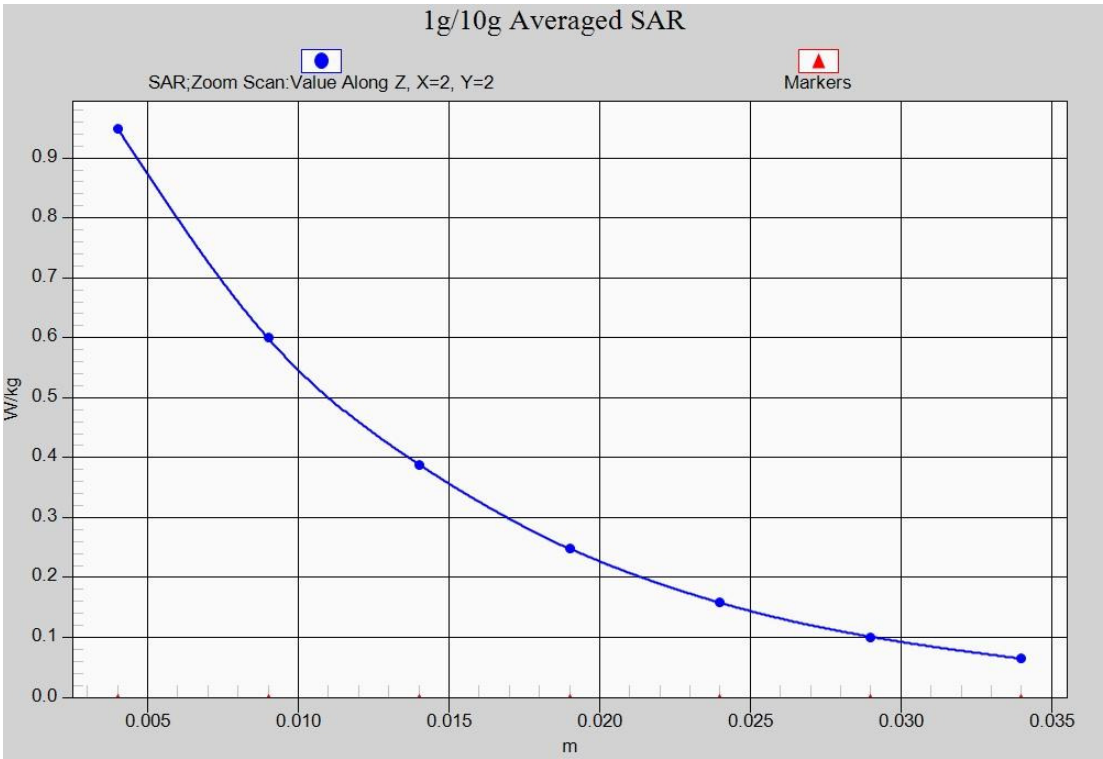

Fig.10-1 Z-Scan at power reference point (WCDMA1700)

©Copyright. All rights reserved by CTTL.

LTE Band 2 Left Cheek Low with QPSK_20MHz_1RB_ Low

Date/Time: 2016-1-12
Electronics: DAE4 Sn786
Medium: 1900 Head
Medium parameters used: f = 1860 MHz; σ = 1.425 S/m; ε_r = 40.861; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: LTE_FDD Frequency: 1860 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

Left Cheek Low_1RB_ Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.448 W/kg

Left Cheek Low_1RB_ Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.885 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.643 W/kg
SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.225 W/kg
Maximum value of SAR (measured) = 0.480 W/kg

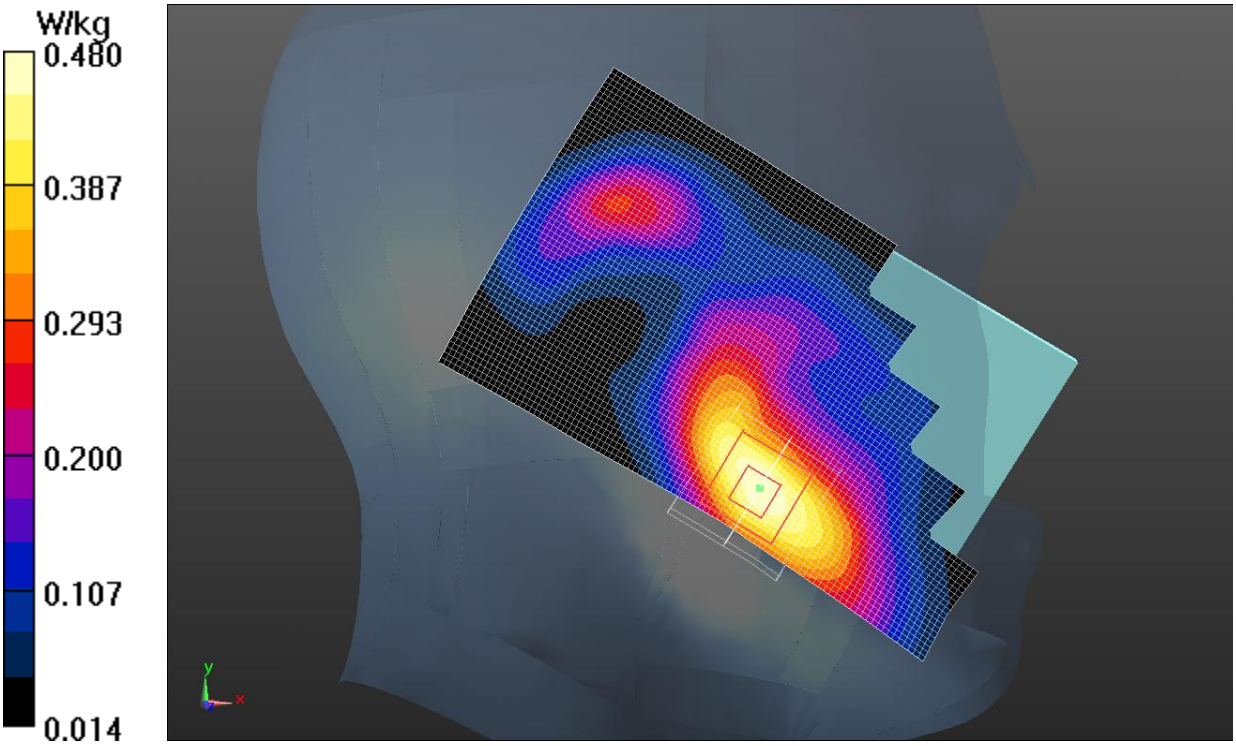

Fig.11 LTE Band 2 CH18700

©Copyright. All rights reserved by CTTL.

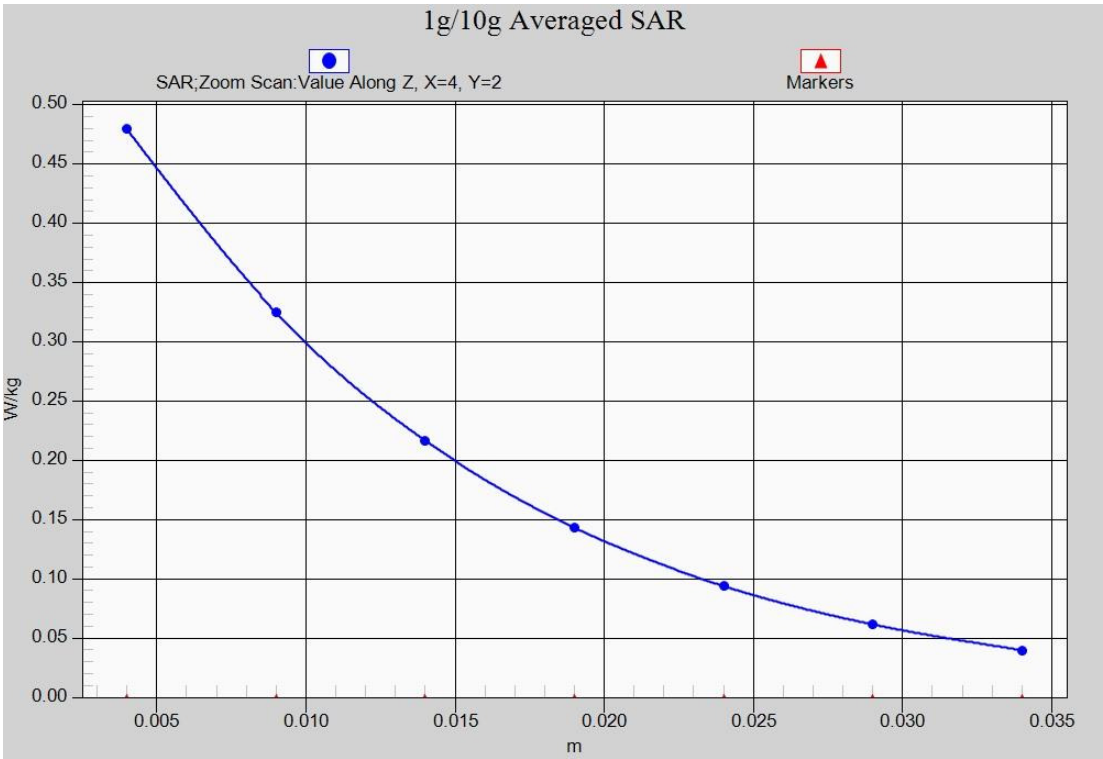

Fig.11-1 Z-Scan at power reference point (Band 2 CH18700)

©Copyright. All rights reserved by CTTL.

LTE Band 2 Body Rear low with QPSK_20MHz_1RB_ low

Date/Time: 2016-1-31
Electronics: DAE4 Sn786
Medium: 1900Body MHz
Medium parameters used: f = 1860 MHz; σ = 1.536 S/m; ε_r = 51.227; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: LTE_FDD Frequency: 1860 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

Bottom side Low 1BR_ Low/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Bottom side Low 1BR_ Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.507 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.497 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

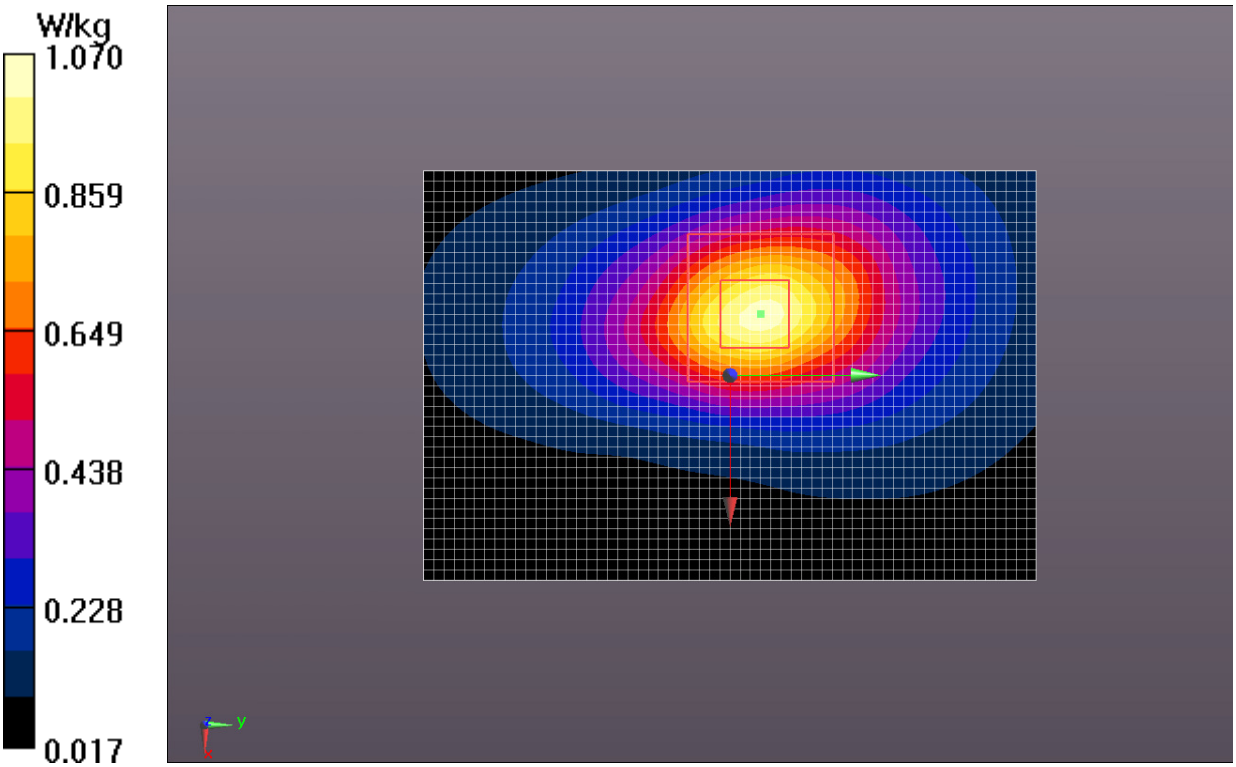

Fig.12 LTE Band 2 CH19100

©Copyright. All rights reserved by CTTL.

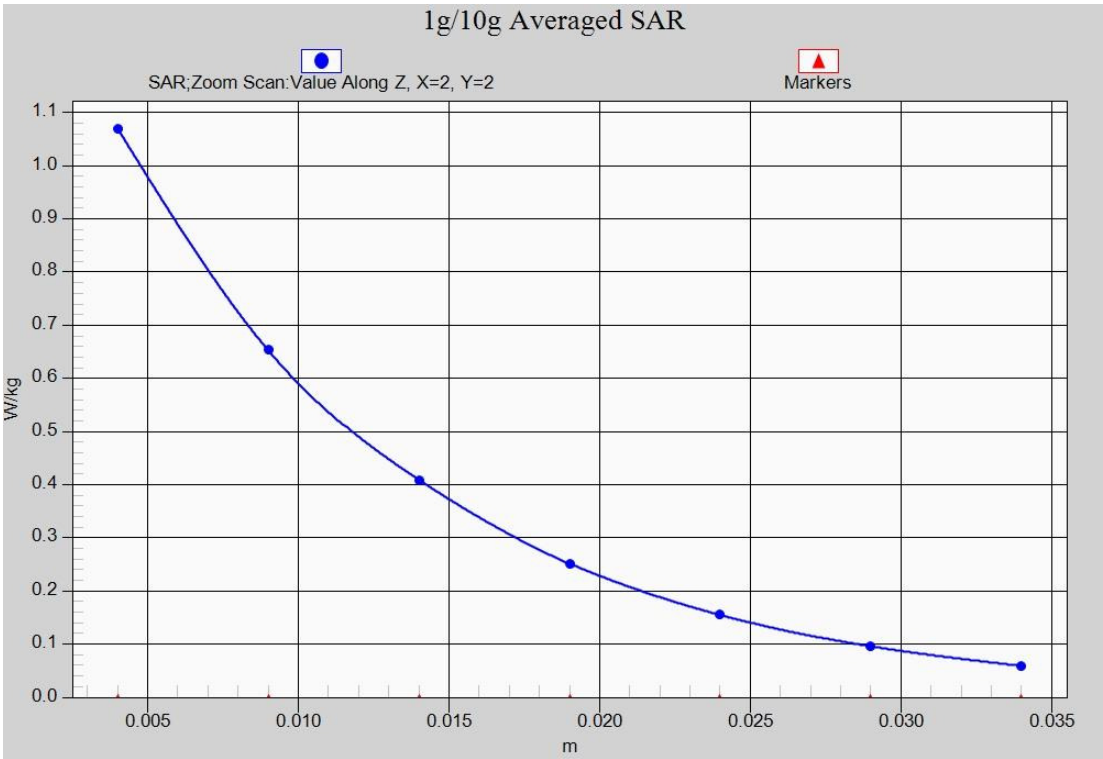

Fig.12-1 Z-Scan at power reference point (Band 2 CH19100)

©Copyright. All rights reserved by CTTL.

LTE Band 4 Left Cheek High with QPSK_20MHz_1RB_ High

Date/Time: 2016-1-6
Electronics: DAE4 Sn786
Medium: Head 1800 MHz
Medium parameters used (interpolated): f = 1745 MHz; σ = 1.341 S/m; ε_r = 37.513; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: LTE_FDD Frequency: 1745 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(5.06, 5.06, 5.06);

Left Cheek High_1RB_High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.437 W/kg

Left Cheek High_1RB_High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.349 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.645 W/kg
SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.260 W/kg
Maximum value of SAR (measured) = 0.447 W/kg

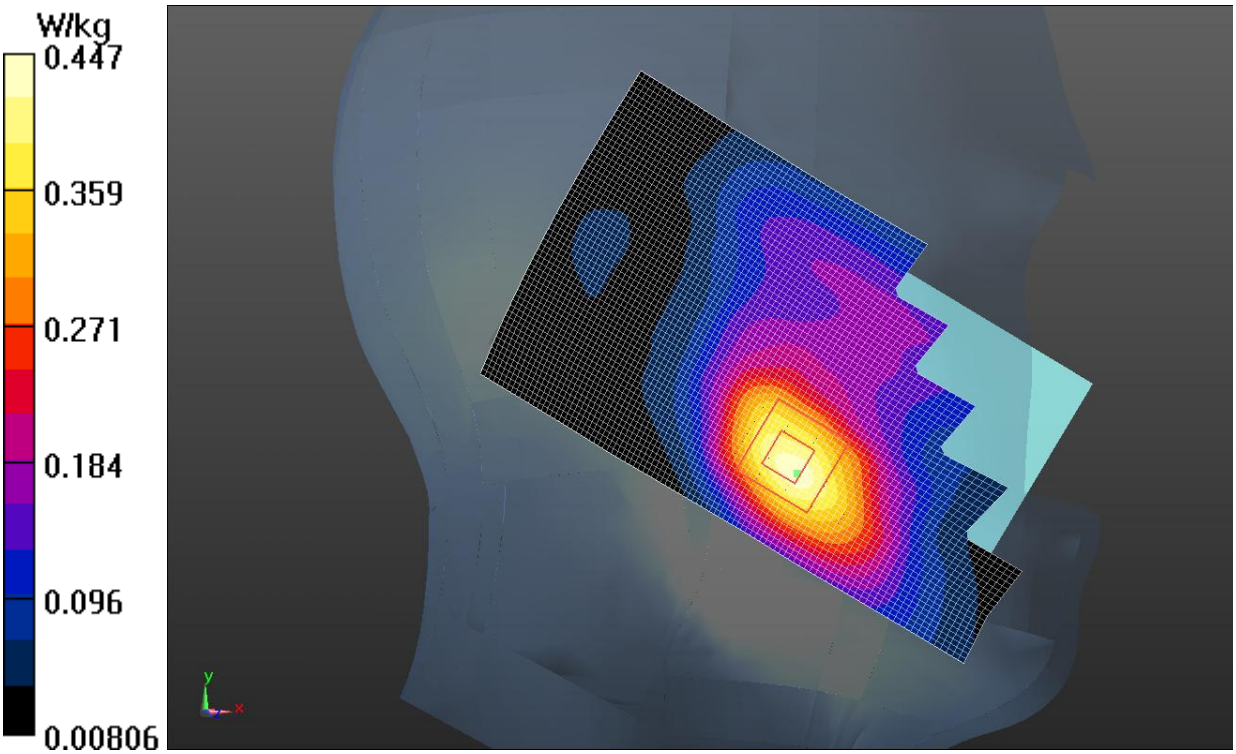

Fig.13 LTE Band4 CH20300

©Copyright. All rights reserved by CTTL.

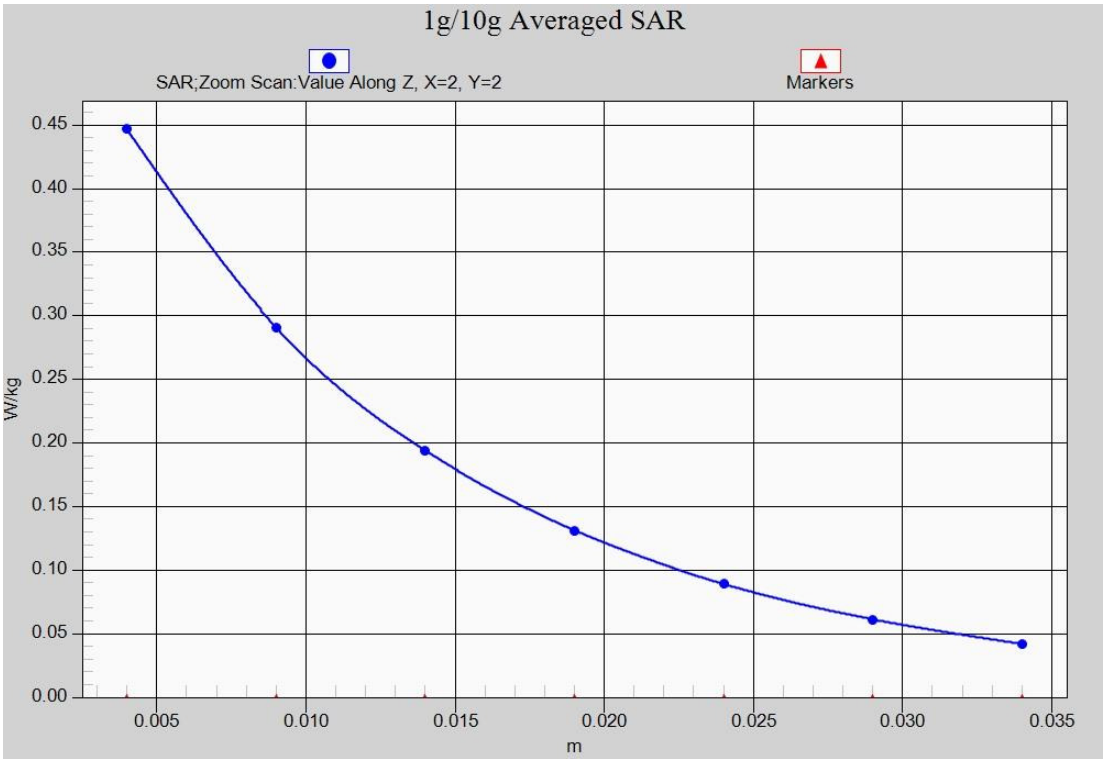

Fig.13-1 Z-Scan at power reference point (Band 4 CH20300)

©Copyright. All rights reserved by CTTL.

LTE Band 4 Body Rear High with QPSK_20MHz_1RB_ High -AP ON

Date/Time: 2016-1-7
Electronics: DAE4 Sn786
Medium: 1800Body MHz
Medium parameters used (interpolated): f = 1745 MHz; σ = 1.435 S/m; ε_r = 52.421; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: LTE_FDD Frequency: 1745 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(4.75, 4.75, 4.75);

Bottom side High 1BR_High/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.663 W/kg

Bottom side High 1BR_High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.356 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.354 W/kg
Maximum value of SAR (measured) = 0.702 W/kg

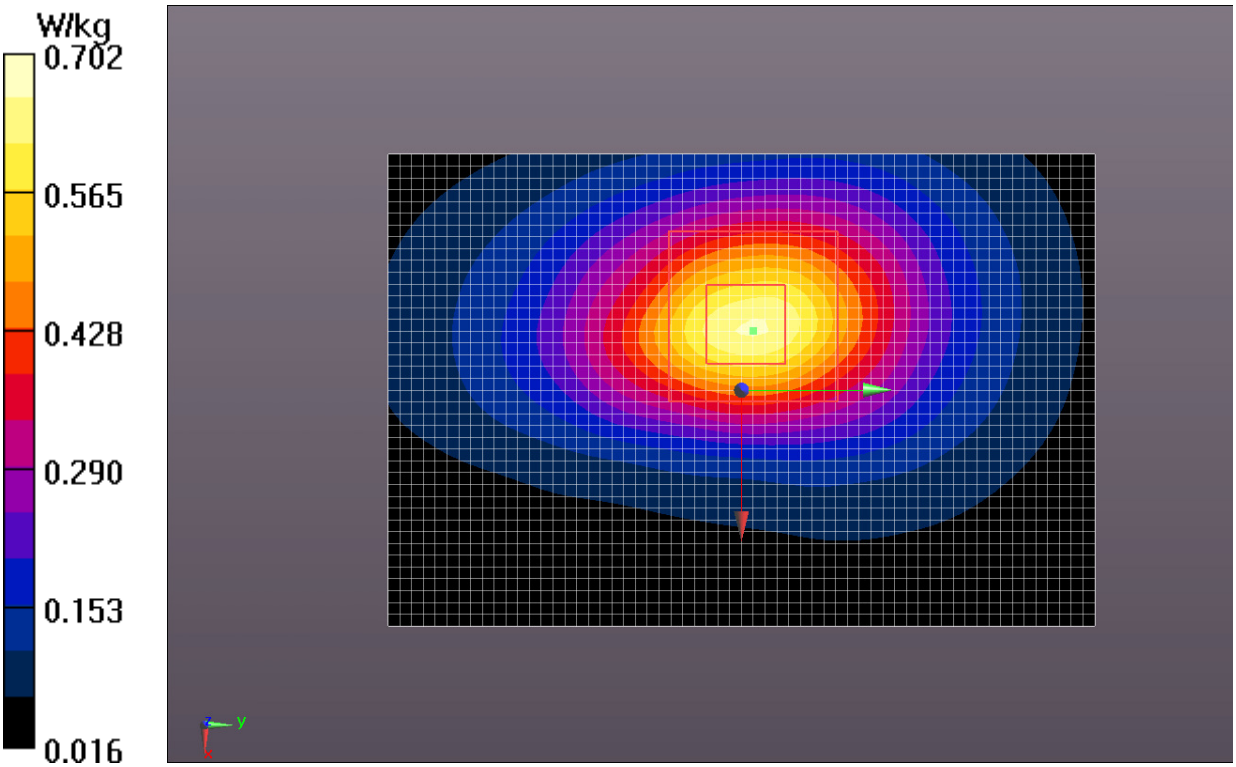

Fig.14 LTE Band 4 CH20300

©Copyright. All rights reserved by CTTL.

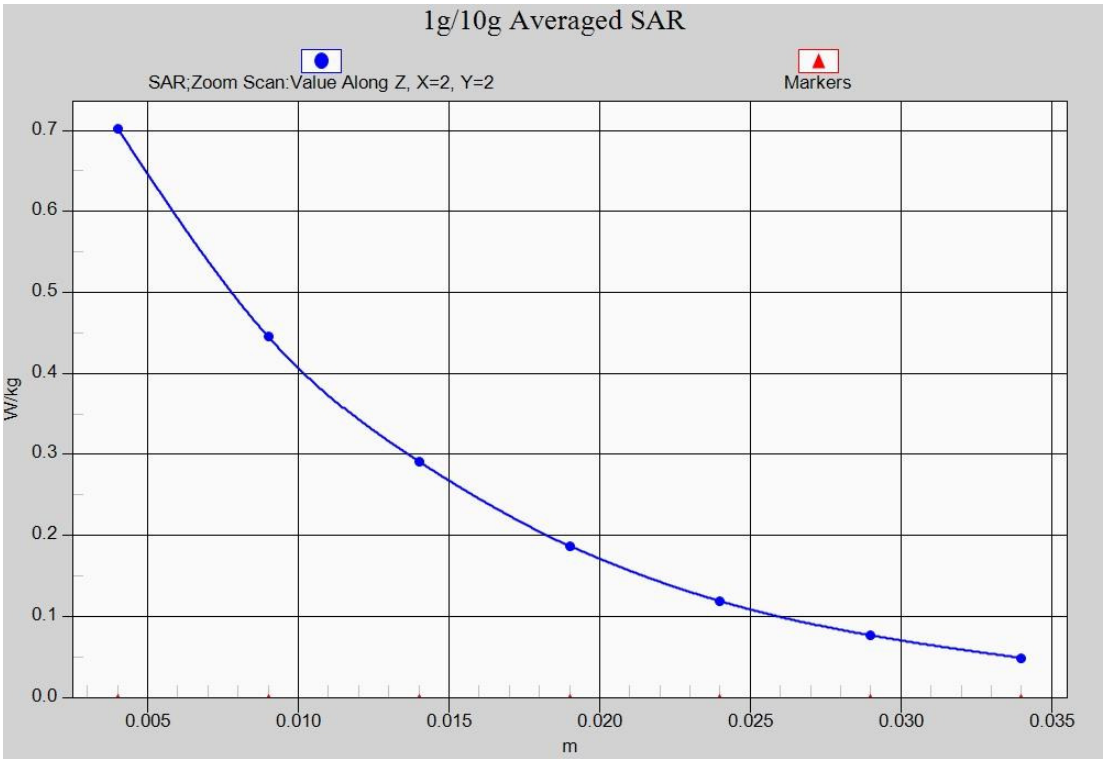

Fig.14-1 Z-Scan at power reference point (Band 4 CH20300)

©Copyright. All rights reserved by CTTL.

LTE Band 12 Left Cheek Low with QPSK_10MHz_1RB_ High

Date/Time: 2016-1-6
Electronics: DAE4 Sn786
Medium: Head 750 MHz
Medium parameters used (interpolated): f = 711 MHz; σ = 0.84 S/m; ε_r = 40.685; ρ = 1000 kg/m^3
Ambient Temperature:22.0°C Liquid Temperature:21.5°C
Communication System: LTE_FDD Frequency: 711 MHz Duty Cycle: 1:1
Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

Right Cheek High_1RB_High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.276 W/kg

Right Cheek High_1RB_High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.191 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.318 W/kg
SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.204 W/kg
Maximum value of SAR (measured) = 0.272 W/kg

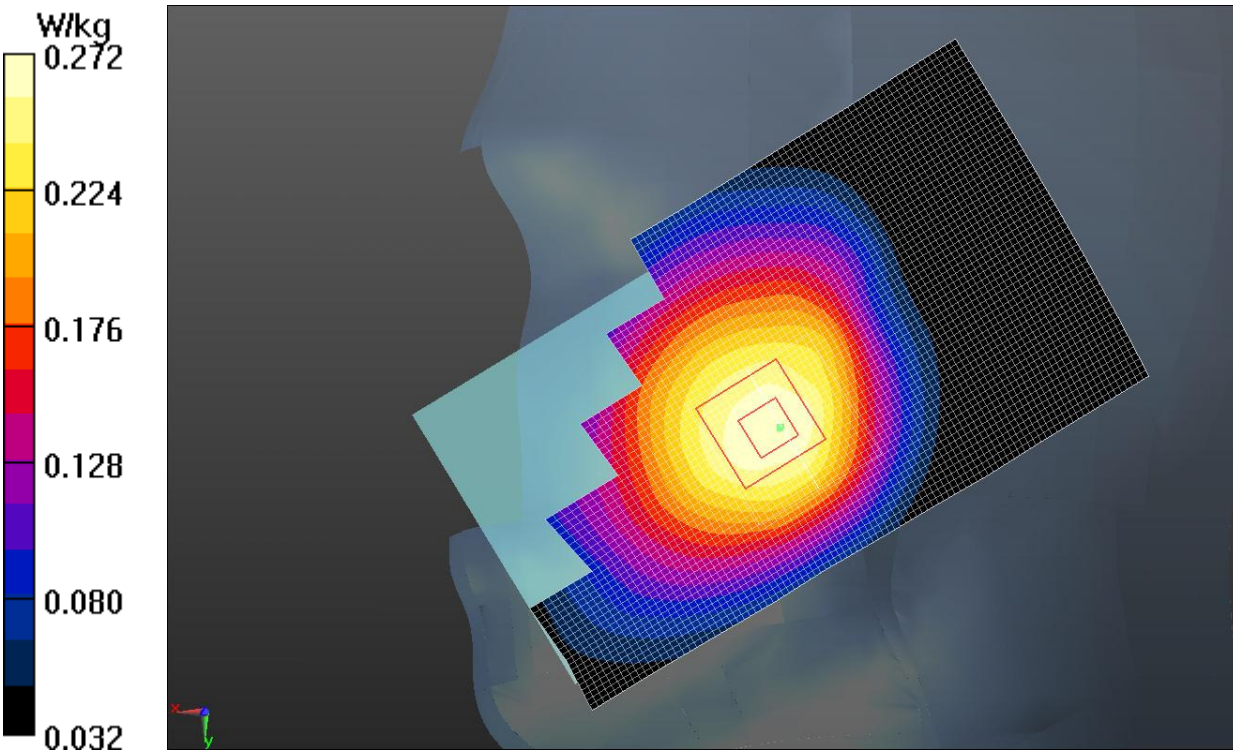

Fig.15 LTE Band 12

©Copyright. All rights reserved by CTTL.