

ISED CABid: ES1909

Test report No:

Lab. Company Number: 4621A

NIE: 74540RRF.002

## Test report

USA FCC Part 15.249, 15.209

CANADA RSS-210, RSS-Gen

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (*) Identification of item tested         | Powermeter for bikes                                                                                                                                                                                                                                                                                                                                                                                                            |
| (*) Trademark                             | ROTOR INspiderMTB                                                                                                                                                                                                                                                                                                                                                                                                               |
| (*) Model and /or type reference          | ROT118                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Other identification of the product       | FCC ID: R3AROT118<br>IC: 10992A-ROT118                                                                                                                                                                                                                                                                                                                                                                                          |
| (*) Features                              | Features: ANT+ and Bluetooth Smart<br>HW version: Rev C<br>SW version: 1.004                                                                                                                                                                                                                                                                                                                                                    |
| Applicant                                 | Rotor Componentes Tecnológicos S.L.<br>C/ Miño, 14<br>28864 Ajalvir, Madrid, SPAIN                                                                                                                                                                                                                                                                                                                                              |
| Test method requested, standard           | USA FCC Part 15.249 (10-1-21 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, 5725 - 5875 MHz, and 24.0 – 24.25 GHz.<br>USA FCC Part 15.209 (10-1-21 Edition): Radiated emission limits; general requirements.<br>CANADA RSS-210 Issue 10 (December 2019).<br>CANADA RSS-Gen Issue 5 Amendment 2 (February 2021).<br>ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices. |
| Summary                                   | IN COMPLIANCE                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Approved by (name / position & signature) | José Manuel Gómez Galván<br>EMC Consumer & RF<br>Lab. Manager<br> Firmado digitalmente por 53680346W JOSE MANUEL GOMEZ (C:A29507456)                                                                                                                                                                                                       |
| Date of issue                             | 2023-02-24                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Report template No                        | FDT08_24<br>(*) "Data provided by the client"                                                                                                                                                                                                                                                                                                                                                                                   |

# Index

Competences and guarantees .....3

General Conditions .....3

Uncertainty.....3

Data provided by the client .....3

Usage of samples .....4

Test sample description .....5

Identification of the client .....6

Testing period and place .....6

Document history .....6

Environmental conditions .....6

Remarks and comments.....7

Testing verdicts.....8

Summary .....8

Appendix A: Test results. ANT+ .....9

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General Conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a power meter for mountain bikes that gives the user data about power and cadence during a ride, among other information.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

| Id   | Control Number | Description            | Model  | Serial N° | Date of Reception | Application        |
|------|----------------|------------------------|--------|-----------|-------------------|--------------------|
| S/01 | 74540_8.1      | Powermeter             | ROT118 | 9994      | 2023-01-19        | Element Under Test |
| S/01 | 74540_5.1      | USB Cable              | --     | --        | 2023-01-19        | Element Under Test |
| S/02 | 74540_6.1      | Powermeter (conducted) | ROT118 | 9996      | 2023-01-19        | Element Under Test |
| S/02 | 74540_7.1      | Battery                | --     | --        | 2023-01-19        | Element Under Test |

Notes referenced to samples during the project:

| Id   | Type                           |
|------|--------------------------------|
| S/01 | Sample used for radiated test  |
| S/02 | Sample used for conducted test |

## Test sample description

|                                               |                                  |                                |                      |          |                                   |     |     |
|-----------------------------------------------|----------------------------------|--------------------------------|----------------------|----------|-----------------------------------|-----|-----|
| Ports.....:                                   | Port name and description        | Cable                          |                      |          |                                   |     |     |
|                                               |                                  | Specified max length [m]       | Attached during test | Shielded | Coupled to patient <sup>(3)</sup> |     |     |
|                                               | Charge                           |                                | [ ]                  | [ ]      | [ ]                               |     |     |
| .....                                         | .....                            | [ ]                            | [ ]                  | [ ]      |                                   |     |     |
| Supplementary information to the ports.....:  | Internal battery charge port.    |                                |                      |          |                                   |     |     |
| Rated power supply .....                      | Voltage and Frequency            |                                | Reference poles      |          |                                   |     |     |
|                                               |                                  |                                | L1                   | L2       | L3                                | N   | PE  |
|                                               | [ ]                              | AC: .....                      | [ ]                  | [ ]      | [ ]                               | [ ] | [ ] |
|                                               | [X]                              | DC: 3,7 V (internal battery)   |                      |          |                                   |     |     |
| Rated Power .....                             | 3 mW                             |                                |                      |          |                                   |     |     |
| Clock frequencies .....                       | 32 MHz                           |                                |                      |          |                                   |     |     |
| Other parameters.....:                        | .....                            |                                |                      |          |                                   |     |     |
| Software version .....                        | 1.004                            |                                |                      |          |                                   |     |     |
| Hardware version.....:                        | Rev C                            |                                |                      |          |                                   |     |     |
| Dimensions in cm (W x H x D).....:            | 115 x 115 x 10 mm                |                                |                      |          |                                   |     |     |
| Mounting position.....:                       | [ ]                              | Table top equipment            |                      |          |                                   |     |     |
|                                               | [ ]                              | Wall/Ceiling mounted equipment |                      |          |                                   |     |     |
|                                               | [ ]                              | Floor standing equipment       |                      |          |                                   |     |     |
|                                               | [ ]                              | Hand-held equipment            |                      |          |                                   |     |     |
|                                               | [X]                              | Other: Assembled on a bicycle. |                      |          |                                   |     |     |
| Modules/parts .....                           | Module/parts of test item        |                                | Type                 |          | Manufacturer                      |     |     |
|                                               | .....                            |                                | .....                |          | .....                             |     |     |
| Accessories (not part of the test item) ..... | Description                      |                                | Type                 |          | Manufacturer                      |     |     |
|                                               | Power cord                       |                                | Magnetic-USB         |          |                                   |     |     |
|                                               | .....                            |                                | .....                |          | .....                             |     |     |
| Documents as provided by the applicant.....:  | Description                      |                                | File name            |          | Issue date                        |     |     |
|                                               | Configuration Manual for testing |                                |                      |          |                                   |     |     |
|                                               | .....                            |                                | .....                |          | .....                             |     |     |

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

Rotor Componentes Tecnológicos S.L.  
C/ Miño, 14  
28864 Ajalvir, Madrid, SPAIN

## Testing period and place

|               |                                        |
|---------------|----------------------------------------|
| Test Location | DEKRA Testing and Certification S.A.U. |
| Date (start)  | 2023-01-23                             |
| Date (finish) | 2023-01-31                             |

## Document history

| Report number | Date       | Description   |
|---------------|------------|---------------|
| 74540RRF.002  | 2023-02-24 | First release |

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

In the semianechoic chamber, the following limits were not exceeded during the test.

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

## Remarks and comments

The tests have been performed by the technical personnel: Daniel Mejías and Victoria Olmedo.

Used instrumentation:

| Control No. | Equipment                                  | Model           | Manufacturer                | Next Calibration |
|-------------|--------------------------------------------|-----------------|-----------------------------|------------------|
| 8130        | SEMIANECHOIC ABSORBER LINED CHAMBER        | P29419          | ALBATROSS PROJECTS GMBH     | N/A              |
| 8134        | SHIELDED ROOM                              | P29419          | ALBATROSS PROJECTS GMBH     | N/A              |
| 6165        | EMI TEST RECEIVER 9kHz-7GHz                | ESR7            | ROHDE AND SCHWARZ           | 2023-11-08       |
| 7826        | ULTRALOG ANTENNA 30MHz-6GHz                | HL562E_UPG      | ROHDE AND SCHWARZ           | 2026-01-13       |
| 7769        | PREAMPLIFIER 30dB 500MHz-18GHz             | BBV 9718 C      | SCHWARZBECK                 | 2023-03-25       |
| 7763        | HORN ANTENNA 1-18GHz                       | BBHA 9120D      | SCHWARZBECK MESS-ELEKTRONIK | 2026-01-16       |
| 6495        | HORN ANTENNA 18-40GHz                      | BBHA 9170       | SCHWARZBECK                 | 2024-03-19       |
| 7862        | PRE-AMPLIFIER G>30dB 18-40GHz              | BLMA 1840-3G    | BONN ELEKTRONIK             | 2023-02-15       |
| 4848        | SOFTWARE FOR EMC/RF TESTING                | EMC32           | ROHDE AND SCHWARZ           | N/A              |
| 8661        | SHIELDED ROOM                              | --              | SIEPEL                      | N/A              |
| 6158        | SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz    | FSV40           | ROHDE AND SCHWARZ           | 2023-10-22       |
| 7796        | EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz | OSP-B157Wx      | ROHDE AND SCHWARZ           | 2024-03-16       |
| 8848        | OPEN SWITCH UNIT UP TO 7.5 GHz             | OSP-B157W8 PLUS | ROHDE AND SCHWARZ           | 2024-12-21       |
| 7798        | SOFTWARE FOR EMC/RF TESTING                | WMS32           | ROHDE AND SCHWARZ           | N/A              |

## Testing verdicts

|                 |     |
|-----------------|-----|
| Not applicable: | N/A |
| Pass:           | P   |
| Fail:           | F   |
| Not measured:   | N/M |

## Summary

### ANT+

| FCC PART 15 PARAGRAPH / RSS-210                     |                                                            |         |        |
|-----------------------------------------------------|------------------------------------------------------------|---------|--------|
| Requirement – Test case                             |                                                            | Verdict | Remark |
| 15.249 (a) / RSS-210 B.10 (a)                       | Field strength of fundamental and harmonic emissions       | P       | --     |
| 15.249 (d) / RSS-210 B.10 (b)                       | Emissions radiated outside of the specific frequency bands | P       | --     |
| <u>Supplementary information and remarks:</u> None. |                                                            |         |        |

## Appendix A: Test results. ANT+

|                                                                                                |    |
|------------------------------------------------------------------------------------------------|----|
| TEST CONDITIONS .....                                                                          | 11 |
| Occupied Bandwidth .....                                                                       | 14 |
| 15.249 (a) / RSS-210 B.10 (a) Field strength of fundamental and harmonics emissions .....      | 16 |
| 15.249 (d) / RSS-210 B.10 (b) Emissions radiated outside of the specific frequency bands ..... | 18 |

## TEST CONDITIONS

### POWER SUPPLY (V) and ANTENNA:

|                        |             |
|------------------------|-------------|
| V nominal:             | 3.7Vdc      |
| Type of Power Supply:  | Battery     |
| Type of Antenna:       | SMD passive |
| Declared Antenna Gain: | +3.7 dBi    |

### TEST FREQUENCIES:

|          |          |
|----------|----------|
| Channel: | 2457 MHz |
|----------|----------|

### POWER SETTING:

The next power setting was used to configure the sample for the tests:

|      |                          | Output Power |
|------|--------------------------|--------------|
| ANT+ | Middle Channel: 2457 MHz | -12dBm       |

## CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



## RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup  $f < 1$  GHz:

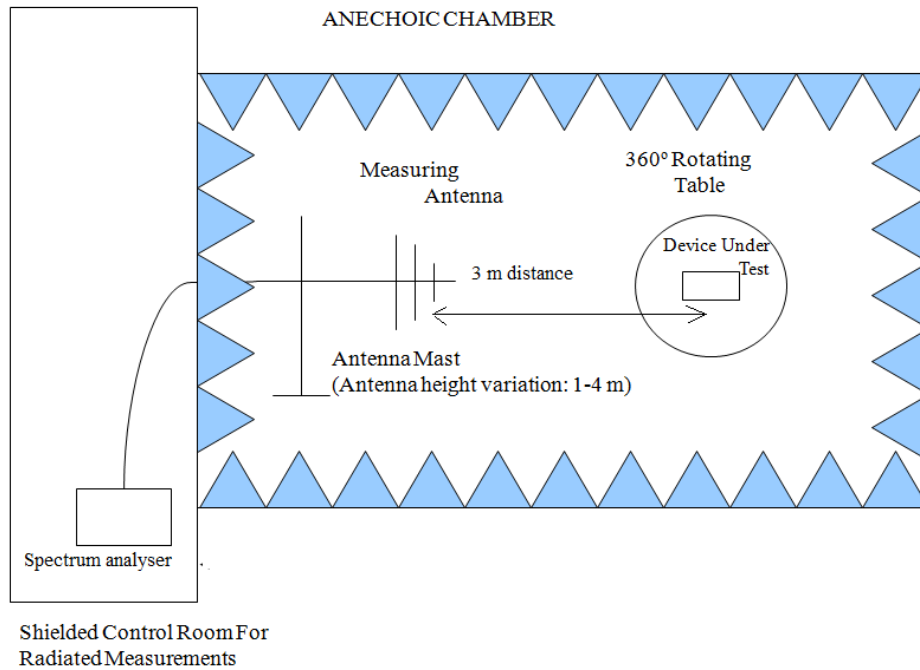

Radiated measurements setup from 1 GHz to 17 GHz:

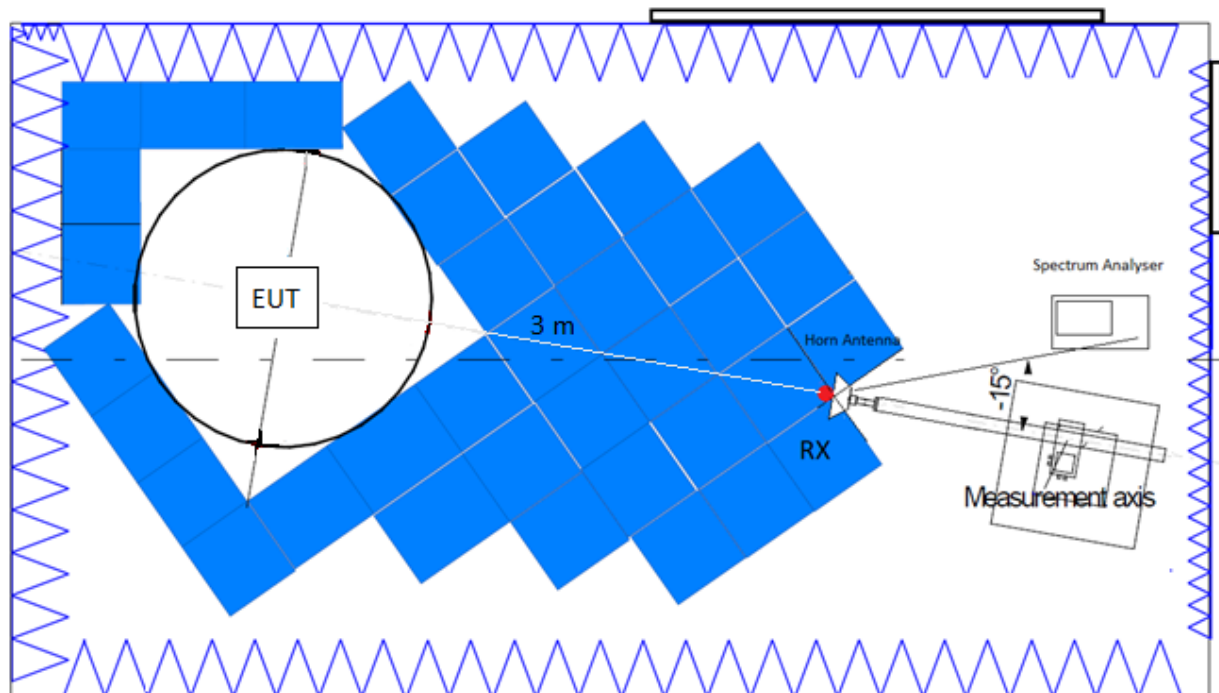

Radiated measurements setup  $f > 17$  GHz:

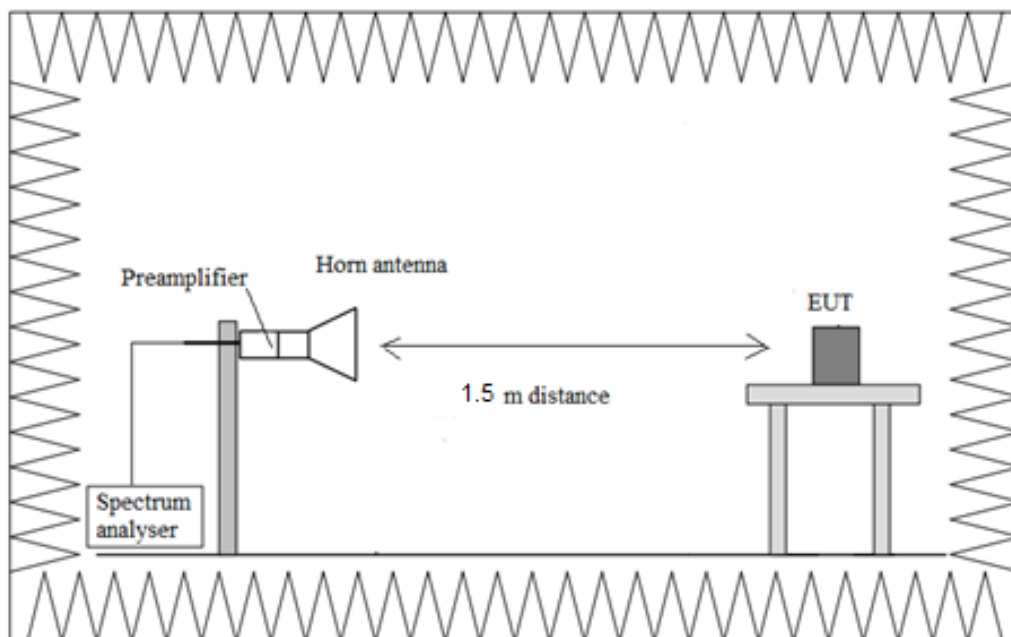



Occupied Bandwidth

RESULTS:

|                             | Channel<br>2457 MHz |
|-----------------------------|---------------------|
| 99% Bandwidth (MHz)         | 0.920               |
| Measurement Uncertainty (%) | < 1.17              |

Verdict: Pass

99 % Bandwidth

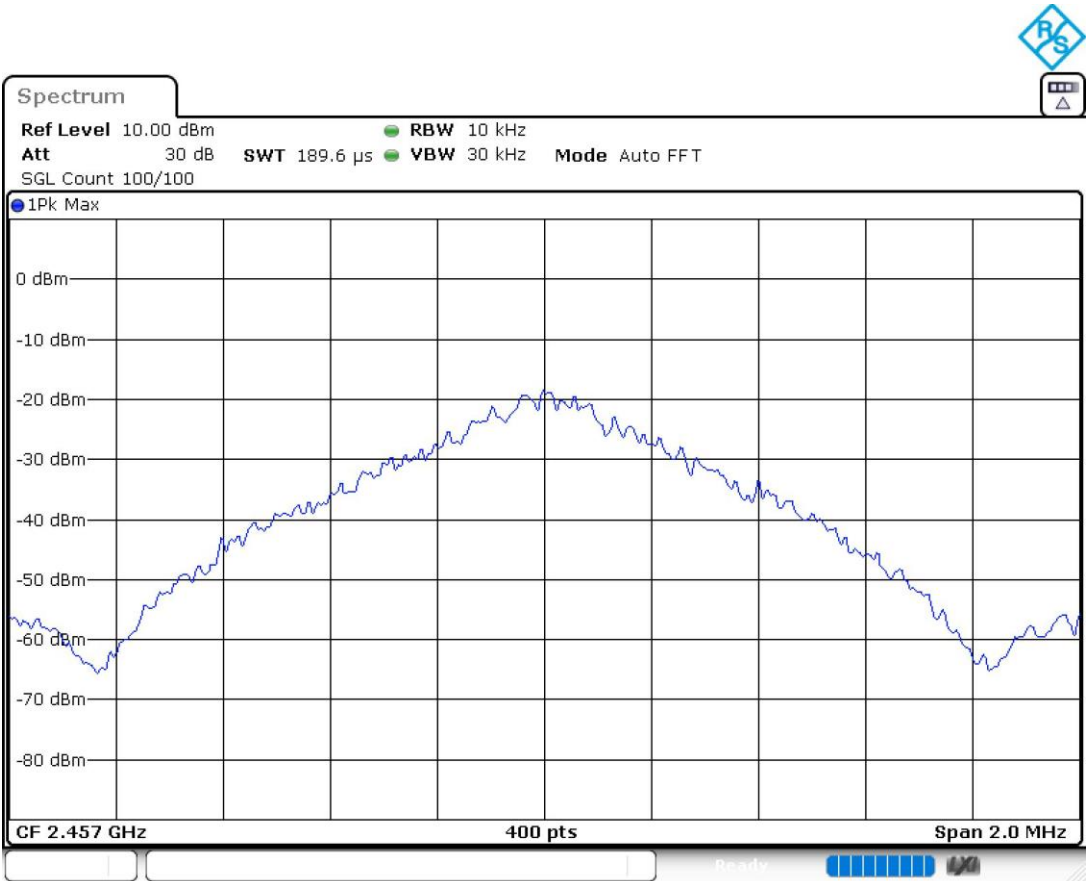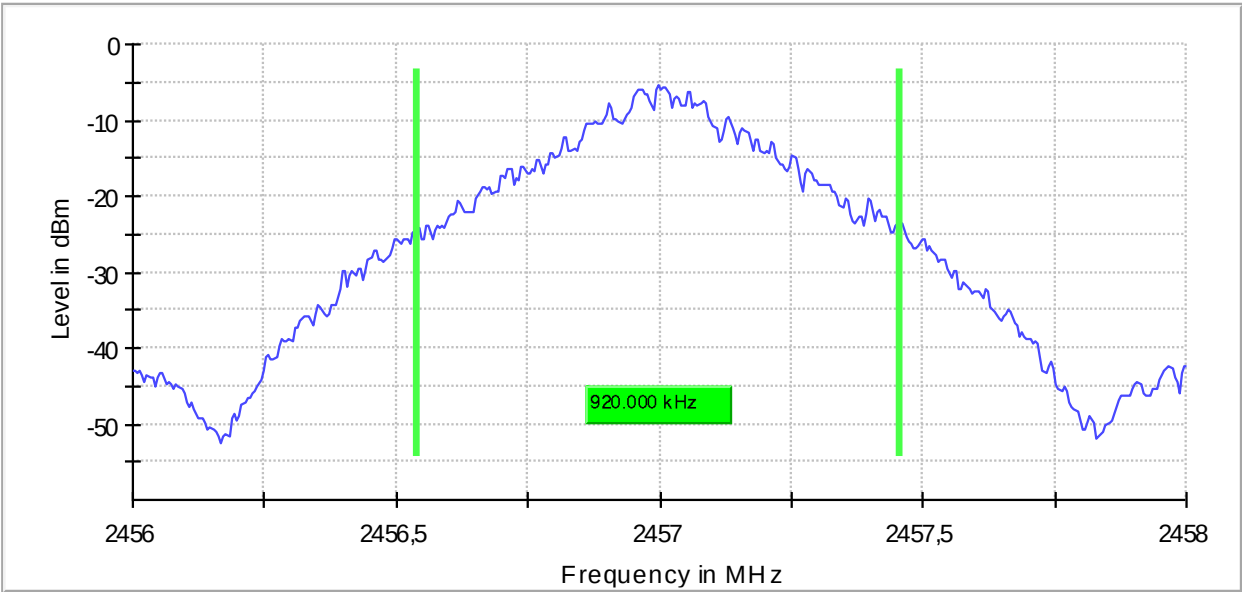

## 15.249 (a) / RSS-210 B.10 (a) Field strength of fundamental and harmonics emissions

### SPECIFICATION:

The field strength of emissions from intentional radiators shall comply with the following


| Fundamental frequency (MHz) | Field strength of fundamental (mV/m) | Field strength (dBμV/m) | Measurement distance (m) |
|-----------------------------|--------------------------------------|-------------------------|--------------------------|
| 902 - 928                   | 50                                   | 93.98                   | 3                        |
| 2400 – 2483.5               | 50                                   | 93.98                   | 3                        |
| 5725 - 5875                 | 50                                   | 93.98                   | 3                        |
| 24000-24250                 | 250                                  | 107.96                  | 3                        |

For frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### RESULTS:

|                                 | Channel<br>2457 MHz |
|---------------------------------|---------------------|
| Average Field Strength (dBμV/m) | 51.05               |
| Peak Field Strength (dBμV/m)    | 51.30               |
| Measurement Uncertainty (dB)    | ±4.32               |

Verdict: Pass

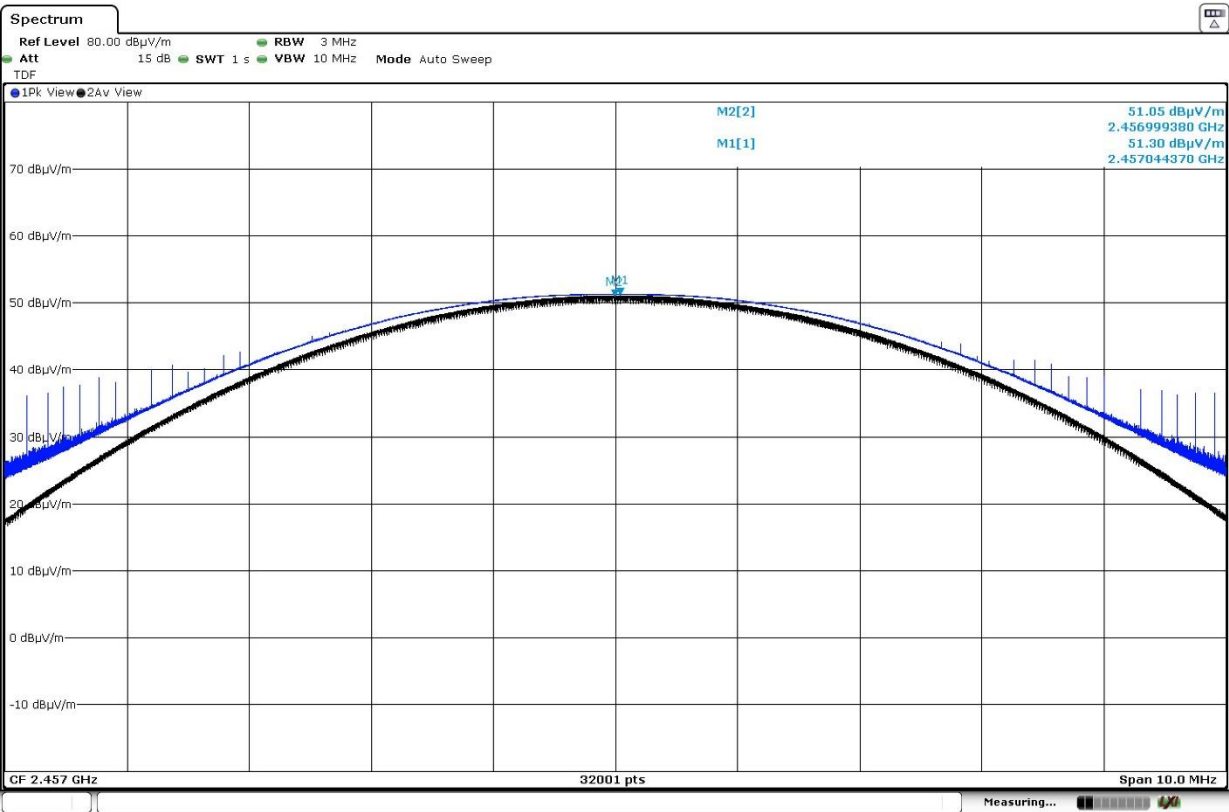

## 15.249 (d) / RSS-210 B.10 (b) Emissions radiated outside of the specific frequency bands

### SPECIFICATION:

The field strength of harmonics from intentional radiators shall comply with the following

| Fundamental frequency (MHz) | Field strength of harmonics ( $\mu\text{V/m}$ ) | Field strength of harmonics ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------------|-------------------------------------------------|----------------------------------------------------------|--------------------------|
| 902 - 928                   | 500                                             | 54                                                       | 3                        |
| 2400 – 2483.5               | 500                                             | 54                                                       | 3                        |
| 5725 - 5875                 | 500                                             | 54                                                       | 3                        |
| 24000-24250                 | 2500                                            | 67.96                                                    | 3                        |

Emissions radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits specified in section 15.209:

| Frequency Range (MHz) | Field strength ( $\mu\text{V/m}$ ) | Field strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------|------------------------------------|---------------------------------------------|--------------------------|
| 0.009-0.490           | $2400/F(\text{kHz})$               | -                                           | 300                      |
| 0.490-1.705           | $24000/F(\text{kHz})$              | -                                           | 30                       |
| 1.705 - 30.0          | 30                                 | -                                           | 30                       |
| 30 - 88               | 100                                | 40                                          | 3                        |
| 88 - 216              | 150                                | 43.5                                        | 3                        |
| 216 - 960             | 200                                | 46                                          | 3                        |
| 960 - 25000           | 500                                | 54                                          | 3                        |

Whichever is the lesser attenuation.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz:

No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty  $<\pm 4.94$  dB

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).


Spurious signals with peak levels above the average limit (54 dB $\mu$ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

| Spurious frequency (GHz) | Emission Level (dB $\mu$ V/m) | Polarization | Detector |
|--------------------------|-------------------------------|--------------|----------|
| 4.9140                   | 49.97                         | V            | Peak     |


Measurement Uncertainty:    1-3 GHz     $<\pm 4.01$  dB  
                                         3-17 GHz     $<\pm 4.28$  dB  
                                         17-26 GHz  $<\pm 4.89$  dB

Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz

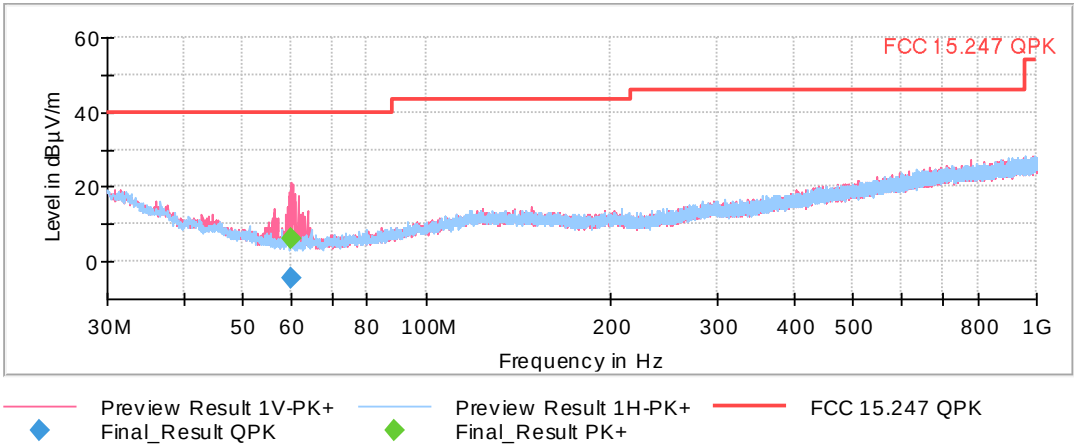


FREQUENCY RANGE 1 - 3 GHz

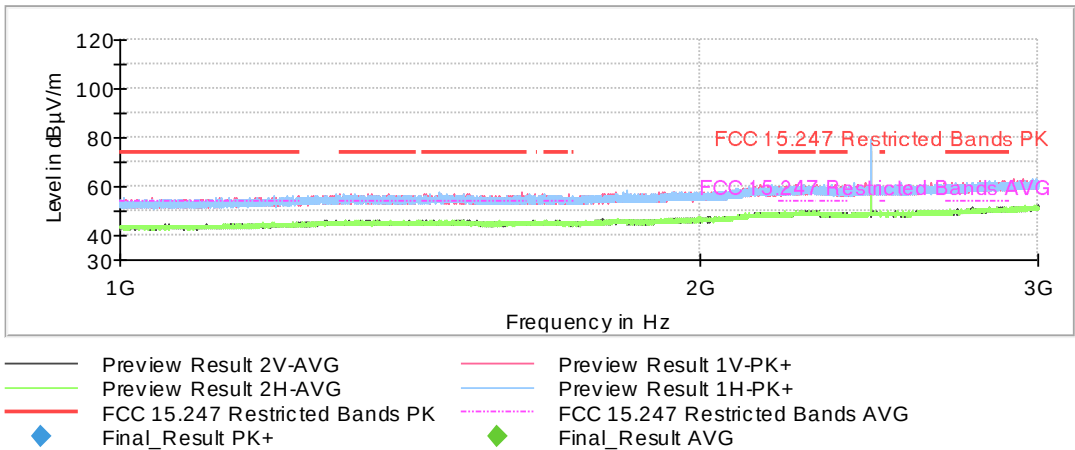


The peak above the limit is the carrier frequency.


## FREQUENCY RANGE 3 - 17 GHz

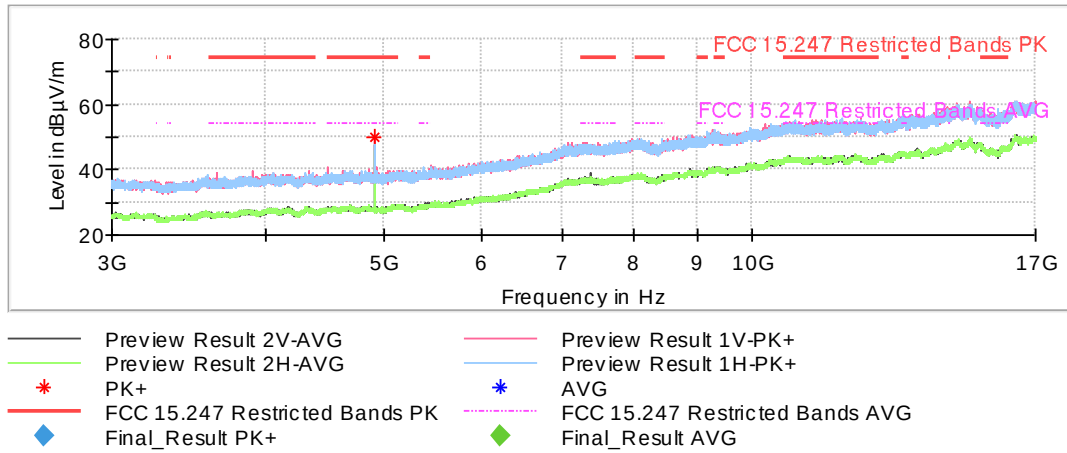

## FREQUENCY RANGE 17 - 26 GHz

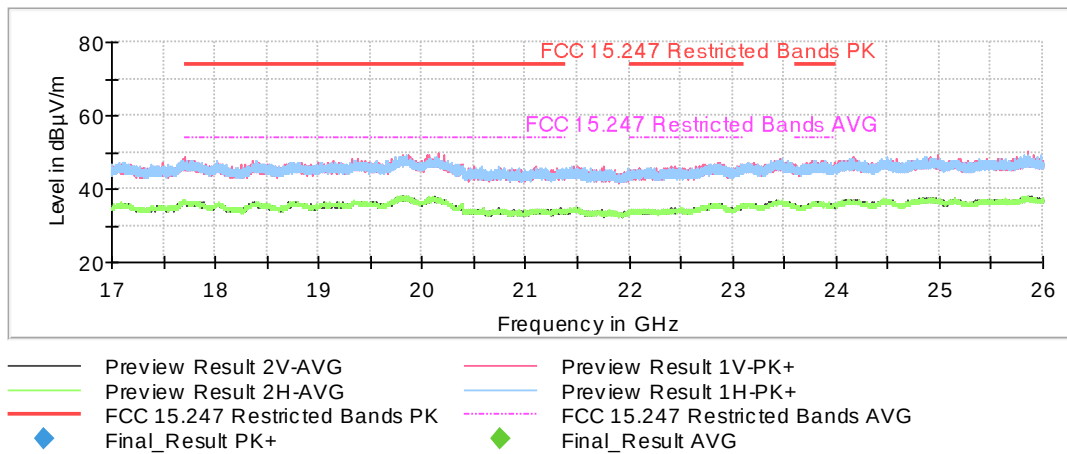

FREQUENCY RANGE 2.31-2.39 GHz

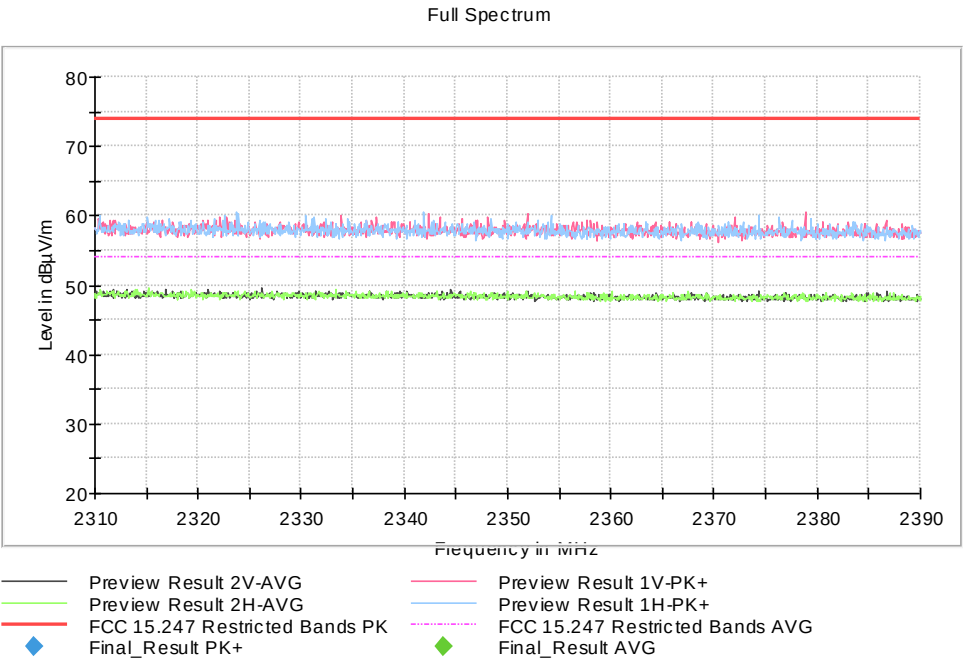

FREQUENCY RANGE 2.4835-2.5 GHz

