




**BUREAU  
VERITAS**

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

# Test Report

|                     |                                                                                                                              |
|---------------------|------------------------------------------------------------------------------------------------------------------------------|
| Report No           | EQ3095-1                                                                                                                     |
| Client              | Mobile Aspects Inc.                                                                                                          |
| Address             | 3700 S Water St<br>Ste 310<br>Pittsburgh, PA 15203                                                                           |
| Phone               | 412-325-1690                                                                                                                 |
| Items tested        | RFID Printer Module (M/N: IDIFC.M02)                                                                                         |
| FCC ID              | R4FIRISPRINT10                                                                                                               |
| FRN                 | 0010877447                                                                                                                   |
| Equipment Type      | Part 15 Low Power Communication Device Transmitter                                                                           |
| Equipment Code      | DXX                                                                                                                          |
| Emission Designator | 83K6A1D                                                                                                                      |
| FCC Rule Parts      | CFR Title 47 FCC Part 15.225, ISED Canada RSS-210 Issue 9 Annex B.6                                                          |
| Test Dates          | Nov 14 to 17 and Dec 3 to 9, 2016                                                                                            |
| Results             | As detailed within this report                                                                                               |
| Prepared by         | <br>Tuyen Truong – EMC Engineer           |
| Authorized by       | <br>Yunus Faziloglu – Sr. EMC Engineer    |
| Issue Date          | <u>3/6/2017</u>                                                                                                              |
| Conditions of Issue | This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 16 of this report |

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



**Curtis-Straus LLC, a wholly owned subsidiary of BV CPS**  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## Contents

|                                                    |    |
|----------------------------------------------------|----|
| Contents.....                                      | 2  |
| Summary.....                                       | 3  |
| Test Methodology.....                              | 4  |
| Compliance Statement.....                          | 5  |
| Product Tested - Configuration Documentation ..... | 6  |
| Test Results .....                                 | 7  |
| <i>Fundamental Emission</i> .....                  | 7  |
| <i>Radiated Spurious Emissions</i> .....           | 9  |
| <i>Frequency Tolerance</i> .....                   | 11 |
| <i>99% Occupied Bandwidth</i> .....                | 12 |
| <i>AC Line Conducted Emissions</i> .....           | 14 |
| Measurement Uncertainty.....                       | 15 |
| Conditions Of Testing.....                         | 16 |

Form Final Report REV 7-20-07 (DW)



## Summary

This test report supports an application for certification of a transmitter operating pursuant to CFR Title 47 FCC Part 15.225, ISSED Canada RSS-210 Issue 9 Annex B.6

The device under test is RFID Printer Module (M/N: IDIFC.M02) operating at 13.56MHz.

We found that the product met the above requirements with modifications as detail below:

- Ferrite was added on Serial cable (Fair-Rite VO sleeve, PN 0431164181, 1 loop).
- Ferrite was added on antenna cable (Fair-Rite VO sleeve, PN 0431164951, 1 loop).

The modification was required during spurious Radiated Emissions testing.

The test sample was received in good condition.

### Release Control Record

| Issue No. | Reason for change | Date Issued   |
|-----------|-------------------|---------------|
| 1         | Original Release  | March 6, 2017 |



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 3 of 17

## Test Methodology

All testing was performed according to the following rules/procedures/documents;

- CFR Title 47 FCC Part 15.225,
- ISED Canada RSS-210 Issue 9 Annex B.6,
- ISED Canada RSS-Gen Issue 4,
- ANSI C63.10-2013

Device was tested in 3 different orientations (X, Y and Z) of possible installation. Emissions were maximized by rotating the turntable as well as varying the test antenna's height and polarity.

Operating voltage of the device is 5Vdc; therefore AC line conducted emissions testing was performed on the AC side of a representative power supply with a 50 $\Omega$ /50 $\mu$ H LISN.

The following bandwidths were used during radiated spurious and line conducted emissions.

| Frequency  | RBW    | VBW   |
|------------|--------|-------|
| 0.15-30MHz | 9kHz   | 30kHz |
| 30-1000MHz | 120kHz | 1MHz  |

### Release Control Record

| Issue No. | Reason for change | Date Issued   |
|-----------|-------------------|---------------|
| 1         | Original Release  | March 6, 2017 |



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 4 of 17

## Compliance Statement

| RSS-GEN | RSP-100 | RSS 210                    | Part 15          | Comments                                                                                                                                                                               |
|---------|---------|----------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6.3     |         |                            | 15.15(b)         | There are no controls accessible to the users that vary the output power.                                                                                                              |
|         | 3.1     |                            | 15.19            | The label is shown in the label exhibit.                                                                                                                                               |
|         | 3.2     |                            | 15.21            | Information to the user is shown in the instruction manual exhibit.                                                                                                                    |
| 6       |         |                            | 15.27            | No special accessories are required for compliance.                                                                                                                                    |
| 3       |         |                            | 15.31            | The EUT was tested in accordance with the measurement standards in this section.                                                                                                       |
| 6.13    |         |                            | 15.33            | Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.                                                  |
| 8.1     |         |                            | 15.35            | The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.      |
| 8.3     |         |                            | 15.203           | The antenna for this device is a detachable PCB trace loop antenna                                                                                                                     |
| 8.10    |         |                            | 15.205<br>15.209 | The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable |
| 8.8     |         |                            | 15.207           | AC side of EUT Power Supply meets the limits in 15.207                                                                                                                                 |
|         |         | B.6(a)                     | 15.225           | The fundamental and harmonics meet the limits in 15.225(a)                                                                                                                             |
|         |         | B.6(b)<br>B.6(c)<br>B.6(d) | 15.225(d)        | Spurious emissions meet the limits in 15.209.                                                                                                                                          |
|         |         | B.6                        | 15.225(e)        | Transmitter frequency stability meets the applicable limits                                                                                                                            |
| 6.6     |         |                            |                  | 99% emissions bandwidth plot is provided.                                                                                                                                              |

### Release Control Record

Issue No. Reason for change  
1 Original Release

Date Issued  
March 6, 2017



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 5 of 17

**Product Tested - Configuration Documentation**

| EUT Configuration                                 |                               |                |                    |                   |                 |                 |                   |               |                   |                |
|---------------------------------------------------|-------------------------------|----------------|--------------------|-------------------|-----------------|-----------------|-------------------|---------------|-------------------|----------------|
| <b>Work Order:</b>                                | Q3095                         |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Company:</b>                                   | Mobile Aspects                |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Company Address:</b>                           | 24 S. 18th St Ste 300         |                |                    |                   |                 |                 |                   |               |                   |                |
|                                                   | Pittsburgh, PA, 15203         |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Contact:</b>                                   | Khang Le                      |                |                    |                   |                 |                 |                   |               |                   |                |
|                                                   |                               |                |                    |                   |                 |                 |                   |               |                   |                |
|                                                   | MN                            |                |                    | PN                |                 |                 | SN                |               |                   |                |
| <b>EUT:</b>                                       | IDIFC.M02                     |                |                    | --                |                 |                 | Sample 1          |               |                   |                |
| <b>EUT Description:</b>                           | RFID Printer Module           |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>EUT Max Frequency:</b>                         | 13.56 MHz                     |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>EUT Min Frequency:</b>                         | 8 MHz                         |                |                    |                   |                 |                 |                   |               |                   |                |
|                                                   |                               |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Support Equipment</b>                          | MN                            |                |                    |                   |                 |                 | SN                |               |                   |                |
| Dell Laptop                                       | Vostro 1400                   |                |                    |                   |                 |                 | --                |               |                   |                |
| HP Agilent Power Supply                           | Curtis Straus Test Instrument |                |                    |                   |                 |                 | --                |               |                   |                |
| Printer Console PCB                               | --                            |                |                    |                   |                 |                 | --                |               |                   |                |
|                                                   |                               |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Port Label</b>                                 | <b>Port Type</b>              | <b># ports</b> | <b># populated</b> | <b>cable type</b> | <b>shielded</b> | <b>ferrites</b> | <b>length (m)</b> | <b>in/out</b> | <b>under test</b> | <b>comment</b> |
| Antenna                                           | other                         | 1              | 1                  | Coaxial           | Yes             | No              | 0.5               | in            | yes               |                |
| Communication                                     | other                         | 1              | 1                  | other             | No              | No              | 0.1               | in            | yes               |                |
| USB to RS232                                      | RS-232                        | 1              | 1                  | RS-232            | Yes             | No              | 0.3               | 5             | in                |                |
| Power                                             | other                         | 1              | 1                  | other             | No              | No              | 3                 | in            | in                |                |
|                                                   |                               |                |                    |                   |                 |                 |                   |               |                   |                |
| <b>Software Operating Mode Description:</b>       |                               |                |                    |                   |                 |                 |                   |               |                   |                |
| EUT is set to transmit continuously at 13.56 MHz. |                               |                |                    |                   |                 |                 |                   |               |                   |                |
|                                                   |                               |                |                    |                   |                 |                 |                   |               |                   |                |

## Test Results

### Fundamental Emission

#### LIMIT

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters, (124dBuV/m at 3m.)  
[15.225 (a)]

### MEASUREMENTS / RESULTS

| Radiated Emissions Table                                                   |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                                  |                |                       |
|----------------------------------------------------------------------------|--------------------|-------------------|-------------------------------|--------------------------|----------------------|------------------------------|-------------------------|---------------------------|---------------------------------------|----------------------------------|----------------|-----------------------|
| Date: 03-Dec-16                                                            |                    |                   | Company: Mobile Aspects       |                          |                      |                              |                         |                           | Work Order: Q3095                     |                                  |                |                       |
| Engineer: Ahmed Ahmed                                                      |                    |                   | EUT Desc: RFID printer module |                          |                      |                              |                         |                           | EUT Operating Voltage/Frequency: 5Vdc |                                  |                |                       |
| Temp: 23C                                                                  |                    |                   | Humidity: 30%                 |                          |                      | Pressure: 1001mbar           |                         |                           |                                       |                                  |                |                       |
| Frequency Range: 13.56MHz Fundamental                                      |                    |                   |                               |                          |                      |                              |                         | Measurement Distance: 3 m |                                       |                                  |                |                       |
| Notes: IDIFC.M02<br>Worst case orientation: Y                              |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                                  | 13.56MHz       |                       |
| Antenna Polarization<br>(0° - 90°)                                         | Frequency<br>(MHz) | Reading<br>dBuA/m | Preamp Factor<br>(dB)         | Antenna Factor<br>(dB/m) | Cable Factor<br>(dB) | Adjusted Reading<br>(dBuV/m) | FCC 15.225              |                           |                                       | ---                              |                |                       |
|                                                                            |                    |                   |                               |                          |                      |                              | Limit<br>dBuA/m         | Margin<br>(dB)            | Result<br>(Pass/Fail)                 | Limit<br>(dBuV/m)                | Margin<br>(dB) | Result<br>(Pass/Fail) |
|                                                                            |                    |                   |                               |                          |                      |                              | 90                      | 13.56                     | 44.1                                  | 25.4                             | 39.0           | 0.3                   |
| 0                                                                          | 13.56              | 40.5              | 25.4                          | 39.0                     | 0.3                  | 54.4                         | 124.0                   | -69.6                     | Pass                                  | ---                              | ---            | ---                   |
| Table Result: Pass by -66.0 dB Worst Freq: 13.56 MHz                       |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                                  |                |                       |
| Test Site: EMI Chamber 1                                                   |                    |                   | Cable 1: Asset #2051          |                          |                      |                              | Cable 2: Asset #2054    |                           |                                       | Cable 3: ---                     |                |                       |
| Analyzer: Gold                                                             |                    |                   | Preamp: Blue-Blk              |                          |                      |                              | Antenna: Sm Loop (high) |                           |                                       | Preselector: ---                 |                |                       |
| CSsoft Radiated Emissions Calculator                                       |                    |                   | v 1.017.178                   |                          |                      |                              |                         |                           |                                       | Copyright Curtis-Straus LLC 2000 |                |                       |
| Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                                  |                |                       |

Rev. 1/21/2017

|                                              |                |             |                   |            |       |     |                 |               |
|----------------------------------------------|----------------|-------------|-------------------|------------|-------|-----|-----------------|---------------|
| Spectrum Analyzers / Receivers /Preselectors | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Gold                                         | 100Hz-26.5 GHz | E4407B      | Agilent           | MY45113816 | 1284  | I   | 2/13/2017       | 1/13/2016     |
| Antennas                                     | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Small Loop                                   | 10kHz-30MHz    | PLA-130/A   | ARA               | 1024       | 755   | I   | 6/14/2018       | 6/14/2016     |
| Preamps /Couplers Attenuators / Filters      | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Blue-Black                                   | 0.009-2000MHz  | ZFL-1000-LN | CS                | N/A        | 800   | II  | 12/26/2017      | 12/26/2016    |
| Cables                                       | Range          |             | Mfr               |            |       | Cat | Calibration Due | Calibrated on |
| Asset #2051                                  | 9kHz - 18GHz   |             | Florida RF        |            |       | II  | 3/2/2017        | 3/2/2016      |
| Asset #2054                                  | 9kHz - 18GHz   |             | Florida RF        |            |       | II  | 10/1/3017       | 10/30/2016    |
| Meteorological Meters                        |                | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Weather Clock (Pressure Only)                |                | BA928       | Oregon Scientific | C3166-1    | 831   | I   | 4/28/2018       | 4/28/2016     |
| TH A#2081                                    |                | HTC-1       | HDE               |            | 2081  | II  | 4/5/2017        | 4/5/2016      |
| Radiated Emissions Sites                     | FCC Code       | IC Code     | VCCI Code         | Range      |       | Cat | Calibration Due | Calibrated on |
| EMI Chamber 2                                | 719150         | 2762A-7     | A-0015            | 30-1000MHz |       | II  | 3/22/2017       | 3/22/2015     |


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



# PLOT(S)

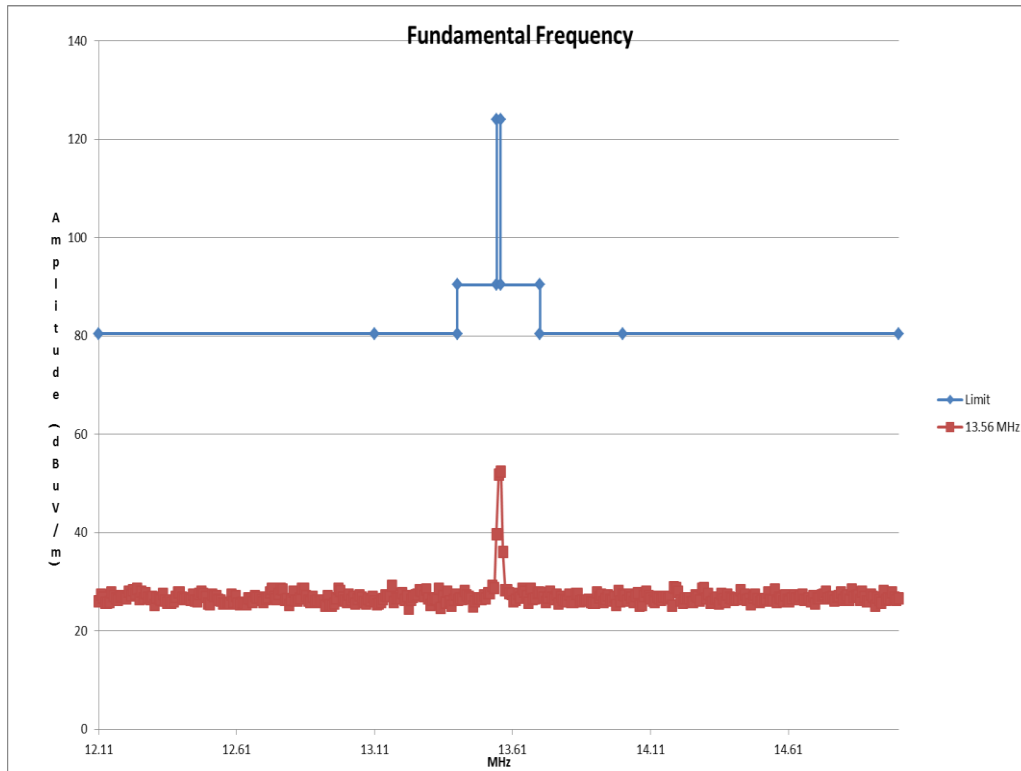

## Radiated Spurious Emissions

### LIMITS

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.  
[15.225(d)]

### MEASUREMENTS / RESULTS

| Radiated Emissions Table                                                   |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |
|----------------------------------------------------------------------------|--------------------|-------------------|-------------------------------|--------------------------|----------------------|------------------------------|-------------------------|---------------------------|---------------------------------------|-------------------|----------------|-----------------------|
| Date: 03-Dec-16                                                            |                    |                   | Company: Mobile Aspects       |                          |                      |                              |                         |                           | Work Order: Q3095                     |                   |                |                       |
| Engineer: Ahmed Ahmed                                                      |                    |                   | EUT Desc: RFID printer module |                          |                      |                              |                         |                           | EUT Operating Voltage/Frequency: 5Vdc |                   |                |                       |
| Temp: 23C                                                                  |                    |                   | Humidity: 30%                 |                          |                      | Pressure: 1001mbar           |                         |                           |                                       |                   |                |                       |
| Frequency Range: 9kHz-30MHz                                                |                    |                   |                               |                          |                      |                              |                         | Measurement Distance: 3 m |                                       |                   |                |                       |
| Notes: IDIFC.M02                                                           |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   | 13.56MHz       |                       |
| Worst case orientation: Y                                                  |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |
| Antenna Polarization<br>(0° - 90°)                                         | Frequency<br>(MHz) | Reading<br>dBuA/m | Preamp Factor<br>(dB)         | Antenna Factor<br>(dB/m) | Cable Factor<br>(dB) | Adjusted Reading<br>(dBuV/m) |                         |                           |                                       | ---               |                |                       |
|                                                                            |                    |                   |                               |                          |                      |                              | Limit<br>dBuA/m         | Margin<br>(dB)            | Result<br>(Pass/Fail)                 | Limit<br>(dBuV/m) | Margin<br>(dB) | Result<br>(Pass/Fail) |
| 90                                                                         | 27.12              | 35.3              | 25.3                          | 37.2                     | 0.4                  | 47.6                         | 69.5                    | -21.9                     | Pass                                  | ---               | ---            | ---                   |
| 0                                                                          | 27.12              | 28.3              | 25.3                          | 37.2                     | 0.4                  | 40.6                         | 69.5                    | -28.9                     | Pass                                  | ---               | ---            | ---                   |
| Table Result: Pass by -21.9 dB Worst Freq: 27.12 MHz                       |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |
| Test Site: EMI Chamber 1                                                   |                    |                   | Cable 1: Asset #2051          |                          |                      |                              | Cable 2: Asset #2054    |                           |                                       |                   |                |                       |
| Analyzer: Gold                                                             |                    |                   | Preamp: Blue-Blk              |                          |                      |                              | Antenna: Sm Loop (high) |                           |                                       |                   |                |                       |
| CSsoft Radiated Emissions Calculator v1.017.178                            |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |
| Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |
| Copyright Curtis-Straus LLC 2000                                           |                    |                   |                               |                          |                      |                              |                         |                           |                                       |                   |                |                       |

Rev. 1/21/2017

| Spectrum Analyzers / Receivers / Preselectors |  | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
|-----------------------------------------------|--|----------------|-------------|-------------------|------------|-------|-----|-----------------|---------------|
| Gold                                          |  | 100Hz-26.5 GHz | E4407B      | Agilent           | MY45113816 | 1284  | I   | 2/13/2017       | 1/13/2016     |
| Antennas                                      |  | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Small Loop                                    |  | 10kHz-30MHz    | PLA-130/A   | ARA               | 1024       | 755   | I   | 6/14/2018       | 6/14/2016     |
| Large Loop                                    |  | 20Hz-5MHz      | 6511        | EMCO              | 9704-1154  | 67    | I   | 6/14/2018       | 6/14/2016     |
| Preamps / Couplers Attenuators / Filters      |  | Range          | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Blue-Black                                    |  | 0.009-2000MHz  | ZFL-1000-LN | CS                | N/A        | 800   | II  | 12/26/2017      | 12/26/2016    |
| Cables                                        |  | Range          |             | Mfr               |            |       | Cat | Calibration Due | Calibrated on |
| Asset #2051                                   |  | 9kHz - 18GHz   |             | Florida RF        |            |       | II  | 3/2/2017        | 3/2/2016      |
| Asset #2054                                   |  | 9kHz - 18GHz   |             | Florida RF        |            |       | II  | 10/1/3017       | 10/30/2016    |
| Meteorological Meters                         |  |                | MN          | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Weather Clock (Pressure Only)                 |  |                | BA928       | Oregon Scientific | C3166-1    | 831   | I   | 4/28/2018       | 4/28/2016     |
| TH A#2081                                     |  |                | HTC-1       | HDE               |            | 2081  | II  | 4/5/2017        | 4/5/2016      |
| Radiated Emissions Sites                      |  | FCC Code       | IC Code     | VCCI Code         | Range      |       | Cat | Calibration Due | Calibrated on |
| EMI Chamber 2                                 |  | 719150         | 2762A-7     | A-0015            | 30-1000MHz |       | II  | 3/22/2017       | 3/22/2015     |

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



**Radiated Emissions Table**

| Date: 09-Dec-16                                                            |                    | Company: Mobile Aspects       |                       |                          |                      | Work Order: Q3095                     |                           |  |  |                   |                |                       |
|----------------------------------------------------------------------------|--------------------|-------------------------------|-----------------------|--------------------------|----------------------|---------------------------------------|---------------------------|--|--|-------------------|----------------|-----------------------|
| Engineer: Chris Bramley                                                    |                    | EUT Desc: RFID Printer Module |                       |                          |                      | EUT Operating Voltage/Frequency: 5Vdc |                           |  |  |                   |                |                       |
| Temp: 23.9°C                                                               |                    | Humidity: 24%                 |                       | Pressure: 1010mBar       |                      |                                       |                           |  |  |                   |                |                       |
| Frequency Range: 30-1000MHz                                                |                    |                               |                       |                          |                      |                                       | Measurement Distance: 3 m |  |  |                   |                |                       |
| Notes: IDIFC.M02                                                           |                    |                               |                       |                          |                      |                                       | EUT Max Freq: 13.56MHz    |  |  |                   |                |                       |
| Worst case orientation: Y                                                  |                    |                               |                       |                          |                      |                                       |                           |  |  |                   |                |                       |
| Antenna Polarization<br>(H / V)                                            | Frequency<br>(MHz) | Reading<br>(dBμV)             | Preamp Factor<br>(dB) | Antenna Factor<br>(dB/m) | Cable Factor<br>(dB) | Adjusted Reading<br>(dBμV/m)          |                           |  |  | FCC 15.209        |                |                       |
|                                                                            |                    |                               |                       |                          |                      |                                       |                           |  |  | Limit<br>(dBμV/m) | Margin<br>(dB) | Result<br>(Pass/Fail) |
| v                                                                          | 32.0               | 33.7                          | 25.2                  | 20.0                     | 0.4                  | 28.9                                  |                           |  |  | 40.0              | -11.1          | Pass                  |
| v                                                                          | 48.02              | 49.0                          | 25.2                  | 9.2                      | 0.4                  | 33.4                                  |                           |  |  | 40.0              | -6.6           | Pass                  |
| v                                                                          | 67.8               | 49.9                          | 25.3                  | 8.6                      | 0.5                  | 33.7                                  |                           |  |  | 40.0              | -6.3           | Pass                  |
| v                                                                          | 72.02              | 53.4                          | 25.3                  | 8.9                      | 0.5                  | 37.5                                  |                           |  |  | 40.0              | -2.5           | Pass                  |
| v                                                                          | 108.5              | 51.6                          | 25.2                  | 12.5                     | 0.6                  | 39.5                                  |                           |  |  | 43.5              | -4.0           | Pass                  |
| v                                                                          | 135.6              | 52.6                          | 25.2                  | 13.8                     | 0.8                  | 42.0                                  |                           |  |  | 43.5              | -1.5           | Pass                  |
| h                                                                          | 162.7              | 46.9                          | 25.0                  | 12.2                     | 0.8                  | 34.9                                  |                           |  |  | 43.5              | -8.6           | Pass                  |
| h                                                                          | 288.1              | 50.6                          | 25.2                  | 13.4                     | 1.0                  | 39.8                                  |                           |  |  | 46.0              | -6.2           | Pass                  |
| h                                                                          | 366.1              | 47.5                          | 25.0                  | 15.1                     | 1.2                  | 38.8                                  |                           |  |  | 46.0              | -7.2           | Pass                  |
| v                                                                          | 379.7              | 50.6                          | 25.0                  | 15.2                     | 1.3                  | 42.1                                  |                           |  |  | 46.0              | -3.9           | Pass                  |
| v                                                                          | 384.1              | 44.4                          | 25.0                  | 15.2                     | 1.4                  | 36.0                                  |                           |  |  | 46.0              | -10.0          | Pass                  |
| h                                                                          | 393.2              | 48.7                          | 25.1                  | 15.3                     | 1.5                  | 40.4                                  |                           |  |  | 46.0              | -5.6           | Pass                  |
| v                                                                          | 406.8              | 51.9                          | 25.4                  | 16.0                     | 1.4                  | 43.9                                  |                           |  |  | 46.0              | -2.1           | Pass                  |
| v                                                                          | 420.4              | 51.9                          | 25.5                  | 16.5                     | 1.4                  | 44.3                                  |                           |  |  | 46.0              | -1.7           | Pass                  |
| v                                                                          | 433.9              | 47.2                          | 25.4                  | 16.6                     | 1.5                  | 39.9                                  |                           |  |  | 46.0              | -6.1           | Pass                  |
| v                                                                          | 447.5              | 51.4                          | 25.4                  | 16.9                     | 1.4                  | 44.3                                  |                           |  |  | 46.0              | -1.7           | Pass                  |
| v                                                                          | 461.1              | 45.2                          | 25.4                  | 17.1                     | 1.4                  | 38.3                                  |                           |  |  | 46.0              | -7.7           | Pass                  |
| v                                                                          | 474.6              | 46.6                          | 25.5                  | 17.6                     | 1.5                  | 40.2                                  |                           |  |  | 46.0              | -5.8           | Pass                  |
| v                                                                          | 501.7              | 45.2                          | 25.3                  | 17.8                     | 1.2                  | 38.9                                  |                           |  |  | 46.0              | -7.1           | Pass                  |
| v                                                                          | 528.9              | 43.7                          | 25.0                  | 18.0                     | 1.6                  | 38.3                                  |                           |  |  | 46.0              | -7.7           | Pass                  |
| h                                                                          | 637.3              | 42.4                          | 24.8                  | 19.7                     | 1.7                  | 39.0                                  |                           |  |  | 46.0              | -7.0           | Pass                  |
| h                                                                          | 718.7              | 40.7                          | 24.8                  | 20.5                     | 1.8                  | 38.2                                  |                           |  |  | 46.0              | -7.8           | Pass                  |
| h                                                                          | 745.8              | 42.7                          | 24.8                  | 20.7                     | 1.8                  | 40.4                                  |                           |  |  | 46.0              | -5.6           | Pass                  |
| h                                                                          | 772.9              | 44.5                          | 24.8                  | 21.2                     | 1.9                  | 42.8                                  |                           |  |  | 46.0              | -3.2           | Pass                  |
| h                                                                          | 786.5              | 44.2                          | 24.8                  | 21.4                     | 1.9                  | 42.7                                  |                           |  |  | 46.0              | -3.3           | Pass                  |
| h                                                                          | 800.1              | 44.4                          | 24.9                  | 21.3                     | 1.9                  | 42.7                                  |                           |  |  | 46.0              | -3.3           | Pass                  |
| h                                                                          | 813.6              | 41.9                          | 24.9                  | 21.6                     | 1.8                  | 40.4                                  |                           |  |  | 46.0              | -5.6           | Pass                  |
| h                                                                          | 867.9              | 40.5                          | 25.1                  | 22.0                     | 2.0                  | 39.4                                  |                           |  |  | 46.0              | -6.6           | Pass                  |
| v                                                                          | 976.3              | 43.6                          | 24.4                  | 23.0                     | 2.1                  | 44.3                                  |                           |  |  | 54.0              | -9.7           | Pass                  |
| Table Result: Pass by -1.5 dB Worst Freq: 135.6 MHz                        |                    |                               |                       |                          |                      |                                       |                           |  |  |                   |                |                       |
| Test Site: EMI Chamber 1                                                   |                    | Cable 1: Asset #2051          |                       |                          |                      | Cable 2: Asset #2054                  |                           |  |  |                   |                |                       |
| Analyzer: Rental SA#2                                                      |                    | Preamp: Blue-Blk              |                       |                          |                      | Antenna: Red-Black                    |                           |  |  |                   |                |                       |
| CSsoft Radiated Emissions Calculator                                       |                    | v 1.017.178                   |                       |                          |                      |                                       |                           |  |  |                   |                |                       |
| Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor |                    |                               |                       |                          |                      |                                       |                           |  |  |                   |                |                       |
| Copyright Curtis-Straus LLC 2000                                           |                    |                               |                       |                          |                      |                                       |                           |  |  |                   |                |                       |

Copyright Curtis-Straus LLC 2000

Rev. 12/8/2016

**Spectrum Analyzers / Receivers / Preselectors**  
SA #2 (1860)

| Range         | MN     | Mfr     | SN         | Asset | Cat | Calibration Due | Calibrated on |
|---------------|--------|---------|------------|-------|-----|-----------------|---------------|
| 9kHz-26.5 GHz | E7405A | Agilent | MY45104916 | 1860  | I   | 12/23/2016      | 12/23/2015    |

**Radiated Emissions Sites**  
EMI Chamber 1

| FCC Code | IC Code | VCCI Code | Range      | Cat | Calibration Due | Calibrated on |
|----------|---------|-----------|------------|-----|-----------------|---------------|
| 719150   | 2762A-6 | A-0015    | 30-1000MHz | II  | 3/21/2017       | 3/21/2015     |

**Preamps / Couplers Attenuators / Filters**  
Blue-Black

| Range         | MN          | Mfr | SN  | Asset | Cat | Calibration Due | Calibrated on |
|---------------|-------------|-----|-----|-------|-----|-----------------|---------------|
| 0.009-2000MHz | ZFL-1000-LN | CS  | N/A | 800   | II  | 12/27/2016      | 12/27/2015    |

**Antennas**  
Red-Black Bilog

| Range      | MN  | Mfr   | SN        | Asset | Cat | Calibration Due | Calibrated on |
|------------|-----|-------|-----------|-------|-----|-----------------|---------------|
| 30-2000MHz | JB1 | Sunol | A091604-2 | 1106  | I   | 2/9/2017        | 2/9/2015      |

**Meteorological Meters**  
Weather Clock (Pressure Only)  
TH A#2080

| MN    | Mfr               | SN      | Asset | Cat | Calibration Due | Calibrated on |
|-------|-------------------|---------|-------|-----|-----------------|---------------|
| BA928 | Oregon Scientific | C3166-1 | 831   | I   | 4/28/2018       | 4/28/2016     |
| HTC-1 | HDE               |         | 2080  | II  | 4/5/2017        | 4/5/2016      |

**Cables**  
Asset #2051  
Asset #2054

| Range        | Mfr        | Cat | Calibration Due | Calibrated on |
|--------------|------------|-----|-----------------|---------------|
| 9kHz - 18GHz | Florida RF | II  | 3/2/2017        | 3/2/2016      |
| 9kHz - 18GHz | Florida RF | II  | 10/1/3017       | 10/30/2016    |

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



## Frequency Tolerance

### LIMITS

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+ 50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

[15.225(e)]

### MEASUREMENTS / RESULTS

| Frequency Stability Under Extreme Conditions                            |         |                          |                             |                   |             |
|-------------------------------------------------------------------------|---------|--------------------------|-----------------------------|-------------------|-------------|
| Date: 17-Nov-16                                                         |         | Company: Mobile Aspects  |                             | Work Order: Q3095 |             |
| Engineer: Zac Johnson                                                   |         | EUT: RFID printer module |                             | Voltage: 5.0VDC   |             |
| Notes: EUT operating voltage range is from 4.75 to 5.25 Vdc per client. |         |                          |                             |                   |             |
| Temperature                                                             | Voltage | Carrier Frequency        | Frequency Delta             | Limit             | Result      |
| °C                                                                      | VDC     | MHz                      | (MHz)                       | (MHz)             | (Pass/Fail) |
| 20                                                                      | 5.00    | 13.560290                | n/a                         | n/a               | n/a         |
| 20                                                                      | 4.75    | 13.560284                | 0.0000060                   | ±0.001356         | Pass        |
| 20                                                                      | 5.25    | 13.560314                | 0.0000240                   | ±0.001356         | Pass        |
| 30                                                                      | 5.00    | 13.560272                | 0.0000180                   | ±0.001356         | Pass        |
| 40                                                                      | 5.00    | 13.560242                | 0.0000480                   | ±0.001356         | Pass        |
| 50                                                                      | 5.00    | 13.560206                | 0.0000840                   | ±0.001356         | Pass        |
| 10                                                                      | 5.00    | 13.560332                | 0.0000420                   | ±0.001356         | Pass        |
| 0                                                                       | 5.00    | 13.560338                | 0.0000480                   | ±0.001356         | Pass        |
| -10                                                                     | 5.00    | 13.560338                | 0.0000480                   | ±0.001356         | Pass        |
| -20                                                                     | 5.00    | 13.560320                | 0.0000300                   | ±0.001356         | Pass        |
| Test Site: ENV Chamber (20C and 70C)                                    |         |                          | Spectrum Analyzer: Brown SA |                   |             |
| Cable 1: Asset #1785                                                    |         |                          |                             |                   |             |

Rev. 11/2/2016

| Spectrum Analyzers / Receivers / Preselectors |  | Range        | MN     | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
|-----------------------------------------------|--|--------------|--------|-------------------|------------|-------|-----|-----------------|---------------|
| Brown                                         |  | 9kHz-26.5GHz | E4407B | Agilent           | SG44210511 | 1510  | I   | 1/21/2017       | 1/21/2016     |
| RMS Voltmeters/Current Clamp                  |  |              | MN     | Mnfr              | SN         | Asset | Cat | Calibration Due | Calibrated on |
| DMM                                           |  |              | 114    | Fluke             | 25660081   | 1864  | I   | 2/2/2017        | 2/2/2016      |
| Meteorological Meters                         |  |              | MN     | Mfr               | SN         | Asset | Cat | Calibration Due | Calibrated on |
| Weather Clock (Pressure Only)                 |  |              | BA928  | Oregon Scientific | C3166-1    | 831   | I   | 4/28/2018       | 4/28/2016     |
| TH A#2080                                     |  |              | HTC-1  | HDE               |            | 2080  | II  | 4/5/2017        | 4/5/2016      |
| Cables                                        |  | Range        |        | Mfr               |            |       | Cat | Calibration Due | Calibrated on |
| Asset #1785                                   |  | 9kHz - 18GHz |        | Florida RF        |            |       | II  | 1/5/2017        | 1/5/2016      |

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



## 99% Occupied Bandwidth

### REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured.

[RSS-GEN 6.6]

### MEASUREMENTS/RESULTS

| 99% OCCUPIED BANDWIDTH                                                     |  |                               |  |                                       |  |
|----------------------------------------------------------------------------|--|-------------------------------|--|---------------------------------------|--|
| Date: 14-Nov-16                                                            |  | Company: Mobile Aspects       |  | Work Order: Q3095                     |  |
| Engineer: Tuyen Truong                                                     |  | EUT Desc: RFID printer module |  | EUT Operating Voltage/Frequency: 5Vdc |  |
| Temp: 22.4°C                                                               |  | Humidity: 28%                 |  | Pressure: 1006mbar                    |  |
| Frequency Range: 13.56 MHz                                                 |  |                               |  | Measurement Distance: 3 m             |  |
| Notes: IDIFC.M02                                                           |  |                               |  | EUT Max Freq: 13.56 MHz               |  |
| Antenna Polarization<br>(0° - 90°)                                         |  | Frequency<br>(MHz)            |  | OCCUPIED BANDWIDTH<br>(kHz)           |  |
| 0                                                                          |  | 13.56                         |  | 83.6011                               |  |
| Table Result:                                                              |  | by                            |  | dB                                    |  |
| Test Site: EMI Chamber 2                                                   |  | Cable 1: Asset #2052          |  | Cable 2: Asset #2053                  |  |
| Analyzer: Gold                                                             |  | Preamp: Blue                  |  | Antenna: Sm Loop (high)               |  |
| CSsoft Radiated Emissions Calculator                                       |  | v 1.017.178                   |  | Cable 3: ---                          |  |
| Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor |  |                               |  | Preselector: ---                      |  |
|                                                                            |  |                               |  | Copyright Curtis-Straus LLC 2000      |  |

**Note:** Since the signal is narrowband, reduction in RBW causes the 99% Occupied Bandwidth to get smaller and smaller at each iteration. Therefore to have a meaningful reading, an RBW value that is higher than 5% of the emission bandwidth is selected.

Rev. 11/2/2016

|                                                                            |                                              |                             |                                        |                            |                             |                        |                                                 |                                                |
|----------------------------------------------------------------------------|----------------------------------------------|-----------------------------|----------------------------------------|----------------------------|-----------------------------|------------------------|-------------------------------------------------|------------------------------------------------|
| <b>Spectrum Analyzers / Receivers / Preselectors</b><br>Gold               | <b>Range</b><br>100Hz-26.5 GHz               | <b>MN</b><br>E4407B         | <b>Mfr</b><br>Agilent                  | <b>SN</b><br>MY45113816    | <b>Asset</b><br>1284        | <b>Cat</b><br>I        | <b>Calibration Due</b><br>1/13/2017             | <b>Calibrated on</b><br>1/13/2016              |
| <b>Radiated Emissions Sites</b><br>EMI Chamber 2                           | <b>FCC Code</b><br>719150                    | <b>IC Code</b><br>2762A-7   | <b>VCCI Code</b><br>A-0015             | <b>Range</b><br>30-1000MHz |                             | <b>Cat</b><br>II       | <b>Calibration Due</b><br>3/22/2017             | <b>Calibrated on</b><br>3/22/2015              |
| <b>Preamps / Couplers Attenuators / Filters</b><br>Blue                    | <b>Range</b><br>0.009-2000MHz                | <b>MN</b><br>ZFL-1000-LN    | <b>Mfr</b><br>CS                       | <b>SN</b><br>N/A           | <b>Asset</b><br>759         | <b>Cat</b><br>II       | <b>Calibration Due</b><br>5/13/2017             | <b>Calibrated on</b><br>5/13/2016              |
| <b>Antennas</b><br>Small Loop                                              | <b>Range</b><br>10kHz-30MHz                  | <b>MN</b><br>PLA-130/A      | <b>Mfr</b><br>ARA                      | <b>SN</b><br>1024          | <b>Asset</b><br>755         | <b>Cat</b><br>I        | <b>Calibration Due</b><br>6/14/2018             | <b>Calibrated on</b><br>6/14/2016              |
| <b>Meteorological Meters</b><br>Weather Clock (Pressure Only)<br>TH A#2081 |                                              | <b>MN</b><br>BA928<br>HTC-1 | <b>Mfr</b><br>Oregon Scientific<br>HDE | <b>SN</b><br>C3166-1       | <b>Asset</b><br>831<br>2081 | <b>Cat</b><br>I<br>II  | <b>Calibration Due</b><br>4/28/2018<br>4/5/2017 | <b>Calibrated on</b><br>4/28/2016<br>4/5/2016  |
| <b>Cables</b><br>Asset #2052<br>Asset #2053                                | <b>Range</b><br>9kHz - 18GHz<br>9kHz - 18GHz |                             | <b>Mfr</b><br>Florida RF<br>Florida RF |                            |                             | <b>Cat</b><br>II<br>II | <b>Calibration Due</b><br>3/2/2017<br>10/1/3017 | <b>Calibrated on</b><br>3/2/2016<br>10/30/2016 |

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



# PLOT(S)

Agilent 14:36:20 Nov 14, 2016

R T

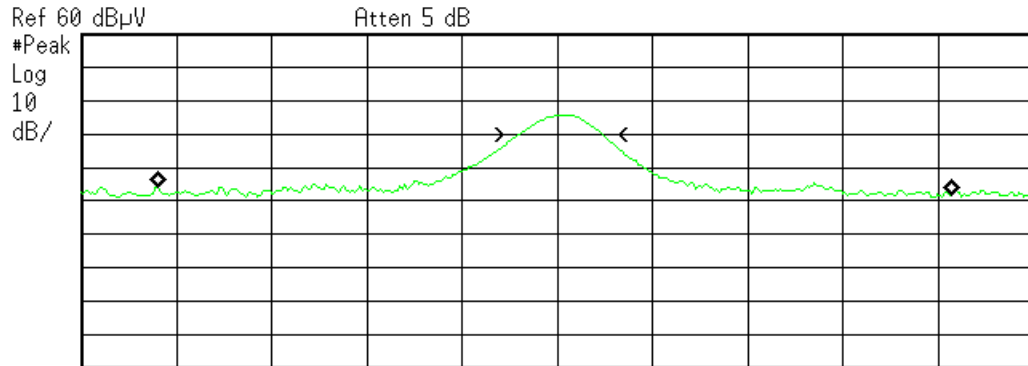

Center 13.56 MHz

#Res BW 9 kHz

#VBW 30 kHz

Span 100 kHz  
Sweep 12.03 ms (401 pts)

Occupied Bandwidth  
83.6011 kHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -225.466 Hz  
x dB Bandwidth 8.855 kHz

## AC Line Conducted Emissions

### LIMITS

| Frequency of emission (MHz) | Quasi-peak limit (dBμV) | Average limit (dBμV) |
|-----------------------------|-------------------------|----------------------|
| 0.15-0.5                    | 66 to 56*               | 56 to 46*            |
| 0.5-5                       | 56                      | 46                   |
| 5-30                        | 60                      | 50                   |

\*Decreases with the logarithm of the frequency. 47 CFR 15.207(a)

### MEASUREMENTS / RESULTS

| AC Conducted Emissions Data Table                                               |                        |               |                     |                               |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |
|---------------------------------------------------------------------------------|------------------------|---------------|---------------------|-------------------------------|-----------------|----------------|-----------------|------------------------------------------|--------------------|-----------------------|-----------------------|---------------------|----------------|-----------------------|
| Date: 03-Dec-16                                                                 |                        |               |                     | Company: Mobile Aspects       |                 |                |                 | Work Order: Q3095                        |                    |                       |                       |                     |                |                       |
| Engineer: Ahmed ahmed                                                           |                        |               |                     | EUT Desc: RFID printer module |                 |                |                 | Pressure: 1001 mBar                      |                    |                       |                       |                     |                |                       |
| Temp: 21.8 °C                                                                   |                        |               |                     | Humidity: 35%                 |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |
| Notes: EUT is set to transmit at 13.56 MHz                                      |                        |               |                     |                               |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |
| Frequency Range: 0.15-30MHz                                                     |                        |               |                     |                               |                 |                |                 | EUT Input Voltage/Frequency: 5Vdc        |                    |                       |                       |                     |                |                       |
| Frequency<br>(MHz)                                                              | Quasi-Peak<br>Readings |               | Average<br>Readings |                               | LISN<br>Factors |                | Cable<br>Factor | ATTN<br>Factor                           | FCC 15.207         |                       |                       | FCC 15.207          |                |                       |
|                                                                                 | QP1<br>(dBµV)          | QP2<br>(dBµV) | AVG1<br>(dBµV)      | AVG2<br>(dBµV)                | L1<br>(dB)      | L2<br>(dB)     |                 |                                          | QP Limit<br>(dBµV) | Margin<br>(dB)        | Result<br>(Pass/Fail) | AVG Limit<br>(dBµV) | Margin<br>(dB) | Result<br>(Pass/Fail) |
| 4.18                                                                            | 19.0                   | 19.0          | 19.0                | 19.0                          | 0.0             | -0.1           | -0.1            | -20.0                                    | 56.0               | -16.9                 | Pass                  | 46.0                | -6.9           | Pass                  |
| 15.45                                                                           | 20.9                   | 20.9          | 20.9                | 20.9                          | -0.1            | -0.1           | -0.2            | -20.0                                    | 60.0               | -18.9                 | Pass                  | 50.0                | -8.9           | Pass                  |
| 21.20                                                                           | 14.7                   | 14.0          | 14.7                | 14.0                          | -0.1            | -0.1           | -0.2            | -20.0                                    | 60.0               | -25.0                 | Pass                  | 50.0                | -15.0          | Pass                  |
| 22.40                                                                           | 18.5                   | 18.5          | 18.5                | 18.5                          | -0.1            | -0.1           | -0.2            | -20.0                                    | 60.0               | -21.2                 | Pass                  | 50.0                | -11.2          | Pass                  |
| 24.00                                                                           | 14.5                   | 16.4          | 14.5                | 16.4                          | -0.1            | -0.1           | -0.2            | -20.0                                    | 60.0               | -23.3                 | Pass                  | 50.0                | -13.3          | Pass                  |
| 27.16                                                                           | 23.7                   | 24.0          | 23.7                | 24.0                          | -0.1            | -0.1           | -0.2            | -20.0                                    | 60.0               | -15.7                 | Pass                  | 50.0                | -5.7           | Pass                  |
| Result: Pass                                                                    |                        |               |                     | Worst Margin:                 |                 |                |                 | -5.7 dB                                  |                    | Frequency: 27.160 MHz |                       |                     |                |                       |
| Measurement Device: LISN ASSET 1728(Line 1) LISN ASSET 1729(Line 2)             |                        |               |                     |                               |                 | Cable: CEMI-13 |                 | Spectrum Analyzer: SA EMI Chamber (1327) |                    |                       |                       |                     |                |                       |
| Attenuator: 20dB ATTEN-03                                                       |                        |               |                     |                               |                 | Site: CEMI 1   |                 |                                          |                    |                       |                       |                     |                |                       |
| C-S CEMI Calculator Version 3.0.14                                              |                        |               |                     |                               |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |
| Adjusted Reading = Raw Reading + LISN Insertion Loss + Cable Loss + Attenuation |                        |               |                     |                               |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |
| Equipment Factor Sheet rev: 11/6/2016                                           |                        |               |                     |                               |                 |                |                 |                                          |                    |                       |                       |                     |                |                       |

| AC Conducted Emissions Data Table                                               |                        |        |                     |        |                 |                               |                 |                                   |            |                                          |             |            |        |             |
|---------------------------------------------------------------------------------|------------------------|--------|---------------------|--------|-----------------|-------------------------------|-----------------|-----------------------------------|------------|------------------------------------------|-------------|------------|--------|-------------|
| Date: 03-Dec-16                                                                 |                        |        |                     |        |                 | Company: Mobile Aspects       |                 |                                   |            | Work Order: Q3095                        |             |            |        |             |
| Engineer: Ahmed ahmed                                                           |                        |        |                     |        |                 | EUT Desc: RFID printer module |                 |                                   |            |                                          |             |            |        |             |
| Temp: 21.8 °C                                                                   |                        |        |                     |        |                 | Humidity: 35%                 |                 |                                   |            | Pressure: 1001 mBar                      |             |            |        |             |
| Notes: Antenna replaced by 50ohm load.                                          |                        |        |                     |        |                 |                               |                 |                                   |            |                                          |             |            |        |             |
| Frequency Range: 0.15-30MHz                                                     |                        |        |                     |        |                 |                               |                 | EUT Input Voltage/Frequency: 5Vdc |            |                                          |             |            |        |             |
| Frequency<br>(MHz)                                                              | Quasi-Peak<br>Readings |        | Average<br>Readings |        | LISN<br>Factors |                               | Cable<br>Factor | ATTN<br>Factor                    | FCC 15.207 |                                          |             | FCC 15.207 |        |             |
|                                                                                 | QP1                    | QP2    | AVG1                | AVG2   | L1              | L2                            |                 |                                   | QP Limit   | Margin                                   | Result      | AVG Limit  | Margin | Result      |
|                                                                                 | (dBµV)                 | (dBµV) | (dBµV)              | (dBµV) | (dB)            | (dB)                          |                 |                                   | (dBµV)     | (dB)                                     | (Pass/Fail) | (dBµV)     | (dB)   | (Pass/Fail) |
| 13.56                                                                           | 22.2                   | 22.7   | 22.7                | 22.2   | -0.1            | -0.1                          | -0.1            | -20.0                             | 60.0       | -17.1                                    | Pass        | 50.0       | -7.1   | Pass        |
| Result: Pass                                                                    |                        |        |                     |        |                 | Worst Margin: -7.1 dB         |                 |                                   |            | Frequency: 13.560 MHz                    |             |            |        |             |
| Measurement Device: LISN ASSET 1728(Line 1) LISN ASSET 1729(Line 2)             |                        |        |                     |        |                 | Cable: CEMI-13                |                 |                                   |            | Spectrum Analyzer: SA EMI Chamber (1327) |             |            |        |             |
|                                                                                 |                        |        |                     |        |                 | Attenuator: 20dB ATTEN-03     |                 |                                   |            | Site: CEMI 1                             |             |            |        |             |
| C-S CEMI Calculator Version 3.0.14                                              |                        |        |                     |        |                 |                               |                 |                                   |            |                                          |             |            |        |             |
| Adjusted Reading = Raw Reading + LISN Insertion Loss + Cable Loss + Attenuation |                        |        |                     |        |                 |                               |                 |                                   |            |                                          |             |            |        |             |
| Equipment Factor Sheet rev: 11/6/2016                                           |                        |        |                     |        |                 |                               |                 |                                   |            |                                          |             |            |        |             |

|                                               |               |          |            |            |       |     |                 |               |  |
|-----------------------------------------------|---------------|----------|------------|------------|-------|-----|-----------------|---------------|--|
| Rev. 11/27/2016                               |               |          |            |            |       |     |                 |               |  |
| Spectrum Analyzers / Receivers / Preselectors | Range         | MN       | Mfr        | SN         | Asset | Cat | Calibration Due | Calibrated on |  |
| SA EMI Chamber (1327)                         | 9kHz-13.2 GHz | E 44 05B | Agilent    | MY45103416 | 1327  | I   | 8/4/2017        | 8/4/2016      |  |
| LISNs/Measurement Probes                      | Range         | MN       | Mfr        | SN         | Asset | Cat | Calibration Due | Calibrated on |  |
| LISN Asset 1728                               | 150kHz-30MHz  | LI-150A  | Com-Power  | 201084     | 1728  | I   | 4/20/2017       | 4/20/2016     |  |
| LISN Asset 1729                               | 150kHz-30MHz  | LI-150A  | Com-Power  | 201085     | 1729  | I   | 4/20/2017       | 4/20/2016     |  |
| Conducted Test Sites (Mains / Telco)          | FCC Code      |          | VCCI Code  |            |       | Cat | Calibration Due | Calibrated on |  |
| CEMI 1                                        | 719150        |          | A-0015     |            |       | III | NA              | N/A           |  |
| Meteorological Meters                         |               | MN       | Mfr        | SN         | Asset | Cat | Calibration Due | Calibrated on |  |
| Weather Clock (Pressure Only)                 |               | BA928    | gon Scient | C3166-1    | 831   | I   | 4/28/2018       | 4/28/2016     |  |
| TH A#2085                                     |               | HTC-1    | HDE        |            | 2085  | II  | 4/5/2017        | 4/5/2016      |  |
| Cables                                        | Range         |          | Mfr        |            |       | Cat | Calibration Due | Calibrated on |  |
| CEMI-13                                       | 9kHz - 2GHz   |          | C-S        |            |       | II  | 10/2/2017       | 1/2/2016      |  |
| Attenuators                                   | Range         | MN       | Mfr        | SN         | Asset | Cat | Calibration Due | Calibrated on |  |
| 20dB Attenuator-03                            | 9kHz-2GHz     |          |            | N/A        |       | II  | 10/2/2017       | 10/2/2016     |  |

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



## Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

| Measurement                                                                           | Expanded Uncertainty k=2 | Maximum allowable uncertainty |
|---------------------------------------------------------------------------------------|--------------------------|-------------------------------|
| Radiated Emissions (30-1000MHz)                                                       |                          |                               |
| NIST                                                                                  | 5.6dB                    | N/A                           |
| CISPR                                                                                 | 4.6dB                    | 5.2dB (Ucisp)                 |
| Radiated Emissions (1-26.5GHz)                                                        | 4.6dB                    | N/A                           |
| Radiated Emissions (above 26.5GHz)                                                    | 4.9dB                    | N/A                           |
| Magnetic Radiated Emissions                                                           | 5.6dB                    | N/A                           |
| Conducted Emissions                                                                   |                          |                               |
| NIST                                                                                  | 3.9dB                    | N/A                           |
| CISPR                                                                                 | 3.6dB                    | 3.6dB (Ucisp)                 |
| Telco Conducted Emissions (Current)                                                   | 2.9dB                    | N/A                           |
| Telco Conducted Emissions (Voltage)                                                   | 4.4dB                    | N/A                           |
| Electrostatic Discharge                                                               | 11.5%                    | N/A                           |
| Radiated RF Immunity (Uniform Field)                                                  | 1.6dB                    | N/A                           |
| Electrical Fast Transients                                                            | 23.1%                    | N/A                           |
| Surge                                                                                 | 23.1%                    | N/A                           |
| Conducted RF Immunity                                                                 | 3dB                      | N/A                           |
| Magnetic Immunity                                                                     | 12.8%                    | N/A                           |
| Dips and Interrupts                                                                   | 2.3V                     | N/A                           |
| Harmonics                                                                             | 3.5%                     | N/A                           |
| Flicker                                                                               | 3.5%                     | N/A                           |
| Radio frequency (@ 2.4GHz)                                                            | $3.23 \times 10^{-8}$    | $1 \times 10^{-7}$            |
| RF power, conducted                                                                   | 0.40dB                   | 0.75dB                        |
| Maximum frequency deviation:                                                          |                          |                               |
| • Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency | 3.4%<br>0.3dB            | 5%<br>3dB                     |
| Adjacent channel power                                                                | 1.9dB                    | 3dB                           |
| Conducted spurious emission of transmitter, valid up to 12.75GHz                      | 2.39dB                   | 3dB                           |
| Conducted emission of receivers                                                       | 1.3dB                    | 3dB                           |
| Radiated emission of transmitter, valid up to 26.5GHz                                 | 3.9dB                    | 6dB                           |
| Radiated emission of transmitter, valid up to 80GHz                                   | 3.3dB                    | 6dB                           |
| Radiated emission of receiver, valid up to 26.5GHz                                    | 3.9dB                    | 6dB                           |
| Radiated emission of receiver, valid up to 80GHz                                      | 3.3dB                    | 6dB                           |
| Humidity                                                                              | 2.37%                    | 5%                            |
| Temperature                                                                           | 0.7°C                    | 1.0°C                         |
| Time                                                                                  | 4.1%                     | 10%                           |
| RF Power Density, Conducted                                                           | 0.4dB                    | 3dB                           |
| DC and low frequency voltages                                                         | 1.3%                     | 3%                            |
| Voltage (AC, <10kHz)                                                                  | 1.3%                     | 2%                            |
| Voltage (DC)                                                                          | 0.62%                    | 1%                            |
| The above reflects a 95% confidence level                                             |                          |                               |

## Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and "CURTIS-STRAUS" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-



13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2)\_#684340 v13CS

