

Nemko Test Report: 4L0715RUS1Rev2

Applicant: AvaLAN WirelessSystems, Inc.
2400 El Camino Real
Suite 317
Mountain View, CA 94040

**Equipment Under Test:
(E.U.T.)** AW900 Wireless Ethernet Link

FCC ID: R4N-AW900

In Accordance With: **FCC Part 15, Subpart C, 15.247**

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By: 
Tom Tidwell, Frontline Group Manager

Date: 13 Dec. 2004

Table of Contents

Section 1. Summary of Test Results	3
Section 2. Equipment Under Test (E.U.T.).....	5
Section 3. Spurious Emissions (Restricted Bands)	6
Section 4. Test Equipment List	10
ANNEX A - TEST DETAILS.....	11
ANNEX B - TEST DIAGRAMS	13

Section 1. Summary of Test Results

Manufacturer: AvaLAN Wireless Systems, Inc.

Model No.: AW900 ver2

Serial No.: 000022

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-2004. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

☐

New Submission

☒

Production Unit

☒

Class II Permissive Change

☐

Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE. NONE**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
Powerline Conducted Emissions	15.207(a)	48 dB μ V	NA
Minimum 6 dB Bandwidth	15.247(a)(2)	>500 kHz	NA
Maximum Peak Power Output	15.247(b)(1)	<1 Watt	NA
Spurious Emissions (Antenna Conducted)	15.247(c)	-20 dBc/100kHz	NA
Spurious Emissions (Restricted Bands)	15.247(c)	< 74 dBuV/m Peak < 54 dBuV/m Avg	COMPLIES
Peak Power Spectral Density	15.247(d)	+8 dBm/3kHz	NA

Footnotes:

The change being made for Class II is to include a new antenna, therefore radiated emissions in the restricted bands was the only testing performed.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band: 902 to 928 MHz

Description of Modification for Modification Filing

A 15 dBi gain Yagi antenna is now being offered for extended coverage outdoors.

Operational Description

The AvaLAN Wireless Systems AW900 is designed to operate as a plug-and-play high speed wireless Ethernet link. The AW900 operates as a 900 MHz digital spread spectrum link with data rates as high as 1.5 Mb/s, making it an ideal replacement for traditional wired DSL/TI internet connections, as well as other high data rate secure communication applications.

The AW900 is typically used in pairs, and is powered by a standard wall type transformer supplying 6.0 VDC @ 500 mA. The AW900 is equipped with an 'RJ-45' type jack as the data access port, and uses a "Nearson" model S467AH-915S whip antenna or a 15 dBi Yagi.

Section 3. Spurious Emissions (Restricted Bands)

NAME OF TEST: Spurious Emissions (Restricted Bands)	PARA. NO.: 15.247 (c)
TESTED BY: David Light	DATE: 12/6/04

Test Results: Complies.

Measurement Data: See attached table.

Duty Cycle Calculation:

Duty Cycle correction factor(dB) = $20 \log (rf_{ON} \text{ in ms}/100\text{ms})$

On time in 100 msec. = 57.6 msec.

$20 \log (57/100) = -4.8 \text{ dB}$

Equipment Used: 1484-1485-1304-1464-1016-1983-791-759-760

Measurement Uncertainty: +/- 3.6 dB

Temperature: 22 °C

Relative Humidity: 45 %

EQUIPMENT: **AW900 Wireless Ethernet Link**

PROJECT NO.:4L0715RUS1Rev2

Radiated Data

Low channel

Radiated Emissions								
Page <u>1</u> of <u>3</u>								
Job No.:	4L0715			Date: 12/6/2004				
Specification:	15.247/15.205			Temperature(°C): <u>22</u>				
Tested By:	<u>David Light</u>			Relative Humidity(%) <u>45</u>				
E.U.T.:	<u>900 MHz DSSS Radio</u>							
Configuration:	<u>Tx</u>							
Sample Number:	<u>1</u>							
Location:	<u>AC 3</u>			RBW:		<u>1 MHz</u>		
Detector Type:	<u>Peak</u>			VBW:		<u>1 MHz</u>		
<u>Test Equipment Used</u>								
Antenna:	<u>1304</u>			Directional Coupler:		<u>#N/A</u>		
Pre-Amp:	<u>1016</u>			Cable #1:		<u>1484</u>		
Filter:	<u>1481</u>			Cable #2:		<u>1485</u>		
Receiver:	<u>1036</u>			Cable #3:		<u>#N/A</u>		
Attenuator #1	<u>#N/A</u>			Cable #4:		<u>#N/A</u>		
Attenuator #2:	<u>#N/A</u>			Mixer:		<u>#N/A</u>		
<u>Measurement Uncertainty: +/- 3.6 dB</u>								
Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
2.709	58.3	29.0	3.6	32.7	58.2	74	54	Peak / Vertical
2.709	53.5	29.0	3.6	32.7	53.4	74	54	Average / Vertical
3.612	52.5	30.7	3.6	32.4	54.4	74	54	Peak / Vertical
3.612	47.7	30.7	3.6	32.4	49.6	74	54	Average / Vertical
4.515	46.8	32.3	4.1	31.6	51.6	74	54	Peak / Vertical
4.515	42.0	32.3	4.1	31.6	46.8	74	54	Average / Vertical
7.224	40.5	36.0	5.2	32.1	49.6	74	54	Peak / Vertical
7.224	35.7	36.0	5.2	32.1	44.8	74	54	Average / Vertical
2.709	55.3	29.0	3.6	32.7	55.2	74	54	Peak / Horizontal
2.709	50.5	29.0	3.6	32.7	50.4	74	54	Average / Horizontal
3.612	52.8	30.7	3.6	32.4	54.7	74	54	Peak / Horizontal
3.612	48.0	30.7	3.6	32.4	49.9	74	54	Average / Horizontal
4.515	46.5	32.3	4.1	31.6	51.3	74	54	Peak / Horizontal
4.515	41.7	32.3	4.1	31.6	46.5	74	54	Average / Horizontal
7.224	44.2	36.0	5.2	32.1	53.3	74	54	Peak / Horizontal
7.224	39.4	36.0	5.2	32.1	48.5	74	54	Average / Horizontal

Test Data – Continued



High Channel

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
2.778	56.0	29.0	3.6	32.7	55.9	74	54	Peak/Horizontal
2.778	51.2	29.0	3.6	32.7	51.1	74	54	Average/Horizontal
3.704	51.0	30.7	3.6	32.4	52.9	74	54	Peak/Horizontal
4.630	47.2	32.3	4.1	31.6	52.0	74	54	Peak/Horizontal
2.778	57.8	29.0	3.6	32.7	57.7	74	54	Peak/Vertical
2.778	53.0	29.0	3.6	32.7	52.9	74	54	Average/vertical
3.704	49.0	30.7	3.6	32.4	50.9	74	54	Peak/Vertical
4.630	45.0	32.3	4.1	31.6	49.8	74	54	Peak/Vertical
6.482	56.7	34.7	5.2	30.8	65.8	74	54	Peak/Vertical

Mid channel

Frequency (GHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
2.741	55.0	29.0	3.6	32.7	54.9	74	54	Peak/Horizontal
2.741	50.2	29.0	3.6	32.7	50.1	74	54	Average/Horizontal
3.654	50.7	30.7	3.6	32.4	52.6	74	54	Peak/Horizontal
4.568	45.3	32.3	4.1	31.6	50.1	74	54	Peak/Horizontal
2.741	57.0	29.0	3.6	32.7	56.9	74	54	Peak/Vertical
2.741	52.2	29.0	3.6	32.7	52.1	74	54	Average/vertical
3.654	48.8	30.7	3.6	32.4	50.7	74	54	Peak/Vertical
4.568	45.0	32.3	4.1	31.6	49.8	74	54	Peak/Vertical
Notes:	The spectrum was searched to 10 GHz							
	The device was tested at 903, 914 and 926 MHz							

Test Setup Photos

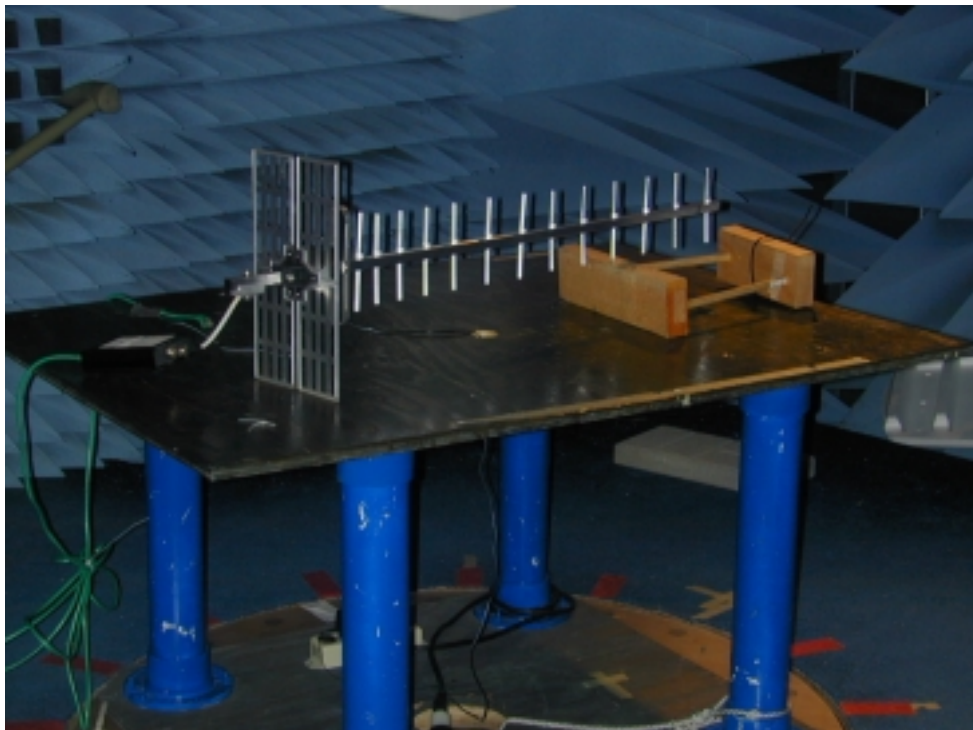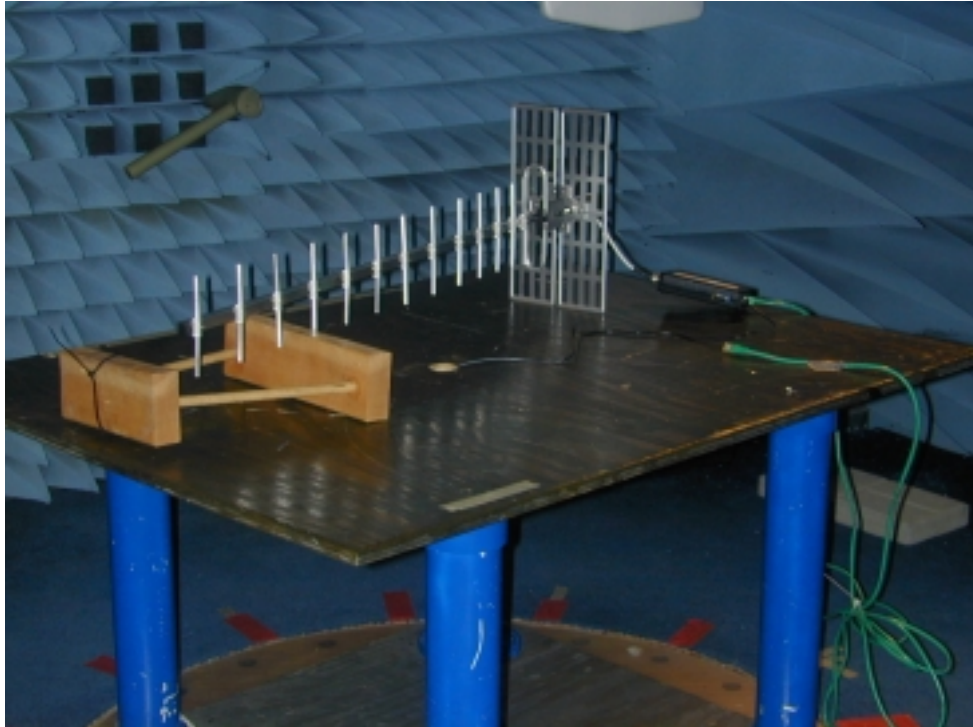

Section 4. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1481	Microwave Highpass Filter	K & L 3DH1-2000/T8000-0/0	4	Cal B4 Use	N/A
1484	Cable 2.0-18.0 Ghz	S torm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	S torm PR90-010-216	N/A	08/02/04	08/02/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	11/12/04	11/12/05
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
759	ANTENNA, LOG PERIODIC	A.H. SYSTEMS SAS -200/510	556	07/23/04	07/23/05
760	Antenna biconical	E lectro Metrics MFC-25	477	06/22/04	06/22/05
791	PREAMP, 25dB	ICC LNA25	398	11/12/04	11/12/05
1983	CABLE	KTL Site A OATS	N/A	03/11/04	03/11/05

ANNEX A - TEST DETAILS

EQUIPMENT: [AW900 Wireless Ethernet Link](#)

PROJECT NO.: 4L0715RUS1Rev2

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

ANNEX B - TEST DIAGRAMS

Test Site For Radiated Emissions

