



RADIO TEST REPORT

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou
Equipment under Test	:	Portable High Resolution Music Player
Model No.	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
FCC ID	:	R56-FC1001
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020, ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024
Report No.	:	DDT-RE25071020-1E13
Issue Date	:	2025/11/24
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	21
5.1.	Block diagram of test setup	21
5.2.	Limits	21
5.3.	Test procedure	21
5.4.	Test result.....	22
5.5.	Test graphs	23
6.	Conducted Output Power	29
6.1.	Block diagram of test setup	29
6.2.	Limits	29
6.3.	Test procedure	29
6.4.	Test result average.....	30
7.	Power Spectral Density	31
7.1.	Block diagram of test setup	31
7.2.	Limits	31
7.3.	Test procedure	31
7.4.	Test result.....	32
7.5.	Test graphs	33
8.	Band Edge Compliance (Conducted Method)	39
8.1.	Block diagram of test setup	39

8.2.	Limits	39
8.3.	Test procedure	39
8.4.	Test result.....	40
8.5.	Test graphs	41
9.	RF Conducted Spurious Emissions.....	45
9.1.	Block diagram of test setup	45
9.2.	Limits	45
9.3.	Test procedure	45
9.4.	Test result.....	46
9.5.	Test graphs	47
10.	Duty Cycle	65
10.1.	Block diagram of test setup	65
10.2.	Limit.....	65
10.3.	Test procedure	65
10.4.	Test result.....	66
10.5.	Test graphs	67
11.	Antenna Requirements.....	73
11.1.	Limit.....	73
11.2.	Result	73
12.	Radiated Emission	74
12.1.	Test equipment.....	74
12.2.	Block diagram of test setup	75
12.3.	Limits	76
12.4.	Assistant equipment used for test	77
12.5.	Test procedure	77
12.6.	Test result.....	79
12.7.	Test data	80
13.	Band Edge Compliance.....	88
13.1.	Test equipment.....	88
13.2.	Block diagram of test setup	89
13.3.	Limits	89
13.4.	Assistant equipment used for test	89
13.5.	Test procedure	89
13.6.	Test result.....	89
13.7.	Test data	90
14.	Power Line Conducted Emissions.....	114
14.1.	Test equipment.....	114
14.2.	Block diagram of test setup	114

14.3. Limits114

14.4. Assistant equipment used for test114

14.5. Test procedure114

14.6. Test result.....115

14.7. Test data116

15. Test Setup Photograph118

16. Photos of the EUT120

Test Report Declare

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village,Longgui Street, Baiyun District, Guangzhou
Equipment under Test	:	Portable High Resolution Music Player
Model No.	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village,Longgui Street, Baiyun District, Guangzhou

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020,
ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25071020-1E13		
Date of Receipt:	2025/07/11	Date of Test:	2025/07/11 - 2025/11/20

Created: Chen Ziqin	Reviewed: Zoe Peng	Approved: Damon Hu
		
2025/11/24	2025/11/24	2025/11/24

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/11/24	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	47 CFR Part 15 15.247(a)(2)	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3)	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.247(e)	/	Pass
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d)	/	Pass
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
7	Antenna Requirement	47 CFR Part 15 15.203	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	Portable High Resolution Music Player
Model Number	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
Difference of model number	:	Above models are identical in schematic and structure, only the model number are different, therefore the test performed on the model F3051M
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 5V powered by an external adapter or a built-in 3.7V lithium battery
Antenna Type	:	FPC Antenna
Max Antenna Gain(dBi)	:	-0.08

Radio Technology	:	IEEE 802.11b/g/n/ax
Operation frequency	:	IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz IEEE 802.11ax HE20: 2412MHz to 2462MHz IEEE 802.11ax HE40: 2422MHz to 2452MHz
Modulation	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QRCT4.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	/			
IEEE 802.11b	18	/	1	LCH: CH1	2412
	18	/	1	MCH: CH6	2437
	18	/	1	HCH: CH11	2462
IEEE 802.11g	17	/	6	LCH: CH1	2412
	17	/	6	MCH: CH6	2437
	17	/	6	HCH: CH11	2462
IEEE 802.11n HT20	16	/	MCS 0	LCH: CH1	2412
	16	/	MCS 0	MCH: CH6	2437
	16	/	MCS 0	HCH: CH11	2462
IEEE 802.11n HT40	14	/	MCS 0	LCH: CH3	2422
	14	/	MCS 0	MCH: CH6	2437
	14	/	MCS 0	HCH: CH9	2452
IEEE 802.11ax HE20	16	/	MCS 0	LCH: CH1	2412
	16	/	MCS 0	MCH: CH6	2437
	16	/	MCS 0	HCH: CH11	2462
IEEE 802.11ax HE40	14	/	MCS 0	LCH: CH3	2422
	14	/	MCS 0	MCH: CH6	2437
	14	/	MCS 0	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 3#)				
SIGNAL ANALYZER	R&S	FSV40	101407	2026/07/06
Wideband Radio Communication Tester	R&S	CMW500	117491	2026/03/28
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	2026/07/06
MXG Vector Signal Generator	Agilent	N5182A	MY48180912	2026/03/28
RF Control Unit	Tonscend	JS0806-2	20C8060230	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

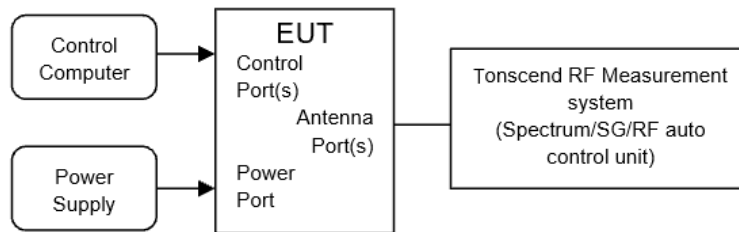

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.08	2407.96	2416.04	0.5	PASS
		2437	8.08	2432.96	2441.04	0.5	PASS
		2462	8.08	2457.96	2466.04	0.5	PASS
11G	Ant1	2412	16.32	2403.84	2420.16	0.5	PASS
		2437	16.32	2428.84	2445.16	0.5	PASS
		2462	16.32	2453.84	2470.16	0.5	PASS
11N20SISO	Ant1	2412	16.92	2403.84	2420.76	0.5	PASS
		2437	17.56	2428.20	2445.76	0.5	PASS
		2462	17.32	2453.44	2470.76	0.5	PASS
11N40SISO	Ant1	2422	35.36	2404.24	2439.60	0.5	PASS
		2437	36.32	2418.84	2455.16	0.5	PASS
		2452	35.92	2434.24	2470.16	0.5	PASS
11AX20SISO	Ant1	2412	18.08	2403.40	2421.48	0.5	PASS
		2437	18.92	2427.48	2446.40	0.5	PASS
		2462	18.76	2452.60	2471.36	0.5	PASS
11AX40SISO	Ant1	2422	37.52	2403.20	2440.72	0.5	PASS
		2437	38.08	2417.96	2456.04	0.5	PASS
		2452	38.00	2433.04	2471.04	0.5	PASS


4.5. Test graphs

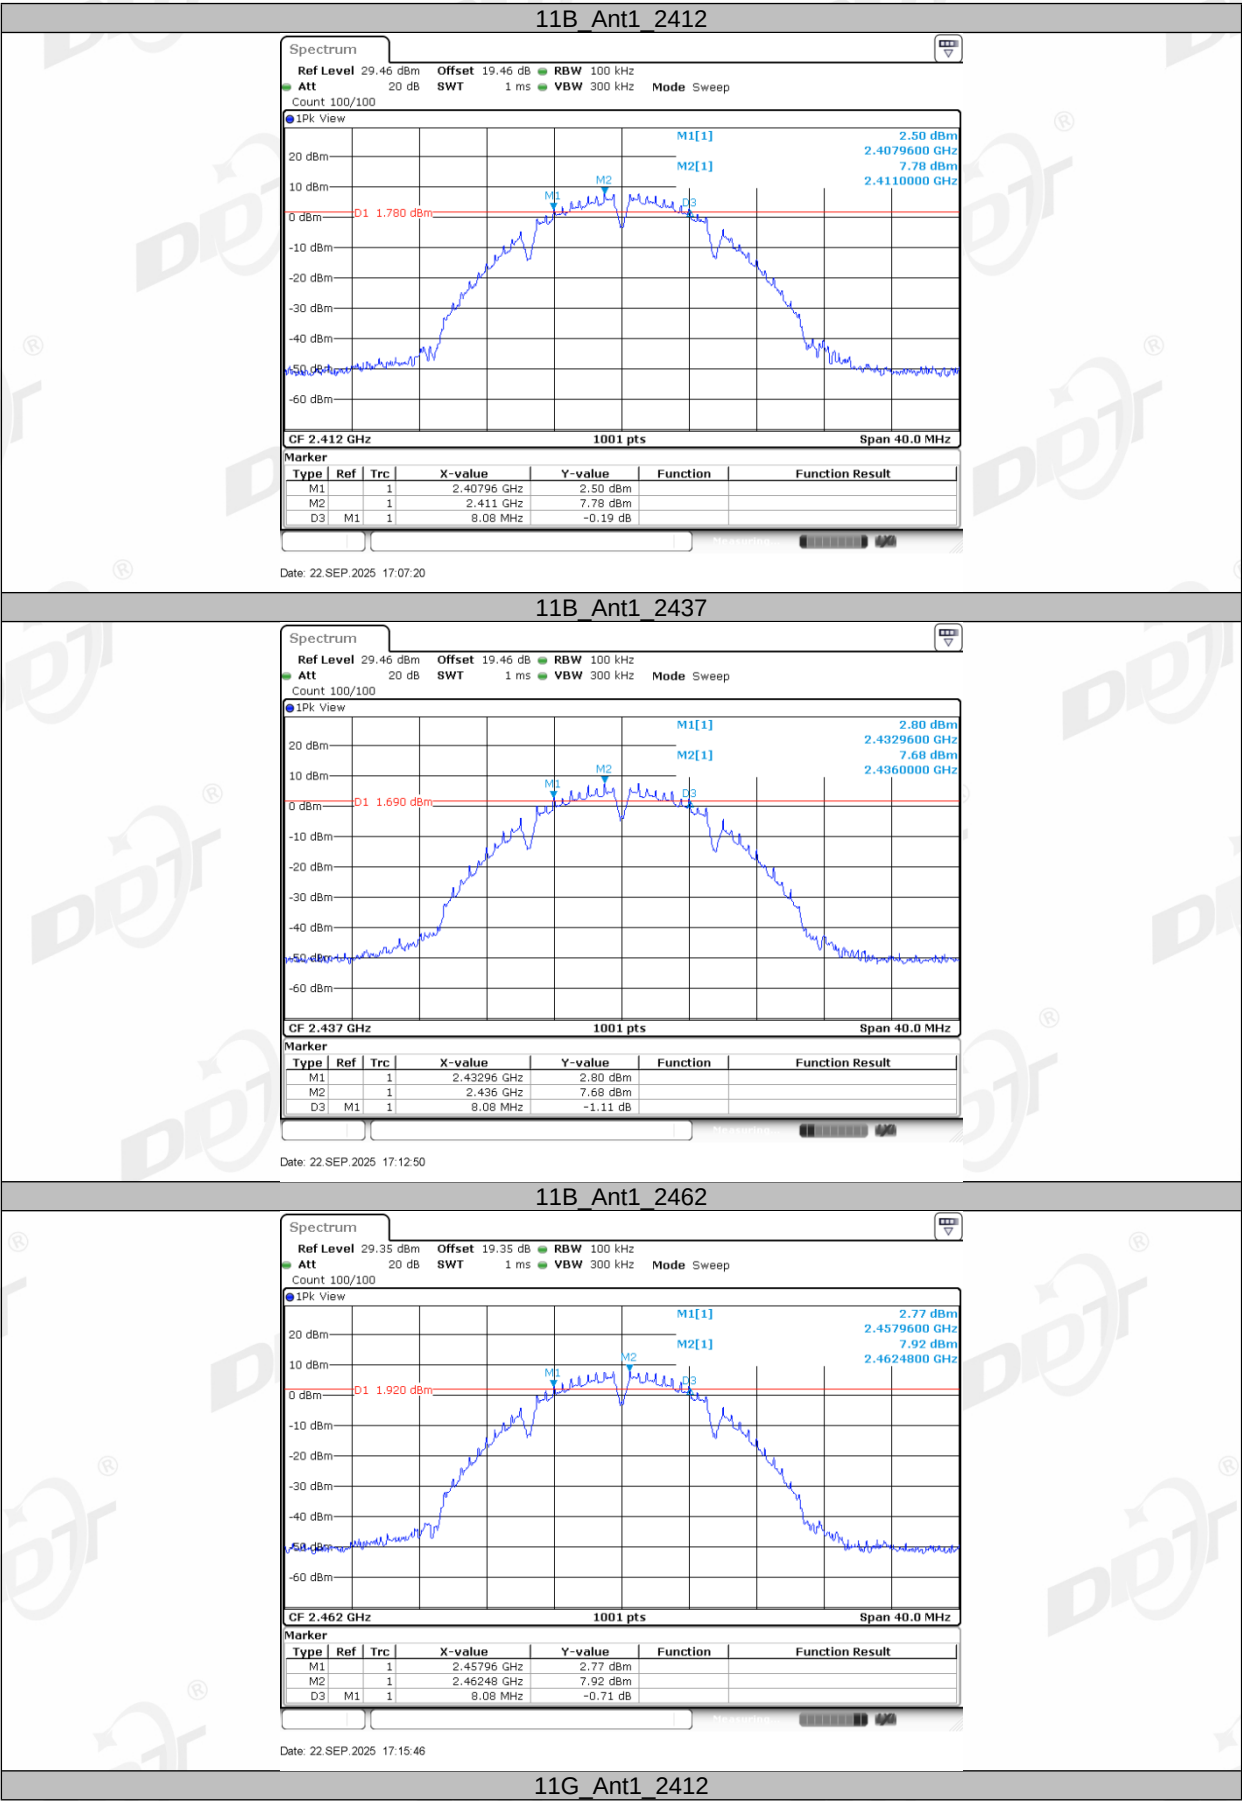

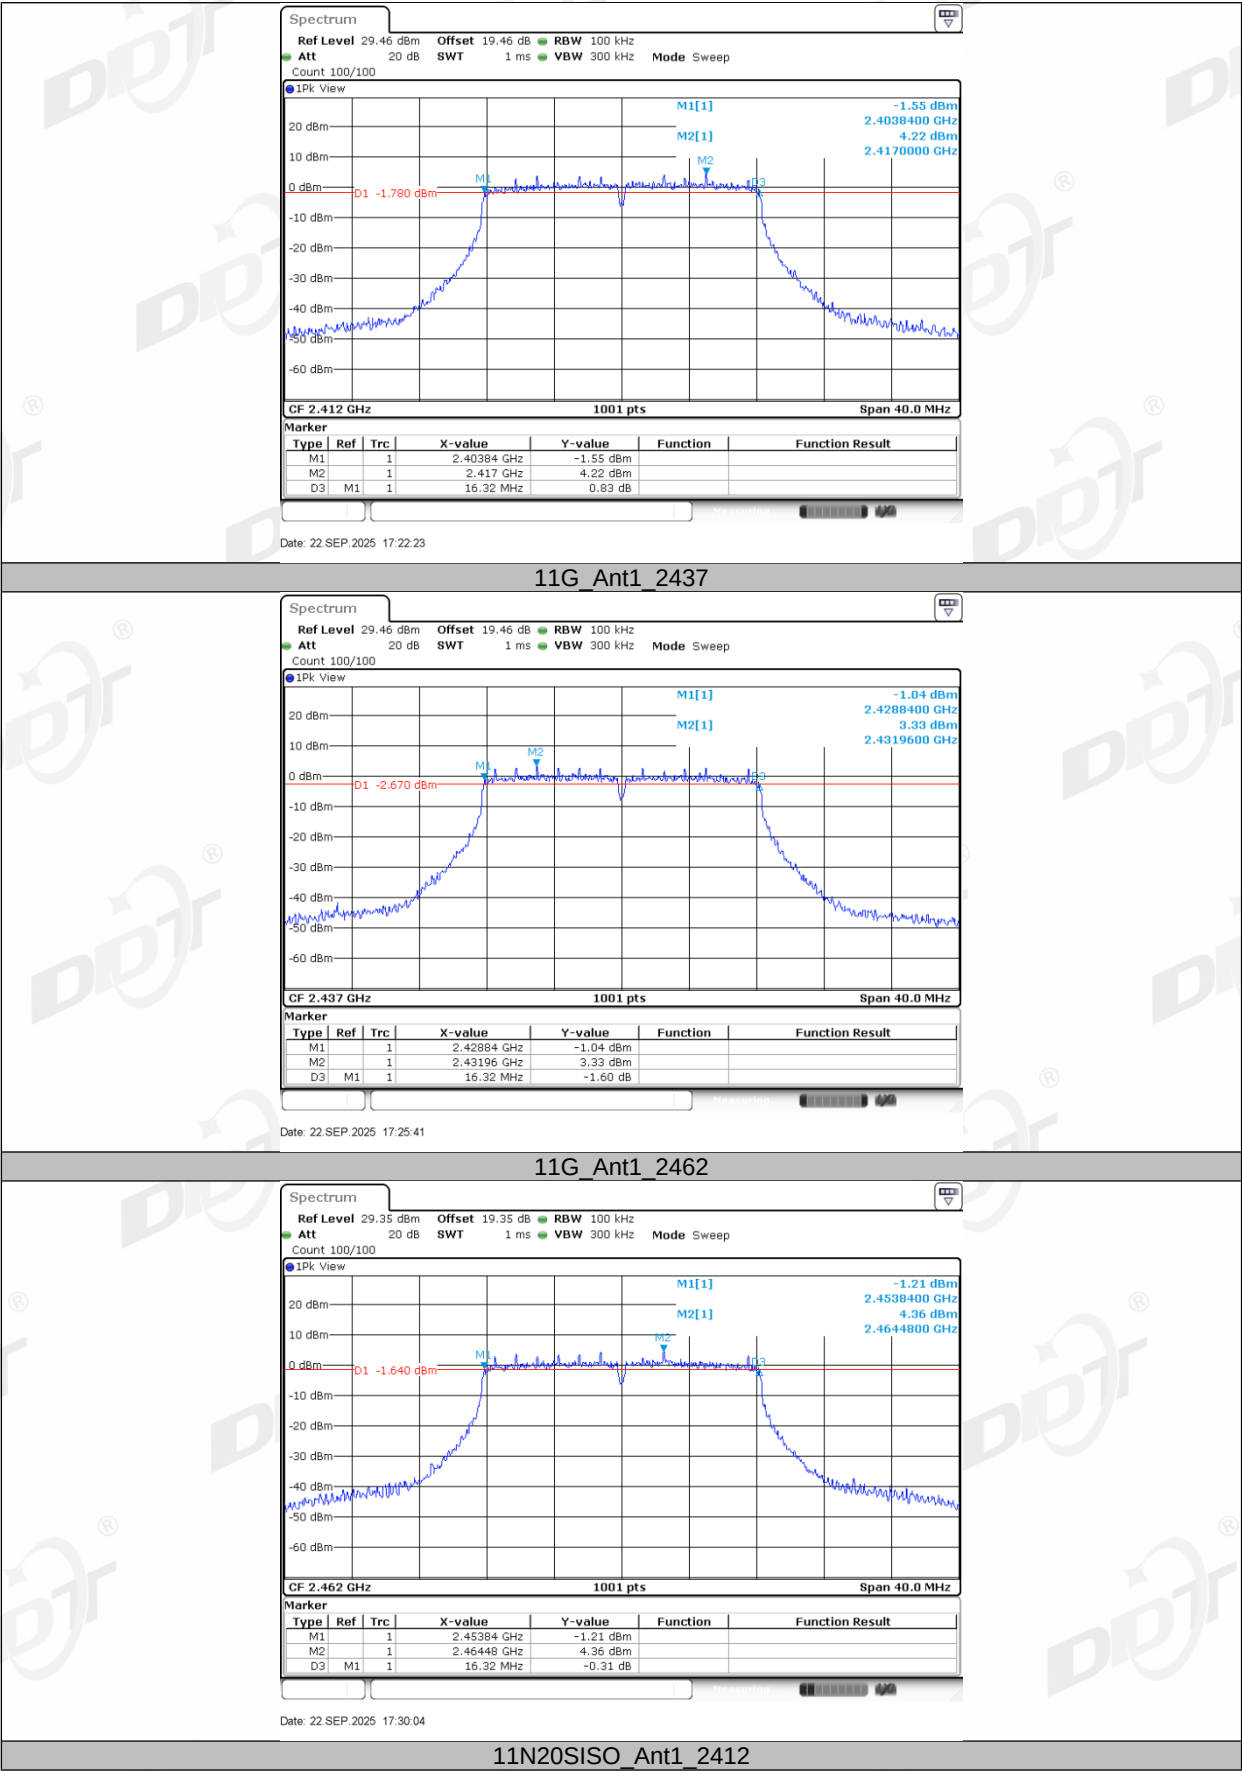

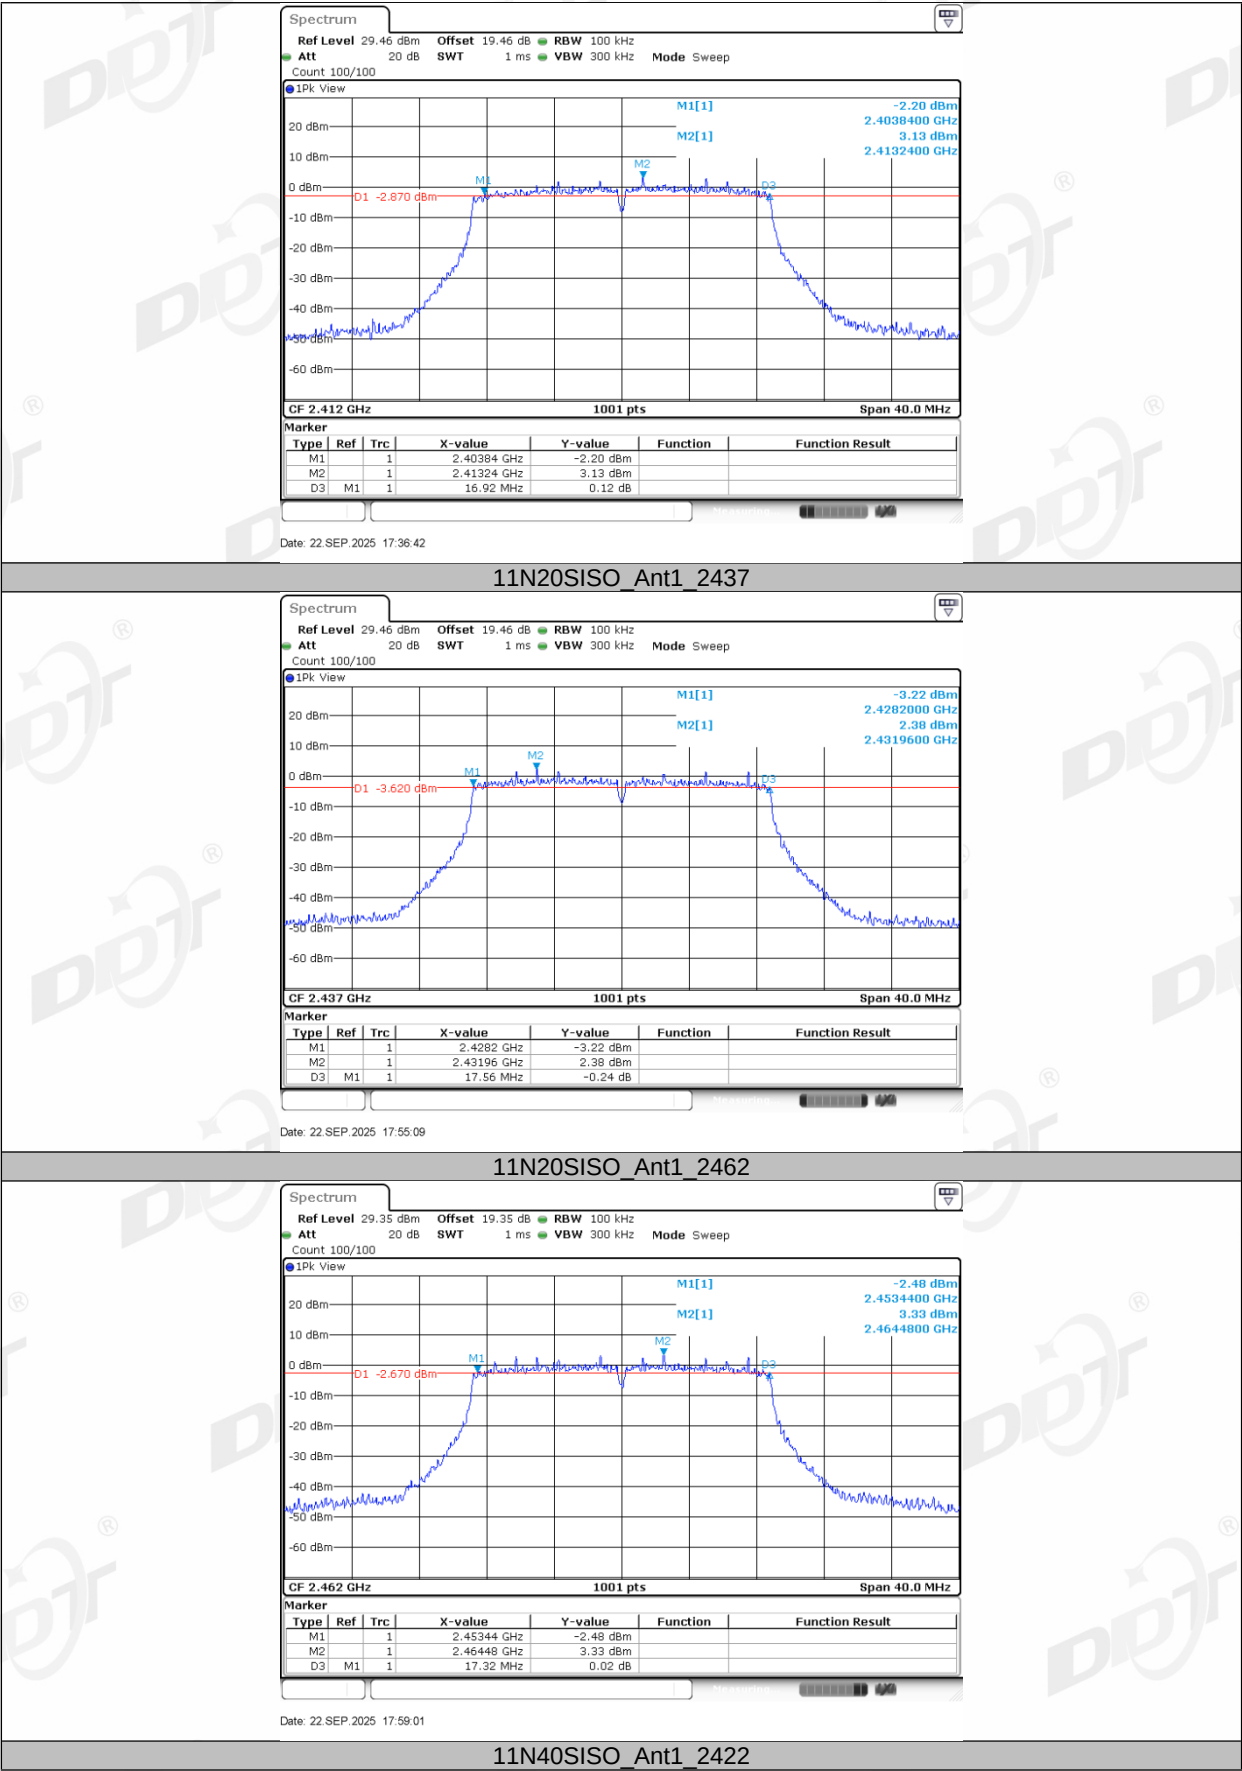

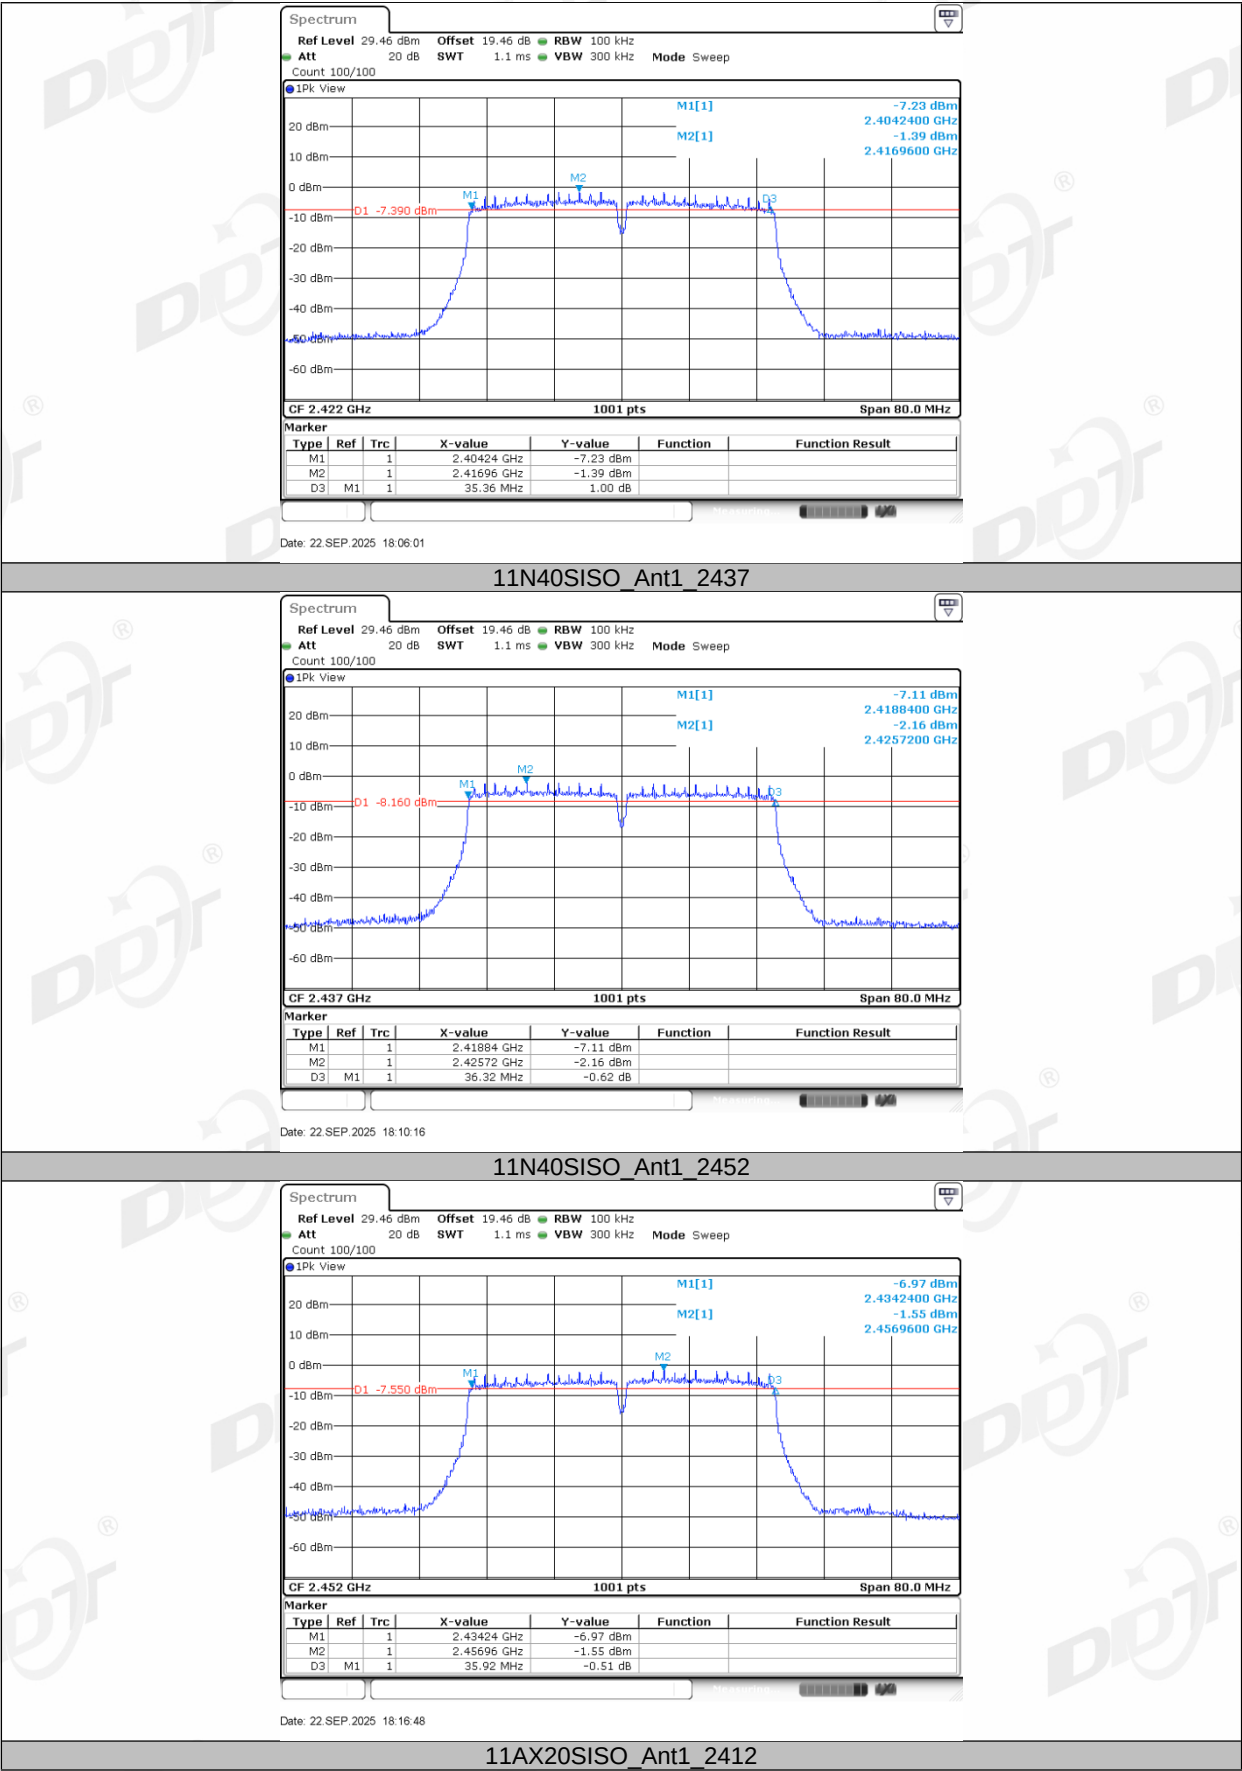


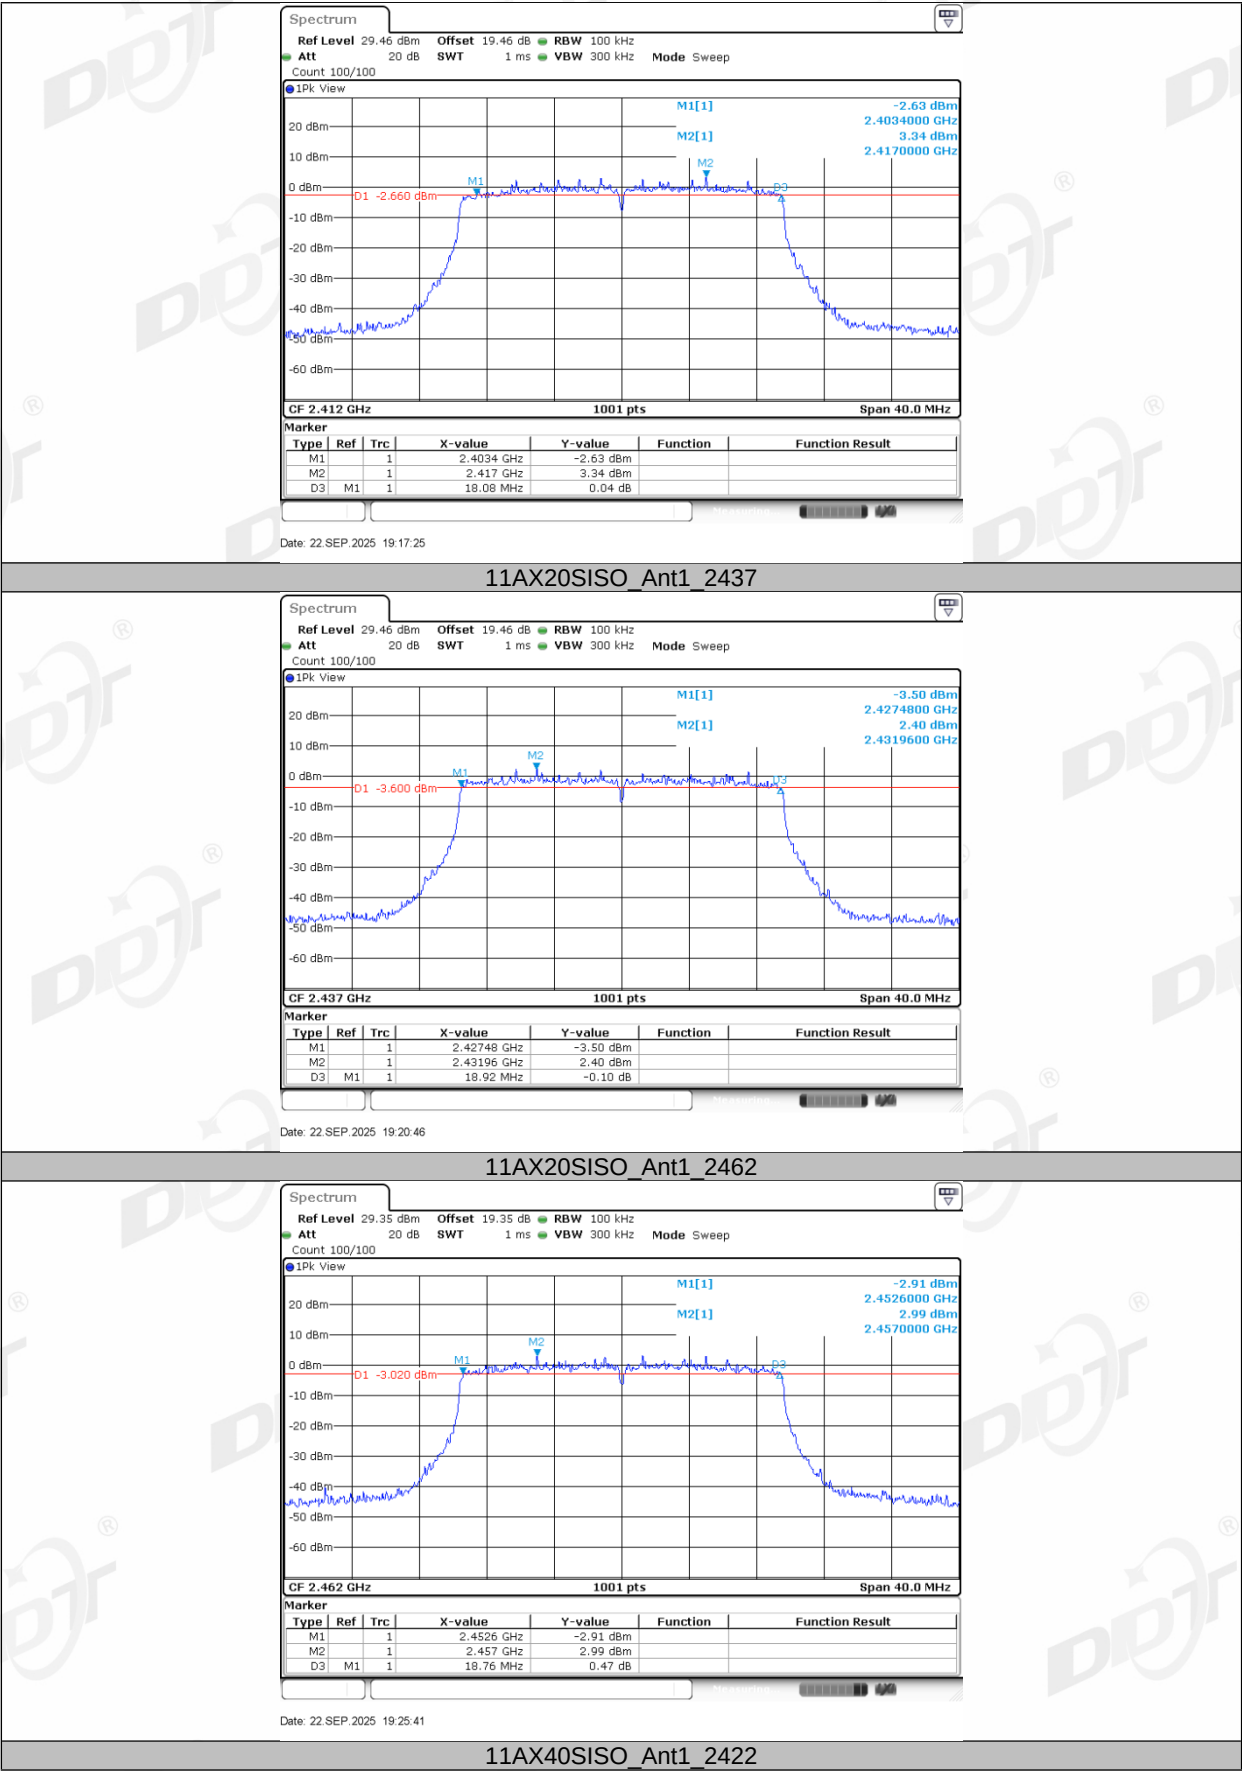



5. 99% Bandwidth

5.1. Block diagram of test setup

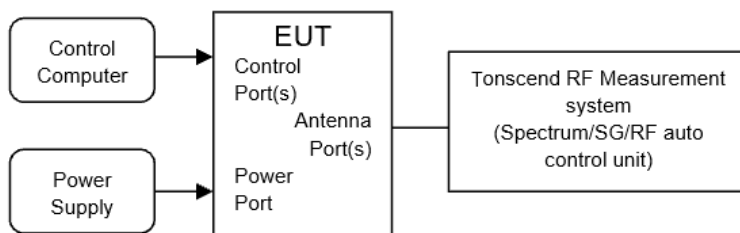

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.

5.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.987	2405.5664	2418.5534	---	---
		2437	13.187	2430.3267	2443.5135	---	---
		2462	12.987	2455.4865	2468.4735	---	---
11G	Ant1	2412	16.663	2403.6883	2420.3516	---	---
		2437	16.743	2428.5684	2445.3117	---	---
		2462	16.663	2453.6484	2470.3117	---	---
11N20SISO	Ant1	2412	17.782	2403.1289	2420.9111	---	---
		2437	17.862	2428.0090	2445.8711	---	---
		2462	17.782	2453.0889	2470.8711	---	---
11N40SISO	Ant1	2422	36.044	2403.9381	2439.9820	---	---
		2437	36.364	2418.7782	2455.1419	---	---
		2452	36.204	2433.8581	2470.0619	---	---
11AX20SISO	Ant1	2412	18.981	2402.5295	2421.5105	---	---
		2437	19.021	2427.4496	2446.4705	---	---
		2462	18.981	2452.4895	2471.4705	---	---
11AX40SISO	Ant1	2422	37.882	2403.0589	2440.9411	---	---
		2437	38.122	2417.8991	2456.0210	---	---
		2452	37.882	2433.0589	2470.9411	---	---

5.5. Test graphs

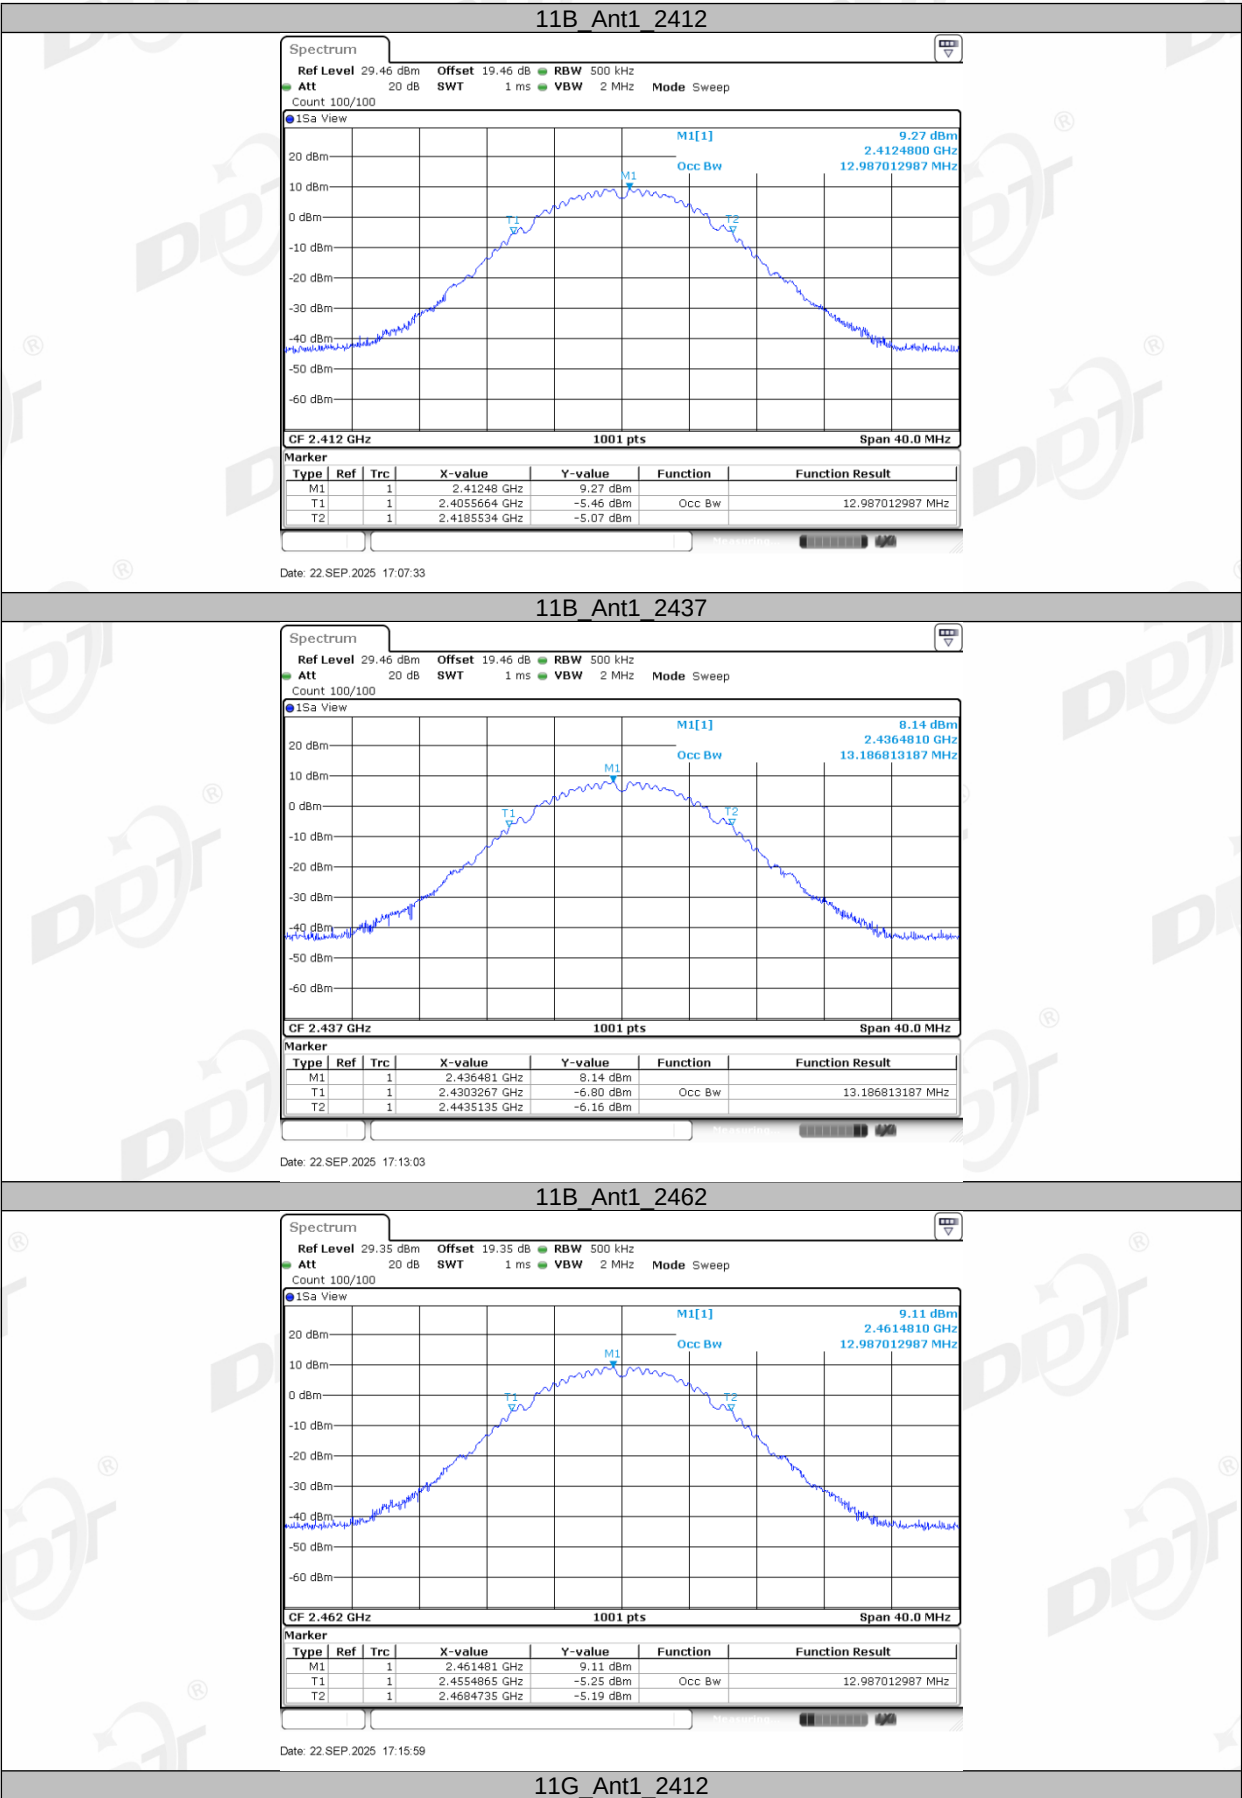






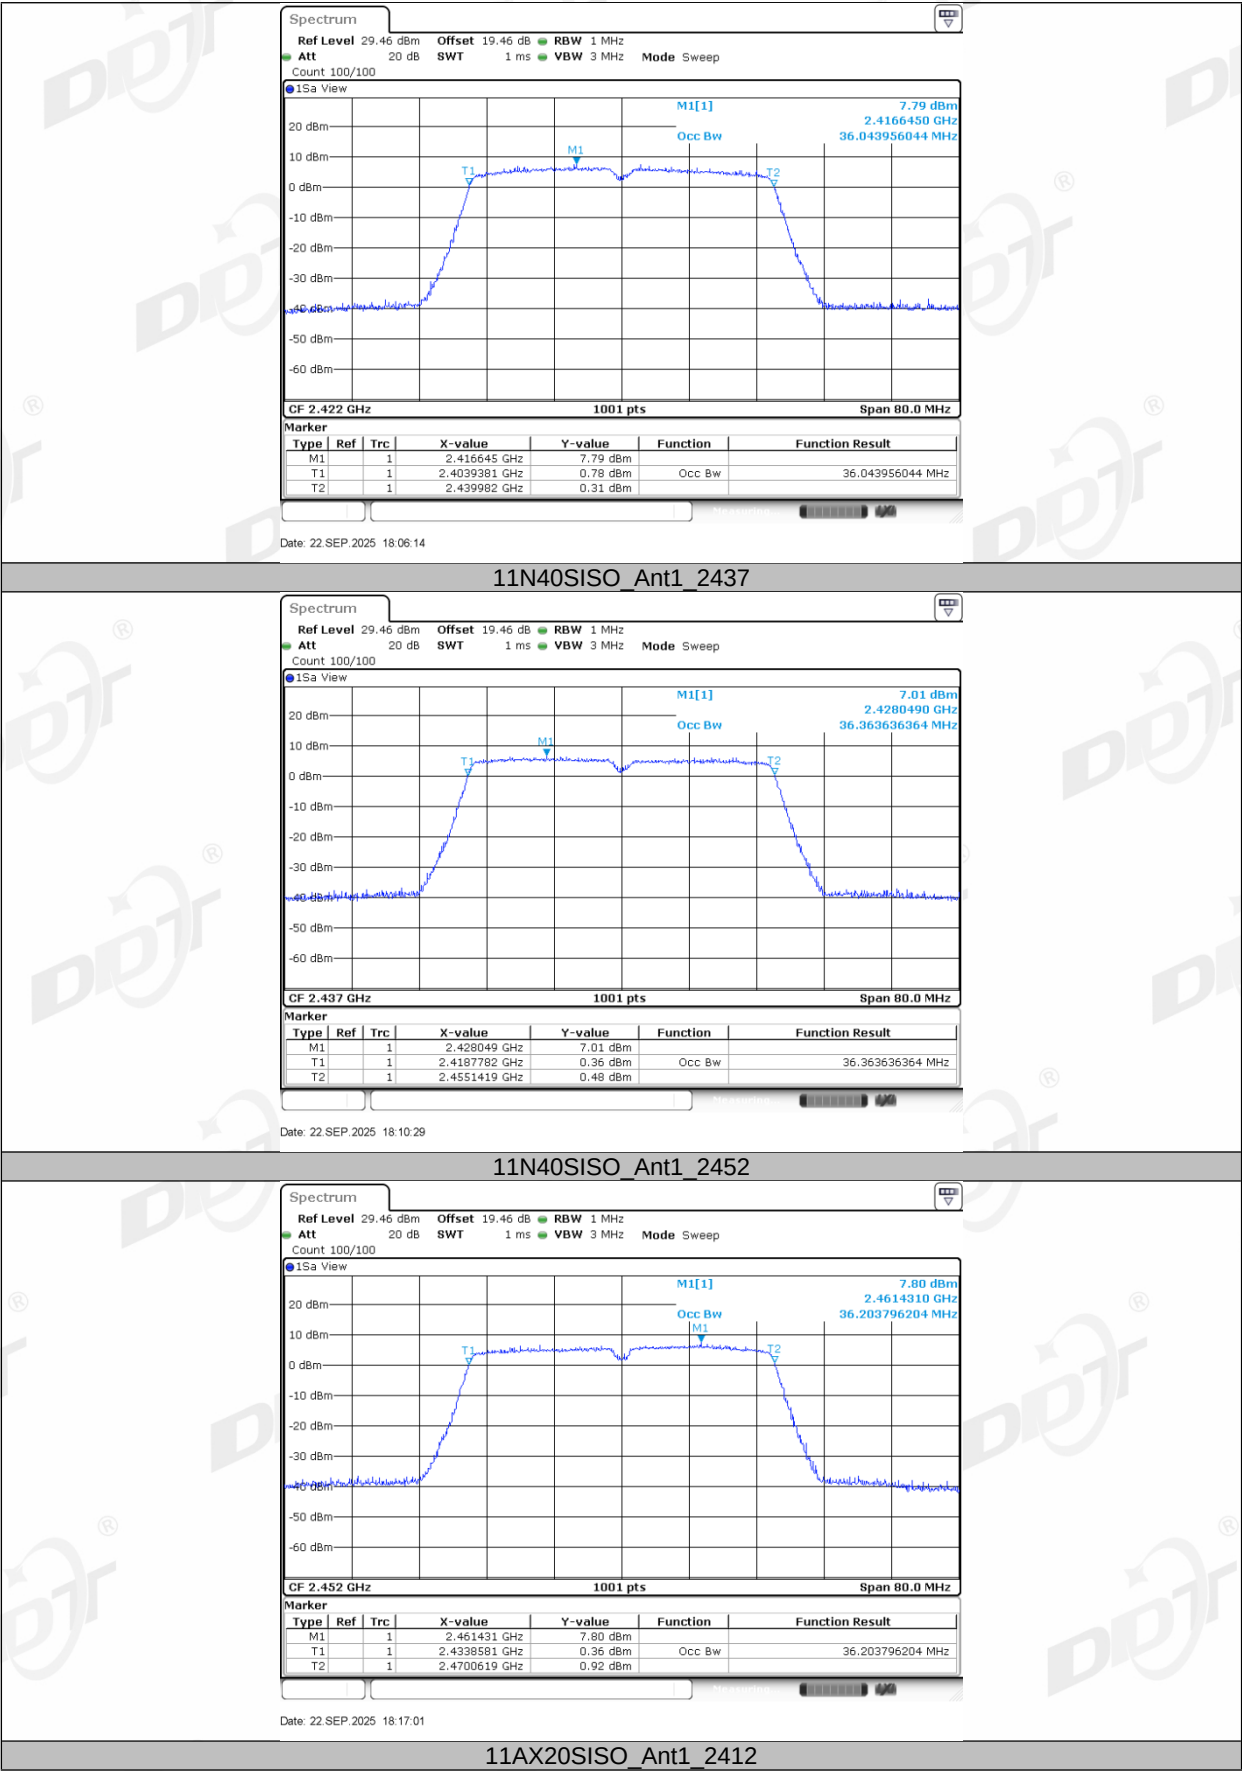




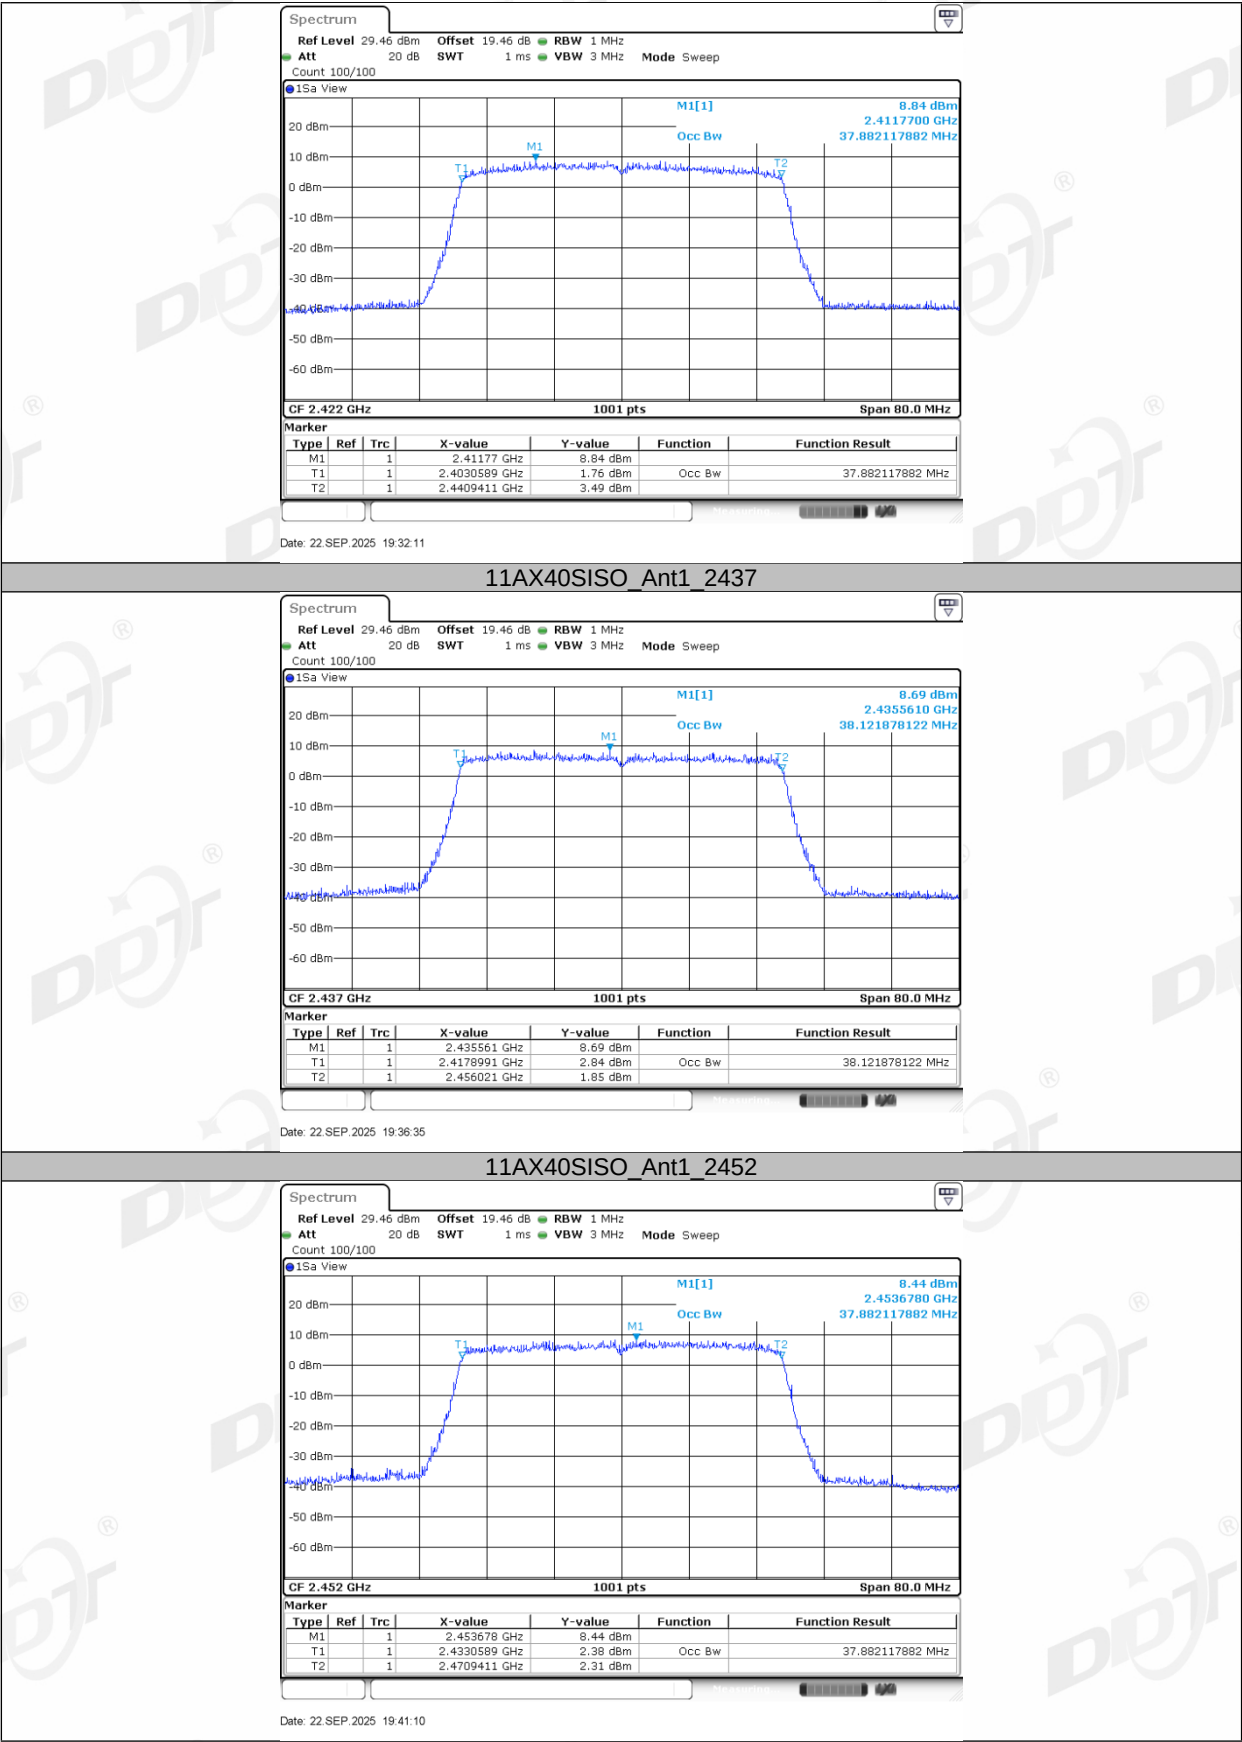

6. Conducted Output Power

6.1. Block diagram of test setup

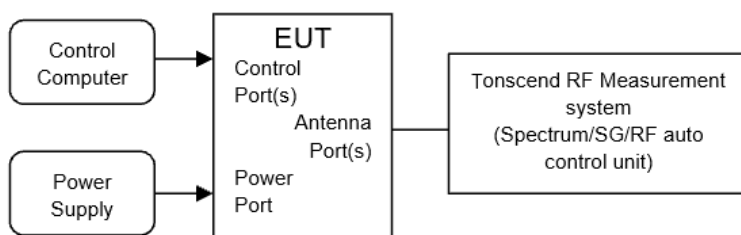

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	17.21	98.53	0.06	17.27	≤30.00	17.19	≤36.00	PASS
		2437	17.16	97.06	0.13	17.29	≤30.00	17.21	≤36.00	PASS
		2462	17.09	97.06	0.13	17.22	≤30.00	17.14	≤36.00	PASS
11G	Ant1	2412	16.30	99.06	0.04	16.34	≤30.00	16.26	≤36.00	PASS
		2437	16.25	99.53	0.02	16.27	≤30.00	16.19	≤36.00	PASS
		2462	16.15	99.06	0.04	16.19	≤30.00	16.11	≤36.00	PASS
11N20SISO	Ant1	2412	15.12	99.63	0.02	15.14	≤30.00	15.06	≤36.00	PASS
		2437	15.05	99.63	0.02	15.07	≤30.00	14.99	≤36.00	PASS
		2462	15.03	99.63	0.02	15.05	≤30.00	14.97	≤36.00	PASS
11N40SISO	Ant1	2422	13.26	99.63	0.02	13.28	≤30.00	13.20	≤36.00	PASS
		2437	13.27	100.00	0.00	13.27	≤30.00	13.19	≤36.00	PASS
		2452	13.42	99.63	0.02	13.44	≤30.00	13.36	≤36.00	PASS
11AX20SISO	Ant1	2412	15.15	99.63	0.02	15.17	≤30.00	15.09	≤36.00	PASS
		2437	15.16	99.63	0.02	15.18	≤30.00	15.10	≤36.00	PASS
		2462	15.10	99.63	0.02	15.12	≤30.00	15.04	≤36.00	PASS
11AX40SISO	Ant1	2422	13.22	99.63	0.02	13.24	≤30.00	13.16	≤36.00	PASS
		2437	13.17	99.63	0.02	13.19	≤30.00	13.11	≤36.00	PASS
		2452	13.35	100.00	0.00	13.35	≤30.00	13.27	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

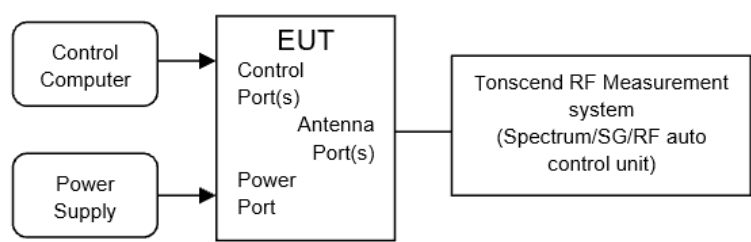

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.10.5.

(2) Connect EUT’s antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.

(3) Set the EUT as maximum power setting and enable the EUT transmit continuously.

(4) Use the following spectrum analyzer settings for Power Spectral Density measurement:
- | | |
|------------------|------------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW: | 3 kHz ≤ RBW ≤ 100 kHz |
| VBW: | ≥ 3RBW |
| Span | 1.5 times the DTS bandwidth |
| Detector Mode: | RMS |
| Sweep time: | auto |
| Trace mode | max hold |
| | Employ trace averaging (rms) |
| Trace | mode over a minimum of 100 traces. |

- (5) Add [10 log (1 / D)], where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.95	≤8.00	PASS
		2437	-11.02	≤8.00	PASS
		2462	-9.94	≤8.00	PASS
11G	Ant1	2412	-18.16	≤8.00	PASS
		2437	-19.48	≤8.00	PASS
		2462	-18.04	≤8.00	PASS
11N20SISO	Ant1	2412	-19.23	≤8.00	PASS
		2437	-20.59	≤8.00	PASS
		2462	-19.93	≤8.00	PASS
11N40SISO	Ant1	2422	-24.53	≤8.00	PASS
		2437	-25.36	≤8.00	PASS
		2452	-24.39	≤8.00	PASS
11AX20SISO	Ant1	2412	-20.44	≤8.00	PASS
		2437	-20.66	≤8.00	PASS
		2462	-20.75	≤8.00	PASS
11AX40SISO	Ant1	2422	-25.57	≤8.00	PASS
		2437	-26.03	≤8.00	PASS
		2452	-25.99	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.


7.5. Test graphs

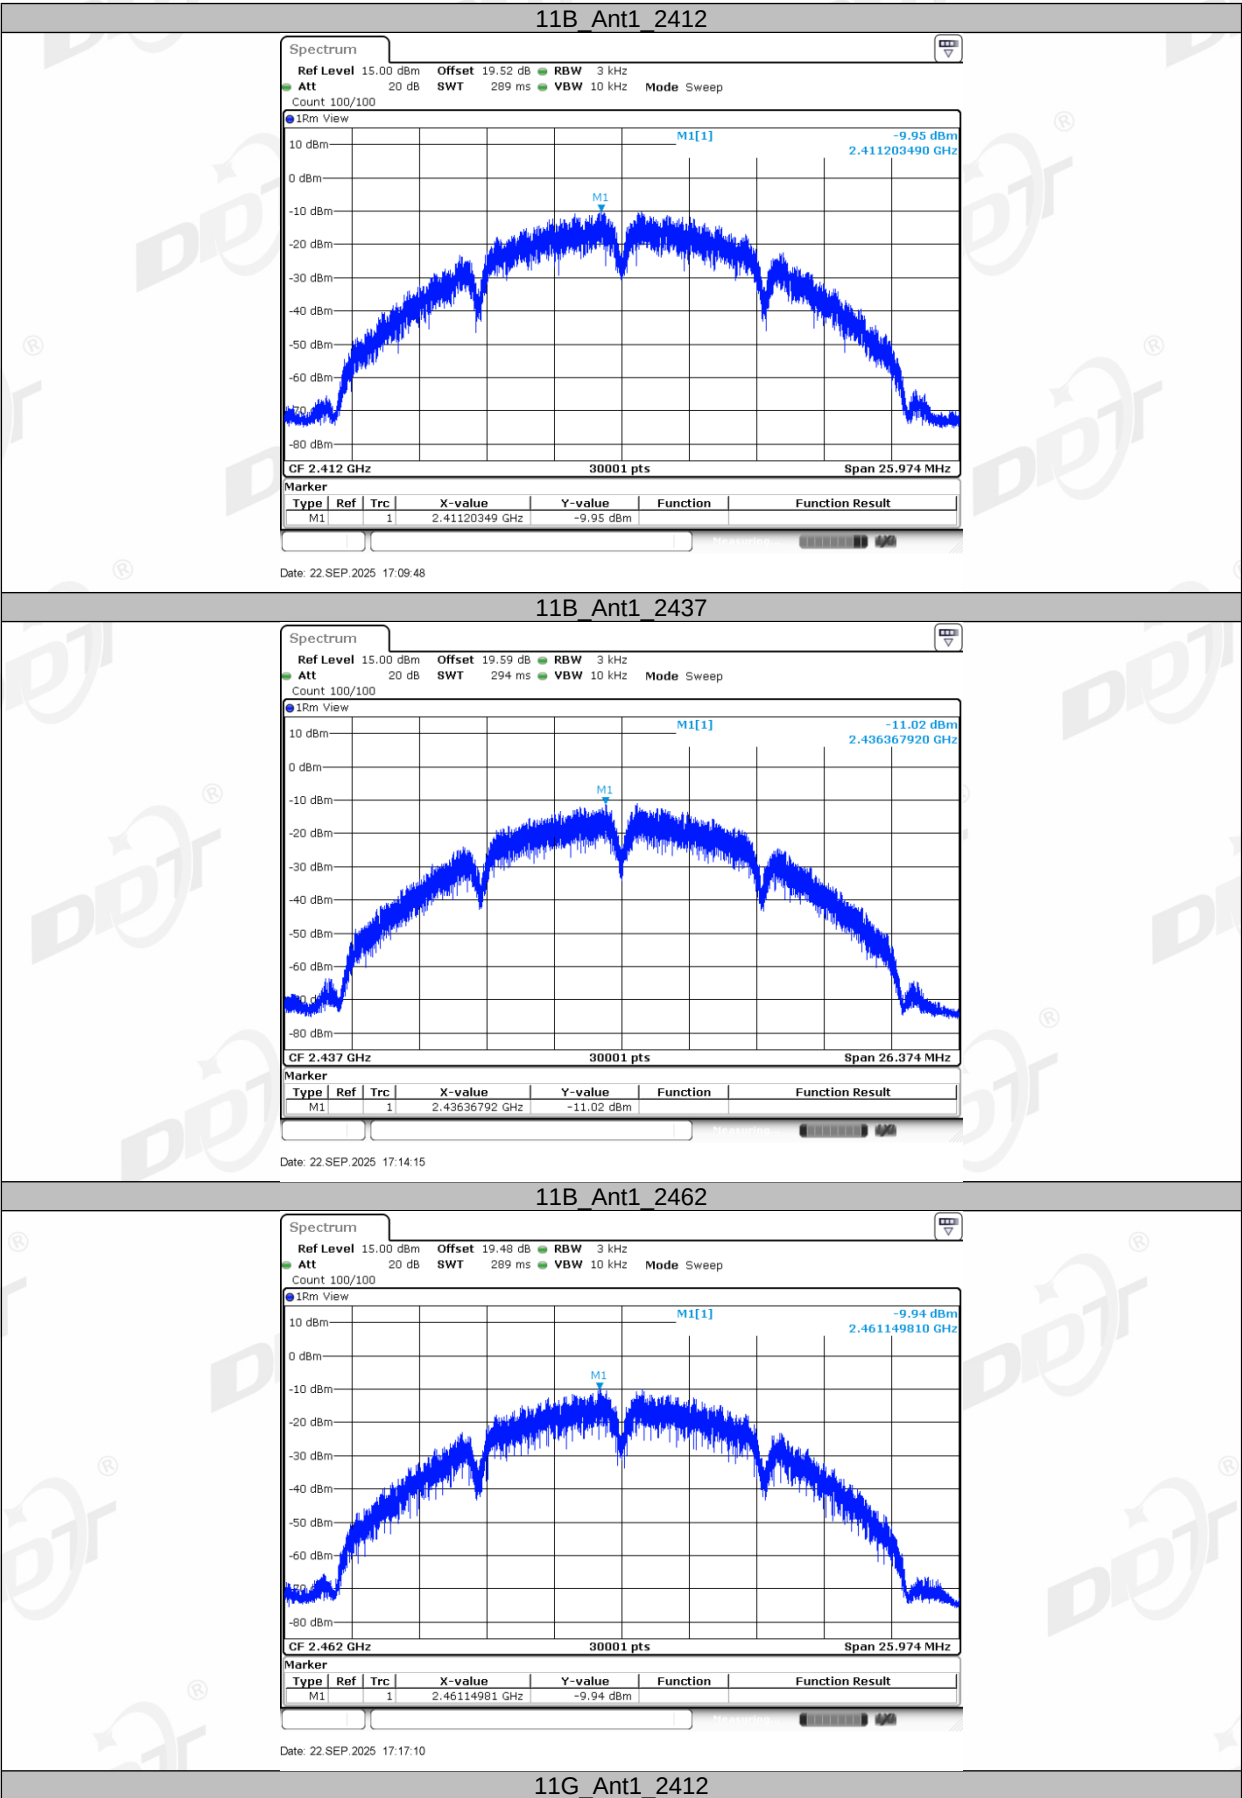


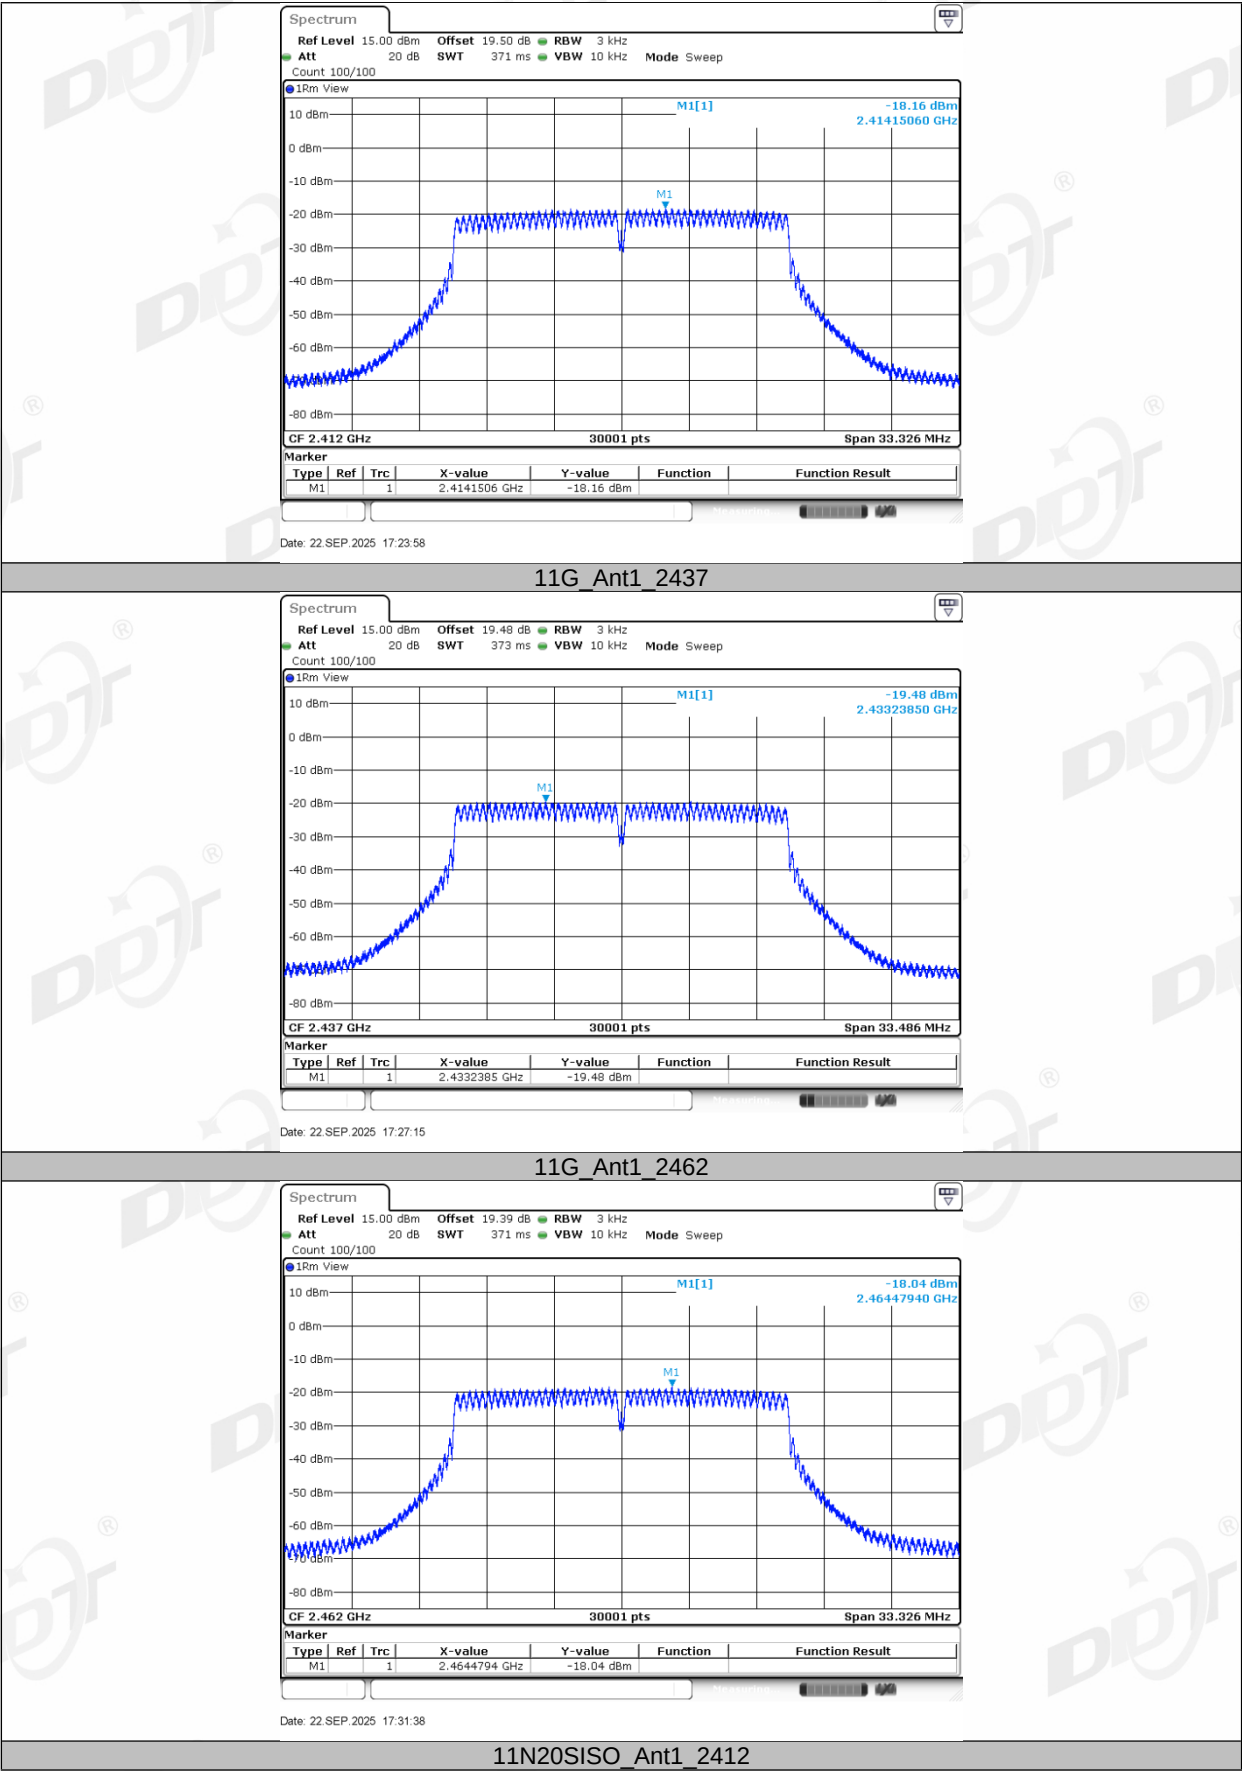

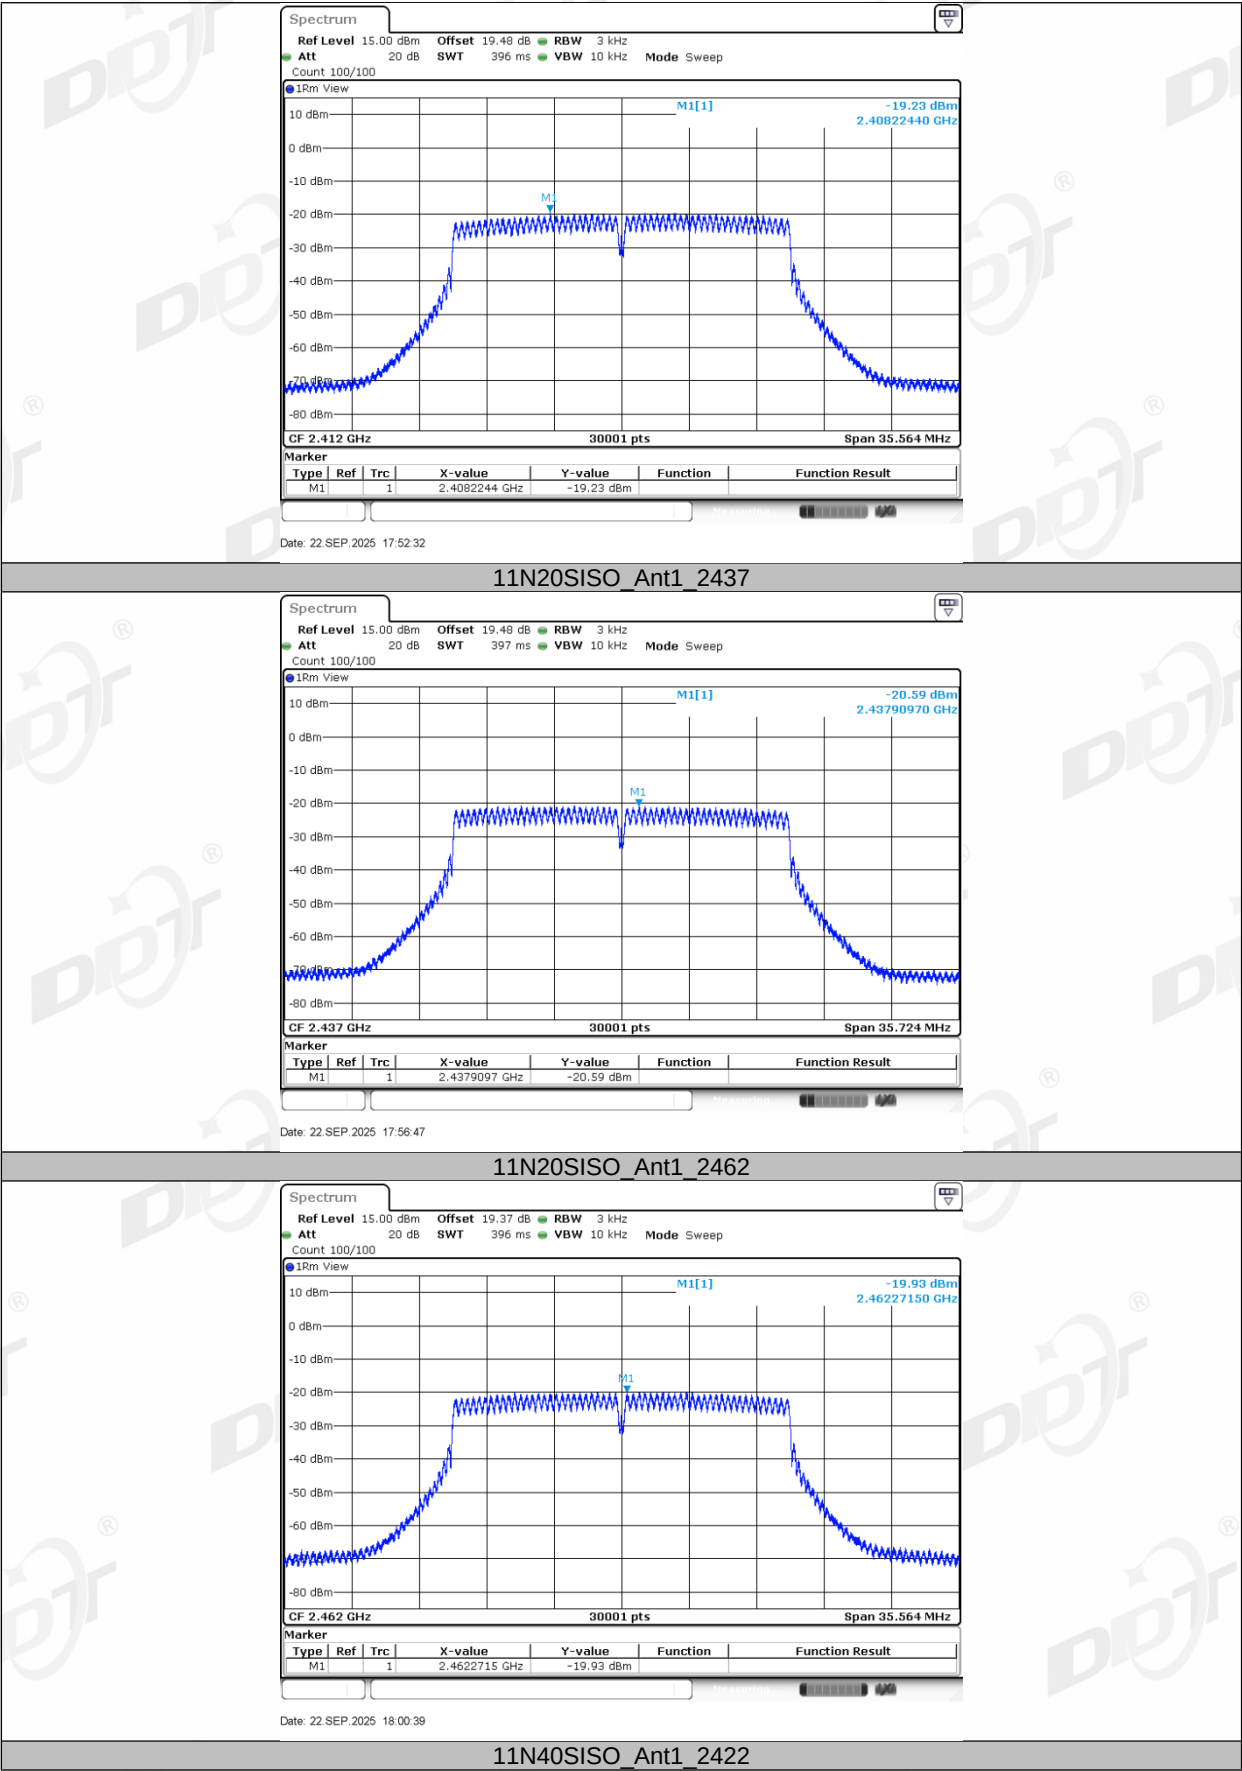

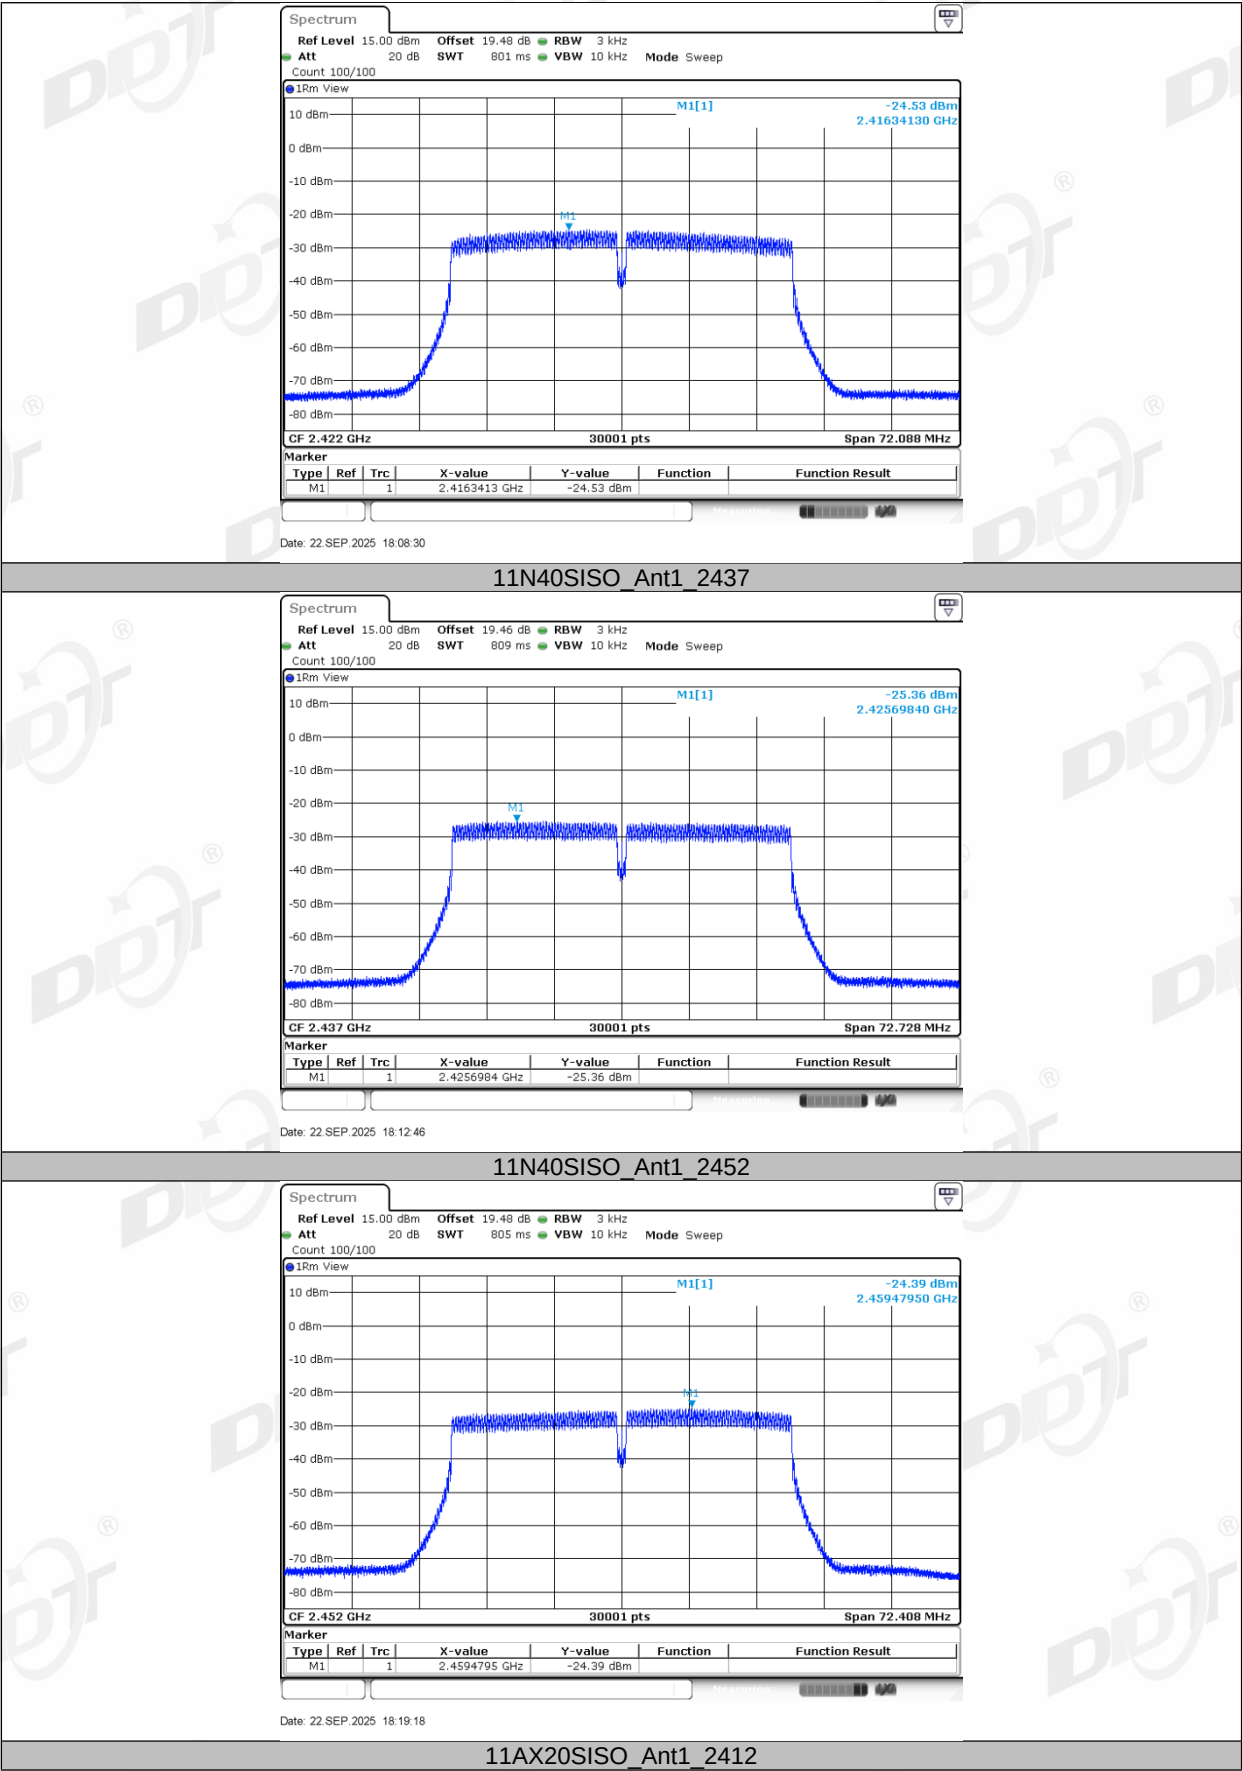


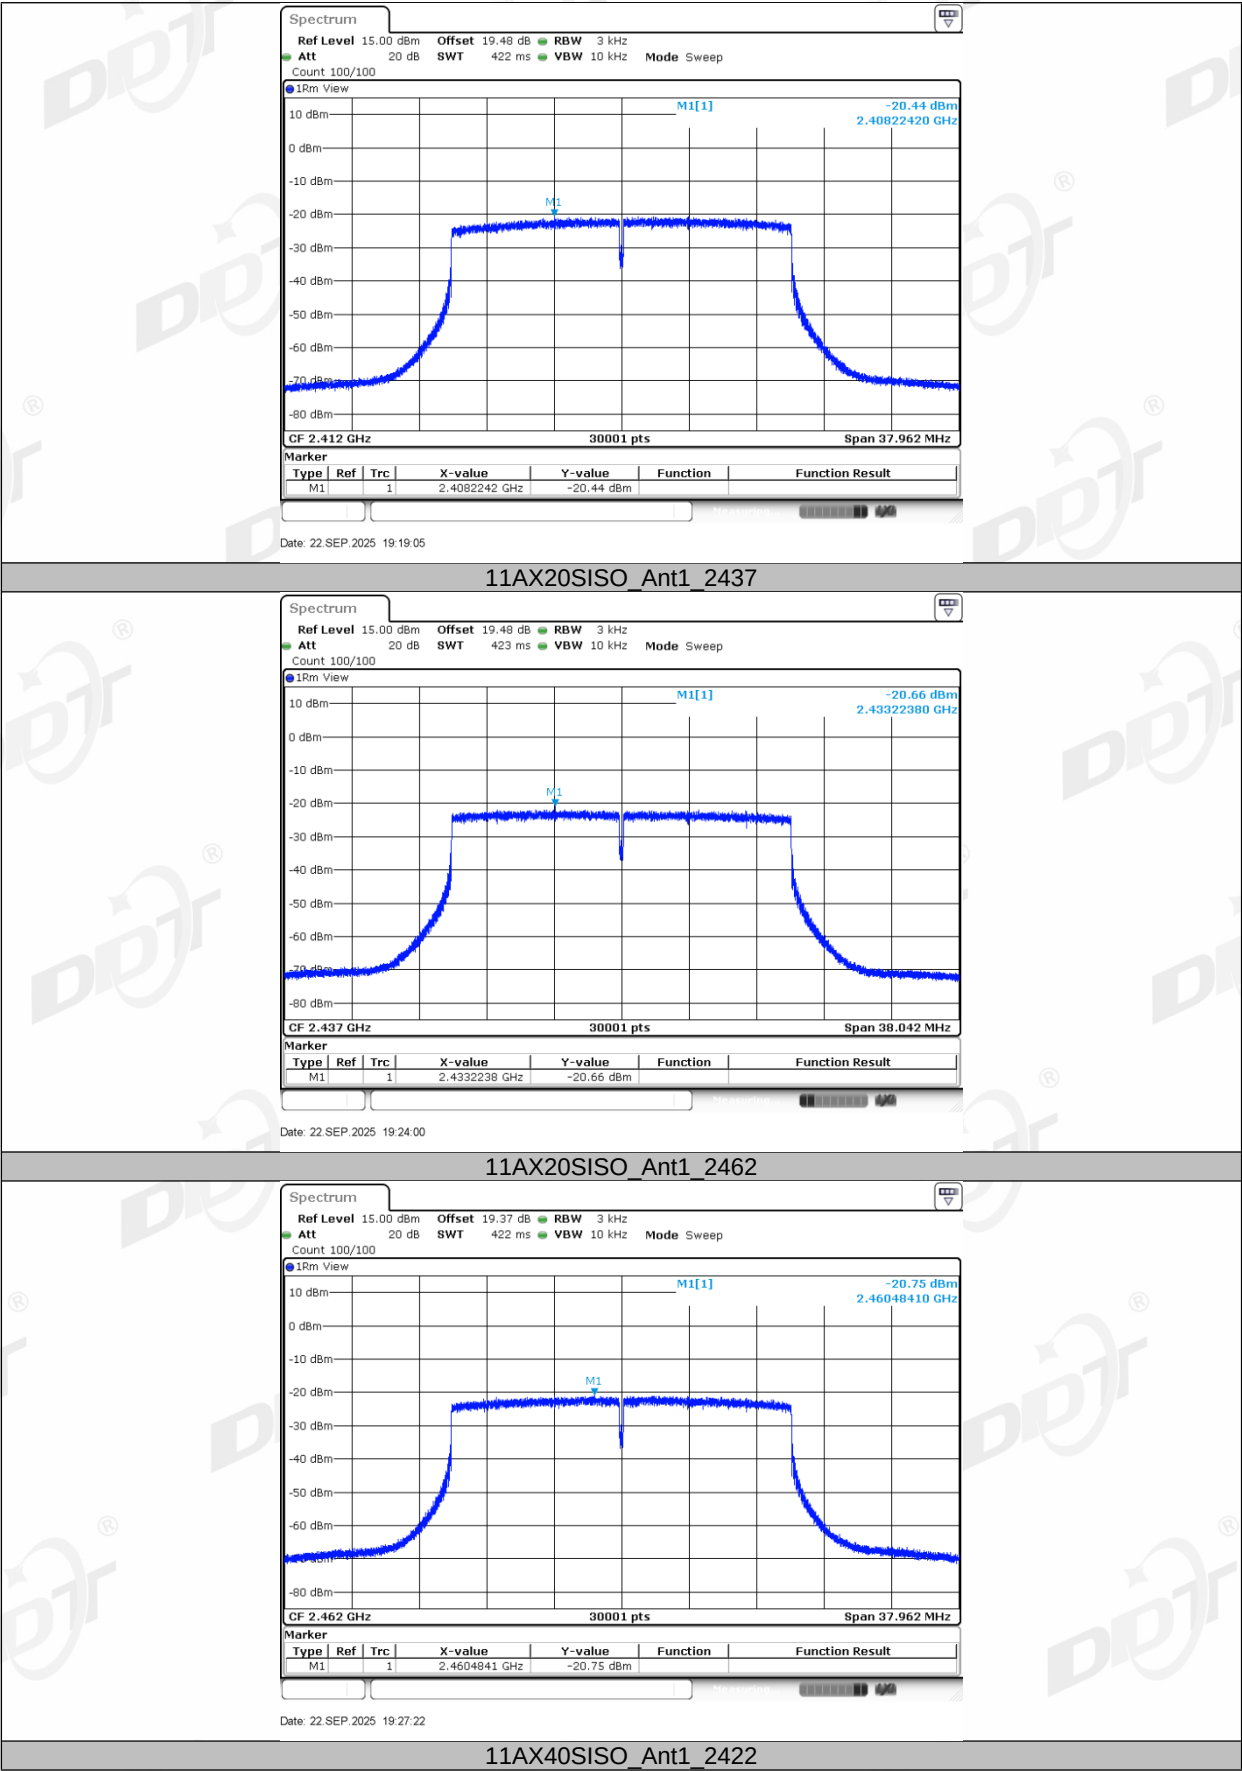

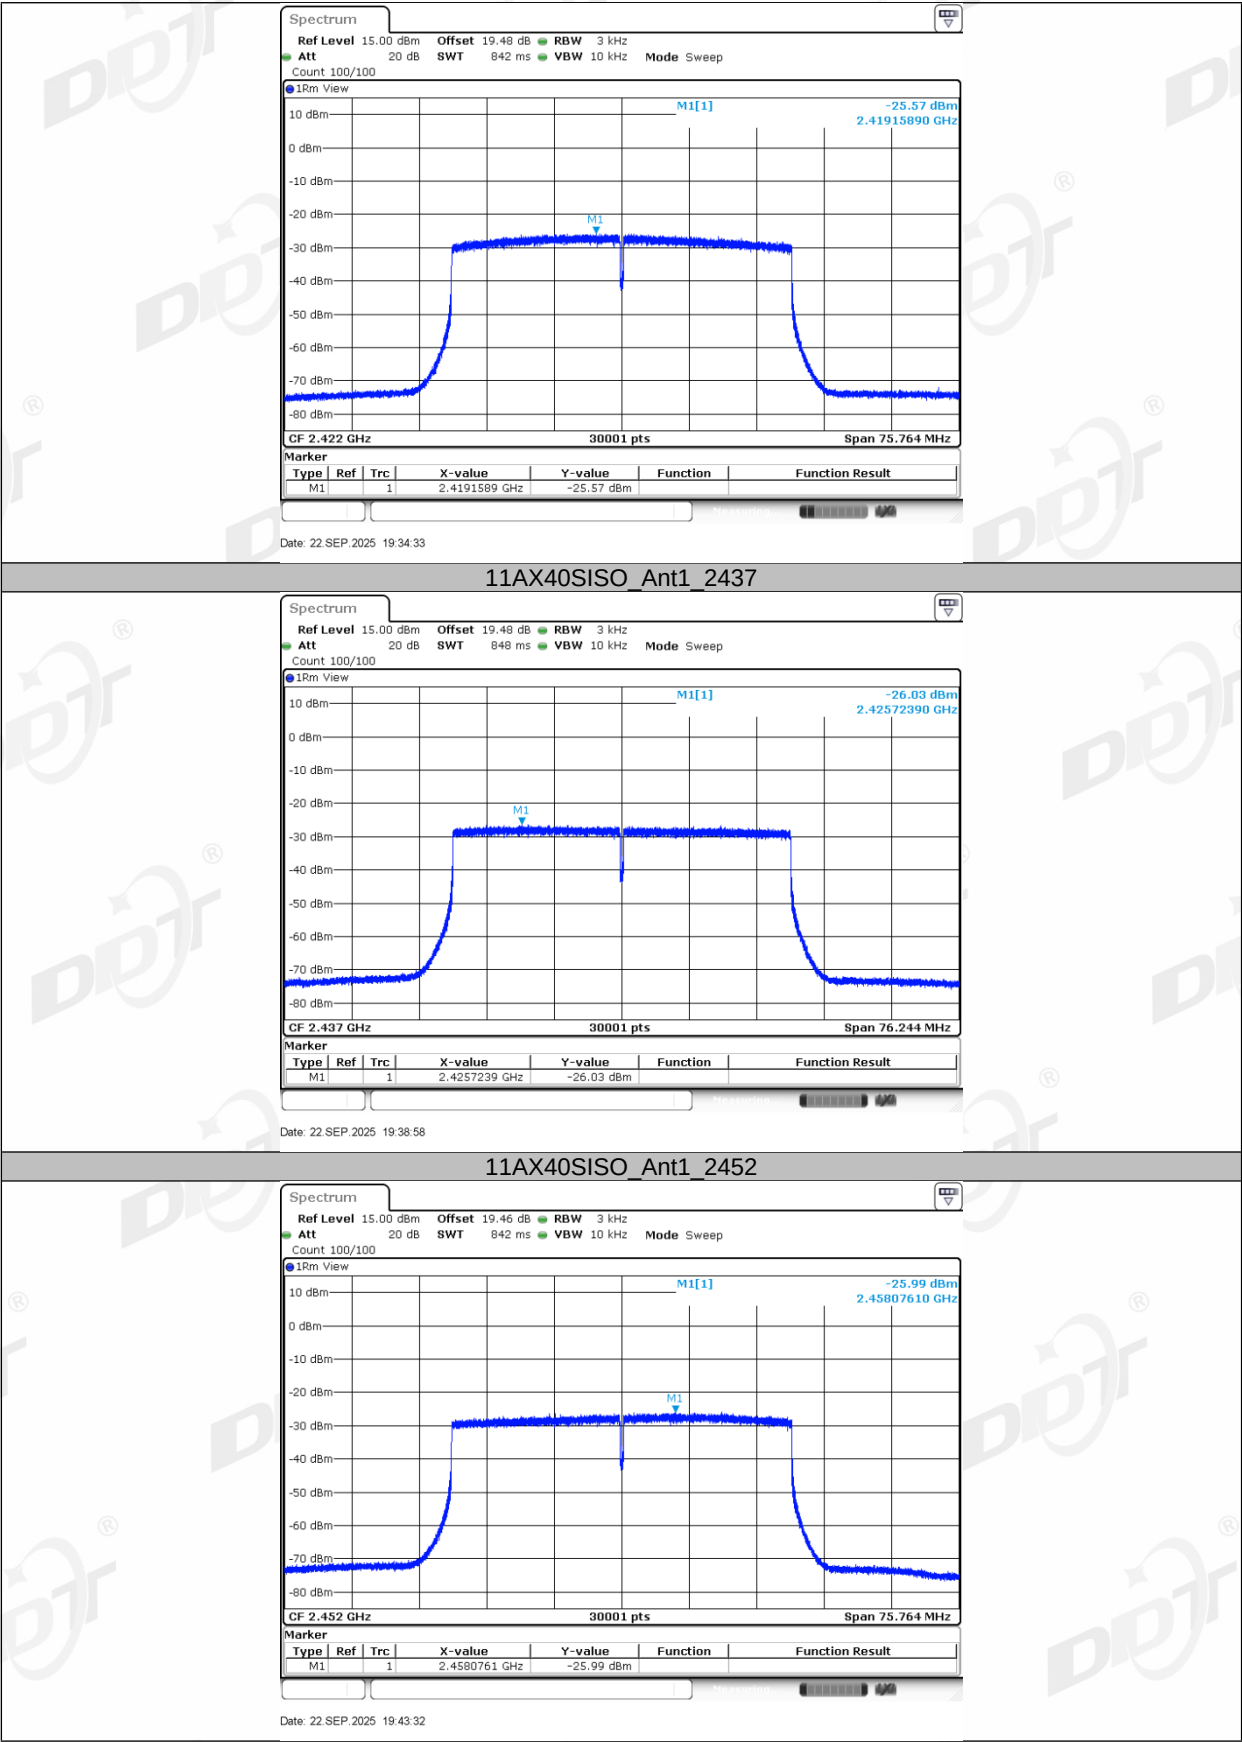

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

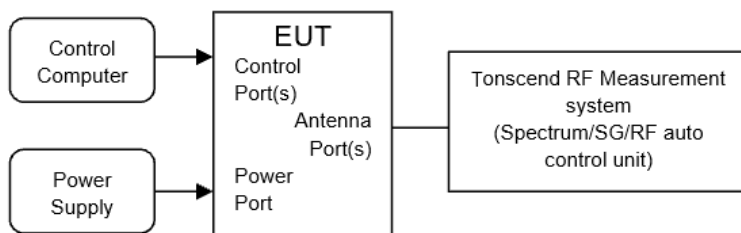

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass


8.5. Test graphs



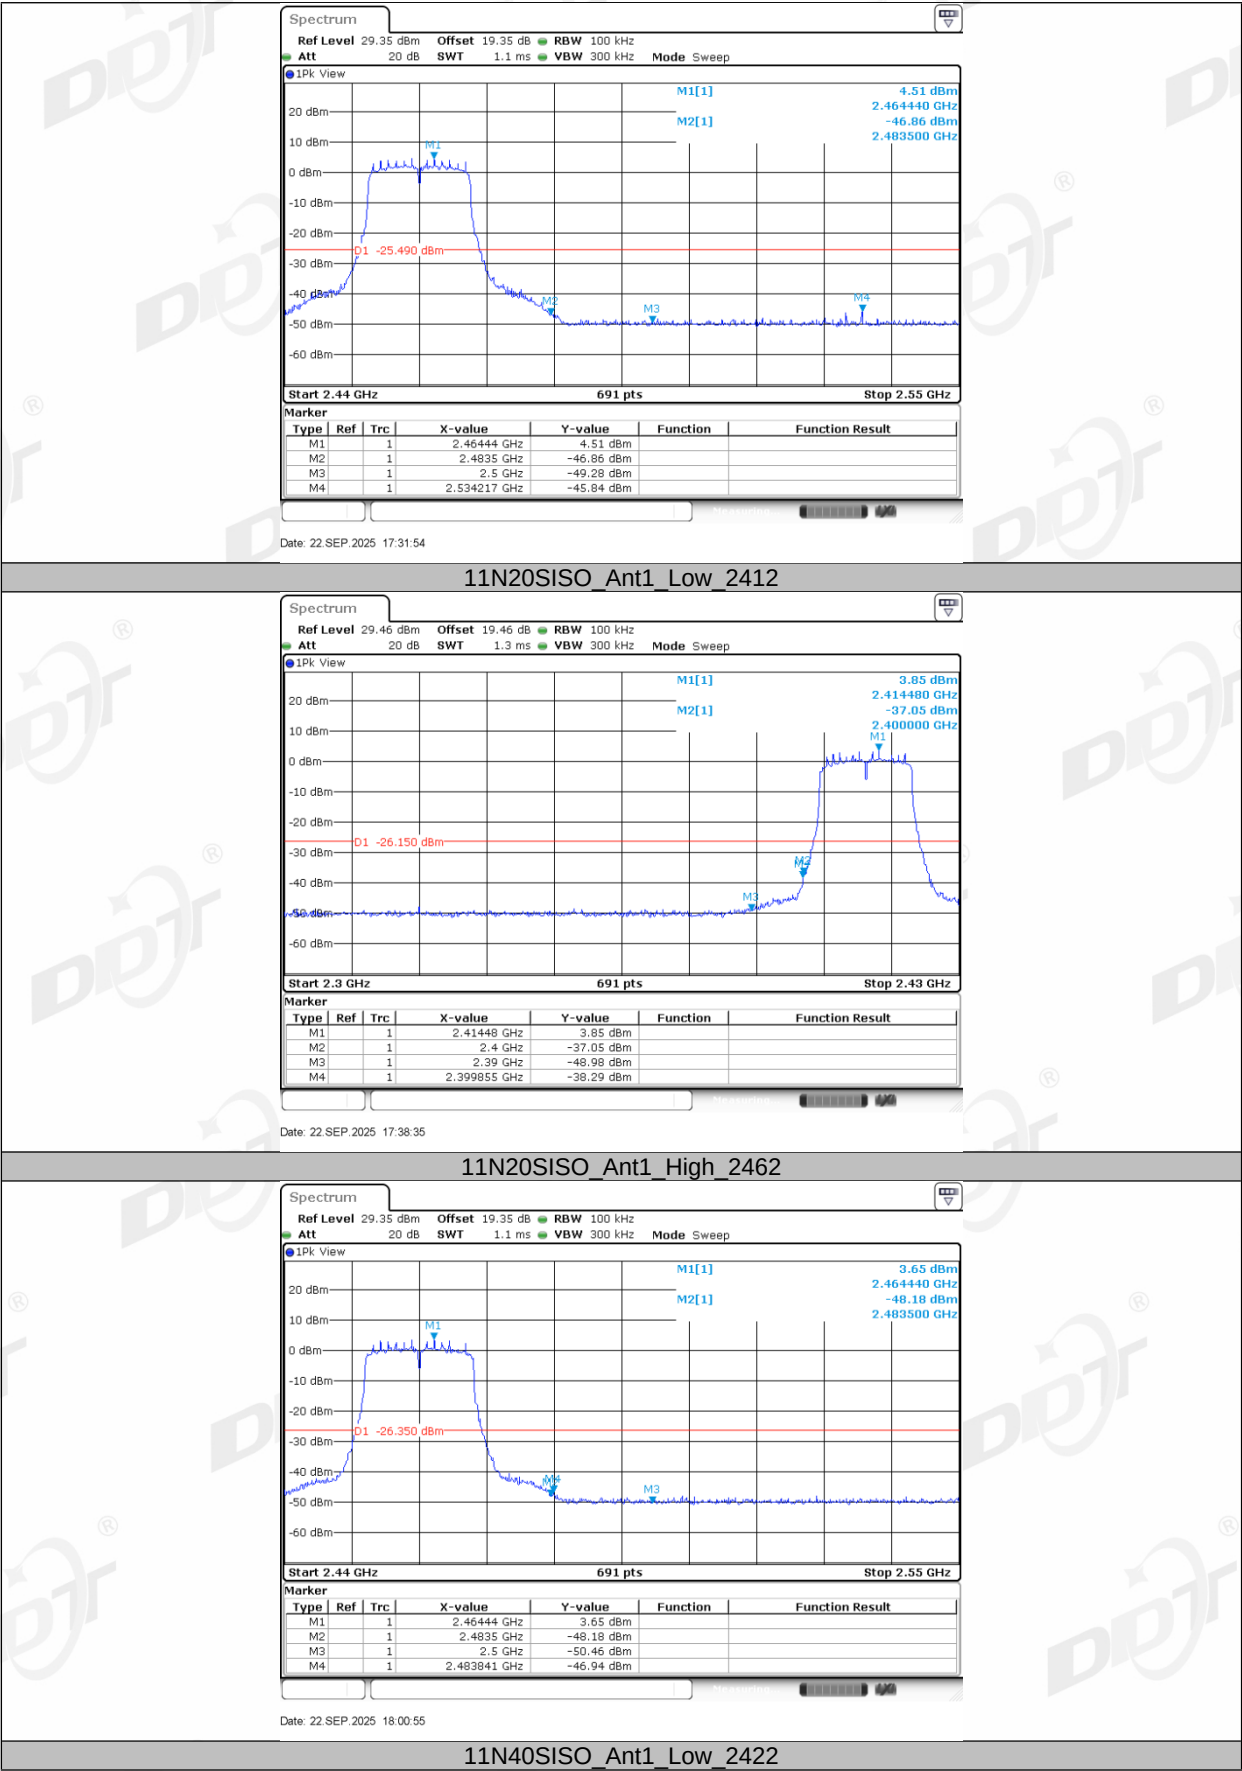


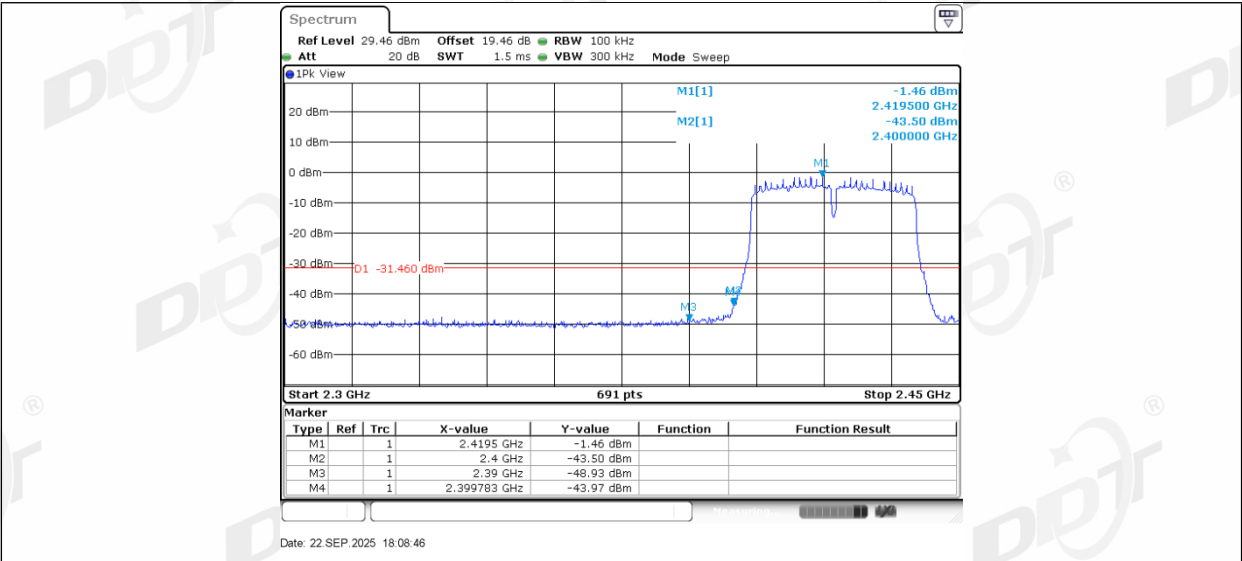


11N40SISO_Ant1_High_2452

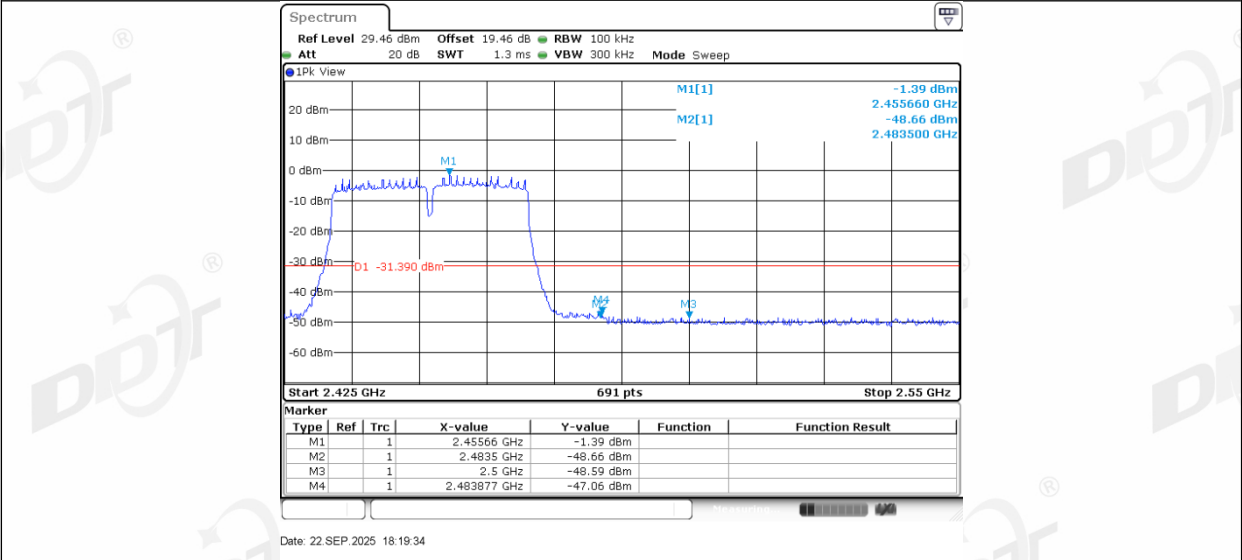

11AX20SISO_Ant1_Low_2412

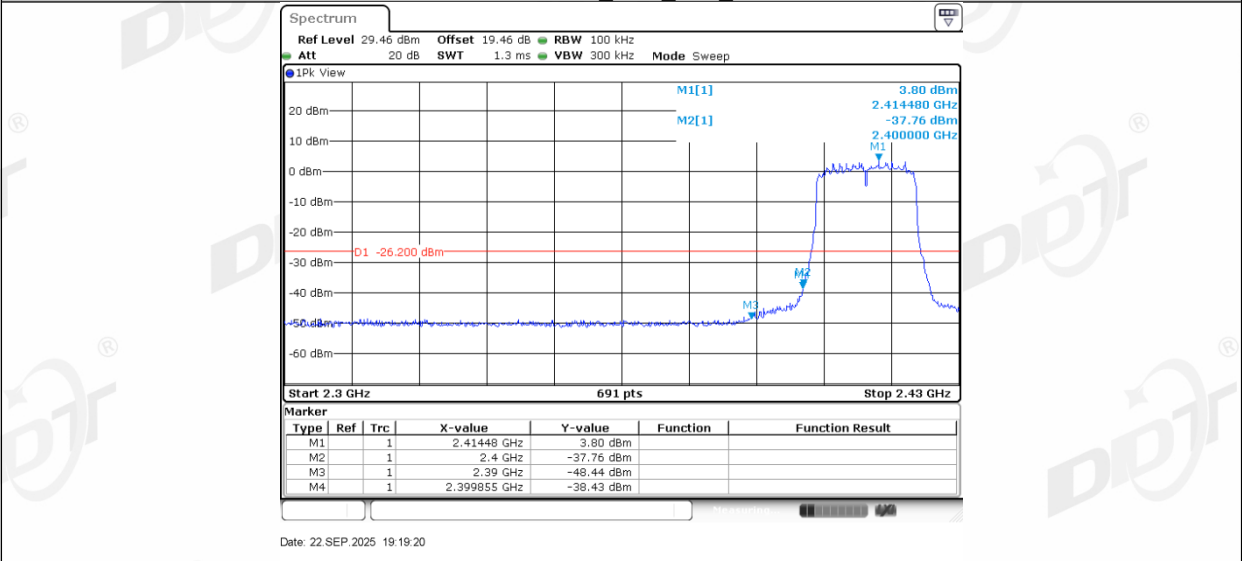


11AX20SISO_Ant1_High_2462

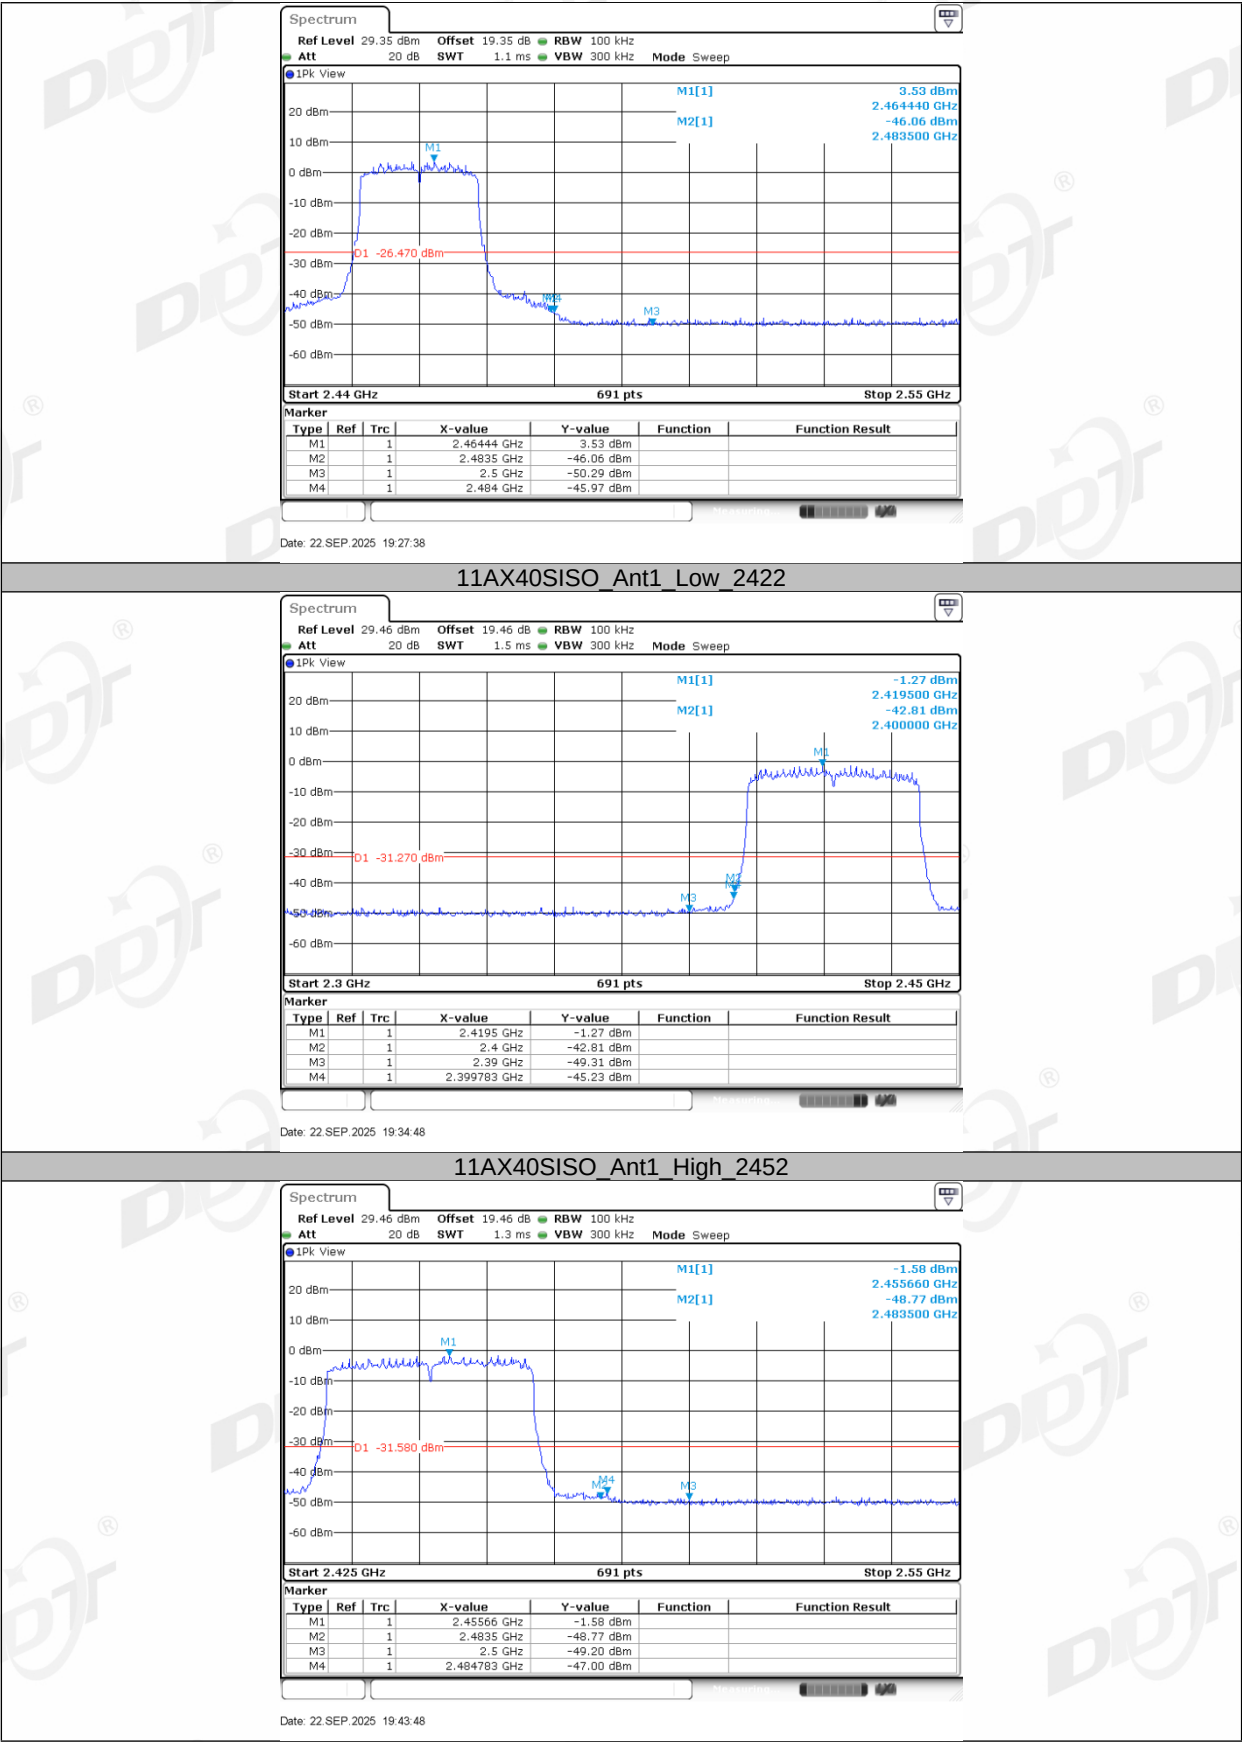

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

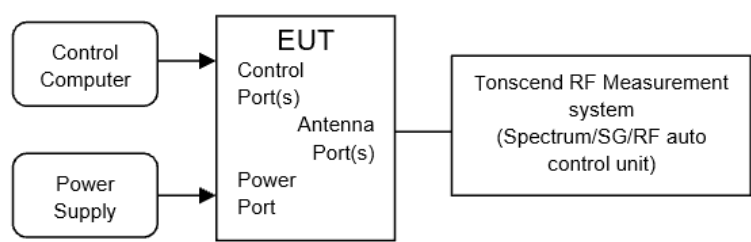

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT’s antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥Span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,41.6%RH	Test Date:	2025.09.22
Test Power Supply:	Battery	Sample Number:	S25071020

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

9.5. Test graphs

