

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-02

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX 11G 2462MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\23

Memo:

Sample Numbler:S25071020-009

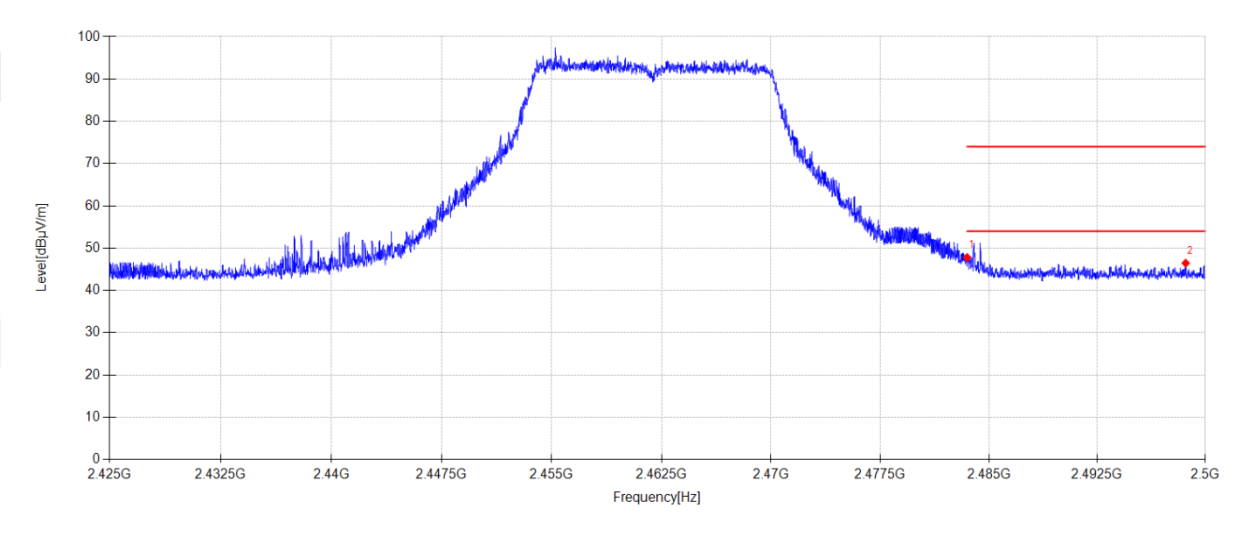

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	14.89	28.01	4.89	0.00	47.79	74.00	26.21	PK	Vertical
2	2498.635	13.51	28.05	4.90	0.00	46.46	74.00	27.54	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-04 **Tested By:** Nan Zhong
EUT: Portable High Resolution Music Player **Model Number:** F3051M
Test Mode: TX AX20 2412MHz Mode **Power Supply:** Battery
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\30
Memo: Sample Numbler:S25071020-009

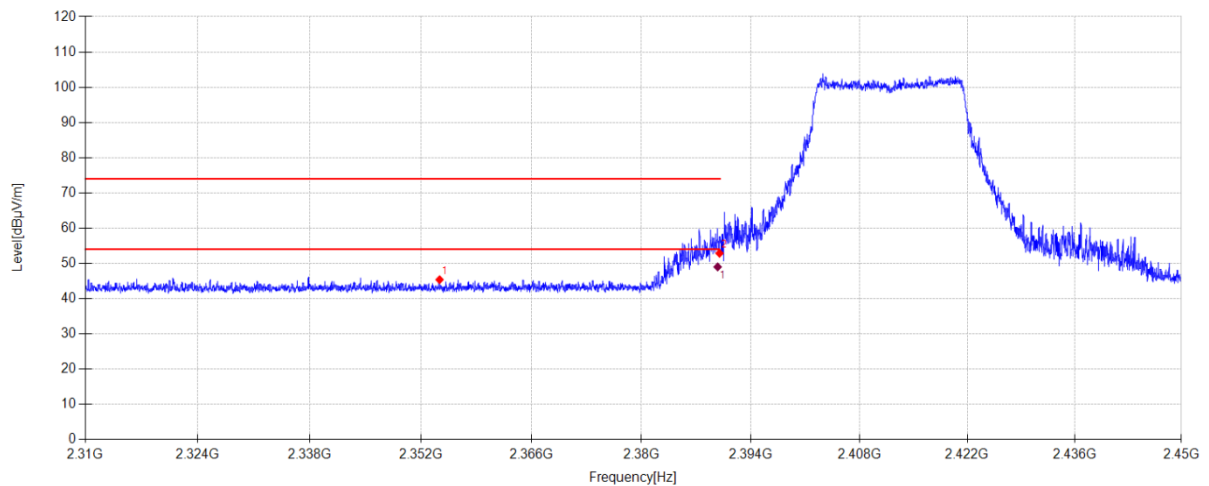

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2354.352	12.88	27.69	4.81	0.00	45.38	74.00	28.62	PK	Horizontal
2	2390.000	20.24	27.78	4.84	0.00	52.86	74.00	21.14	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.768	16.38	27.78	4.84	49.00	54.00	5.00	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX AX20 2412MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\31

Memo:

Sample Numbler:S25071020-009

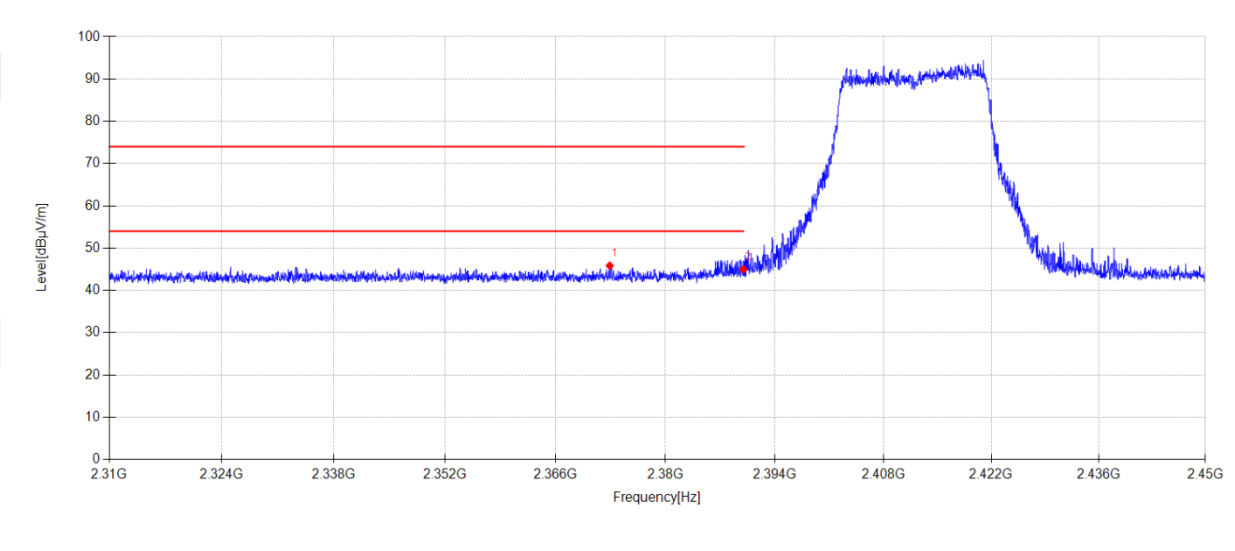

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.902	13.30	27.73	4.82	0.00	45.85	74.00	28.15	PK	Vertical
2	2390.000	12.38	27.78	4.84	0.00	45.00	74.00	29.00	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-04 **Tested By:** Nan Zhong
EUT: Portable High Resolution Music Player **Model Number:** F3051M
Test Mode: TX AX20 2462MHz Mode **Power Supply:** Battery
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\32
Memo: Sample Numbler:S25071020-009

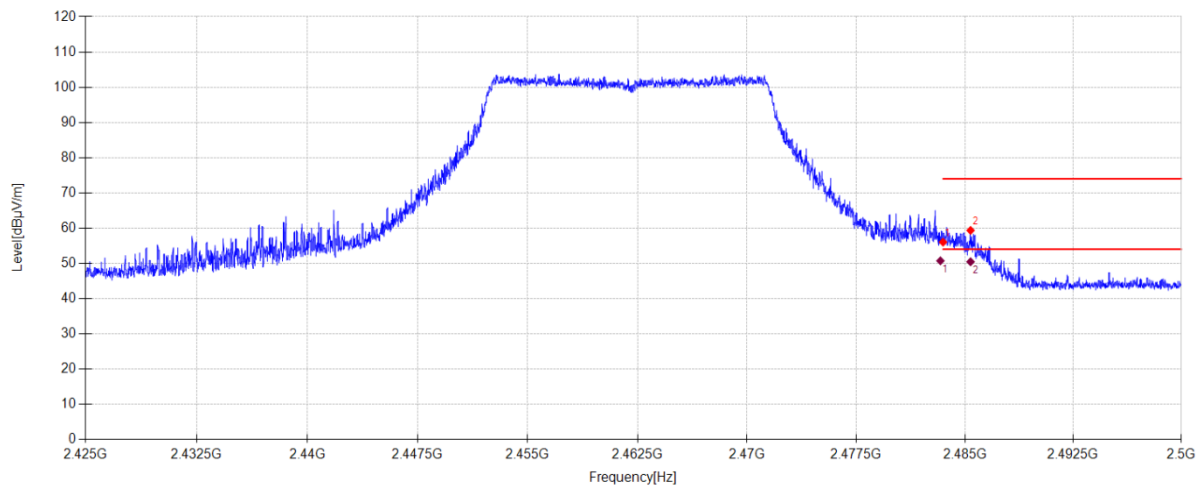

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.14	28.01	4.89	0.00	56.04	74.00	17.96	PK	Horizontal
2	2485.398	26.46	28.01	4.90	0.00	59.37	74.00	14.63	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.317	17.84	28.01	4.89	50.74	54.00	3.26	AV	Horizontal
2	2485.398	17.55	28.01	4.90	50.46	54.00	3.54	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX AX20 2462MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\33

Memo:

Sample Numbler:S25071020-009

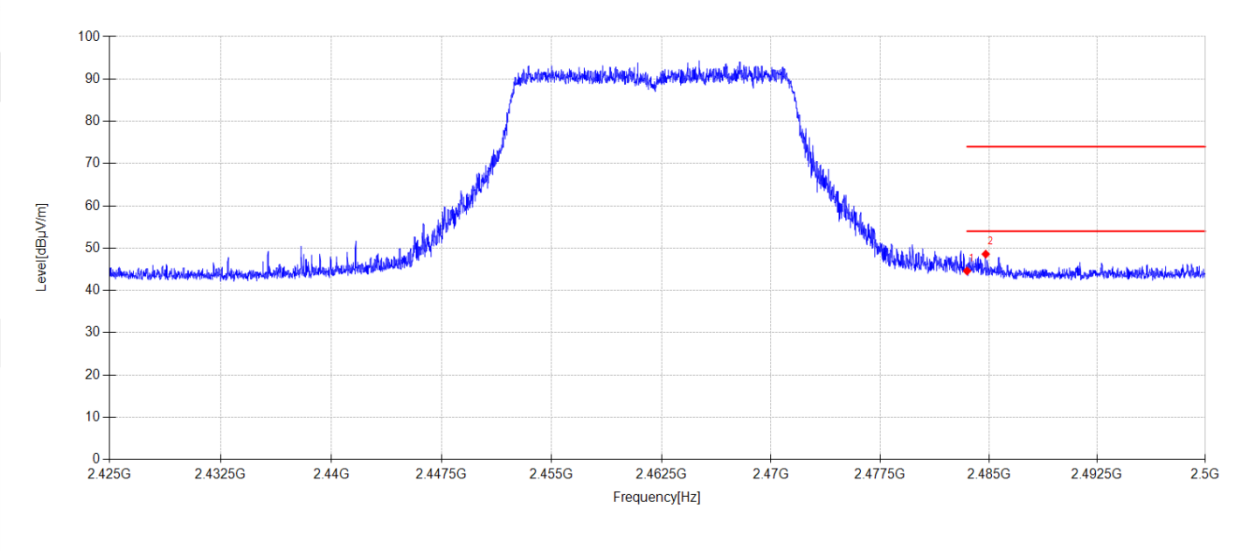

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.71	28.01	4.89	0.00	44.61	74.00	29.39	PK	Vertical
2	2484.790	15.68	28.01	4.90	0.00	48.59	74.00	25.41	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX AX40 2452MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\34

Memo:

Sample Numbler:S25071020-009

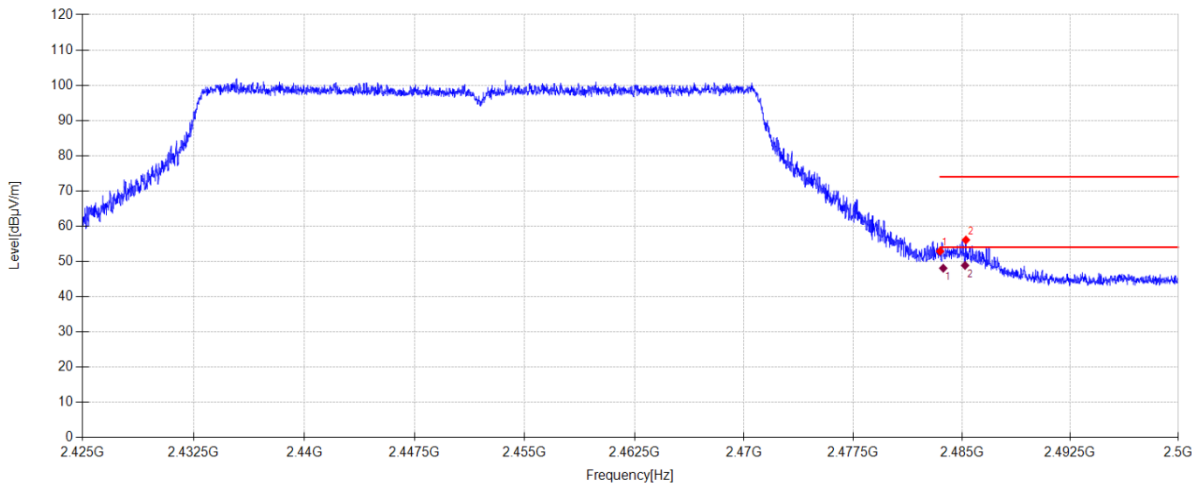

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.99	28.01	4.89	0.00	52.89	74.00	21.11	PK	Horizontal
2	2485.285	23.17	28.01	4.90	0.00	56.08	74.00	17.92	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.722	15.16	28.01	4.89	48.06	54.00	5.94	AV	Horizontal	
2	2485.227	15.95	28.01	4.90	48.86	54.00	5.14	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX AX40 2452MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\35

Memo:

Sample Numbler:S25071020-009

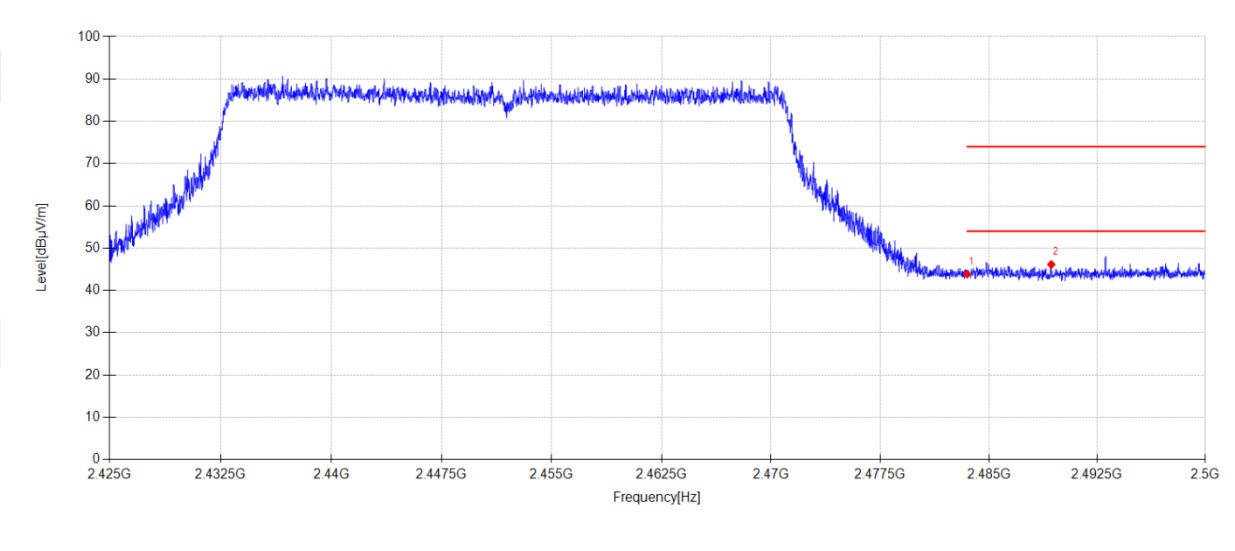

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.96	28.01	4.89	0.00	43.86	74.00	30.14	PK	Vertical
2	2489.320	13.23	28.02	4.90	0.00	46.15	74.00	27.85	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-04 **Tested By:** Nan Zhong
EUT: Portable High Resolution Music Player **Model Number:** F3051M
Test Mode: TX AX40 2422MHz Mode **Power Supply:** Battery
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\36
Memo: Sample Numbler:S25071020-009

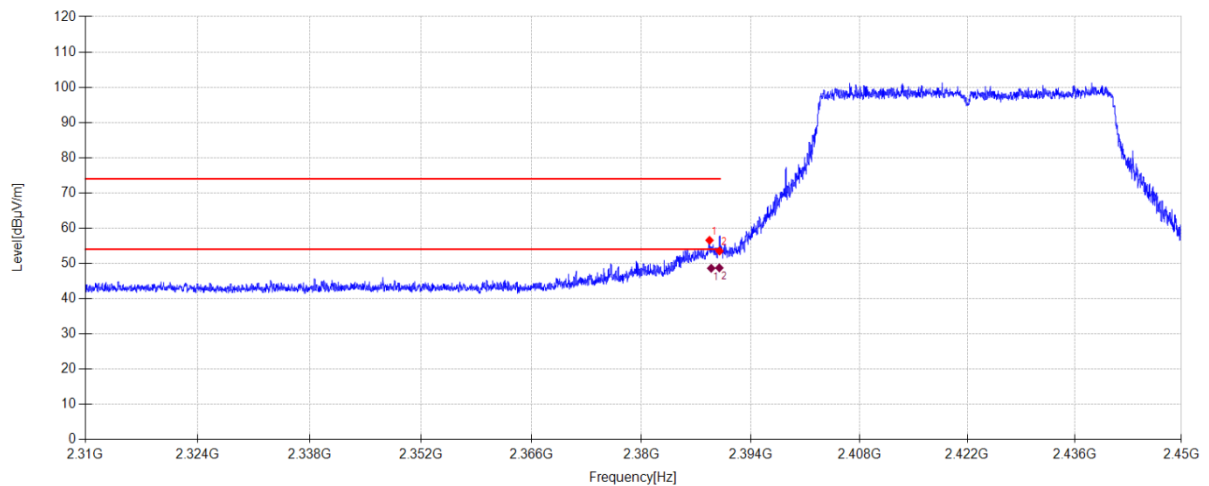**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.722	23.96	27.77	4.83	0.00	56.56	74.00	17.44	PK	Horizontal
2	2390.000	20.88	27.78	4.84	0.00	53.50	74.00	20.50	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.934	16.02	27.77	4.83	48.62	54.00	5.38	AV	Horizontal
2	2389.977	16.11	27.78	4.84	48.73	54.00	5.27	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX AX40 2422MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\37

Memo:

Sample Numbler:S25071020-009

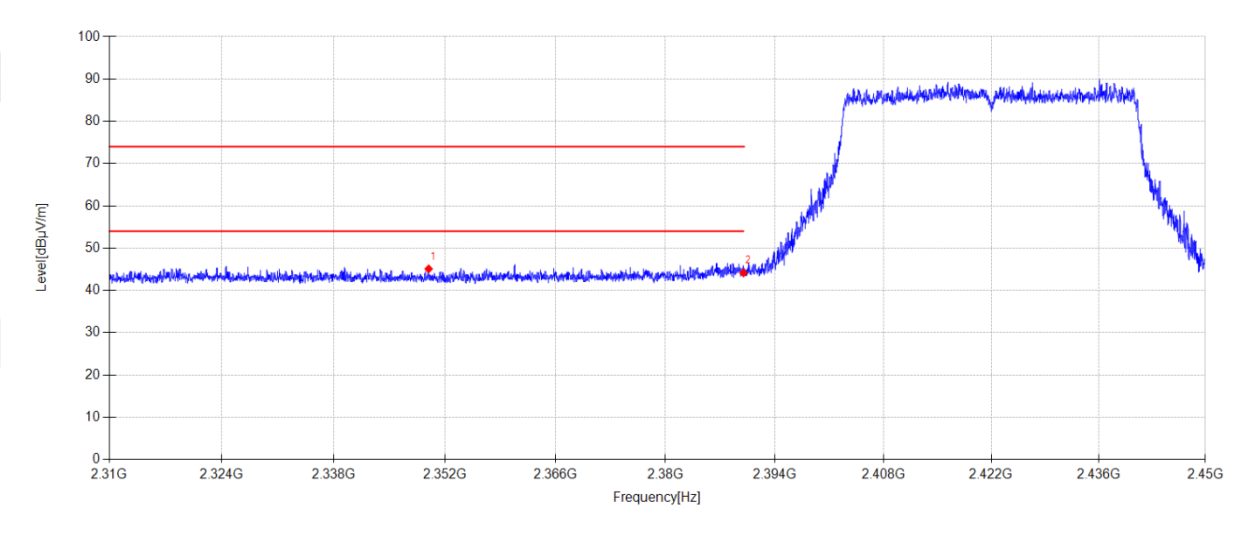

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2349.942	12.62	27.67	4.81	0.00	45.10	74.00	28.90	PK	Vertical
2	2390.000	11.54	27.78	4.84	0.00	44.16	74.00	29.84	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX N40 2452MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\44

Memo:

Sample Numbler:S25071020-009

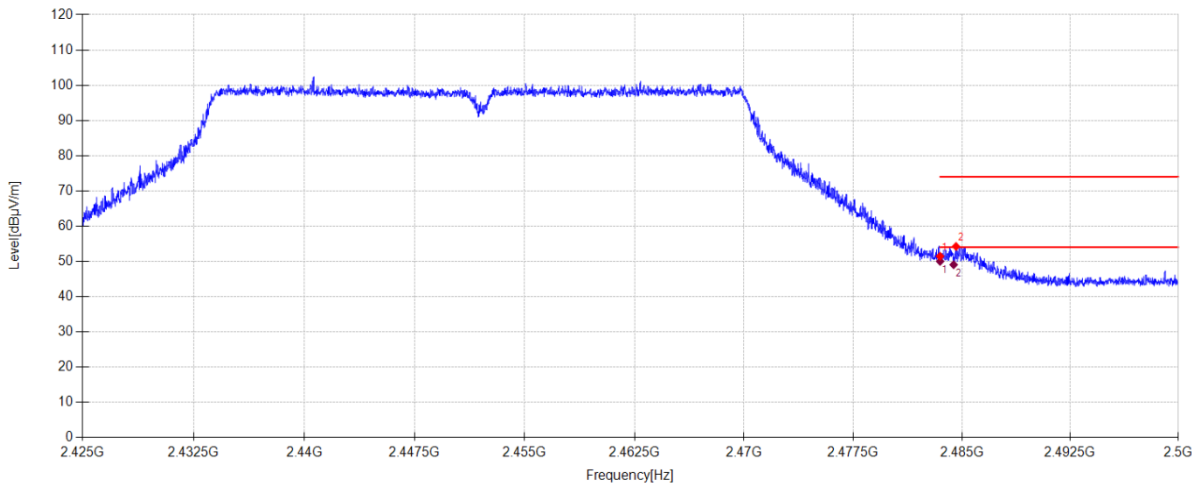

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.56	28.01	4.89	0.00	51.46	74.00	22.54	PK	Horizontal
2	2484.603	21.33	28.01	4.90	0.00	54.24	74.00	19.76	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	17.12	28.01	4.89	50.02	54.00	3.98	AV	Horizontal	
2	2484.435	16.15	28.01	4.90	49.06	54.00	4.94	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX N40 2452MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\45

Memo:

Sample Numbler:S25071020-009

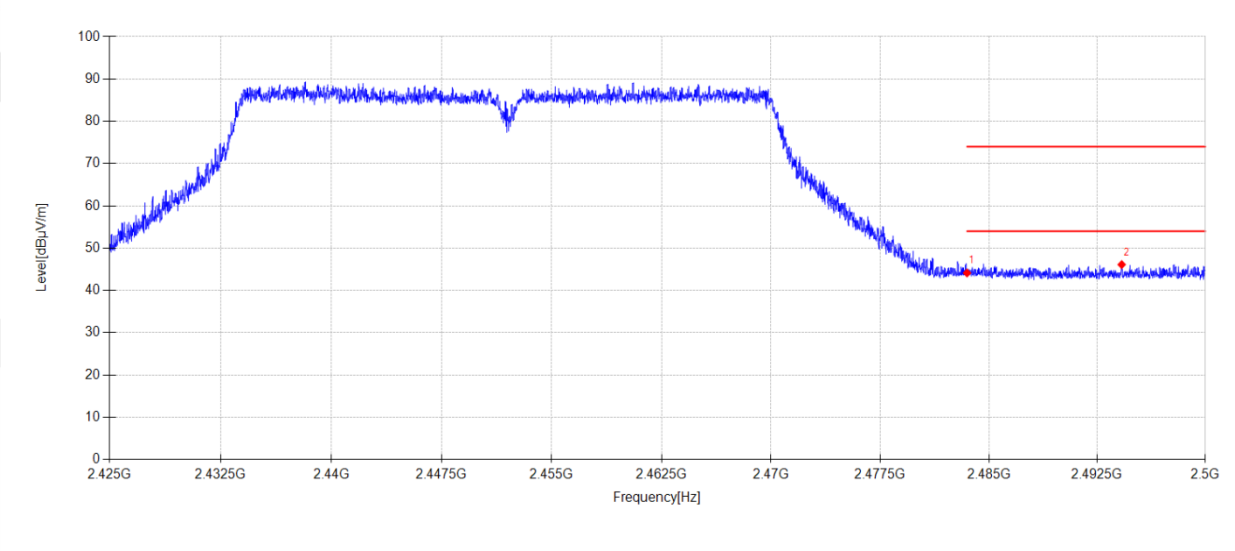

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.23	28.01	4.89	0.00	44.13	74.00	29.87	PK	Vertical
2	2494.195	13.18	28.04	4.90	0.00	46.12	74.00	27.88	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-04 **Tested By:** Nan Zhong
EUT: Portable High Resolution Music Player **Model Number:** F3051M
Test Mode: TX N40 2422MHz Mode **Power Supply:** Battery
Condition: Temp:24.2°C;Humi:45.2% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\46
Memo: Sample Numbler:S25071020-009

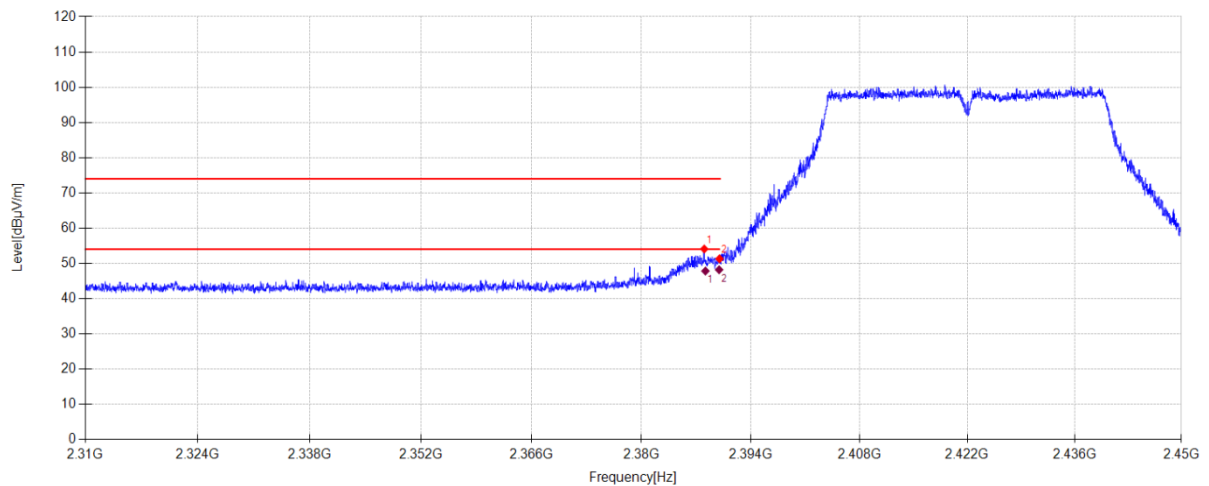**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.050	21.49	27.77	4.83	0.00	54.09	74.00	19.91	PK	Horizontal
2	2390.000	18.69	27.78	4.84	0.00	51.31	74.00	22.69	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.193	15.24	27.77	4.83	47.84	54.00	6.16	AV	Horizontal
2	2389.951	15.58	27.78	4.84	48.20	54.00	5.80	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-04

Tested By:

Nan Zhong

EUT:

Portable High Resolution Music Player

Model Number:

F3051M

Test Mode:

TX N40 2422MHz Mode

Power Supply:

Battery

Condition:

Temp:24.2°C;Humi:45.2%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25071020-1E\FCC ABOVE1G 2.4G\47

Memo:

Sample Numbler:S25071020-009

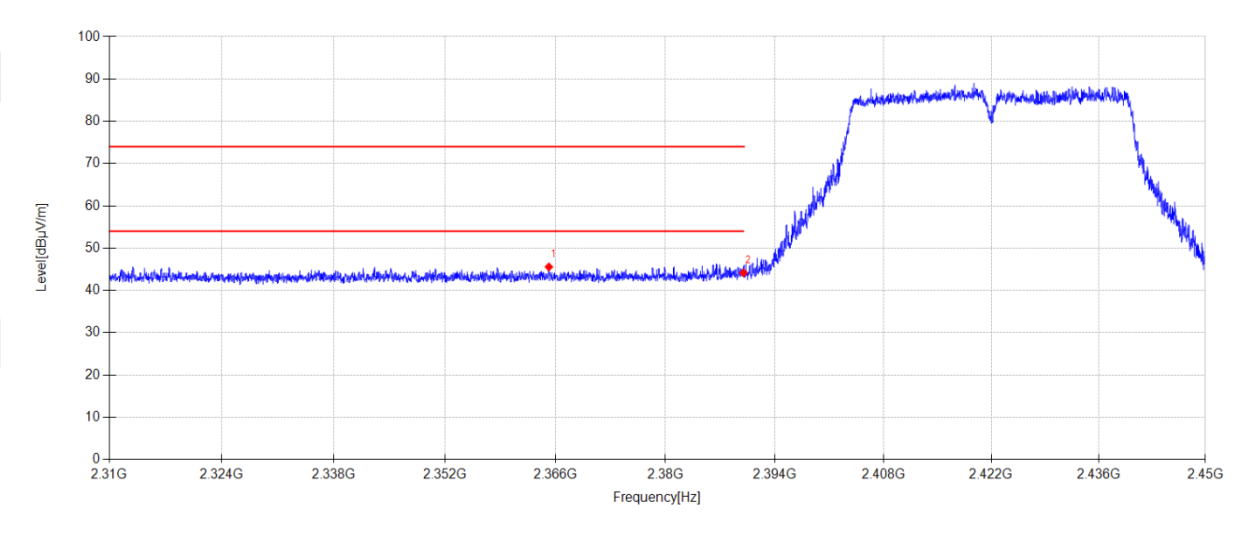

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2365.160	13.03	27.71	4.82	0.00	45.56	74.00	28.44	PK	Vertical
2	2390.000	11.53	27.78	4.84	0.00	44.15	74.00	29.85	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
EMI Test Software	Audix	e3	DDT-ZC01252	/

14.2. Block diagram of test setup

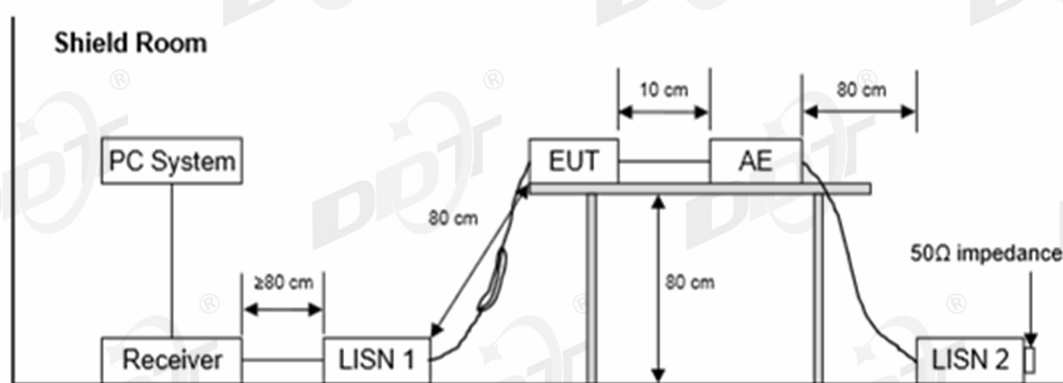

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25071020-1E\1105 CE-RF.EM6
Test Date : 2025-11-05 Tested By : Aaron Liu
EUT : Portable High Resolution Music Player Model Number : F3051M
Power Supply : AC 240V/50Hz Test Mode : TX N20 2412MHz Mode
Condition : TEMP:23.4°C, RH:61.2% LISN : 2025 1# 216/LINE
Memo :

Data: 14

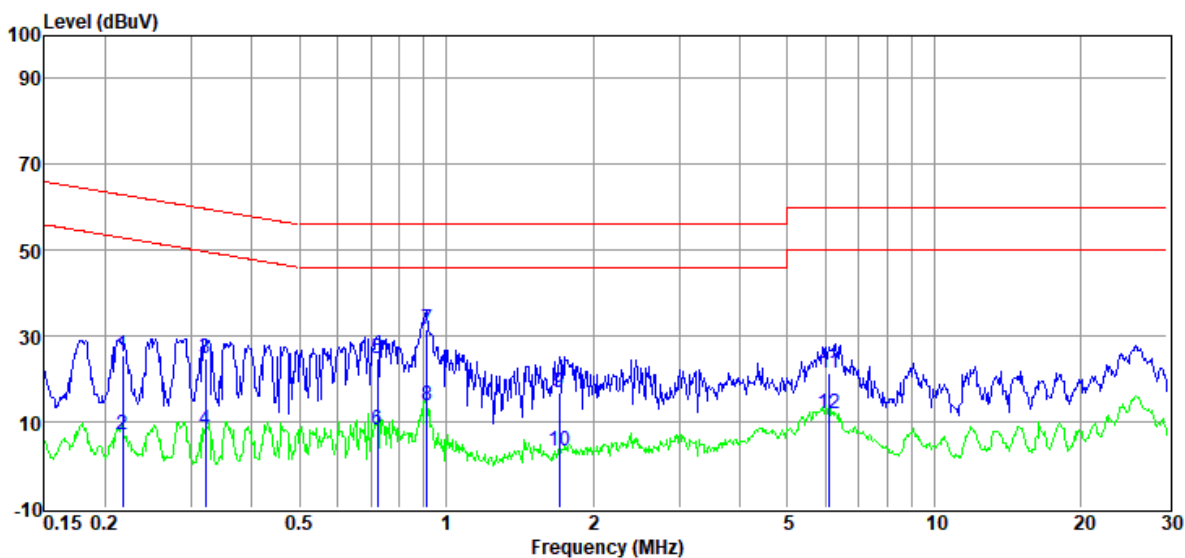

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.22	5.60	9.82	0.06	9.89	25.37	62.92	37.55	QP	LINE
2	0.22	-12.76	9.82	0.06	9.89	7.01	52.92	45.91	Average	LINE
3	0.32	5.32	9.68	0.06	9.89	24.95	59.66	34.71	QP	LINE
4	0.32	-11.67	9.68	0.06	9.89	7.96	49.66	41.70	Average	LINE
5	0.72	4.95	9.89	0.12	9.90	24.86	56.00	31.14	QP	LINE
6	0.72	-11.62	9.89	0.12	9.90	8.29	46.00	37.71	Average	LINE
7	0.91	11.60	9.87	0.14	9.90	31.51	56.00	24.49	QP	LINE
8	0.91	-6.22	9.87	0.14	9.90	13.69	46.00	32.31	Average	LINE
9	1.71	-3.01	9.83	0.16	9.89	16.87	56.00	39.13	QP	LINE
10	1.71	-16.67	9.83	0.16	9.89	3.21	46.00	42.79	Average	LINE
11	6.09	1.28	9.94	0.21	9.85	21.28	60.00	38.72	QP	LINE
12	6.09	-8.23	9.94	0.21	9.85	11.77	50.00	38.23	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25071020-1E\1105 CE-RF.EM6
Test Date : 2025-11-05 Tested By : Aaron Liu
EUT : Portable High Resolution Music Player Model Number : F3051M
Power Supply : AC 240V/50Hz Test Mode : TX N20 2412MHz Mode
Condition : TEMP:23.4°C, RH:61.2% LISN : 2025 1# 216/NEUTRAL
Memo :

Data: 16

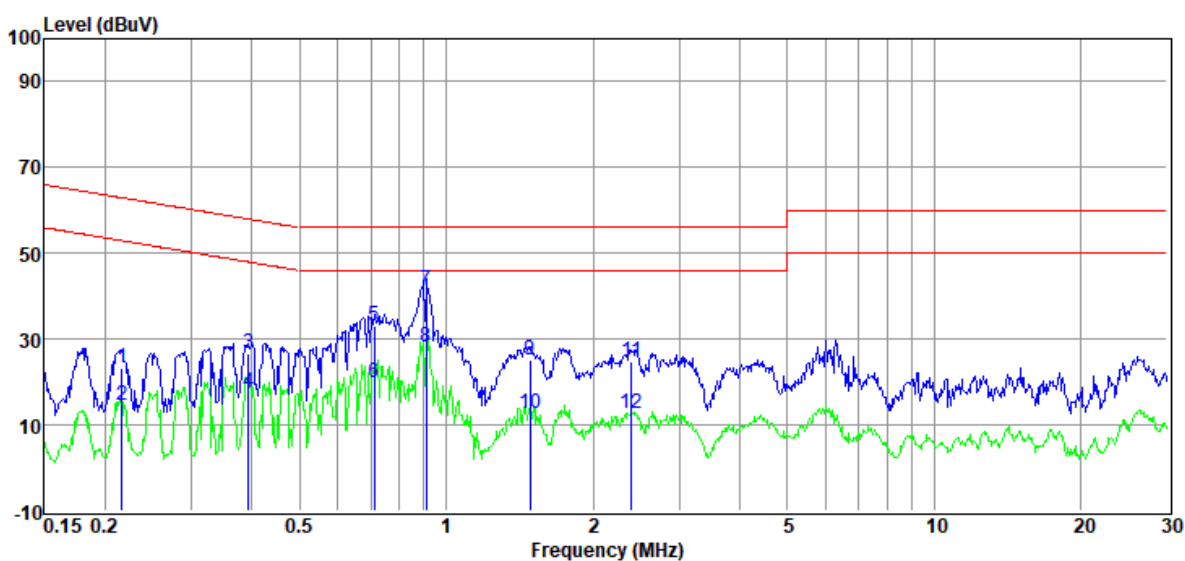

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.22	3.50	9.83	0.06	9.89	23.28	62.96	39.68	QP	NEUTRAL
2	0.22	-5.40	9.83	0.06	9.89	14.38	52.96	38.58	Average	NEUTRAL
3	0.39	6.94	9.81	0.08	9.89	26.72	57.99	31.27	QP	NEUTRAL
4	0.39	-2.03	9.81	0.08	9.89	17.75	47.99	30.24	Average	NEUTRAL
5	0.71	13.16	9.91	0.12	9.90	33.09	56.00	22.91	QP	NEUTRAL
6	0.71	0.01	9.91	0.12	9.90	19.94	46.00	26.06	Average	NEUTRAL
7	0.91	21.56	9.88	0.14	9.90	41.48	56.00	14.52	QP	NEUTRAL
8	0.91	8.13	9.88	0.14	9.90	28.05	46.00	17.95	Average	NEUTRAL
9	1.49	5.35	9.84	0.16	9.89	25.24	56.00	30.76	QP	NEUTRAL
10	1.49	-7.17	9.84	0.16	9.89	12.72	46.00	33.28	Average	NEUTRAL
11	2.40	4.80	9.79	0.17	9.88	24.64	56.00	31.36	QP	NEUTRAL
12	2.40	-7.22	9.79	0.17	9.88	12.62	46.00	33.38	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q25071020-2E appendix I

-----End Report-----