



RADIO TEST REPORT

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village, Longgui Street, Baiyun District, Guangzhou
Equipment under Test	:	Portable High Resolution Music Player
Model No.	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
FCC ID	:	R56-FC1001
Test Standard(s)	:	47 CFR Part 15 Subpart E, ANSI C63.10-2020, ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01
Report No.	:	DDT-RE25071020-1E14
Issue Date	:	2025/11/24
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	10
2.5.	Deviations of test standard	12
2.6.	Test environment conditions	13
2.7.	Test laboratory	13
2.8.	Measurement uncertainty	14
3.	Equipment Used During Conductive Test	15
4.	26dB Bandwidth	16
4.1.	Block diagram of test setup	16
4.2.	Limits	16
4.3.	Test procedure	16
4.4.	Test result.....	17
4.5.	Test graphs	19
5.	6dB Bandwidth	50
5.1.	Block diagram of test setup	50
5.2.	Limits	50
5.3.	Test procedure	50
5.4.	Test result B4	51
5.5.	Test graphs B4	52
6.	99% Bandwidth	59
6.1.	Block diagram of test setup	59
6.2.	Limits	59
6.3.	Test procedure	59
6.4.	Test result.....	60
6.5.	Test graphs	62
7.	Duty Cycle	93
7.1.	Block diagram of test setup	93
7.2.	Limit.....	93
7.3.	Test procedure	93
7.4.	Test result.....	94
7.5.	Test graphs	96
8.	Maximum Output Power	127

8.1.	Block diagram of test setup	127
8.2.	Limits	127
8.3.	Test procedure	127
8.4.	Test result channel power	128
9.	Power Spectral Density	130
9.1.	Block diagram of test setup	130
9.2.	Limits	130
9.3.	Test procedure	130
9.4.	Test result.....	132
9.5.	Test graphs	134
10.	Frequency Stability Measurement.....	168
10.1.	Limit of Frequency Stability	168
10.2.	Measuring Instruments.....	168
10.3.	Test procedures	168
10.4.	Test setup.....	168
10.5.	Test result.....	169
11.	Dynamic Frequency Selection.....	173
11.1.	Applicability of DFS requirements	173
11.2.	Limit.....	174
11.3.	Parameters of radar test waveforms	174
11.4.	Calibration of radar waveform	175
11.5.	Channel closing transmission time, channel move time and non-occupancy period	180
11.6.	Test setup.....	180
11.7.	Test result.....	182
12.	Antenna Requirements.....	184
12.1.	Limit.....	184
12.2.	Result	184
13.	Radiated Emission	185
13.1.	Test equipment.....	185
13.2.	Block diagram of test setup	186
13.3.	Limits	187
13.4.	Assistant equipment used for test	188
13.5.	Test procedure	188
13.6.	Test result.....	190
13.7.	Test data	191
14.	Band Edge Compliance.....	207
14.1.	Test equipment.....	207
14.2.	Block diagram of test setup.....	208

14.3.	Limits	208
14.4.	Assistant equipment used for test	208
14.5.	Test procedure	208
14.6.	Test result.....	209
14.7.	Test data	210
15.	Power Line Conducted Emissions.....	321
15.1.	Test equipment.....	321
15.2.	Block diagram of test setup	321
15.3.	Limits	321
15.4.	Assistant equipment used for test	321
15.5.	Test procedure	321
15.6.	Test result.....	322
15.7.	Test data	323
16.	Test Setup Photograph	325
17.	Photos of the EUT	327

Test Report Declare

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	No.21, Longliang Road, Xialiang Village,Longgui Street, Baiyun District, Guangzhou
Equipment under Test	:	Portable High Resolution Music Player
Model No.	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	No.21, Longliang Road, Xialiang Village,Longgui Street, Baiyun District, Guangzhou

Test Standard Used:

47 CFR Part 15 Subpart E,
ANSI C63.10-2020,
ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024,
789033 D02 General U-NII Test Procedures New Rules v02r01,
662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25071020-1E14		
Date of Receipt:	2025/07/11	Date of Test:	2025/07/11 - 2025/11/20

Created: Chen Ziqin	Reviewed: Zoe Peng	Approved: Damon Hu
		
2025/11/24	2025/11/24	2025/11/24

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/11/24	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6/26db Bandwidth and 99% Bandwidth	47 CFR Part 15 15.407 (e)	/	Pass
2	Output Power	47 CFR Part 15 15.407 (a)	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.407 (a)	/	Pass
4	Frequency Stability Measurement	47 CFR Part 15 15.407 (g)	/	Pass
5	Radiated Emission	47 CFR Part 15 15.407 (b), 47 CFR Part 15 15.209, 47 CFR Part 15 15.205	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.407 (b), 47 CFR Part 15 15.209, 47 CFR Part 15 15.205,	/	Pass
7	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass
8	Antenna Requirement	47 CFR Part 15.203	/	Pass
9	Dynamic Frequency Selection	47 CFR Part 15 15.407 (h)	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	Portable High Resolution Music Player
Model Number	:	F3051M, F3061R, F1001M, F1002M, F1003M, F1004M, F1005M, F1006M, F1007M, F1008M, F1009M, F1010M, F1001S, F1002S, F1003S, F1004S, F1005S, F1006S, F1001R, F1002R, F1003R, F1004R, F1005R, F1006R, M27
Difference of model number	:	Above models are identical in schematic and structure, only the model number are different, therefore the test performed on the model F3051M
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 5V powered by an external adapter or a built-in 3.7V lithium battery
Antenna Type	:	FPC Antenna
Max Antenna Gain(dBi)	:	4.17

Radio Technology	:	IEEE 802.11a/n/ac/ax
Operation frequency	:	U-NII-1: 5180 MHz to 5240 MHz U-NII-2A: 5260 MHz to 5320 MHz U-NII-2C: 5500 MHz to 5720 MHz U-NII-3: 5745 MHz to 5825 MHz
Modulation	:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information							
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)		/	
UNII-1							
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
36	5180	38	5190	42	5210	50	5250 (Straddle)
40	5200	46	5230	/	/	/	/
44	5220	/	/	/	/	/	/
48	5240	/	/	/	/	/	/
UNII-2A							
52	5260	54	5270	58	5290	50	5250 (Straddle)
56	5280	62	5310	/	/	/	/
60	5300	/	/	/	/	/	/
64	5320	/	/	/	/	/	/
UNII-2C							
100	5500	102	5510	106	5530	11	5570

						4	
104	5520	110	5550	122	5610	/	/
108	5540	118	5590	138	5690 (Straddle)	/	/
112	5560	126	5630	/	/	/	/
116	5580	134	5670	/	/	/	/
120	5600	142	5710 (Straddle)	/	/	/	/
124	5620	/	/	/	/	/	/
128	5640	/	/	/	/	/	/
132	5660	/	/	/	/	/	/
136	5680	/	/	/	/	/	/
140	5700	/	/	/	/	/	/
144	5720 (Straddle)	/	/	/	/	/	/
UNII-3							
149	5745	151	5755	155	5775	/	/
153	5765	159	5795	/	/	/	/
157	5785	/	/	/	/	/	/
161	5805	/	/	/	/	/	/
165	5825	/	/	/	/	/	/
Note: Band 5600-5650MHz will be disabled when shipped to Canada.							


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☒” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QRCT4.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 2 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	/			
IEEE 802.11a	18	/	6	LCH: CH36	5180
	18	/	6	MCH: CH40	5200
	18	/	6	HCH: CH48	5240
	18	/	6	LCH: CH52	5260
	18	/	6	MCH: CH56	5280
	18	/	6	HCH: CH64	5320
	18	/	6	LCH: CH100	5500
	18	/	6	MCH: CH116	5580
	18	/	6	HCH: CH140	5700
	18	/	6	Straddle: CH144	5720
	18	/	6	LCH: CH149	5745
	18	/	6	MCH: CH157	5785
	18	/	6	HCH: CH165	5825
IEEE 802.11n HT20	18	/	MCS 0	LCH: CH36	5180
	18	/	MCS 0	MCH: CH40	5200
	18	/	MCS 0	HCH: CH48	5240
	18	/	MCS 0	LCH: CH52	5260
	18	/	MCS 0	MCH: CH56	5280
	18	/	MCS 0	HCH: CH64	5320
	18	/	MCS 0	LCH: CH100	5500
	18	/	MCS 0	MCH: CH116	5580
	18	/	MCS 0	HCH: CH140	5700
	18	/	MCS 0	Straddle: CH144	5720
	18	/	MCS 0	LCH: CH149	5745
	18	/	MCS 0	MCH: CH157	5785
	18	/	MCS 0	HCH: CH165	5825
IEEE 802.11n HT40	14	/	MCS 0	LCH: CH38	5190
	14	/	MCS 0	HCH: CH46	5230
	14	/	MCS 0	LCH: CH54	5270
	14	/	MCS 0	HCH: CH62	5310

	14	/	MCS 0	LCH: CH102	5510
	14	/	MCS 0	MCH: CH110	5550
	14	/	MCS 0	HCH: CH134	5670
	18	/	MCS 0	LCH: CH151	5755
IEEE 802.11ac VHT20	18	/	MCS 0	HCH: CH159	5795
	18	/	MCS 0	LCH: CH36	5180
	18	/	MCS 0	MCH: CH40	5200
	18	/	MCS 0	HCH: CH48	5240
	18	/	MCS 0	LCH: CH52	5260
	18	/	MCS 0	MCH: CH56	5280
	18	/	MCS 0	HCH: CH64	5320
	18	/	MCS 0	LCH: CH100	5500
	18	/	MCS 0	MCH: CH116	5580
	18	/	MCS 0	HCH: CH140	5700
	18	/	MCS 0	Straddle: CH144	5720
	18	/	MCS 0	LCH: CH149	5745
	18	/	MCS 0	MCH: CH157	5785
	18	/	MCS 0	HCH: CH165	5825
IEEE 802.11 ac VHT40	14	/	MCS 0	LCH: CH38	5190
	14	/	MCS 0	HCH: CH46	5230
	14	/	MCS 0	LCH: CH54	5270
	14	/	MCS 0	HCH: CH62	5310
	14	/	MCS 0	LCH: CH102	5510
	14	/	MCS 0	MCH: CH110	5550
	14	/	MCS 0	HCH: CH134	5670
	14	/	MCS 0	Straddle: CH142	5710
	18	/	MCS 0	LCH: CH159	5755
	18	/	MCS 0	HCH: CH36	5795
IEEE 802.11ac VHT80	13	/	MCS 0	CH42	5210
	13	/	MCS 0	CH58	5290
	13	/	MCS 0	LCH: CH106	5530
	13	/	MCS 0	HCH: CH122	5610
	13	/	MCS 0	Straddle: CH138	5690
	18	/	MCS 0	CH155	5775
IEEE 802.11ax HE20	16	/	MCS 0	LCH: CH36	5180
	16	/	MCS 0	MCH: CH40	5200
	16	/	MCS 0	HCH: CH48	5240
	16	/	MCS 0	LCH: CH52	5260

	16	/	MCS 0	MCH: CH56	5280
	16	/	MCS 0	HCH: CH64	5320
	16	/	MCS 0	LCH: CH100	5500
	16	/	MCS 0	MCH: CH116	5580
	16	/	MCS 0	HCH: CH140	5700
	16	/	MCS 0	Straddle: CH144	5720
	18	/	MCS 0	LCH: CH149	5745
	18	/	MCS 0	MCH: CH157	5785
	18	/	MCS 0	HCH: CH165	5825
IEEE 802.11ax HE40	14	/	MCS 0	LCH: CH38	5190
	14	/	MCS 0	HCH: CH46	5230
	14	/	MCS 0	LCH: CH54	5270
	14	/	MCS 0	HCH: CH62	5310
	14	/	MCS 0	LCH: CH102	5510
	14	/	MCS 0	MCH: CH110	5550
	14	/	MCS 0	HCH: CH134	5670
	14	/	MCS 0	Straddle: CH142	5710
	18	/	MCS 0	LCH: CH159	5755
IEEE 802.11ax HE80	18	/	MCS 0	HCH: CH36	5795
	13	/	MCS 0	CH42	5210
	13	/	MCS 0	CH58	5290
	13	/	MCS 0	LCH: CH106	5530
	13	/	MCS 0	HCH: CH122	5610
	13	/	MCS 0	Straddle: CH138	5690
	18	/	MCS 0	CH155	5775
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 3#)				
SIGNAL ANALYZER	R&S	FSV40	101407	2026/07/06
Wideband Radio Communication Tester	R&S	CMW500	117491	2026/03/28
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	2026/07/06
MXG Vector Signal Generator	Agilent	N5182A	MY48180912	2026/03/28
RF Control Unit	Tonscend	JS0806-2	20C8060230	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 26dB Bandwidth

4.1. Block diagram of test setup

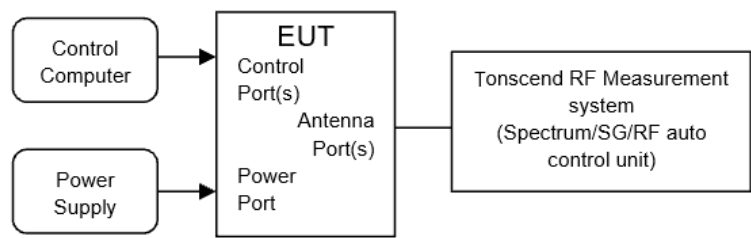

4.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	---	5150 - 5250
	---	5250 - 5350
	---	For FCC: 5470 - 5725
	---	For IC: 5470 - 5600 5650 - 5725

4.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	approximately 1% of the emission bandwidth.
VBW	> RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.


4.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.1-26.9℃,34.0-41.6%RH	Test Date:	2025.09.23-2025.10.16
Test Power Supply:	Battery	Sample Number:	S25071020


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.20	5169.68	5189.88	---	---
		5200	20.28	5189.76	5210.04	---	---
		5240	19.96	5229.68	5249.64	---	---
		5260	19.64	5250.12	5269.76	---	---
		5280	19.48	5270.12	5289.60	---	---
		5320	19.32	5310.20	5329.52	---	---
		5500	19.00	5490.48	5509.48	---	---
		5580	19.60	5570.16	5589.76	---	---
		5700	19.32	5690.32	5709.64	---	---
		5720	19.48	5710.20	5729.68	---	---
		5720 UNII-2C	14.8	5710.20	5725	---	---
		5720 UNII-3	4.68	5725	5729.68	---	---
		5745	25.08	5732.16	5757.24	---	---
		5785	23.32	5773.96	5797.28	---	---
		5825	24.48	5812.64	5837.12	---	---
11N20SISO	Ant1	5180	20.92	5169.56	5190.48	---	---
		5200	21.08	5189.32	5210.40	---	---
		5240	20.80	5229.52	5250.32	---	---
		5260	21.28	5249.52	5270.80	---	---
		5280	20.44	5269.84	5290.28	---	---
		5320	20.40	5309.84	5330.24	---	---
		5500	20.20	5489.80	5510.00	---	---
		5580	20.32	5569.76	5590.08	---	---
		5700	20.52	5689.72	5710.24	---	---
		5720	20.68	5709.60	5730.28	---	---
		5720 UNII-2C	15.4	5709.60	5725	---	---
		5720 UNII-3	5.28	5725	5730.28	---	---
		5745	25.04	5732.12	5757.16	---	---
		5785	24.36	5773.04	5797.40	---	---
		5825	25.12	5812.72	5837.84	---	---
11N40SISO	Ant1	5230	40.24	5210.00	5250.24	---	---
		5270	40.16	5250.00	5290.16	---	---
		5310	40.00	5290.08	5330.08	---	---
		5510	40.24	5489.92	5530.16	---	---
		5550	40.16	5529.84	5570.00	---	---
		5670	40.24	5649.84	5690.08	---	---
		5710	40.24	5689.92	5730.16	---	---
		5710 UNII-2C	35.08	5689.92	5725	---	---
		5710 UNII-3	5.16	5725	5730.16	---	---
		5755	73.60	5719.56	5793.16	---	---
		5795	70.48	5761.80	5832.28	---	---
		5825	70.48	5761.80	5832.28	---	---
11AC20SISO	Ant1	5180	21.04	5169.40	5190.44	---	---
		5200	20.92	5189.68	5210.60	---	---
		5240	20.84	5229.56	5250.40	---	---
		5260	20.56	5249.64	5270.20	---	---
		5280	20.48	5269.72	5290.20	---	---
		5320	20.44	5309.68	5330.12	---	---
		5500	20.08	5489.96	5510.04	---	---
		5580	20.12	5569.88	5590.00	---	---
		5700	20.48	5689.72	5710.20	---	---
		5720	20.44	5709.68	5730.12	---	---
		5720 UNII-2C	15.32	5709.68	5725	---	---
		5720 UNII-3	5.12	5725	5730.12	---	---
		5745	28.08	5731.44	5759.52	---	---
		5785	24.76	5772.96	5797.72	---	---
		5825	24.76	5772.96	5797.72	---	---


		5825	25.76	5811.44	5837.20	---	---
11AC40SIS O	Ant1	5190	40.08	5170.00	5210.08	---	---
		5230	40.24	5209.92	5250.16	---	---
		5270	40.16	5249.92	5290.08	---	---
		5310	39.92	5290.00	5329.92	---	---
		5510	40.08	5489.92	5530.00	---	---
		5550	40.16	5529.84	5570.00	---	---
		5670	40.40	5649.68	5690.08	---	---
		5710	40.40	5689.92	5730.32	---	---
		5710 UNII-2C	35.08	5689.92	5725	---	---
		5710 UNII-3	5.32	5725	5730.32	---	---
		5755	72.32	5722.28	5794.60	---	---
		5795	74.32	5759.64	5833.96	---	---
11AC80SIS O	Ant1	5210	82.40	5169.04	5251.44	---	---
		5290	82.72	5248.72	5331.44	---	---
		5530	82.72	5488.72	5571.44	---	---
		5610	82.72	5568.40	5651.12	---	---
		5690	83.20	5648.40	5731.60	---	---
		5690 UNII-2C	76.6	5648.40	5725	---	---
		5690 UNII-3	6.6	5725	5731.60	---	---
11AX20SIS O	Ant1	5775	139.04	5712.60	5851.64	---	---
		5180	21.20	5169.40	5190.60	---	---
		5200	21.00	5189.48	5210.48	---	---
		5240	21.20	5229.36	5250.56	---	---
		5260	21.08	5249.44	5270.52	---	---
		5280	21.04	5269.48	5290.52	---	---
		5320	20.92	5309.44	5330.36	---	---
		5500	20.92	5489.52	5510.44	---	---
		5580	20.84	5569.52	5590.36	---	---
		5700	20.92	5689.44	5710.36	---	---
		5720	21.04	5709.44	5730.48	---	---
		5720 UNII-2C	15.56	5709.44	5725	---	---
		5720 UNII-3	5.48	5725	5730.48	---	---
		5745	27.92	5731.92	5759.84	---	---
		5785	26.92	5770.80	5797.72	---	---
11AX40SIS O	Ant1	5825	26.60	5812.52	5839.12	---	---
		5190	40.88	5169.52	5210.40	---	---
		5230	40.88	5209.52	5250.40	---	---
		5270	40.64	5249.76	5290.40	---	---
		5310	40.48	5289.76	5330.24	---	---
		5510	40.64	5489.68	5530.32	---	---
		5550	41.12	5529.28	5570.40	---	---
		5670	40.88	5649.52	5690.40	---	---
		5710	40.96	5689.60	5730.56	---	---
		5710 UNII-2C	35.4	5689.60	5725	---	---
		5710 UNII-3	5.56	5725	5730.56	---	---
		5755	41.04	5734.52	5775.56	---	---
		5795	60.96	5767.16	5828.12	---	---
11AX80SIS O	Ant1	5210	83.04	5168.56	5251.60	---	---
		5290	82.88	5248.56	5331.44	---	---
		5530	82.56	5488.56	5571.12	---	---
		5610	83.20	5568.08	5651.28	---	---
		5690	83.52	5648.08	5731.60	---	---
		5690 UNII-2C	76.92	5648.08	5725	---	---
		5690 UNII-3	6.6	5725	5731.60	---	---
		5775	133.60	5714.20	5847.80	---	---

4.5. Test graphs

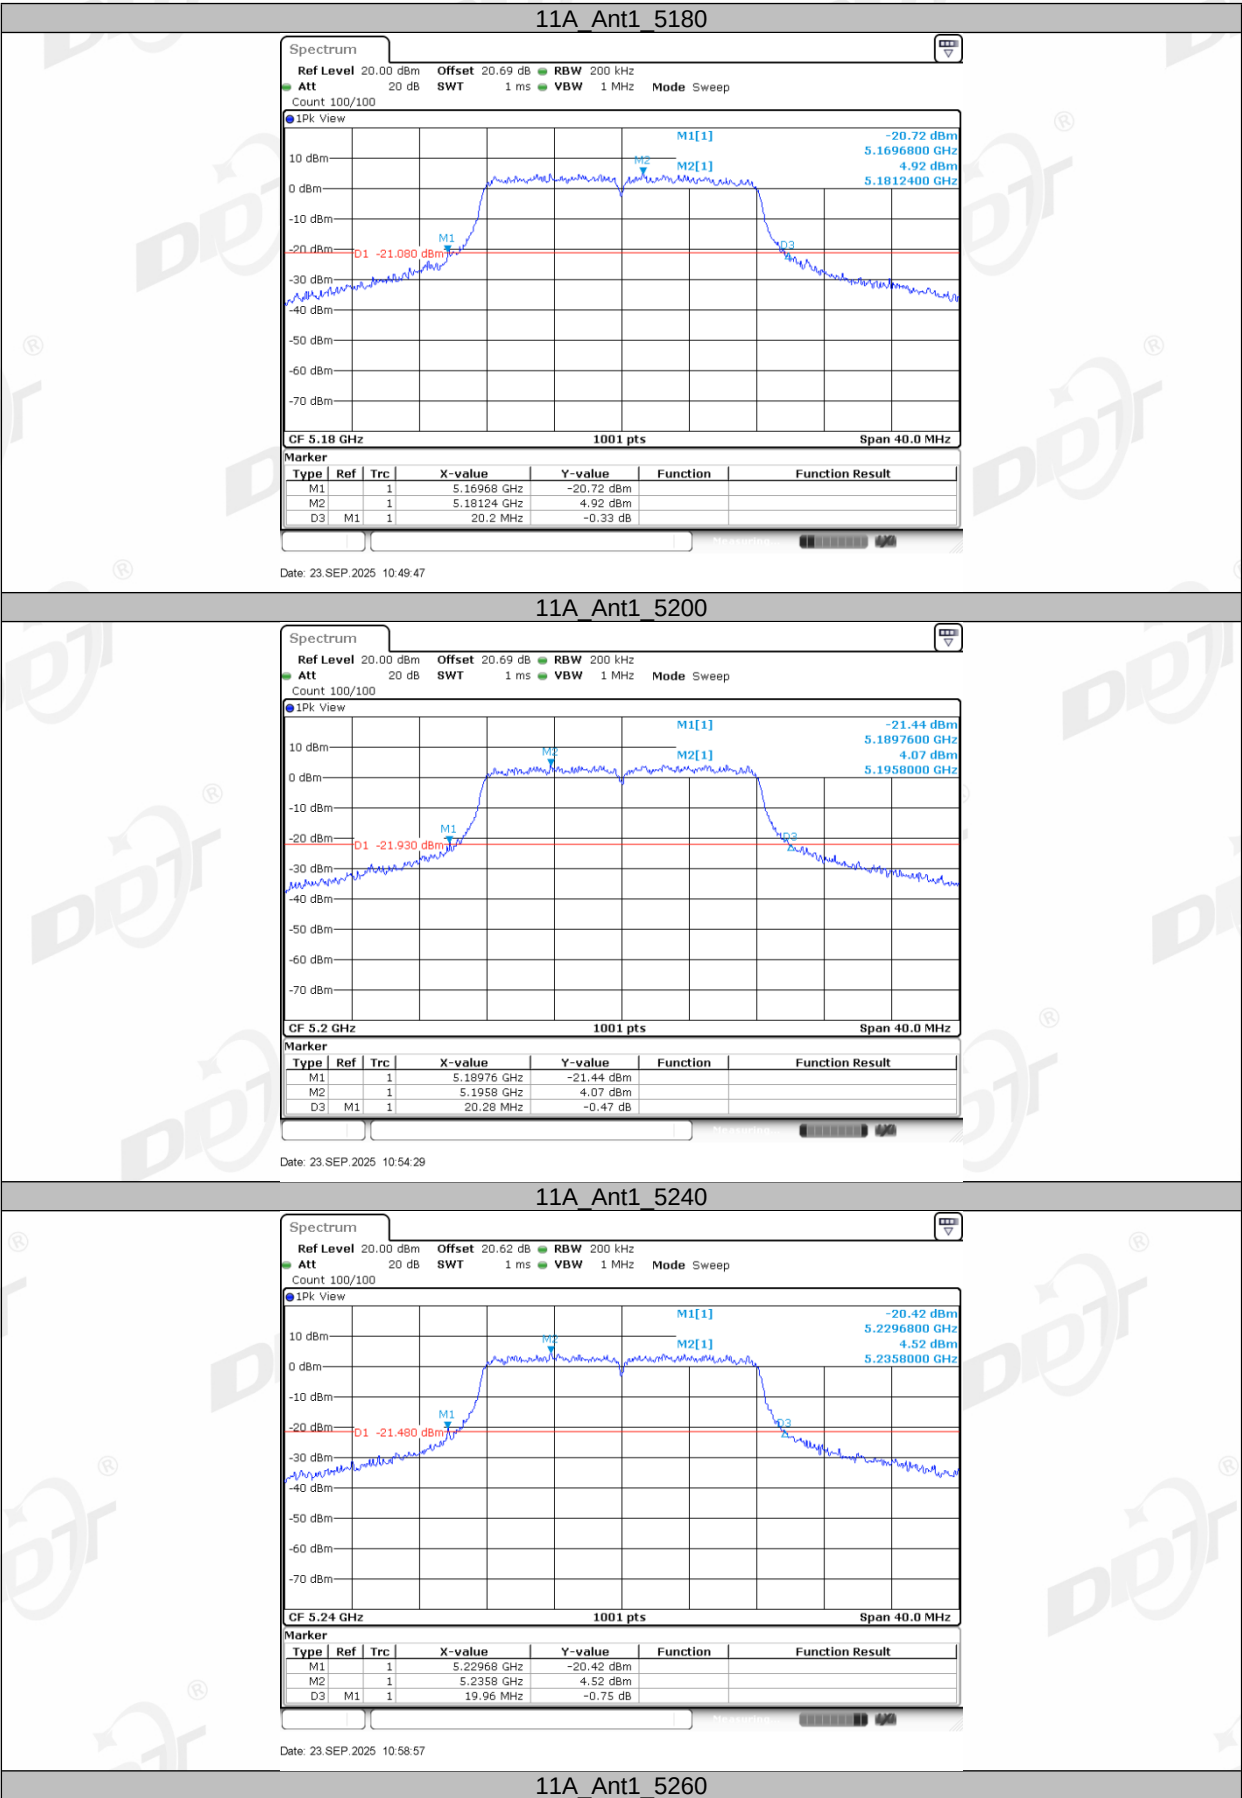

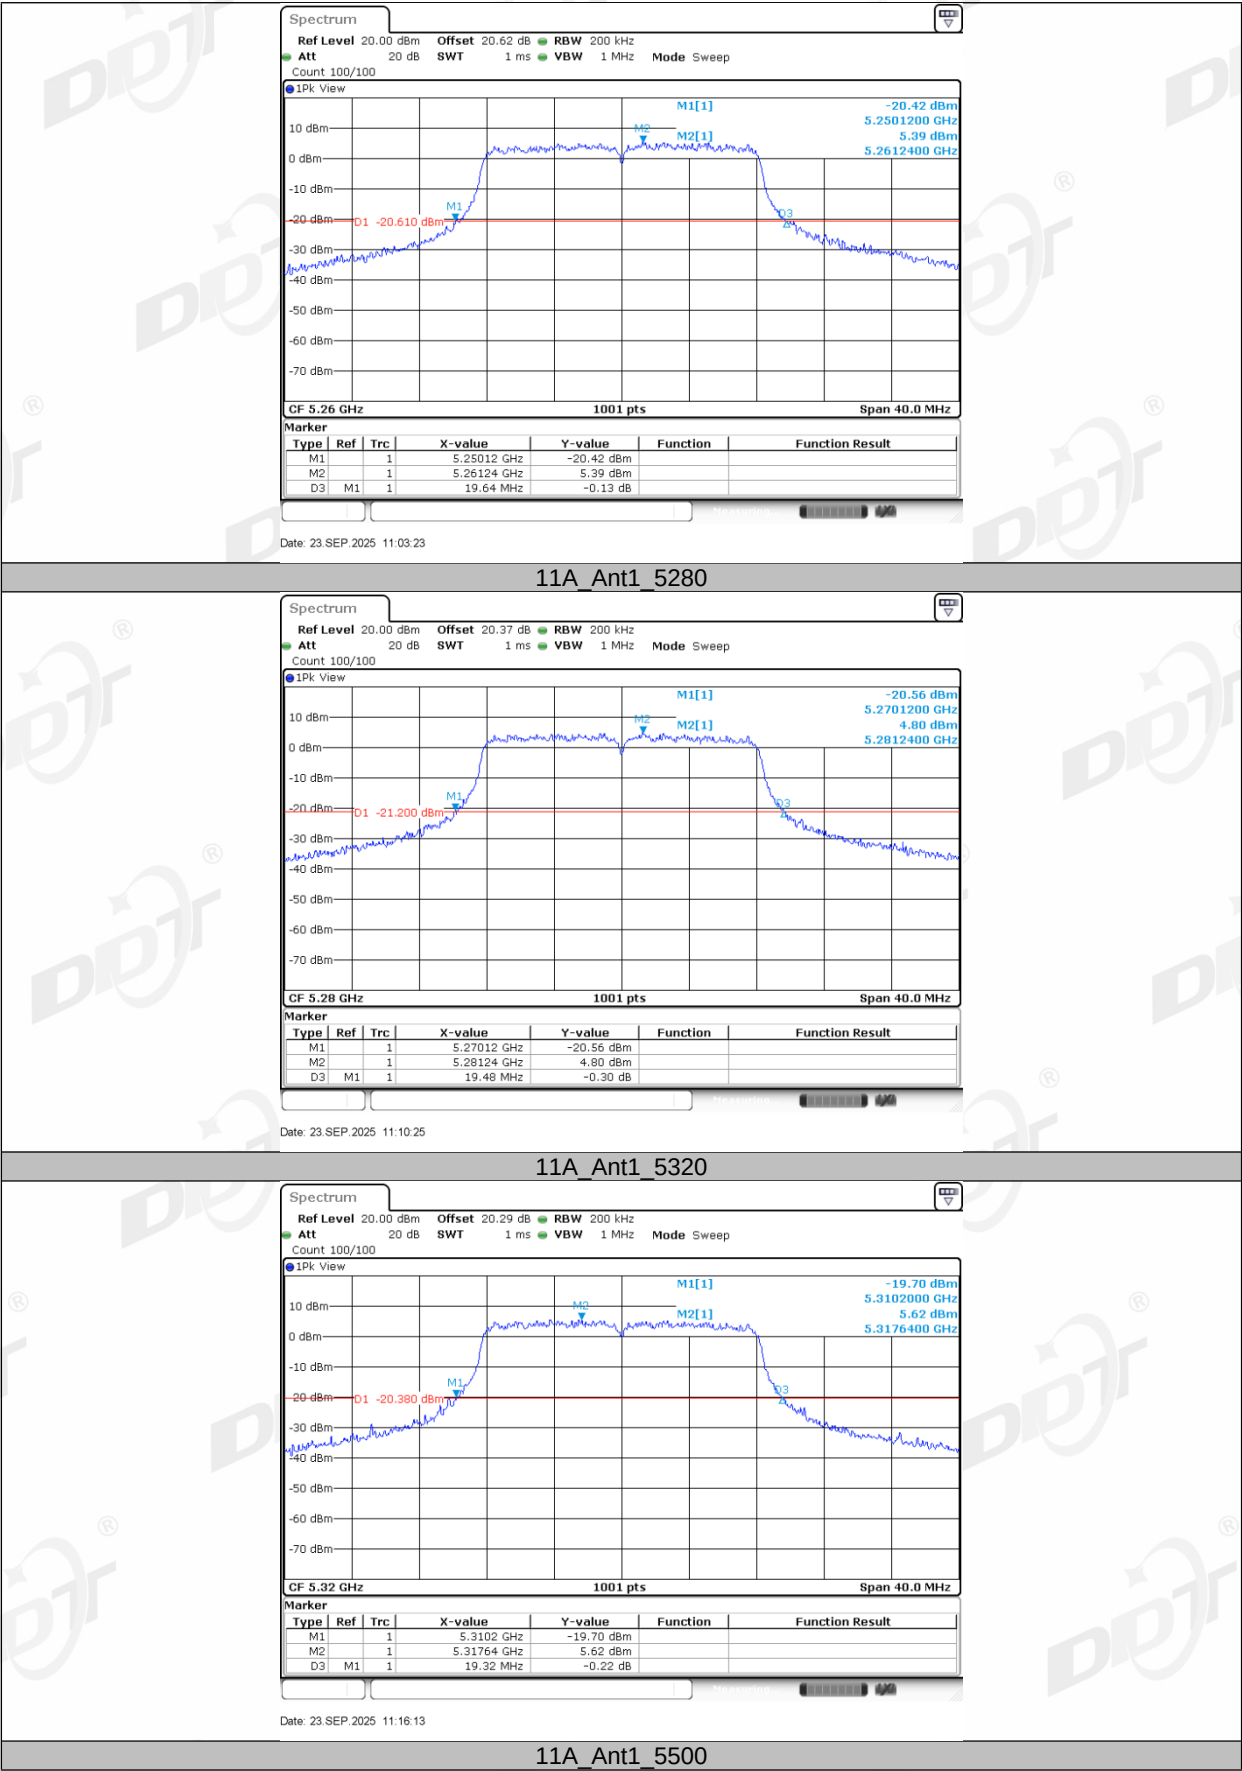


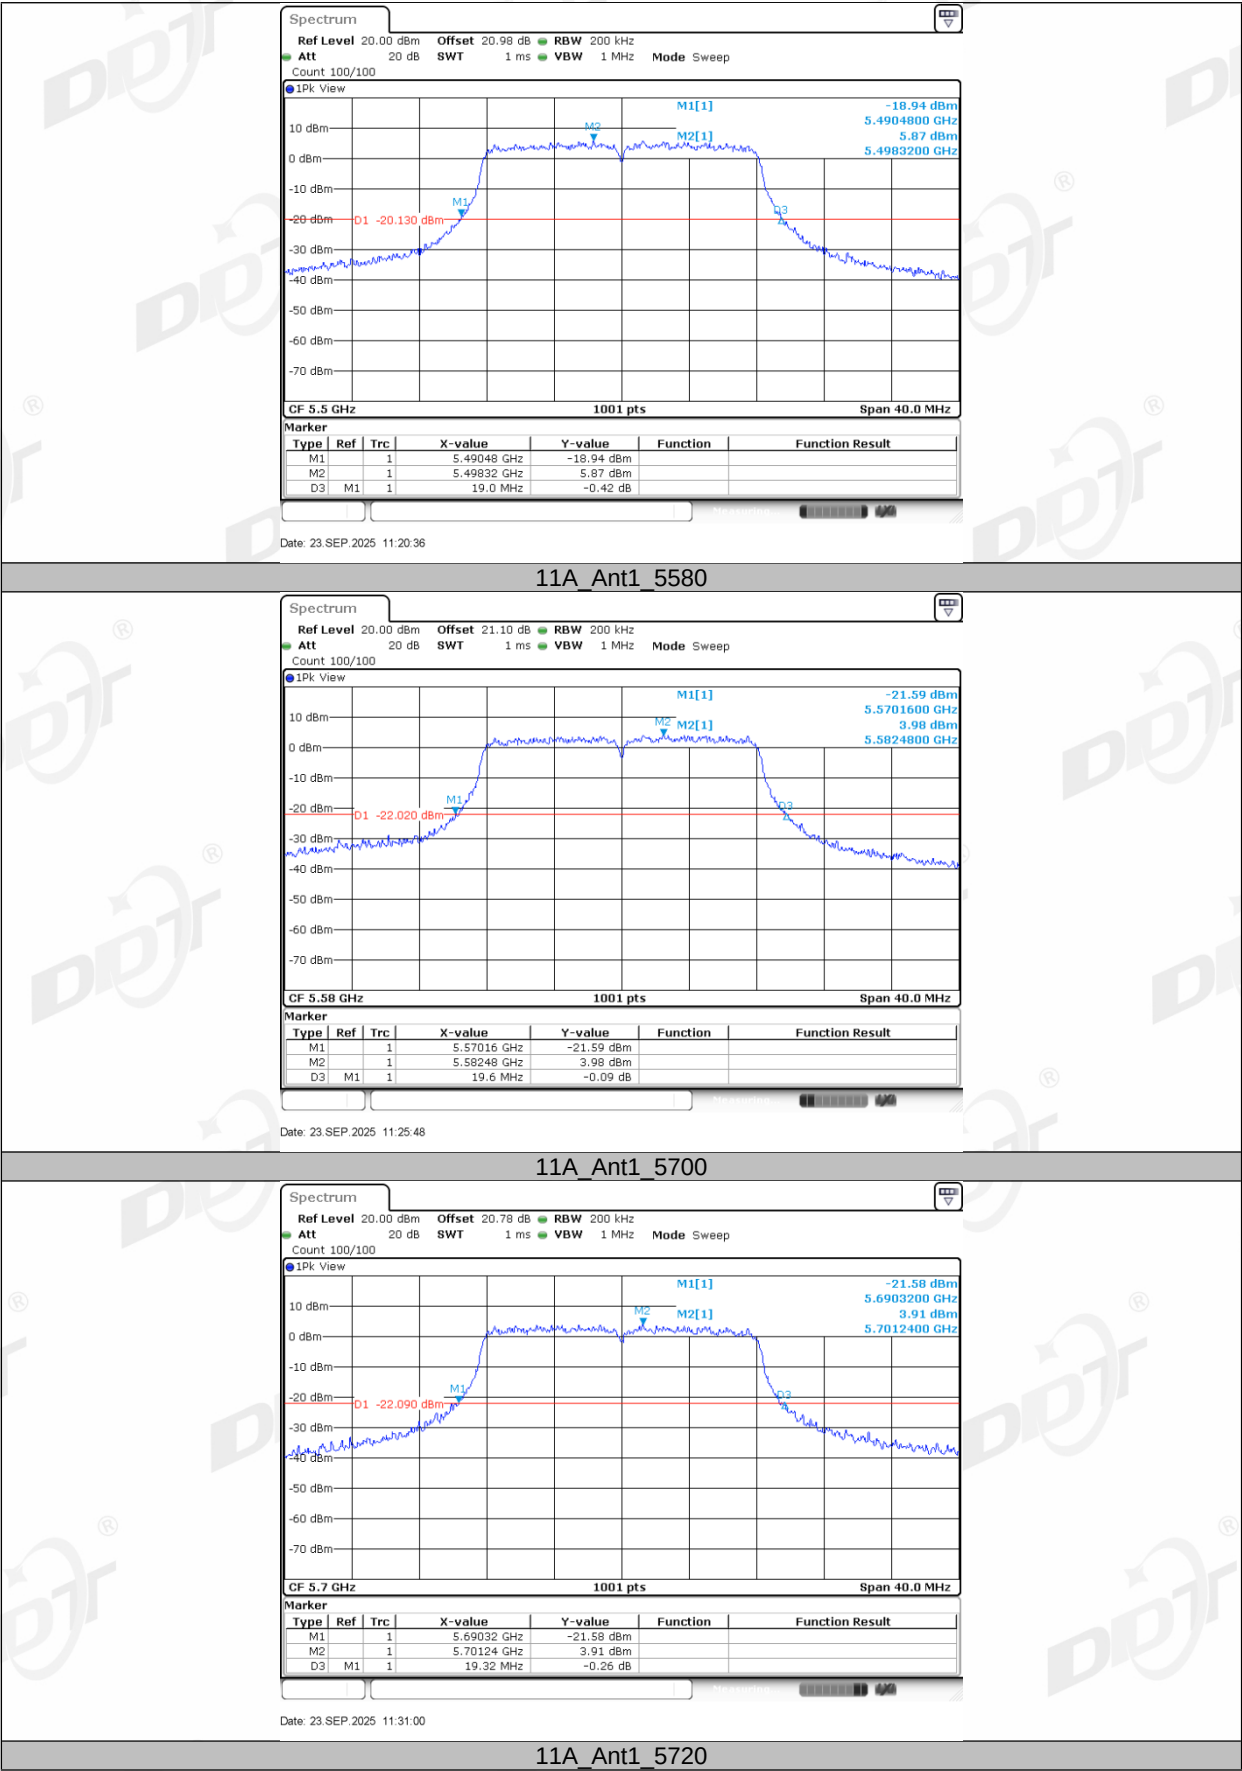


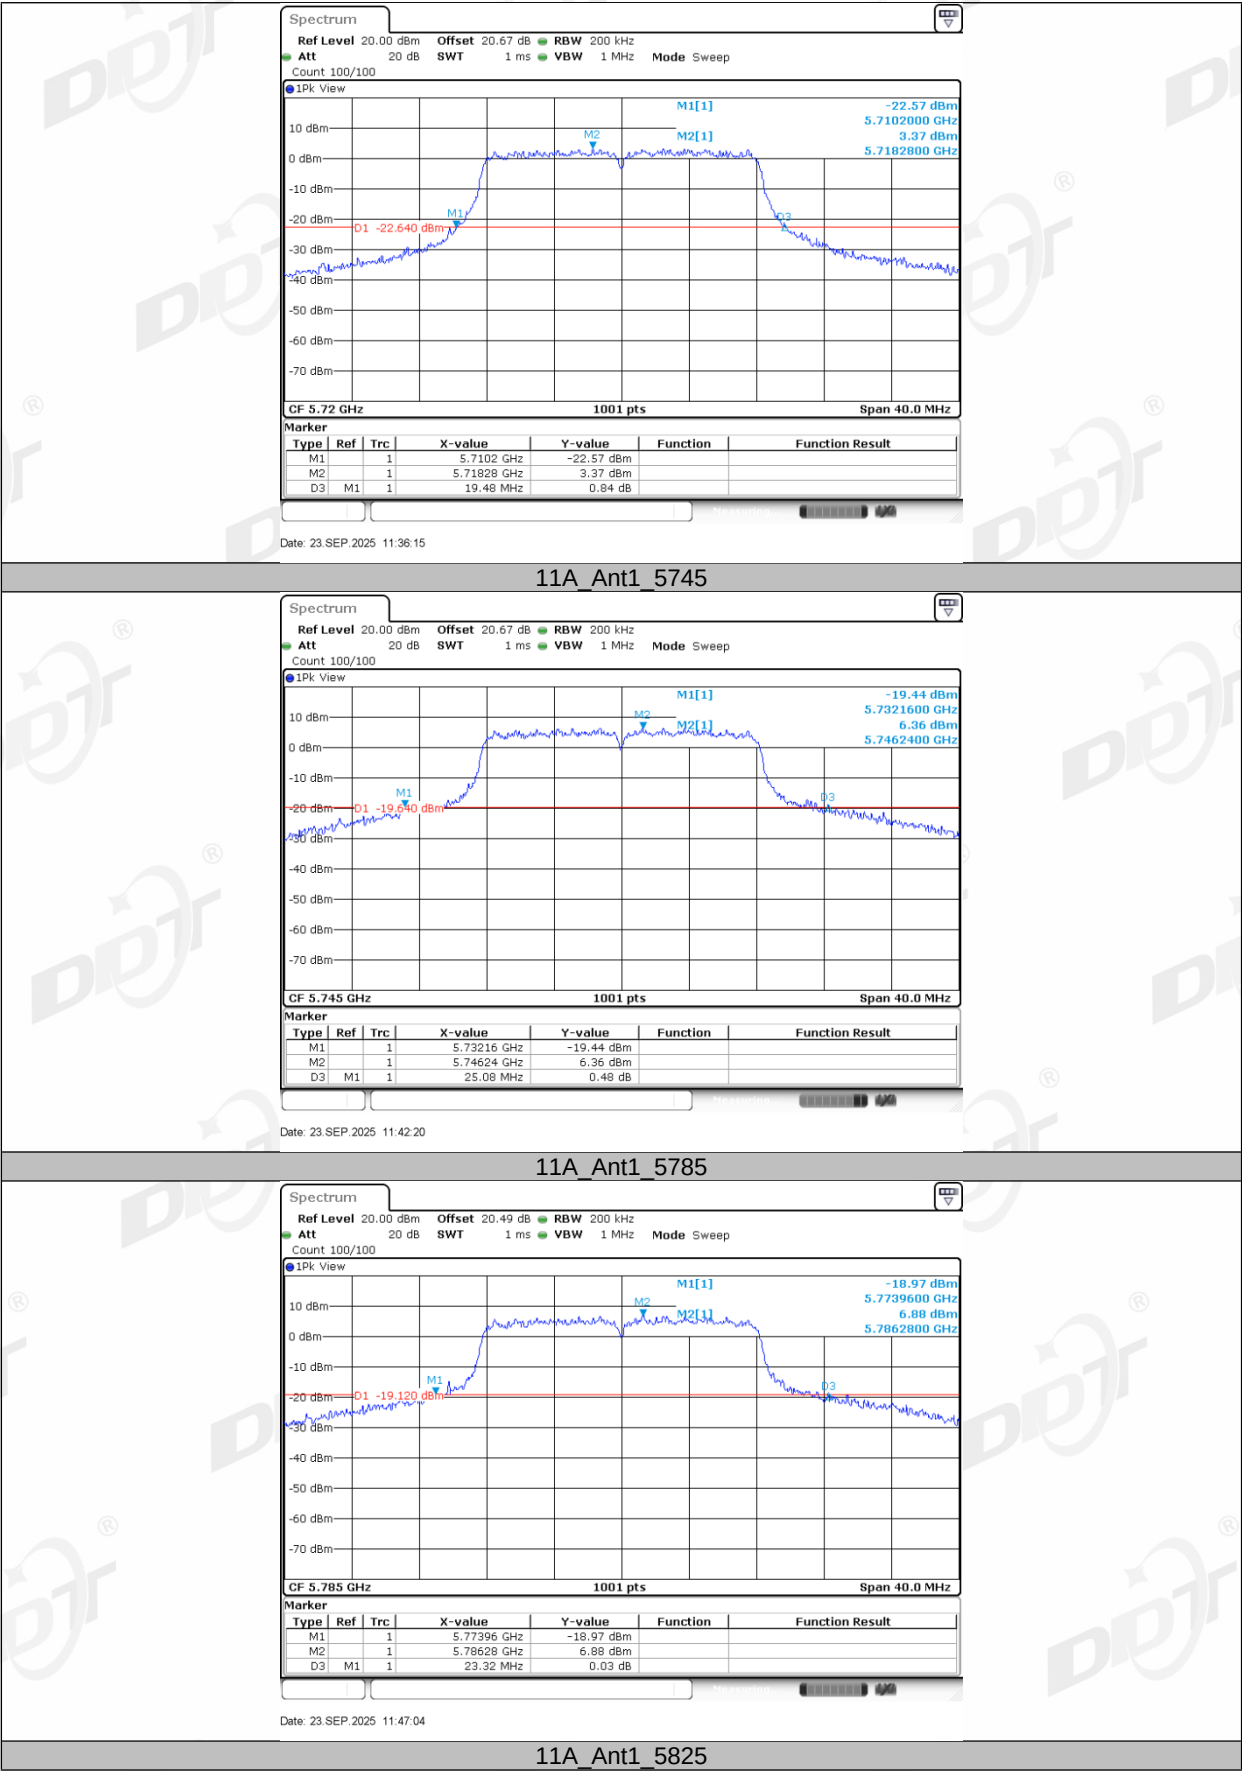








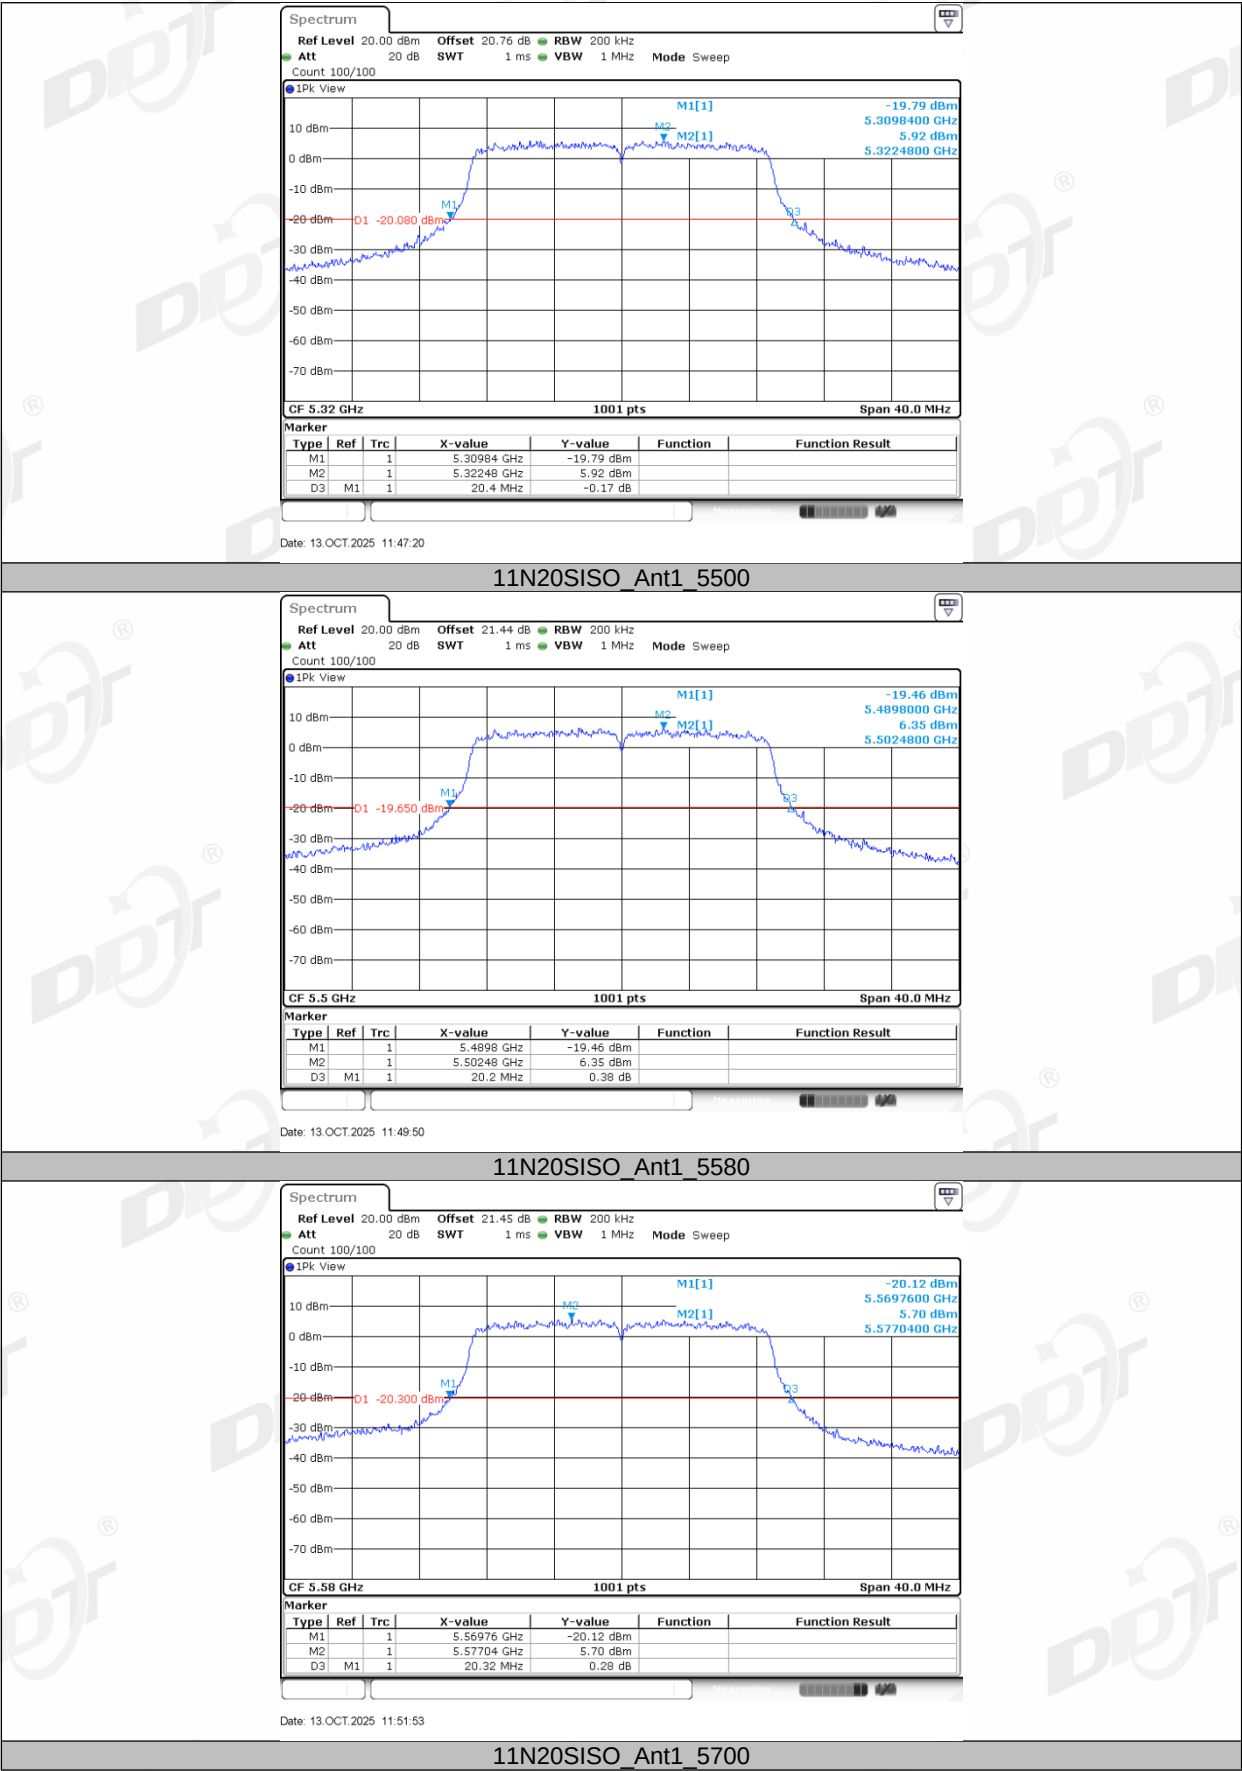

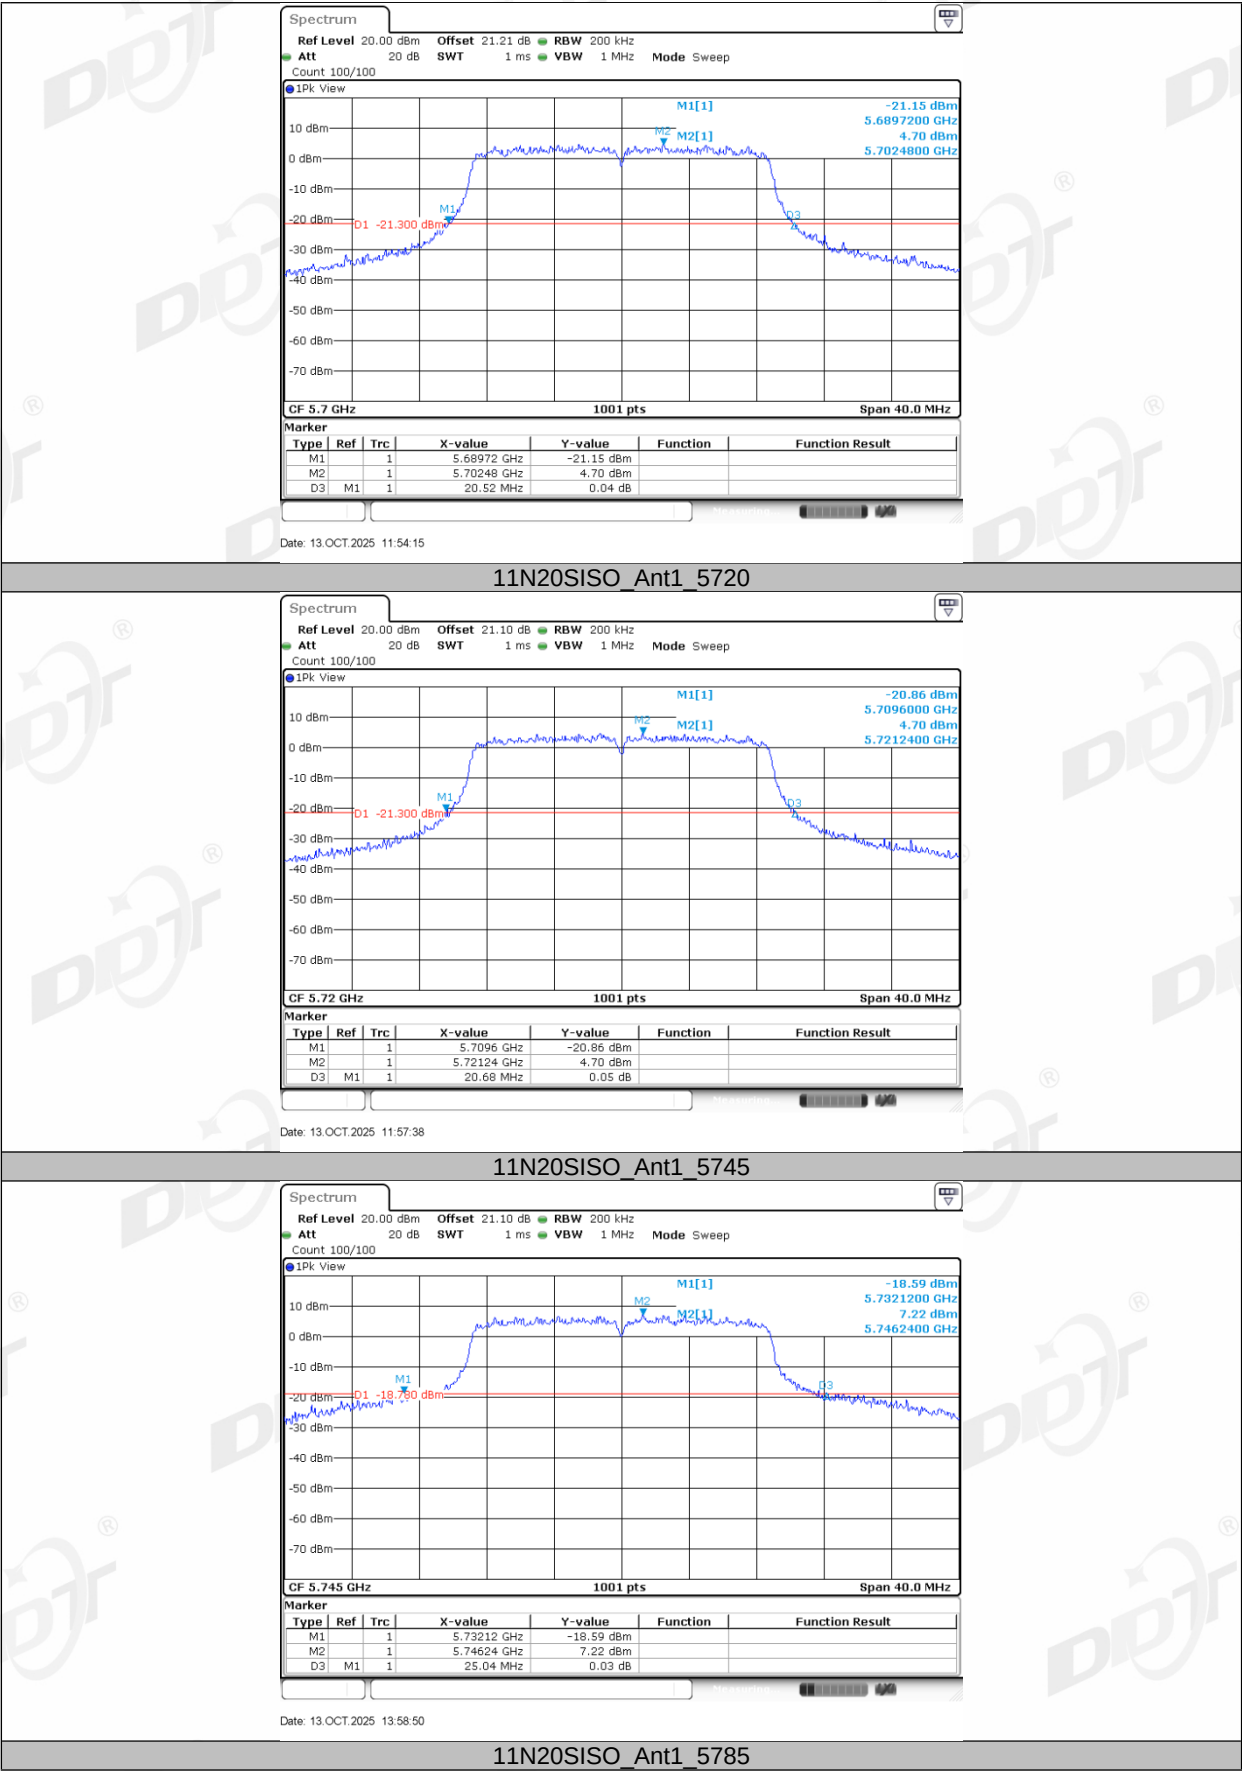

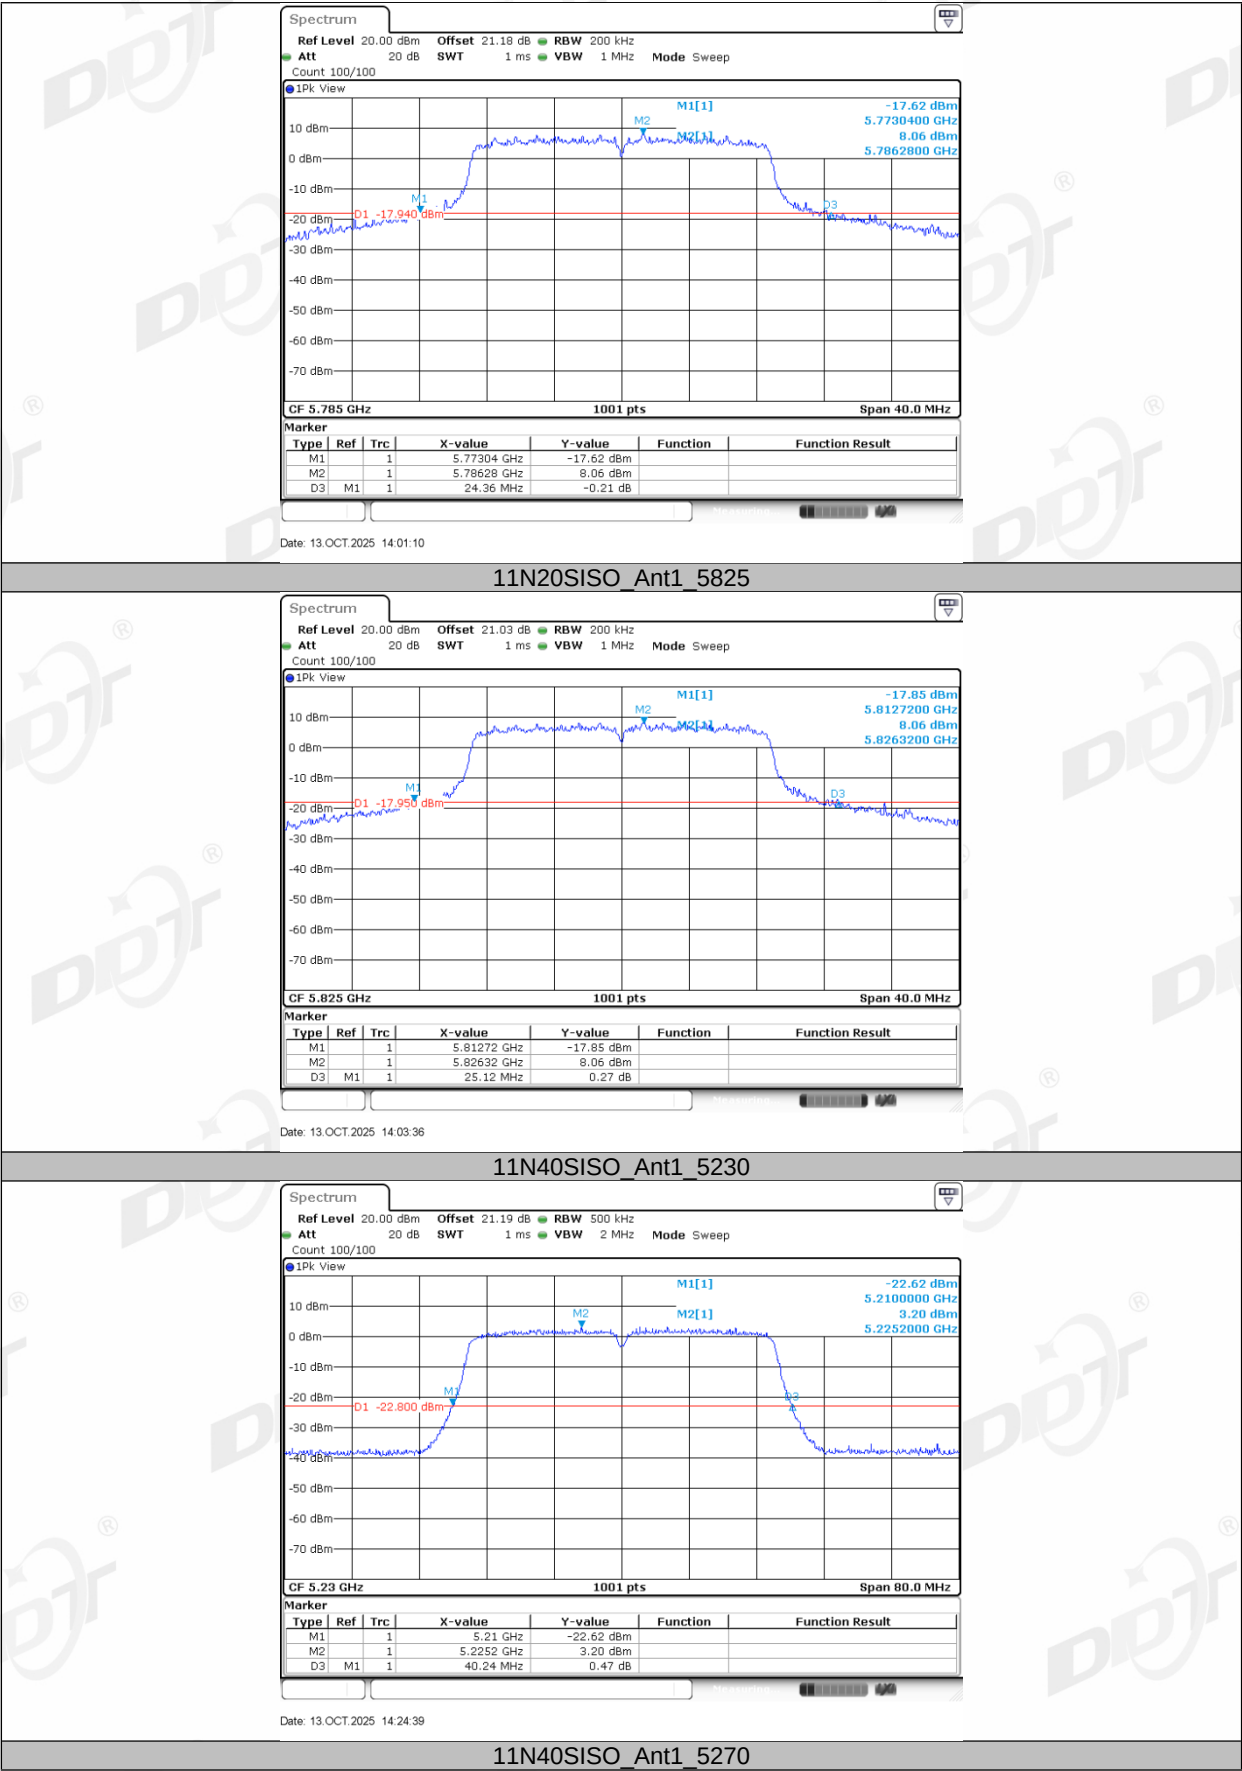

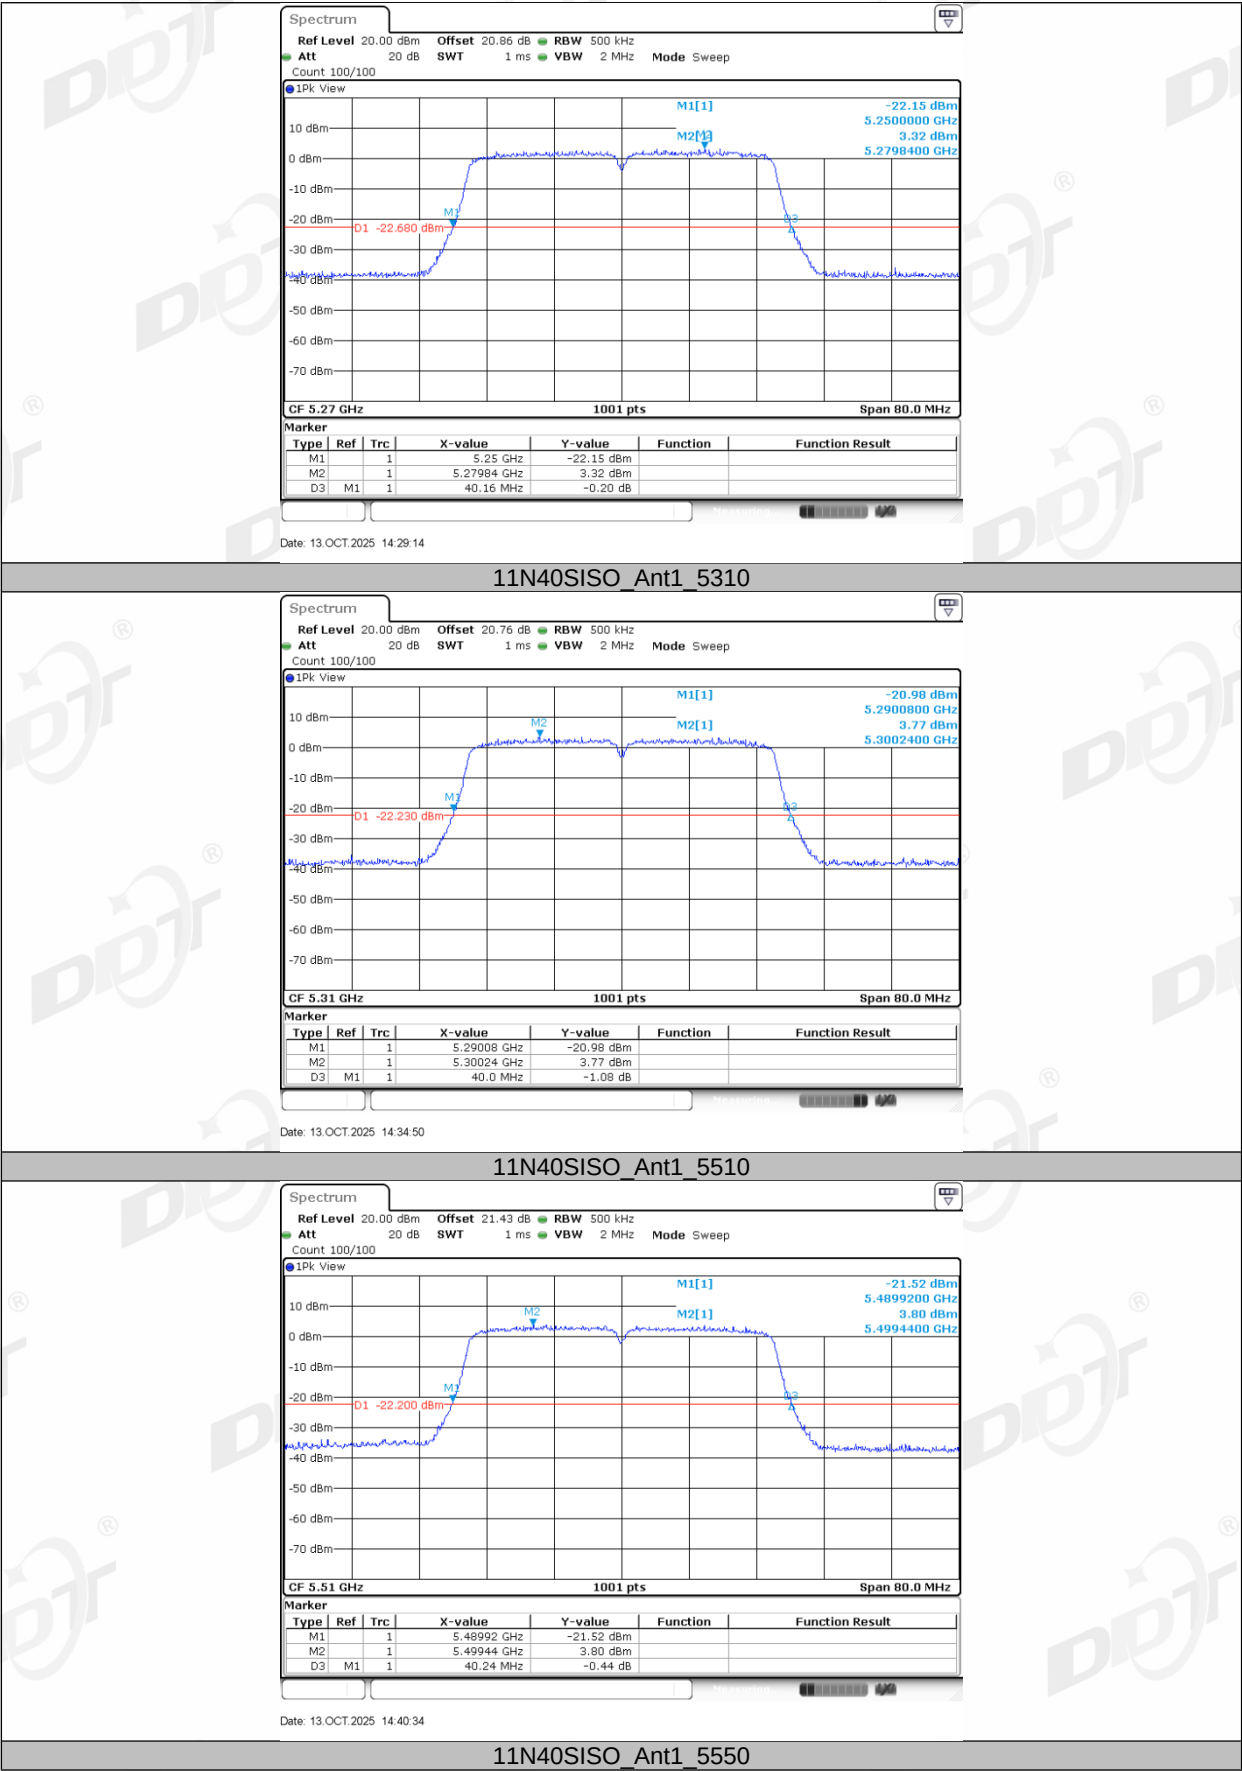


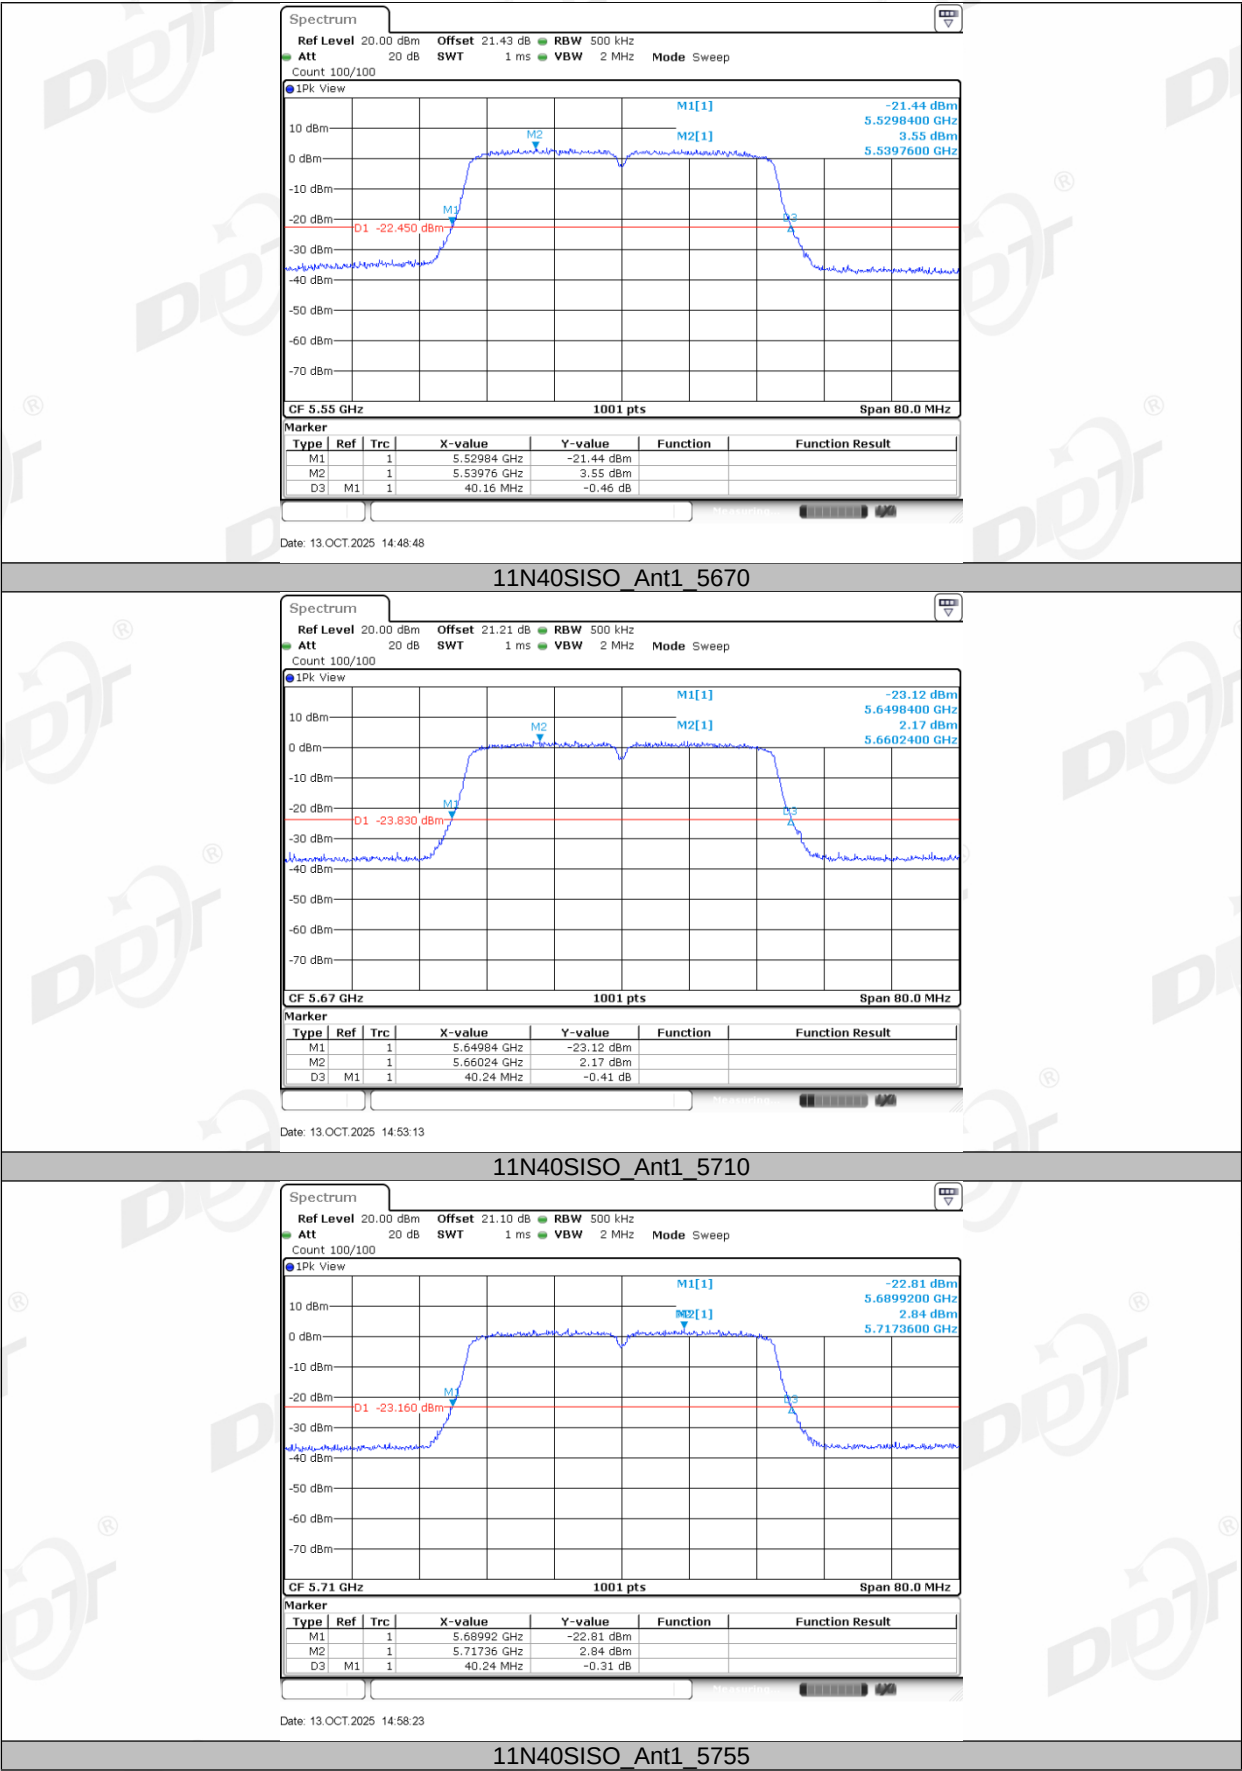










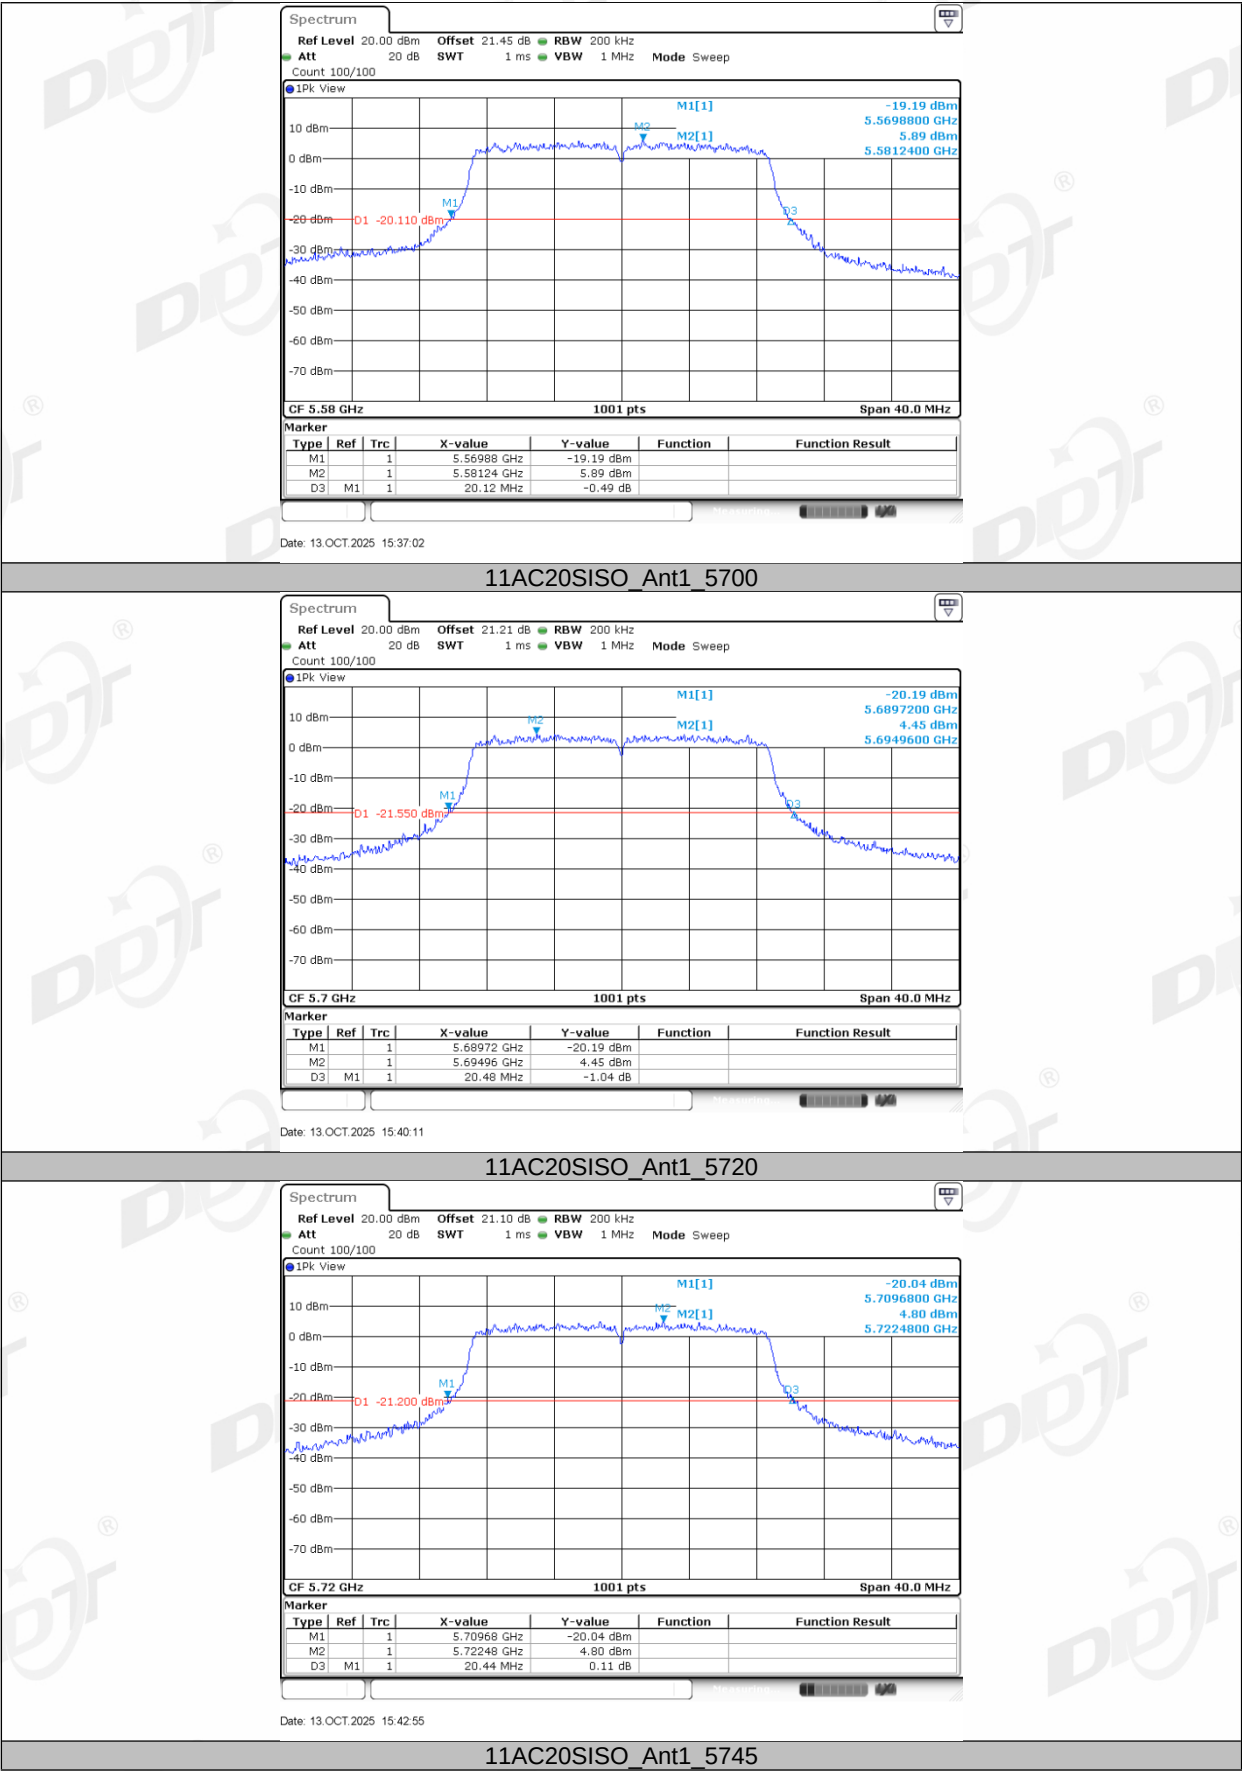





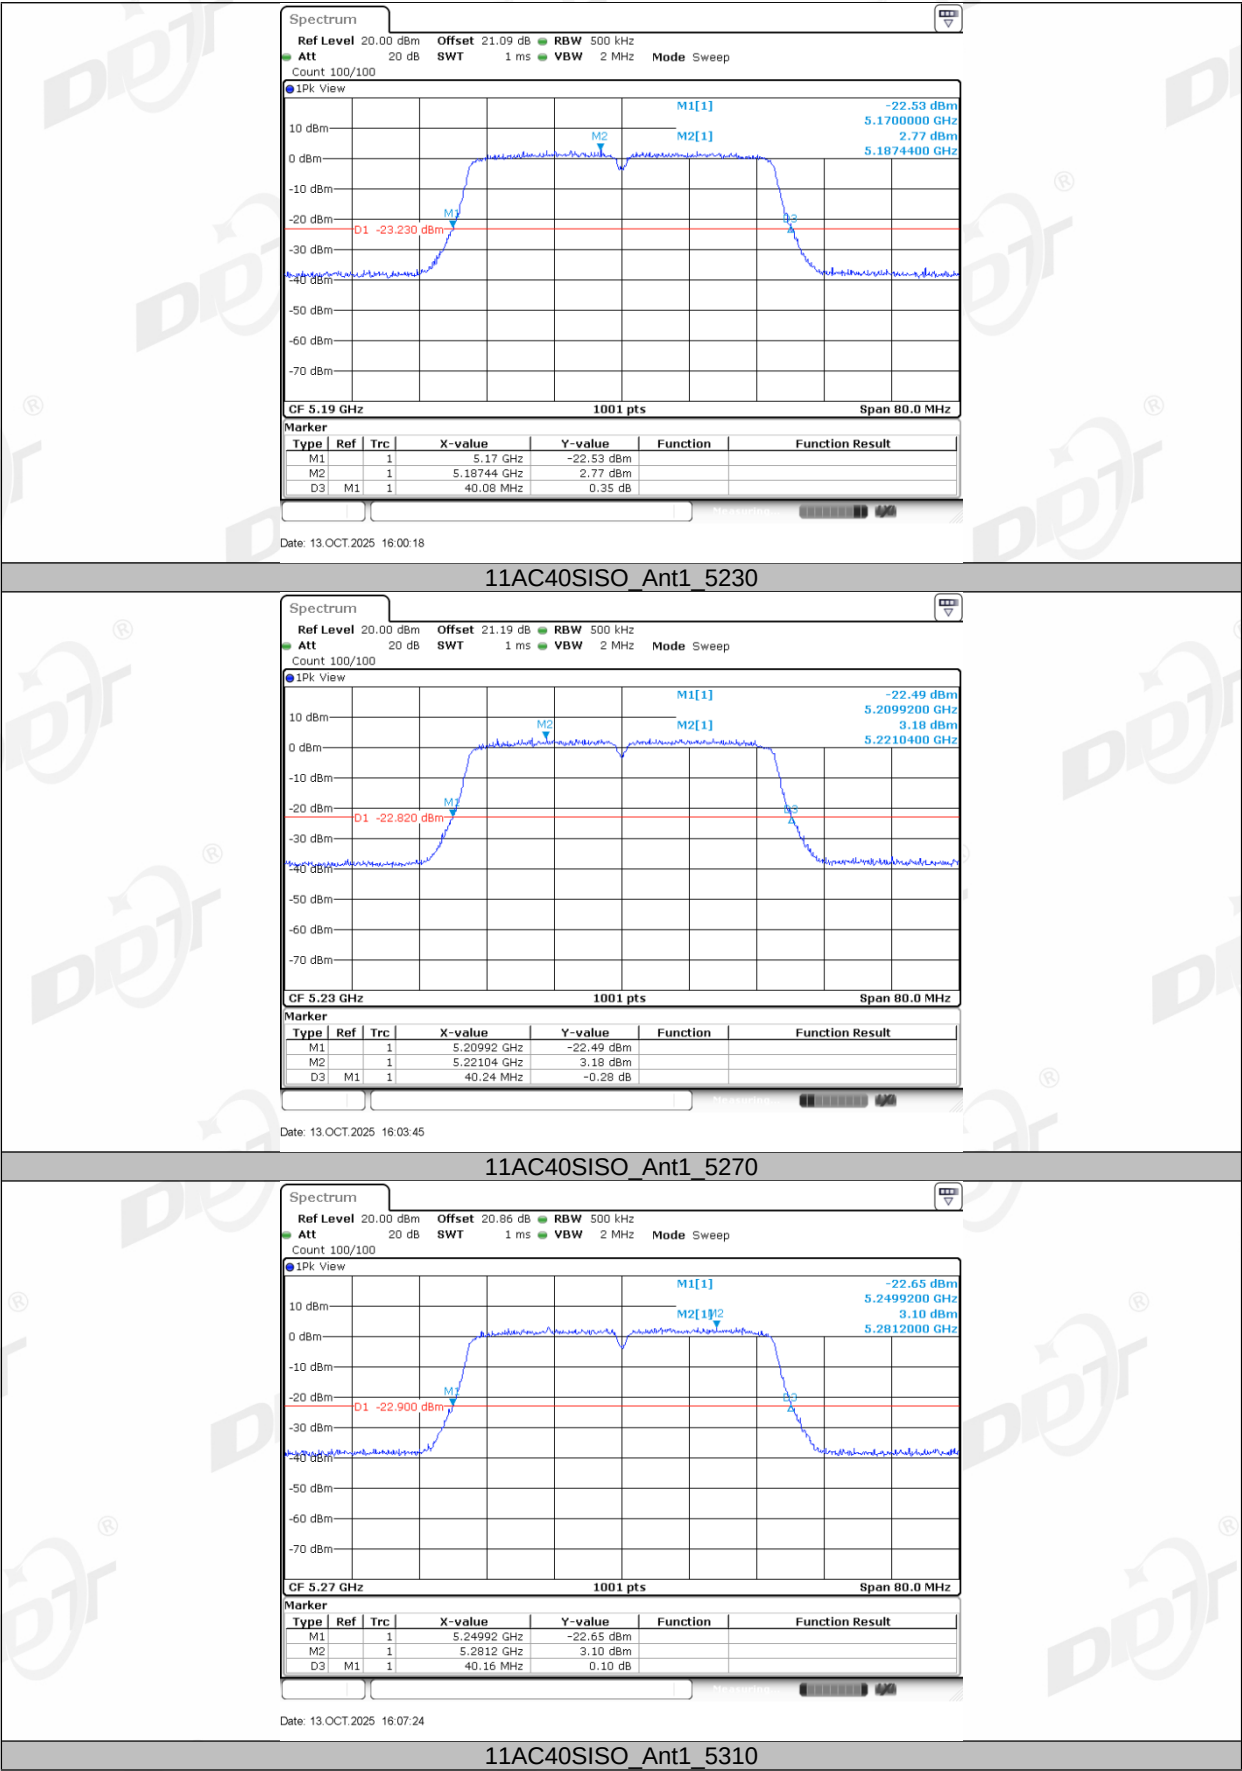


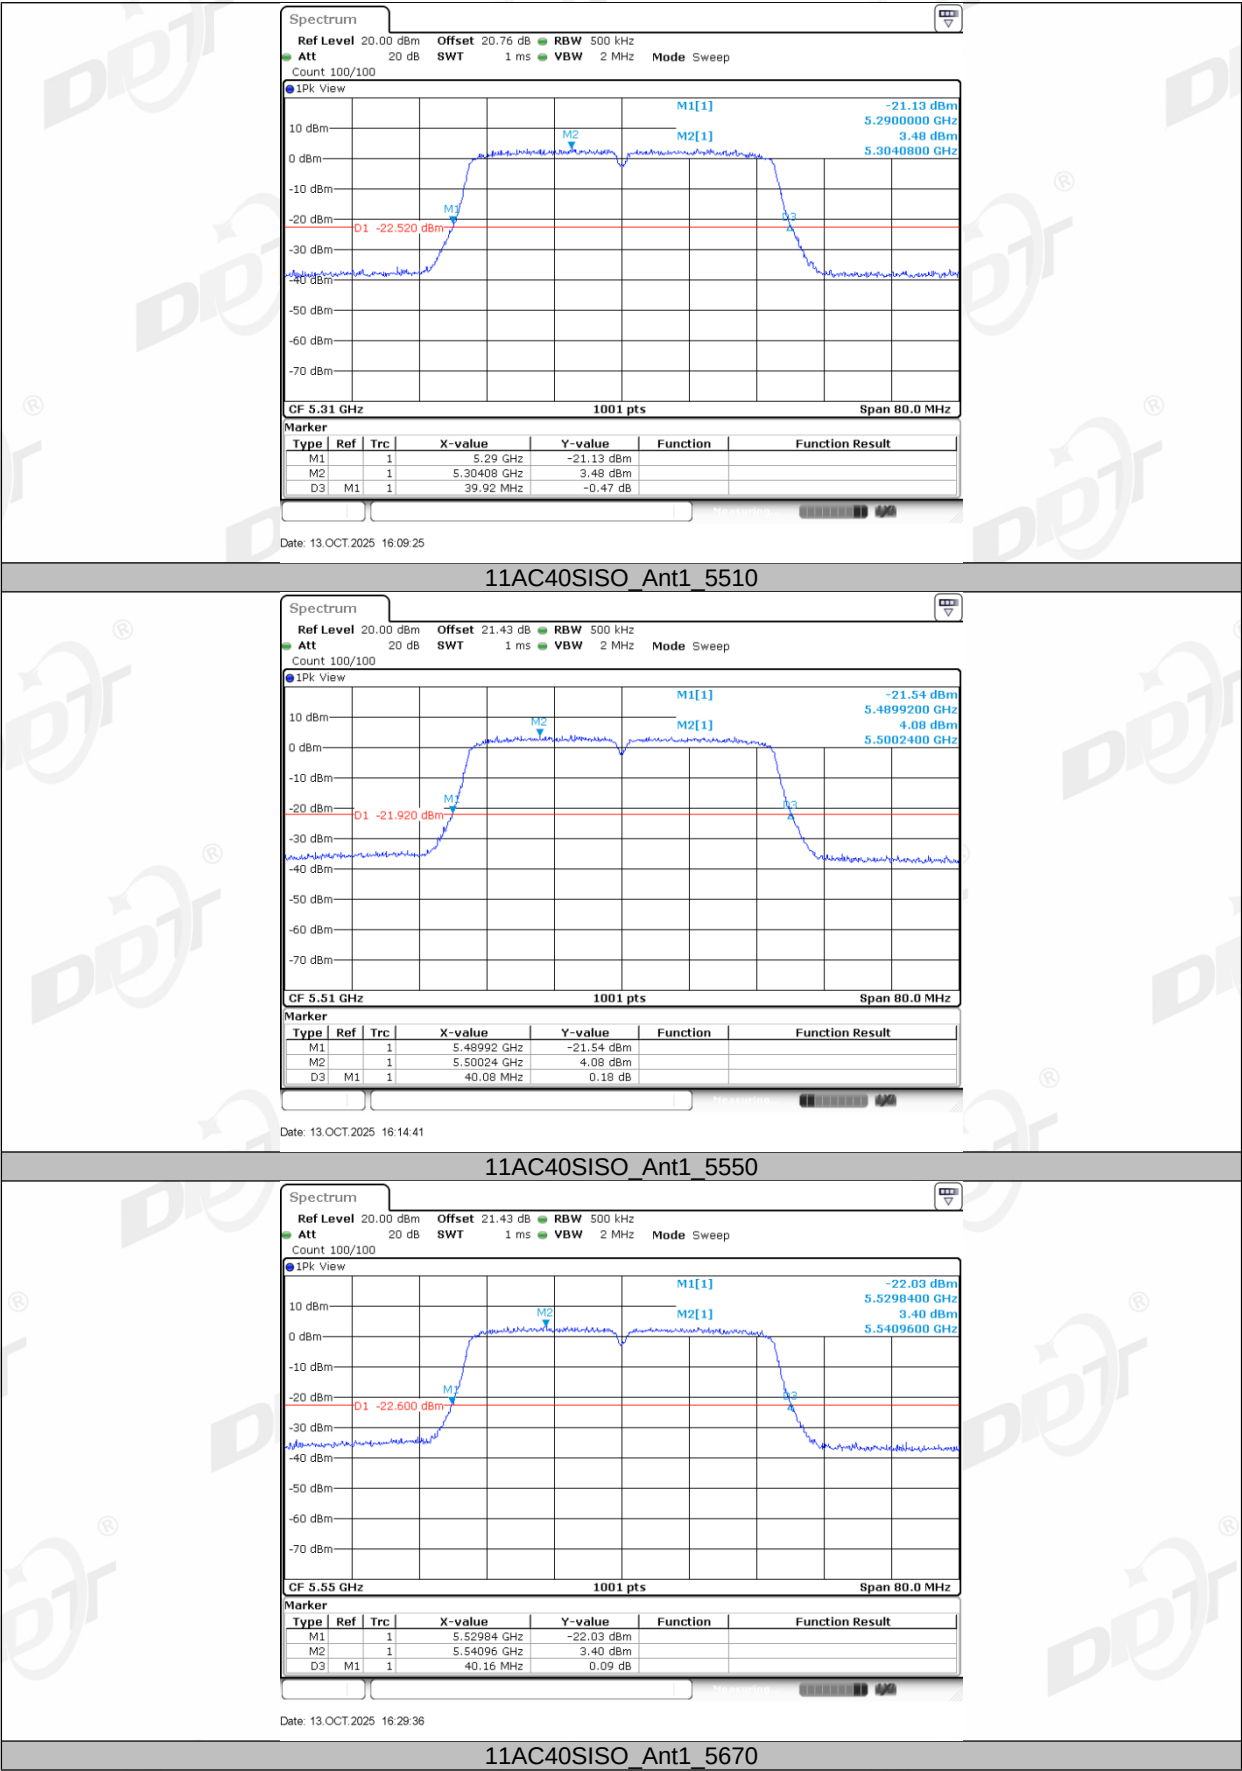


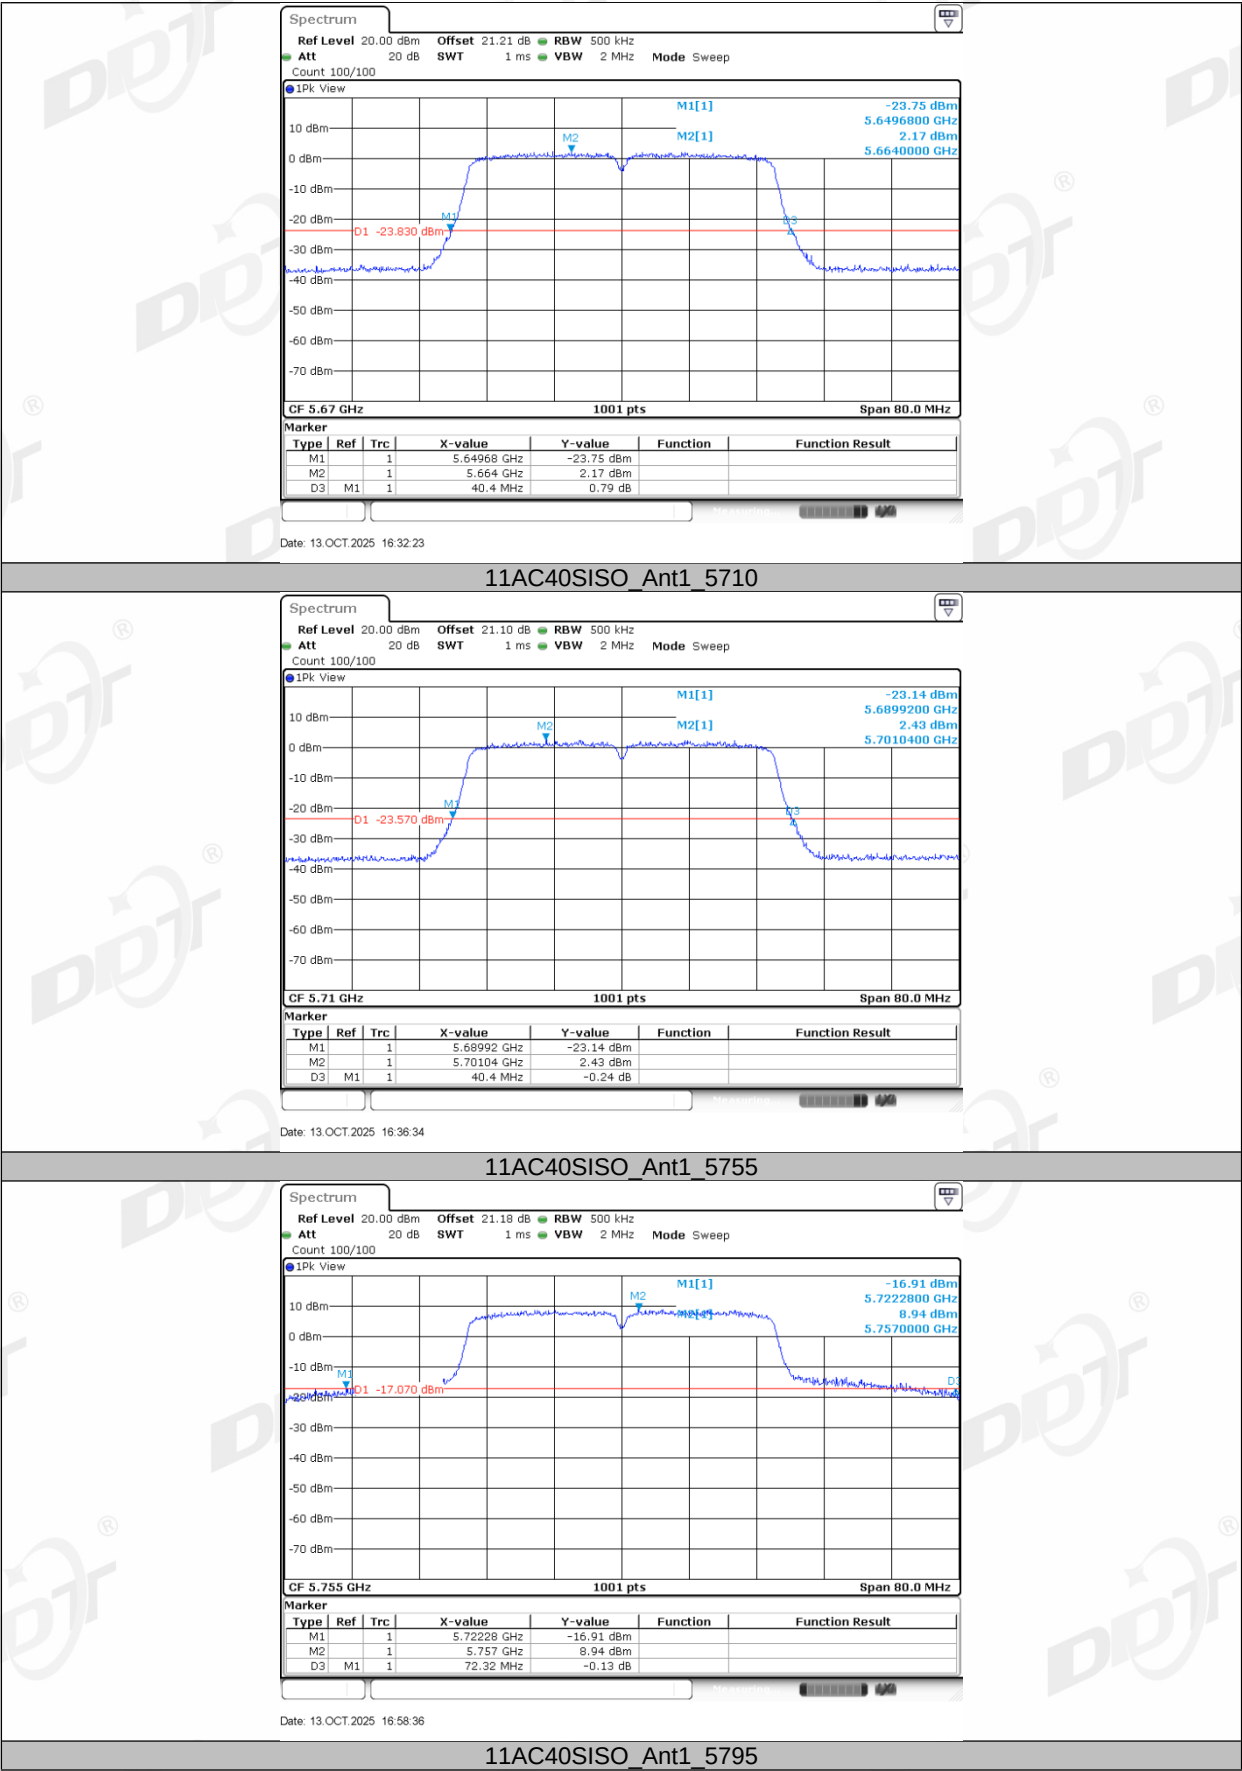


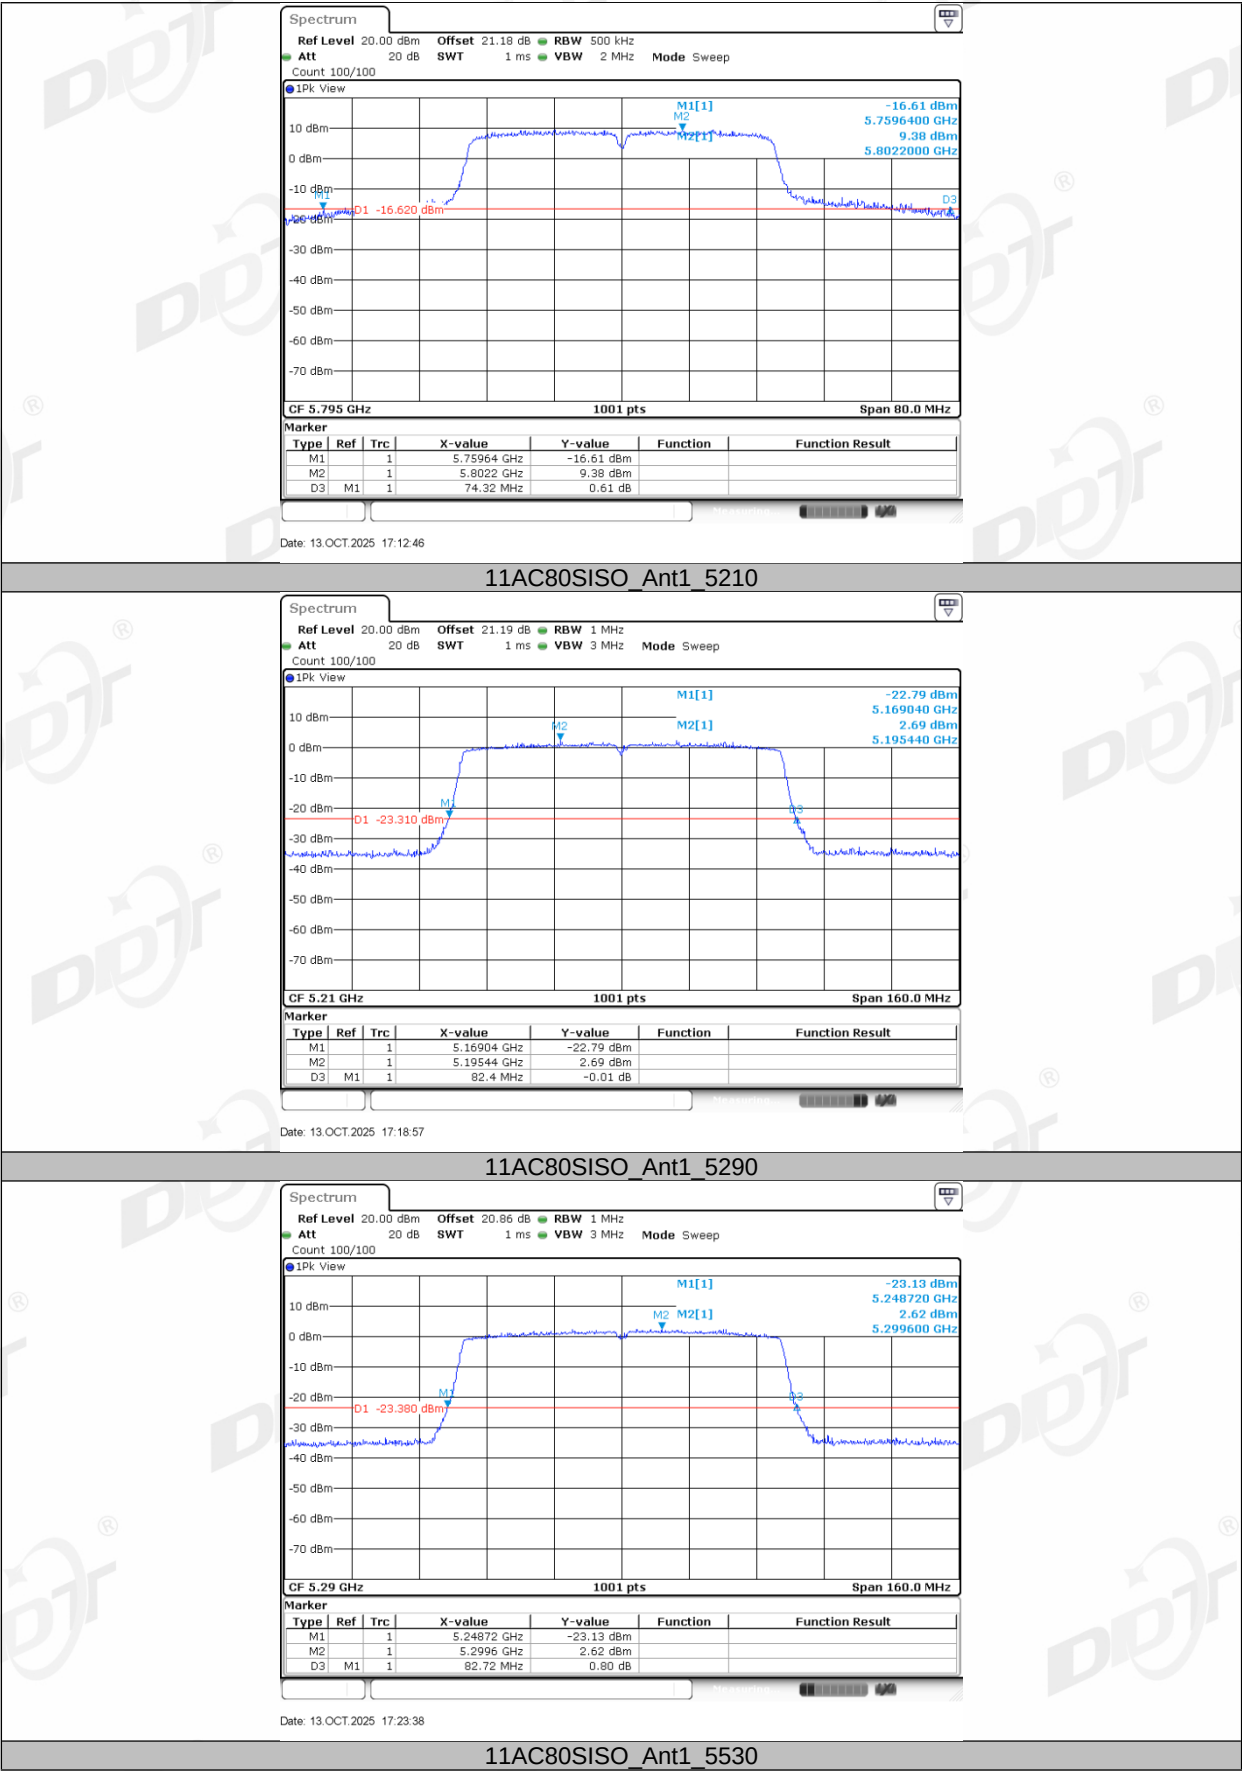


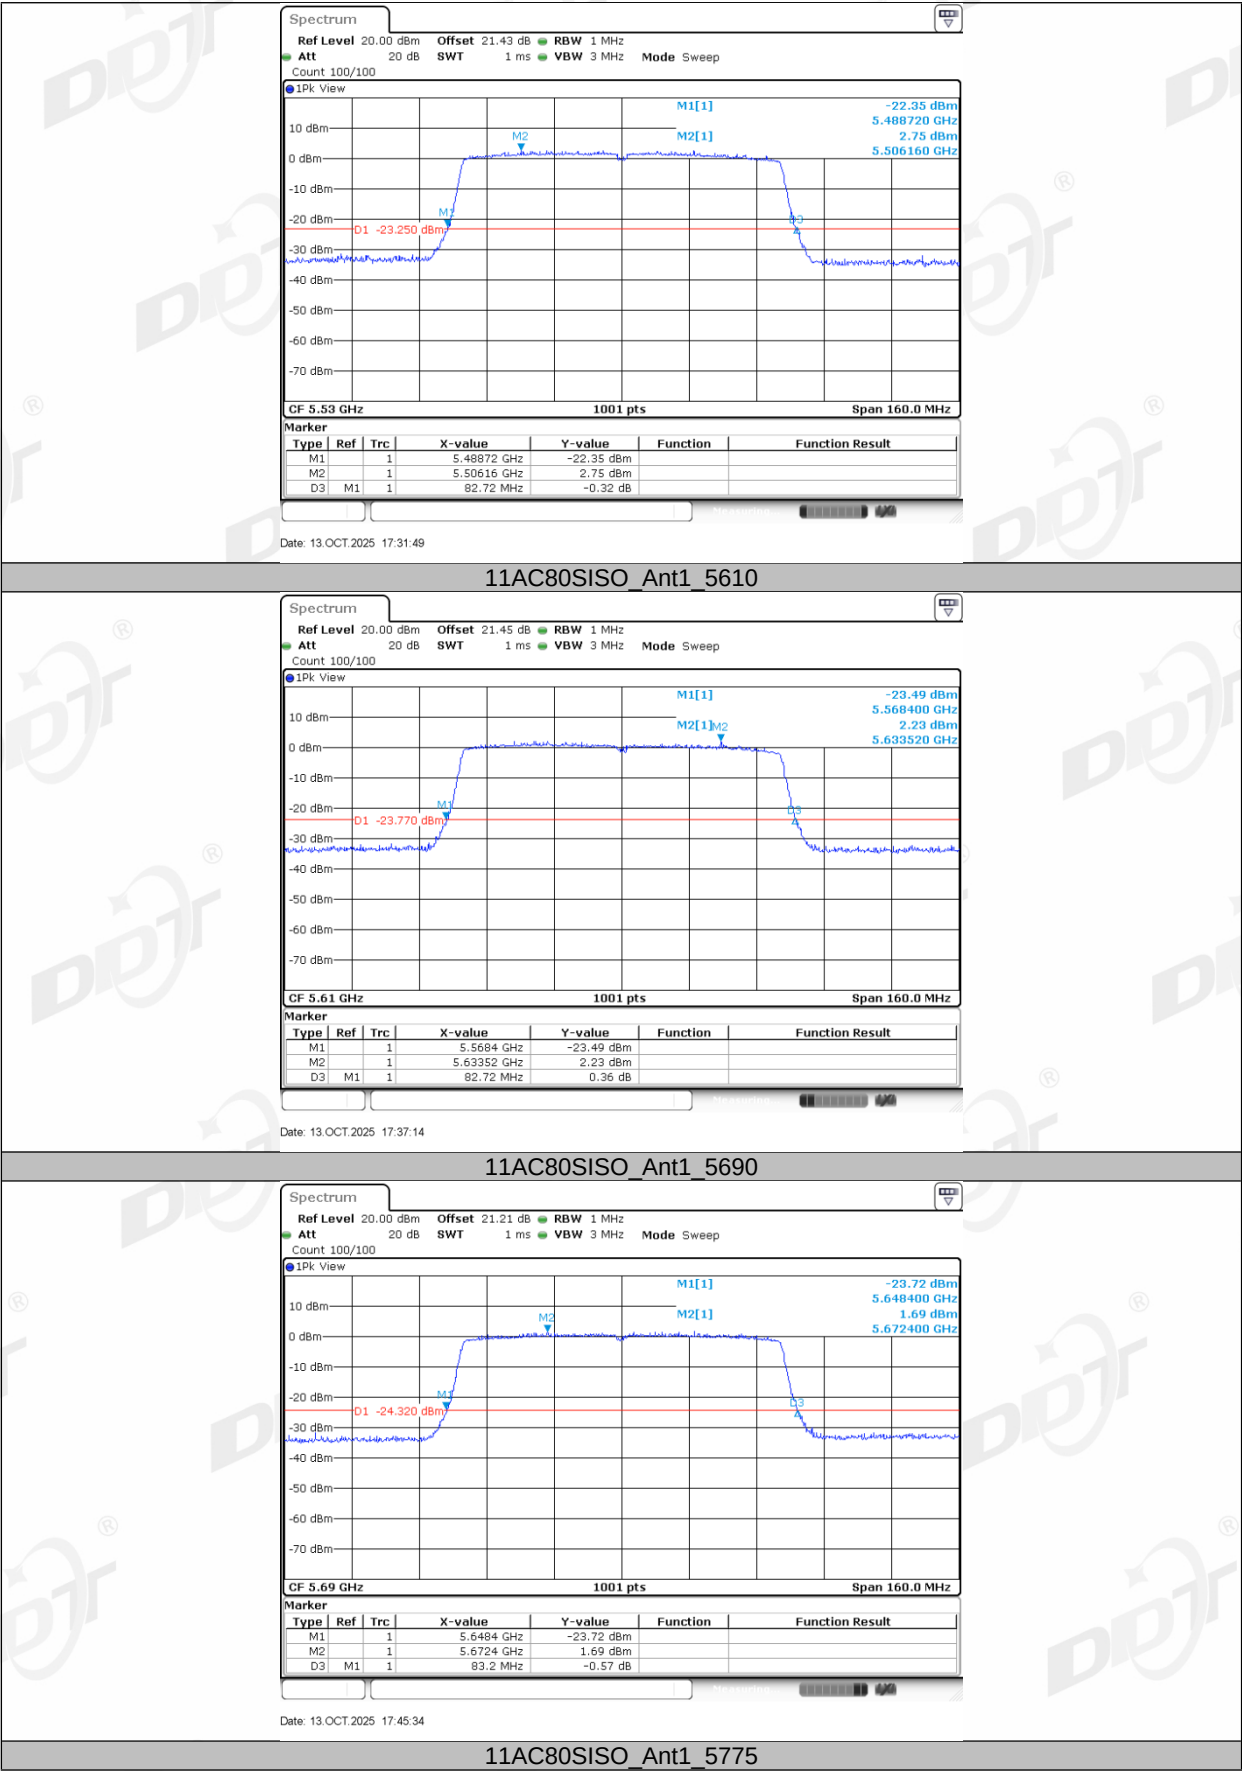


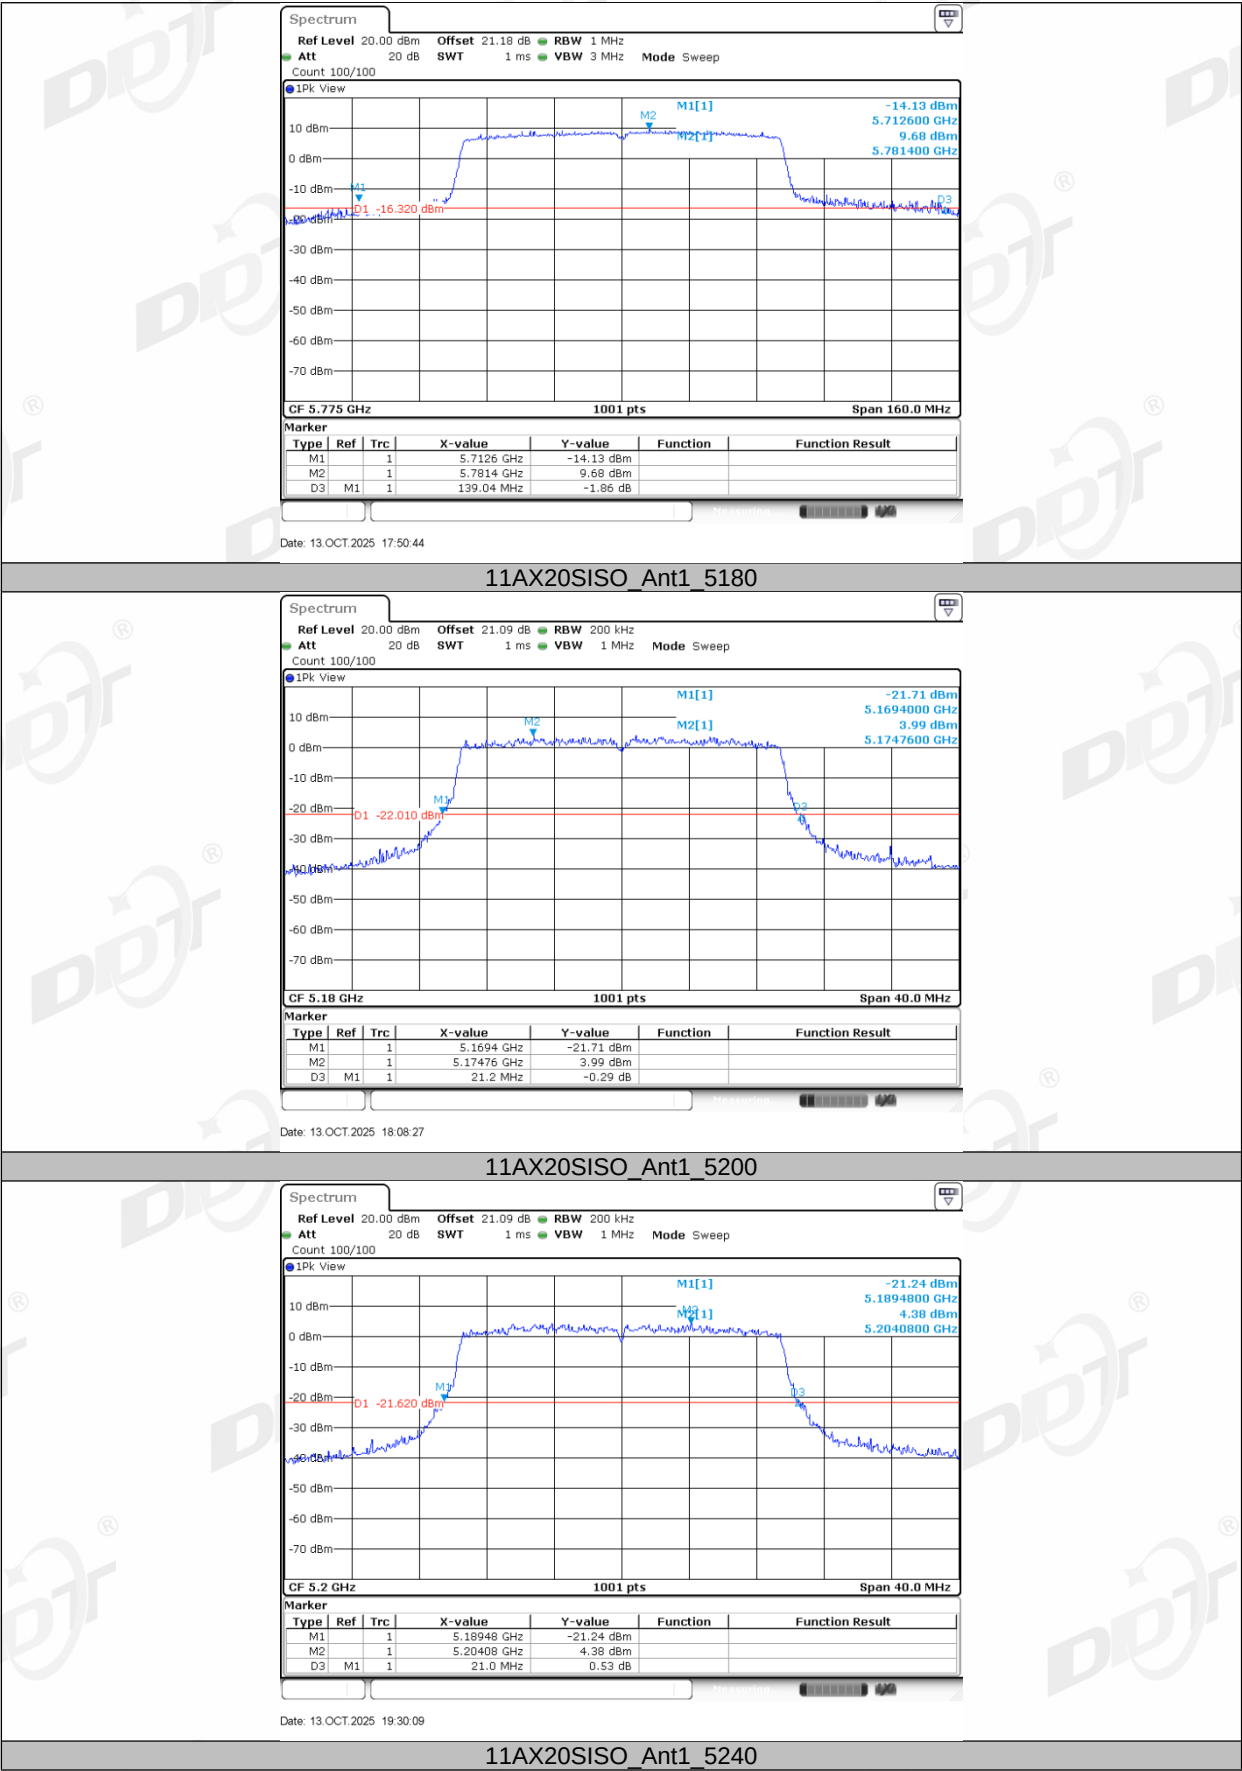


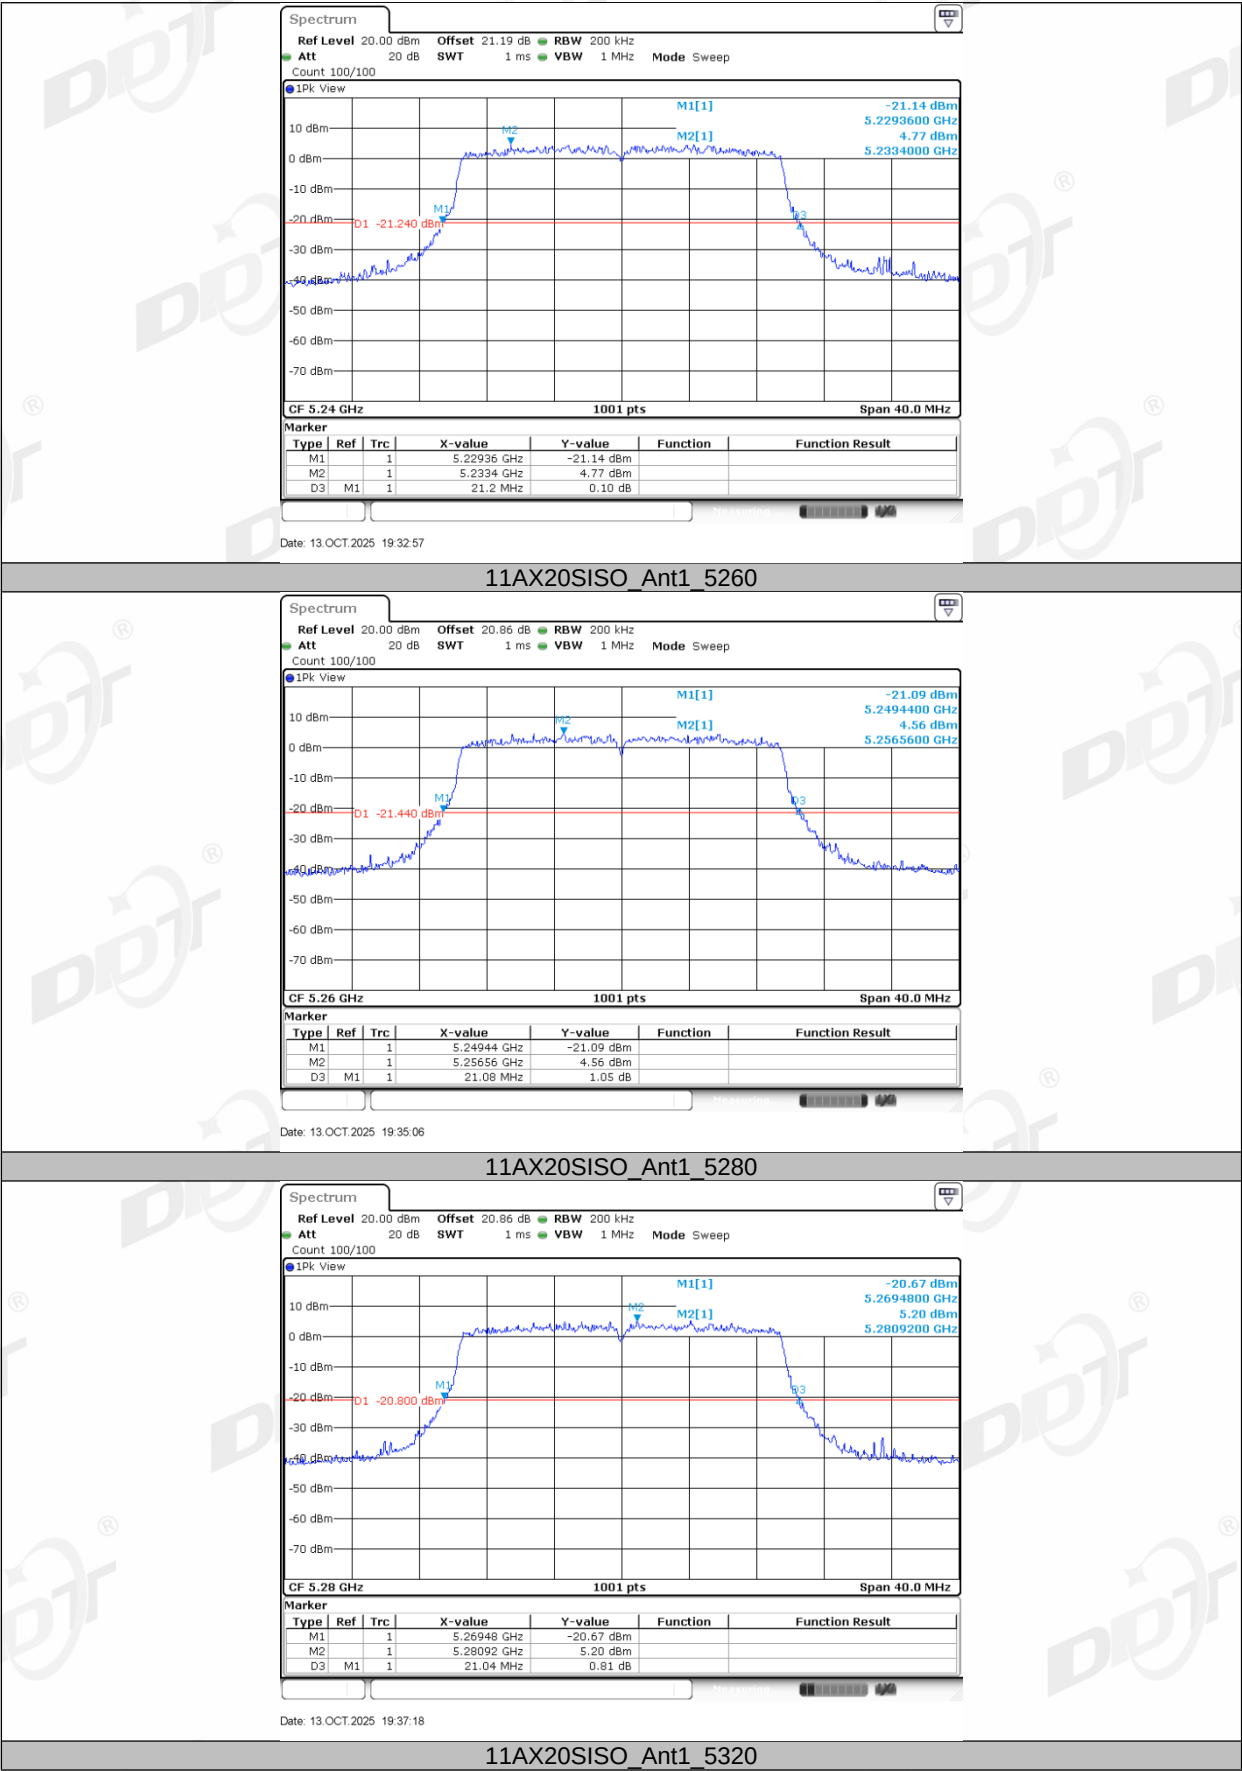


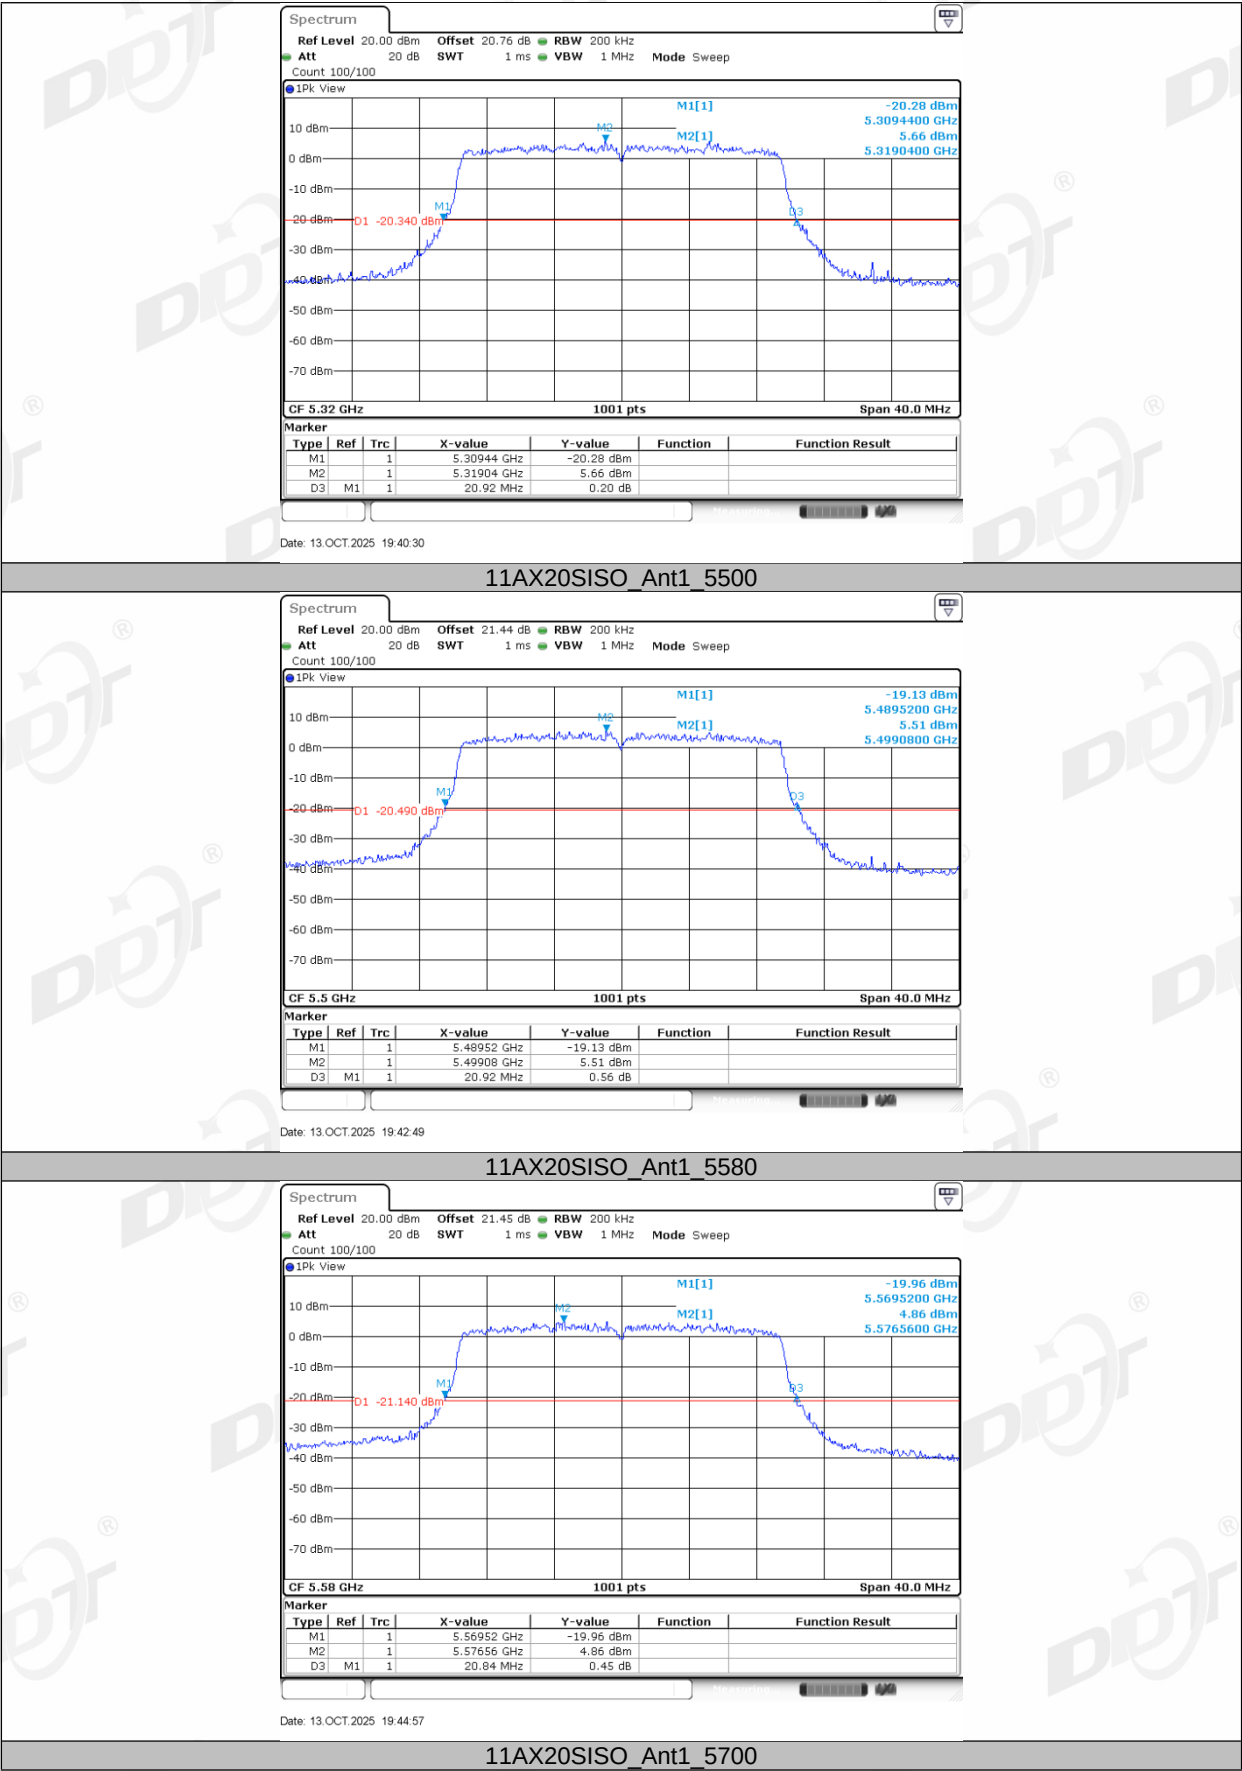


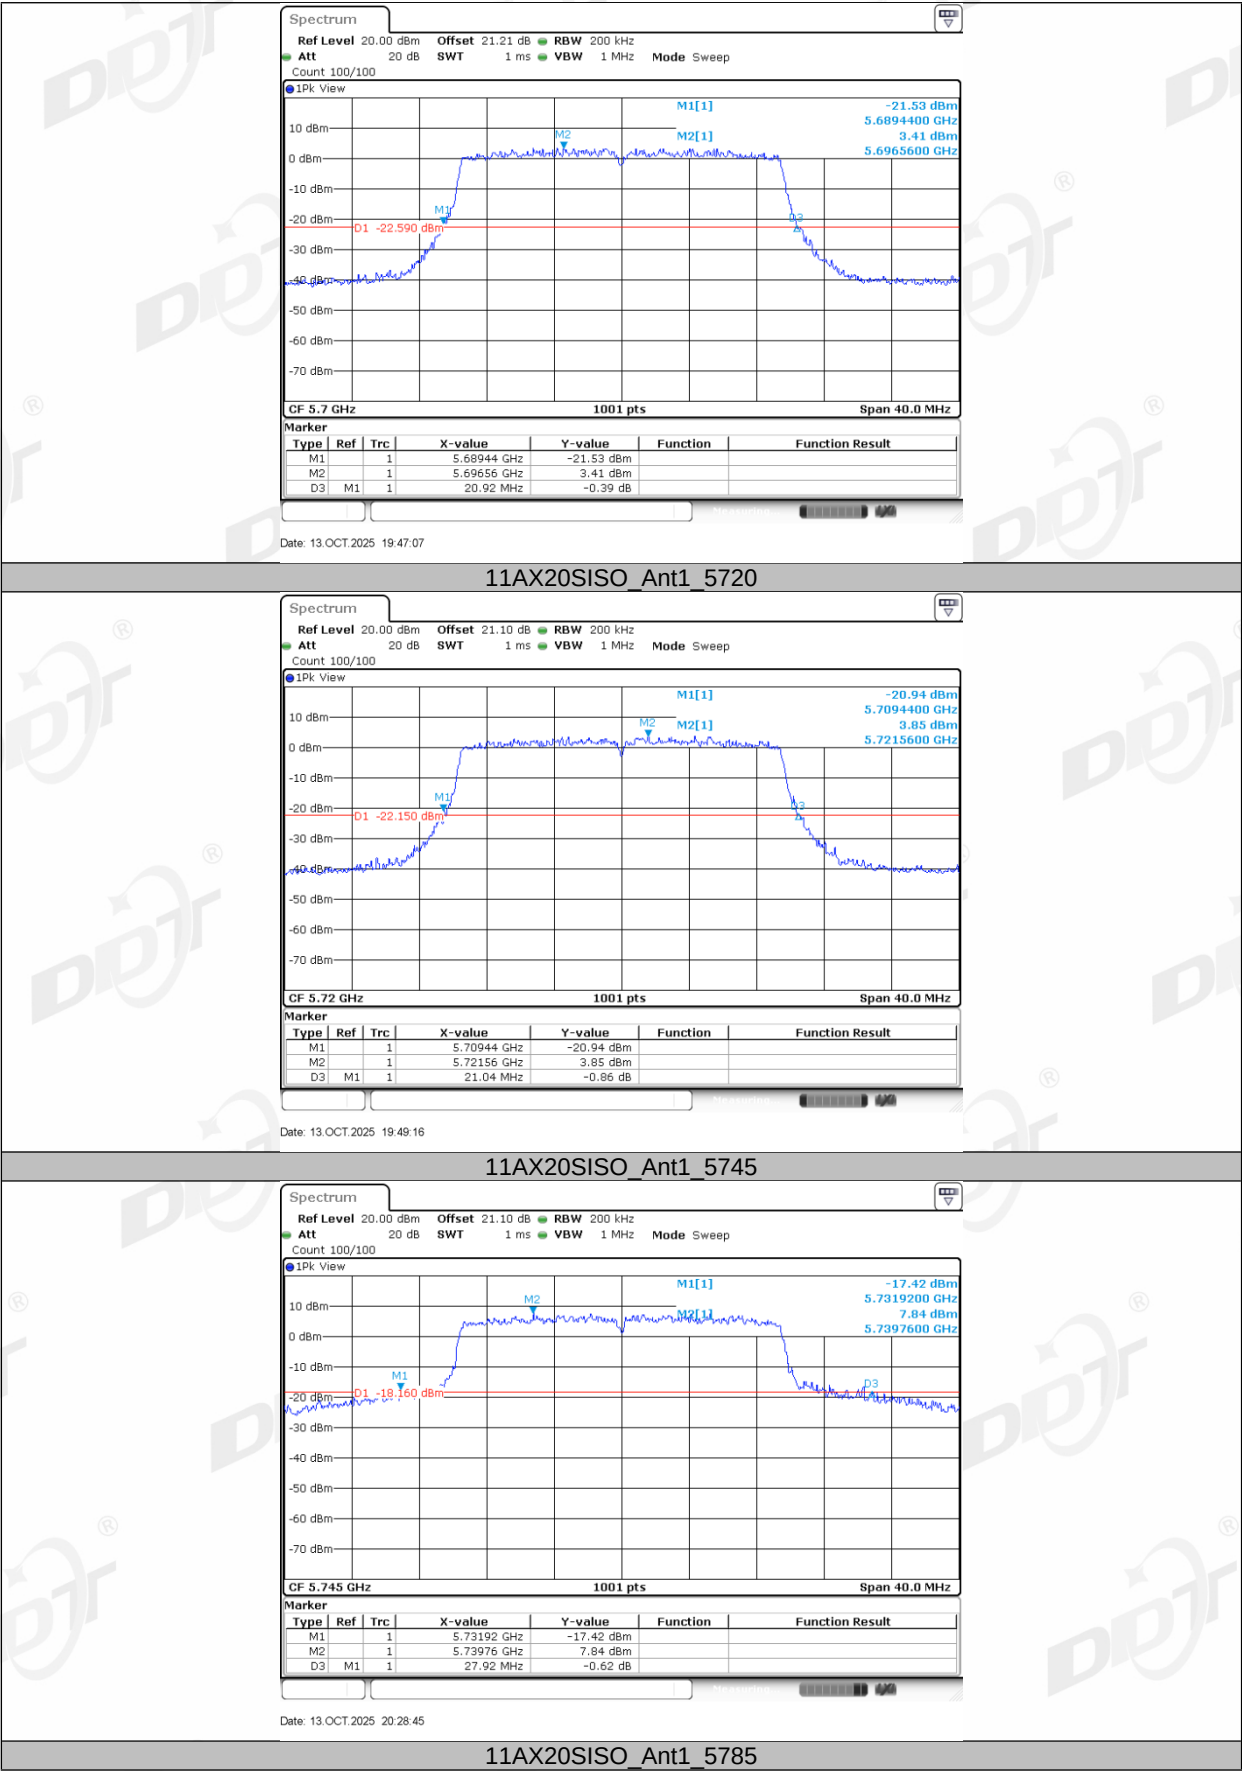


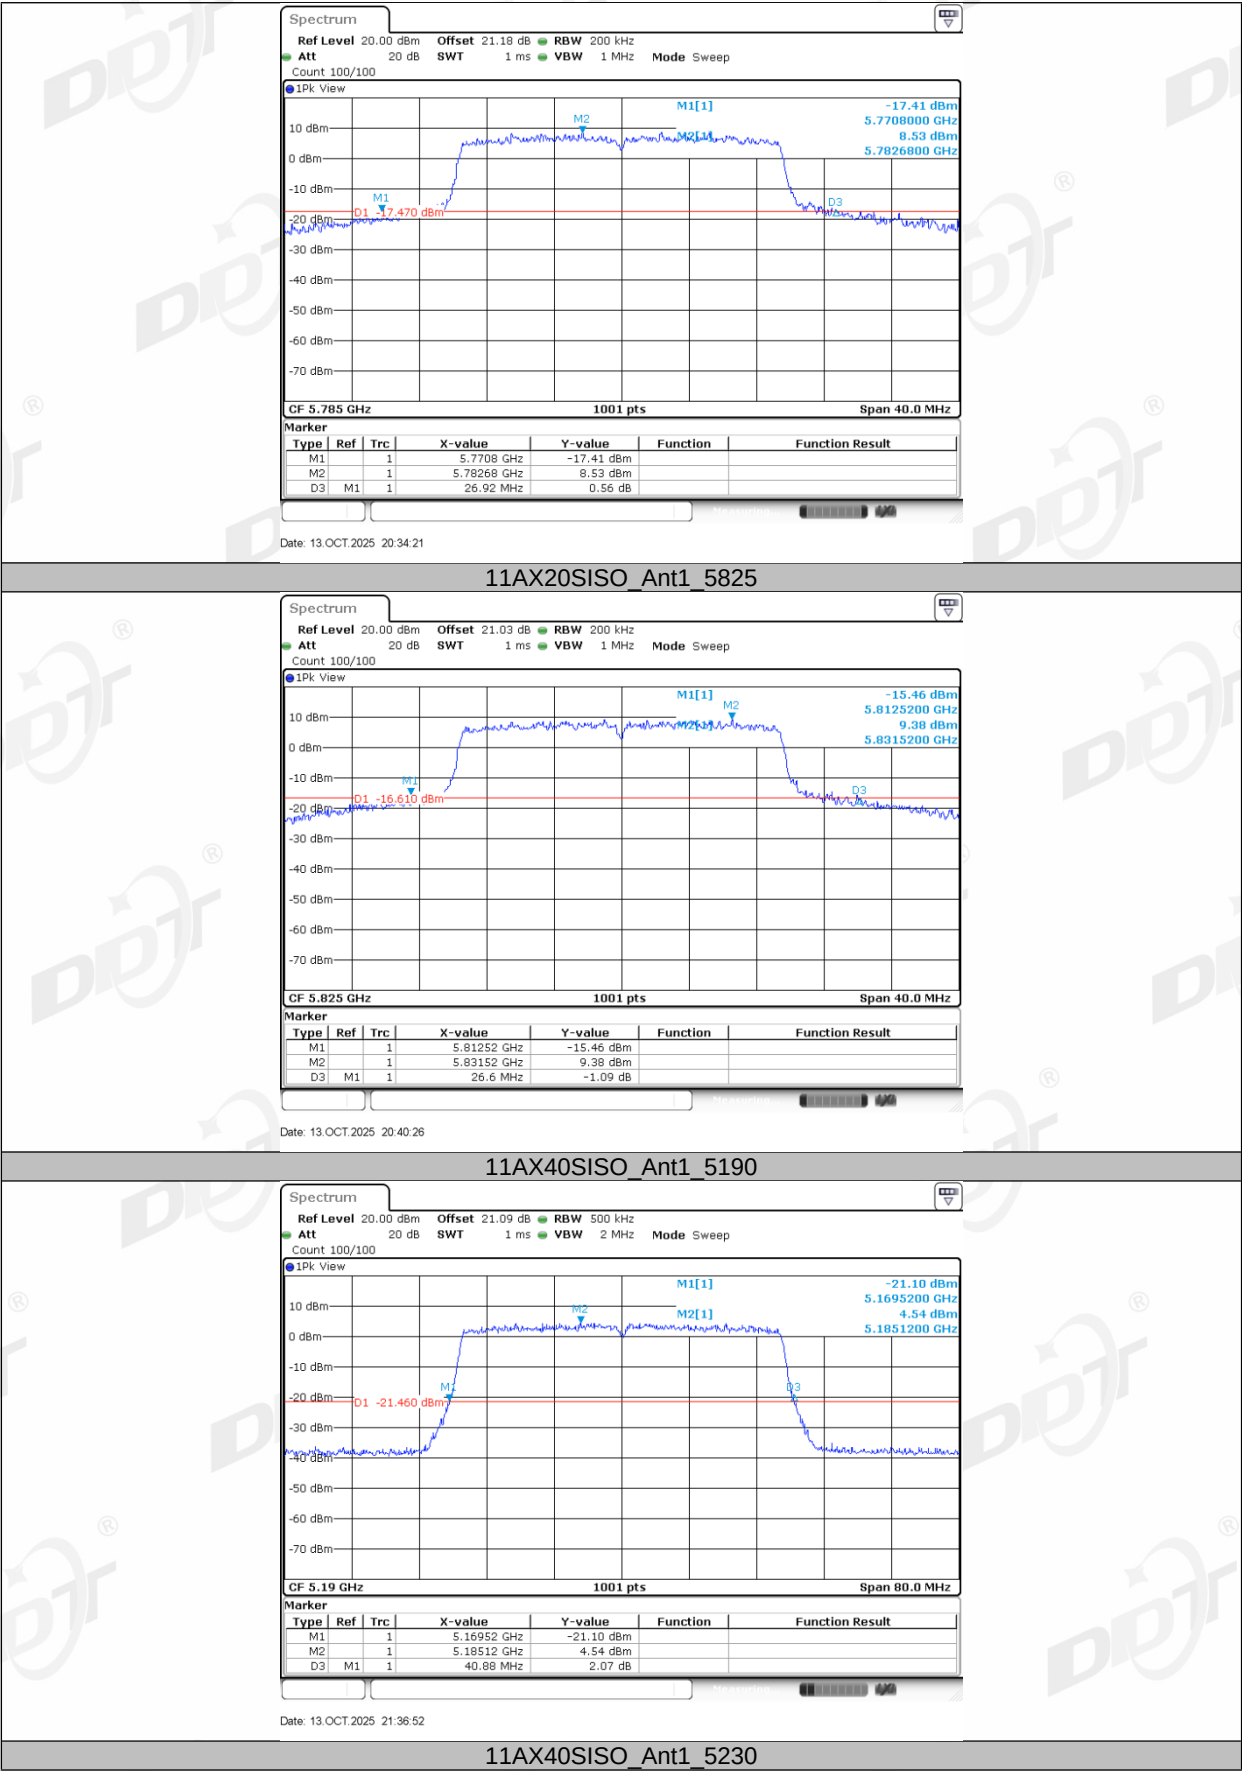


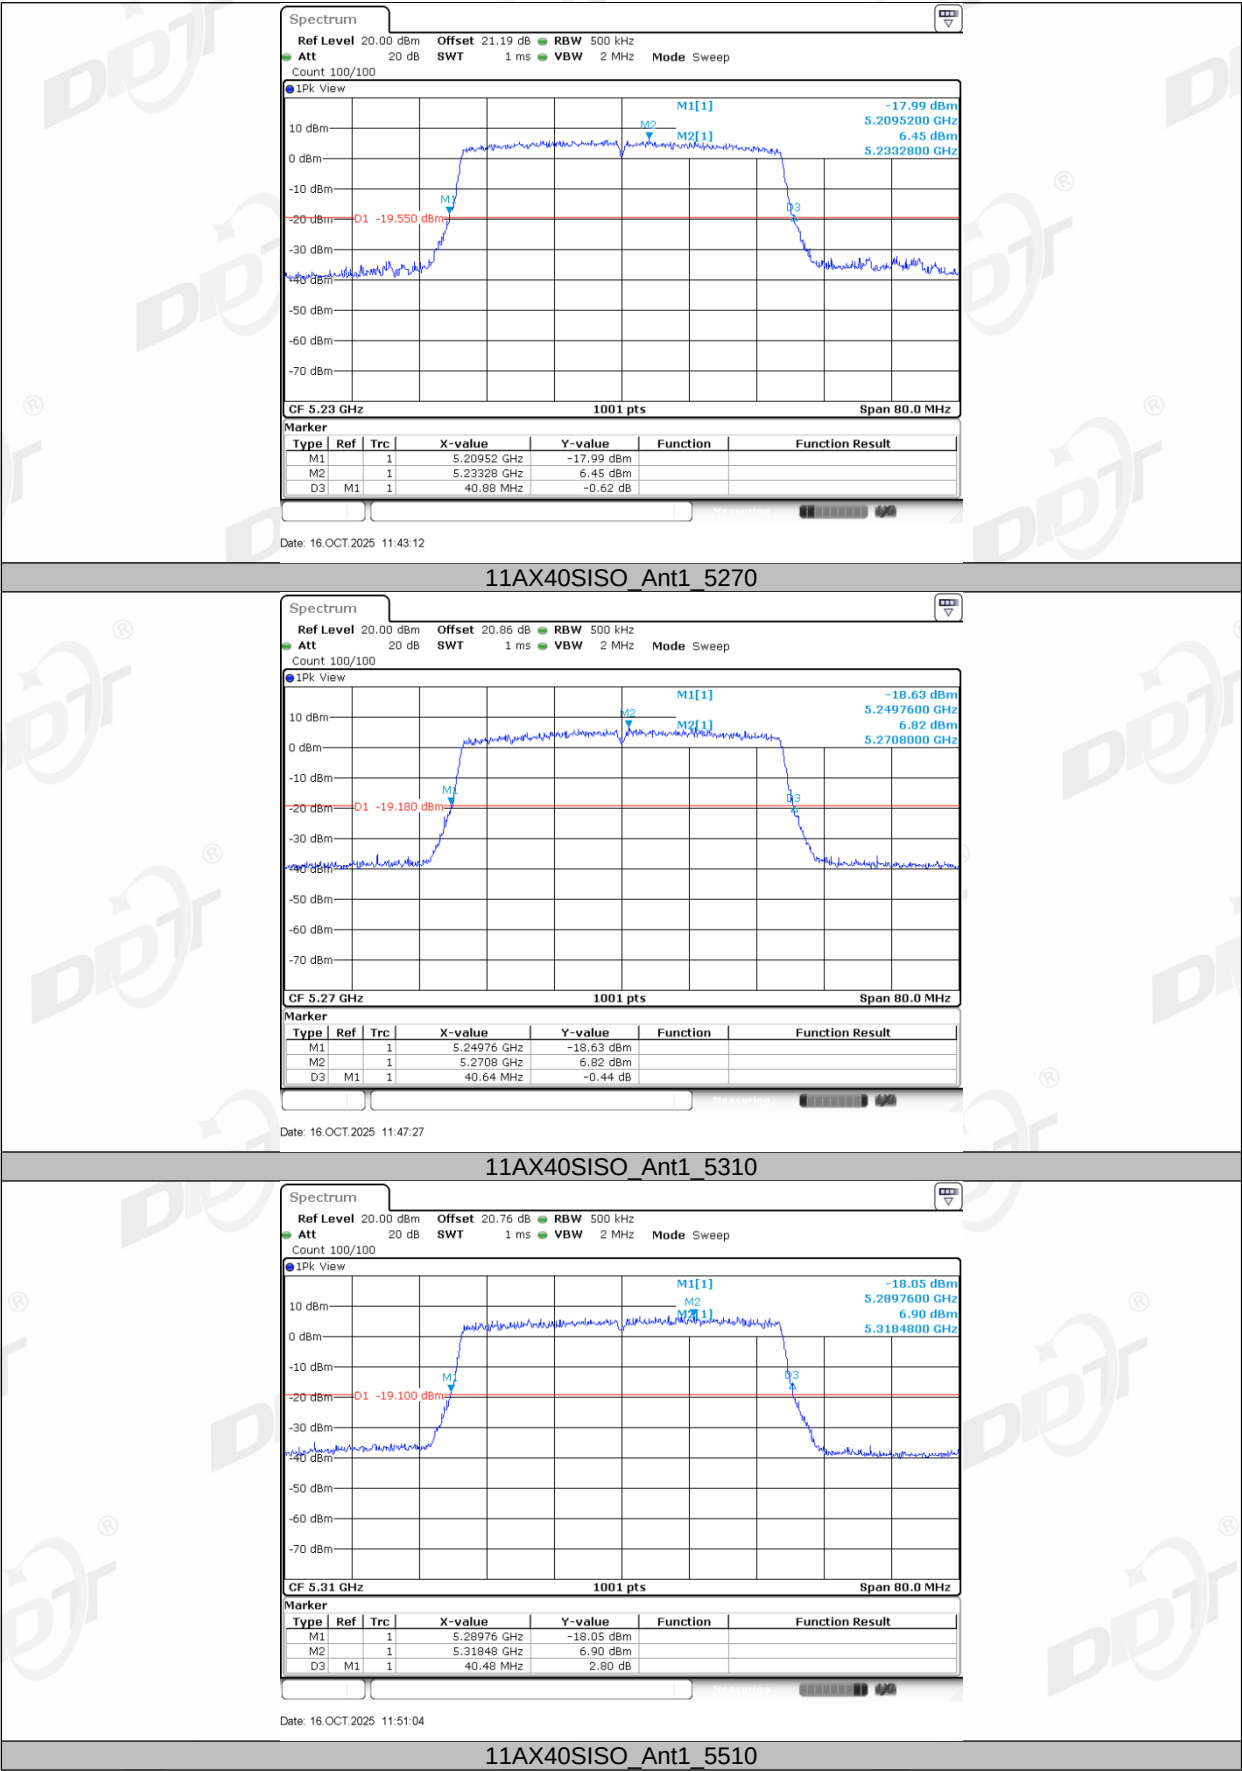

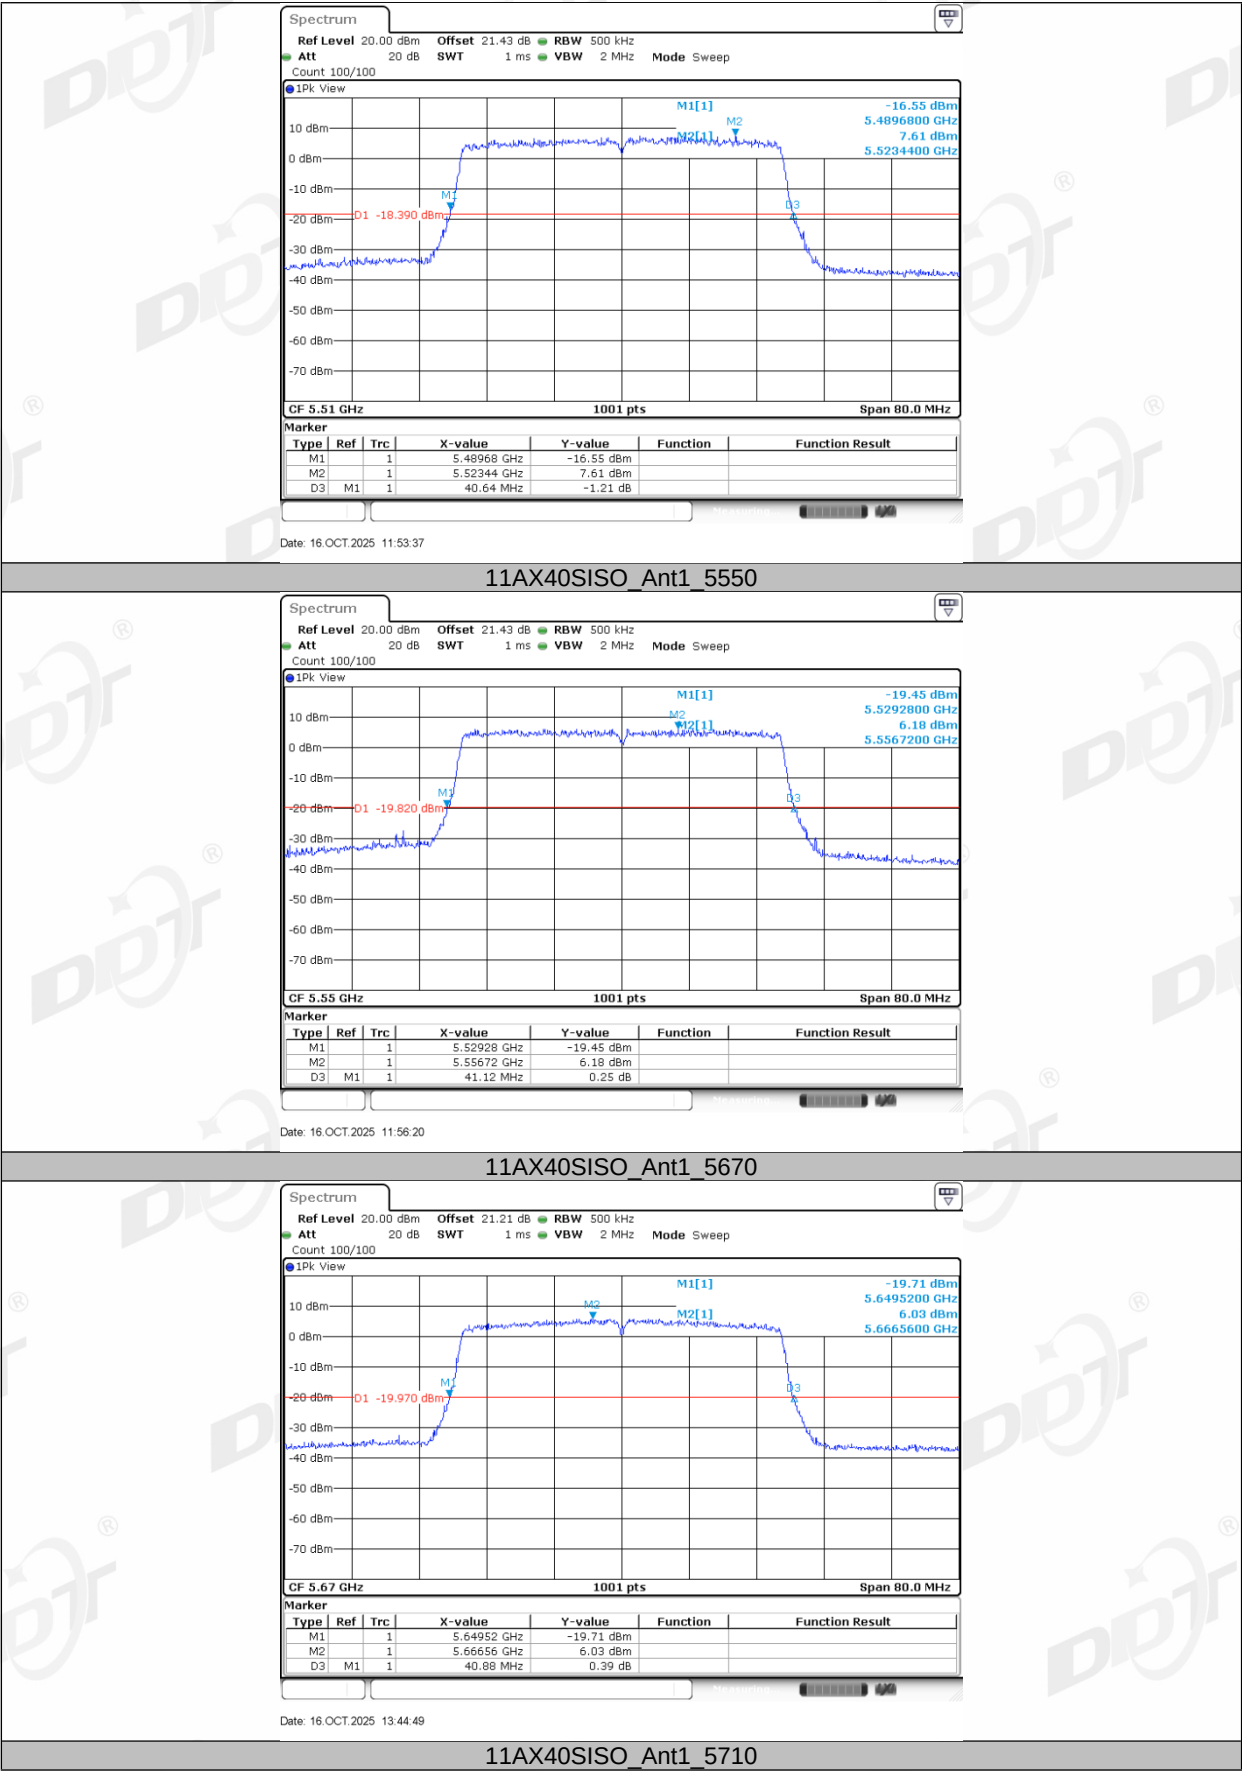

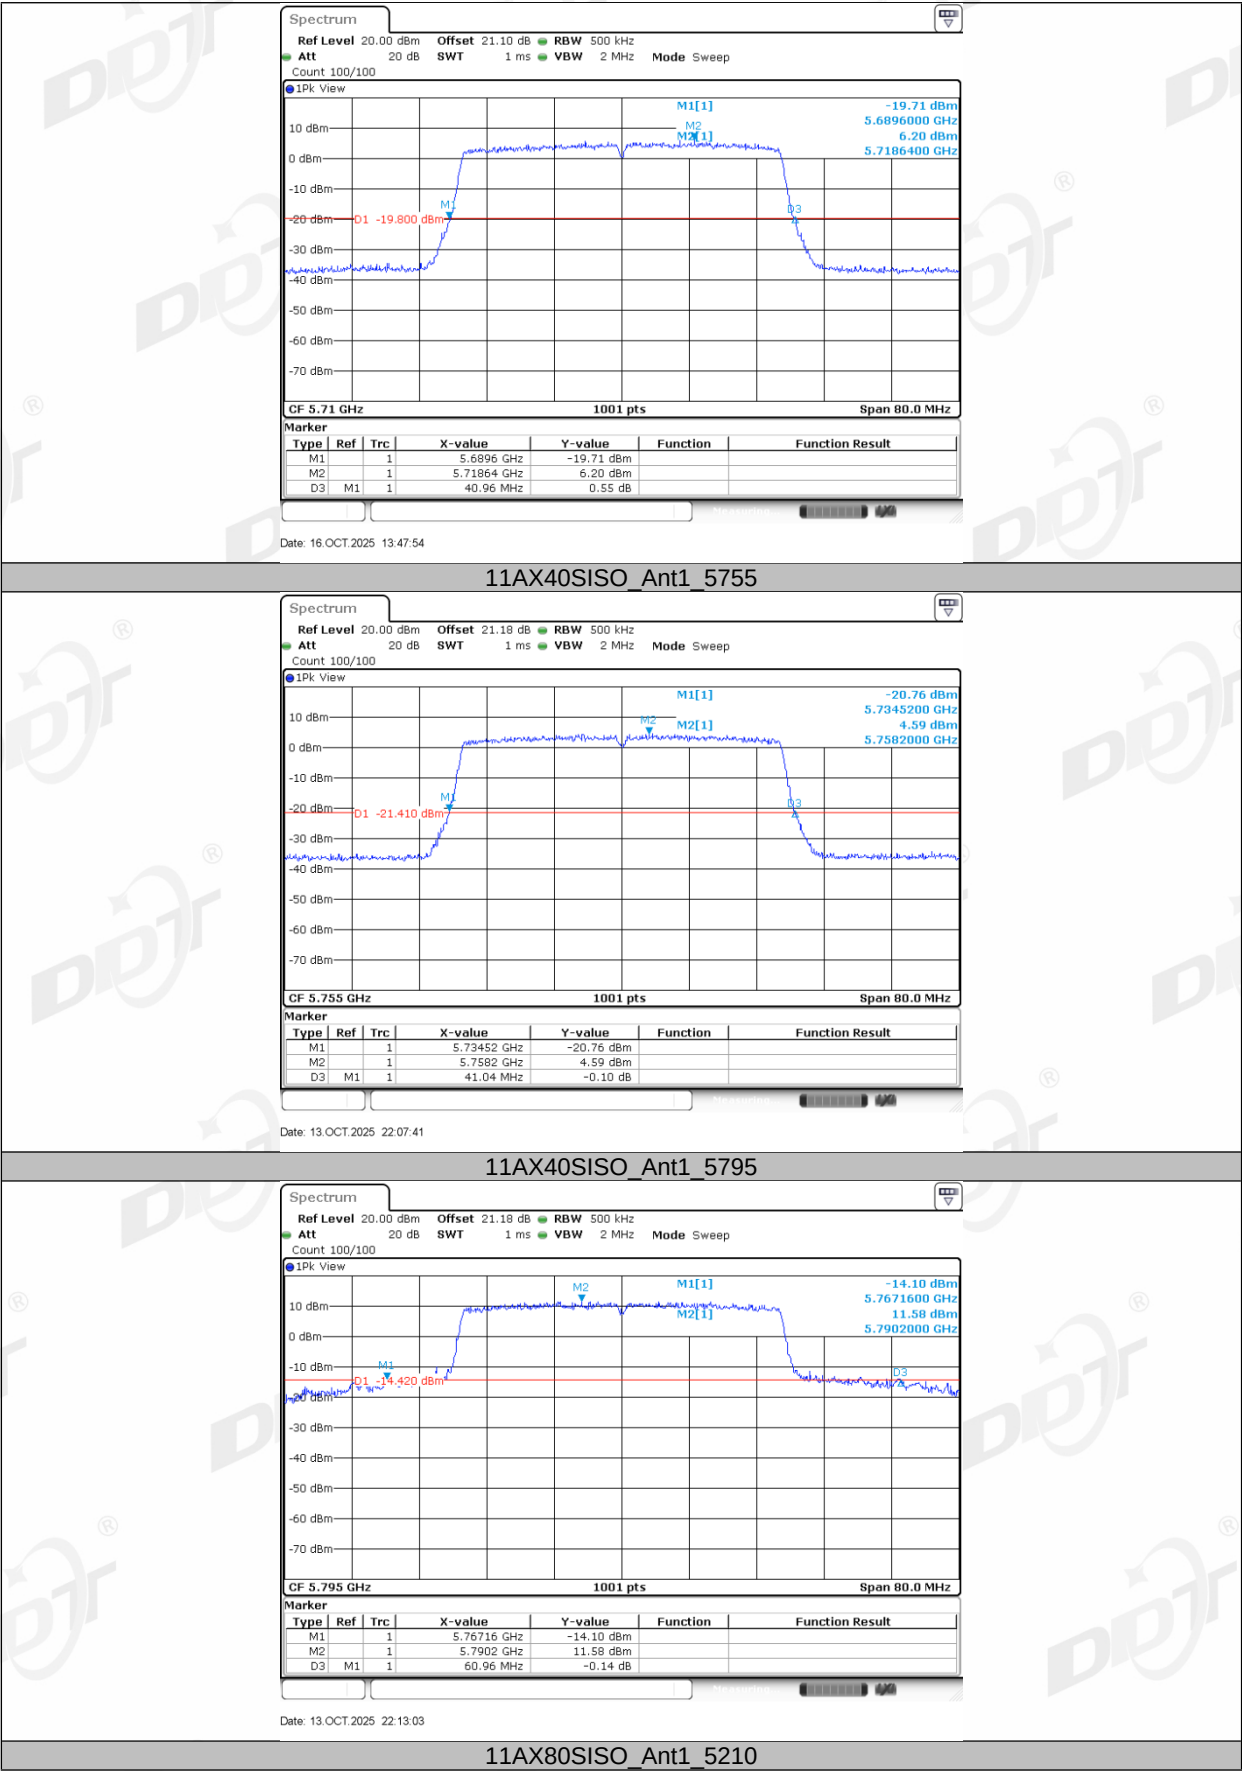


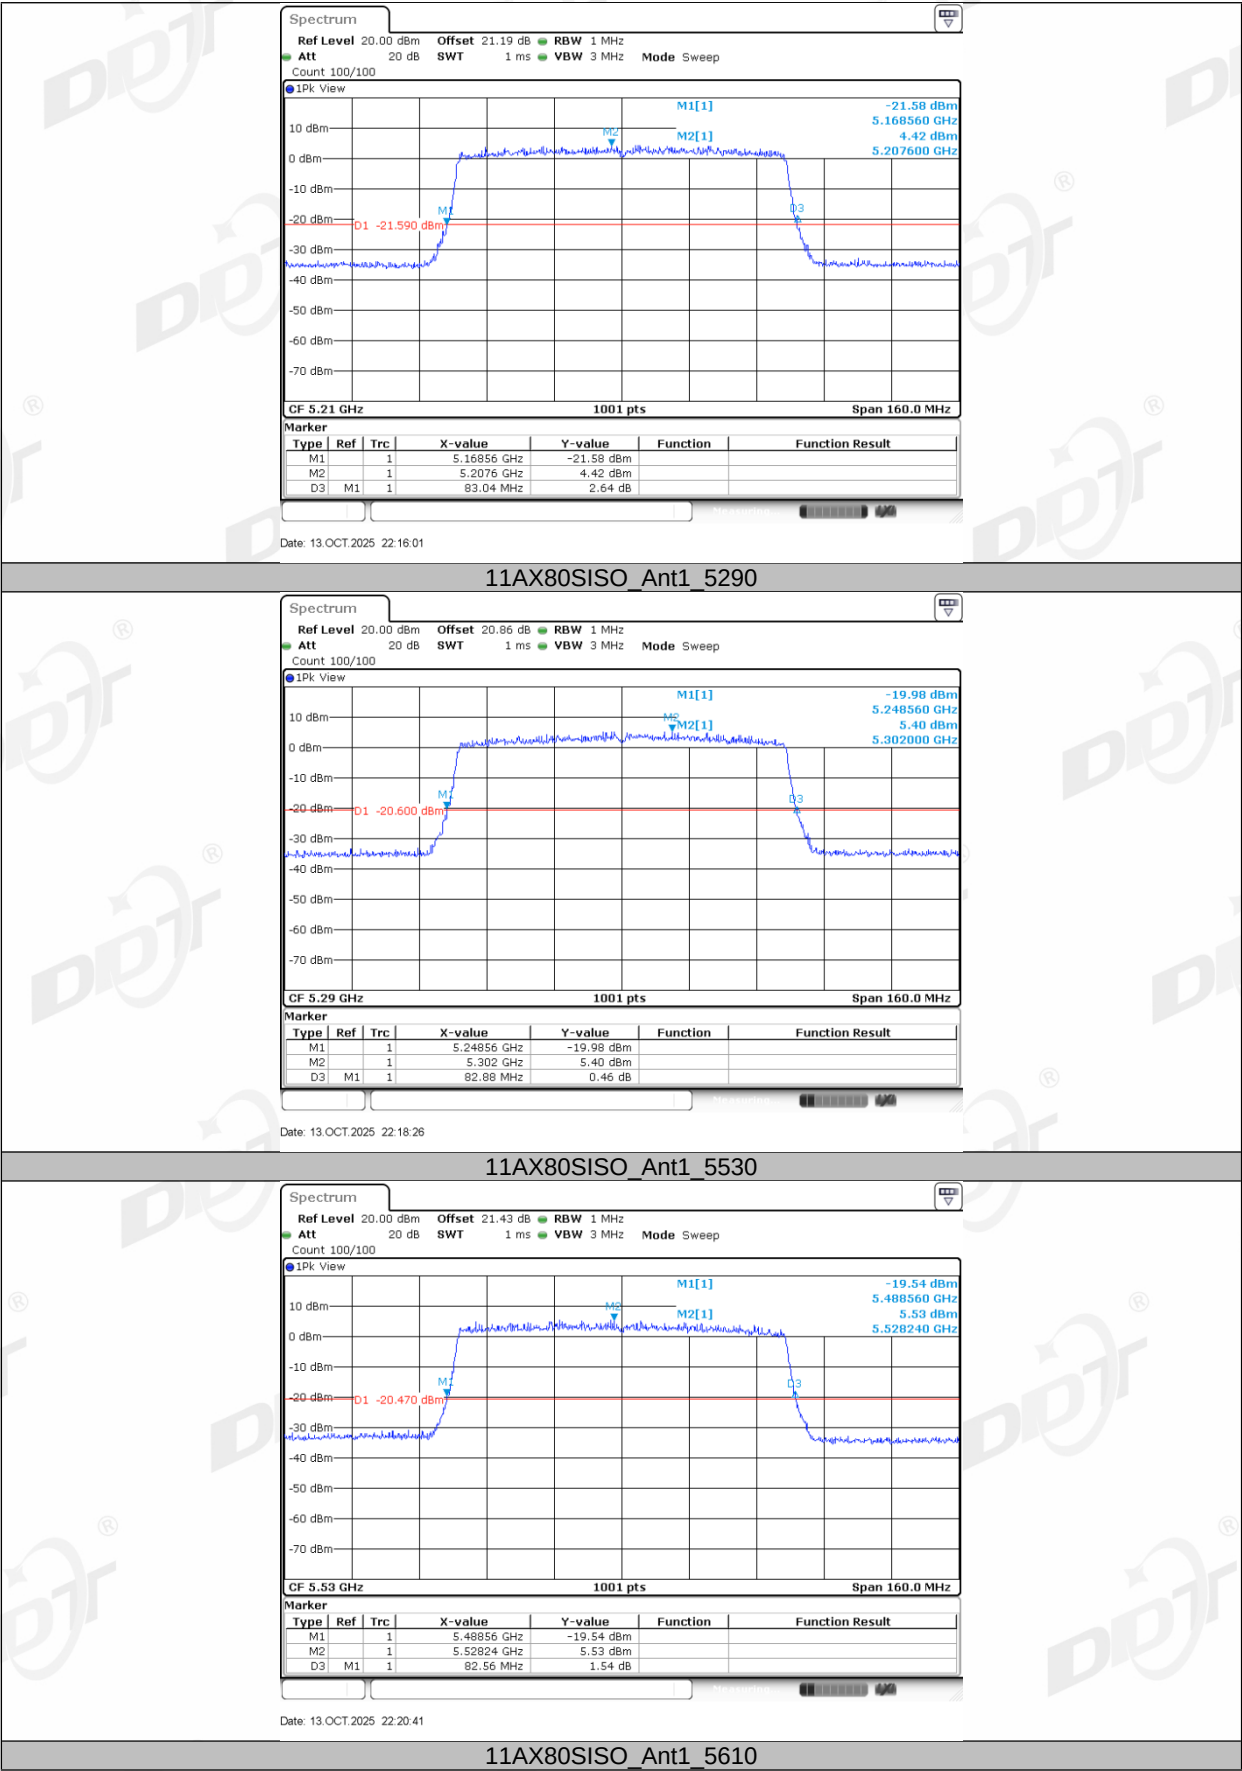

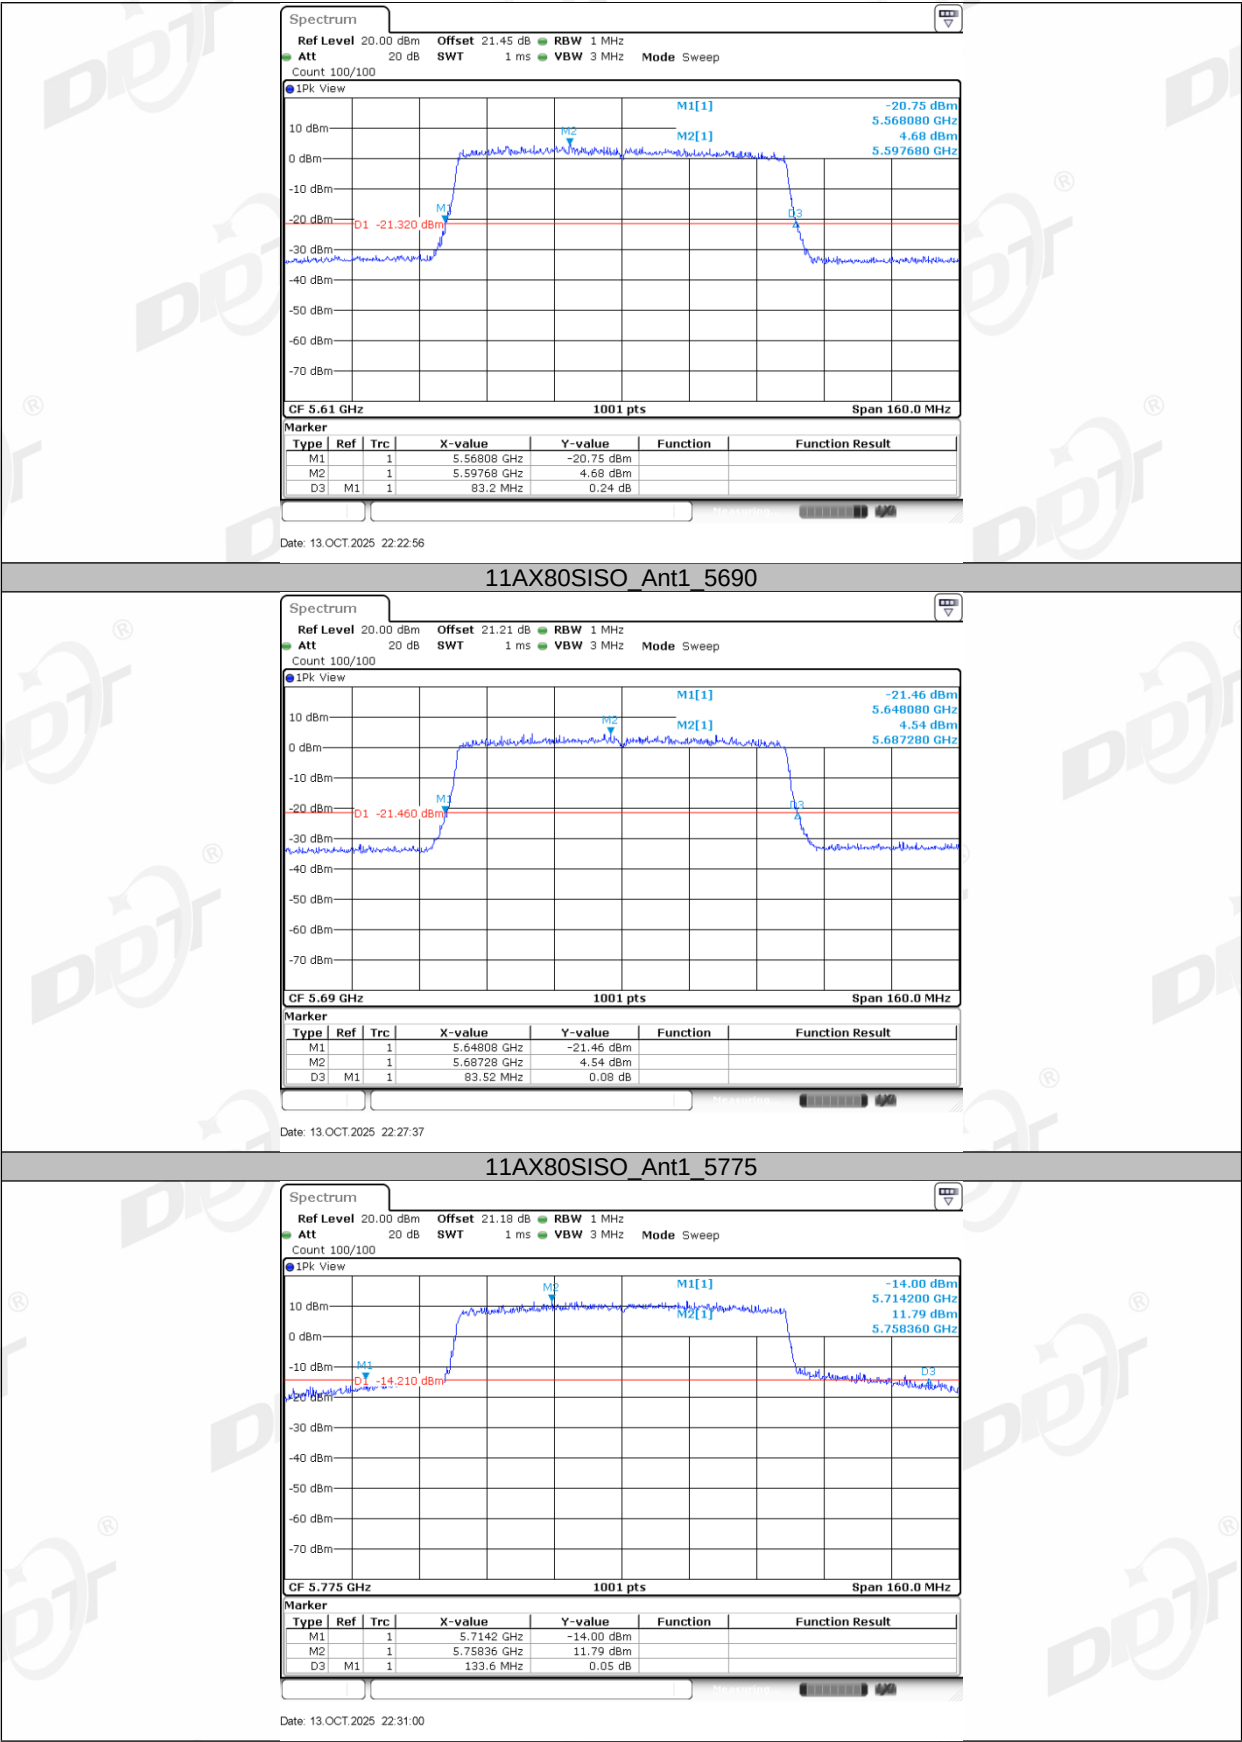

5. 6dB Bandwidth

5.1. Block diagram of test setup

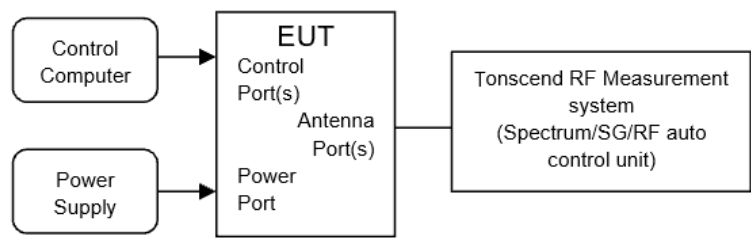

5.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.